



Junos[®] OS for EX Series Ethernet Switches

Routing Options Feature Guide for EX4600 Switches

Release

14.1X53



Modified: 2016-11-08

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Junos[®] OS for EX Series Ethernet Switches Routing Options Feature Guide for EX4600 Switches
Release 14.1X53
Copyright © 2016, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	xiii
	Documentation and Release Notes	xiii
	Supported Platforms	xiii
	Using the Examples in This Manual	xiii
	Merging a Full Example	xiv
	Merging a Snippet	xiv
	Documentation Conventions	xv
	Documentation Feedback	xvii
	Requesting Technical Support	xvii
	Self-Help Online Tools and Resources	xvii
	Opening a Case with JTAC	xviii
Part 1	Routing Options	
Chapter 1	Configuring Routing Options	3
	Overview of Routing Options	3
	Configuring Static Routing	4
	Configuring Per-Packet Load Balancing	4
	Examples: Configuring Per-Packet Load Balancing	6
	Understanding Virtual Router Routing Instances	7
	Configuring Virtual Router Routing Instances	8
	Understanding Distributed Periodic Packet Management	9
	Configuring Distributed Periodic Packet Management	9
	Disabling or Enabling Distributed Periodic Packet Management Globally	10
	Disabling or Enabling Distributed Periodic Packet Management for LACP Packets	10
	Understanding Bidirectional Forwarding Detection (BFD)	11
	Examples: Configuring BFD for Static Routes	11
	Understanding BFD for Static Routes	11
	Example: Configuring BFD for Static Routes	15
	Example: Enabling BFD on Qualified Next Hops in Static Routes	21
	Example: Configuring BFD Authentication for Static Routes	27
	Understanding BFD Authentication for Static Routes	27
	BFD Authentication Algorithms	28
	Security Authentication Keychains	28
	Strict Versus Loose Authentication	29
	Example: Configuring BFD Authentication for Static Routes	29
	Understanding the Unified Forwarding Table	34
	Using the Unified Forwarding Table to Optimize Address Storage	35
	MAC Address and Host Address Memory Allocation	35
	Using the LPM Table with Junos OS 13.2X51-D10	36

LPM Table Memory Allocation	37
Configuring the Unified Forwarding Table	38
Configuring an Address-Storage Profile	38
Configuring the LPM Allocation	39
Configuring the LPM Table With Junos OS 13.2X51-D10 and 13.2X52-D10	39
Configuring the LPM Table With Junos OS 13.2x51-D15 and Later	41
Monitoring Routing Information	43
Verifying That Virtual Router Routing Instances Are Working	45
Troubleshooting Virtual Routing Instances	46
Direct Routes Not Leaked Between Routing Instances	46

Part 2

Chapter 2

Configuration Statements and Operational Commands

Routing Options Configuration Statements	49
active	52
aggregate (Routing)	53
as-path (Routing Options)	55
autonomous-system	57
backup-pe-group	59
backups	60
bandwidth (Multicast Flow Map)	61
bfd-liveness-detection (Routing Options Static Route)	62
bgp-orf-cisco-mode	66
bmp	68
brief	70
centralized	71
community (Routing Options)	72
confederation	74
disable (Routing Options)	75
description (Routing Instances)	75
discard	76
export (Routing Options)	77
export-rib	78
fate-sharing	81
flow	82
flow-map	83
forwarding-cache (Flow Maps)	84
forwarding-cache (Multicast)	85
forwarding-options (chassis)	87
forwarding-table	89
generate	90
graceful-restart (Enabling Globally)	92
import (Routing Options)	93
import-policy	94
import-rib	95
indirect-next-hop	96
install (Routing Options)	97
instance-export	98

instance-import	98
instance-type	99
interface (Multicast Static Routes)	100
interface (Routing Instances)	101
interface (Routing Options)	102
interface-routes	103
local-address (Routing Options)	104
martians	105
maximum-bandwidth (Routing Options)	106
maximum-paths	107
maximum-prefixes	109
med-igp-update-interval	110
metric (Aggregate, Generated, or Static Route)	111
multicast (Routing Options)	112
no-qos-adjust	113
num-65-127-prefix	114
options (Routing Options)	115
pim-to-igmp-proxy	116
pim-to-mld-proxy	117
policy (Aggregate and Generated Routes)	118
policy (Flow Maps)	119
policy-options	120
policy-statement	121
ppm	125
ppm (Ethernet Switching)	126
preference (Routing Options)	127
prefix	128
prefix-65-127-disable	128
protocols	129
qualified-next-hop (Static Routes)	132
readvertise	134
redundant-sources	135
resolution	136
resolution-ribs	137
resolve	138
restart-duration (Routing Options)	139
retain	140
reverse-oif-mapping	141
rpf-check-policy (Routing Options RPF)	142
rib (General)	143
rib (Route Resolution)	145
rib-group (Routing Options)	146
rib-groups	147
route-distinguisher-id	149
route-record	150
router-id	151
routing-instances	152
routing-options	153
scope	153

	scope-policy	154
	source (Source-Specific Multicast)	155
	source-routing	156
	ssm-groups	157
	ssm-map (Routing Options Multicast)	158
	static (Routes)	159
	subscriber-leave-timer	161
	tag (Routing Options)	162
	threshold (Multicast Forwarding Cache)	163
	timeout (Flow Maps)	164
	timeout (Multicast)	165
	traceoptions (Routing Options)	166
	upstream-interface	169
Chapter 3	Routing Options Operational Commands	171
	clear ipv6 neighbors	173
	show as-path	174
	show as-path domain	178
	show as-path summary	181
	show ipv6 neighbors	183
	show ipv6 router-advertisement	185
	show route	188
	show route active-path	194
	show route all	199
	show route aspath-regex	201
	show route best	203
	show route brief	206
	show route community	208
	show route community-name	210
	show route damping	212
	show route detail	217
	show route exact	234
	show route export	236
	show route extensive	239
	show route flow validation	256
	show route forwarding-table	258
	show route inactive-path	272
	show route inactive-prefix	275
	show route instance	277
	show route label	285
	show route label-switched-path	288
	show route martians	290
	show route next-hop	292
	show route no-community	298
	show route protocol	301
	show route range	313
	show route receive-protocol	317
	show route resolution	325
	show route snooping	328

show route source-gateway	336
show route summary	342
show route table	346
show route terse	371

List of Figures

Part 1	Routing Options	
Chapter 1	Configuring Routing Options	3
	Figure 1: Customer Routes Connected to a Service Provider	16
	Figure 2: BFD Enabled on Qualified Next Hops	21
	Figure 3: Customer Routes Connected to a Service Provider	30

List of Tables

	About the Documentation	xiii
	Table 1: Notice Icons	xv
	Table 2: Text and Syntax Conventions	xv
Part 1	Routing Options	
Chapter 1	Configuring Routing Options	3
	Table 3: Unified Forwarding Table Profiles	35
	Table 4: Example Host Table Combinations Using l2-profile-one	36
	Table 5: Example LPM Table Combinations Using l2-profile-one Using Junos OS 13.2X51-D10	36
	Table 6: Unified Forwarding Table Profiles	38
	Table 7: Example LPM Table Combinations Using l2-and l3 Profiles With Junos OS 13.2X51-D10 and 13.2X52-D10	40
	Table 8: LPM Table Combinations for l2 and l3 profiles With Junos OS 13.2X51-D15	41
	Table 9: lpm-profile with unicast-in-lpm Option	43
	Table 10: Filtering Route Messages	44
	Table 11: Summary of Key Routing Information Output Fields	44
Part 2	Configuration Statements and Operational Commands	
Chapter 2	Routing Options Configuration Statements	49
	Table 12: Unified Forwarding Table Profiles	88
Chapter 3	Routing Options Operational Commands	171
	Table 13: show as-path Output Fields	175
	Table 14: show as-path domain Output Fields	178
	Table 15: show as-path summary Output Fields	181
	Table 16: show ipv6 neighbors Output Fields	183
	Table 17: show ipv6 router-advertisement Output Fields	185
	Table 18: show route Output Fields	189
	Table 19: show route damping Output Fields	213
	Table 20: show route detail Output Fields	217
	Table 21: Next-hop Types Output Field Values	222
	Table 22: State Output Field Values	223
	Table 23: Communities Output Field Values	225
	Table 24: show route export Output Fields	236
	Table 25: show route extensive Output Fields	239
	Table 26: show route flow validation Output Fields	256
	Table 27: show route forwarding-table Output Fields	261

Table 28: show route instance Output Fields	278
Table 29: show route martians Output Fields	290
Table 30: show route receive-protocol Output Fields	317
Table 31: show route resolution Output Fields	326
Table 32: show route summary Output Fields	342
Table 33: show route table Output Fields	347
Table 34: Next-hop Types Output Field Values	352
Table 35: State Output Field Values	354
Table 36: Communities Output Field Values	356
Table 37: show route terse Output Fields	371

About the Documentation

- Documentation and Release Notes on page xiii
- Supported Platforms on page xiii
- Using the Examples in This Manual on page xiii
- Documentation Conventions on page xv
- Documentation Feedback on page xvii
- Requesting Technical Support on page xvii

Documentation and Release Notes

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- EX Series

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

Documentation Conventions

Table 1 on page xv defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xv defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> show chassis alarms No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none">Introduces or emphasizes important new terms.Identifies guide names.Identifies RFC and Internet draft titles.	<ul style="list-style-type: none">A policy <i>term</i> is a named structure that defines match conditions and actions.<i>Junos OS CLI User Guide</i>RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none">To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level.The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	stub <default-metric <i>metric</i>>;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast (<i>string1</i> <i>string2</i> <i>string3</i>)
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	community name members [<i>community-ids</i>]
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
GUI Conventions		
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none">In the Logical Interfaces box, select All Interfaces.To cancel the configuration, click Cancel.

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback rating system—On any page of the Juniper Networks TechLibrary site at <http://www.juniper.net/techpubs/index.html>, simply click the stars to rate the content, and use the pop-up form to provide us with information about your experience. Alternately, you can use the online feedback form at <http://www.juniper.net/techpubs/feedback/>.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>

- Download the latest versions of software and review release notes:
<http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications:
<http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum:
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

PART 1

Routing Options

- [Configuring Routing Options on page 3](#)

CHAPTER 1

Configuring Routing Options

- [Overview of Routing Options on page 3](#)
- [Configuring Static Routing on page 4](#)
- [Configuring Per-Packet Load Balancing on page 4](#)
- [Examples: Configuring Per-Packet Load Balancing on page 6](#)
- [Understanding Virtual Router Routing Instances on page 7](#)
- [Configuring Virtual Router Routing Instances on page 8](#)
- [Understanding Distributed Periodic Packet Management on page 9](#)
- [Configuring Distributed Periodic Packet Management on page 9](#)
- [Understanding Bidirectional Forwarding Detection \(BFD\) on page 11](#)
- [Examples: Configuring BFD for Static Routes on page 11](#)
- [Example: Configuring BFD Authentication for Static Routes on page 27](#)
- [Understanding the Unified Forwarding Table on page 34](#)
- [Configuring the Unified Forwarding Table on page 38](#)
- [Monitoring Routing Information on page 43](#)
- [Verifying That Virtual Router Routing Instances Are Working on page 45](#)
- [Troubleshooting Virtual Routing Instances on page 46](#)

Overview of Routing Options

In addition to dynamic routing protocols, you can configure static routing on QFX Series switches or an EX4600 switch. You can also configure a variety of protocol-independent routing properties, such as

- Per-packet load balancing (equal cost multipath routing)
- Autonomous system numbers
- Autonomous system confederation members
- Router identifiers
- Routing table groups
- Multicast scoping

- Related Documentation**
- [Understanding Distributed Periodic Packet Management on page 9](#)
 - [Understanding Virtual Router Routing Instances on page 7](#)

Configuring Static Routing

Static routes are routes that are manually configured and entered into the routing table.

The switch uses static routes:

- When the switch does not have a route to a destination that has a better (lower) *preference* value. The preference is an arbitrary value in the range from 0 through 255 that the software uses to rank routes received from different protocols, interfaces, or remote systems. The routing protocol process generally determines the active route by selecting the route with the lowest preference value. In the given range, **0** is the lowest and **255** is the highest.
- When the switch cannot determine the route to a destination.
- When the switch is forwarding unroutable packets.

To configure basic static route options using the CLI:

- To configure the switch's default gateway:

```
[edit]
user@switch# set routing-options static route 0.0.0.0/0 next-hop 10.0.1.1
```

- To configure a static route and specify the next address to be used when routing traffic to the static route:

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 next-hop 10.0.0.2.1
```

- To always keep the static route in the forwarding table:

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 retain
```

- To prevent the static route from being readvertised:

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 no-readvertise
```

- To remove inactive routes from the forwarding table:

```
[edit]
user@switch# set routing-options static route 20.0.0.0/24 active
```

- Related Documentation**
- [Monitoring Routing Information on page 43](#)

Configuring Per-Packet Load Balancing

By default, when there are multiple equal-cost paths to the same destination for the active route, Junos OS chooses one of the next-hop addresses to install into the forwarding table in a random fashion. Whenever the set of next hops for a destination changes in any way, the next-hop address is chosen again, also in a random fashion.

You can configure Junos OS so that, for the active route, all next-hop addresses for a destination are installed in the forwarding table. This is called per-packet load balancing. You can use this feature to spread traffic across multiple paths.

On a QFX3500 standalone switch, with static routing configured, whenever a route pointing to an ECMP next-hop changes to a new ECMP next-hop with a different member list but contains the exact member count as before, the location of the retained members in the new member list is the same as in the old member list.

For example, if you have the following configuration on the switch:

```
set routing-options static route 0.0.0.0/0 next-hop 11.8.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.9.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.10.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.11.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.12.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.13.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.14.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.15.12.2
```

and want to change the first and eighth route to point to another location, you can issue the following commands:

```
delete routing-options static route 0.0.0.0/0 next-hop 11.8.12.2
delete routing-options static route 0.0.0.0/0 next-hop 11.15.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.16.12.2
set routing-options static route 0.0.0.0/0 next-hop 11.17.12.2
```

This configuration does not affect the second next-hop through the seventh next-hop.

When per-packet load balancing is configured, traffic is divided into individual flows (up to a maximum of 16). Packets for an individual flow are sent out a single interface. To determine flows, the switch examines each of the following packet fields:

- Source IP address
- Destination IP address
- Protocol
- Source port number
- Destination port number
- Source interface index
- Type of service (ToS)

The switch recognizes packets in which all of these parameters are identical and ensures that these packets are sent out through the same interface. This prevents problems that might otherwise occur with packets arriving at their destination out of their original sequence.



NOTE: Load balancing is not supported on management interfaces.

The following steps show how to configure per-packet load balancing:

1. Define a load-balancing routing policy by including one or more **policy-statement** statements at the **[edit policy-options]** hierarchy level, defining an action of **load-balance per-packet**:

```
policy-statement policy-name {  
  from {  
    match-conditions;  
    route-filter destination-prefix match-type <actions>;  
    prefix-list name;  
  }  
  then {  
    load-balance per-packet;  
  }  
}
```

2. Apply the policy to routes exported from the routing table to the forwarding table. To do this, include the **forwarding-table** and **export** statements:

```
forwarding-table {  
  export policy-name;  
}
```

**Related
Documentation**

- [Examples: Configuring Per-Packet Load Balancing on page 6](#)
- [Understanding the Use of Resilient Hashing to Minimize Flow Remapping in Trunk/ECMP Groups](#)

Examples: Configuring Per-Packet Load Balancing

Perform per-packet load balancing for all routes:

```
[edit]  
policy-options {  
  policy-statement load-balancing-policy {  
    then {  
      load-balance per-packet;  
    }  
  }  
}  
routing-options {  
  forwarding-table {  
    export load-balancing-policy;  
  }  
}
```

Perform per-packet load balancing for a limited set of routes:

```
[edit]  
policy-options {  
  policy-statement load-balancing-policy {  
    from {  
      route-filter 192.168.10/24 orlonger;  
      route-filter 9.114/16 orlonger;  
    }  
    then {  

```



```

        load-balance per-packet;
    }
}
routing-options {
    forwarding-table {
        export load-balancing-policy;
    }
}

```

- Related Documentation**
- [Configuring Per-Packet Load Balancing on page 4](#)
 - *Understanding the Use of Resilient Hashing to Minimize Flow Remapping in Trunk/ECMP Groups*

Understanding Virtual Router Routing Instances

Virtual router routing instances allow administrators to divide a QFX Series switch or an EX4600 switch into multiple independent virtual routers, each with its own routing table. Virtual router routing instances enable you to isolate traffic without using multiple devices to segment your network. You can create routing instances for unicast routing protocols and PIM sparse mode.

Each virtual router routing instance consists of sets of the following:

- Routing tables
- Interfaces that belong to these routing tables
- Routing protocol configurations
- Routing option configurations

You can use virtual router routing instances to isolate customer traffic on a network and to bind customer-specific routing instances to customer-owned interfaces. Each interface can belong to only one routing instance. QFX 3500 and QFX3600 switches and QFabric systems support as many as 256 virtual router routing instances. QFX 5100 switches support as many as 512 virtual router routing instances. EX4600 switches support as many as 1024 virtual router routing instances.

- Related Documentation**
- [Configuring Virtual Router Routing Instances on page 8](#)

Configuring Virtual Router Routing Instances

Use virtual router routing instances to divide a QFX Series switch or an EX4600 switch into multiple independent virtual routers, each with its own routing table. Virtual router routing instances enable you to isolate traffic without using multiple devices to segment your network. You can create routing instances for unicast routing protocols and PIM sparse mode.

To configure virtual router routing instances:

1. Create a routing instance:

```
[edit routing-instances]user@switch# set routing-instance-name instance-type virtual-router
```



NOTE: The default routing instance, master, refers to the main inet.0 routing table. The master routing instance is reserved and cannot be specified as a routing instance.

2. Bind each routing instance to the corresponding interfaces:

```
[edit routing-instances]user@switch# set routing-instance-name interface
device-name:type-fpc/pic/port.logical-unit-number
```



NOTE: You can bind an interface to one routing instance only.

3. Create each of the logical interfaces bound to each routing instance:

```
[edit interfaces]user@switch# set device-name:type-fpc/pic/port unit logical-unit-number
family inet address ip-address
```



NOTE: Do not create a logical interface using the family ethernet-switching option in this step. Binding an interface using the family ethernet-switching option to a routing instance can cause the interface to shut down.

4. (Optional) Configure routing protocols for the routing instance at the **[edit routing-instances routing-instance-name protocols]** hierarchy level.
5. (Optional) Configure routing options for the routing instance at the **[edit routing-instances routing-instance-name routing-options]** hierarchy level.

Related Documentation

- [Understanding Virtual Router Routing Instances on page 7](#)
- [Understanding Interfaces on the QFabric System](#)
- [Understanding Node Groups](#)
- [Verifying That Virtual Router Routing Instances Are Working on page 45](#)

Understanding Distributed Periodic Packet Management

Periodic packet management (PPM) is responsible for processing a variety of time-sensitive periodic tasks for particular processes so that other processes can more optimally direct their resources. PPM is responsible for the periodic transmission of packets on behalf of its various client processes, which include the processes that control the Link Aggregation Control Protocol (LACP) and Bidirectional Forwarding Detection (BFD) protocol, and also for receiving packets on behalf of these client processes. PPM also gathers some statistics and sends process-specific packets. PPM cannot be disabled and is always running on any operational switch.

The responsibility for PPM processing on the switch is distributed between the Routing Engine and the access interfaces for all protocols that use PPM by default. This distributed model provides a faster response time for protocols that use PPM than the response time provided by the nondistributed model.

If distributed PPM is disabled, the PPM process runs on the Routing Engine only.

You can disable distributed PPM for all protocols that use PPM. You can also disable distributed PPM for LACP packets only.



BEST PRACTICE: We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.

Related Documentation

- [Configuring Distributed Periodic Packet Management on page 9](#)

Configuring Distributed Periodic Packet Management

Periodic packet management (PPM) is responsible for processing a variety of time-sensitive periodic tasks so that other processes can more optimally direct their resources.

The responsibility for PPM processing on the switch is distributed between the Routing Engine and the access interfaces for all protocols that use PPM by default. This distributed model provides a faster response time for protocols that use PPM than the response time provided by the nondistributed model.

If distributed PPM is disabled, the PPM process runs on the Routing Engine only.

You can disable distributed PPM for all protocols that use PPM. You can also disable distributed PPM for Link Aggregation Control Protocol (LACP) packets only.



BEST PRACTICE: We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.

This topic describes:

- [Disabling or Enabling Distributed Periodic Packet Management Globally on page 10](#)
- [Disabling or Enabling Distributed Periodic Packet Management for LACP Packets on page 10](#)

Disabling or Enabling Distributed Periodic Packet Management Globally

Distributed PPM is enabled by default. Disable distributed PPM if you need to move all PPM processing to the Routing Engine. Enable distributed PPM if it was previously disabled and you need to run distributed PPM.

To disable distributed PPM:

```
[edit routing-options]
user@switch# set ppm no-delegate-processing
```

To enable distributed PPM if it was previously disabled:

```
[edit routing-options]
user@switch# delete ppm no-delegate-processing
```

Disabling or Enabling Distributed Periodic Packet Management for LACP Packets

Distributed PPM is enabled by default. Disable distributed PPM for only LACP packets if you need to move all PPM processing for LACP packets to the Routing Engine.

To disable distributed PPM for LACP packets:

```
[edit protocols]
user@switch# set lacp ppm centralized
```

To enable distributed PPM for LACP packets if it was previously disabled:

```
[edit protocols]
user@switch# delete lacp ppm centralized
```

Related Documentation

- [Understanding Distributed Periodic Packet Management on page 9](#)
- [Understanding Aggregated Ethernet Interfaces and LACP](#)

Understanding Bidirectional Forwarding Detection (BFD)

The Bidirectional Forwarding Detection (BFD) protocol is a simple mechanism that detects failures in a network and works in a wide variety of network environments and topologies. In BFD operation, switches exchange BFD hello packets at a specified interval and detect a neighbor failure if they do not receive a reply after a specified interval. The BFD failure detection timers support shorter time limits than the static route failure detection mechanisms, so they can provide faster detection of failures.

To configure faster failure detection, use lower BFD timer values. The timers can automatically adapt to a higher value if an adjacency fails, and they also adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. In this case, a back-off algorithm increases the receive interval by two if the local BFD instance is the reason for the session flap and increases the transmission interval by two if the remote BFD instance is the reason for the session flap.

You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. This command is hitless, meaning that it does not affect traffic flow.



NOTE: QFX and EX4600 switches do not support BFD timer values of less than 1 second.



NOTE: EX3300 supports BFD over static routes only.

Related Documentation

- [Examples: Configuring BFD for Static Routes on page 11](#)
- [Example: Configuring BFD Authentication for Static Routes on page 27](#)

Examples: Configuring BFD for Static Routes

- [Understanding BFD for Static Routes on page 11](#)
- [Example: Configuring BFD for Static Routes on page 15](#)
- [Example: Enabling BFD on Qualified Next Hops in Static Routes on page 21](#)

Understanding BFD for Static Routes

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchange BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the static route failure detection mechanisms, so they provide faster detection.



NOTE: EX3300 supports BFD over static routes only.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

By default, BFD is supported on single-hop static routes. In Junos OS Release 8.2 and later, BFD also supports multihop static routes.

To enable failure detection, include the **bfd-liveness-detection** statement in the static route configuration.

In Junos OS Release 9.1 and later, the BFD protocol is supported for IPv6 static routes. Global unicast and link-local IPv6 addresses are supported for static routes. The BFD protocol is not supported on multicast or anycast IPv6 addresses. For IPv6, the BFD protocol supports only static routes and only in Junos OS Release 9.3 and later. IPv6 for BFD is not supported for any other protocol.

To configure the BFD protocol for IPv6 static routes, include the **bfd-liveness-detection** statement at the **[edit routing-options rib inet6.0 static route destination-prefix]** hierarchy level.

In Junos OS Release 8.5 and later, you can configure a hold-down interval to specify how long the BFD session must remain up before a state change notification is sent.

To specify the hold-down interval, include the **holddown-interval** statement in the BFD configuration.

You can configure a number in the range from 0 through 255,000 milliseconds. The default is 0. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.



NOTE: If a single BFD session includes multiple static routes, the hold-down interval with the highest value is used.

To specify the minimum transmit and receive intervals for failure detection, include the **minimum-interval** statement in the BFD configuration.

This value represents both the minimum interval after which the local routing device transmits hello packets and the minimum interval after which the routing device expects

to receive a reply from the neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements.



NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.



NOTE: SRX Series devices do not support distributed BFD.

To specify the minimum receive interval for failure detection, include the **minimum-receive-interval** statement in the BFD configuration. This value represents the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the number of hello packets not received by the neighbor that causes the originating interface to be declared down, include the **multiplier** statement in the BFD configuration.

The default value is 3. You can configure a number in the range from 1 through 255.

To specify a threshold for detecting the adaptation of the detection time, include the **threshold** statement in the BFD configuration.

When the BFD session detection time adapts to a value equal to or higher than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the **minimum-interval** or the **minimum-receive-interval** value. The

threshold must be a higher value than the multiplier for either of these configured values. For example if the **minimum-receive-interval** is 300 ms and the **multiplier** is 3, the total detection time is 900 ms. Therefore, the detection time threshold must have a value higher than 900.

To specify the minimum transmit interval for failure detection, include the **transmit-interval** **minimum-interval** statement in the BFD configuration.

This value represents the minimum interval after which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the threshold for the adaptation of the transmit interval, include the **transmit-interval threshold** statement in the BFD configuration.

The threshold value must be greater than the transmit interval. When the BFD session transmit time adapts to a value greater than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the value for the **minimum-interval** or the **minimum-receive-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level. The threshold must be a higher value than the multiplier for either of these configured values.

To specify the BFD version, include the **version** statement in the BFD configuration. The default is to have the version detected automatically.

To include an IP address for the next hop of the BFD session, include the **neighbor** statement in the BFD configuration.



NOTE: You must configure the **neighbor** statement if the next hop specified is an interface name. If you specify an IP address as the next hop, that address is used as the neighbor address for the BFD session.

In Junos OS Release 9.0 and later, you can configure BFD sessions not to adapt to changing network conditions.

To disable BFD adaptation, include the **no-adaptation** statement in the BFD configuration.



NOTE: We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation in your network.



NOTE: If BFD is configured only on one end of a static route, the route is removed from the routing table. BFD establishes a session when BFD is configured on both ends of the static route.

BFD is not supported on ISO address families in static routes. BFD does support IS-IS.

If you configure graceful Routing Engine switchover (GRES) at the same time as BFD, GRES does not preserve the BFD state information during a failover.

Junos OS also supports BFD over multihop static routes. For example, you can configure BFD over a Layer 3 path to provide path integrity over that path. You can limit the number of hops by specifying the time to live (TTL).

To configure BFD over multihop static routes, include the following statements:

```
static route destination-prefix {
  bfd-liveness-detection {
    local-address ip-address;
    minimum-receive-ttl number;
  }
}
```

To specify the source address for the multihop static route and to enable multihop BFD support, include the **local-address** statement.

To specify the number of hops, include the **minimum-receive-ttl** statement. You must configure this statement for a multihop BFD session. You can configure a value in the range from 1 through 255. It is optional for a single-hop BFD session. If you configure the **minimum-receive-ttl** statement for a single-hop session, the value must be 255.

On M Series and T Series platforms only, starting in Junos OS Release 12.3, multihop BFD runs on the CPU in the FPC, DPC, or MPC. This is referred to as *distributed BFD*. Previously, multihop BFD ran from the Routing Engine.

Example: Configuring BFD for Static Routes

This example shows how to configure Bidirectional Forwarding Detection (BFD) for static routes.

- [Requirements on page 15](#)
- [Overview on page 16](#)
- [Configuration on page 16](#)
- [Verification on page 19](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview


There are many practical applications for static routes. Static routing is often used at the network edge to support attachment to stub networks, which, given their single point of entry and egress, are well suited to the simplicity of a static route. In Junos OS, static routes have a global preference of 5. Static routes are activated if the specified next hop is reachable.

In this example, you configure the static route 192.168.47.0/24 from the provider network to the customer network, using the next-hop address of 172.16.1.2. You also configure a static default route of 0.0.0.0/0 from the customer network to the provider network, using a next-hop address of 172.16.1.1.

For demonstration purposes, some loopback interfaces are configured on Device B and Device D. These loopback interfaces provide addresses to ping and thus verify that the static routes are working.

Figure 1 on page 16 shows the sample network.

Figure 1: Customer Routes Connected to a Service Provider

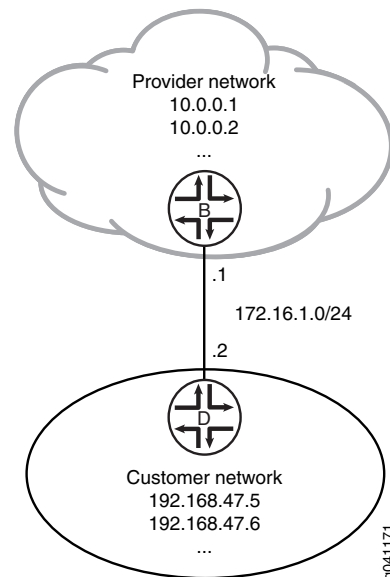

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
Device B
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
```

```

set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
  1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all

```

Device D

```

set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all

```

Step-by-Step Procedure The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure BFD for static routes:

1. On Device B, configure the interfaces.


```

[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32

```
2. On Device B, create a static route and set the next-hop address.


```

[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2

```
3. On Device B, configure BFD for the static route.


```

[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
  1000

```
4. On Device B, configure tracing operations for BFD.


```

[edit protocols]
user@B# set bfd traceoptions file bfd-trace
user@B# set bfd traceoptions flag all

```
5. If you are done configuring Device B, commit the configuration.


```

[edit]
user@B# commit

```
6. On Device D, configure the interfaces.


```

[edit interfaces]
user@D# set ge-1/2/0 unit 1 description D->B
user@D# set ge-1/2/0 unit 1 family inet address 172.16.1.2/24
user@D# set lo0 unit 2 family inet address 192.168.47.5/32
user@D# set lo0 unit 2 family inet address 192.168.47.6/32

```
7. On Device D, create a static route and set the next-hop address.

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 next-hop 172.16.1.1
```

8. On Device D, configure BFD for the static route.

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
```

9. On Device D, configure tracing operations for BFD.

```
[edit protocols]
user@D# set bfd traceoptions file bfd-trace
user@D# set bfd traceoptions flag all
```

10. If you are done configuring Device D, commit the configuration.

```
[edit]
user@D# commit
```

Results

Confirm your configuration by issuing the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device B user@B# show interfaces
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}
lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@D# show protocols
bfd {
  traceoptions {
    file bfd-trace;
    flag all;
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    next-hop 172.16.1.2;
    bfd-liveness-detection {
      minimum-interval 1000;
    }
  }
}
```

```

    }
  }
}

Device D user@D# show interfaces
ge-1/2/0 {
  unit 1 {
    description D->B;
    family inet {
      address 172.16.1.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.47.5/32;
      address 192.168.47.6/32;
    }
  }
}

user@D# show routing-options
static {
  route 0.0.0.0/0 {
    next-hop 172.16.1.1;
    bfd-liveness-detection {
      minimum-interval 1000;
    }
  }
}
}

```

Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 19](#)
- [Viewing Detailed BFD Events on page 20](#)

Verifying That BFD Sessions Are Up

Purpose Verify that the BFD sessions are up, and view details about the BFD sessions.

Action From operational mode, enter the **show bfd session extensive** command.

```

user@B> show bfd session extensive

```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	lt-1/2/0.0	3.000	1.000	3

```

Client Static, TX interval 1.000, RX interval 1.000
Session up time 00:14:30
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated, routing table index 172
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3

```

Local discriminator 2, remote discriminator 1
Echo mode disabled/inactive

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

user@D> show bfd session extensive

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.1	Up	lt-1/2/0.1	3.000	1.000	3

Client Static, TX interval 1.000, RX interval 1.000
Session up time 00:14:35
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated, routing table index 170
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 1, remote discriminator 2
Echo mode disabled/inactive

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

Meaning The TX interval 1.000, RX interval 1.000 output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the **bfd-liveness-detection** statement.

Viewing Detailed BFD Events

Purpose View the contents of the BFD trace file to assist in troubleshooting, if needed.

Action From operational mode, enter the **file show /var/log/bfd-trace** command.

```
user@B> file show /var/log/bfd-trace
Nov 23 14:26:55 Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 72
Nov 23 14:26:55 PPM Trace: BFD periodic xmit rt tbl index 172
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 108:
Nov 23 14:26:55 IfIndex (3) len 4: 0
Nov 23 14:26:55 Protocol (1) len 1: BFD
Nov 23 14:26:55 Data (9) len 83: (hex) 70 70 6d 64 5f 62 66 64 5f 73 65 6e 64
6d 73 67 20 3a 20
Nov 23 14:26:55 PPM Trace: ppm_bfd_sendmsg : socket 12 len 24, ifl 78 src
172.16.1.1 dst 172.16.1.2 errno 65
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 93:
Nov 23 14:26:55 IfIndex (3) len 4: 0
Nov 23 14:26:55 Protocol (1) len 1: BFD
Nov 23 14:26:55 Data (9) len 68: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 74
```

Meaning BFD messages are being written to the trace file.

Example: Enabling BFD on Qualified Next Hops in Static Routes

This example shows how to configure a static route with multiple possible next hops. Each next hop has Bidirectional Forwarding Detection (BFD) enabled.

- [Requirements on page 21](#)
- [Overview on page 21](#)
- [Configuration on page 22](#)
- [Verification on page 24](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview


In this example, Device B has the static route **192.168.47.0/24** with two possible next hops. The two next hops are defined using two **qualified-next-hop** statements. Each next hop has BFD enabled.

BFD is also enabled on Device D because BFD must be enabled on both ends of the connection.

A next hop is included in the routing table if the BFD session is up. The next hop is removed from the routing table if the BFD session is down.

See [Figure 2 on page 21](#).

Figure 2: BFD Enabled on Qualified Next Hops

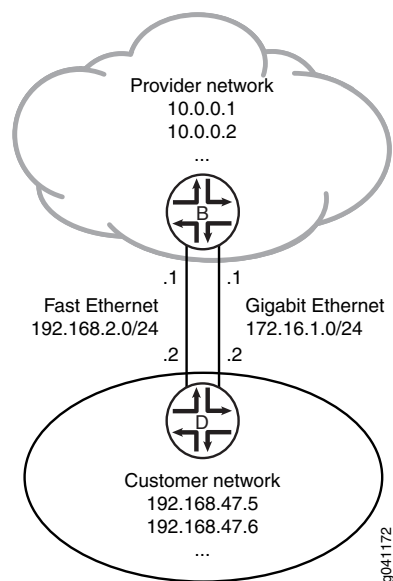

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device B

```
set interfaces fe-0/1/0 unit 2 description secondary-B->D
set interfaces fe-0/1/0 unit 2 family inet address 192.168.2.1/24
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set routing-options static route 192.168.47.0/24 qualified-next-hop 192.168.2.2
  bfd-liveness-detection minimum-interval 60
set routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2
  bfd-liveness-detection minimum-interval 60
```

Device D

```
set interfaces fe-0/1/0 unit 3 description secondary-D->B
set interfaces fe-0/1/0 unit 3 family inet address 192.168.2.2/24
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set routing-options static route 0.0.0.0/0 qualified-next-hop 192.168.2.1
set routing-options static route 0.0.0.0/0 qualified-next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 60
```

Step-by-Step Procedure The following example requires that you navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure a static route with two possible next hops, both with BFD enabled:

1. On Device B, configure the interfaces.

```
[edit interfaces fe-0/1/0]
user@B# set unit 2 description secondary-B->D
user@B# set unit 2 family inet address 192.168.2.1/24
```

```
[edit interfaces ge-1/2/0]
user@B# set unit 0 description B->D
user@B# set unit 0 family inet address 172.16.1.1/24
```

2. On Device B, configure the static route with two next hops, both with BFD enabled.

```
[edit routing-options static route 192.168.47.0/24]
user@B# set qualified-next-hop 192.168.2.2 bfd-liveness-detection minimum-interval
60
user@B# set qualified-next-hop 172.16.1.2 bfd-liveness-detection minimum-interval
60
```

3. On Device D, configure the interfaces.

```
[edit interfaces fe-0/1/0]
user@D# set unit 3 description secondary-D->B
user@D# set unit 3 family inet address 192.168.2.2/24
```

```
[edit interfaces ge-1/2/0]
user@D# set unit 1 description D->B
```



```
user@D# set unit 1 family inet address 172.16.1.2/24
```

4. On Device D, configure a BFD-enabled default static route with two next hops to the provider network.

In this case, BFD is enabled on the route, not on the next hops.

```
[edit routing-options static route 0.0.0.0/0]
user@D# set qualified-next-hop 192.168.2.1
user@D# set qualified-next-hop 172.16.1.1
user@D# set bfd-liveness-detection minimum-interval 60
```

Results Confirm your configuration by issuing the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
fe-0/1/0 {
  unit 2 {
    description secondary-B->D;
    family inet {
      address 192.168.2.1/24;
    }
  }
}
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    qualified-next-hop 192.168.2.2 {
      bfd-liveness-detection {
        minimum-interval 60;
      }
    }
    qualified-next-hop 172.16.1.2 {
      bfd-liveness-detection {
        minimum-interval 60;
      }
    }
  }
}

user@D# show interfaces
fe-0/1/0 {
  unit 3 {
    description secondary-D->B;
    family inet {
      address 192.168.2.2/24;
    }
  }
}
```

```
    }  
  }  
  ge-1/2/0 {  
    unit 1 {  
      description D->B;  
      family inet {  
        address 172.16.1.2/24;  
      }  
    }  
  }  
}  
  
user@D# show routing-options  
static {  
  route 0.0.0.0/0 {  
    qualified-next-hop 192.168.2.1;  
    qualified-next-hop 172.16.1.1;  
    bfd-liveness-detection {  
      minimum-interval 60;  
    }  
  }  
}
```

If you are done configuring the devices, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Checking the Routing Tables on page 24](#)
- [Verifying the BFD Sessions on page 25](#)
- [Removing BFD from Device D on page 25](#)
- [Removing BFD from One Next Hop on page 26](#)

Checking the Routing Tables

Purpose Make sure that the static route appears in the routing table on Device B with two possible next hops.

Action user@B> show route 192.168.47.0 extensive
 inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
 192.168.47.0/24 (1 entry, 1 announced)
 TSI:
 KRT in-kernel 192.168.47.0/24 -> {192.168.2.2}
 *Static Preference: 5
 Next hop type: Router
 Address: 0x9334010
 Next-hop reference count: 1
 Next hop: 172.16.1.2 via ge-1/2/0.0
 Next hop: 192.168.2.2 via fe-0/1/0.2, selected
 State: <Active Int Ext>
 Age: 9
 Task: RT
 Announcement bits (1): 3-KRT
 AS path: I

Meaning Both next hops are listed. The next hop 192.168.2.2 is the selected route.

Verifying the BFD Sessions

Purpose Make sure that the BFD sessions are up.

Action user@B> show bfd session

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	0.720	0.240	3
192.168.2.2	Up	fe-0/1/0.2	0.720	0.240	3

2 sessions, 2 clients

Cumulative transmit rate 8.3 pps, cumulative receive rate 8.3 pps

Meaning The output shows that the BFD sessions are up.

Removing BFD from Device D

Purpose Demonstrate what happens when the BFD session is down for both next hops.

Action 1. Deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Rerun the show bfd session command on Device B.

user@B> show bfd session

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Down	ge-1/2/0.0	3.000	1.000	3
192.168.2.2	Down	fe-0/1/0.2	3.000	1.000	3

2 sessions, 2 clients

Cumulative transmit rate 2.0 pps, cumulative receive rate 2.0 pps

3. Rerun the **show route 192.168.47.0** command on Device B.

```
user@B> show route 192.168.47.0
```

Meaning As expected, when the BFD sessions are down, the static route is removed from the routing table.

Removing BFD from One Next Hop

Purpose Demonstrate what happens when only one next hop has BFD enabled.

- Action** 1. If it is not already deactivated, deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Deactivate BFD on one of the next hops on Device B.

```
[edit routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2]
user@B# deactivate bfd-liveness-detection
user@B# commit
```

3. Rerun the **show bfd session** command on Device B.

```
user@B> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
192.168.2.2	Down	fe-0/1/0.2	3.000	1.000	3

4. Rerun the **show route 192.168.47.0 extensive** command on Device B.

```
user@B> show route 192.168.47.0 extensive
```

```
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
192.168.47.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.47.0/24 -> {172.16.1.2}
  *Static Preference: 5
    Next hop type: Router, Next hop index: 624
    Address: 0x92f0178
    Next-hop reference count: 3
    Next hop: 172.16.1.2 via ge-1/2/0.0, selected
    State: <Active Int Ext>
    Age: 2:36
    Task: RT
    Announcement bits (1): 3-KRT
    AS path: I
```

Meaning As expected, the BFD session is down for the 192.168.2.2 next hop. The 172.16.1.2 next hop remains in the routing table, and the route remains active, because BFD is not a condition for this next hop to remain valid.

Related Documentation

- [Example: Configuring BFD Authentication for Static Routes on page 27](#)
- [Example: Configuring BFD for OSPF](#)

- [Example: Configuring BFD for BGP](#)
- [Example: Configuring BFD for IS-IS](#)
- [Configuring PIM and the Bidirectional Forwarding Detection \(BFD\) Protocol](#)

Example: Configuring BFD Authentication for Static Routes

- [Understanding BFD Authentication for Static Routes on page 27](#)
- [Example: Configuring BFD Authentication for Static Routes on page 29](#)

Understanding BFD Authentication for Static Routes

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when you run BFD over Network Layer protocols, the risk of service attacks can be significant.



NOTE: We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels.

Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IPv4 and IPv6 static routes. BFD authentication is not supported on MPLS OAM sessions. BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.



NOTE: EX3300 supports BFD over static routes only.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 28](#)
- [Security Authentication Keychains on page 28](#)
- [Strict Versus Loose Authentication on page 29](#)

BFD Authentication Algorithms

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



NOTE: Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session,

and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

Strict Versus Loose Authentication

By default, strict authentication is enabled, and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

Example: Configuring BFD Authentication for Static Routes

This example shows how to configure Bidirectional Forwarding Detection (BFD) authentication for static routes.

- [Requirements on page 29](#)
- [Overview on page 29](#)
- [Configuration on page 30](#)
- [Verification on page 33](#)

Requirements

Junos OS Release 9.6 or later (Canda and United States version).

BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

Overview

You can configure authentication for BFD sessions running over IPv4 and IPv6 static routes. Routing instances and logical systems are also supported.

The following steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the static route.
2. Associate the authentication keychain with the static route.
3. Configure the related security authentication keychain. This must be configured on the main router.




TIP: We recommend that you specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

[edit]

```
user@host> set routing-options static route ipv4 bfd-liveness-detection
authentication loose-check
```

Figure 3 on page 30 shows the sample network.

Figure 3: Customer Routes Connected to a Service Provider

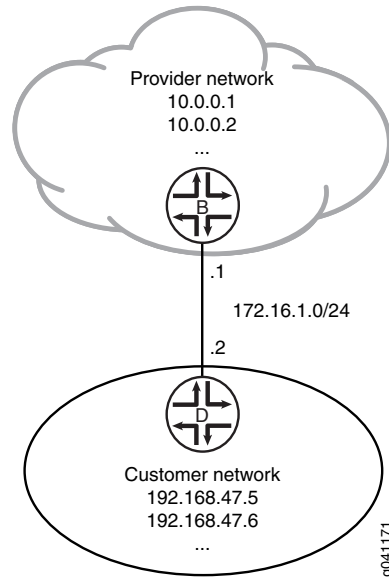

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device B

```
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval 1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication key-chain bfd-kc4
set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication algorithm keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret "$9$JhZHmn6Ap0In/9ApOcSs24oaZikPft3wY24ZG.mz36AtOIEyMWxSrlKvM-dbs2aDkP5FtOIQFclev7N"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time "2011-1-1.12:00:00 -0800"
```

Device D

```
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
```



```

set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication key-chain
  bfd-kc4
set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication algorithm
  keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret
  "$9$JhZHmn6Ap0In/9ApOcSs24oaZikPft3wY24ZG.mz36AtOIeyMWxSrlKvM-dbs2a
  DkP5FtOIQFclev7N"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time
  "2011-1-1.12:00:00 -0800"

```

Step-by-Step Procedure The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure BFD for static routes:

1. On Device B, configure the interfaces.

```

[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24

user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32

```

2. On Device B, create a static route and set the next-hop address.

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2

```

3. On Device B, configure BFD for the static route.

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
  1000

```

4. On Device B, specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use for BFD authentication on the static route.

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
  algorithm keyed-sha-1

```



NOTE: Nonstop active routing (NSR) is not supported with the **meticulous-keyed-md5** and **meticulous-keyed-sha-1** authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

5. On Device B, specify the keychain to be used to associate BFD sessions on the specified route with the unique security authentication keychain attributes.

This should match the keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
key-chain bfd-kc4
```

6. On Device B, specify the unique security authentication information for BFD sessions:

- The matching keychain name as specified in Step 5.
- At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
- The secret data used to allow access to the session.
- The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

```
[edit security authentication-key-chains key-chain bfd-kc4]
user@B# set key 5 secret
"$9$JhZHmn6Ap0ln/9ApOcSs24oaZikPfT3wY24ZG.mz36AtOIeyMWxSrlKvM-dbs2a
DkP5Ft0IQFclev7N"
user@B# set key 5 start-time "2011-1-1.12:00:00 -0800"
```

7. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

8. Repeat the configuration on Device D.

The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

Results

Confirm your configuration by issuing the **show interfaces**, **show routing-options**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device B user@B# show interfaces
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}
lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@B# show routing-options
```

```

static {
  route 192.168.47.0/24 {
    next-hop 172.16.1.2;
    bfd-liveness-detection {
      minimum-interval 1000;
      authentication {
        key-chain bfd-kc4;
        algorithm keyed-sha-1;
      }
    }
  }
}

user@B# show security
authentication-key-chains {
  key-chain bfd-kc4 {
    key 5 {
      secret
      "$9$JhZHmn6Ap0In/9ApOcSs24oaZikPft3wY24ZG.mz36AtOIeyMWxSrlKvM-dbs2a
      DkP5FtOIQFclev7N"; ## SECRET-DATA
      start-time "2011-1-1.12:00:00 -0800";
    }
  }
}

```

Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 33](#)
- [Viewing Details About the BFD Session on page 33](#)
- [Viewing Extensive BFD Session Information on page 34](#)

Verifying That BFD Sessions Are Up

Purpose Verify that the BFD sessions are up.

Action From operational mode, enter the **show bfd session** command.

```
user@B> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

Meaning The command output shows that the BFD session is up.

Viewing Details About the BFD Session

Purpose View details about the BFD sessions and make sure that authentication is configured.

Action From operational mode, enter the **show bfd session detail** command.

```
user@B> show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

Client Static, TX interval 1.000, RX interval 1.000, **Authenticate**
 Session up time 00:53:58
 Local diagnostic NbrSignal, remote diagnostic None
 Remote state Up, version 1
 Logical system 9, routing table index 22

1 sessions, 1 clients
 Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

Meaning In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured.

Viewing Extensive BFD Session Information

Purpose View more detailed information about the BFD sessions.

Action From operational mode, enter the **show bfd session extensive** command.

```
user@B> show bfd session extensive
```

Address	State	Interface	Time	Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

Client Static, TX interval 1.000, RX interval 1.000, **Authenticate**
 keychain bfd-kc4, algo keyed-sha-1, mode strict
 Session up time 01:39:45
 Local diagnostic NbrSignal, remote diagnostic None
 Remote state Up, version 1
 Logical system 9, routing table index 22
 Min async interval 1.000, min slow interval 1.000
 Adaptive async TX interval 1.000, RX interval 1.000
 Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
 Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
 Local discriminator 3, remote discriminator 4
 Echo mode disabled/inactive
 Authentication enabled/active, keychain bfd-kc4, algo keyed-sha-1, mode strict

1 sessions, 1 clients
 Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

Meaning In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured. The output for the **extensive** command provides the keychain name, the authentication algorithm, and the mode for each client in the session.

Related Documentation

- [Examples: Configuring BFD for Static Routes on page 11](#)

Understanding the Unified Forwarding Table

- [Using the Unified Forwarding Table to Optimize Address Storage on page 35](#)
- [MAC Address and Host Address Memory Allocation on page 35](#)

- [Using the LPM Table with Junos OS 13.2X51-D10 on page 36](#)
- [LPM Table Memory Allocation on page 37](#)

Using the Unified Forwarding Table to Optimize Address Storage

On QFX5100, EX4600, and OCX1100 switches, you can control the allocation of forwarding table memory available to store the following:

- MAC addresses.
- Layer 3 host entries.
- Longest prefix match (LPM) table entries.



NOTE: Starting with Junos OS 13.2X51-D15, you can allocate more memory to store prefixes in the range /65 to /127 range.

This feature gives you the flexibility to configure your switch to match the needs of your particular network environment. For example, you might configure the switch to store more MAC addresses in a Layer 2 network, such as a virtualized network with many servers and virtualized machines. On the other hand, if your switch is located in the routing core of a network or participates in an IP fabric, you probably want to maximize the number of routing table entries it can store. In this case, you would configure it to use the **lpm-profile**, which provides the most longest prefix match table entries.

MAC Address and Host Address Memory Allocation

There are several profiles that allocate memory differently for MAC addresses and host addresses. You configure the mix that best meets your needs by choosing the appropriate profile. [Table 3 on page 35](#) lists the profiles you can choose and the associated maximum values for the MAC address and host table entries.

Table 3: Unified Forwarding Table Profiles

Profile Name	MAC Table	Host Table (unicast and multicast addresses)					
	MAC Addresses	IPv4 unicast	IPv6 unicast	IPv4 (*, G)	IPv4 (S, G)	IPv6 (*, G)	IPv6 (S, G)
l2-profile-one	288K	16K	8K	8K	8K	4K	4K
l2-profile-two	224K	80K	40K	40K	40K	20K	20K
l2-profile-three (default)	160K	144K	72K	72K	72K	36K	36K
l3-profile	96K	208K	104K	104K	104K	52K	52K
lpm-profile	32K	16K	8K	8K	8K	4K	4K

Table 3: Unified Forwarding Table Profiles (*continued*)

Profile Name	MAC Table	Host Table (unicast and multicast addresses)					
lpm-profile with unicast-in-lpm option	32K	(stored in LPM table)	(stored in LPM table)	8K	8K	4K	4K



NOTE: On QFX5100, EX4600, and OCX1100 switches, IPv4 and IPv6 host routes with ECMP next hops are stored in the host table. On QFX3500 and QFX3600 switches, these routes are stored in the LPM table.

Note that all entries in the host table share the same memory space. If the host table stores the maximum number of entries for any given type, the entire shared table is full and is unable to accommodate *any* entries of any other type. As you can see, different entry types occupy different amounts of memory. For example, an IPv6 unicast address occupies twice as much memory as an IPv4 unicast address, and an IPv6 multicast address occupies four times as much memory as an IPv4 unicast address.

[Table 4 on page 36](#) lists various valid combinations that the host table can store if you use the **l2-profile-one** profile. Each row in the table represents a case in which the host table is full and cannot accommodate any more entries.

Table 4: Example Host Table Combinations Using l2-profile-one

IPv4 unicast	IPv6 unicast	IPv4 multicast (*, G)	IPv4 multicast (S, G)	IPv6 multicast (*, G)	IPv6 multicast (S, G)
16K	0	0	0	0	0
12K	2K	0	0	0	0
12K	0	2K	2K	0	0
8K	4K	0	0	0	0
4K	2K	2K	2K	0	0
0	4K	0	0	1K	1K

Using the LPM Table with Junos OS 13.2X51-D10

The LPM table is also shared and the same principles apply. [Table 5 on page 36](#) provides examples of valid combinations that the LPM table can store, also using the **l2-profile-one** profile. Once again, each row in the table represents a case in which the table is full and cannot accommodate any more entries.

Table 5: Example LPM Table Combinations Using l2-profile-one Using Junos OS 13.2X51-D10

IPv4 entries	IPv6 Entries (prefix <= 64)	IPv6 Entries (prefix >= 65)
16K	0	0

Table 5: Example LPM Table Combinations Using l2-profile-one Using Junos OS 13.2X51-D10 (*continued*)

IPv4 entries	IPv6 Entries (prefix <= 64)	IPv6 Entries (prefix >= 65)
0	8K	0
8K	4K	0
4K	4K	1K
4K	2K	2K



NOTE: If you want to use more than 16 IPv6 addresses with prefix lengths greater than 64 with Junos OS 13.2X51-D10, you must follow the instructions at [“Configuring the Unified Forwarding Table” on page 38](#). As that topic explains, if you increase the number of addresses with prefix lengths greater than 64, you reduce the amount of LPM-table memory available to store IPv6 addresses with prefixes less than or equal to 64.

LPM Table Memory Allocation

You configure the memory allocation for LPM table entries differently depending on which version of Junos OS you use. To learn how to configure memory allocation for LPM table entries see [“Configuring the Unified Forwarding Table” on page 38](#). Note that starting with Junos OS 14.1X53-D30 you can free memory in the host table by using the **unicast-in-lpm** option with the **lpm-profile** to store IPv4 and IPv6 unicast addresses in the LPM table instead of the host table. See [“Configuring the lpm-profile With Junos OS 14.1x53-D30 and Later” on page 43](#).

Release History Table

Release	Description
14.1X53-D30	Note that starting with Junos OS 14.1X53-D30 you can free memory in the host table by using the unicast-in-lpm option with the lpm-profile to store IPv4 and IPv6 unicast addresses in the LPM table instead of the host table.
13.2X51-D15	Starting with Junos OS 13.2X51-D15, you can allocate more memory to store prefixes in the range /65 to /127 range.

Related Documentation

- [Configuring the Unified Forwarding Table on page 38](#)

Configuring the Unified Forwarding Table

To optimize the way your switch allocates memory for different types of addresses, you can choose a unified forwarding table profile. In addition to choosing this profile, you can also decide how you want memory allocated for longest prefix match (LPM) entries.

- [Configuring an Address-Storage Profile on page 38](#)
- [Configuring the LPM Allocation on page 39](#)

Configuring an Address-Storage Profile

On QFX5100, EX4600, and OCX1100 switches, you can control the allocation of memory available to store the following:

- MAC addresses
- Layer 3 host entries
- Longest prefix match (LPM) table entries

You configure the mix that best meets your needs by choosing the appropriate profile. [Table 6 on page 38](#) lists the profiles you can choose and the maximum values for the MAC address and host table entries.

Table 6: Unified Forwarding Table Profiles

Profile Name	MAC Table	Host Table (unicast and multicast addresses)					
	MAC Addresses	IPv4 unicast	IPv6 unicast	IPv4 (*, G)	IPv4 (S, G)	IPv6 (*, G)	IPv6 (S, G)
l2-profile-one	288K	16K	8K	8K	8K	4K	4K
l2-profile-two	224K	80K	40K	40K	40K	20K	20K
l2-profile-three (default)	160K	144K	72K	72K	72K	36K	36K
l3-profile	96K	208K	104K	104K	104K	52K	52K
lpm-profile	32K	16K	8K	8K	8K	4K	4K

Note that if the host table stores the maximum number of entries for any given type, the entire table is full and is unable to accommodate *any* entries of any other type. For example, an IPv6 unicast address occupies twice as much memory as an IPv4 unicast address, and an IPv6 multicast address occupies four times as much memory as an IPv4 unicast address. For more information about valid combinations of table entries see [“Understanding the Unified Forwarding Table” on page 34](#).

To configure the profile that you want, enter and commit the following statement:

```
[edit]
user@switch# set chassis forwarding-options profile-name
```



NOTE: When you configure and commit a profile, the PFE process restarts and all the data interfaces on the switch go down and come back up.

However, starting with Junos OS Release 14.1X53-D40, Packet Forwarding Engines on switches in a Virtual Chassis or Virtual Chassis Fabric (VCF) do not automatically restart upon configuring a unified forwarding table profile change. This behavior avoids Virtual Chassis or VCF instability after the change propagates to member switches and multiple Packet Forwarding Engines automatically restart at the same time. Instead, a message is displayed at the CLI prompt and logged to the switch's system log to notify you that the profile change does not take effect until the next time you reboot the Virtual Chassis or VCF. We recommend that you plan to make profile changes only when you can perform a Virtual Chassis or VCF system reboot immediately after committing the configuration update. Otherwise, the Virtual Chassis or VCF could become inconsistent if one or more members have a problem and restart with the new configuration before a planned system reboot activates the change on all members.

The settings for **l2-profile-three** are configured by default. That is, if you do not enter a **set forwarding-options chassis profile-name** statement, these settings are configured.

Configuring the LPM Allocation

In addition to choosing a profile, you can further optimize memory allocation for LPM table entries by configuring how many IPv6 prefixes in the range /65 through /127 you want the switch to store. The switch uses LPM entries during address lookup to match addresses to the most-specific (longest) applicable prefix. The procedures for configuring the LPM table are different depending on which version of Junos OS you are using.

- [Configuring the LPM Table With Junos OS 13.2X51-D10 and 13.2X52-D10 on page 39](#)
- [Configuring the LPM Table With Junos OS 13.2x51-D15 and Later on page 41](#)

Configuring the LPM Table With Junos OS 13.2X51-D10 and 13.2X52-D10

With Junos OS 13.2x51-D10 and 13.2X52-D10, the switch allocates memory for 16 IPv6 prefixes in the range /65 through /127 by default. If you want to use more than 16 IPv6 prefixes in this range, you must enter and commit the following statement:

```
user@switch# set chassis forwarding-options profile-name num-65-127-prefix [1-128]
```

Each increment adds support for 16 IPv6 prefixes between /65 and /127, for a maximum of 2048 such prefixes (16 x 128 = 2048). The system supports 16 of these prefixes by default, so to increase the number of supported prefixes, you must enter a value of 2 or greater. For example, if you enter **2**, the system will support 32 IPv6 prefixes in the range /65 through /127.



NOTE: When you configure and commit the `num-65-127-prefix` value, all the data interfaces on the switch restart. The management interfaces are unaffected.

The LPM table is shared, and each increment that you add for IPv6 prefixes in the range /65 through /127 reduces the number of table entries that are available for IPv4 prefixes and IPv6 prefixes shorter than /65. Note that IPv6 prefixes /65 and longer consume twice as much memory as shorter IPv6 prefixes and four times as much memory as IPv4 prefixes. So, for example, entering the following statement

```
user@switch# set chassis forwarding-options l2-profile-one num-65-127-prefix 2
```

provides for 16 additional IPv6 prefixes /65 or longer (for a total of 32 such prefixes) and reduces the numbers of other prefixes that can be stored, as indicated:

- 32 fewer IPv6 prefixes shorter than /65 (16 IPv6 prefixes /65 or longer consume the same amount of memory as 32 IPv6 prefixes shorter than /65), or
- 64 fewer IPv4 prefixes (16 IPv6 prefixes /65 or longer consume the same amount of memory as 64 IPv4 prefixes)

[Table 5 on page 36](#) provides examples of valid combinations that the LPM table can store using the **l2** and **l3** profiles. Once again, each row in the table represents a case in which the table is full and cannot accommodate any more entries.

Table 7: Example LPM Table Combinations Using l2-and l3 Profiles With Junos OS 13.2X51-D10 and 13.2X52-D10

num-65-127-prefix Value	IPv4 Entries	IPv6 Entries (Prefix <= 64)	IPv6 Entries (Prefix >= 65)
1 (default)	16K-16	0K	16
1 (default)	0K	8K-16	16
1 (default)	8K-16	4K	16
64	4K	4K	1K
64	2K	5K	1K
64	0K	6K	1K
128	4K	2K	2K
128	2K	3K	2K
128	0K	4K	2K



NOTE: With Junos OS 13.2X51-D10 and 13.2X52-D10, the **lpm-profile** does not support IPv6 prefixes. If you use this version of Junos OS and also use the **lpm-profile**, do not configure the **num-65-127-prefix** statement. That is, leave it at its default value of 1, which allows for as many as 128K IPv4 prefixes (the maximum possible).

Configuring the LPM Table With Junos OS 13.2x51-D15 and Later

With Junos OS 13.2X51-D15 and later, you can configure the memory allocation for the LPM table for the **lpm-profile** profile independently of the other profiles. In addition, Junos OS 13.2x51-D15 offers twice as much storage for IPv6 prefixes /65 through /127 (4K instead of 2K) for the **l2** and **l3** profiles.

- [Configuring the l2 and l3 profiles With Junos OS 13.2x51-D15 and Later on page 41](#)
- [Configuring the lpm-profile With Junos OS 13.2x51-D15 and Later on page 42](#)
- [Configuring the lpm-profile With Junos OS 14.1x53-D30 and Later on page 43](#)

Configuring the l2 and l3 profiles With Junos OS 13.2x51-D15 and Later

With Junos OS 13.2x51-D15 and later, you can configure the switch to support as many as 4K IPv6 prefixes /65 through /127 if you are using any profile other than the **lpm-profile** profile. To do so, enter and commit the following statement:

```
user@switch# set chassis forwarding-options lpm-profile num-65-127-prefix [0-4]
```

Each increment adds support for 1K IPv6 prefixes between /65 and /127, for a maximum of 4K such prefixes. The default value is 1, which allocates memory for 1K of IPv6 prefixes in this range. Each increment that you add for IPv6 prefixes in the range /65 through /127 reduces the number of table entries that are available for IPv6 prefixes shorter than /65 and IPv4 prefixes. [Table 8 on page 41](#) shows the numbers of entries that you can allocate by using the **num-65-127-prefix** statement with Junos OS 13.2X51-D15. Once again, each row represents a case in which the table is full and cannot accommodate any more entries.

Table 8: LPM Table Combinations for l2 and l3 profiles With Junos OS 13.2X51-D15

num-65-127-prefix Value	IPv4 Entries	IPv6 Entries (Prefix <= 64)	IPv6 Entries (Prefix >= 65)
0	16K	8K	0K
1 (default)	12K	6K	1K
2	8K	4K	2K
3	4K	2K	3K
4	0K	0K	4K



NOTE: When you configure the `num-65-127-prefix` value, the PFE process restarts and all the data interfaces on the switch go down and come back up. The management interfaces are unaffected.

However, starting with Junos OS Release 14.1X53-D40, Packet Forwarding Engines on switches in a Virtual Chassis or Virtual Chassis Fabric (VCF) do not automatically restart upon configuring a unified forwarding table profile change, to avoid Virtual Chassis or VCF instability when the change propagates to member switches and multiple Packet Forwarding Engines restart at the same time. Instead, a message is displayed at the CLI prompt and logged to the switch's system log to notify you that the profile change does not take effect until the next time you reboot the Virtual Chassis or VCF. We recommend that you plan to make profile changes only when you can perform a Virtual Chassis or VCF system reboot immediately after committing the configuration update. Otherwise, the Virtual Chassis or VCF could become inconsistent if one or more members have a problem and restart with the new configuration before a planned system reboot activates the change on all members.

Configuring the `lpm-profile` With Junos OS 13.2x51-D15 and Later

If you use the `lpm-profile` profile with Junos OS 13.2x51-D15 and later, you can control whether the switch allocates any memory for IPv6 prefixes /65 through /127. By default, the switch supports the following with this profile:

- 128K IPv4 prefixes
- 16K IPv6 prefixes (all lengths)

You can disable support for IPv6 prefixes /65 through /127 with the `lpm-profile` profile so that there is more memory for IPv6 prefixes shorter than /65. To do so, enter and commit the following statement:

```
user@switch# set chassis forwarding-options lpm-profile prefix-65-127-disable
```

If you enter this statement, the switch allocates memory for the following:

- 128K IPv4 and IPv6 prefixes shorter than /65
- 0K IPv6 prefixes /65 through /127

For example, if you use the `prefix-65-127-disable` option, each of the following combinations are valid:

- 100K IPv4 and 28K IPv6 /64 prefixes
- 64K IPv4 and 64K IPv6 /64 prefixes
- 128K IPv4 and 0K IPv6 /64 prefixes
- 0K IPv4 and 128K IPv6 /64 prefixes

Configuring the lpm-profile With Junos OS 14.1x53-D30 and Later

If you use the **lpm-profile** profile with Junos OS 14.1x53-D30 or later, you can configure the system to store unicast IPv4 and IPv6 host addresses in the LPM table by using the **unicast-in-lpm** option, thereby freeing memory in the host table. When you use this option, unicast IPv4 and IPv6 addresses are stored in the LPM table instead of the host table, as shown in [Table 9 on page 43](#). You can also use the **prefix-65-127-disable** option to maximize the number of IPv4 addresses and IPv6 addresses with prefixes shorter than /65 (and provide no memory for IPv6 addresses with prefixes longer than /64.)

Table 9: lpm-profile with unicast-in-lpm Option

prefix-65-127-disable?	MAC Table	Host Table (multicast addresses)						LPM Table unicast addresses)		
	MAC	IPv4 unicast	IPv6 unicast	IPv4 (*, G)	IPv4 (S, G)	IPv6 (*, G)	IPv6 (S, G)	IPv4 unicast	IPv6 unicast (</65)	IPv6 unicast (>/64)
No	32K	0	0	8K	8K	4K	4K	128K	16K	16K
Yes	32K	0	0	8K	8K	4K	4K	128K	128K	0

Note that all entries in each table share the same memory space. If a table stores the maximum number of entries for any given type, the entire shared table is full and is unable to accommodate any entries of any other type. For example, if you use the **unicast-in-lpm** option and there are 128K IPv4 unicast addresses stored in the LPM table, the entire LPM table is full and no IPv6 addresses can be stored. Similarly, if you use the **unicast-in-lpm** option but do not use the **prefix-65-127-disable** option and 16K IPv6 addresses with prefixes shorter than /65 are saved, the entire LPM table is full and no additional addresses (IPv4 or IPv6) can be stored.

To use the **unicast-in-lpm** option, enter and commit the following statement:

```
user@switch# set chassis forwarding-options lpm-profile unicast-in-lpm
```

To use the **prefix-65-127-disable** option, enter and commit the following statement:

```
user@switch# set chassis forwarding-options lpm-profile prefix-65-127-disable
```

Related Documentation

- [Understanding the Unified Forwarding Table on page 34](#)

Monitoring Routing Information

Purpose Use the monitoring functionality to view the **inet.0** routing table on the routing device.

Action To view the routing table, enter the following commands in the CLI interface:

- **show route terse**
- **show route detail**

Meaning [Table 10 on page 44](#) describes the different filters, their functions, and the associated actions.

Table 11 on page 44 summarizes key output fields in the routing information display.

Table 10: Filtering Route Messages

Field	Function	Your Action
Destination Address	Specifies the destination address of the route.	Enter the destination address.
Next hop address	Specifies the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.	Enter the next hop address.
Best route	Specifies only the best route available.	Select the view details of the best route.
Inactive routes	Specifies the inactive routes.	Select the view details of inactive routes.
Exact route	Specifies the exact route.	Select the view details of the exact route.
Hidden routes	Specifies the hidden routes.	Select the view details of hidden routes.
Search	Applies the specified filter and displays the matching messages.	To apply the filter and display messages, click Search .

Table 11: Summary of Key Routing Information Output Fields

Field	Values	Additional Information
Static Route Addresses	The list of static route addresses.	
Protocol	Protocol from which the route was learned: Static , Direct , Local .	
Preference	The preference is the individual preference value for the route.	The route preference is used as one of the route selection criteria.
Next-Hop	Network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.	<p>If a next hop is listed as Discard, all traffic with that destination address is discarded rather than routed. This value generally means that the route is a static route for which the discard attribute has been set.</p> <p>If a next hop is listed as Reject, all traffic with that destination address is rejected. This value generally means that the address is unreachable. For example, if the address is a configured interface address and the interface is unavailable, traffic bound for that address is rejected.</p> <p>If a next hop is listed as Local, the destination is an address on the host (either the loopback address or Ethernet management port 0 address, for example).</p>
Age	How long the route has been active.	

Table 11: Summary of Key Routing Information Output Fields (*continued*)

Field	Values	Additional Information
State	Flags for this route.	There are many possible flags.

Related Documentation • [Configuring Static Routing on page 4](#)

Verifying That Virtual Router Routing Instances Are Working

Purpose After creating a virtual router routing instance, verify that it has been set up properly.

- Action**
1. Use the **show route instance** command to list all the routing instances and their properties:


```
user@switch> show route instance
```

Instance	Primary RIB	Type	Active/holddown/hidden
master	inet.0	forwarding	4/0/1
__juniper_private1__	__juniper_private1__.inet.0	forwarding	1/0/3
__juniper_private2__	__juniper_private2__.inet.0	forwarding	0/0/1
__juniper_private3__	__juniper_private3__.inet.0	forwarding	1/0/2
__juniper_private4__	__juniper_private4__.inet.0	forwarding	4/0/2
__master.anon__		forwarding	
r1		virtual-router	
r2		virtual-router	
 2. Use the **show route forwarding-table** command to view the forwarding table information for each routing instance:


```
user@switch> show route forwarding-table
```

Routing table: r1---qfabric.inet

Internet:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	1628	1	
0.0.0.0/32	perm	0		dscd	1626	1	
224.0.0.0/4	perm	0		mdsc	1627	1	
224.0.0.1/32	perm	0	224.0.0.1	mcst	1623	1	
255.255.255.255/32	perm	0		bcst	1624	1	

Meaning The output displays the routing table information and confirms that the virtual router routing instances have been created and the links are up.

- Related Documentation**
- [Configuring Virtual Router Routing Instances on page 8](#)

Troubleshooting Virtual Routing Instances

- [Direct Routes Not Leaked Between Routing Instances on page 46](#)

Direct Routes Not Leaked Between Routing Instances

Problem **Description:** Direct routes are not exported (leaked) between virtual routing instances. For example, consider the following scenario:

- Switch with two virtual routing instances:
 - Routing instance 1 connects to downstream device through interface xe-0/0/1.
 - Routing instance 2 connects to upstream device through interface xe-0/0/2.

If you enable route leaking between the routing instances (by using the **rib-group** statement, for example), the downstream device cannot connect to the upstream device because the switch connects to the upstream device over a direct route and these routes are not leaked between instances.



NOTE: You can see a route to the upstream device in the routing table of the downstream device, but this route is not functional.

Indirect routes *are* leaked between routing instances, so the downstream device can connect to any upstream devices that are connected to the switch over indirect routes.

Solution This is expected behavior.

- Related Documentation**
- [Understanding Virtual Router Routing Instances on page 7](#)
 - [Configuring Virtual Router Routing Instances on page 8](#)
 - [rib-group on page 146](#)

PART 2

Configuration Statements and Operational Commands

- [Routing Options Configuration Statements on page 49](#)
- [Routing Options Operational Commands on page 171](#)

CHAPTER 2

Routing Options Configuration Statements

- [active](#) on page 52
- [aggregate \(Routing\)](#) on page 53
- [as-path \(Routing Options\)](#) on page 55
- [autonomous-system](#) on page 57
- [backup-pe-group](#) on page 59
- [backups](#) on page 60
- [bandwidth \(Multicast Flow Map\)](#) on page 61
- [bfd-liveness-detection \(Routing Options Static Route\)](#) on page 62
- [bgp-orf-cisco-mode](#) on page 66
- [bmp](#) on page 68
- [brief](#) on page 70
- [centralized](#) on page 71
- [community \(Routing Options\)](#) on page 72
- [confederation](#) on page 74
- [disable \(Routing Options\)](#) on page 75
- [description \(Routing Instances\)](#) on page 75
- [discard](#) on page 76
- [export \(Routing Options\)](#) on page 77
- [export-rib](#) on page 78
- [fate-sharing](#) on page 81
- [flow](#) on page 82
- [flow-map](#) on page 83
- [forwarding-cache \(Flow Maps\)](#) on page 84
- [forwarding-cache \(Multicast\)](#) on page 85
- [forwarding-options \(chassis\)](#) on page 87
- [forwarding-table](#) on page 89

- [generate](#) on page 90
- [graceful-restart \(Enabling Globally\)](#) on page 92
- [import \(Routing Options\)](#) on page 93
- [import-policy](#) on page 94
- [import-rib](#) on page 95
- [indirect-next-hop](#) on page 96
- [install \(Routing Options\)](#) on page 97
- [instance-export](#) on page 98
- [instance-import](#) on page 98
- [instance-type](#) on page 99
- [interface \(Multicast Static Routes\)](#) on page 100
- [interface \(Routing Instances\)](#) on page 101
- [interface \(Routing Options\)](#) on page 102
- [interface-routes](#) on page 103
- [local-address \(Routing Options\)](#) on page 104
- [martians](#) on page 105
- [maximum-bandwidth \(Routing Options\)](#) on page 106
- [maximum-paths](#) on page 107
- [maximum-prefixes](#) on page 109
- [med-igp-update-interval](#) on page 110
- [metric \(Aggregate, Generated, or Static Route\)](#) on page 111
- [multicast \(Routing Options\)](#) on page 112
- [no-qos-adjust](#) on page 113
- [num-65-127-prefix](#) on page 114
- [options \(Routing Options\)](#) on page 115
- [pim-to-igmp-proxy](#) on page 116
- [pim-to-mld-proxy](#) on page 117
- [policy \(Aggregate and Generated Routes\)](#) on page 118
- [policy \(Flow Maps\)](#) on page 119
- [policy-options](#) on page 120
- [policy-statement](#) on page 121
- [ppm](#) on page 125
- [ppm \(Ethernet Switching\)](#) on page 126
- [preference \(Routing Options\)](#) on page 127
- [prefix](#) on page 128
- [prefix-65-127-disable](#) on page 128
- [protocols](#) on page 129

- [qualified-next-hop \(Static Routes\)](#) on page 132
- [readvertise](#) on page 134
- [redundant-sources](#) on page 135
- [resolution](#) on page 136
- [resolution-ribs](#) on page 137
- [resolve](#) on page 138
- [restart-duration \(Routing Options\)](#) on page 139
- [retain](#) on page 140
- [reverse-oif-mapping](#) on page 141
- [rpf-check-policy \(Routing Options RPF\)](#) on page 142
- [rib \(General\)](#) on page 143
- [rib \(Route Resolution\)](#) on page 145
- [rib-group \(Routing Options\)](#) on page 146
- [rib-groups](#) on page 147
- [route-distinguisher-id](#) on page 149
- [route-record](#) on page 150
- [router-id](#) on page 151
- [routing-instances](#) on page 152
- [routing-options](#) on page 153
- [scope](#) on page 153
- [scope-policy](#) on page 154
- [source \(Source-Specific Multicast\)](#) on page 155
- [source-routing](#) on page 156
- [ssm-groups](#) on page 157
- [ssm-map \(Routing Options Multicast\)](#) on page 158
- [static \(Routes\)](#) on page 159
- [subscriber-leave-timer](#) on page 161
- [tag \(Routing Options\)](#) on page 162
- [threshold \(Multicast Forwarding Cache\)](#) on page 163
- [timeout \(Flow Maps\)](#) on page 164
- [timeout \(Multicast\)](#) on page 165
- [traceoptions \(Routing Options\)](#) on page 166
- [upstream-interface](#) on page 169

active

Syntax	(active passive);
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Determine whether static, aggregate, or generated routes are removed from the routing and forwarding tables when they become inactive. Static routes are only removed from the routing table if the next hop becomes unreachable. This can occur if the local or neighbor interface goes down. Routes that have been configured to remain continually installed in the routing and forwarding tables are marked with reject next hops when they are inactive.</p> <ul style="list-style-type: none"> • active—Remove a route from the routing and forwarding tables when it becomes inactive. • passive—Have a route remain continually installed in the routing and forwarding tables even when it becomes inactive. <p>Include the active statement when configuring an individual route in the route portion of the static statement to override a passive option specified in the defaults portion of the statement.</p>
Default	active
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Examples: Configuring Static Routes</i> • <i>Example: Summarizing Routes Through Route Aggregation</i> • <i>Example: Conditionally Generating Static Routes</i>

aggregate (Routing)

Syntax	<pre> aggregate { defaults { ... aggregate-options ... } route destination-prefix { policy policy-name; ... aggregate-options ... } } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options rib <i>routing-table-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure aggregate routes.
Options	<p>aggregate-options—Additional information about aggregate routes that is included with the route when it is installed in the routing table. Specify zero or more of the following options in aggregate-options. Each option is explained separately.</p> <ul style="list-style-type: none"> • (active passive); • as-path <as-path> <origin (egp igp incomplete)> <atomic-aggregate> <aggregator as-number ip-address>; • (brief full); • community [<i>community-ids</i>]; • discard; • (metric metric2 metric3 metric4) <i>value</i> <type type>; • (preference preference2 color color2) <i>preference</i> <type type>; • tag <i>metric type number</i>; <p>defaults—Specify global aggregate route options. These options only set default attributes inherited by all newly created aggregate routes. These are treated as global defaults</p>

and apply to all the aggregate routes you configure in the **aggregate** statement. This part of the **aggregate** statement is optional.

route *destination-prefix*—Configure a nondefault aggregate route:

- **default**—For the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.
- ***destination-prefix/prefix-length***—***destination-prefix*** is the network portion of the IP address, and ***prefix-length*** is the destination prefix length.

The **policy** statement is explained separately.

Required Privilege Level	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Summarizing Routes Through Route Aggregation</i>

as-path (Routing Options)

Syntax	<code>as-path <as-path> <aggregator as-number ip-address> <atomic-aggregate> <origin (egp igp incomplete)>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Associate BGP autonomous system (AS) path information with a static, aggregate, or generated route.</p> <p>In Junos OS Release 9.1 and later, the numeric range for the AS number is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.2 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <i><16-bit high-order value in decimal>.<16-bit low-order value in decimal></i>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format. You can specify a value in the range from 0.0 through 65535.65535 in AS-dot notation format.</p>
Default	No AS path information is associated with static routes.
Options	<p>aggregator—(Optional) Attach the BGP aggregator path attribute to the aggregate route. You must specify the last AS number that formed the aggregate route (encoded as two octets) for <i>as-number</i>, followed by the IP address of the BGP system that formed the aggregate route for <i>ip-address</i>.</p>

as-path—(Optional) AS path to include with the route. It can include a combination of individual AS path numbers and AS sets. Enclose sets in brackets ([]). The first AS number in the path represents the AS immediately adjacent to the local AS. Each subsequent number represents an AS that is progressively farther from the local AS, heading toward the origin of the path. You cannot specify a regular expression for **as-path**. You must use a complete, valid AS path.

atomic-aggregate—(Optional) Attach the BGP **atomic-aggregate** path attribute to the aggregate route. This path attribute indicates that the local system selected a less specific route instead of a more specific route.

origin egp—(Optional) BGP origin attribute that indicates that the path information originated in another AS.

origin igp—(Optional) BGP origin attribute that indicates that the path information originated within the local AS.

origin incomplete—(Optional) BGP origin attribute that indicates that the path information was learned by some other means.

Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---------------------------------------------------------------------------------------------------------------------

Related Documentation	<ul style="list-style-type: none">• <i>Examples: Configuring Static Routes</i>• <i>Example: Summarizing Routes Through Route Aggregation</i>• <i>Example: Conditionally Generating Static Routes</i>• <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i>
------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

autonomous-system

Syntax	<pre>autonomous-system <i>autonomous-system</i> <asdot-notation> <loops <i>number</i>> { independent-domain <no-attrset>; }</pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>asdot-notation option introduced in Junos OS Release 9.3.</p> <p>asdot-notation option introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>no-attrset option introduced in Junos OS Release 10.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Specify the routing device's AS number.</p> <p>An autonomous system (AS) is a set of routing devices that are under a single technical administration and that generally use a single interior gateway protocol (IGP) and metrics to propagate routing information within the set of routing devices. An AS appears to other ASs to have a single, coherent interior routing plan and presents a consistent picture of what destinations are reachable through it. ASs are identified by a number that is assigned by the Network Information Center (NIC) in the United States (http://www.isi.edu).</p> <p>If you are using BGP on the routing device, you must configure an AS number.</p> <p>The AS path attribute is modified when a route is advertised to an EBGP peer. Each time a route is advertised to an EBGP peer, the local routing device prepends its AS number to the existing path attribute, and a value of 1 is added to the AS number.</p> <p>In Junos OS Release 9.1 and later, the numeric range is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <16-bit high-order value in decimal>.<16-bit low-order value in decimal>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format.</p>
Options	<p><i>autonomous-system</i>—AS number. Use a number assigned to you by the NIC.</p>

Range: 1 through 4,294,967,295 ($2^{32} - 1$) in plain-number format for 4-byte AS numbers

In this example, the 4-byte AS number 65,546 is represented in plain-number format:

```
[edit]
routing-options {
  autonomous-system 65546;
}
```

Range: 0.0 through 65535.65535 in AS-dot notation format for 4-byte numbers

In this example, 1.10 is the AS-dot notation format for 65,546:

```
[edit]
routing-options {
  autonomous-system 1.10;
}
```

Range: 1 through 65,535 in plain-number format for 2-byte AS numbers (this is a subset of the 4-byte range)

In this example, the 2-byte AS number 60,000 is represented in plain-number format:

```
[edit]
routing-options {
  autonomous-system 60000;
}
```

asdot-notation—(Optional) Display the configured 4-byte autonomous system number in the AS-dot notation format.

Default: Even if a 4-byte AS number is configured in the AS-dot notation format, the default is to display the AS number in the plain-number format.

loops number—(Optional) Specify the number of times detection of the AS number in the AS_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.

Range: 1 through 10

Default: 1



NOTE: When you specify the same AS number in more than one routing instance on the local routing device, you must configure the same number of loops for the AS number in each instance. For example, if you configure a value of 3 for the loops statement in a VRF routing instance that uses the same AS number as that of the master instance, you must also configure a value of 3 loops for the AS number in the master instance.

Use the **independent-domain** option if the loops statement must be enabled only on a subset of routing instances.

The remaining statement is explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Examples: Configuring External BGP Peering*
- *Examples: Configuring Internal BGP Peering*

backup-pe-group

Syntax `backup-pe-group group-name {
 backups [addresses];
 local-address address;
}`

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast],
[edit logical-systems *logical-system-name* routing-options multicast],
[edit routing-instances *routing-instance-name* routing-options multicast],
[edit routing-options multicast]

Release Information Statement introduced in Junos OS Release 9.0.
Statement introduced in Junos OS Release 9.5 for EX Series switches.
Statement introduced in Junos OS Release 13.2X51-D15 for the QFX Series.
Statement introduced in Junos OS Release 14.1X53-D30 for the QFX VC/VCF Series.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Configure a backup provider edge (PE) group for ingress PE redundancy when point-to-multipoint label-switched paths (LSPs) are used for multicast distribution.

Options **backups** *addresses*—Specify the address of backup PE routers for ingress PE redundancy when point-to-multipoint LSPs are used for multicast distribution.

local-address *address*—Specify the address of the local PE router for ingress PE redundancy when point-to-multipoint LSPs are used for multicast distribution.

pe-group-name—Specify the name for the group of PE routers that provide ingress PE router redundancy for point-to-multipoint LSPs.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Configuring Ingress PE Redundancy*
- *Configuring Ingress PE Router Redundancy for Point-to-Multipoint LSPs*

backups

Syntax	<code>backups [<i>addresses</i>];</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast backup-pe-group <i>group-name</i>], [edit logical-systems <i>logical-system-name</i> routing-options multicast backup-pe-group <i>group-name</i>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast backup-pe-group <i>group-name</i>], [edit routing-options multicast backup-pe-group <i>group-name</i>]
Release Information	Statement introduced in Junos OS Release 9.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure the address of backup PEs for ingress PE redundancy when point-to-multipoint label-switched paths (LSPs) are used for multicast distribution.
Options	<i>addresses</i> —Addresses of other PEs in the backup group.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Configuring Ingress PE Redundancy</i>

bandwidth (Multicast Flow Map)

Syntax	<code>bandwidth (<i>bps</i> adaptive);</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast flow-map],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast flow-map],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast flow-map],</p> <p>[edit routing-options multicast flow-map]</p>
Release Information	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure the bandwidth property for multicast flow maps.
Options	<p>adaptive—Specify that the bandwidth is measured for the flows that are matched by the flow map.</p> <p><i>bps</i>—Bandwidth, in bits per second, for the flow map.</p> <p>Range: 0 through any amount of bandwidth</p> <p>Default: 2 Mbps</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring a Multicast Flow Map</i>

bfd-liveness-detection (Routing Options Static Route)

Syntax `bfd-liveness-detection {`
 `authentication {`
 `algorithm` *algorithm-name*;
 `key-chain` *key-chain-name*;
 `loose-check`;
 `}`
 `detection-time {`
 `threshold` *milliseconds*;
 `}`
 `holddown-interval` *milliseconds*;
 `local-address` *ip-address*;
 `minimum-interval` *milliseconds*;
 `minimum-receive-interval` *milliseconds*;
 `minimum-receive-ttl` *number*;
 `multiplier` *number*;
 `neighbor` *address*;
 `no-adaptation`;
 `transmit-interval {`
 `minimum-interval` *milliseconds*;
 `threshold` *milliseconds*;
 `}`
 `version` (1 | automatic);
`}`

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix*],
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options static route *destination-prefix*],
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],
 [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* static route *destination-prefix*],
 [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],
 [edit logical-systems *logical-system-name* routing-options static route *destination-prefix*],
 [edit logical-systems *logical-system-name* routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],
 [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix*],
 [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],
 [edit routing-instances *routing-instance-name* routing-options static route *destination-prefix*],
 [edit routing-instances *routing-instance-name* routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],
 [edit routing-options rib *routing-table-name* static route *destination-prefix*],
 [edit routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],
 [edit routing-options static route *destination-prefix*],

[edit routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)]

Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>detection-time threshold and transmit-interval threshold options introduced in Junos OS Release 8.2.</p> <p>local-address statement introduced in Junos OS Release 8.2.</p> <p>minimum-receive-ttl statement introduced in Junos OS Release 8.2.</p> <p>Support for logical routers introduced in Junos OS Release 8.3.</p> <p>holddown-interval statement introduced in Junos OS Release 8.5.</p> <p>no-adaptation statement introduced in Junos OS Release 9.0.</p> <p>Support for IPv6 static routes introduced in Junos OS Release 9.1.</p> <p>authentication algorithm, authentication key-chain, and authentication loose-check statements introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure bidirectional failure detection timers and authentication criteria for static routes.</p>

Options **authentication algorithm** *algorithm-name* —Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, or **meticulous-keyed-sha-1**.

authentication key-chain *key-chain-name* —Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

authentication loose-check—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.

detection-time threshold *milliseconds*—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

holddown-interval *milliseconds*—Configure an interval specifying how long a BFD session must remain up before a state change notification is sent. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.

Range: 0 through 255,000

Default: 0

local-address *ip-address*—Enable a multihop BFD session and configure the source address for the BFD session.

minimum-interval *milliseconds*—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.

Range: 1 through 255,000

minimum-receive-interval *milliseconds*—Configure the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

Range: 1 through 255,000

minimum-receive-ttl *number*—Configure the time to live (TTL) for the multihop BFD session.

Range: 1 through 255

Default: 255

multiplier *number*—Configure number of hello packets not received by the neighbor that causes the originating interface to be declared down.

Range: 1 through 255

Default: 3

neighbor *address*—Configure a next-hop address for the BFD session for a next hop specified as an interface name.

no-adaptation—Specify for BFD sessions not to adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

transmit-interval threshold *milliseconds*—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

Range: 0 through 4,294,967,295

transmit-interval minimum-interval *milliseconds*—Configure the minimum interval at which the routing device transmits hello packets to a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level.

Range: 1 through 255,000


version—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version).

Default: automatic

Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---------------------------------------------------------------------------------------------------------------------

Related Documentation	<ul style="list-style-type: none">• Example: Configuring BFD for Static Routes on page 15• Example: Configuring BFD Authentication for Static Routes on page 29
------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

bgp-orf-cisco-mode

Syntax	<code>bgp-orf-cisco-mode;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols bgp outbound-route-filter],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> outbound-route-filter],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> outbound-route-filter],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp outbound-route-filter],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> outbound-route-filter],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> outbound-route-filter],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options outbound-route-filter],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options outbound-route-filter],</p> <p>[edit protocols bgp outbound-route-filter],</p> <p>[edit protocols bgp group <i>group-name</i> outbound-route-filter],</p> <p>[edit protocols bgp group <i>group-name</i> neighbor <i>address</i> outbound-route-filter],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp outbound-route-filter],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> outbound-route-filter],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols bgp group <i>group-name</i> neighbor <i>address</i> outbound-route-filter],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options outbound-route-filter],</p> <p>[edit routing-options outbound-route-filter]</p>
Release Information	<p>Statement introduced in Junos OS Release 9.2.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.2.</p> <p>Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Enable interoperability with routing devices that use the vendor-specific outbound route filter compatibility code of 130 and code type of 128.
	<p> NOTE: To enable interoperability for all BGP peers configured on the routing device, include the statement at the [edit routing-options outbound-route-filter] hierarchy level.</p>
Default	Disabled

Required Privilege	routing—To view this statement in the configuration.
Level	routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Configuring BGP Prefix-Based Outbound Route Filtering</i>

bmp

```
Syntax  bmp {
    authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
    authentication-key key;
    authentication-key-chain authentication-key-chain;
    connection-mode (active | passive);
    hold-down {
        seconds;
        flaps flaps;
        period seconds;
    }
    initiation-message text;
    local-address address;
    local-port port;
    monitor (disable | enable);
    priority (high | low | medium);
    route-monitoring {
        none;
        post-policy {
            exclude-non-eligible;
        }
        pre-policy {
            exclude-non-feasible;
        }
    }
}
station station-name {
    authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
    authentication-key key;
    authentication-key-chain authentication-key-chain;
    connection-mode (active | passive);
    hold-down {
        seconds;
        flaps flaps;
        period seconds;
    }
    initiation-message text;
    local-address address;
    local-port port;
    monitor (disable | enable);
    priority (high | low | medium);
    route-monitoring {
        none;
        post-policy {
            exclude-non-eligible;
        }
        pre-policy {
            exclude-non-feasible;
        }
    }
}
station-address (ip-address | name);
station-port port-number;
statistics-timeout seconds;
traceoptions {
```

```

        file filename <files number> <size size> <world-readable | no-world-readable>;
        flag flag <flag-modifier>;
    }
}
station-address (ip-address | name);
station-port port-number;
statistics-timeout seconds;
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier>;
}
}

```

Hierarchy Level [edit logical-systems *logical-system-name* protocols bgp],
[edit logical-systems *logical-system-name* protocols bgp group *group-name*],
[edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],
[edit logical-systems *logical-system-name* routing-options],
[edit protocols bgp],
[edit protocols bgp group *group-name*],
[edit protocols bgp group *group-name* neighbor *address*],
[edit routing-options]

Release Information Statement introduced in Junos OS Release 9.5.
Statement introduced in Junos OS Release 9.5 for EX Series switches.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.
Support for BMP version 3 introduced in Junos OS Release 13.3.

Description Configure the BGP Monitoring Protocol (BMP), which enables the routing device to collect data from the BGP Adjacency-RIB-In routing tables and periodically send that data to a monitoring station.

Options The remaining statements are explained separately.


Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation • *Example: Configuring the BGP Monitoring Protocol*

brief

Syntax	(brief full);
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (aggregate generate) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)],</p> <p>[edit routing-options (aggregate generate) (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure all AS numbers from all contributing paths to be included in the aggregate or generated route's path.</p> <ul style="list-style-type: none"> • brief—Include only the longest common leading sequences from the contributing AS paths. If this results in AS numbers being omitted from the aggregate route, the BGP ATOMIC_ATTRIBUTE path attribute is included with the aggregate route. • full—Include all AS numbers from all contributing paths in the aggregate or generated route's path. Include this option when configuring an individual route in the route portion of the generate statement to override a retain option specified in the defaults portion of the statement.
Default	full
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Summarizing Routes Through Route Aggregation</i> • <i>Example: Conditionally Generating Static Routes</i> • aggregate on page 53 • generate on page 90

centralized

Syntax	centralized;
Hierarchy Level	[edit protocols lacp ppm]
Release Information	Statement introduced in Junos OS Release 10.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Disable distributed periodic packet management (PPM) processing for Link Aggregation Control Protocol (LACP) packets and run all PPM processing for LACP packets on the Routing Engine.</p> <p>This statement disables distributed PPM processing for only LACP packets. You can disable distributed PPM processing for all packets that use PPM and run all PPM processing on the Routing Engine by configuring the no-delegate-processing statement in the [edit routing-options ppm] hierarchy.</p>
<div>  <p>BEST PRACTICE: We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.</p> </div>	
Default	Distributed PPM processing is enabled for all packets that use PPM.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</i> • <i>Configuring Aggregated Ethernet LACP (CLI Procedure)</i> • Configuring Distributed Periodic Packet Management on page 9 • <i>Configuring Link Aggregation</i>

community (Routing Options)

Syntax	<code>community ([<i>community-ids</i>] no-advertise no-export no-export-subconfed none);</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Associate BGP community information with a static, aggregate, or generated route.
Default	No BGP community information is associated with static routes.
Options	<p><i>community-ids</i>—One or more community identifiers. The <i>community-ids</i> format varies according to the type of attribute that you use.</p> <p>The BGP community attribute format is <i>as-number:community-value</i>:</p> <ul style="list-style-type: none"> • <i>as-number</i>—AS number of the community member. It can be a value from 1 through 65,535. The AS number can be a decimal or hexadecimal value. • <i>community-value</i>—Identifier of the community member. It can be a number from 0 through 65,535. <p>For more information about BGP community attributes, see the “Configuring the Extended Communities Attribute” section in the <i>Routing Policies, Firewall Filters, and Traffic Policers Feature Guide for Routing Devices</i>.</p> <p>For specifying the BGP community attribute only, you also can specify <i>community-ids</i> as one of the following well-known community names defined in RFC 1997:</p> <ul style="list-style-type: none"> • no-advertise—Routes containing this community name are not advertised to other BGP peers. • no-export—Routes containing this community name are not advertised outside a BGP confederation boundary.

- **no-export-subconfed**—Routes containing this community are advertised to IBGP peers with the same AS number, but not to members of other confederations.



NOTE: Extended community attributes are not supported at the [edit routing-options] hierarchy level. You must configure extended communities at the [edit policy-options] hierarchy level. For information about configuring extended communities, see the *Routing Policies, Firewall Filters, and Traffic Policers Feature Guide for Routing Devices*.

Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Examples: Configuring Static Routes</i> • <i>Example: Summarizing Routes Through Route Aggregation</i> • <i>Example: Conditionally Generating Static Routes</i> • aggregate on page 53 • generate on page 90 • <i>static</i>

confederation

Syntax	<code>confederation <i>confederation-autonomous-system</i> members [<i>autonomous-systems</i>];</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Specify the routing device's confederation AS number.</p> <p>If you administer multiple ASs that contain a very large number of BGP systems, you can group them into one or more <i>confederations</i>. Each confederation is identified by its own AS number, which is called a <i>confederation AS number</i>. To external ASs, a confederation appears to be a single AS. Thus, the internal topology of the ASs making up the confederation is hidden.</p> <p>The BGP path attributes NEXT_HOP, LOCAL_PREF, and MULTI_EXIT_DISC, which normally are restricted to a single AS, are allowed to be propagated throughout the ASs that are members of the same confederation.</p> <p>Because each confederation is treated as if it were a single AS, you can apply the same routing policy to all the ASs that make up the confederation.</p> <p>Grouping ASs into confederations reduces the number of BGP connections required to interconnect ASs.</p> <p>If you are using BGP, you can enable the local routing device to participate as a member of an AS confederation. To do this, include the confederation statement.</p> <p>Specify the AS confederation identifier, along with the peer AS numbers that are members of the confederation.</p> <p>Note that peer adjacencies do not form if two BGP neighbors disagree about whether an adjacency falls within a particular confederation.</p>
Options	<p><i>autonomous-systems</i>—AS numbers of the confederation members.</p> <p>Range: 1 through 65,535</p> <p><i>confederation-autonomous-system</i>—Confederation AS number. Use one of the numbers assigned to you by the NIC.</p> <p>Range: 1 through 65,535</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

Related Documentation • *Example: Configuring BGP Confederations*


disable (Routing Options)

Syntax	disable;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options graceful-restart], [edit logical-systems <i>logical-system-name</i> routing-options graceful-restart], [edit routing-instances <i>routing-instance-name</i> routing-options graceful-restart], [edit routing-options graceful-restart]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
Description	Disable graceful restart.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	• <i>Junos OS High Availability Library for Routing Devices</i>

description (Routing Instances)

Syntax	description text;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>], [edit routing-instances <i>routing-instance-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Provide a text description for the routing instance. If the text includes one or more spaces, enclose it in quotation marks (" "). Any descriptive text you include is displayed in the output of the show route instance detail command and has no effect on the operation of the routing instance.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	• <i>Configuring Routing Instances on PE Routers in VPNs</i> • show route instance on page 277

discard

Syntax	discard;
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (aggregate generate) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)],</p> <p>[edit routing-options (aggregate generate) (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.</p> <p>To propagate static routes into the routing protocols, include the discard statement when you define the route, along with a routing policy.</p>
	<p> NOTE: In other vendors' software, a common way to propagate static routes into routing protocols is to configure the routes so that the next-hop routing device is the loopback address (commonly, 127.0.0.1). However, configuring static routes in this way (by including a statement such as route address/mask-length next-hop 127.0.0.1) does not propagate the static routes, because the forwarding table ignores static routes whose next-hop routing device is the loopback address.</p>
Default	When an aggregate route becomes active, it is installed in the routing table with a reject next hop, which means that ICMP unreachable messages are sent.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <i>Example: Summarizing Routes Through Route Aggregation</i>

- *Example: Conditionally Generating Static Routes*
- [aggregate on page 53](#)
- [generate on page 90](#)

export (Routing Options)

Syntax	<code>export [<i>policy-name</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options forwarding-table],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options forwarding-table],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options forwarding-table],</p> <p>[edit routing-options forwarding-table]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 14.1X53-D30 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Apply one or more policies to routes being exported from the routing table into the forwarding table.</p> <p>In the export statement, list the name of the routing policy to be evaluated when routes are being exported from the routing table into the forwarding table. Only active routes are exported from the routing table.</p> <p>You can reference the same routing policy one or more times in the same or a different export statement.</p> <p>You can apply export policies to routes being exported from the routing table into the forwarding table for the following features:</p> <ul style="list-style-type: none"> • Per-packet load balancing • Class of service (CoS)
Options	<i>policy-name</i> —Name of one or more policies.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Load Balancing BGP Traffic</i> • <i>Routing Policies, Firewall Filters, and Traffic Policers Feature Guide for Routing Devices</i> • <i>How a Routing Policy Is Evaluated</i>

export-rib

Syntax	<code>export-rib <i>routing-table-name</i>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib-groups <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib-groups <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib-groups <i>group-name</i>],</p> <p>[edit routing-options rib-groups <i>group-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Specify the name of the routing table from which Junos OS should export routing information. For any individual RIB group, only one table can be specified in the export-rib statement.</p>

The **export-rib** statement specifies the source table from which routing information is advertised.

One common use of the **export-rib** statement is interdomain routing. The export RIB is the table used when BGP extracts routes to advertise to peers. In multicast interdomain routing, for example, the export RIB is likely to be inet.2.

Another use of **export-rib** is dynamic route leaking between the global routing table (inet.0) and a VRF routing table (*instance.inet.0*). For example, you can use a RIB group to copy routes learned in the VRF into the global routing table, inet.0, or copy routes learned in inet.0 into a VRF. You define the use of this RIB group in the VRF's BGP configuration. In a routing policy you can do dynamic filtering of routes. For instance, you can use an import policy to only copy routes with certain communities into the global routing table.

For example:

```
rib-groups {
  rib-interface-routes-v4 {
    import-rib [ inet.0 VRF.inet.0 ];
  }
  rib-import-VRF-routes-to-inet0-v4 {
    export-rib VRF.inet.0;
    import-rib [ VRF.inet.0 inet.0 ];
    import-policy rib-import-VRF-routes-to-inet0-v4;
  }
  rib-import-inet0-routes-to-VRF-v4 {
    export-rib inet.0;
    import-rib [ inet.0 VRF.inet.0 ];
    import-policy rib-import-inet0-routes-to-VRF-v4;
  }
}
routing-options {
  interface-routes {
```



```

        rib-group {
            inet rib-interface-routes-v4;
        }
    }
}
protocols {
    bgp {
        group iBGP-peers {
            type internal;
            family inet {
                unicast {
                    rib-group rib-import-inet0-routes-to-VRF-v4;
                }
            }
        }
    }
}
routing-instances {
    VRF {
        routing-options {
            interface-routes {
                rib-group {
                    inet rib-interface-routes-v4;
                }
            }
        }
        protocols {
            bgp {
                group peersin-VRF {
                    family inet {
                        unicast {
                            rib-group rib-import-VRF-routes-to-inet0-v4;
                        }
                    }
                }
            }
        }
    }
}
}

```

Options *routing-table-name*—Routing table group name.

Required Privilege routing—To view this statement in the configuration.
Level routing-control—To add this statement to the configuration.

**Related
Documentation**

- *Example: Exporting Specific Routes from One Routing Table Into Another Routing Table*
- *Example: Configuring a PIM RPF Routing Table*
- *Example: Configuring DVMRP to Announce Unicast Routes*
- *Example: Configuring a Dedicated PIM RPF Routing Table*
- *Example: Configuring Any-Source Multicast for Draft-Rosen VPNs*
- [import-rib on page 95](#)
- *passive*

fate-sharing

Syntax	<pre>fate-sharing { group <i>group-name</i> { cost <i>value</i>; from <i>address</i> <to <i>address</i>>; } }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Specify a backup path in case the primary path becomes unusable.</p> <p>You specify one or more objects with common characteristics within a group. All objects are treated as /32 host addresses. The objects can be a LAN interface, a router ID, or a point-to-point link. Sequence is insignificant.</p> <p>Changing the fate-sharing database does not affect existing established LSPs until the next CSPF reoptimization. The fate-sharing database does affect fast-reroute detour path computations.</p>
Options	<p>cost <i>value</i>—Cost assigned to the group. Range: 1 through 65,535 Default: 1</p> <p>from <i>address</i>—Address of the router or address of the LAN/NBMA interface. For example, an Ethernet network with four hosts in the same fate-sharing group would require you to list all four of the separate from addresses in the group.</p> <p>group <i>group-name</i>—Each fate-sharing group must have a name, which can have a maximum of 32 characters, including letters, numbers, periods (.), and hyphens (-). You can define up to 512 groups.</p> <p>to <i>address</i>—(Optional) Address of egress router. For point-to-point link objects, you must specify both a from and a to address.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Ingress Router for MPLS-Signaled LSPs</i> • <i>Junos OS MPLS Applications Library for Routing Devices</i>

flow

Syntax	<pre> flow { route <i>name</i> { match { <i>match-conditions</i>; } term-order (legacy standard); then { <i>actions</i>; } } firewall-install-disable; term-order (legacy standard); validation { traceoptions { file <i>filename</i> <files <i>number</i>> <size <i>size</i>> <world-readable no-world-readable>; flag <i>flag</i> <flag-modifier> <disable>; } } } </pre>
Hierarchy Level	<p>[edit routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>term-order statement introduced in Junos OS Release 10.0</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>firewall-install-disable statement introduced in Junos OS Releases 12.1X48 and 12.3 for PTX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure a flow route.
Default	legacy
Options	<p><i>actions</i>—An action to take if conditions match.</p> <p>firewall-install-disable—(PTX Series routers only) Disable installing flow-specification firewall filters in the firewall process (dfwd).</p> <p>Default: If you omit the firewall-install-disable statement, the default behavior is firewall-install-disable mode.</p> <p><i>match-conditions</i>—Match packets to these conditions.</p> <p>route <i>name</i>—Name of the flow route.</p> <p>standard—Specify to use version 7 or later of the flow-specification algorithm.</p> <p>term-order (legacy standard)—Specify the version of the flow-specification algorithm.</p>

- **legacy**—Use version 6 of the flow-specification algorithm.
- **standard**—Use version 7 of the flow-specification algorithm.

then—Actions to take on matching packets.

The remaining statements are explained separately.

Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring Flow Routes</i>

flow-map

Syntax	<pre>flow-map <i>flow-map-name</i> { bandwidth (<i>bps</i> adaptive); forwarding-cache { timeout (never non-discard-entry-only <i>minutes</i>); } policy [<i>policy-names</i>]; redundant-sources [<i>addresses</i>]; }</pre>
Hierarchy Level	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]</pre>
Release Information	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure multicast flow maps.
Options	<p><i>flow-map-name</i>—Name of the flow-map.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring a Multicast Flow Map</i>

forwarding-cache (Flow Maps)

Syntax	forwarding-cache { timeout (minutes never non-discard-entry-only); }
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit logical-systems <i>logical-system-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit routing-options multicast flow-map <i>flow-map-name</i>]
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure multicast forwarding cache properties for the flow map.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

forwarding-cache (Multicast)

Syntax	<pre> forwarding-cache { allow-maximum; family (inet inet6) { threshold { log-warning value; suppress value <reuse value>; } } threshold { log-warning value; suppress value <reuse value>; } timeout minutes; } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options multicast]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure multicast forwarding cache properties. These properties include threshold suppression and reuse limits, the threshold at which a warning message is logged, and timeout values.</p> <p>Specify a value for the threshold at which to suppress new multicast forwarding cache entries and an optional reuse value for the threshold at which the router begins to create new multicast forwarding cache entries. The range for both is from 1 through 200,000. If configured, the reuse value should be less than the suppression threshold value. The suppression value is mandatory. If you do not specify the optional reuse value, then the number of multicast forwarding cache entries is limited to the suppression value. A new entry is created as soon as the number of multicast forwarding cache entries falls below the suppression value.</p> <p>You can configure the thresholds globally for the multicast forwarding cache or individually for the IPv4 and IPv6 multicast forwarding caches. Configuring the threshold statement globally for the multicast forwarding cache or including the family statement to configure the thresholds for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.</p>
Default	By default, there are no limits on the number of multicast forwarding cache entries.
Options	family (inet inet6) —(Optional) Apply the configured thresholds to either IPv4 or IPv6 multicast forwarding cache entries.

Default: By default, the configured thresholds are applied to both IPv4 and IPv6 multicast forwarding cache entries.

The remaining statements are explained separately.

Required Privilege	routing—To view this statement in the configuration.
Level	routing-control—To add this statement to the configuration.

Related Documentation	<ul style="list-style-type: none">• <i>Example: Configuring the Multicast Forwarding Cache</i>
------------------------------	--------------------------------------------------------------------------------------------------------------

forwarding-options (chassis)

Syntax	<pre>forwarding options <i>profile-name</i> { num-65-127-prefix <i>value</i> lpm-profile <i>prefix-65-127-disable</i> }</pre>
Hierarchy Level	[edit chassis]
Release Information	Statement introduced in Junos OS Release 13.2.
Description	<p>Configure a unified forwarding table profile to allocate the amount a memory available for the following:</p> <ul style="list-style-type: none"> • MAC addresses. • Layer 3 host entries. • Longest prefix match table entries. <p>This feature enables you to select a profile that optimizes the amount of memory available for various types of forwarding-table entries based on the needs of your network. For example, for a switch that handles a great deal of Layer 2 traffic, such as a virtualized network with many servers and virtualized machines, you would choose the l2-profile-one, which allocates the highest amount of memory to MAC addresses.</p> <p>You configure the memory allocation for LPM table entries differently, depending on whether you using Junos OS Release 13.2X51-D10 or Junos OS Release 13.2X51-D15 and later. For more information about configuring memory allocation for LPM table entries, see “Configuring the Unified Forwarding Table” on page 38.</p> <p>The num-65-127-prefix <i>number</i> statement is not supported on the lpm-profile. The prefix-65-127-disable statement is supported only on the lpm-profile.</p> <p>When you commit a configuration with a forwarding table profile change, the Packet Forwarding Engine automatically restarts to apply the new parameters, which brings the data interfaces down and then up again.</p> <p>However, starting with Junos OS Release 14.1X53-D40, upon configuring and committing a unified forwarding table profile change in a Virtual Chassis or Virtual Chassis Fabric (VCF), the Packet Forwarding Engine in member switches does not automatically restart. This behavior avoids having Virtual Chassis or VCF instability and a prolonged convergence period if a profile change is propagated to member switches and multiple Packet Forwarding Engines all restart at the same time. Instead, when you initially commit a profile configuration change, the message Reboot required for configuration to take effect is displayed at the master switch CLI prompt, notifying you that the profile change does not take effect until the next time you restart the Virtual Chassis or VCF. The profile configuration change is propagated to member switches that support this feature, and a reminder that a reboot is required to apply this pending configuration change appears in the system log of the master switch and applicable member switches. You then enable the profile change during a planned downtime period using the request system reboot</p>

command, which quickly establishes a stable Virtual Chassis or VCF with the new configuration.



NOTE: You should plan to make unified forwarding table profile changes only when you are ready to perform a Virtual Chassis or VCF system reboot *immediately* after committing the configuration update. Otherwise, in the intervening period between committing the configuration change and rebooting the Virtual Chassis or VCF, the system can become inconsistent if a member experiences a problem and restarts. In that case, the new configuration takes effect on the member that was restarted, while the change is not yet activated on all the other members.

Options **profile-name**—name of the profile to use for memory allocation in the unified forwarding table. [Table 12 on page 88](#) lists the profiles you can choose and the associated values for each type of entry.

Table 12: Unified Forwarding Table Profiles

Profile Name	MAC Table	Host Table (unicast and multicast addresses)					
	MAC Addresses	IPv4 unicast	IPv6 unicast	IPv4 (*, G)	IPv4 (S, G)	IPv6 (*, G)	IPv6 (S, G)
l2-profile-one	288K	16K	8K	8K	8K	4K	4K
l2-profile-two	224K	80K	40K	40K	40K	20K	20K
l2-profile-three (default)	160K	144K	72K	72K	72K	36K	36K
l3-profile	96K	208K	104K	104K	104K	52K	52K
lpm-profile*	32K	16K	8K	8K	8K	4K	4K

* This profile supports only IPv4 in Junos OS 13.2X51-D10. Starting in Junos OS Release 13.2X51-D15, the **lpm-profile** supports IPv4 and IPv6 entries.

Note that if the host stores the maximum number of entries for any given type, the entire table is full and is unable to accommodate *any* entries of any other type. For information about valid combinations of table entries see [“Understanding the Unified Forwarding Table” on page 34](#).

You configure the memory allocation for LPM table entries differently depending on whether you use Junos OS 13.2X51-D10 or Junos OS 13.2X51-D15 and later. To learn how to configure memory allocation for LPM table entries see [“Configuring the Unified Forwarding Table” on page 38](#).

**Required Privilege
Level**

- Related Documentation**
- [Understanding the Unified Forwarding Table on page 34](#)
 - [Configuring the Unified Forwarding Table on page 38](#)

forwarding-table

Syntax forwarding-table {
 export [*policy--names*];
 (**indirect-next-hop** | no-indirect-next-hop);
 }

Hierarchy Level [edit logical-systems *logical-system-name* routing-options],
 [edit routing-options]

Release Information Statement introduced in Junos OS Release 11.3 for the QFX Series.
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Configure information about the routing device's forwarding table.
 The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
 routing-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring Per-Packet Load Balancing on page 4](#)

generate

Syntax	<pre>generate { defaults { generate-options; } route destination-prefix { policy policy-name; generate-options; } }</pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options rib <i>routing-table-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure generated routes, which are used as routes of last resort.
Options	<p>defaults—(Optional) Specify global generated route options. These options only set default attributes inherited by all newly created generated routes. These are treated as global defaults and apply to all the generated routes you configure in the generate statement.</p> <p>generate-options—Additional information about generated routes, which is included with the route when it is installed in the routing table. Specify zero or more of the following options in generate-options. Each option is explained separately.</p> <ul style="list-style-type: none"> • (active passive); • as-path <<i>as-path</i>> <origin (egp igp incomplete)> <atomic-aggregate> <aggregator <i>as-number in-address</i>>; • (brief full); • community [<i>community-ids</i>]; • discard; • (metric <i>metric2</i> <i>metric3</i> <i>metric4</i>) <i>value</i> <type <i>type</i>>; • (preference <i>preference2</i> color <i>color2</i>) <i>preference</i> <type <i>type</i>>; • tag <i>metric type number</i>; <p>route destination-prefix—Configure a non-default generated route:</p>

- **default**—For the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.
- **destination-prefix/prefix-length**—/**destination-prefix** is the network portion of the IP address, and **prefix-length** is the destination prefix length.

The **policy** statement is explained separately.

Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---------------------------------------------------------------------------------------------------------------------

Related Documentation	<ul style="list-style-type: none">• <i>Example: Conditionally Generating Static Routes</i>
------------------------------	----------------------------------------------------------------------------------------------------------

graceful-restart (Enabling Globally)

Syntax	<pre> graceful-restart { disable; helper-disable; maximum-helper-recovery-time <i>seconds</i>; maximum-helper-restart-time <i>seconds</i>; notify-duration <i>seconds</i>; recovery-time <i>seconds</i>; restart-duration <i>seconds</i>; stale-routes-time <i>seconds</i>; }</pre>
Hierarchy Level	<pre> [edit logical-systems <i>logical-system-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options]</pre>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced for QFX switches in Junos OS Release 13.2X51-D15</p> <p>Statement introduced for QFX Virtual Chassis and Virtual Chassis Fabric in Junos OS Release 14.1X53-D30</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure graceful restart globally to enable the feature. You cannot enable graceful restart for specific protocols unless graceful restart is also enabled globally. You can, optionally, modify the global settings at the individual protocol level.</p>



NOTE:

- For VPNs, the **graceful-restart** statement allows a router whose VPN control plane is undergoing a restart to continue to forward traffic while recovering its state from neighboring routers.
- For BGP, if you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.
- LDP sessions flap when **graceful-restart** configurations change.


Default	Graceful restart is disabled by default.
Options	The remaining statements are explained separately.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

Related Documentation	• <i>Enabling Graceful Restart</i>
	• <i>Configuring Routing Protocols Graceful Restart</i>
	• <i>Configuring Graceful Restart for MPLS-Related Protocols</i>
	• <i>Configuring VPN Graceful Restart</i>
	• <i>Configuring Logical System Graceful Restart</i>
	• <i>Graceful Restart Configuration Statements</i>
	• <i>Configuring Graceful Restart for QFabric Systems</i>


import (Routing Options)

Syntax	<code>import [<i>policy-names</i>];</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution rib], [edit logical-systems <i>logical-system-name</i> routing-options resolution rib], [edit routing-instances <i>routing-instance-name</i> routing-options resolution rib], [edit routing-options resolution rib]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Specify one or more import policies to use for route resolution.
Options	<i>policy-names</i> —Name of one or more import policies.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	• <i>Example: Configuring Route Resolution on PE Routers</i>


import-policy

Syntax	<code>import-policy [<i>policy-names</i>];</code>
Hierarchy Level	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib-groups <i>group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-options rib-groups <i>group-name</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> routing-options rib-groups <i>group-name</i>],</code> <code>[edit routing-options rib-groups <i>group-name</i>]</code>
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Apply one or more policies to routes imported into the routing table group. The import-policy statement complements the import-rib statement and cannot be used unless you first specify the routing tables to which routes are being imported.
<div> NOTE: On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.</div>	
Options	<i>policy-names</i> —Name of one or more policies.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</i>• export-rib on page 78• <i>passive</i>

import-rib

Syntax	<code>import-rib [<i>routing-table-names</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib-groups <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib-groups <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib-groups <i>group-name</i>],</p> <p>[edit routing-options rib-groups <i>group-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Specify the name of the routing table into which Junos OS should import routing information. The first routing table name you enter is the primary routing table. Any additional names you enter identify secondary routing tables. When a protocol imports routes, it imports them into the primary and any secondary routing tables. If the primary route is deleted, the secondary route also is deleted. For IPv4 import routing tables, the primary routing table must be inet.0 or routing-instance-name.inet.0. For IPv6 import routing tables, the primary routing table must be inet6.0.</p> <p>In Junos OS Release 9.5 and later, you can configure an IPv4 import routing table that includes both IPv4 and IPv6 routing tables. Including both types of routing tables permits you, for example, to populate an IPv6 routing table with IPv6 addresses that are compatible with IPv4. In releases prior to Junos OS Release 9.5, you could configure an import routing table with only either IPv4 or IPv6 routing tables.</p>
<div>  <p>NOTE: On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.</p> </div>	
Options	<i>routing-table-names</i> —Name of one or more routing tables.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</i> • export-rib on page 78 • <i>passive</i>

indirect-next-hop

Syntax	(indirect-next-hop no-indirect-next-hop);
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options forwarding-table], [edit routing-options forwarding-table]
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 14.1X53-D30 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Enable indirectly connected next hops for route convergence. This statement is implemented on the Packet Forward Engine to speed up forwarding information base (FIB) updates. Configuring this statement significantly speeds convergence times. The only downside of configuring this statement is that some additional FIB memory overhead is required. Unless routes have an extremely high number of next hops, this increased memory usage should not be noticeable.
<div> NOTE:<ul style="list-style-type: none">• When virtual private LAN service (VPLS) is configured on the routing device, the indirect-next-hop statement is configurable at the [edit routing-options forwarding-table] hierarchy level. However, this configuration is not applicable to indirect nexthops specific to VPLS routing instances.• By default, the Junos Trio Modular Port Concentrator (MPC) chipset on MX Series routers is enabled with indirectly connected next hops, and this cannot be disabled using the no-indirect-next-hop statement.• By default, indirectly connected next hops are enabled on PTX Series routers.</div>	
Default	Disabled.
Options	indirect-next-hop —Enable indirectly connected next hops. no-indirect-next-hop —Explicitly disable indirect next hops.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Optimizing Route Reconvergence by Enabling Indirect Next Hops on the Packet Forwarding Engine</i>

install (Routing Options)

Syntax	(install no-install);
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options static (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options static (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> static (defaults route)]</p> <p>[edit routing-options static (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure whether Junos OS installs all static routes into the forwarding table. Even if you configure a route so it is not installed in the forwarding table, the route is still eligible to be exported from the routing table to other protocols.
Options	<p>install—Explicitly install all static routes into the forwarding table. Include this statement when configuring an individual route in the route portion of the static statement to override a no-install option specified in the defaults portion of the statement.</p> <p>no-install—Do not install the route into the forwarding table, even if it is the route with the lowest preference.</p> <p>Default: install</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Examples: Configuring Static Routes</i> • <i>static</i>

instance-export

Syntax	<code>instance-export [<i>policy-names</i>];</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Apply one or more policies to routes being exported from a routing instance.
Options	<i>policy-names</i> —Name of one or more export policies.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Routing Policies, Firewall Filters, and Traffic Policers Feature Guide for Routing Devices</i>

instance-import

Syntax	<code>instance-import [<i>policy-names</i>];</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Apply one or more policies to routes being imported into a routing instance.
Options	<i>policy-names</i> —Name of one or more import policies.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Routing Policies, Firewall Filters, and Traffic Policers Feature Guide for Routing Devices</i>

instance-type

Syntax	instance-type virtual-router
Hierarchy Level	[edit routing-instances]
Release Information	Statement introduced in Junos OS Release 9.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Specify the type of routing instance.
Options	virtual-router —Virtual router routing instance.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Using Virtual Routing Instances to Route Among VLANs on EX Series Switches</i>• <i>Configuring Virtual Routing Instances (CLI Procedure)</i>• Configuring Virtual Router Routing Instances on page 8

interface (Multicast Static Routes)

Syntax	<pre>interface <i>interface-names</i> { disable; maximum-bandwidth <i>bps</i>; no-qos-adjust; reverse-oif-mapping { no-qos-adjust; } subscriber-leave-timer <i>seconds</i>; }</pre>
Hierarchy Level	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]</pre>
Release Information	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Enable multicast traffic on an interface.</p> <p>By default, multicast packets are forwarded by enabling Protocol Independent Multicast (PIM) on an interface. PIM adds multicast routes into the routing table.</p> <p>You can also configure multicast packets to be forwarded over a static route, such as a static route associated with an LSP next hop. Multicast packets are accepted on an interface and forwarded over a static route in the forwarding table. This is useful when you want to enable multicast traffic on a specific interface without configuring PIM on the interface.</p> <p>You cannot enable multicast traffic on an interface and configure PIM on the same interface simultaneously.</p> <p>Static routes must be configured before you can enable multicast on an interface. Configuring the interface statement alone does not install any routes into the routing table. This feature relies on the static route configuration.</p>
Options	<p><i>interface-names</i>—Name of one or more interfaces on which to enable multicast traffic.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none">• <i>Example: Defining Interface Bandwidth Maximums</i>• <i>Example: Configuring Multicast with Subscriber VLANs</i>

interface (Routing Instances)

Syntax	<code>interface <i>interface-name</i>;</code>
Hierarchy Level	[edit routing-instances]
Release Information	Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	For virtual router routing instances, configure an interface.



NOTE:

- You must configure only interfaces from the Node devices assigned to the network Node group. If you try to configure interfaces from the Node devices assigned to server Node groups, the configuration does not commit.
- You can configure an interface for one routing instance only.

Options	<i>interface-name</i> —Name of an interface.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Configuring Virtual Router Routing Instances on page 8

interface (Routing Options)

Syntax	<pre>interface <i>interface-names</i> { maximum-bandwidth <i>bps</i>; no-qos-adjust; reverse-oif-mapping { no-qos-adjust; } subscriber-leave-timer <i>seconds</i>; }</pre>
Hierarchy Level	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]</pre>
Release Information	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Enable multicast traffic on an interface.



TIP: You cannot enable multicast traffic on an interface by using the **routing-options multicast interface** statement and configure PIM on the interface.

Options	<p><i>interface-name</i>—Names of the physical or logical interface.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none">• <i>Example: Defining Interface Bandwidth Maximums</i>• <i>Example: Configuring Multicast with Subscriber VLANs</i>

interface-routes

Syntax

```
interface-routes {
    family (inet | inet6) {
        export {
            lan;
            point-to-point;
        }
    }
    rib-group group-name;
}
```

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],
[edit logical-systems *logical-system-name* routing-options],
[edit routing-instances *routing-instance-name* routing-options],
[edit routing-options]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.



NOTE: On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.

Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Associate a routing table group with the routing device's interfaces, and specify routing table groups into which interface routes are imported.

By default, IPv4 interface routes (also called direct routes) are imported into routing table **inet.0**, and IPv6 interface routes are imported into routing table **inet6.0**. If you are configuring alternate routing tables for use by some routing protocols, it might be necessary to import the interface routes into the alternate routing tables. To define the routing tables into which interface routes are imported, you create a routing table group and associate it with the routing device's interfaces.

To create the routing table groups, include the **passive** statement at the **[edit routing-options]** hierarchy level.

If you have configured a routing table, configure the OSPF primary instance at the **[edit protocols ospf]** hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group.

To export local routes, include the **export** statement.

To export LAN routes, include the **lan** option. To export point-to-point routes, include the **point-to-point** option.

Only local routes on point-to-point interfaces configured with a destination address are exportable.

Options **inet**—Specify the IPv4 address family.

inet6—Specify the IPv6 address family.

lan—Export LAN routes.

point-to-point—Export point-to-point routes.

The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Importing Direct and Static Routes Into a Routing Instance*
- *Example: Configuring Multiple Routing Instances of OSPF*
- *passive*

local-address (Routing Options)

Syntax local-address *address*;

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast **backup-pe-group** *group-name*],
[edit logical-systems *logical-system-name* routing-options multicast **backup-pe-group** *group-name*],
[edit routing-instances *routing-instance-name* routing-options multicast **backup-pe-group** *group-name*],
[edit routing-options multicast **backup-pe-group** *group-name*]

Release Information Statement introduced in Junos OS Release 9.0.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Statement added to the multicast hierarchy in Junos OS Release 13.2.

Description Configure the address of the local PE for ingress PE redundancy when point-to-multipoint LSPs are used for multicast distribution.

Options **address**—Address of local PEs in the backup group.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Configuring Ingress PE Redundancy*

martians

Syntax	<pre>martians { destination-prefix match-type <allow>; }</pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options rib <i>routing-table-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure martian addresses.
Options	<p>allow—(Optional) Explicitly allow a subset of a range of addresses that has been disallowed. The allow option is the only supported action.</p> <p>destination-prefix—Destination route you are configuring:</p> <ul style="list-style-type: none"> • destination-prefix/prefix-length—destination-prefix is the network portion of the IP address, and prefix-length is the destination prefix length. • default—Default route to use when routing packets do not match a network or host in the routing table. This is equivalent to specifying the IP address 0.0.0.0/0. <p>match-type—Criteria that the destination must match:</p> <ul style="list-style-type: none"> • exact—Exactly match the route's mask length. • longer—The route's mask length is greater than the specified mask length. • orlonger—The route's mask length is equal to or greater than the specified mask length. • through destination-prefix—The route matches the first prefix, the route matches the second prefix for the number of bits in the route, and the number of bits in the route is less than or equal to the number of bits in the second prefix. • upto prefix-length—The route's mask length falls between the two destination prefix lengths, inclusive.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Configuring Martian Addresses*

maximum-bandwidth (Routing Options)

Syntax	maximum-bandwidth <i>bps</i> ;
Hierarchy Level	[edit dynamic-profiles <i>profile-name</i> routing-instances <i>instance-name</i> routing-options multicast interface <i>interface-name</i>], [edit dynamic-profiles <i>profile-name</i> routing-options multicast interface <i>interface-name</i>] [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-options multicast interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], [edit routing-options multicast interface <i>interface-name</i>]
Release Information	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. dynamic-profiles hierarchy level added in Junos OS Release 11.2. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure the multicast bandwidth for the interface.
Options	bps —Bandwidth rate, in bits per second, for the multicast interface. Range: 0 through any amount of bandwidth
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Defining Interface Bandwidth Maximums</i>

maximum-paths

Syntax	<code>maximum-paths <i>path-limit</i> <log-interval <i>seconds</i>> <log-only threshold <i>value</i>>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
Release Information	Statement introduced in Junos OS Release 8.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure a limit for the number of routes installed in a routing table based upon the route path.



NOTE: The `maximum-paths` statement is similar to the `maximum-prefixes` statement. The `maximum-prefixes` statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:

```
OSPF 10.10.10.0/24
ISIS 10.10.10.0/24
```

These are two routes, but only one destination (prefix). The `maximum-paths` limit applies the total number of routes (two). The `maximum-prefixes` limit applies to the total number of unique prefixes (one).

Options	<p><code>log-interval <i>seconds</i></code>—(Optional) Minimum time interval (in seconds) between log messages. Range: 5 through 86,400</p> <p><code>log-only</code>—(Optional) Sets the route limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.</p> <p><code><i>path-limit</i></code>—Maximum number of routes. If this limit is reached, a warning is triggered and additional routes are rejected. Range: 1 through 4,294,967,295 ($2^{32} - 1$) Default: No default</p> <p><code>threshold <i>value</i></code>—(Optional) Percentage of the maximum number of routes that starts triggering a warning. You can configure a percentage of the <code><i>path-limit</i></code> value that starts triggering the warnings. Range: 1 through 100</p>
----------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------




NOTE: When the number of routes reaches the **threshold** value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the *path-limit* value, then additional routes are rejected.

Required Privilege	routing—To view this statement in the configuration.
Level	routing-control—To add this statement to the configuration.

Related Documentation	<ul style="list-style-type: none"> • <i>Limiting the Number of Paths and Prefixes Accepted from CE Routers in Layer 3 VPNs</i>
------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------

maximum-prefixes

Syntax	<code>maximum-prefixes <i>prefix-limit</i> <log-interval <i>seconds</i>> <log-only threshold <i>percentage</i>>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
Release Information	<p>Statement introduced in Junos OS Release 8.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure a limit for the number of routes installed in a routing table based upon the route prefix.</p> <p>Using a prefix limit, you can curtail the number of prefixes received from a CE router in a VPN. Prefix limits apply only to dynamic routing protocols and are not applicable to static or interface routes.</p>
<div>  <p>NOTE: The <code>maximum-prefixes</code> statement is similar to the <code>maximum-paths</code> statement. The <code>maximum-prefixes</code> statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:</p> <pre> OSPF 10.10.10.0/24 ISIS 10.10.10.0/24 </pre> <p>These are two routes, but only one destination (prefix). The <code>maximum-paths</code> limit applies the total number of routes (two). The <code>maximum-prefixes</code> limit applies to the total number of unique prefixes (one).</p> </div>	
Options	<p>log-interval <i>seconds</i>—(Optional) Minimum time interval (in seconds) between log messages.</p> <p>Range: 5 through 86,400</p> <p>log-only—(Optional) Sets the prefix limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.</p> <p><i>prefix-limit</i>—Maximum number of route prefixes. If this limit is reached, a warning is triggered and any additional routes are rejected.</p> <p>Range: 1 through 4,294,967,295</p> <p>Default: No default</p>

threshold value—(Optional) Percentage of the maximum number of prefixes that starts triggering a warning. You can configure a percentage of the **prefix-limit** value that starts triggering the warnings.

Range: 1 through 100



NOTE: When the number of routes reaches the threshold value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the **prefix-limit** value, then additional routes are rejected.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Limiting the Number of Paths and Prefixes Accepted from CE Routers in Layer 3 VPNs*

med-igp-update-interval

Syntax med-igp-update-interval *minutes*;

Hierarchy Level [edit routing-options]

Release Information Statement introduced in Junos OS Release 9.0
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Configure a timer for how long to delay updates for the multiple exit discriminator (MED) path attribute for BGP groups and peers configured with the **metric-out igp offset delay-med-update** statement. The timer delays MED updates for the interval configured unless the MED is lower than the previously advertised attribute or another attribute associated with the route has changed or if the BGP peer is responding to a refresh route request.

Options **minutes**—Interval to delay MED updates.
Range: 10 through 600
Default: 10 minutes

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates*
- *metric-out*

metric (Aggregate, Generated, or Static Route)

Syntax	(metric metric2 metric3 metric4) <i>metric</i> <type type>;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate static) (defaults route)], [edit routing-options (aggregate generate static) (defaults route)]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Specify the metric value for an aggregate, generated, or static route. You can specify up to four metric values, starting with metric (for the first metric value) and continuing with metric2 , metric3 , and metric4 .
Options	metric —Metric value. Range: 0 through 4,294,967,295 ($2^{32} - 1$) type type —(Optional) Type of route. When routes are exported to OSPF, type 1 routes are advertised in type 1 externals, and routes of any other type are advertised in type 2 externals. Note that if a qualified-next-hop metric value is configured, this value overrides the route metric. Range: 1 through 16
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Summarizing Static Routes Through Route Aggregation</i> • <i>Example: Conditionally Generating Static Routes</i> • aggregate on page 53 • generate on page 90 • <i>static</i>

multicast (Routing Options)

Syntax

```
multicast {
  forwarding-cache {
    threshold suppress value <reuse value>;
  }
  interface interface-name {
    enable;
  }
  local-address address
  scope scope-name {
    interface [ interface-names ];
    prefix destination-prefix;
  }
  ssm-groups {
    address;
  }
}
```

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],
[edit logical-systems *logical-system-name* routing-options],
[edit routing-instances *routing-instance-name* routing-options],
[edit routing-options]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Statement introduced in Junos OS Release 12.3 for ACX Series routers.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Configure generic multicast properties.



NOTE: You cannot apply a scoping policy to a specific routing instance. All scoping policies are applied to all routing instances. However, you can apply the `scope` statement to a specific routing instance.

The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Examples: Configuring Administrative Scoping*
- *Example: Configuring Source-Specific Multicast Groups with Any-Source Override*
- *Examples: Configuring the Multicast Forwarding Cache*
- *Multicast Protocols Feature Guide for Routing Devices*
- ([indirect-next-hop on page 96](#) | no-indirect-next-hop)

no-qos-adjust

Syntax	no-qos-adjust;
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i> reverse-oif-mapping],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast interface <i>interface-name</i> reverse-oif-mapping],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i> reverse-oif-mapping],</p> <p>[edit routing-options multicast interface <i>interface-name</i>],</p> <p>[edit routing-options multicast interface <i>interface-name</i> reverse-oif-mapping]</p>
Release Information	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Statement introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Statement added to [edit routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], and [edit routing-options multicast interface <i>interface-name</i>] hierarchy levels in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Disable hierarchical bandwidth adjustment for all subscriber interfaces that are identified by their MLD or IGMP request from a specific multicast interface.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring Multicast with Subscriber VLANs</i>

num-65-127-prefix

Syntax	num-65-127-prefix <i>value</i>
Hierarchy Level	[edit chassis forwarding-options <i>profile-name</i>]
Release Information	Statement introduced in Junos 13.2 for the QFX Series.
Description	Configure the number of supported IPv6 prefixes in the range /65 through /127.
Options	<p>value—With Junos OS 13.2X51D10: Value in the range 1 through 128. Each increment adds support for 16 IPv6 addresses with prefixes between /65 and /127, for a maximum of 2048 such addresses (16 x 128 = 2048).</p> <p>value—With Junos OS 13.2X51D15: Value in the range 0 through 4. Each increment adds support for 1K IPv6 addresses with prefixes between /65 and /127, for a maximum of 4K such addresses.</p>
Required Privilege Level	
Related Documentation	<ul style="list-style-type: none">• Configuring the Unified Forwarding Table on page 38

options (Routing Options)

Syntax	<pre>options { syslog (level <i>level</i> upto level <i>level</i>); }</pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure the types of system logging messages sent about the routing protocols process to the system message logging file. These messages are also displayed on the system console. You can log messages at a particular level, or up to and including a particular level.</p>
Options	<p>level <i>level</i>—Severity of the message. It can be one or more of the following levels, in order of decreasing urgency:</p> <ul style="list-style-type: none"> • alert—Conditions that should be corrected immediately, such as a corrupted system database. • critical—Critical conditions, such as hard drive errors. • debug—Software debugging messages. • emergency—Panic or other conditions that cause the system to become unusable. • error—Standard error conditions. • info—Informational messages. • notice—Conditions that are not error conditions, but might warrant special handling. • warning—System warning messages. <p>upto level <i>level</i>—Log all messages up to a particular level.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • syslog in the <i>Junos OS Administration Library for Routing Devices</i>

pim-to-igmp-proxy

Syntax	<pre>pim-to-igmp-proxy { upstream-interface [interface-names]; }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-options multicast]
Release Information	Statement introduced in Junos OS Release 9.6. Statement introduced in Junos OS Release 9.6 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Configure the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain to translate PIM join or prune messages into corresponding Internet Group Management Protocol (IGMP) report or leave messages. The routing device then transmits the report or leave messages by proxying them to one or two upstream interfaces that you configure on the RP routing device. Including the pim-to-igmp-proxy statement enables you to use IGMP to forward IPv4 multicast traffic across the PIM sparse mode domains.</p> <p>The pim-to-igmp-proxy statement is not supported for routing instances.</p> <p>The remaining statement is explained separately.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring PIM-to-IGMP Message Translation</i>

pim-to-mld-proxy

Syntax	<code>pim-to-mld-proxy { upstream-interface [interface-names]; }</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
Release Information	Statement introduced in Junos OS Release 9.6. Statement introduced in Junos OS Release 9.6 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
Description	<p>Configure the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain to translate PIM join or prune messages into corresponding Multicast Listener Discovery (MLD) report or leave messages. The routing device then transmits the report or leave messages by proxying them to one or two upstream interfaces that you configure on the RP routing device. Including the pim-to-mld-proxy statement enables you to use MLD to forward IPv6 multicast traffic across the PIM sparse mode domains.</p> <p>The remaining statement is explained separately.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> Configuring PIM-to-MLD Message Translation

policy (Aggregate and Generated Routes)

Syntax	<code>policy <i>policy-name</i>;</code>
Hierarchy Level	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate) (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate) (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)], [edit routing-instances <i>routing-instance-name</i> routing-options (aggregate generate) (defaults route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)], [edit routing-options (aggregate generate) (defaults route)], [edit routing-options rib <i>routing-table-name</i> (aggregate generate) (defaults route)]</pre>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Associate a routing policy when configuring an aggregate or generated route's destination prefix in the routes part of the aggregate or generate statement. This provides the equivalent of an import routing policy filter for the destination prefix. That is, each potential contributor to an aggregate route, along with any aggregate options, is passed through the policy filter. The policy then can accept or reject the route as a contributor to the aggregate route.</p> <p>If the contributor is accepted, the policy can modify the default preferences. The contributor with the numerically smallest prefix becomes the most preferred, or <i>primary</i>, contributor. A rejected contributor still can contribute to a less specific aggregate route. If you do not specify a policy filter, all candidate routes contribute to an aggregate route.</p> <p>The following algorithm is used to compare two generated contributing routes in order to determine which one is the primary or preferred contributor:</p> <ol style="list-style-type: none"> 1. Compare the protocol's preference of the contributing routes. The lower the preference, the better the route. This is similar to the comparison that is done while determining the best route for the routing table. 2. Compare the protocol's preference2 of the contributing routes. The lower preference2 value is better. If only one route has preference2, then this route is preferred. 3. The preference values are the same. Proceed with a numerical comparison of the prefixes' values. <ol style="list-style-type: none"> a. The primary contributor is the numerically smallest prefix value.

- b. If the two prefixes are numerically equal, the primary contributor is the route that has the smallest prefix length value.

At this point, the two routes are the same. The primary contributor does not change. An additional next hop is available for the existing primary contributor.

A rejected contributor still can contribute to less specific generated route. If you do not specify a policy filter, all candidate routes contribute to a generated route.

Options	<i>policy-name</i> —Name of a routing policy.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Summarizing Routes Through Route Aggregation</i> • <i>Example: Conditionally Generating Static Routes</i> • aggregate on page 53 • generate on page 90

policy (Flow Maps)

Syntax	<code>policy [<i>policy-names</i>];</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit logical-systems <i>logical-system-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit routing-options multicast flow-map <i>flow-map-name</i>]
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure a flow map policy.
Options	<i>policy-names</i> —Name of one or more policies for flow mapping.
Required Privilege Level	routing—To view this statement in the configuration.

policy-options

```
Syntax  policy-options
        application-maps application-map-name {
            application application-name {
                code-points [ aliases ] [ bit-patterns ];
            }
        }
        policy-statement policy-name {
            term term-name {
                from {
                    family family-name;
                    match-conditions;
                    policy subroutine-policy-name;
                    prefix-list prefix-list-name;
                    prefix-list-filter prefix-list-name match-type <actions>;
                    route-filter destination-prefix match-type <actions>;
                    source-address-filter source-prefix match-type <actions>;
                }
                to {
                    match-conditions;
                    policy subroutine-policy-name;
                }
                then actions;
            }
        }
```

Hierarchy Level [edit]

Release Information Statement introduced in Junos OS Release 12.1 for the QFX Series.
Statement introduced in Junos OS Release 12.1 for the EX Series.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Configure options such as application maps for DCBX application protocol exchange and policy statements.

Required Privilege Level storage—To view this statement in the configuration.
storage-control—To add this statement to the configuration.

Related Documentation

- *Defining an Application for DCBX Application Protocol TLV Exchange*
- *Example: Configuring DCBX Application Protocol TLV Exchange*
- *Example: Configuring DCBX to Support an iSCSI Application*
- *Understanding DCBX Application Protocol TLV Exchange*
- *Understanding DCBX Application Protocol TLV Exchange on EX Series Switches*

policy-statement

Syntax	<pre> policy-statement <i>policy-name</i> { term <i>term-name</i> { from { family <i>family-name</i>; match-conditions; policy <i>subroutine-policy-name</i>; prefix-list <i>prefix-list-name</i>; prefix-list-filter <i>prefix-list-name</i> match-type <actions>; route-filter <i>destination-prefix</i> match-type <actions>; source-address-filter <i>source-prefix</i> match-type <actions>; } to { match-conditions; policy <i>subroutine-policy-name</i>; } then <i>actions</i>; } } </pre>
Hierarchy Level	<p>[edit dynamic policy-options],</p> <p>[edit logical-systems <i>logical-system-name</i> policy-options],</p> <p>[edit policy-options]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for configuration in the dynamic database introduced in Junos OS Release 9.5.</p> <p>Support for configuration in the dynamic database introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>inet-mdt option introduced in Junos OS Release 10.0R2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>route-target option introduced in Junos OS Release 12.2.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Define a routing policy, including subroutine policies.</p> <p>A <i>term</i> is a named structure in which match conditions and actions are defined. Routing policies are made up of one or more terms. Each routing policy term is identified by a term name. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose the entire name in double quotation marks.</p> <p>Each term contains a set of match conditions and a set of actions:</p> <ul style="list-style-type: none"> Match conditions are criteria that a route must match before the actions can be applied. If a route matches all criteria, one or more actions are applied to the route. Actions specify whether to accept or reject the route, control how a series of policies are evaluated, and manipulate the characteristics associated with a route. <p>Generally, a router compares a route against the match conditions of each term in a routing policy, starting with the first and moving through the terms in the order in which</p>

they are defined, until a match is made and an explicitly configured or default action of **accept** or **reject** is taken. If none of the terms in the policy match the route, the router compares the route against the next policy, and so on, until either an action is taken or the default policy is evaluated.

If none of the match conditions of each term evaluates to true, the final action is executed. The final action is defined in an unnamed term. Additionally, you can define a default action (either **accept** or **reject**) that overrides any action intrinsic to the protocol.

The order of match conditions in a term is not relevant, because a route must match all match conditions in a term for an action to be taken.

To list the routing policies under the **[edit policy-options]** hierarchy level by **policy-statement *policy-name*** in alphabetical order, enter the **show policy-options** configuration command.

Options *actions*—(Optional) One or more actions to take if the conditions match. The actions are described in *Configuring Flow Control Actions*.

family *family-name*—(Optional) Specify an address family protocol. Specify **inet** for IPv4. Specify **inet6** for 128-bit IPv6, and to enable interpretation of IPv6 router filter addresses. For IS-IS traffic, specify **iso**. For IPv4 multicast VPN traffic, specify **inet-mvpn**. For IPv6 multicast VPN traffic, specify **inet6-mvpn**. For multicast-distribution-tree (MDT) IPv4 traffic, specify **inet-mdt**. For BGP route target VPN traffic, specify **route-target**.



NOTE: When *family* is not specified, the routing device or routing instance uses the address family or families carried by BGP. If multiprotocol BGP (MP-BGP) is enabled, the policy defaults to the protocol family or families carried in the network layer reachability information (NLRI) as configured in the *family* statement for BGP. If MP-BGP is not enabled, the policy uses the default BGP address family unicast IPv4.

from—(Optional) Match a route based on its source address.

match-conditions—(Optional in **from** statement; required in **to** statement) One or more conditions to use to make a match. The qualifiers are described in *Routing Policy Match Conditions*.

policy *subroutine-policy-name*—Use another policy as a match condition within this policy. The name identifying the subroutine policy can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" "). Policy names cannot take the form **__.*-internal__**, as this form is reserved. For information about how to configure subroutines, see *Understanding Policy Subroutines in Routing Policy Match Conditions*.

policy-name—Name that identifies the policy. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" ").

prefix-list *prefix-list-name*—Name of a list of IPv4 or IPv6 prefixes.

prefix-list-filter *prefix-list-name*—Name of a prefix list to evaluate using qualifiers; *match-type* is the type of match (see *Configuring Prefix List Filters*), and *actions* is the action to take if the prefixes match.

route-filter *destination-prefix match-type <actions>*—(Optional) List of routes on which to perform an immediate match; *destination-prefix* is the IPv4 or IPv6 route prefix to match, *match-type* is the type of match (see *Configuring Route Lists*), and *actions* is the action to take if the *destination-prefix* matches.

source-address-filter *source-prefix match-type <actions>*—(Optional) Unicast source addresses in multiprotocol BGP (MBGP) and Multicast Source Discovery Protocol (MSDP) environments on which to perform an immediate match. *source-prefix* is

the IPv4 or IPv6 route prefix to match, **match-type** is the type of match (see *Configuring Route Lists*), and **actions** is the action to take if the **source-prefix** matches.

term term-name—Name that identifies the term. The term name must be unique in the policy. It can contain letters, numbers, and hyphens (-) and can be up to 64 characters long. To include spaces in the name, enclose the entire name in quotation marks (" "). A policy statement can include multiple terms. We recommend that you name all terms. However, you do have the option to include an unnamed term which must be the final term in the policy. To configure an unnamed term, omit the **term** statement when defining match conditions and actions.

to—(Optional) Match a route based on its destination address or the protocols into which the route is being advertised.

then—(Optional) Actions to take on matching routes. The actions are described in *Configuring Flow Control Actions* and *Configuring Actions That Manipulate Route Characteristics*.

Required Privilege Level	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>dynamic-db</i>

ppm

Syntax	<pre>ppm { no-delegate-processing; }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
Release Information	<p>Statement introduced in Junos OS Release 9.4.</p> <p>Statement introduced in Junos OS Release 10.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>(M120, M320, MX Series, T Series, TX Matrix routers, M7i and M10i routers with Enhanced CFEB [CFEB-E], EX Series switches, and QFX Series only) Disable distributed periodic packet management (PPM) to the Packet Forwarding Engine (on routers), to access ports (on EX3200 and EX4200 switches, and QFX Series), or to line cards (on EX6200 and EX8200 switches).</p> <p>After you disable PPM, PPM processing continues to run on the Routing Engine.</p> <p>In Junos OS Release 8.2, PPM was moved from the Routing Engine to the Packet Forwarding Engine, access ports, or line cards. The no-delegate-processing statement disables the default behavior and restores the legacy behavior.</p>
Default	Distributed PPM processing is enabled for all protocols that use PPM.
Options	no-delegate-processing —Disable PPM to the Packet Forwarding Engine, access ports, or line cards. Distributed PPM is enabled by default.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <i>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</i> <i>Ensuring That Distributed ppm Is Not Disabled</i>

ppm (Ethernet Switching)

Syntax	<code>ppm { centralized; }</code>
Hierarchy Level	[edit protocols lacp]
Release Information	Statement introduced in Junos OS Release 10.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.1 for T Series devices. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Configure PPM processing options for Link Aggregation Control Protocol (LACP) packets.</p> <p>This command configures the PPM processing options for LACP packets only. You can disable distributed PPM processing for all packets that use PPM and run all PPM processing on the Routing Engine by configuring the no-delegate-processing configuration statement in the [edit routing-options ppm] statement hierarchy.</p>
Default	Distributed PPM processing is enabled for all packets that use PPM.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</i>• Configuring Distributed Periodic Packet Management on page 9

preference (Routing Options)

Syntax	<code>(preference preference2 color color2) preference <type type>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Preference value for a static, aggregate, or generated route. You also can specify a secondary preference value (preference2), as well as colors, which are even finer-grained preference values (color and color2).</p> <p>If the Junos OS routing table contains a dynamic route to a destination that has a better (lower) preference value than the static, aggregate, or generated route, the dynamic route is chosen as the active route and is installed in the forwarding table.</p>
Options	<p>preference—Preference value. A lower number indicates a more preferred route.</p> <p>Range: 0 through 4,294,967,295 ($2^{32} - 1$)</p> <p>Default: 5 (for static routes), 130 (for aggregate and generated routes)</p> <p>type type—(Optional) Type of route.</p> <p>Range: 1 through 16</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Examples: Configuring Static Routes</i> • <i>Example: Summarizing Routes Through Route Aggregation</i> • <i>Example: Conditionally Generating Static Routes</i> • aggregate on page 53 • generate on page 90

- *static*

prefix

Syntax	<code>prefix destination-prefix;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast scope <i>scope-name</i>], [edit logical-systems <i>logical-system-name</i> routing-options multicast scope <i>scope-name</i>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast scope <i>scope-name</i>], [edit routing-options multicast scope <i>scope-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure the prefix for multicast scopes.
Options	<i>destination-prefix</i> —Address range for the multicast scope.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Examples: Configuring Administrative Scoping</i>• <i>Example: Creating a Named Scope for Multicast Scoping</i>• <i>multicast</i>

prefix-65-127-disable

Syntax	<code>prefix-65-127-disable</code>
Hierarchy Level	[edit chassis forwarding-options lpm-profile]
Release Information	Statement introduced in Junos 13.2X51-D15 for the QFX Series.
Description	Disable support in the longest prefix match (LPM) table for IPv6 prefixes in the range /65 through /127.
Required Privilege Level	
Related Documentation	<ul style="list-style-type: none">• Configuring the Unified Forwarding Table on page 38

protocols

```

Syntax protocols {
    bgp {
        ... bgp-configuration ...
    }
    evpn {
        designated-forwarder-election-hold-timesseconds {
            encapsulation-type
            extended-vni-list
            STATEMENT DROPPED
            no-default-gateway-ext-comm
        }
        extended-vni-list
        vni-options {
            vni xxx vrf-target export target:xxx:xx
            vni xxx vrf-export name
        }
        extended-vlan-list vlan-id | [vlan-id set];
        extended-isid-list (single-isid | isid-list | isid-range | all)
        pbb-evpn-core
        control-word (EVPN)
        interface interface-name {
            ignore-encapsulation-mismatch;
            interface-mac-limit (vpls) limit {
                packet-action drop;
            }
            no-mac-learning;
            static-mac mac-address;
        }
        interface-mac-limit (vpls) limit {
            packet-action drop;
        }
        label-allocation per-instance;
        mac-statistics;
        mac-table-size limit {
            packet-action drop;
        }
        no-mac-learning;
        traceoptions {
            file filename <files number> <size size> <world-readable | no-world-readable>;
            flag flag <flag-modifier>;
        }
    }
    isis {
        ... isis-configuration ...
    }
    ldp {
        ... ldp-configuration ...
    }
    msdp {
        ... msdp-configuration ...
    }
    mstp {

```

```

    ... mstp-configuration ...
  }
  ospf {
    domain-id domain-id;
    domain-vpn-tag number;
    route-type-community (iana | vendor);
    ... ospf-configuration ...
  }
  ospf3 {
    domain-id domain-id;
    domain-vpn-tag number;
    route-type-community (iana | vendor);
    ... ospf3-configuration ...
  }
  pim {
    ... pim-configuration ...
  }
  rip {
    ... rip-configuration ...
  }
  ripng {
    ... ripng-configuration ...
  }
  rstp {
    rstp-configuration;
  }
  vstp {
    vstp configuration;
  }
  vpls {
    vpls configuration;
  }
}

```

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name*],
[edit routing-instances *routing-instance-name*]

Release Information Statement introduced before Junos OS Release 7.4.
Support for RIPng introduced in Junos OS Release 9.0.
Statement introduced in Junos OS Release 11.1 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Options designated-forwarder-election-hold-time, encapsulation vxlan, and extended-vni-list added in Junos OS Release 14.1X53-D30 for the QFX5100 switch.

Description Specify the protocol for a routing instance. You can configure multiple instances of many protocol types. Not all protocols are supported on the switches. See the switch CLI.

- Options**
- bgp**—Specify BGP as the protocol for a routing instance.
 - isis**—Specify IS-IS as the protocol for a routing instance.
 - ldp**—Specify LDP as the protocol for a routing instance.
 - l2vpn**—Specify Layer 2 VPN as the protocol for a routing instance.
 - msdp**—Specify the Multicast Source Discovery Protocol (MSDP) for a routing instance.
 - mstp**—Specify the Multiple Spanning Tree Protocol (MSTP) for a virtual switch routing instance.
 - ospf**—Specify OSPF as the protocol for a routing instance.
 - ospf3**—Specify OSPF version 3 (OSPFv3) as the protocol for a routing instance.



NOTE: OSPFv3 supports the **no-forwarding**, **virtual-router**, and **vrf** routing instance types only.

- pim**—Specify the Protocol Independent Multicast (PIM) protocol for a routing instance.
- rip**—Specify RIP as the protocol for a routing instance.
- ripng**—Specify RIP next generation (RIPng) as the protocol for a routing instance.
- rstp**—Specify the Rapid Spanning Tree Protocol (RSTP) for a virtual switch routing instance.
- vstp**—Specify the VLAN Spanning Tree Protocol (VSTP) for a virtual switch routing instance.
- vpls**—Specify VPLS as the protocol for a routing instance.

Required Privilege Level

- routing—To view this statement in the configuration.
- routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Configuring Multiple Routing Instances of OSPF*

qualified-next-hop (Static Routes)

Syntax `qualified-next-hop (address | interface-name) {
 bfd-liveness-detection {
 authentication {
 algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 | meticulous-keyed-sha-1 |
 simple-password);
 key-chain key-chain-name;
 loose-check;
 }
 detection-time {
 threshold milliseconds;
 }
 holddown-interval milliseconds;
 minimum-interval milliseconds;
 minimum-receive-interval milliseconds;
 multiplier number;
 no-adaptation;
 transmit-interval {
 minimum-interval milliseconds;
 threshold milliseconds;
 }
 version (1 | automatic);
 }
 interface interface-name;
 metric metric;
 preference preference;
}`

Hierarchy Level `[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options static route destination-prefix],
 [edit logical-systems logical-system-name routing-options rib inet6.0 static route
 destination-prefix],
 [edit logical-systems logical-system-name routing-options static route destination-prefix],
 [edit routing-instances routing-instance-name routing-options static route destination-prefix],
 [edit routing-options rib inet6.0 static route destination-prefix],
 [edit routing-options static route destination-prefix]`

Release Information Statement introduced before Junos OS Release 7.4.
 Statement introduced in Junos OS Release 9.0 for EX Series switches.
 Statement introduced in Junos OS Release 11.3 for the QFX Series.
 Statement introduced in Junos OS Release 12.3 for ACX Series routers.
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Configure a static route with multiple possible next hops, each of which can have its own preference value, IGP metric that is used when the route is exported into an IGP, and Bidirectional Forwarding Detection (BFD) settings. If multiple links are operational, the one with the most preferred next hop is used. The most preferred next hop is the one with the lowest preference value.

Options *address*—IPv4, IPv6, or ISO network address of the next hop.

interface-name—Name of the interface on which to configure an independent metric or preference for a static route. To configure an unnumbered interface as the next-hop interface for a static route, specify **qualified-next-hop interface-name**, where **interface-name** is the name of the IPv4 or IPv6 unnumbered interface.



NOTE: For an Ethernet interface to be configured as the qualified next hop for a static route, it must be an unnumbered interface.

To configure an Ethernet interface as an unnumbered interface, configure the **unnumbered-address <interface-name>** statement at the [edit interfaces <interface-name> unit <logical-unit-number> family <family-name>] hierarchy level as described in *Configuring an Unnumbered Interface*.

The remaining statements are explained separately.

Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---------------------------------------------------------------------------------------------------------------------

Related Documentation	<ul style="list-style-type: none"> • Example: Configuring Static Route Preferences and Qualified Next Hops • Example: Enabling BFD on Qualified Next Hops in Static Routes on page 21
------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


readvertise

Syntax	(readvertise no-readvertise);
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options static (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options static (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> static (defaults route)],</p> <p>[edit routing-options static (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure whether static routes are eligible to be readvertised by routing protocols:
Default	Static routes are eligible to be readvertised (that is, exported from the routing table into dynamic routing protocols) if a policy to do so is configured. To mark an IPv4 static route as being ineligible for readvertisement, include the no-readvertise statement.
Options	<p>readvertise—Readvertise static routes. Include the readvertise statement when configuring an individual route in the route portion of the static statement to override a no-readvertise option specified in the defaults portion of the statement.</p> <p>no-readvertise—Mark a static route as being ineligible for readvertisement. Include the no-readvertise option when configuring the route.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Controlling Static Routes in Routing and Forwarding Tables</i> • <i>static</i>

redundant-sources

Syntax	<code>redundant-sources [<i>addresses</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast flow-map <i>flow-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>],</p> <p>[edit routing-options multicast flow-map <i>flow-map-name</i>]</p>
Release Information	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure a list of redundant sources for multicast flows defined by a flow map.
Options	<i>addresses</i> —List of IPv4 or IPv6 addresses for use as redundant (backup) sources for multicast flows defined by a flow map.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring a Multicast Flow Map</i>

resolution

Syntax	<pre> resolution { rib routing-table-name { import [policy-names]; resolution-ribs [routing-table-names]; } } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure the router to perform custom route resolution on protocol next hops of routes in a certain routing table. The protocol next hop is used to determine the forwarding next-hop.</p> <p>For example, you might want to direct inet.2 route resolution to use topology routing tables :red.inet.0 and :blue.inet.0 for protocol next-hop IP address lookups. Or you might want to direct bgp.l3vpn.0 to use the information in inet.0 to resolve routes, thus overriding the default behavior, which is to use inet.3.</p> <p>You can specify up to two routing tables in the resolution-ribs statement. The route resolution scheme first checks the first-listed routing table for the protocol next-hop address. If the address is found, it uses this entry. If it is not found, the resolution scheme checks second-listed routing table. Hence, only one routing table is used for each protocol nexthop address. For example, if you configure resolution rib bgp.l3vpn.0 resolution-ribs [inet.0 inet.3], inet.0 is checked first and then inet.3 is checked.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 20px;"> <p> NOTE: Customizing route resolution might cause the routing protocol process (rpd) to consume more memory resources than it ordinarily would. When you customize route resolution, we recommend that you check the memory resources by running the show system processes and the show task memory commands. For more information, see <i>Routing Protocol Process Memory FAQs</i>.</p> </div> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

- Related Documentation**
- *Example: Configuring Route Resolution on PE Routers*
 - *Example: Configuring Route Resolution on Route Reflectors*
 - *Example: Configuring Multitopology Routing Based on a Multicast Source*

resolution-ribs

Syntax	<code>resolution-ribs [<i>routing-table-names</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution rib],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options resolution rib],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options resolution rib],</p> <p>[edit routing-options resolution rib]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Specify one or more routing tables to use for route resolution.</p> <p>This statement enables you to override the default routing tables that Junos OS uses for route resolution. For example, suppose that the resolution routing table is inet.3, but you want to allow fallback resolution through inet.0. One example use case is overriding the bgp.rtarget.0 (family route-target) routing table resolution from using only inet.3 to using both inet.3 and inet.0.</p>
Options	<i>routing-table-names</i> —Name of one or more routing tables.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring Route Resolution on PE Routers</i> • <i>Example: Configuring Multitopology Routing Based on a Multicast Source</i>

resolve

Syntax	resolve;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-options static (defaults route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)], [edit routing-instances <i>routing-instance-name</i> routing-options static (defaults route)], [edit routing-options rib <i>routing-table-name</i> static (defaults route)], [edit routing-options static (defaults route)]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Statically configure routes to be resolved to a next hop that is not directly connected. The route is resolved through the inet.0 and inet.3 routing tables.
Default	Static routes can point only to a directly connected next hop.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>static</i>

restart-duration (Routing Options)

Syntax	<code>restart-duration <i>seconds</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options graceful-restart], [edit logical-systems <i>logical-system-name</i> routing-options graceful-restart], [edit routing-instances <i>routing-instance-name</i> routing-options graceful-restart], [edit routing-options graceful-restart]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure the restart timer for graceful restart.
Options	<i>seconds</i> —Configure the time period for the restart to last. Range: 120 through 900 seconds Default: 300 seconds
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Junos OS High Availability Library for Routing Devices</i>

retain

Syntax	(no-retain retain);
Hierarchy Level	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)], [edit logical-systems <i>logical-system-name</i> routing-options static (defaults route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults route)], [edit routing-instances <i>routing-instance-name</i> routing-options static (defaults route)], [edit routing-options rib <i>routing-table-name</i> static (defaults route)], [edit routing-options static (defaults route)]</pre>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure statically configured routes to be deleted from or retained in the forwarding table when the routing protocol process shuts down normally:
Default	Statically configured routes are deleted from the forwarding table when the routing protocol process shuts down normally. Doing this greatly reduces the time required to restart a system that has a large number of routes in its routing table.
Options	<p>no-retain—Delete statically configured routes from the forwarding table when the routing protocol process shuts down normally. To explicitly specify that routes be deleted from the forwarding table, include the no-retain statement. Include this statement when configuring an individual route in the route portion of the static statement to override a retain option specified in the defaults portion of the statement.</p> <p>retain—Have a static route remain in the forwarding table when the routing protocol process shuts down normally. Doing this greatly reduces the time required to restart a system that has a large number of routes in its routing table.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <i>Examples: Configuring Static Routes</i> <i>static</i>

reverse-oif-mapping

Syntax	reverse-oif-mapping { no-qos-adjust; }
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-options multicast interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>], [edit routing-options multicast interface <i>interface-name</i>]
Release Information	Statement introduced in Junos OS Release 9.2. Statement introduced in Junos OS Release 9.2 for EX Series switches. The no-qos-adjust statement added in Junos OS Release 9.5. The no-qos-adjust statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Enable the routing device to identify a subscriber VLAN or interface based on an IGMP or MLD request it receives over the multicast VLAN. The remaining statement is explained separately.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring Multicast with Subscriber VLANs</i>

rpf-check-policy (Routing Options RPF)

Syntax	<code>rpf-check-policy [<i>policy-names</i>];</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
Release Information	Statement introduced in Junos OS Release 8.1. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Apply policies for disabling RPF checks on arriving multicast packets. The policies must be correctly configured.
Options	<i>policy-names</i> —Name of one or more multicast RPF check policies.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Configuring RPF Policies</i>

rib (General)

```
Syntax  rib routing-table-name {
        aggregate {
            defaults {
                ... aggregate-options ...
            }
            route destination-prefix {
                policy policy-name;
                ... aggregate-options ...
            }
        }
        generate {
            defaults {
                generate-options;
            }
            route destination-prefix {
                policy policy-name;
                generate-options;
            }
        }
        martians {
            destination-prefix match-type <allow>;
        }
    }
    static {
        defaults {
            static-options;
        }
        rib-group group-name;
        route destination-prefix {
            next-hop;
            static-options;
        }
    }
}
```

Hierarchy Level [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],
[edit logical-systems *logical-system-name* routing-options],
[edit routing-instances *routing-instance-name* routing-options],
[edit routing-options]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 11.3 for the QFX Series.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Create a routing table.

Explicitly creating a routing table with ***routing-table-name*** is optional if you are not adding any static, martian, aggregate, or generated routes to the routing table and if you also are creating a routing table group.



NOTE: The IPv4 multicast routing table (`inet.1`) and the IPv6 multicast routing table (`inet6.1`) are not supported for this statement.

Default If you do not specify a routing table name with the ***routing-table-name*** option, the software uses the default routing tables, which are `inet.0` for unicast routes and `inet.1` for the multicast cache.

Options ***routing-table-name***—Name of the routing table, in the following format:
protocol [.identifier].

In a routing instance, the routing table name must include the routing instance name.

For example, if the routing instance name is `link0`, the routing table name might be `link0.inet6.0`.

- ***protocol*** is the protocol family. It can be `inet6` for the IPv6 family, `inet` for the IPv4 family, `iso` for the ISO protocol family, or ***instance-name.iso.0*** for an ISO routing instance.
- ***identifier*** is a positive integer that specifies the instance of the routing table.

Default: `inet.0`

The remaining statements are explained separately.

Required Privilege Level `routing`—To view this statement in the configuration.
`routing-control`—To add this statement to the configuration.

Related Documentation

- *Example: Creating Routing Tables*
- *passive*

rib (Route Resolution)

Syntax	<pre> rib <i>routing-table-name</i> { import [<i>policy-names</i>]; resolution-ribs [<i>routing-table-names</i>]; } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options resolution],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options resolution],</p> <p>[edit routing-options resolution]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Specify a routing table name for route resolution.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring Route Resolution on PE Routers</i>

rib-group (Routing Options)

Syntax	<code>rib-group group-name;</code>
Hierarchy Level	<code>[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options interface-routes],</code> <code>[edit logical-systems logical-system-name routing-options interface-routes],</code> <code>[edit logical-systems logical-system-name routing-options rib routing-table-name static],</code> <code>[edit logical-systems logical-system-name routing-options static],</code> <code>[edit routing-instances routing-instance-name routing-options interface-routes],</code> <code>[edit routing-options interface-routes],</code> <code>[edit routing-options rib routing-table-name static],</code> <code>[edit routing-options static]</code>
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure which routing table groups interface routes are imported into.
Options	<i>group-name</i> —Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens. It generally does not make sense to specify more than a single routing table group.
Required Privilege Level	<code>routing</code> —To view this statement in the configuration. <code>routing-control</code> —To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Importing Direct and Static Routes Into a Routing Instance</i>• <i>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</i>• interface-routes on page 103• rib-groups on page 147

rib-groups

Syntax	<pre> rib-groups { group-name { export-rib group-name; import-policy [policy-names]; import-rib [group-names]; } } </pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Group one or more routing tables to form a routing table group. A routing protocol can import routes into all the routing tables in the group and can export routes from a single routing table.</p> <p>Each routing table group must contain one or more routing tables that Junos OS uses when importing routes (specified in the import-rib statement) and optionally can contain one routing table group that Junos OS uses when exporting routes to the routing protocols (specified in the export-rib statement).</p> <p>The first routing table you specify is the <i>primary routing table</i>, and any additional routing tables are the <i>secondary routing tables</i>.</p> <p>The primary routing table determines the address family of the routing table group. To configure an IP version 4 (IPv4) routing table group, specify inet.0 as the primary routing table. To configure an IP version 6 (IPv6) routing table group, specify inet6.0 as the primary routing table. If you configure an IPv6 routing table group, the primary and all secondary routing tables must be IPv6 routing tables (inet6.x).</p> <p>In Junos OS Release 9.5 and later, you can include both IPv4 and IPv6 routing tables in an IPv4 import routing table group using the import-rib statement. In releases prior to Junos OS Release 9.5, you can only include either IPv4 or IPv6 routing tables in the same import-rib statement. The ability to configure an import routing table group with both IPv4 and IPv6 routing tables enables you, for example, to populate the inet6.3 routing table with IPv6 addresses that are compatible with IPv4. Specify inet.0 as the primary routing table, and specify inet6.3 as a secondary routing table.</p>



NOTE: On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.



NOTE: If you configure an import routing table group that includes both IPv4 and IPv6 routing tables, any corresponding export routing table group must include only IPv4 routing tables.

If you have configured a routing table, configure the OSPF primary instance at the **[edit protocols ospf]** hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group. For more information, see *Example: Configuring Multiple Routing Instances of OSPF*.

After specifying the routing table from which to import routes, you can apply one or more policies to control which routes are installed in the routing table group. To apply a policy to routes being imported into the routing table group, include the **import-policy** statement.

Options *group-name*—Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens.


The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Exporting Specific Routes from One Routing Table Into Another Routing Table*
- [rib-group on page 146](#)

route-distinguisher-id

Syntax	<code>route-distinguisher-id <i>ip-address</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Automatically assign a route distinguisher to the routing instance.</p> <p>If you configure the route-distinguisher statement in addition to the route-distinguisher-id statement, the value configured for route-distinguisher supersedes the value generated from route-distinguisher-id.</p>
	<div>  <p>NOTE: To avoid a conflict in the two route distinguisher values, it is recommended to ensure that the first half of the route distinguisher obtained by configuring the route-distinguisher statement is different from the first half of the route distinguisher obtained by configuring the route-distinguisher-id statement.</p> </div>
Options	<i>ip-address</i> —Address for routing instance.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring BGP Route Target Filtering for VPNs</i> • <i>Configuring Routing Instances on PE Routers in VPNs</i>

route-record

Syntax	route-record;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Export the AS path and routing information to the traffic sampling process. Before you can perform flow aggregation, the routing protocol process must export the AS path and routing information to the sampling process.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Enabling Flow Aggregation</i>• <i>Junos OS Services Interfaces Library for Routing Devices</i>

router-id

Syntax	<code>router-id address;</code>
Hierarchy Level	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-options],</code> <code>[edit routing-instances <i>routing-instance-name</i> routing-options],</code> <code>[edit routing-options]</code>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Specify the routing device's IP address.</p> <p>The router identifier is used by BGP and OSPF to identify the routing device from which a packet originated. The router identifier usually is the IP address of the local routing device. If you do not configure a router identifier, the IP address of the first interface to come online is used. This is usually the loopback interface. Otherwise, the first hardware interface with an IP address is used.</p>



NOTE: We strongly recommend that you configure the router identifier under the `[edit routing-options]` hierarchy level to avoid unpredictable behavior if the interface address on a loopback interface changes.

For more information about the router identifier in OSPF, see *Example: Configuring an OSPF Router Identifier*.

You must configure a router-id in order for BGP and OSPF to function in a routing instance. Use the **show route instance detail** command to display the router-id value for a routing instance. If the router-id is **0.0.0.0**, then the routing instance has no router-id.

For more information about the router identifier in OSPF, see *Example: Configuring an OSPF Router Identifier*.



NOTE: If you run OSPF for IPv6 or BGP for IPv6 in a routing instance, you must configure an IPv4 router identifier (**router-id**) in the routing instance itself. In other words, the IPv4 router-id in the main routing instance is not inherited by other routing instances. Even if you run *only* IPv6 OSPF or BGP in a routing instance, the IPv4 router-id must be configured because OSPF and BGP, even when used exclusively with IPv6, use the IPv4 router-id for handshaking. If you do not configure the IPv4 router-id in the IPv6 OSPF or BGP routing instance, then the IPv6 protocols will use invalid IPv4 address 0.0.0.0 and the adjacencies and connections will fail.

Options	address —IP address of the routing device. Default: Address of the first interface encountered by Junos OS
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Examples: Configuring External BGP Peering</i>• <i>Examples: Configuring Internal BGP Peering</i>

routing-instances

Syntax	<pre>routing-instances <i>routing-instance-name</i> { <i>description</i>; instance-type virtual-router; <i>interface</i> <i>interface-name</i>; <i>protocols</i>; <i>routing-options</i> }</pre>
Hierarchy Level	[edit]
Release Information	Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	(QFabric switches only) Configure a virtual router routing instance.
Options	<i>routing-instance-name</i> —Name of this routing instance. The remaining statements are explained separately.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Configuring Virtual Router Routing Instances on page 8

routing-options

Syntax	<code>routing-options { ... }</code>
Hierarchy Level	<code>[edit]</code> , <code>[edit routing-instances <i>routing-instance-name</i>]</code>
Release Information	Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure protocol-independent routing properties.
Required Privilege Level	<code>routing</code> —To view this statement in the configuration. <code>routing-control</code> —To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Overview of Routing Options on page 3 • Understanding Distributed Periodic Packet Management on page 9 • Example: Configuring SSM Maps for Different Groups to Different Sources

scope

Syntax	<pre>scope <i>scope-name</i> { interface [<i>interface-names</i>]; prefix <i>destination-prefix</i>; }</pre>
Hierarchy Level	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast]</code> , <code>[edit logical-systems <i>logical-system-name</i> routing-options multicast]</code> , <code>[edit routing-instances <i>routing-instance-name</i> routing-options multicast]</code> , <code>[edit routing-options multicast]</code>
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure multicast scoping.
Options	<p><i>scope-name</i>—Name of the multicast scope.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<code>routing</code> —To view this statement in the configuration. <code>routing-control</code> —To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Example: Creating a Named Scope for Multicast Scoping

scope-policy

Syntax `scope-policy [policy-names];`

Hierarchy Level [edit logical-systems *logical-system-name* routing-options multicast],
[edit routing-options multicast]




NOTE: You can configure a scope policy at these two hierarchy levels only. You cannot apply a scope policy to a specific routing instance, because all scoping policies are applied to all routing instances. However, you can apply the `scope` statement to a specific routing instance at the [edit routing-instances *routing-instance-name* routing-options multicast] or [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast] hierarchy level.

Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Apply policies for scoping. The policy must be correctly configured at the edit policy-options policy-statement hierarchy level.
Options	<i>policy-names</i> —Name of one or more multicast scope policies.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• scope on page 153• <i>Example: Using a Scope Policy for Multicast Scoping</i>

source (Source-Specific Multicast)

Syntax	<code>source [<i>addresses</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast ssm-map <i>ssm-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast ssm-map <i>ssm-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast ssm-map <i>ssm-map-name</i>],</p> <p>[edit routing-options multicast ssm-map <i>ssm-map-name</i>]</p>
Release Information	<p>Statement introduced in Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
Description	Specify IPv4 or IPv6 source addresses for an SSM map.
Options	<i>addresses</i> —IPv4 or IPv6 source addresses.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To view this statement in the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring SSM Mapping</i>

source-routing

Syntax	source-routing { (ip ipv6) }
Hierarchy Level	[edit routing-options]
Release Information	Statement for IPv6 introduced in Junos OS Release 8.2. Statement for IPv4 introduced in Junos OS Release 8.5. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
Description	<p>Enable source routing.</p> <p>Source routing allows a sender of a packet to partially or completely specify the route the packet takes through the network. In contrast, in non-source routing protocols, routers in the network determine the path based on the packet's destination.</p> <div> NOTE: We recommend that you not use source routing. Instead, we recommend that you use policy-based routing or filter-based forwarding to route packets based on source addresses.</div>
Default	Disabled
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Configuring Filter-Based Forwarding on the Source Address</i>

ssm-groups

Syntax	<code>ssm-groups [<i>ip-addresses</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options multicast]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure source-specific multicast (SSM) groups.</p> <p>By default, the SSM group multicast address is limited to the IP address range from 232.0.0.0 through 232.255.255.255. However, you can extend SSM operations into another Class D range by including the ssm-groups statement in the configuration. The default SSM address range from 232.0.0.0 through 232.255.255.255 cannot be used in the ssm-groups statement. This statement is for adding other multicast addresses to the default SSM group addresses. This statement does not override the default SSM group address range.</p> <p>IGMPv3 supports SSM groups. By utilizing inclusion lists, only sources that are specified send to the SSM group.</p>
Options	<i>ip-addresses</i> —List of one or more additional SSM group addresses separated by a space.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring Source-Specific Multicast Groups with Any-Source Override</i>

ssm-map (Routing Options Multicast)

Syntax	<code>ssm-map <i>ssm-map-name</i> { policy [<i>policy-names</i>]; source [<i>addresses</i>]; }</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
Release Information	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure SSM mapping.
Options	<i>ssm-map-name</i> —Name of the SSM map. The remaining statements are explained separately.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Configuring SSM Mapping</i>

static (Routes)

Syntax	<pre> static { defaults { static-options; } rib-group <i>group-name</i>; route <i>destination-prefix</i> { next-hop <i>address</i>; next-hop <i>options</i>; qualified-next-hop <i>address</i> { metric <i>metric</i>; preference <i>preference</i>; } static-options; } } </pre>
Hierarchy Level	[edit routing-options], [edit routing-options rib <i>routing-table-name</i>]
Release Information	Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure static routes to be installed in the routing table. You can specify any number of routes within a single static statement, and you can specify any number of static options in the configuration.
Options	<p>defaults—Specify global static route options. These options only set default attributes inherited by all newly created static routes. These are treated as global defaults and apply to all the static routes you configure in the static statement. This part of the static statement is optional.</p> <p>route <i>destination-prefix</i>—Destination of the static route.</p> <ul style="list-style-type: none"> defaults—For the default route to the destination. This is equivalent to specifying an IP address of 0.0.0.0/0. <i>destination-prefix/prefix-length—destination-prefix</i> is the network portion of the IP address, and <i>prefix-length</i> is the destination prefix length. next-hop <i>address</i>—Reach the next-hop routing device by specifying an IP address, an interface name, or an ISO network entity title (NET). <i>nsap-prefix—nsap-prefix</i> is the network service access point (NSAP) address for ISO. <p>next-hop <i>options</i>—Additional information for how to manage forwarding of packets to the next hop.</p> <ul style="list-style-type: none"> discard—Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.

- **iso-net**—Reach the next-hop routing device by specifying an ISO NSAP.
- **next-table *routing-table-name***—Name of the next routing table to the destination.
- **receive**—Install a receive route for this destination into the routing table.
- **reject**—Do not forward packets addressed to this destination. Instead, drop the packets, send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.

static-options—(Optional under **route**) Additional information about static routes, which is included with the route when it is installed in the routing table.

You can specify one or more of the following in **static-options**. Each of the options is explained separately.

- **(active | passive);**
- **(install | no-install);**
- **(metric | metric2 | metric3 | metric4) *value* <type type>;**
- **(preference | preference2 | color | color2) *preference* <type type>;**
- **(resolve | no-resolve);**
- **(no-retain | retain);**

The remaining statements are explained separately.

Required Privilege Level	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Configuring Static Routing on page 4

subscriber-leave-timer

Syntax	<code>subscriber-leave-timer seconds;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast interface <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast interface <i>interface-name</i>],</p> <p>[edit routing-options multicast interface <i>interface-name</i>]</p>
Release Information	<p>Statement introduced in Junos OS Release 9.2.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Length of time before the multicast VLAN updates QoS data (for example, available bandwidth) for subscriber interfaces after it receives an IGMP leave message.
Options	<p>seconds—Length of time before the multicast VLAN updates QoS data (for example, available bandwidth) for subscriber interfaces after it receives an IGMP leave message. Specifying a value of 0 results in an immediate update. This is the same as if the statement were not configured.</p> <p>Range: 0 through 30</p> <p>Default: 0 seconds</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring Multicast with Subscriber VLANs</i>

tag (Routing Options)

Syntax	<code>tag metric type number;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (aggregate generate static) (defaults route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options aggregate generate static) (defaults route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)],</p> <p>[edit routing-options (aggregate generate static) (defaults route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (aggregate generate static) (defaults route)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Associate a tag with a static, aggregate, or generated route.
Default	No tag strings are associated with routes.
Options	<p><i>metric</i>—Tag metric.</p> <p>Range: 0 through 4,294,967,295</p> <p><i>type number</i>—Tag type.</p> <p>Range: 1 through 16</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Examples: Configuring Static Routes</i> • <i>Example: Summarizing Routes Through Route Aggregation</i> • <i>Example: Conditionally Generating Static Routes</i> • aggregate on page 53 • generate on page 90 • <i>static</i>

threshold (Multicast Forwarding Cache)

Syntax	<pre>threshold { log-warning <i>value</i>; suppress <i>value</i> <reuse <i>value</i>>; }</pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache family (inet inet6)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast forwarding-cache],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast forwarding-cache family (inet inet6)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache (inet inet6)],</p> <p>[edit routing-options multicast forwarding-cache],</p> <p>[edit routing-options multicast forwarding-cache family (inet inet6)]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure the global suppression, reuse, and warning log message thresholds for multicast forwarding cache limits. You can configure the thresholds globally for the multicast forwarding cache or individually for the IPv4 and IPv6 multicast forwarding caches. Configuring the threshold statement globally for the multicast forwarding cache or including the family statement to configure the thresholds for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.</p> <p>To confirm the configured threshold values, use the show multicast forwarding-cache statistics command.</p>
Options	<p>reuse <i>value</i>—(Optional) Value at which to begin creating new multicast forwarding cache entries. If configured, this number should be less than the suppress value.</p> <p>Range: 1 through 200,000</p> <p>suppress <i>value</i>—Value at which to begin suppressing new multicast forwarding cache entries. This value is mandatory. This number should be greater than the reuse value.</p> <p>Range: 1 through 200,000</p> <p>The remaining statement is explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Examples: Configuring the Multicast Forwarding Cache</i>

timeout (Flow Maps)

Syntax	timeout (never non-discard-entry-only <i>minutes</i>);
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit logical-systems <i>logical-system-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast flow-map <i>flow-map-name</i>], [edit routing-options multicast flow-map <i>flow-map-name</i>]
Release Information	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure the timeout value for multicast forwarding cache entries associated with the flow map.
Options	minutes —Length of time that the forwarding cache entry remains active. Range: 1 through 720 never non-discard-entry-only —Specify that the forwarding cache entry always remain active. If you omit the non-discard-entry-only option, all multicast forwarding entries, including those in forwarding and pruned states, are kept forever. If you include the non-discard-entry-only option, entries with forwarding states are kept forever, and entries with pruned states time out.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

timeout (Multicast)

Syntax	<code>timeout <i>minutes</i> <family (inet inet6)>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast forwarding-cache],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast forwarding-cache],</p> <p>[edit routing-options multicast forwarding-cache]</p>
Release Information	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure the timeout value for multicast forwarding cache entries.
Options	<p><i>minutes</i>—Length of time that the forwarding cache limit remains active.</p> <p>Range: 1 through 720</p> <p><i>family (inet inet6)</i>—(Optional) Apply the configured timeout to either IPv4 or IPv6 multicast forwarding cache entries. Configuring the timeout statement globally for the multicast forwarding cache or including the family statement to configure the timeout value for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.</p> <p>Default: By default, the configured timeout applies to both IPv4 and IPv6 multicast forwarding cache entries.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring the Multicast Forwarding Cache</i>

traceoptions (Routing Options)

Syntax	<pre>traceoptions { file <i>filename</i> <files <i>number</i>> <size <i>size</i>> <world-readable no-world-readable>; flag <i>flag</i> <disable>; }</pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options],</p> <p>[edit routing-options flow],</p> <p>[edit routing-options multicast]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>nsr-synchronization flag for BGP, IS-IS, LDP, and OSPF added in Junos OS Release 8.4.</p> <p>nsr-synchronization and nsr-packet flags for BFD sessions added in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>nsr-synchronization flag for RIP and RIPng added in Junos OS Release 9.0.</p> <p>nsr-synchronization flag for Layer 2 VPNs and VPLS added in Junos OS Release 9.1.</p> <p>nsr-synchronization flag for PIM added in Junos OS Release 9.3.</p> <p>nsr-synchronization flag for MPLS added in Junos OS Release 10.1.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>nsr-synchronization flag for MSDP added in Junos OS Release 12.1.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Define tracing operations that track all routing protocol functionality in the routing device.</p> <p>To specify more than one tracing operation, include multiple flag statements.</p>
Default	If you do not include this statement, no global tracing operations are performed.
Options	<p>Values:</p> <p>disable—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as all.</p> <p>file <i>filename</i>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory /var/log. We recommend that you place global routing protocol tracing output in the file routing-log.</p>

files *number*—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

Range: 2 through 1000 files

Default: 10 files

flag *flag*—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. These are the global routing protocol tracing options:

- **all**—All tracing operations
- **condition-manager**—Condition-manager events
- **config-internal**—Configuration internals
- **general**—All normal operations and routing table changes (a combination of the **normal** and **route** trace operations)
- **graceful-restart**—Graceful restart operations
- **normal**—All normal operations
- **nsr-packet**—Detailed trace information for BFD nonstop active routing only
- **nsr-synchronization**—Tracing operations for nonstop active routing
- **nsr-synchronization-detail**—(MPLS only) Tracing operations for nonstop active routing in detail
- **parse**—Configuration parsing
- **policy**—Routing policy operations and actions
- **regex-parse**—Regular-expression parsing
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

no-world-readable—(Optional) Prevent any user from reading the log file.

size size—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

Syntax: **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

Range: 10 KB through the maximum file size supported on your system

Default: 128 KB

world-readable—(Optional) Allow any user to read the log file.

Required Privilege Level	routing and trace—To view this statement in the configuration.
	routing-control and trace-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Tracing Global Routing Protocol Operations</i>• <i>Tracing Nonstop Active Routing Synchronization Events</i>

upstream-interface

Syntax	<code>upstream-interface [<i>interface-names</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast pim-to-igmp-proxy],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast pim-to-mld-proxy],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast pim-to-igmp-proxy],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast pim-to-mld-proxy],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast pim-to-igmp-proxy],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast pim-to-mld-proxy],</p> <p>[edit routing-options multicast pim-to-igmp-proxy],</p> <p>[edit routing-options multicast pim-to-mld-proxy]</p>
Release Information	<p>Statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure at least one, but not more than two, upstream interfaces on the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain. The RP routing device translates PIM join or prune messages into corresponding IGMP report or leave messages (if you include the pim-to-igmp-proxy statement), or into corresponding MLD report or leave messages (if you include the pim-to-mld-proxy statement). The routing device then proxies the IGMP or MLD report or leave messages to one or both upstream interfaces to forward IPv4 multicast traffic (for IGMP) or IPv6 multicast traffic (for MLD) across the PIM domains.</p>
Options	<p><i>interface-names</i>—Names of one or two upstream interfaces to which the RP routing device proxies IGMP or MLD report or leave messages for transmission of multicast traffic across PIM domains. You can specify a maximum of two upstream interfaces on the RP routing device. To configure a set of two upstream interfaces, specify the full interface names, including all physical and logical address components, within square brackets ([]).</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring PIM-to-IGMP Message Translation</i> • <i>Configuring PIM-to-MLD Message Translation</i>

CHAPTER 3

Routing Options Operational Commands

- `clear ipv6 neighbors`
- `show as-path`
- `show as-path domain`
- `show as-path summary`
- `show ipv6 neighbors`
- `show ipv6 router-advertisement`
- `show route`
- `show route active-path`
- `show route all`
- `show route aspath-regex`
- `show route best`
- `show route brief`
- `show route community`
- `show route community-name`
- `show route damping`
- `show route detail`
- `show route exact`
- `show route export`
- `show route extensive`
- `show route flow validation`
- `show route forwarding-table`
- `show route inactive-path`
- `show route inactive-prefix`
- `show route instance`
- `show route label`
- `show route label-switched-path`
- `show route martians`
- `show route next-hop`

- `show route no-community`
- `show route protocol`
- `show route range`
- `show route receive-protocol`
- `show route resolution`
- `show route snooping`
- `show route source-gateway`
- `show route summary`
- `show route table`
- `show route terse`

clear ipv6 neighbors

Syntax	clear ipv6 neighbors <all host <i>hostname</i> >
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.3 for EX Series switches. Command introduced in Junos OS Release 12.2 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Clear IPv6 neighbor cache information.
Options	none —Clear all IPv6 neighbor cache information. all —(Optional) Clear all IPv6 neighbor cache information. host <i>hostname</i> —(Optional) Clear the information for the specified IPv6 neighbors.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• show ipv6 neighbors on page 183
List of Sample Output	clear ipv6 neighbors on page 173
Output Fields	When you enter this command, you are provided feedback on the status of your request.

Sample Output

clear ipv6 neighbors

```
user@host> clear ipv6 neighbors
```

show as-path

List of Syntax	Syntax on page 174 Syntax (EX Series Switches) on page 174
Syntax	<code>show as-path</code> <code><brief detail></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches)	<code>show as-path</code> <code><brief detail></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Display the distribution of autonomous system (AS) paths that the local routing device is using (usually through the routing table). Use this command to debug problems for AS paths and to understand how AS paths have been manipulated through a policy (through the as-path-prepend action) or through aggregation.</p> <p>AS paths are stored in a hash table. A hash table is one method for fast lookup. Each entry in the table is called a bucket. Junos OS computes a hash value that indicates in which bucket the AS path is stored. The AS paths are dispersed among the hash buckets so that a manageable number of AS paths is stored in each bucket. Only unique AS paths are stored. Duplicate AS paths increase a reference count, but do not increase the number of AS paths stored in the hash table.</p>
Options	<p>none—Display basic information about AS paths that the local routing device is using (same as brief).</p> <p>brief detail—(Optional) Display the specified level of output.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• show as-path summary on page 181
List of Sample Output	show as-path on page 175 show as-path detail on page 176
Output Fields	Table 13 on page 175 lists the output fields for the show as-path command. Output fields are listed in the approximate order in which they appear.

Table 13: show as-path Output Fields

Field Name	Field Description	Level of Output
Total AS paths	Total number of AS paths.	brief none
Bucket	Bucket number.	All levels
Count	Number of AS path entries in this bucket.	All levels
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> • I—IGP. • E—EGP. • ?—Incomplete; typically, the AS path was aggregated. • Atomic—Route is an aggregate of several route prefixes. • Aggregat—Routing device has summarized a range of prefixes. 	All levels
domain	Number of independent AS domains. The AS paths of an independent AS domain are not shared with the AS paths and AS path attributes of other domains, including the master routing instance domain.	detail
neighbor as	AS peer address.	detail
length	Length of the AS path.	detail
segments	Length of the AS segment descriptor.	detail
references	Path reference count.	detail

Sample Output

show as-path

```

user@host> show as-path
Total AS paths: 30382
  Bucket 0      Count: 36
    I
    14203 2914 174 31752 I
    14203 2914 701 21512 I
    14203 2914 1239 26632 I
    14203 2914 1239 29704 I
    14203 2914 4323 10248 I
    14203 2914 4766 23560 I
    14203 2914 6395 32776 I
    14203 2914 7911 11272 I
    14203 2914 12180 18440 I
    14203 2914 17408 17416 I
    14203 2914 701 702 24586 I
    14203 2914 1239 4657 9226 I
    14203 2914 1239 7132 16394 I
    14203 2914 1299 8308 34826 I
    14203 2914 3320 5603 28682 I

```

```

14203 2914 3491 1680 33802 I
14203 2914 3549 7908 27658 I
14203 2914 3549 20804 30730 I
14203 2914 7018 2687 9226 I
14203 2914 174 9318 9318 23564 I
14203 2914 701 3786 3786 23564 I
14203 2914 701 4761 4795 9228 I
14203 2914 1239 7132 5673 18444 I
14203 2914 3491 20485 24588 24588 I
14203 2914 5511 2200 1945 2060 I
14203 2914 7911 14325 14325 14348 I
14203 2914 701 4637 9230 9230 9230 I
14203 2914 6395 14 14 14 14 I
14203 2914 9299 6163 6163 6163 9232 I
14203 2914 3356 3356 3356 3356 11955 21522 I
14203 2914 9837 9837 9219 I Aggregator: 9219 202.27.91.253
14203 2914 174 30209 30222 30222 30222 ?
14203 2914 1299 5377 I (Atomic) Aggregator: 5377 193.219.192.22
14203 2914 4323 36097 I (Atomic) Aggregator: 36097 216.69.252.254
14203 2914 209 2516 17676 23813 I (Atomic) Aggregator: 23813 219.127.233.66
Bucket 1    Count: 28
14203 2914 35847 I
14203 2914 174 19465 I
14203 2914 174 35849 I
14203 2914 2828 32777 I
14203 2914 4323 14345 I
14203 2914 4323 29705 I
14203 2914 6395 32777 I

```

...

show as-path detail

```

user@host> show as-path detail
Total AS paths: 30410
Bucket 0    Count: 36
AS path: I
  domain 0, length 0, segments 0, references 54
AS path: 14203 2914 174 31752 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 701 21512 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 1239 26632 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 1239 29704 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 4323 10248 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 4766 23560 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 6395 32776 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 3
AS path: 14203 2914 7911 11272 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 2
AS path: 14203 2914 12180 18440 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 3
AS path: 14203 2914 17408 17416 I
  domain 1, neighbor as: 14203, length 4, segments 1, references 3
AS path: 14203 2914 701 702 24586 I
  domain 1, neighbor as: 14203, length 5, segments 1, references 3
AS path: 14203 2914 1239 4657 9226 I

```

```

    domain 1, neighbor as: 14203, length 5, segments 1, references 7
AS path: 14203 2914 1239 7132 16394 I
    domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 1299 8308 34826 I
    domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3320 5603 28682 I
    domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3491 1680 33802 I
    domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3549 7908 27658 I
    domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 3549 20804 30730 I
    domain 1, neighbor as: 14203, length 5, segments 1, references 2
AS path: 14203 2914 7018 2687 9226 I
    domain 1, neighbor as: 14203, length 5, segments 1, references 3
AS path: 14203 2914 174 9318 9318 23564 I
    domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 701 3786 3786 23564 I
    domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 701 4761 4795 9228 I
    domain 1, neighbor as: 14203, length 6, segments 1, references 14
AS path: 14203 2914 1239 7132 5673 18444 I
    domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 3491 20485 24588 24588 I
    domain 1, neighbor as: 14203, length 6, segments 1, references 4
AS path: 14203 2914 5511 2200 1945 2060 I
    domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 7911 14325 14325 14348 I
    domain 1, neighbor as: 14203, length 6, segments 1, references 2
AS path: 14203 2914 701 4637 9230 9230 9230 I
    domain 1, neighbor as: 14203, length 7, segments 1, references 3
AS path: 14203 2914 6395 14 14 14 14 I
    domain 1, neighbor as: 14203, length 7, segments 1, references 10
...

```

show as-path domain

List of Syntax	Syntax on page 178 Syntax (EX Series Switches) on page 178
Syntax	show as-path domain <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show as-path domain
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display autonomous system (AS) path domain information.
Options	none —(Optional) Display AS path domain information for all routing instances. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show as-path domain on page 180
Output Fields	Table 14 on page 178 lists the output fields for the show as-path domain command. Output fields are listed in the approximate order in which they appear

Table 14: show as-path domain Output Fields

Field Name	Field Description
Domain	Number of independent AS domains. The AS paths of an independent AS domain are not shared with the AS paths and AS path attributes of other domains, including the master routing instance domain.
Primary	Primary AS number.
References	Path reference count.
Number Paths	Number of known AS paths.
Flags	Information about the AS path: <ul style="list-style-type: none"> • ASLoop—Path contains an AS loop. • Atomic—Path includes the ATOMIC_AGGREGATE path attribute. • Local—Path was created by local aggregation. • Master—Path was created by the master routing instance.
Local AS	AS number of the local routing device.

Table 14: show as-path domain Output Fields (*continued*)

Field Name	Field Description
Loops	How many times this AS number can appear in an AS path.

Sample Output

show as-path domain

```
user@host> show as-path domain
Domain: 1          Primary: 10458
References:        3 Paths:      30383
Flags: Master
Local AS: 10458   Loops: 1
```

show as-path summary

List of Syntax	Syntax on page 181 Syntax (EX Series Switches) on page 181
Syntax	show as-path summary <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show as-path summary
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display autonomous system (AS) path summary information. AS paths are stored in a hash table. A hash table is one method for fast lookup. Each entry in the table is called a bucket. Junos OS computes a hash value that indicates in which bucket the AS path is stored. The AS paths are dispersed among the hash buckets so that a manageable number of AS paths is stored in each bucket. Only unique AS paths are stored. Duplicate AS paths increase a reference count, but do not increase the number of AS paths stored in the hash table.
Options	none —(Optional) Display AS path summary information for all routing instances. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • show as-path on page 174
List of Sample Output	show as-path summary on page 182
Output Fields	Table 15 on page 181 lists the output fields for the show as-path summary command. Output fields are listed in the approximate order in which they appear.

Table 15: show as-path summary Output Fields

Field Name	Field Description
AS Paths	Number of AS paths.
Buckets	Number of hash buckets in use.
Max	Maximum number of AS path entries per bucket.
Min	Minimum number of AS path entries per bucket.
Avg	Average number of AS path entries per bucket.

Table 15: show as-path summary Output Fields (*continued*)

Field Name	Field Description
Std deviation	Standard deviation of AS path entries per bucket.

Sample Output

show as-path summary

```
user@host> show as-path summary
AS Paths  Buckets  Max   Min   Avg   Std deviation
30425     1024     95    12    29    6.481419
```


show ipv6 neighbors

Syntax	show ipv6 neighbors
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.3 for EX Series switches. Command introduced in Junos OS Release 12.2 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display information about the IPv6 neighbor cache.
Options	This command has no options.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> clear ipv6 neighbors on page 173
List of Sample Output	show ipv6 neighbors on page 183
Output Fields	Table 16 on page 183 describes the output fields for the show ipv6 neighbors command. Output fields are listed in the approximate order in which they appear.

Table 16: show ipv6 neighbors Output Fields

Field Name	Field Description
IPv6 Address	Name of the IPv6 interface.
Linklayer Address	Link-layer address.
State	State of the link: up , down , incomplete , reachable , stale , or unreachable .
Exp	Number of seconds until the entry expires.
Rtr	Whether the neighbor is a routing device: yes or no .
Secure	Whether this entry was created using the Secure Neighbor Discovery (SEND) protocol: yes or no .
Interface	Name of the interface.

Sample Output

show ipv6 neighbors

```

user@host> show ipv6 neighbors
IPv6 Address          Linklayer Address  State      Exp Rtr Secure
Interface
2001:db8:0:1:2a0:a514:0:24c  00:05:85:8f:c8:bd  stale      546 yes no

```

fe-1/2/0.1				
fe80::2a0:a514:0:24c	00:05:85:8f:c8:bd	stale	258	yes no
fe-1/2/0.1				
fe80::2a0:a514:0:64c	00:05:85:8f:c8:bd	stale	111	yes no
fe-1/2/1.5				
fe80::2a0:a514:0:a4c	00:05:85:8f:c8:bd	stale	327	yes no
fe-1/2/2.9				

show ipv6 router-advertisement

Syntax	<pre>show ipv6 router-advertisement <conflicts> <interface <i>interface</i>> <logical-system (all <i>logical-system-name</i>)> <prefix <i>prefix/prefix length</i>></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 12.2 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Display information about IPv6 router advertisements, including statistics about messages sent and received on interfaces, and information received from advertisements from other routers.
Options	<p>none—Display all IPv6 router advertisement information for all interfaces.</p> <p>conflicts—(Optional) Display only the IPv6 router advertisement information that is conflicting.</p> <p>interface <i>interface</i>—(Optional) Display IPv6 router advertisement information for the specified interface.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>prefix <i>prefix/prefix length</i>—(Optional) Display IPv6 router advertisement information for the specified prefix.</p>
Additional Information	The display identifies conflicting information by enclosing the value the router is advertising in brackets.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> clear ipv6 router-advertisement
List of Sample Output	show ipv6 router-advertisement on page 186 show ipv6 router-advertisement conflicts on page 187 show ipv6 router-advertisement prefix on page 187
Output Fields	Table 17 on page 185 describes the output fields for the show ipv6 router-advertisement command. Output fields are listed in the approximate order in which they appear.

Table 17: show ipv6 router-advertisement Output Fields

Field Name	Field Description
Interface	Name of the interface.

Table 17: show ipv6 router-advertisement Output Fields (*continued*)

Field Name	Field Description
Advertisements sent	Number of router advertisements sent and the elapsed time since they were sent.
Solicits received	Number of solicitation messages received.
Advertisements received	Number of router advertisements received.
Advertisements from	Names of interfaces from which router advertisements have been received and the elapsed time since the last one was received.
Managed	Managed address configuration flag: 0 (stateless) or 1 (stateful).
Other configuration	Other stateful configuration flag: 0 (stateless) or 1 (stateful).
Reachable time	Time that a node identifies a neighbor as reachable after receiving a reachability confirmation, in milliseconds.
Default lifetime	Default lifetime, in seconds: from 0 seconds to 18.2 hours. A setting of 0 indicates that the router is not a default router.
Retransmit timer	Time between retransmitted Neighbor Solicitation messages, in milliseconds.
Current hop limit	Configured current hop limit.
Prefix	Name and length of the prefix.
Valid lifetime	How long the prefix remains valid for onlink determination.
Preferred lifetime	How long the prefix generated by stateless autoconfiguration remains preferred.
On link	Onlink flag: 0 (not onlink) or 1 (onlink).
Autonomous	Autonomous address configuration flag: 0 (not autonomous) or 1 (autonomous).

Sample Output

show ipv6 router-advertisement

```

user@host> show ipv6 router-advertisement
Interface: fe-0/1/1.0
  Advertisements sent: 0
  Solicits received: 0
  Advertisements received: 0
Interface: fxp0.0
  Advertisements sent: 0
  Solicits received: 0
  Advertisements received: 1
  Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:00:13 ago
  Managed: 0

```

```
Other configuration: 0 [1]
Reachable time: 0 ms
Default lifetime: 1800 sec
Retransmit timer: 0 ms
Current hop limit: 64
```

show ipv6 router-advertisement conflicts

```
user@host> show ipv6 router-advertisement conflicts
Interface: fxp0.0
Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:01:08 ago
Other configuration: 0 [1]
```

show ipv6 router-advertisement prefix

```
user@host> show ipv6 router-advertisement prefix 8040::/16
Interface: fe-0/1/3.0
Advertisements sent: 3, last sent 00:04:11 ago
Solicits received: 0
Advertisements received: 3
Advertisement from fe80::290:69ff:fe9a:5403, heard 00:00:05 ago
Managed: 0
Other configuration: 0
Reachable time: 0 ms
Default lifetime: 180 sec [1800 sec]
Retransmit timer: 0 ms
Current hop limit: 64
Prefix: 8040:1::/64
Valid lifetime: 2592000 sec
Preferred lifetime: 604800 sec
On link: 1
Autonomous: 1
```

show route

List of Syntax	Syntax on page 188 Syntax (EX Series Switches) on page 188
Syntax	<pre>show route <all> <destination-prefix> <logical-system (all logical-system-name)> <private></pre>
Syntax (EX Series Switches)	<pre>show route <all> <destination-prefix> <private></pre>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Option private introduced in Junos OS Release 9.5. Option private introduced in Junos OS Release 9.5 for EX Series switches.
Description	Display the active entries in the routing tables.
Options	<p>none—Display brief information about all active entries in the routing tables.</p> <p>all—(Optional) Display information about all routing tables, including private, or internal, routing tables.</p> <p>destination-prefix—(Optional) Display active entries for the specified address or range of addresses.</p> <p>logical-system (all logical-system-name)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>private—(Optional) Display information only about all private, or internal, routing tables.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• <i>Example: Configuring RIP</i>• <i>Example: Configuring RIPng</i>• <i>Example: Configuring IS-IS</i>• <i>Examples: Configuring Internal BGP Peering</i>• <i>Examples: Configuring External BGP Peering</i>• <i>Examples: Configuring OSPF Routing Policy</i>
List of Sample Output	show route on page 191 show route on page 192

[show route destination-prefix on page 192](#)

[show route extensive on page 192](#)

Output Fields [Table 18 on page 189](#) describes the output fields for the **show route** command. Output fields are listed in the approximate order in which they appear.

Table 18: show route Output Fields

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> • active (routes that are active). • holddown (routes that are in the pending state before being declared inactive). A holddown route was once the active route and is no longer the active route. The route is in the holddown state because a protocol still has interest in the route, meaning that the interest bit is set. A protocol might have its interest bit set on the previously active route because the protocol is still advertising the route. The route will be deleted after all protocols withdraw their advertisement of the route and remove their interest bit. A persistent holddown state often means that the interested protocol is not releasing its interest bit properly. <p>However, if you have configured advertisement of multiple routes (with the add-path or advertise-inactive statement), the holddown bit is most likely set because BGP is advertising the route as an active route. In this case, you can ignore the holddown state because nothing is wrong.</p> <ul style="list-style-type: none"> • hidden (routes that are not used because of a routing policy).
<i>destination-prefix</i>	<p>Route destination (for example:10.0.0.1/24). Sometimes the route information is presented in another format, such as:</p> <ul style="list-style-type: none"> • MPLS-label (for example, 80001). • interface-name (for example, ge-1/0/2). • neighbor-address:control-word-status:encapsulation type:vc-id:source (Layer 2 circuit only. For example, 10.1.1.195:NoCtrlWord:1:1:Local/96): <ul style="list-style-type: none"> • neighbor-address—Address of the neighbor. • control-word-status—Whether the use of the control word has been negotiated for this virtual circuit: NoCtrlWord or CtrlWord. • encapsulation type—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport. • vc-id—Virtual circuit identifier. • source—Source of the advertisement: Local or Remote.

Table 18: show route Output Fields (*continued*)

Field Name	Field Description
[<i>protocol, preference</i>]	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> • +—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • -—A hyphen indicates the last active route. • *—An asterisk indicates that the route is both the active and the last active route. An asterisk before a to line indicates the best subpath to the route. <p>In every routing metric except for the BGP LocalPref attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the LocalPref value in the Preference2 field. For example, if the LocalPref value for Route 1 is 100, the Preference2 value is -101. If the LocalPref value for Route 2 is 155, the Preference2 value is -156. Route 2 is preferred because it has a higher LocalPref value and a lower Preference2 value.</p>
<i>weeks:days</i> <i>hours:minutes:seconds</i>	How long the route been known (for example, 2w4d 13:11:14 , or 2 weeks, 4 days, 13 hours, 11 minutes, and 14 seconds).
metric	Cost value of the indicated route. For routes within an AS, the cost is determined by the IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
localpref	Local preference value included in the route.
from	Interface from which the route was received.
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> • I—IGP. • E—EGP. • ?—Incomplete; typically, the AS path was aggregated. <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> • []—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured. • { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • ()—Parentheses enclose a confederation. • ([])—Parentheses and brackets enclose a confederation set. <p>NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>

Table 18: show route Output Fields (*continued*)

Field Name	Field Description
validation-state	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> • Invalid—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database. • Unknown—Indicates that the prefix is not among the prefixes or prefix ranges in the database. • Unverified—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers. • Valid—Indicates that the prefix and autonomous system pair are found in the database.
to	<p>Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.</p> <p>If the destination is Discard, traffic is dropped.</p>
via	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word Selected. This field can also contain the following information:</p> <ul style="list-style-type: none"> • Weight—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible. • Balance—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing. • lsp-path-name—Name of the LSP used to reach the next hop. • label-action—MPLS label and operation occurring at the next hop. The operation can be pop (where a label is removed from the top of the stack), push (where another label is added to the label stack), or swap (where a label is replaced by another label). For VPNs, expect to see multiple push operations, corresponding to the inner and outer labels required for VPN routes (in the case of a direct PE-to-PE connection, the VPN route would have the inner label push only).

Sample Output

show route

```

user@host> show route
inet.0: 11 destinations, 12 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:65500:1:10.0.0.20/240
    *[MVPN/70] 19:53:41, metric2 1
        Indirect
1:65500:1:10.0.0.40/240
    *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30
        AS path: I
        > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
        [BGP/170] 19:53:26, localpref 100, from 10.0.0.33
        AS path: I
        > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
1:65500:1:10.0.0.60/240
    *[BGP/170] 19:53:29, localpref 100, from 10.0.0.30

```

```

AS path: I
> to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF
[BGP/170] 19:53:25, localpref 100, from 10.0.0.33
AS path: I
> to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF

```

show route

The following sample output shows a VPN route with composite next hops enabled. The first **Push** operation corresponds to the outer label. The second **Push** operation corresponds to the inner label.

```
user@host> show route 70.0.0.0
```

```

13979:665001.inet.0: 871 destinations, 3556 routes (871 active, 0 holddown, 0
hidden)
+ = Active Route, - = Last Active, * = Both

```

```

70.0.0.0/24      @[BGP/170] 00:28:32, localpref 100, from 10.9.9.160
                  AS path: 13980 ?, validation-state: unverified
                  > to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
                  [BGP/170] 00:28:28, localpref 100, from 10.9.9.169
                  AS path: 13980 ?, validation-state: unverified
                  > to 10.100.0.42 via ae2.0, Push 126016, Push 300368(top)
                  #[Multipath/255] 00:28:28, metric2 102
                  > to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
                  to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)

```

show route destination-prefix

```
user@host> show route 172.16.0.0/12
```

```

inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

172.16.0.0/12    *[Static/5] 2w4d 12:54:27
                  > to 192.168.167.254 via fxp0.0

```

show route extensive

```
user@host> show route extensive
```

```

v1.mvpn.0: 5 destinations, 8 routes (5 active, 1 holddown, 0 hidden)
1:65500:1:10.0.0.40/240 (1 entry, 1 announced)
  *BGP   Preference: 170/-101
    PMSI: Flags 0x0: Label[0:0:0]: PIM-SM: Sender 10.0.0.40 Group 225.1.1.1

    Next hop type: Indirect
    Address: 0x92455b8
    Next-hop reference count: 2
    Source: 10.0.0.30
    Protocol next hop: 10.0.0.40
    Indirect next hop: 2 no-forward
    State: <Active Int Ext>
      Local AS: 65500 Peer AS: 65500
    Age: 3 Metric2: 1
    Validation State: unverified
    Task: BGP_65500.10.0.0.30+179
    Announcement bits (2): 0-PIM.v1 1-mvpn global task
    AS path: I (Originator) Cluster list: 10.0.0.30
    AS path: Originator ID: 10.0.0.40
    Communities: target:65520:100

```

```
Import Accepted
Localpref: 100
Router ID: 10.0.0.30
Primary Routing Table bgp.mvpn.0
Indirect next hops: 1
  Protocol next hop: 10.0.0.40 Metric: 1
  Indirect next hop: 2 no-forward
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 10.0.24.4 via lt-0/3/0.24 weight 0x1
10.0.0.40/32 Originating RIB: inet.3
  Metric: 1 Node path count: 1
  Forwarding nexthops: 1
    Nexthop: 10.0.24.4 via lt-0/3/0.24
```

show route active-path

List of Syntax	Syntax on page 194 Syntax (EX Series Switches) on page 194
Syntax	<code>show route active-path</code> <code><brief detail extensive terse></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches)	<code>show route active-path</code> <code><brief detail extensive terse></code>
Release Information	Command introduced in Junos OS Release 8.0. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display all active routes for destinations. An active route is a route that is selected as the best path. Inactive routes are not displayed.
Options	none —Display all active routes. brief detail extensive terse —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief . logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route active-path on page 194 show route active-path brief on page 195 show route active-path detail on page 195 show route active-path extensive on page 196 show route active-path terse on page 198
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route active-path

```
user@host> show route active-path

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.70.19/32    *[Direct/0] 21:33:52
                  > via lo0.0
10.255.71.50/32   *[IS-IS/15] 00:18:13, metric 10
                  > to 100.1.2.1 via so-2/1/3.0
100.1.2.0/24      *[Direct/0] 00:18:36
                  > via so-2/1/3.0
```

```

100.1.2.2/32      *[Local/0] 00:18:41
                  Local via so-2/1/3.0
192.168.64.0/21  *[Direct/0] 21:33:52
                  > via fxp0.0
192.168.70.19/32 *[Local/0] 21:33:52
                  Local via fxp0.0

```

show route active-path brief

The output for the **show route active-path brief** command is identical to that for the **show route active-path** command. For sample output, see [show route active-path on page 194](#).

show route active-path detail

```

user@host> show route active-path detail

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)

10.255.70.19/32 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

10.255.71.50/32 (1 entry, 1 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 397
    Next-hop reference count: 4
    Next hop: 100.1.2.1 via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:31 Metric: 10
    Task: IS-IS
    Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
    AS path: I

100.1.2.0/24 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:54
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

100.1.2.2/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local

```

```

Next-hop reference count: 11
Interface: so-2/1/3.0
State: <Active NoReadvrt Int>
Local AS: 200
Age: 21:59
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

192.168.64.0/21 (1 entry, 1 announced)
*Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 3
Next hop: via fxp0.0, selected
State: <Active Int>
Local AS: 200
Age: 21:37:10
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

192.168.70.19/32 (1 entry, 1 announced)
*Local Preference: 0
Next hop type: Local
Next-hop reference count: 11
Interface: fxp0.0
State: <Active NoReadvrt Int>
Local AS: 200
Age: 21:37:10
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

```

show route active-path extensive

```

user@host> show route active-path extensive

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
10.255.70.19/32 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
*Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 3
Next hop: via lo0.0, selected
State: <Active Int>
Local AS: 200
Age: 21:39:47
Task: IF
Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

AS path: I

10.255.71.50/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.255.71.50/32 -> {100.1.2.1}
IS-IS level 2, LSP fragment 0
*IS-IS Preference: 15
Level: 1
Next hop type: Router, Next hop index: 397

```

```

Next-hop reference count: 4
Next hop: 100.1.2.1 via so-2/1/3.0, selected
State: <Active Int>
Local AS: 200
Age: 24:08 Metric: 10
Task: IS-IS
Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
AS path: I

100.1.2.0/24 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
*Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 3
Next hop: via so-2/1/3.0, selected
State: <Active Int>
Local AS: 200
Age: 24:31
Task: IF
Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
AS path: I

100.1.2.2/32 (1 entry, 1 announced)
*Local Preference: 0
Next hop type: Local
Next-hop reference count: 11
Interface: so-2/1/3.0
State: <Active NoReadvrt Int>
Local AS: 200
Age: 24:36
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

192.168.64.0/21 (1 entry, 1 announced)
*Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 3
Next hop: via fxp0.0, selected
State: <Active Int>
Local AS: 200
Age: 21:39:47
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

192.168.70.19/32 (1 entry, 1 announced)
*Local Preference: 0
Next hop type: Local
Next-hop reference count: 11
Interface: fxp0.0
State: <Active NoReadvrt Int>
Local AS: 200
Age: 21:39:47
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3

```

AS path: I

show route active-path terse

```
user@host> show route active-path terse
```

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.255.70.19/32	D	0			>1o0.0	
*	10.255.71.50/32	I	15	10		>100.1.2.1	
*	100.1.2.0/24	D	0			>so-2/1/3.0	
*	100.1.2.2/32	L	0			Local	
*	192.168.64.0/21	D	0			>fxp0.0	
*	192.168.70.19/32	L	0			Local	

show route all

List of Syntax	Syntax on page 199 Syntax (EX Series Switches) on page 199
Syntax	<pre>show route all <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switches)	show route all
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display information about all routes in all routing tables, including private, or internal, tables.
Options	<p>none—Display information about all routes in all routing tables, including private, or internal, tables.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
List of Sample Output	show route all on page 199
Output Fields	In Junos OS Release 9.5 and later, only the output fields for the show route all command display all routing tables, including private, or hidden, routing tables. The output field table of the show route command does not display entries for private, or hidden, routing tables in Junos OS Release 9.5 and later.

Sample Output

show route all

The following example displays a snippet of output from the **show route** command and then displays the same snippet of output from the **show route all** command:

```
user@host> show route
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
1          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
2          *[MPLS/0] 2d 02:24:39, metric 1
            Receive
800017     *[VPLS/7] 1d 14:00:16
            > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 14:00:26
            > via vt-3/2/0.32772, Pop
```

```
user@host> show route all
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
1          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
2          *[MPLS/0] 2d 02:19:12, metric 1
            Receive
800017     *[VPLS/7] 1d 13:54:49
            > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 13:54:59
            > via vt-3/2/0.32772, Pop
vt-3/2/0.32769 [VPLS/7] 1d 13:54:49
              Unusable
vt-3/2/0.32772 [VPLS/7] 1d 13:54:59
              Unusable
```

show route aspath-regex

List of Syntax	Syntax on page 201 Syntax (EX Series Switches) on page 201
Syntax	show route aspath-regex <i>regular-expression</i> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show route aspath-regex <i>regular-expression</i>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the entries in the routing table that match the specified autonomous system (AS) path regular expression.
Options	<p><i>regular-expression</i>—Regular expression that matches an entire AS path.</p> <p><i>logical-system</i> (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Additional Information	<p>You can specify a regular expression as:</p> <ul style="list-style-type: none"> • An individual AS number • A period wildcard used in place of an AS number • An AS path regular expression that is enclosed in parentheses <p>You also can include the operators described in the table of AS path regular expression operators in the <i>Junos Policy Framework Configuration Guide</i>. The following list summarizes these operators:</p> <ul style="list-style-type: none"> • {<i>m,n</i>}—At least <i>m</i> and at most <i>n</i> repetitions of the AS path term. • {<i>m</i>}—Exactly <i>m</i> repetitions of the AS path term. • {<i>m</i>,}—<i>m</i> or more repetitions of the AS path term. • *—Zero or more repetitions of an AS path term. • +—One or more repetitions of an AS path term. • ?—Zero or one repetition of an AS path term. • <i>aspath_term</i> <i>aspath_term</i>—Match one of the two AS path terms. <p>When you specify more than one AS number or path term, or when you include an operator in the regular expression, enclose the entire regular expression in quotation marks. For example, to match any path that contains AS number 234, specify the following command:</p> <pre>show route aspath-regex ". * 234 . *"</pre>

Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Using AS Path Regular Expressions</i>
List of Sample Output	show route aspath-regex (Matching a Specific AS Number) on page 202 show route aspath-regex (Matching Any Path with Two AS Numbers) on page 202
Output Fields	For information about output fields, see the output field table for the show route command.

Sample Output

show route aspath-regex (Matching a Specific AS Number)

```

user@host> show route aspath-regex 65477
inet.0: 46411 destinations, 46411 routes (46409 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

111.222.1.0/25      *[BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65488 65535}) IGP
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
111.222.1.128/25   *[IS-IS/15] 09:15:37, metric 37, tag 1
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
                   [BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65488 65535}) IGP
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
...

```

show route aspath-regex (Matching Any Path with Two AS Numbers)

```

user@host> show route aspath-regex ?.* 234 3561.*?

inet.0: 46351 destinations, 46351 routes (46349 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

9.20.0.0/17        *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 2685 2686 Incomplete
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
12.10.231.0/24     *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 5696 7369 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
24.64.32.0/19      *[BGP/170] 01:34:59, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 6327 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
...

```

show route best

List of Syntax	Syntax on page 203 Syntax (EX Series Switches) on page 203
Syntax	show route best <i>destination-prefix</i> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show route best <i>destination-prefix</i> <brief detail extensive terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the route in the routing table that is the best route to the specified address or range of addresses. The best route is the longest matching route.
Options	<p>brief detail extensive terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><i>destination-prefix</i>—Address or range of addresses.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
List of Sample Output	show route best on page 203 show route best detail on page 204 show route best extensive on page 205 show route best terse on page 205
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route best

```

user@host> show route best 10.255.70.103
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32    *[OSPF/10] 1d 13:19:20, metric 2
                  > to 10.31.1.6 via ge-3/1/0.0
                  via so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32    *[RSVP/7] 1d 13:20:13, metric 2

```

```

> via so-0/3/0.0, label-switched-path green-r1-r3

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.0.0.0/8          *[Direct/0] 2d 01:43:34
                    > via fxp2.0
                    [Direct/0] 2d 01:43:34
                    > via fxp1.0

```

show route best detail

```

user@host> show route best 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
  *OSPF   Preference: 10
          Next-hop reference count: 9
          Next hop: 10.31.1.6 via ge-3/1/0.0, selected
          Next hop: via so-0/3/0.0
          State: <Active Int>
          Local AS: 69
          Age: 1d 13:20:06      Metric: 2
          Area: 0.0.0.0
          Task: OSPF
          Announcement bits (2): 0-KRT 3-Resolve tree 2
          AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP   Preference: 7
          Next-hop reference count: 5
          Next hop: via so-0/3/0.0 weight 0x1, selected
          Label-switched-path green-r1-r3
          Label operation: Push 100016
          State: <Active Int>
          Local AS: 69
          Age: 1d 13:20:59      Metric: 2
          Task: RSVP
          Announcement bits (1): 1-Resolve tree 2
          AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
10.0.0.0/8 (2 entries, 0 announced)
  *Direct Preference: 0
          Next hop type: Interface
          Next-hop reference count: 1
          Next hop: via fxp2.0, selected
          State: <Active Int>
          Age: 2d 1:44:20
          Task: IF
          AS path: I
  Direct Preference: 0
          Next hop type: Interface
          Next-hop reference count: 1
          Next hop: via fxp1.0, selected
          State: <NotBest Int>
          Inactive reason: No difference
          Age: 2d 1:44:20

```

Task: IF
AS path: I

show route best extensive

The output for the **show route best extensive** command is identical to that for the **show route best detail** command. For sample output, see [show route best detail on page 204](#).

show route best terse

```
user@host> show route best 10.255.70.103 terse
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  0  10           2           >10.31.1.6
                                     so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  R   7           2           >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.0.0.0/8        D   0           0           >fxp2.0
                    D   0           0           >fxp1.0
```

show route brief

List of Syntax	Syntax on page 206 Syntax (EX Series Switches) on page 206
Syntax	show route brief <destination-prefix> <logical-system (all logical-system-name)>
Syntax (EX Series Switches)	show route brief <destination-prefix>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display brief information about the active entries in the routing tables.
Options	none —Display all active entries in the routing table. destination-prefix —(Optional) Display active entries for the specified address or range of addresses. logical-system (all logical-system-name) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route brief on page 206
Output Fields	For information about output fields, see the Output Field table of the show route command.

Sample Output

show route brief

```

user@host> show route brief
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 1w5d 20:30:29
                   Discard
10.255.245.51/32   *[Direct/0] 2w4d 13:11:14
                   > via lo0.0
172.16.0.0/12      *[Static/5] 2w4d 13:11:14
                   > to 192.168.167.254 via fxp0.0
192.168.0.0/18     *[Static/5] 1w5d 20:30:29
                   > to 192.168.167.254 via fxp0.0
192.168.40.0/22    *[Static/5] 2w4d 13:11:14
                   > to 192.168.167.254 via fxp0.0
192.168.64.0/18    *[Static/5] 2w4d 13:11:14
                   > to 192.168.167.254 via fxp0.0
192.168.164.0/22   *[Direct/0] 2w4d 13:11:14
                   > via fxp0.0

```



```
192.168.164.51/32 *[Local/0] 2w4d 13:11:14
                  Local via fxp0.0
207.17.136.192/32 *[Static/5] 2w4d 13:11:14
                  > to 192.168.167.254 via fxp0.0
green.inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
100.101.0.0/16    *[Direct/0] 1w5d 20:30:28
                  > via fe-0/0/3.0
100.101.2.3/32   *[Local/0] 1w5d 20:30:28
                  Local via fe-0/0/3.0
224.0.0.5/32     *[OSPF/10] 1w5d 20:30:29, metric 1
                  MultiRecv
```

show route community

List of Syntax	Syntax on page 208 Syntax (EX Series Switches) on page 208
Syntax	<code>show route community <i>as-number:community-value</i></code> <code><brief detail extensive terse></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches)	<code>show route community <i>as-number:community-value</i></code> <code><brief detail extensive terse></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community.
Options	<p><i>as-number:community-value</i>—One or more community identifiers. <i>as-number</i> is the AS number, and <i>community-value</i> is the community identifier. When you specify more than one community identifier, enclose the identifiers in double quotation marks. Community identifiers can include wildcards.</p> <p>brief detail extensive terse—(Optional) Display the specified level of output.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Additional Information	Specifying the community option displays all routes matching the community found within the routing table. The community option does not limit the output to only the routes being advertised to the neighbor after any egress routing policy.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• show route detail on page 217
List of Sample Output	show route community on page 208
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route community

```
user@host> show route community 234:80
inet.0: 46511 destinations, 46511 routes (46509 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
4.0.0.0/8      *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                AS Path: {666} 234 2548 1 IGP
                to 192.156.169.1 via 192.156.169.14(so-0/0/0)
6.0.0.0/8      *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                AS Path: {666} 234 2548 568 721 Incomplete
                to 192.156.169.1 via 192.156.169.14(so-0/0/0)
9.2.0.0/16     *[BGP/170] 03:33:06, localpref 100, from 131.103.20.49
                AS Path: {666} 234 2548 1673 1675 1747 IGP
                to 192.156.169.1 via 192.156.169.14(so-0/0/0)
```

show route community-name

List of Syntax	Syntax on page 210 Syntax (EX Series Switches) on page 210
Syntax	show route community-name <i>community-name</i> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show route community-name <i>community-name</i> <brief detail extensive terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community, specified by a community name.
Options	<i>community-name</i> —Name of the community. brief detail extensive terse —(Optional) Display the specified level of output. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route community-name on page 210
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route community-name

```

user@host> show route community-name red-com
inet.0: 17 destinations, 17 routes (16 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

instance1.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.212/32  *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                  AS path: 300 I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
20.20.20.20/32    *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                  AS path: I
                  > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
100.1.4.0/24     *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204

```

```

AS path: I
> to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.204:10:10.255.245.212/32
*[BGP/170] 00:06:40, localpref 100, from 10.255.245.204
AS path: 300 I
> to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:20.20.20.20/32
*[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
AS path: I
> to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:100.1.4.0/24
*[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
AS path: I
> to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

instance1.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

show route damping

List of Syntax	Syntax on page 212 Syntax (EX Series Switch and QFX Series) on page 212
Syntax	<code>show route damping (decayed history suppressed)</code> <code><brief detail extensive terse></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switch and QFX Series)	<code>show route damping (decayed history suppressed)</code> <code><brief detail extensive terse></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display the BGP routes for which updates might have been reduced because of route flap damping.
Options	brief detail extensive terse —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief. decayed —Display route damping entries that might no longer be valid, but are not suppressed. history —Display entries that have already been withdrawn, but have been logged. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system. suppressed —Display entries that have been suppressed and are no longer being installed into the forwarding table or exported by routing protocols.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• clear bgp damping• show policy damping
List of Sample Output	show route damping decayed detail on page 215 show route damping history on page 216 show route damping history detail on page 216
Output Fields	Table 19 on page 213 lists the output fields for the show route damping command. Output fields are listed in the approximate order in which they appear.

Table 19: show route damping Output Fields

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table—for example, inet.0 .	All levels
destinations	Number of destinations for which there are routes in the routing table.	All levels
number routes	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> • active • holdddown (routes that are in a pending state before being declared inactive) • hidden (the routes are not used because of a routing policy) 	All levels
destination-prefix (entry, announced)	Destination prefix. The entry value is the number of routes for this destination, and the announced value is the number of routes being announced for this destination.	detail extensive
[protocol, preference]	Protocol from which the route was learned and the preference value for the route. <ul style="list-style-type: none"> • +—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • -—A hyphen indicates the last active route. • *—An asterisk indicates that the route is both the active and the last active route. An asterisk before a to line indicates the best subpath to the route. <p>In every routing metric except for the BGP LocalPref attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the LocalPref value in the Preference2 field. For example, if the LocalPref value for Route 1 is 100, the Preference2 value is -101. If the LocalPref value for Route 2 is 155, the Preference2 value is -156. Route 2 is preferred because it has a higher LocalPref value and a lower Preference2 value.</p>	All levels
Next-hop reference count	Number of references made to the next hop.	detail extensive
Source	IP address of the route source.	detail extensive
Next hop	Network layer address of the directly reachable neighboring system.	detail extensive
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word Selected .	detail extensive
Protocol next hop	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.	detail extensive
Indirect next hop	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.	detail extensive
State	Flags for this route. For a description of possible values for this field, see the output field table for the show route detail command.	detail extensive

Table 19: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
Local AS	AS number of the local routing device.	detail extensive
Peer AS	AS number of the peer routing device.	detail extensive
Age	How long the route has been known.	detail extensive
Metric	Metric for the route.	detail extensive
Task	Name of the protocol that has added the route.	detail extensive
Announcement bits	List of protocols that announce this route. <i>n-Resolve inet</i> indicates that the route is used for route resolution for next hops found in the routing table. <i>n</i> is an index used by Juniper Networks customer support only.	detail extensive
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> • I—IGP. • E—EGP. • ?—Incomplete; typically, the AS path was aggregated. <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> • []—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device or if AS path prepending is configured. • { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • ()—Parentheses enclose a confederation. • ([])—Parentheses and brackets enclose a confederation set. <p>NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>	All levels
to	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	brief none
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word Selected .	brief none
Communities	Community path attribute for the route. See the output field table for the show route detail command.	detail extensive
Localpref	Local preference value included in the route.	All levels
Router ID	BGP router ID as advertised by the neighbor in the open message.	detail extensive

Table 19: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
Merit (last update/now)	Last updated and current figure-of-merit value.	detail extensive
damping-parameters	Name that identifies the damping parameters used, which is defined in the damping statement at the [edit policy-options] hierarchy level.	detail extensive
Last update	Time of most recent change in path attributes.	detail extensive
First update	Time of first change in path attributes, which started the route damping process.	detail extensive
Flaps	Number of times the route has gone up or down or its path attributes have changed.	detail extensive
Suppressed	(suppressed keyword only) This route is currently suppressed. A suppressed route does not appear in the forwarding table and routing protocols do not export it.	All levels
Reusable in	(suppressed keyword only) Time when a suppressed route will again be available.	All levels
Preference will be	(suppressed keyword only) Preference value that will be applied to the route when it is again active.	All levels

Sample Output

show route damping decayed detail

```

user@host> show route damping decayed detail
inet.0: 173319 destinations, 1533668 routes (172625 active, 4 holddown, 108083
hidden)
10.0.111.0/24 (7 entries, 1 announced)
  *BGP      Preference: 170/-101
            Next-hop reference count: 151973
            Source: 172.23.2.129
            Next hop: via so-1/2/0.0
            Next hop: via so-5/1/0.0, selected
            Next hop: via so-6/0/0.0
            Protocol next hop: 172.23.2.129
            Indirect next hop: 89a1a00 264185
            State: <Active Ext>
            Local AS: 65000 Peer AS: 65490
            Age: 3:28      Metric2: 0
            Task: BGP_65490.172.23.2.129+179
            Announcement bits (6): 0-KRT 1-RT 4-KRT 5-BGP.0.0.0.0+179

  6-Resolve tree 2 7-Resolve tree 3
    AS path: 65490 65520 65525 65525 65525 65525 I ()
    Communities: 65501:390 65501:2000 65501:3000 65504:701
    Localpref: 100
    Router ID: 172.23.2.129
    Merit (last update/now): 1934/1790
    damping-parameters: damping-high

```

```
Last update:      00:03:28 First update:      00:06:40
Flaps: 2
```

show route damping history

```
user@host> show route damping history
inet.0: 173320 destinations, 1533529 routes (172624 active, 6 holddown, 108122
hidden)
+ = Active Route, - = Last Active, * = Both

10.108.0.0/15      [BGP ] 2d 22:47:58, localpref 100
                  AS path: 65220 65501 65502 I
                  > to 192.168.60.85 via so-3/1/0.0
```

show route damping history detail

```
user@host> show route damping history detail
inet.0: 173319 destinations, 1533435 routes (172627 active, 2 holddown, 108105
hidden)
10.108.0.0/15 (3 entries, 1 announced)
    BGP                /-101
        Next-hop reference count: 69058
        Source: 192.168.60.85
        Next hop: 192.168.60.85 via so-3/1/0.0, selected
        State: <Hidden Ext>
        Inactive reason: Unusable path
        Local AS: 65000 Peer AS: 65220
        Age: 2d 22:48:10
        Task: BGP_65220.192.168.60.85+179
        AS path: 65220 65501 65502 I ()
        Communities: 65501:390 65501:2000 65501:3000 65504:3561
        Localpref: 100
        Router ID: 192.168.80.25
        Merit (last update/now): 1000/932
        damping-parameters: set-normal
        Last update:      00:01:05 First update:      00:01:05
        Flaps: 1
```

show route detail

List of Syntax	Syntax on page 217 Syntax (EX Series Switches) on page 217
Syntax	show route detail <destination-prefix> <logical-system (all logical-system-name)>
Syntax (EX Series Switches)	show route detail <destination-prefix>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 13.2X51-D15 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display detailed information about the active entries in the routing tables.
Options	none —Display all active entries in the routing table on all systems. destination-prefix —(Optional) Display active entries for the specified address or range of addresses. logical-system (all logical-system-name) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route detail on page 226 show route detail (with BGP Multipath) on page 232 show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 232 show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 233
Output Fields	Table 20 on page 217 describes the output fields for the show route detail command. Output fields are listed in the approximate order in which they appear.

Table 20: show route detail Output Fields

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> active (routes that are active) holddown (routes that are in the pending state before being declared inactive) hidden (routes that are not used because of a routing policy)

Table 20: show route detail Output Fields (*continued*)

Field Name	Field Description
<i>route-destination</i> (entry, announced)	<p>Route destination (for example:10.0.0.1/24). The entry value is the number of routes for this destination, and the announced value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> • MPLS-label (for example, 80001). • interface-name (for example, ge-1/0/2). • neighbor-address:control-word-status:encapsulation type:vc-id:source (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> • neighbor-address—Address of the neighbor. • control-word-status—Whether the use of the control word has been negotiated for this virtual circuit: NoCtrlWord or CtrlWord. • encapsulation type—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport. • vc-id—Virtual circuit identifier. • source—Source of the advertisement: Local or Remote.
label stacking	<p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> • S=0 route indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed). • If there is no S= information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).
<i>[protocol, preference]</i>	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> • +—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • - —A hyphen indicates the last active route. • *—An asterisk indicates that the route is both the active and the last active route. An asterisk before a to line indicates the best subpath to the route. <p>In every routing metric except for the BGP LocalPref attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the LocalPref value in the Preference2 field. For example, if the LocalPref value for Route 1 is 100, the Preference2 value is -101. If the LocalPref value for Route 2 is 155, the Preference2 value is -156. Route 2 is preferred because it has a higher LocalPref value and a lower Preference2 value.</p>
Level	<p>(IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.</p>
Route Distinguisher	IP subnet augmented with a 64-bit prefix.
PMSI	Provider multicast service interface (MVPN routing table).
Next-hop type	Type of next hop. For a description of possible values for this field, see Table 21 on page 222 .

Table 20: show route detail Output Fields (*continued*)

Field Name	Field Description
Next-hop reference count	Number of references made to the next hop.
Flood nexthop branches exceed maximum message	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
Source	IP address of the route source.
Next hop	Network layer address of the directly reachable neighboring system.
via	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word Selected. This field can also contain the following information:</p> <ul style="list-style-type: none"> • Weight—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible. • Balance—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.
Label-switched-path lsp-path-name	Name of the LSP used to reach the next hop.
Label operation	MPLS label and operation occurring at this routing device. The operation can be pop (where a label is removed from the top of the stack), push (where another label is added to the label stack), or swap (where a label is replaced by another label).
Interface	(Local only) Local interface name.
Protocol next hop	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.
Indirect next hop	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.
State	State of the route (a route can be in more than one state). See Table 22 on page 223 .
Local AS	AS number of the local routing device.
Age	How long the route has been known.
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.
Metricn	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.

Table 20: show route detail Output Fields (*continued*)

Field Name	Field Description
MED-plus-IGP	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
TTL-Action	<p>For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.</p> <p>For sample output, see show route table.</p>
Task	Name of the protocol that has added the route.
Announcement bits	List of protocols that announce this route. n-Resolve inet indicates that the route is used for route resolution for next hops found in the routing table. n is an index used by Juniper Networks customer support only.
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> • I—IGP. • E—EGP. • Recorded—The AS path is recorded by the sample process (sampled). • ?—Incomplete; typically, the AS path was aggregated. <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> • []—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893. • []—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path. • { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • ()—Parentheses enclose a confederation. • ([])—Parentheses and brackets enclose a confederation set. <p>NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
validation-state	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> • Invalid—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database. • Unknown—Indicates that the prefix is not among the prefixes or prefix ranges in the database. • Unverified—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers. • Valid—Indicates that the prefix and autonomous system pair are found in the database.
FECs bound to route	Point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.

Table 20: show route detail Output Fields (*continued*)

Field Name	Field Description
Primary Upstream	When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.
RPF Nexthops	When multipoint LDP with MoFRR is configured, the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.
Label	Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.
weight	Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See Table 23 on page 225 for all possible values for this field.
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).
control flags	Control flags: none or Site Down .
mtu	Maximum transmission unit (MTU) information.
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
status vector	Layer 2 VPN and VPLS network layer reachability information (NLRI).
Accepted Multipath	Current active path when BGP multipath is configured.
Accepted MultipathContrib	Path currently contributing to BGP multipath.
Localpref	Local preference value included in the route.
Router ID	BGP router ID as advertised by the neighbor in the open message.
Primary Routing Table	In a routing table group, the name of the primary routing table in which the route resides.
Secondary Tables	In a routing table group, the name of one or more secondary tables in which the route resides.

Table 21 on page 222 describes all possible values for the Next-hop Types output field.

Table 21: Next-hop Types Output Field Values

Next-Hop Type	Description
Broadcast (bcast)	Broadcast next hop.
Deny	Deny next hop.
Discard	Discard next hop.
Flood	Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast.
Hold	Next hop is waiting to be resolved into a unicast or multicast type.
Indexed (idxd)	Indexed next hop.
Indirect (indr)	Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.
Interface	Used for a network address assigned to an interface. Unlike the router next hop, the interface next hop does not reference any specific node on the network.
Local (locl)	Local address on an interface. This next-hop type causes packets with this destination address to be received locally.
Multicast (mcst)	Wire multicast next hop (limited to the LAN).
Multicast discard (mdsc)	Multicast discard.
Multicast group (mgrp)	Multicast group member.
Receive (recv)	Receive.
Reject (rjct)	Discard. An ICMP unreachable message was sent.
Resolve (rslv)	Resolving next hop.
Routed multicast (mcrt)	Regular multicast next hop.

Table 21: Next-hop Types Output Field Values (*continued*)

Next-Hop Type	Description
Router	<p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> • Must not be a direct or local subnet for the routing device. • Must have a next hop that is directly connected to the routing device.
Table	Routing table next hop.
Unicast (ucst)	Unicast.
Unilist (ulst)	List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.

Table 22 on page 223 describes all possible values for the State output field. A route can be in more than one state (for example, <**Active NoReadvrt Int Ext**>).

Table 22: State Output Field Values

Value	Description
Accounting	Route needs accounting.
Active	Route is active.
Always Compare MED	Path with a lower multiple exit discriminator (MED) is available.
AS path	Shorter AS path is available.
Cisco Non-deterministic MED selection	Cisco nondeterministic MED is enabled, and a path with a lower MED is available.
Clone	Route is a clone.
Cluster list length	Length of cluster list sent by the route reflector.
Delete	Route has been deleted.
Ex	Exterior route.
Ext	BGP route received from an external BGP neighbor.

Table 22: State Output Field Values (*continued*)

Value	Description
FlashAll	Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes.
Hidden	Route not used because of routing policy.
IfCheck	Route needs forwarding RPF check.
IGP metric	Path through next hop with lower IGP metric is available.
Inactive reason	Flags for this route, which was not selected as best for a particular destination.
Initial	Route being added.
Int	Interior route.
Int Ext	BGP route received from an internal BGP peer or a BGP confederation peer.
Interior > Exterior > Exterior via Interior	Direct, static, IGP, or EBGP path is available.
Local Preference	Path with a higher local preference value is available.
Martian	Route is a martian (ignored because it is obviously invalid).
MartianOK	Route exempt from martian filtering.
Next hop address	Path with lower metric next hop is available.
No difference	Path from neighbor with lower IP address is available.
NoReadvrt	Route not to be advertised.
NotBest	Route not chosen because it does not have the lowest MED.
Not Best in its group	Incoming BGP AS is not the best of a group (only one AS can be the best).
NotInstall	Route not to be installed in the forwarding table.
Number of gateways	Path with a greater number of next hops is available.
Origin	Path with a lower origin code is available.
Pending	Route pending because of a hold-down configured on another route.

Table 22: State Output Field Values (*continued*)

Value	Description
Release	Route scheduled for release.
RIB preference	Route from a higher-numbered routing table is available.
Route Distinguisher	64-bit prefix added to IP subnets to make them unique.
Route Metric or MED comparison	Route with a lower metric or MED is available.
Route Preference	Route with lower preference value is available
Router ID	Path through a neighbor with lower ID is available.
Secondary	Route not a primary route.
Unusable path	Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> • The route is damped. • The route is rejected by an import policy. • The route is unresolved.
Update source	Last tiebreaker is the lowest IP address value.

Table 23 on page 225 describes the possible values for the Communities output field.

Table 23: Communities Output Field Values

Value	Description
<i>area-number</i>	4 bytes, encoding a 32-bit area number. For AS-external routes, the value is 0. A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.
bandwidth: local AS number:link-bandwidth-number	Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute.
domain-id	Unique configurable number that identifies the OSPF domain.
domain-id-vendor	Unique configurable number that further identifies the OSPF domain.
<i>link-bandwidth-number</i>	Link-bandwidth number: from 0 through 4,294,967,295 (bytes per second).
<i>local AS number</i>	Local AS number: from 1 through 65,535.
<i>options</i>	1 byte. Currently this is only used if the route type is 5 or 7. Setting the least significant bit in the field indicates that the route carries a type 2 metric.

Table 23: Communities Output Field Values (*continued*)

Value	Description
origin	(Used with VPNs) Identifies where the route came from.
ospf-route-type	1 byte, encoded as 1 or 2 for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); 3 for summary routes; 5 for external routes (area number must be 0); 7 for NSSA routes; or 129 for sham link endpoint addresses.
route-type-vendor	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x8000 . The format is area-number:ospf-route-type:options .
rte-type	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x0306 . The format is area-number:ospf-route-type:options .
target	Defines which VPN the route participates in; target has the format 32-bit IP address:16-bit number . For example, 10.19.0.0:100.
unknown IANA	Incoming IANA codes with a value between 0x1 and 0x7fff . This code of the BGP extended community attribute is accepted, but it is not recognized.
unknown OSPF vendor community	Incoming IANA codes with a value above 0x8000 . This code of the BGP extended community attribute is accepted, but it is not recognized.

Sample Output

show route detail

```

user@host> show route detail

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:31:43
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

10.31.1.0/30 (2 entries, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 2
    Next hop: via so-0/3/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:30:17
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I
  OSPF Preference: 10

```

```

Next-hop reference count: 1
Next hop: via so-0/3/0.0, selected
State: <Int>
Inactive reason: Route Preference
Local AS: 69
Age: 1:30:17 Metric: 1
Area: 0.0.0.0
Task: OSPF
AS path: I

10.31.1.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 7
    Interface: so-0/3/0.0
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:30:20
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I

...

10.31.2.0/30 (1 entry, 1 announced)
  *OSPF Preference: 10
    Next-hop reference count: 9
    Next hop: via so-0/3/0.0
    Next hop: 10.31.1.6 via ge-3/1/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:29:56 Metric: 2
    Area: 0.0.0.0
    Task: OSPF
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

...

224.0.0.2/32 (1 entry, 1 announced)
  *PIM Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:45
    Task: PIM Recv
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

...

224.0.0.22/32 (1 entry, 1 announced)
  *IGMP Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:43
    Task: IGMP
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

```

```

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
    Next-hop reference count: 6
    Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
    Label-switched-path green-r1-r3
    Label operation: Push 100096
    State: <Active Int>
    Local AS: 69
    Age: 1:25:49 Metric: 2
    Task: RSVP
    Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
    AS path: I

10.255.71.238/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
    Next-hop reference count: 6
    Next hop: via so-0/3/0.0 weight 0x1, selected
    Label-switched-path green-r1-r2
    State: <Active Int>
    Local AS: 69
    Age: 1:25:49 Metric: 1
    Task: RSVP
    Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
    AS path: I

private__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:31:44
    Task: IF
    AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
0 (1 entry, 1 announced)
  *MPLS Preference: 0
    Next hop type: Receive
    Next-hop reference count: 6
    State: <Active Int>
    Local AS: 69
    Age: 1:31:45 Metric: 1
    Task: MPLS
    Announcement bits (1): 0-KRT
    AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

299840 (1 entry, 1 announced)

```

```

TSI:
KRT in-kerne 299840 /52 -> {indirect(1048575)}
    *RSVP   Preference: 7/2
            Next hop type: Flood
            Address: 0x9174a30
            Next-hop reference count: 4
            Next hop type: Router, Next hop index: 798
            Address: 0x9174c28
            Next-hop reference count: 2
            Next hop: 8.0.0.2 via lt-1/2/0.9 weight 0x1
            Label-switched-path R2-to-R4-2p2mp
            Label operation: Pop
            Next hop type: Router, Next hop index: 1048574
            Address: 0x92544f0
            Next-hop reference count: 2
            Next hop: 7.0.0.2 via lt-1/2/0.7 weight 0x1
            Label-switched-path R2-to-R200-p2mp
            Label operation: Pop
            Next hop: 6.0.0.2 via lt-1/2/0.5 weight 0x8001
            Label operation: Pop
            State: <Active Int>
            Age: 1:29      Metric: 1
            Task: RSVP
            Announcement bits (1): 0-KRT
            AS path: I...

800010 (1 entry, 1 announced)
    *VPLS   Preference: 7
            Next-hop reference count: 2
            Next hop: via vt-3/2/0.32769, selected
            Label operation: Pop
            State: <Active Int>
            Age: 1:29:30
            Task: Common L2 VC
            Announcement bits (1): 0-KRT
            AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
    *VPLS   Preference: 7
            Next-hop reference count: 2
            Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
            Label-switched-path green-r1-r3
            Label operation: Push 800012, Push 100096(top)
            Protocol next hop: 10.255.70.103
            Push 800012
            Indirect next hop: 87272e4 1048574
            State: <Active Int>
            Age: 1:29:30   Metric2: 2
            Task: Common L2 VC
            Announcement bits (2): 0-KRT 1-Common L2 VC
            AS path: I
            Communities: target:11111:1 Layer2-info: encaps:VPLS,
            control flags:, mtu: 0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
    *Direct Preference: 0
            Next hop type: Interface
            Next-hop reference count: 1
            Next hop: via lo0.0, selected

```

```
State: <Active Int>
Local AS: 69
Age: 1:31:44
Task: IF
AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
*Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 1
Next hop: via lo0.0, selected
State: <Active NoReadvrt Int>
Local AS: 69
Age: 1:31:44
Task: IF
AS path: I

ff02::2/128 (1 entry, 1 announced)
*PIM Preference: 0
Next-hop reference count: 18
State: <Active NoReadvrt Int>
Local AS: 69
Age: 1:31:45
Task: PIM Recv6
Announcement bits (1): 0-KRT
AS path: I

ff02::d/128 (1 entry, 1 announced)
*PIM Preference: 0
Next-hop reference count: 18
State: <Active NoReadvrt Int>
Local AS: 69
Age: 1:31:45
Task: PIM Recv6
Announcement bits (1): 0-KRT
AS path: I

ff02::16/128 (1 entry, 1 announced)
*MLD Preference: 0
Next-hop reference count: 18
State: <Active NoReadvrt Int>
Local AS: 69
Age: 1:31:43
Task: MLD
Announcement bits (1): 0-KRT
AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
*Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 1
Next hop: via lo0.16385, selected
State: <Active NoReadvrt Int>
Age: 1:31:44
Task: IF
AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
```



```

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP   Preference: 170/-101
        Route Distinguisher: 10.255.70.103:1
        Next-hop reference count: 7
        Source: 10.255.70.103
        Protocol next hop: 10.255.70.103
        Indirect next hop: 2 no-forward
        State: <Secondary Active Int Ext>
        Local AS: 69 Peer AS: 69
        Age: 1:25:49 Metric2: 1
        AIGP 210
        Task: BGP_69.10.255.70.103+179
        Announcement bits (1): 0-green-l2vpn
        AS path: I
        Communities: target:11111:1 Layer2-info: encaps:VPLS,
        control flags:, mtu: 0
        Label-base: 800008, range: 8
        Localpref: 100
        Router ID: 10.255.70.103
        Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-1
        Next-hop reference count: 5
        Protocol next hop: 10.255.71.52
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:31:40 Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
        mtu: 0
        Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-101
        Next-hop reference count: 5
        Protocol next hop: 10.255.71.52
        Indirect next hop: 0 -
        State: <Active Int Ext>
        Age: 1:31:40 Metric2: 1
        Task: green-l2vpn
        Announcement bits (1): 1-BGP.0.0.0.0+179
        AS path: I
        Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
        Label-base: 800008, range: 8, status-vector: 0x9F

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
        Next hop: via so-1/1/2.0 weight 1, selected
        Label-switched-path my-lsp
        Label operation: Push 100000[0]
        Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
        State: <Active Int>
        Local AS: 99
        Age: 10:21
        Task: l2 circuit

```

```

Announcement bits (1): 0-LDP
AS path: I
VC Label 100000, MTU 1500, VLAN ID 512

```

show route detail (with BGP Multipath)

```

user@host> show route detail

10.1.1.8/30 (2 entries, 1 announced)
  *BGP    Preference: 170/-101
          Next hop type: Router, Next hop index: 262142
          Address: 0x901a010
          Next-hop reference count: 2
          Source: 10.1.1.2
          Next hop: 10.1.1.2 via ge-0/3/0.1, selected
          Next hop: 10.1.1.6 via ge-0/3/0.5
          State: <Active Ext>
          Local AS:      1 Peer AS:      2
          Age: 5:04:43
          Validation State: unverified
          Task: BGP_2.10.1.1.2+59955
          Announcement bits (1): 0-KRT
          AS path: 2 I
          Accepted Multipath
          Localpref: 100
          Router ID: 1.1.1.2
  BGP    Preference: 170/-101
          Next hop type: Router, Next hop index: 678
          Address: 0x8f97520
          Next-hop reference count: 9
          Source: 10.1.1.6
          Next hop: 10.1.1.6 via ge-0/3/0.5, selected
          State: <NotBest Ext>
          Inactive reason: Not Best in its group - Active preferred
          Local AS:      1 Peer AS:      2
          Age: 5:04:43
          Validation State: unverified
          Task: BGP_2.10.1.1.6+58198
          AS path: 2 I
          Accepted MultipathContrib
          Localpref: 100
          Router ID: 1.1.1.3

```

show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```

user@host> show route label 299872 detail
mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
  *LDP    Preference: 9
          Next hop type: Flood
          Next-hop reference count: 3
          Address: 0x9097d90
          Next hop: via vt-0/1/0.1
          Next-hop index: 661
          Label operation: Pop
          Address: 0x9172130
          Next hop: via so-0/0/3.0
          Next-hop index: 654
          Label operation: Swap 299872
          State: **Active Int>
          Local AS: 1001

```

```

Age: 8:20      Metric: 1
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 10.255.72.166, grp 232.1.1.1,
src 192.168.142.2

```

show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```
user@host> show route label 301568 detail
```

```

mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
  *LDP   Preference: 9
    Next hop type: Flood
    Address: 0x2735208
    Next-hop reference count: 3
    Next hop type: Router, Next hop index: 1397
    Address: 0x2735d2c
    Next-hop reference count: 3
    Next hop: 1.3.8.2 via ge-1/2/22.0
    Label operation: Pop
    Load balance label: None;
    Next hop type: Router, Next hop index: 1395
    Address: 0x2736290
    Next-hop reference count: 3
    Next hop: 1.3.4.2 via ge-1/2/18.0
    Label operation: Pop
    Load balance label: None;
    State: <Active Int AckRequest MulticastRPF>
    Local AS: 10
    Age: 54:05      Metric: 1
    Validation State: unverified
    Task: LDP
    Announcement bits (1): 0-KRT
    AS path: I
    FECs bound to route: P2MP root-addr 1.1.1.1, grp: 232.1.1.1, src:
192.168.219.11
      Primary Upstream : 1.1.1.3:0--1.1.1.2:0
        RPF Nexthops :
          ge-1/2/15.0, 1.2.94.1, Label: 301568, weight: 0x1
          ge-1/2/14.0, 1.2.3.1, Label: 301568, weight: 0x1
      Backup Upstream : 1.1.1.3:0--1.1.1.6:0
        RPF Nexthops :
          ge-1/2/20.0, 1.2.96.1, Label: 301584, weight: 0xffffe
          ge-1/2/19.0, 1.3.6.1, Label: 301584, weight: 0xffffe

```

show route exact

List of Syntax	Syntax on page 234 Syntax (EX Series Switches) on page 234
Syntax	<code>show route exact <i>destination-prefix</i></code> <code><brief detail extensive terse></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches)	<code>show route exact <i>destination-prefix</i></code> <code><brief detail extensive terse></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display only the routes that exactly match the specified address or range of addresses.
Options	brief detail extensive terse —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief . <i>destination-prefix</i> —Address or range of addresses. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route exact on page 234 show route exact detail on page 234 show route exact extensive on page 235 show route exact terse on page 235
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route exact

```
user@host> show route exact 207.17.136.0/24

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
207.17.136.0/24    *[Static/5] 2d 03:30:22
                  > to 192.168.71.254 via fxp0.0
```

show route exact detail

```
user@host> show route exact 207.17.136.0/24 detail

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
```

```
Restart Complete
207.17.136.0/24 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2d 3:30:26
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I
```

show route exact extensive

```
user@host> show route exact 207.17.136.0/24 extensive
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:25:18
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I
```

show route exact terse

```
user@host> show route exact 207.17.136.0/24 terse

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 207.17.136.0/24  S   5                >192.168.71.254
```

show route export

List of Syntax	Syntax on page 236 Syntax (EX Series Switches) on page 236
Syntax	<pre>show route export <brief detail> <instance <instance-name> routing-table-name> <logical-system (all logical-system-name)></pre>
Syntax (EX Series Switches)	<pre>show route export <brief detail> <instance <instance-name> routing-table-name></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display policy-based route export information. Policy-based export simplifies the process of exchanging route information between routing instances.
Options	<p>none—(Same as brief.) Display standard information about policy-based export for all instances and routing tables on all systems.</p> <p>brief detail—(Optional) Display the specified level of output.</p> <p>instance <instance-name>—(Optional) Display a particular routing instance for which policy-based export is currently enabled.</p> <p>logical-system (all logical-system-name)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>routing-table-name—(Optional) Display information about policy-based export for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the show route export inet command).</p>
Required Privilege Level	view
List of Sample Output	show route export on page 237 show route export detail on page 237 show route export instance detail on page 237
Output Fields	Table 24 on page 236 lists the output fields for the show route export command. Output fields are listed in the approximate order in which they appear.

Table 24: show route export Output Fields

Field Name	Field Description	Level of Output
Table or <i>table-name</i>	Name of the routing tables that either import or export routes.	All levels
Routes	Number of routes exported from this table into other tables. If a particular route is exported to different tables, the counter will only increment by one.	brief none

Table 24: show route export Output Fields (*continued*)

Field Name	Field Description	Level of Output
Export	Whether the table is currently exporting routes to other tables: Y or N (Yes or No).	brief none
Import	Tables currently importing routes from the originator table. (Not displayed for tables that are not exporting any routes.)	detail
Flags	(instance keyword only) Flags for this feature on this instance: <ul style="list-style-type: none"> config auto-policy—The policy was deduced from the configured IGP export policies. cleanup—Configuration information for this instance is no longer valid. config—The instance was explicitly configured. 	detail
Options	(instance keyword only) Configured option displays the type of routing tables the feature handles: <ul style="list-style-type: none"> unicast—Indicates <i>instance.inet.0</i>. multicast—Indicates <i>instance.inet.2</i>. unicast multicast—Indicates <i>instance.inet.0</i> and <i>instance.inet.2</i>. 	detail
Import policy	(instance keyword only) Policy that route export uses to construct the import-export matrix. Not displayed if the instance type is vrf .	detail
Instance	(instance keyword only) Name of the routing instance.	detail
Type	(instance keyword only) Type of routing instance: forwarding , non-forwarding , or vrf .	detail

Sample Output

show route export

```

user@host> show route export
Table      Export      Routes
inet.0     N            0
black.inet.0 Y           3
red.inet.0 Y            4

```

show route export detail

```

user@host> show route export detail
inet.0                                Routes:      0
black.inet.0                          Routes:      3
  Import: [ inet.0 ]
red.inet.0                             Routes:      4
  Import: [ inet.0 ]

```

show route export instance detail

```

user@host> show route export instance detail
Instance: master                      Type: forwarding
Flags: <config auto-policy> Options: <unicast multicast>
Import policy: [ (ospf-master-from-red || isis-master-from-black) ]

```

Instance: black
Instance: red

Type: non-forwarding
Type: non-forwarding

show route extensive

List of Syntax	Syntax on page 239 Syntax (EX Series Switches) on page 239
Syntax	show route extensive <destination-prefix> <logical-system (all logical-system-name)>
Syntax (EX Series Switches)	show route extensive <destination-prefix>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display extensive information about the active entries in the routing tables.
Options	none —Display all active entries in the routing table. destination-prefix —(Optional) Display active entries for the specified address or range of addresses. logical-system (all logical-system-name) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route extensive on page 246 show route extensive (Access Route) on page 252 show route extensive (BGP PIC Edge) on page 253 show route extensive (FRR and LFA) on page 253 show route extensive (Route Reflector) on page 254 show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 254 show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 255
Output Fields	Table 25 on page 239 describes the output fields for the show route extensive command. Output fields are listed in the approximate order in which they appear.

Table 25: show route extensive Output Fields

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.

Table 25: show route extensive Output Fields (*continued*)

Field Name	Field Description
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> • active (routes that are active). • holddown (routes that are in the pending state before being declared inactive). • hidden (routes that are not used because of a routing policy).
<i>route-destination</i> (entry, announced)	<p>Route destination (for example: 10.0.0.1/24). The entry value is the number of route for this destination, and the announced value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> • MPLS-label (for example, 80001). • interface-name (for example, ge-1/0/2). • neighbor-address:control-word-status:encapsulation type:vc-id:source (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> • neighbor-address—Address of the neighbor. • control-word-status—Whether the use of the control word has been negotiated for this virtual circuit: NoCtrlWord or CtrlWord. • encapsulation type—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport. • vc-id—Virtual circuit identifier. • source—Source of the advertisement: Local or Remote.
TSI	Protocol header information.
label stacking	<p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> • S=0 route indicates that a packet with an incoming label stack depth of two or more exits this router with one fewer label (the label-popping operation is performed). • If there is no S= information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).
[protocol, preference]	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> • +—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • - —A hyphen indicates the last active route. • *—An asterisk indicates that the route is both the active and the last active route. An asterisk before a to line indicates the best subpath to the route. <p>In every routing metric except for the BGP LocalPref attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the LocalPref value in the Preference2 field. For example, if the LocalPref value for Route 1 is 100, the Preference2 value is -101. If the LocalPref value for Route 2 is 155, the Preference2 value is -156. Route 2 is preferred because it has a higher LocalPref value and a lower Preference2 value.</p>

Table 25: show route extensive Output Fields (*continued*)

Field Name	Field Description
Level	(IS-IS only). In IS-IS, a single autonomous system (AS) can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.
Route Distinguisher	IP subnet augmented with a 64-bit prefix.
PMSI	Provider multicast service interface (MVPN routing table).
Next-hop type	Type of next hop. For a description of possible values for this field, see the Output Field table in the show route detail command.
Next-hop reference count	Number of references made to the next hop.
Flood nexthop branches exceed maximum message	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
Source	IP address of the route source.
Next hop	Network layer address of the directly reachable neighboring system.
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word Selected . This field can also contain the following information: <ul style="list-style-type: none"> • Weight—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible. • Balance—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.
Label-switched-path lsp-path-name	Name of the LSP used to reach the next hop.
Label operation	MPLS label and operation occurring at this routing device. The operation can be pop (where a label is removed from the top of the stack), push (where another label is added to the label stack), or swap (where a label is replaced by another label).
Offset	Whether the metric has been increased or decreased by an offset value.
Interface	(Local only) Local interface name.
Protocol next hop	Network layer address of the remote routing device that advertised the prefix. This address is used to recursively derive a forwarding next hop.

Table 25: show route extensive Output Fields (*continued*)

Field Name	Field Description
<i>label-operation</i>	MPLS label and operation occurring at this routing device. The operation can be pop (where a label is removed from the top of the stack), push (where another label is added to the label stack), or swap (where a label is replaced by another label).
Indirect next hops	<p>When present, a list of nodes that are used to resolve the path to the next-hop destination, in the order that they are resolved.</p> <p>When BGP PIC Edge is enabled, the output lines that contain Indirect next hop: weight follow next hops that the software can use to repair paths where a link failure occurs. The next-hop weight has one of the following values:</p> <ul style="list-style-type: none">• 0x1 indicates active next hops.• 0x4000 indicates passive next hops.
State	State of the route (a route can be in more than one state). See the Output Field table in the show route detail command.
Session ID	The BFD session ID number that represents the protection using MPLS fast reroute (FRR) and loop-free alternate (LFA).
Weight	<p>Weight for the backup path. If the weight of an indirect next hop is larger than zero, the weight value is shown.</p> <p>For sample output, see show route table.</p>

Table 25: show route extensive Output Fields (*continued*)

Field Name	Field Description
Inactive reason	<p>If the route is inactive, the reason for its current state is indicated. Typical reasons include:</p> <ul style="list-style-type: none"> • Active preferred—Currently active route was selected over this route. • Always compare MED—Path with a lower multiple exit discriminator (MED) is available. • AS path—Shorter AS path is available. • Cisco Non-deterministic MED selection—Cisco nondeterministic MED is enabled and a path with a lower MED is available. • Cluster list length—Path with a shorter cluster list length is available. • Forwarding use only—Path is only available for forwarding purposes. • IGP metric—Path through the next hop with a lower IGP metric is available. • IGP metric type—Path with a lower OSPF link-state advertisement type is available. • Interior > Exterior > Exterior via Interior—Direct, static, IGP, or EBGp path is available. • Local preference—Path with a higher local preference value is available. • Next hop address—Path with a lower metric next hop is available. • No difference—Path from a neighbor with a lower IP address is available. • Not Best in its group—Occurs when multiple peers of the same external AS advertise the same prefix and are grouped together in the selection process. When this reason is displayed, an additional reason is provided (typically one of the other reasons listed). • Number of gateways—Path with a higher number of next hops is available. • Origin—Path with a lower origin code is available. • OSPF version—Path does not support the indicated OSPF version. • RIB preference—Route from a higher-numbered routing table is available. • Route distinguisher—64-bit prefix added to IP subnets to make them unique. • Route metric or MED comparison—Route with a lower metric or MED is available. • Route preference—Route with a lower preference value is available. • Router ID—Path through a neighbor with a lower ID is available. • Unusable path—Path is not usable because of one of the following conditions: the route is damped, the route is rejected by an import policy, or the route is unresolved. • Update source—Last tiebreaker is the lowest IP address value.
Local AS	Autonomous system (AS) number of the local routing device.
Age	How long the route has been known.
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.
Metric	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
MED-plus-IGP	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
TTL-Action	<p>For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.</p> <p>For sample output, see show route table.</p>

Table 25: show route extensive Output Fields (*continued*)

Field Name	Field Description
Task	Name of the protocol that has added the route.
Announcement bits	List of protocols that announce this route. n-Resolve inet indicates that the route is used for route resolution for next hops found in the routing table. n is an index used by Juniper Networks customer support only.
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> • I—IGP. • E—EGP. • Recorded—The AS path is recorded by the sample process (sampled). • ?—Incomplete; typically, the AS path was aggregated. <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> • []—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured. • { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • ()—Parentheses enclose a confederation. • ([])—Parentheses and brackets enclose a confederation set. <p>NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
validation-state	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> • Invalid—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database. • Unknown—Indicates that the prefix is not among the prefixes or prefix ranges in the database. • Unverified—Indicates that origin validation is not enabled for the BGP peers. • Valid—Indicates that the prefix and autonomous system pair are found in the database.
FECs bound to route	Point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.
AS path: I <Originator>	(For route reflected output only) Originator ID attribute set by the route reflector.
Primary Upstream	When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.
RPF Nexthops	When multipoint LDP with MoFRR is configured, the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.

Table 25: show route extensive Output Fields (*continued*)

Field Name	Field Description
Label	Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.
weight	Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Cluster list	(For route reflected output only) Cluster ID sent by the route reflector.
Originator ID	(For route reflected output only) Address of router that originally sent the route to the route reflector.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See the Output Field table in the show route detail command for all possible values for this field.
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).
control flags	Control flags: none or Site Down.
mtu	Maximum transmission unit (MTU) information.
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
status vector	Layer 2 VPN and VPLS network layer reachability information (NLRI).
Localpref	Local preference value included in the route.
Router ID	BGP router ID as advertised by the neighbor in the open message.
Primary Routing Table	In a routing table group, the name of the primary routing table in which the route resides.
Secondary Tables	In a routing table group, the name of one or more secondary tables in which the route resides.
Originating RIB	Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of inet.0 resolving through inet.0 and inet.3, this field indicates which routing table, inet.0 or inet.3, provided the best path for a particular prefix.
Node path count	Number of nodes in the path.

Table 25: show route extensive Output Fields (*continued*)

Field Name	Field Description
Forwarding nexthops	Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.

Sample Output

show route extensive

```

user@host> show route extensive
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 29
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 69
        Age: 1:34:06
        Task: RT
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

10.31.1.0/30 (2 entries, 1 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 2
        Next hop: via so-0/3/0.0, selected
        State: <Active Int>
        Local AS: 69
        Age: 1:32:40
        Task: IF
        Announcement bits (1): 3-Resolve tree 2
        AS path: I
    OSPF Preference: 10
        Next-hop reference count: 1
        Next hop: via so-0/3/0.0, selected
        State: <Int>
        Inactive reason: Route Preference
        Local AS: 69
        Age: 1:32:40 Metric: 1
        Area: 0.0.0.0
        Task: OSPF
        AS path: I

10.31.1.1/32 (1 entry, 1 announced)
    *Local Preference: 0
        Next hop type: Local
        Next-hop reference count: 7
        Interface: so-0/3/0.0
        State: <Active NoReadvrt Int>
        Local AS: 69
        Age: 1:32:43
        Task: IF
        Announcement bits (1): 3-Resolve tree 2
        AS path: I

```



```

...

10.31.2.0/30 (1 entry, 1 announced)
TSI:
KRT in-kerne1 10.31.2.0/30 -> {10.31.1.6}
    *OSPF   Preference: 10
            Next-hop reference count: 9
            Next hop: via so-0/3/0.0
            Next hop: 10.31.1.6 via ge-3/1/0.0, selected
            State: <Active Int>
            Local AS:    69
            Age: 1:32:19   Metric: 2
            Area: 0.0.0.0
            Task: OSPF
            Announcement bits (2): 0-KRT 3-Resolve tree 2
            AS path: I

...

224.0.0.2/32 (1 entry, 1 announced)
TSI:
KRT in-kerne1 224.0.0.2/32 -> {}
    *PIM    Preference: 0
            Next-hop reference count: 18
            State: <Active NoReadvrt Int>
            Local AS:    69
            Age: 1:34:08
            Task: PIM Recv
            Announcement bits (2): 0-KRT 3-Resolve tree 2
            AS path: I

...

224.0.0.22/32 (1 entry, 1 announced)
TSI:
KRT in-kerne1 224.0.0.22/32 -> {}
    *IGMP   Preference: 0
            Next-hop reference count: 18
            State: <Active NoReadvrt Int>
            Local AS:    69
            Age: 1:34:06
            Task: IGMP
            Announcement bits (2): 0-KRT 3-Resolve tree 2
            AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
State: <FlashAll>
    *RSVP   Preference: 7
            Next-hop reference count: 6
            Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
            Label-switched-path green-r1-r3
            Label operation: Push 100096
            State: <Active Int>
            Local AS:    69
            Age: 1:28:12   Metric: 2
            Task: RSVP
            Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
            AS path: I

```

```

10.255.71.238/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP   Preference: 7
          Next-hop reference count: 6
          Next hop: via so-0/3/0.0 weight 0x1, selected
          Label-switched-path green-r1-r2
          State: <Active Int>
          Local AS:    69
          Age: 1:28:12   Metric: 1
          Task: RSVP
          Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
          AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

...

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
  *Direct Preference: 0
          Next hop type: Interface
          Next-hop reference count: 1
          Next hop: via lo0.0, selected
          State: <Active Int>
          Local AS:    69
          Age: 1:34:07
          Task: IF
          AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

0 (1 entry, 1 announced)
TSI:
KRT in-kernel 0 /36 -> {}
  *MPLS   Preference: 0
          Next hop type: Receive
          Next-hop reference count: 6
          State: <Active Int>
          Local AS:    69
          Age: 1:34:08   Metric: 1
          Task: MPLS
          Announcement bits (1): 0-KRT
          AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
299840 (1 entry, 1 announced)
TSI:
KRT in-kernel 299840 /52 -> {indirect(1048575)}
  *RSVP   Preference: 7/2
          Next hop type: Flood
          Address: 0x9174a30
          Next-hop reference count: 4
          Next hop type: Router, Next hop index: 798
          Address: 0x9174c28
          Next-hop reference count: 2
          Next hop: 8.0.0.2 via lt-1/2/0.9 weight 0x1
          Label-switched-path R2-to-R4-2p2mp

```

```

Label operation: Pop
Next hop type: Router, Next hop index: 1048574
Address: 0x92544f0
Next-hop reference count: 2
Next hop: 7.0.0.2 via lt-1/2/0.7 weight 0x1
Label-switched-path R2-to-R200-p2mp
Label operation: Pop
Next hop: 6.0.0.2 via lt-1/2/0.5 weight 0x8001
Label operation: Pop
State: <Active Int>
Age: 1:29      Metric: 1
Task: RSVP
Announcement bits (1): 0-KRT
AS path: I...

```

800010 (1 entry, 1 announced)

TSI:

```

KRT in-kernel 800010 /36 -> {vt-3/2/0.32769}
  *VPLS Preference: 7
    Next-hop reference count: 2
    Next hop: via vt-3/2/0.32769, selected
    Label operation: Pop
    State: <Active Int>
    Age: 1:31:53
    Task: Common L2 VC
    Announcement bits (1): 0-KRT
    AS path: I

```

vt-3/2/0.32769 (1 entry, 1 announced)

TSI:

```

KRT in-kernel vt-3/2/0.32769.0      /16 -> {indirect(1048574)}
  *VPLS Preference: 7
    Next-hop reference count: 2
    Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
    Label-switched-path green-r1-r3
    Label operation: Push 800012, Push 100096(top)
    Protocol next hop: 10.255.70.103
    Push 800012
    Indirect next hop: 87272e4 1048574
    State: <Active Int>
    Age: 1:31:53      Metric2: 2
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 1-Common L2 VC
    AS path: I
    Communities: target:11111:1 Layer2-info: encaps:VPLS,
    control flags:, mtu: 0
    Indirect next hops: 1
      Protocol next hop: 10.255.70.103 Metric: 2
      Push 800012
      Indirect next hop: 87272e4 1048574
      Indirect path forwarding next hops: 1
        Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1
        10.255.70.103/32 Originating RIB: inet.3
        Metric: 2                      Node path count: 1
        Forwarding nexthops: 1
        Nexthop: 10.31.1.6 via ge-3/1/0.0

```

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)

```
*Direct Preference: 0
  Next hop type: Interface
  Next-hop reference count: 1
  Next hop: via lo0.0, selected
  State: <Active Int>
  Local AS: 69
  Age: 1:34:07
  Task: IF
  AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:34:07
    Task: IF
    AS path: I

ff02::2/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::2/128 -> {}
  *PIM Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:34:08
    Task: PIM Recv6
    Announcement bits (1): 0-KRT
    AS path: I

ff02::d/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::d/128 -> {}
  *PIM Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:34:08
    Task: PIM Recv6
    Announcement bits (1): 0-KRT
    AS path: I

ff02::16/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::16/128 -> {}
  *MLD Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:34:06
    Task: MLD
    Announcement bits (1): 0-KRT
    AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
  *Direct Preference: 0
```

```

Next hop type: Interface
Next-hop reference count: 1
Next hop: via lo0.16385, selected
State: <Active NoReadvrt Int>
Age: 1:34:07
Task: IF
AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.70.103:1
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Secondary Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 1:28:12 Metric2: 1
    Task: BGP_69.10.255.70.103+179
    Announcement bits (1): 0-green-l2vpn
    AS path: I
    Communities: target:11111:1 Layer2-info: encaps:VPLS,
    control flags:, mtu: 0
    Label-base: 800008, range: 8
    Localpref: 100
    Router ID: 10.255.70.103
    Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699540
  *L2VPN Preference: 170/-1
    Next-hop reference count: 5
    Protocol next hop: 10.255.71.52
    Indirect next hop: 0 -
    State: <Active Int Ext>
    Age: 1:34:03 Metric2: 1
    Task: green-l2vpn
    Announcement bits (1): 1-BGP.0.0.0.0+179
    AS path: I
    Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
    mtu: 0
    Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699528
  *L2VPN Preference: 170/-101
    Next-hop reference count: 5
    Protocol next hop: 10.255.71.52
    Indirect next hop: 0 -
    State: <Active Int Ext>
    Age: 1:34:03 Metric2: 1
    Task: green-l2vpn
    Announcement bits (1): 1-BGP.0.0.0.0+179
    AS path: I
    Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
    Label-base: 800008, range: 8, status-vector: 0x9F

```

```

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

TSI:

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000[0]
    Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
    State: <Active Int>
    Local AS: 99
    Age: 10:21
    Task: l2 circuit
    Announcement bits (1): 0-LDP
    AS path: I
    VC Label 100000, MTU 1500, VLAN ID 512

55.0.0.0/24 (1 entry, 1 announced)
TSI:
KRT queued (pending) add
  55.0.0.0/24 -> {Push 300112}
    *BGP Preference: 170/-101
      Next hop type: Router
      Address: 0x925c208
      Next-hop reference count: 2
      Source: 10.0.0.9
      Next hop: 10.0.0.9 via ge-1/2/0.15, selected
      Label operation: Push 300112
      Label TTL action: prop-ttl
      State: <Active Ext>
      Local AS: 7019 Peer AS: 13979
      Age: 1w0d 23:06:56
      AIGP: 25
      Task: BGP_13979.10.0.0.9+56732
      Announcement bits (1): 0-KRT
      AS path: 13979 7018 I
      Accepted
      Route Label: 300112
      Localpref: 100
      Router ID: 10.9.9.1

```

show route extensive (Access Route)

```

user@host> show route 13.160.0.102 extensive
inet.0: 39256 destinations, 39258 routes (39255 active, 0 holddown, 1 hidden)
13.160.0.102/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 13.160.0.102/32 -> {13.160.0.2}
OSPF area : 0.0.0.0, LSA ID : 13.160.0.102, LSA type : Extern
  *Access Preference: 13
    Next-hop reference count: 78472
    Next hop: 13.160.0.2 via fe-0/0/0.0, selected
    State: <Active Int>
  Age: 12
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (2): 0-KRT 1-OSPFv2
    AS path: I

```

show route extensive (BGP PIC Edge)

```

user@host> show route 1.1.1.6 extensive
ed.inet.0: 6 destinations, 9 routes (6 active, 0 holddown, 0 hidden)
  1.1.1.6/32 (3 entries, 2 announced)
    State: <CalcForwarding>
TSI:
KRT in-kerne1 1.1.1.6/32 -> {indirect(1048574), indirect(1048577)}
Page 0 idx 0 Type 1 val 9219e30
  Nexthop: Self
  AS path: [2] 3 I
  Communities: target:2:1
  Path 1.1.1.6 from 1.1.1.4 Vector len 4. Val: 0
..
    #Multipath Preference: 255
      Next hop type: Indirect
      Address: 0x93f4010
      Next-hop reference count: 2
..
      Protocol next hop: 1.1.1.4
      Push 299824
      Indirect next hop: 944c000 1048574 INH Session ID: 0x3
      Indirect next hop: weight 0x1
      Protocol next hop: 1.1.1.5
      Push 299824
      Indirect next hop: 944c1d8 1048577 INH Session ID: 0x4
      Indirect next hop: weight 0x4000
      State: <ForwardingOnly Int Ext>
      Inactive reason: Forwarding use only
      Age: 25      Metric2: 15
      Validation State: unverified
      Task: RT
      Announcement bits (1): 0-KRT
      AS path: 3 I
      Communities: target:2:1

```

show route extensive (FRR and LFA)

```

user@host> show route 20.31.2:0 extensive
inet.0: 46 destinations, 49 routes (45 active, 0 holddown, 1 hidden)
  20.31.2.0/24 (2 entries, 1 announced)
    State: FlashAll
TSI:
KRT in-kerne1 20.31.2.0/24 -> {Push 299776, Push 299792}
  *RSVP Preference: 7/1
    Next hop type: Router, Next hop index: 1048574
    Address: 0xbbbc010
    Next-hop reference count: 5
    Next hop: 10.31.1.2 via ge-2/1/8.0 weight 0x1, selected
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299776
    Label TTL action: prop-ttl
    Session Id: 0x201
    Next hop: 10.31.2.2 via ge-2/1/4.0 weight 0x4001
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299792
    Label TTL action: prop-ttl
    Session Id: 0x202
    State: Active Int
    Local AS: 100
    Age: 5:31 Metric: 2

```

```

Task: RSVP
Announcement bits (1): 0-KRT
AS path: I
OSPF Preference: 10
Next hop type: Router, Next hop index: 615
Address: 0xb9d78c4
Next-hop reference count: 7
Next hop: 10.31.1.2 via ge-2/1/8.0, selected
Session Id: 0x201
State: Int
Inactive reason: Route Preference
Local AS: 100
Age: 5:35 Metric: 3
Area: 0.0.0.0
Task: OSPF
AS path: I

```

show route extensive (Route Reflector)

```

user@host> show route extensive
1.0.0.0/8 (1 entry, 1 announced)

TSI:
KRT in-kernel 1.0.0.0/8 -> {indirect(40)}
*BGP Preference: 170/-101
Source: 192.168.4.214
Protocol next hop: 207.17.136.192 Indirect next hop: 84ac908 40
State: <Active Int Ext>
Local AS: 10458 Peer AS: 10458
Age: 3:09 Metric: 0 Metric2: 0
Task: BGP_10458.192.168.4.214+1033
Announcement bits (2): 0-KRT 4-Resolve inet.0
AS path: 3944 7777 I <Originator>
Cluster list: 1.1.1.1
Originator ID: 10.255.245.88
Communities: 7777:7777
Localpref: 100
Router ID: 4.4.4.4
Indirect next hops: 1
    Protocol next hop: 207.17.136.192 Metric: 0
    Indirect next hop: 84ac908 40
    Indirect path forwarding next hops: 0
    Next hop type: Discard

```

show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```

user@host> show route label 299872 detail
mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
*LDP Preference: 9
Next hop type: Flood
Next-hop reference count: 3
Address: 0x9097d90
Next hop: via vt-0/1/0.1
Next-hop index: 661
Label operation: Pop
Address: 0x9172130
Next hop: via so-0/0/3.0
Next-hop index: 654
Label operation: Swap 299872
State: **Active Int>

```



```

Local AS: 1001
Age: 8:20      Metric: 1
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 10.255.72.166, grp 232.1.1.1,
src 192.168.142.2

```

show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```
user@host> show route label 301568 detail
```

```

mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
  *LDP    Preference: 9
    Next hop type: Flood
    Address: 0x2735208
    Next-hop reference count: 3
    Next hop type: Router, Next hop index: 1397
    Address: 0x2735d2c
    Next-hop reference count: 3
    Next hop: 1.3.8.2 via ge-1/2/22.0
    Label operation: Pop
    Load balance label: None;
    Next hop type: Router, Next hop index: 1395
    Address: 0x2736290
    Next-hop reference count: 3
    Next hop: 1.3.4.2 via ge-1/2/18.0
    Label operation: Pop
    Load balance label: None;
    State: <Active Int AckRequest MulticastRPF>
    Local AS: 10
    Age: 54:05      Metric: 1
    Validation State: unverified
    Task: LDP
    Announcement bits (1): 0-KRT
    AS path: I
    FECs bound to route: P2MP root-addr 1.1.1.1, grp: 232.1.1.1, src:
192.168.219.11
      Primary Upstream : 1.1.1.3:0--1.1.1.2:0
        RPF Nexthops :
          ge-1/2/15.0, 1.2.94.1, Label: 301568, weight: 0x1
          ge-1/2/14.0, 1.2.3.1, Label: 301568, weight: 0x1
      Backup Upstream : 1.1.1.3:0--1.1.1.6:0
        RPF Nexthops :
          ge-1/2/20.0, 1.2.96.1, Label: 301584, weight: 0xffffe
          ge-1/2/19.0, 1.3.6.1, Label: 301584, weight: 0xffffe

```

show route flow validation

List of Syntax	Syntax on page 256 Syntax (EX Series Switches) on page 256
Syntax	<pre>show route flow validation <brief detail> <ip-prefix> <table table-name> <logical-system (all logical-system-name)></pre>
Syntax (EX Series Switches)	<pre>show route flow validation <brief detail> <ip-prefix> <table table-name></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display flow route information.
Options	<p>none—Display flow route information.</p> <p>brief detail—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p>ip-prefix—(Optional) IP address for the flow route.</p> <p>logical-system (all logical-system-name)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>table table-name—(Optional) Display flow route information for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the show route flow validation inet command).</p>
Required Privilege Level	view
List of Sample Output	show route flow validation on page 257
Output Fields	<p>Table 26 on page 256 lists the output fields for the show route flow validation command. Output fields are listed in the approximate order in which they appear.</p>

Table 26: show route flow validation Output Fields

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).	All levels
<i>prefix</i>	Route address.	All levels
Active unicast route	Active route in the routing table.	All levels

Table 26: show route flow validation Output Fields (*continued*)

Field Name	Field Description	Level of Output
Dependent flow destinations	Number of flows for which there are routes in the routing table.	All levels
Origin	Source of the route flow.	All levels
Neighbor AS	Autonomous system identifier of the neighbor.	All levels
Flow destination	Number of entries and number of destinations that match the route flow.	All levels
Unicast best match	Destination that is the best match for the route flow.	All levels
Flags	Information about the route flow.	All levels

Sample Output

show route flow validation

```
user@host> show route flow validation
inet.0:
10.0.5.0/24Active unicast route
Dependent flow destinations: 1
Origin: 192.168.224.218, Neighbor AS: 65001
Flow destination (3 entries, 1 match origin)
Unicast best match: 10.0.5.0/24
Flags: SubtreeApex Consistent
```

show route forwarding-table

List of Syntax	Syntax on page 258 Syntax (MX Series Routers) on page 258 Syntax (TX Matrix and TX Matrix Plus Routers) on page 258
Syntax	<pre>show route forwarding-table <detail extensive summary> <all> <ccc interface-name> <destination destination-prefix> <family family matching matching> <interface-name interface-name> <label name> <matching matching> <multicast> <table (default logical-system-name/routing-instance-name routing-instance-name)> <vlan (all vlan-name)> <vpn vpn></pre>
Syntax (MX Series Routers)	<pre>show route forwarding-table <detail extensive summary> <all> <bridge-domain (all domain-name)> <ccc interface-name> <destination destination-prefix> <family family matching matching> <interface-name interface-name> <label name> <learning-vlan-id learning-vlan-id> <matching matching> <multicast> <table (default logical-system-name/routing-instance-name routing-instance-name)> <vlan (all vlan-name)> <vpn vpn></pre>
Syntax (TX Matrix and TX Matrix Plus Routers)	<pre>show route forwarding-table <detail extensive summary> <all> <ccc interface-name> <destination destination-prefix> <family family matching matching> <interface-name interface-name> <matching matching> <label name> <lcc number> <multicast> <table routing-instance-name> <vpn vpn></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Option bridge-domain introduced in Junos OS Release 7.5</p> <p>Option learning-vlan-id introduced in Junos OS Release 8.4</p>

Options **all** and **vlan** introduced in Junos OS Release 9.6.

Command introduced in Junos OS Release 11.3 for the QFX Series.

Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Display the Routing Engine's forwarding table, including the network-layer prefixes and their next hops. This command is used to help verify that the routing protocol process has relayed the correction information to the forwarding table. The Routing Engine constructs and maintains one or more routing tables. From the routing tables, the Routing Engine derives a table of active routes, called the forwarding table.



NOTE: The Routing Engine copies the forwarding table to the Packet Forwarding Engine, the part of the router that is responsible for forwarding packets. To display the entries in the Packet Forwarding Engine's forwarding table, use the **show pfe route** command.

Options **none**—Display the routes in the forwarding tables. By default, the **show route forwarding-table** command does not display information about private, or internal, forwarding tables.

detail | extensive | summary—(Optional) Display the specified level of output.

all—(Optional) Display routing table entries for all forwarding tables, including private, or internal, tables.

bridge-domain (all | bridge-domain-name)—(MX Series routers only) (Optional) Display route entries for all bridge domains or the specified bridge domain.

ccc interface-name—(Optional) Display route entries for the specified circuit cross-connect interface.

destination destination-prefix—(Optional) Destination prefix.

family family—(Optional) Display routing table entries for the specified family: **fibre-channel**, **fmembers**, **inet**, **inet6**, **iso**, **mpls**, **tnp**, **unix**, **vpls**, or **vlan-classification**.

interface-name interface-name—(Optional) Display routing table entries for the specified interface.

label name—(Optional) Display route entries for the specified label.

lcc number—(TX Matrix and TX matrix Plus routers only) (Optional) On a routing matrix composed of a TX Matrix router and T640 routers, display information for the specified T640 router (or line-card chassis) connected to the TX Matrix router. On a routing matrix composed of the TX Matrix Plus router and T1600 or T4000 routers, display information for the specified router (line-card chassis) connected to the TX Matrix Plus router.

Replace *number* with the following values depending on the LCC configuration:

- 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix.
- 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix.
- 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.
- 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.

learning-vlan-id *learning-vlan-id*—(MX Series routers only) (Optional) Display learned information for all VLANs or for the specified VLAN.

matching *matching*—(Optional) Display routing table entries matching the specified prefix or prefix length.

multicast—(Optional) Display routing table entries for multicast routes.

table (**default** | *logical-system-name/routing-instance-name* | *routing-instance-name*)—(Optional) Display route entries for all the routing tables in the main routing instance or for the specified routing instance. If your device supports logical systems, you can also display route entries for the specified logical system and routing instance. To view the routing instances on your device, use the [show route instance](#) command.

vlan (**all** | *vlan-name*)—(Optional) Display information for all VLANs or for the specified VLAN.

vpn *vpn*—(Optional) Display routing table entries for a specified VPN.

Required Privilege Level

view

List of Sample Output

[show route forwarding-table on page 263](#)
[show route forwarding-table detail on page 264](#)
[show route forwarding-table destination extensive \(Weights and Balances\) on page 264](#)
[show route forwarding-table extensive on page 265](#)
[show route forwarding-table extensive \(RPF\) on page 266](#)
[show route forwarding-table family mpls on page 267](#)
[show route forwarding-table family vpls on page 267](#)
[show route forwarding-table vpls \(Broadcast, unknown unicast, and multicast \(BUM\) hashing is enabled\) on page 267](#)
[show route forwarding-table vpls \(Broadcast, unknown unicast, and multicast \(BUM\) hashing is enabled with MAC Statistics\) on page 268](#)
[show route forwarding-table family vpls extensive on page 268](#)
[show route forwarding-table table default on page 269](#)
[show route forwarding-table table logical-system-name/routing-instance-name on page 270](#)

[show route forwarding-table vpn on page 271](#)

Output Fields [Table 27 on page 261](#) lists the output fields for the **show route forwarding-table** command. Output fields are listed in the approximate order in which they appear. Field names might be abbreviated (as shown in parentheses) when no level of output is specified, or when the **detail** keyword is used instead of the **extensive** keyword.

Table 27: show route forwarding-table Output Fields

Field Name	Field Description	Level of Output
Logical system	Name of the logical system. This field is displayed if you specify the table logical-system-name/routing-instance-name option on a device that is configured for and supports logical systems.	All levels
Routing table	Name of the routing table (for example, inet, inet6, mpls).	All levels
Address family	Address family (for example, IP, IPv6, ISO, MPLS, and VPLS).	All levels
Destination	Destination of the route.	detail extensive
Route Type (Type)	How the route was placed into the forwarding table. When the detail keyword is used, the route type might be abbreviated (as shown in parentheses): <ul style="list-style-type: none"> cloned (clon)—(TCP or multicast only) Cloned route. destination (dest)—Remote addresses directly reachable through an interface. destination down (iddn)—Destination route for which the interface is unreachable. interface cloned (ifcl)—Cloned route for which the interface is unreachable. route down (ifdn)—Interface route for which the interface is unreachable. ignore (ignr)—Ignore this route. interface (intf)—Installed as a result of configuring an interface. permanent (perm)—Routes installed by the kernel when the routing table is initialized. user—Routes installed by the routing protocol process or as a result of the configuration. 	All levels
Route Reference (RtRef)	Number of routes to reference.	detail extensive
Flags	Route type flags: <ul style="list-style-type: none"> none—No flags are enabled. accounting—Route has accounting enabled. cached—Cache route. incoming-iface interface-number—Check against incoming interface. prefix load balance—Load balancing is enabled for this prefix. rt nh decoupled—Route has been decoupled from the next hop to the destination. sent to PFE—Route has been sent to the Packet Forwarding Engine. static—Static route. 	extensive
Next hop	IP address of the next hop to the destination.	detail extensive

Table 27: show route forwarding-table Output Fields (*continued*)

Field Name	Field Description	Level of Output
Next hop Type (Type)	<p>Next-hop type. When the detail keyword is used, the next-hop type might be abbreviated (as indicated in parentheses):</p> <ul style="list-style-type: none"> • broadcast (bcst)—Broadcast. • deny—Deny. • discard (dscd) —Discard. • hold—Next hop is waiting to be resolved into a unicast or multicast type. • indexed (idxd)—Indexed next hop. • indirect (indr)—Indirect next hop. • local (locl)—Local address on an interface. • routed multicast (mcrst)—Regular multicast next hop. • multicast (mcst)—Wire multicast next hop (limited to the LAN). • multicast discard (mdsc)—Multicast discard. • multicast group (mgrp)—Multicast group member. • receive (rcv)—Receive. • reject (rjct)—Discard. An ICMP unreachable message was sent. • resolve (rslv)—Resolving the next hop. • unicast (ucst)—Unicast. • unilist (ulst)—List of unicast next hops. A packet sent to this next hop goes to any next hop in the list. 	detail extensive
Index	Software index of the next hop that is used to route the traffic for a given prefix.	detail extensive none
Route interface-index	Logical interface index from which the route is learned. For example, for interface routes, this is the logical interface index of the route itself. For static routes, this field is zero. For routes learned through routing protocols, this is the logical interface index from which the route is learned.	extensive
Reference (NhRef)	Number of routes that refer to this next hop.	detail extensive none
Next-hop interface (Netif)	Interface used to reach the next hop.	detail extensive none
Weight	Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible (see the Balance field description).	extensive
Balance	Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a router is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.	extensive
RPF interface	List of interfaces from which the prefix can be accepted. Reverse path forwarding (RPF) information is displayed only when rpf-check is configured on the interface.	extensive

Sample Output

show route forwarding-table

```

user@host> show route forwarding-table
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  46   4
0.0.0.0/32       perm  0                               dscd  44   1
1.1.1.0/24       ifdn  0                               rslv  608  1 ge-2/0/1.0
1.1.1.0/32       iddn  0 1.1.1.0           recv  606  1 ge-2/0/1.0
1.1.1.1/32       user  0                               rjct  46   4
1.1.1.1/32       intf  0 1.1.1.1           locl  607  2
1.1.1.1/32       iddn  0 1.1.1.1           locl  607  2
1.1.1.255/32     iddn  0 ff:ff:ff:ff:ff:ff bcst  605  1 ge-2/0/1.0
10.0.0.0/24      intf  0                               rslv  616  1 ge-2/0/0.0
10.0.0.0/32      dest  0 10.0.0.0          recv  614  1 ge-2/0/0.0
10.0.0.1/32      intf  0 10.0.0.1          locl  615  2
10.0.0.1/32      dest  0 10.0.0.1          locl  615  2
10.0.0.255/32    dest  0 10.0.0.255        bcst  613  1 ge-2/0/0.0
10.1.1.0/24      ifdn  0                               rslv  612  1 ge-2/0/1.0
10.1.1.0/32      iddn  0 10.1.1.0          recv  610  1 ge-2/0/1.0
10.1.1.1/32      user  0                               rjct  46   4
10.1.1.1/32      intf  0 10.1.1.1          locl  611  2
10.1.1.1/32      iddn  0 10.1.1.1          locl  611  2
10.1.1.255/32    iddn  0 ff:ff:ff:ff:ff:ff bcst  609  1 ge-2/0/1.0
10.209.0.0/16    user  0 10.209.63.254     ucst  419  20 fxp0.0
10.209.0.0/16    user  1 0:12:1e:ca:98:0   ucst  419  20 fxp0.0
10.209.0.0/18    intf  0                               rslv  418  1 fxp0.0
10.209.0.0/32    dest  0 10.209.0.0        recv  416  1 fxp0.0
10.209.2.131/32  intf  0 10.209.2.131      locl  417  2
10.209.2.131/32  dest  0 10.209.2.131      locl  417  2
10.209.17.55/32  dest  0 0:30:48:5b:78:d2  ucst  435  1 fxp0.0
10.209.63.42/32  dest  0 0:23:7d:58:92:ca  ucst  434  1 fxp0.0
10.209.63.254/32 dest  0 0:12:1e:ca:98:0   ucst  419  20 fxp0.0
10.209.63.255/32 dest  0 10.209.63.255     bcst  415  1 fxp0.0
10.227.0.0/16    user  0 10.209.63.254     ucst  419  20 fxp0.0

...

Routing table: iso
ISO:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  27   1
47.0005.80ff.f800.0000.0108.0003.0102.5524.5220.00
intf  0                               locl  28   1

Routing table: inet6
Internet6:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  6    1
ff00::/8         perm  0                               mdsc  4    1
ff02::1/128      perm  0 ff02::1           mcst  3    1

Routing table: ccc
MPLS:
Interface.Label  Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  16   1
100004(top)fe-0/0/1.0

```

show route forwarding-table detail

```

user@host> show route forwarding-table detail
Routing table: inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          user   2 0:90:69:8e:b1:1b ucst  132   4 fxp0.0
default          perm   0                               rjct   14    1
10.1.1.0/24      intf   0 ff.3.0.21          ucst  322   1 so-5/3/0.0
10.1.1.0/32      dest   0 10.1.1.0           recv  324   1 so-5/3/0.0
10.1.1.1/32      intf   0 10.1.1.1           locl  321   1
10.1.1.255/32    dest   0 10.1.1.255         bcst  323   1 so-5/3/0.0
10.21.21.0/24    intf   0 ff.3.0.21          ucst  326   1 so-5/3/0.0
10.21.21.0/32    dest   0 10.21.21.0         recv  328   1 so-5/3/0.0
10.21.21.1/32    intf   0 10.21.21.1         locl  325   1
10.21.21.255/32  dest   0 10.21.21.255       bcst  327   1 so-5/3/0.0
127.0.0.1/32     intf   0 127.0.0.1          locl  320   1
172.17.28.19/32  clon   1 192.168.4.254      ucst  132   4 fxp0.0
172.17.28.44/32  clon   1 192.168.4.254      ucst  132   4 fxp0.0

...

Routing table: private1__inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct   46    1
10.0.0.0/8       intf   0                               rslv  136   1 fxp1.0
10.0.0.0/32      dest   0 10.0.0.0           recv  134   1 fxp1.0
10.0.0.4/32      intf   0 10.0.0.4           locl  135   2
10.0.0.4/32      dest   0 10.0.0.4           locl  135   2

...

Routing table: iso
ISO:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct   38    1

...

Routing table: inet6
Internet6:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct   22    1
ff00::/8         perm   0                               mdsc   21    1
ff02::1/128      perm   0 ff02::1           mcst   17    1

...

Routing table: mpls
MPLS:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct  28    1

```

show route forwarding-table destination extensive (Weights and Balances)

```

user@host> show route forwarding-table destination 3.4.2.1 extensive
Routing table: inet [Index 0]
Internet:

Destination: 3.4.2.1/32
Route type: user
Route reference: 0                               Route interface-index: 0

```

```

Flags: sent to PFE
Next-hop type: unilist           Index: 262143  Reference: 1
Nexthop: 4.4.4.4
Next-hop type: unicast          Index: 335      Reference: 2
Next-hop interface: so-1/1/0.0  Weight: 22     Balance: 3
Nexthop: 145.12.1.2
Next-hop type: unicast          Index: 337     Reference: 2
Next-hop interface: so-0/1/2.0  Weight: 33     Balance: 33

```

show route forwarding-table extensive

```

user@host> show route forwarding-table extensive
Routing table: inet [Index 0]
Internet:

Destination: default
Route type: user
Route reference: 2
Flags: sent to PFE
Nexthop: 0:90:69:8e:b1:1b
Next-hop type: unicast          Index: 132     Reference: 4
Next-hop interface: fxp0.0
Route interface-index: 0

Destination: default
Route type: permanent
Route reference: 0
Flags: none
Next-hop type: reject           Index: 14      Reference: 1
Route interface-index: 0

Destination: 127.0.0.1/32
Route type: interface
Route reference: 0
Flags: sent to PFE
Nexthop: 127.0.0.1
Next-hop type: local            Index: 320     Reference: 1
Route interface-index: 0

...

Routing table: private1__inet [Index 1]
Internet:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject           Index: 46      Reference: 1
Route interface-index: 0

Destination: 10.0.0.0/8
Route type: interface
Route reference: 0
Flags: sent to PFE
Next-hop type: resolve          Index: 136     Reference: 1
Next-hop interface: fxp1.0
Route interface-index: 3

...

Routing table: iso [Index 0]
ISO:

Destination: default
Route type: permanent

```

```

Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 38      Reference: 1

Routing table: inet6 [Index 0]
Internet6:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 22      Reference: 1

Destination: ff00::/8
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: multicast discard
Route interface-index: 0
Index: 21      Reference: 1

...

Routing table: private1__inet6 [Index 1]
Internet6:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 54      Reference: 1

Destination: fe80::2a0:a5ff:fe3d:375/128
Route type: interface
Route reference: 0
Flags: sent to PFE
Next-hop: fe80::2a0:a5ff:fe3d:375
Next-hop type: local
Route interface-index: 0
Index: 75      Reference: 1

...

```

show route forwarding-table extensive (RPF)

The next example is based on the following configuration, which enables an RPF check on all routes that are learned from this interface, including the interface route:

```

so-1/1/0 {
  unit 0 {
    family inet {
      rpf-check;
      address 15.95.1.2/30;
    }
  }
}

```

```

user@host> show route forwarding-table extensive
Routing table: inet [Index 0]
Internet:
...
...
Destination: 15.95.1.3/32
Route type: destination
Route reference: 0
Route interface-index: 67

```

```

Flags: sent to PFE
Nexthop: 15.95.1.3
Next-hop type: broadcast          Index: 328      Reference: 1
Next-hop interface: so-1/1/0.0
RPF interface: so-1/1/0.0

```

show route forwarding-table family mpls

```

user@host> show route forwarding-table family mpls
Routing table: mpls
MPLS:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0
0                user  0
1                user  0
2                user  0
100000           user  0 10.31.1.6          swap 100001      fe-1/1/0.0
800002           user  0                  Pop          vt-0/3/0.32770

vt-0/3/0.32770 (VPLS)
                  user  0                  indr  351      4
                  Push 800000, Push 100002(top)

so-0/0/0.0

```

show route forwarding-table family vpls

```

user@host> show route forwarding-table family vpls
Routing table: green.vpls
VPLS:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          dynm  0
default          perm  0
fe-0/1/0.0       dynm  0
00:90:69:0c:20:1f/48      <<<<<Remote CE

                  dynm  0                  indr  351      4
                  Push 800000, Push 100002(top)

so-0/0/0.0
00:90:69:85:b0:1f/48      <<<<<Local CE

                  dynm  0                  ucst  354      2 fe-0/1/0.0

```

show route forwarding-table vpls (Broadcast, unknown unicast, and multicast (BUM) hashing is enabled)

```

user@host> show route forwarding-table vpls
Routing table: green.vpls
VPLS:
Enabled protocols: BUM hashing
Destination      Type RtRef Next hop          Type Index      NhRef Netif
default          perm  0
lsi.1048832      intf  0
                  4.4.3.2          indr 1048574     4
                  Push 262145       621      2

ge-3/0/0.0
00:19:e2:25:d0:01/48 user  0                  ucst  590      5 ge-2/3/9.0
0x30003/51       user  0                  comp  627      2
ge-2/3/9.0       intf  0                  ucst  590      5 ge-2/3/9.0
ge-3/1/3.0       intf  0                  ucst  619      4 ge-3/1/3.0
0x30002/51       user  0                  comp  600      2
0x30001/51       user  0                  comp  597      2

```

show route forwarding-table vpls (Broadcast, unknown unicast, and multicast (BUM) hashing is enabled with MAC Statistics)

```

user@host> show route forwarding-table vpls
Routing table: green.vpls
VPLS:
Enabled protocols: BUM hashing, MAC Stats

```

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		dscd	519	1	
1si.1048834	intf	0		indr	1048574	4	
			4.4.3.2	Push	262145	592	2
ge-3/0/0.0							
00:19:e2:25:d0:01/48	user	0		ucst	590	5	ge-2/3/9.0
0x30003/51	user	0		comp	630	2	
ge-2/3/9.0	intf	0		ucst	590	5	ge-2/3/9.0
ge-3/1/3.0	intf	0		ucst	591	4	ge-3/1/3.0
0x30002/51	user	0		comp	627	2	
0x30001/51	user	0		comp	624	2	

show route forwarding-table family vpls extensive

```

user@host> show route forwarding-table family vpls extensive
Routing table: green.vpls [Index 2]
VPLS:

```

Destination	Route type	Route reference	Flags	Next-hop type	Next-hop interface	Index	Reference
default	dynamic	0	sent to PFE	flood		289	1
				unicast		291	3
				unicast		290	3
default	permanent	0	none	discard		341	1
fe-0/1/2.0	dynamic	0	sent to PFE	flood		293	1
				indirect		363	4
				Push 800016			
				indirect		301	5
				10.31.3.2			
				Push 800000			
				unicast		291	3
fe-0/1/3.0	dynamic	0	sent to PFE	flood		292	1

```

Next-hop type: indirect          Index: 363      Reference: 4
Next-hop type: Push 800016
Next-hop interface: at-1/0/1.0
Next-hop type: indirect          Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0
Next-hop type: unicast           Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0

Destination: 10:00:00:01:01:01/48
Route type: dynamic
Route reference: 0               Route interface-index: 70
Flags: sent to PFE, prefix load balance
Next-hop type: unicast           Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0
Route used as destination:
  Packet count:      6640      Byte count:      675786
Route used as source
  Packet count:      6894      Byte count:      696424

Destination: 10:00:00:01:01:04/48
Route type: dynamic
Route reference: 0               Route interface-index: 69
Flags: sent to PFE, prefix load balance
Next-hop type: unicast           Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0
Route used as destination:
  Packet count:      96        Byte count:      8079
Route used as source:
  Packet count:      296        Byte count:      24955

Destination: 10:00:00:01:03:05/48
Route type: dynamic
Route reference: 0               Route interface-index: 74
Flags: sent to PFE, prefix load balance
Next-hop type: indirect          Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0

```

show route forwarding-table table default

```

user@host> show route forwarding-table table default
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0
0.0.0.0/32       perm  0
10.0.60.0/30     user  0 10.0.60.13          ucst  713  5 fe-0/1/3.0
10.0.60.12/30    intf  0
10.0.60.12/32    dest  0 10.0.60.12          recv  686  1 fe-0/1/3.0
10.0.60.13/32    dest  0 0:5:85:8b:bc:22     ucst  713  5 fe-0/1/3.0
10.0.60.14/32    intf  0 10.0.60.14          locl  687  2
10.0.60.14/32    dest  0 10.0.60.14          locl  687  2
10.0.60.15/32    dest  0 10.0.60.15          bcst  685  1 fe-0/1/3.0
10.0.67.12/30    user  0 10.0.60.13          ucst  713  5 fe-0/1/3.0
10.0.80.0/30     ifdn  0 ff.3.0.21          ucst  676  1 so-0/0/1.0
10.0.80.0/32     dest  0 10.0.80.0          recv  678  1 so-0/0/1.0
10.0.80.2/32     user  0
10.0.80.2/32     intf  0 10.0.80.2          locl  675  1

```

```

10.0.80.3/32      dest    0 10.0.80.3      bcst   677    1 so-0/0/1.0
10.0.90.12/30     intf    0                      rslv   684    1 fe-0/1/0.0
10.0.90.12/32     dest    0 10.0.90.12    recv   682    1 fe-0/1/0.0
10.0.90.14/32     intf    0 10.0.90.14     locl   683    2
10.0.90.14/32     dest    0 10.0.90.14     locl   683    2
10.0.90.15/32     dest    0 10.0.90.15     bcst   681    1 fe-0/1/0.0
10.5.0.0/16       user    0 192.168.187.126 ucst   324    15 fxp0.0
10.10.0.0/16      user    0 192.168.187.126 ucst   324    15 fxp0.0
10.13.10.0/23     user    0 192.168.187.126 ucst   324    15 fxp0.0
10.84.0.0/16      user    0 192.168.187.126 ucst   324    15 fxp0.0
10.150.0.0/16     user    0 192.168.187.126 ucst   324    15 fxp0.0
10.157.64.0/19    user    0 192.168.187.126 ucst   324    15 fxp0.0
10.209.0.0/16     user    0 192.168.187.126 ucst   324    15 fxp0.0

```

...

Routing table: default.iso

ISO:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	60	1	

Routing table: default.inet6

Internet6:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	44	1	
::/128	perm	0		dscd	42	1	
ff00::/8	perm	0		mdsc	43	1	
ff02::1/128	perm	0	ff02::1	mcst	39	1	

Routing table: default.mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		dscd	50	1	

show route forwarding-table table logical-system-name/routing-instance-name

```
user@host> show route forwarding-table table R4/vpn-red
```

Logical system: R4

Routing table: vpn-red.inet

Internet:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	563	1	
0.0.0.0/32	perm	0		dscd	561	2	
1.0.0.1/32	user	0		dscd	561	2	
2.0.2.0/24	intf	0		rslv	771	1	ge-1/2/0.3
2.0.2.0/32	dest	0	2.0.2.0	recv	769	1	ge-1/2/0.3
2.0.2.1/32	intf	0	2.0.2.1	locl	770	2	
2.0.2.1/32	dest	0	2.0.2.1	locl	770	2	
2.0.2.2/32	dest	0	0.4.80.3.0.1b.c0.d5.e4.bd.0.1b.c0.d5.e4.bc.8.0	ucst	789	1	ge-1/2/0.3
2.0.2.255/32	dest	0	2.0.2.255	bcst	768	1	ge-1/2/0.3
224.0.0.0/4	perm	1		mdsc	562	1	
224.0.0.1/32	perm	0	224.0.0.1	mcst	558	1	
255.255.255.255/32	perm	0		bcst	559	1	

Logical system: R4

Routing table: vpn-red.iso

ISO:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	608	1	


```

Logical system: R4
Routing table: vpn-red.inet6
Internet6:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0              rjct  708    1
::/128           perm  0              dscd  706    1
ff00::/8         perm  0              mdsc  707    1
ff02::1/128      perm  0 ff02::1      mcst  704    1

```

```

Logical system: R4
Routing table: vpn-red.mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0              dscd  638

```

show route forwarding-table vpn

```

user@host> show route forwarding-table vpn VPN-A
Routing table:: VPN-A.inet
Internet:
Destination      Type RtRef Nexthop      Type Index NhRef Netif
default          perm  0              rjct   4    4
10.39.10.20/30   intf  0 ff.3.0.21      ucst   40    1
so-0/0/0.0
10.39.10.21/32   intf  0 10.39.10.21     locl   36    1
10.255.14.172/32 user  0              ucst   69    2
so-0/0/0.0
10.255.14.175/32 user  0              indr   81    3
Push 100004, Push
100004(top) so-1/0/0.0
224.0.0.0/4      perm  2              mdsc   5    3
224.0.0.1/32     perm  0 224.0.0.1      mcst   1    8
224.0.0.5/32     user  1 224.0.0.5      mcst   1    8
255.255.255.255/32 perm  0              bcst   2    3

```

show route inactive-path

List of Syntax	Syntax on page 272 Syntax (EX Series Switches) on page 272
Syntax	<code>show route inactive-path</code> <code><brief detail extensive terse></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches)	<code>show route inactive-path</code> <code><brief detail extensive terse></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display routes for destinations that have no active route. An inactive route is a route that was not selected as the best path.
Options	none —Display all inactive routes. brief detail extensive terse —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief . logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route inactive-path on page 272 show route inactive-path detail on page 273 show route inactive-path extensive on page 274 show route inactive-path terse on page 274
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route inactive-path

```
user@host> show route inactive-path

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.100.12/30      [OSPF/10] 03:57:28, metric 1
> via so-0/3/0.0

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```

10.0.0.0/8          [Direct/0] 04:39:56
                    > via fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.80.0/30       [BGP/170] 04:38:17, localpref 100
                    AS path: 100 I
                    > to 10.12.80.1 via ge-6/3/2.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

show route inactive-path detail

```

user@host> show route inactive-path detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete

10.12.100.12/30 (2 entries, 1 announced)
  OSPF   Preference: 10
         Next-hop reference count: 1
         Next hop: via so-0/3/0.0, selected
         State: <Int>
         Inactive reason: Route Preference
         Local AS: 1
         Age: 3:58:24   Metric: 1
         Area: 0.0.0.0
         Task: OSPF
         AS path: I

private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

10.0.0.0/8 (2 entries, 0 announced)
  Direct Preference: 0
         Next hop type: Interface
         Next-hop reference count: 1
         Next hop: via fxp1.0, selected
         State: <NotBest Int>
         Inactive reason: No difference
         Age: 4:40:52
         Task: IF
         AS path: I

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.12.80.0/30 (2 entries, 1 announced)

```

```

BGP      Preference: 170/-101
        Next-hop reference count: 6
        Source: 10.12.80.1
        Next hop: 10.12.80.1 via ge-6/3/2.0, selected
        State: <Ext>
        Inactive reason: Route Preference
        Peer AS: 100
        Age: 4:39:13
        Task: BGP_100.10.12.80.1+179
        AS path: 100 I
        Localpref: 100
        Router ID: 10.0.0.0

```

show route inactive-path extensive

The output for the **show route inactive-path extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see [show route inactive-path detail on page 273](#).

show route inactive-path terse

```

user@host> show route inactive-path terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.12.100.12/30   0 10      1          >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.0.0.0/8        D  0          >fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
  10.12.80.0/30     B 170      100      >10.12.80.1    100 I

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

show route inactive-prefix

List of Syntax	Syntax on page 275 Syntax (EX Series Switches) on page 275
Syntax	<pre>show route inactive-prefix <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switches)	<pre>show route inactive-prefix <brief detail extensive terse></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display inactive route destinations in each routing table.
Options	<p>none—Display all inactive route destination.</p> <p>brief detail extensive terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
List of Sample Output	show route inactive-prefix on page 275 show route inactive-prefix detail on page 275 show route inactive-prefix extensive on page 276 show route inactive-prefix terse on page 276
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route inactive-prefix

```
user@host> show route inactive-prefix

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

127.0.0.1/32          [Direct/0] 00:04:54
> via lo0.0
```

show route inactive-prefix detail

```
user@host> show route inactive-prefix detail

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
```

```
127.0.0.1/32 (1 entry, 0 announced)
  Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Hidden Martian Int>
    Age: 4:51
    Task: IF
    AS path: I00:04:54
      > via lo0.0
```

`show route inactive-prefix extensive`

The output for the `show route inactive-prefix extensive` command is identical to that of the `show route inactive-path detail` command. For sample output, see [show route inactive-prefix detail on page 275](#).

`show route inactive-prefix terse`

```
user@host> show route inactive-prefix terse
```

```
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
127.0.0.1/32	D 0			>lo0.0	

show route instance

List of Syntax	Syntax on page 277 Syntax (EX Series Switches and QFX Series) on page 277
Syntax	<pre>show route instance <brief detail summary> <instance-name> <logical-system (all logical-system-name)> <operational></pre>
Syntax (EX Series Switches and QFX Series)	<pre>show route instance <brief detail summary> <instance-name> <operational></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Display routing instance information.
Options	<p>none—(Same as brief) Display standard information about all routing instances.</p> <p>brief detail summary—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief. (These options are not available with the operational keyword.)</p> <p>instance-name—(Optional) Display information for all routing instances whose name begins with this string (for example, cust1, cust11, and cust111 are all displayed when you run the show route instance cust1 command).</p> <p>logical-system (all logical-system-name)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>operational—(Optional) Display operational routing instances.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Transporting IPv6 Traffic Across IPv4 Using Filter-Based Tunneling</i> • <i>Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart</i>
List of Sample Output	show route instance on page 279 show route instance detail (Graceful Restart Complete) on page 279 show route instance detail (Graceful Restart Incomplete) on page 281 show route instance detail (VPLS Routing Instance) on page 282 show route instance operational on page 283 show route instance summary on page 283

Output Fields Table 28 on page 278 lists the output fields for the **show route instance** command. Output fields are listed in the approximate order in which they appear.

Table 28: show route instance Output Fields

Field Name	Field Description	Level of Output
Instance or <i>instance-name</i>	Name of the routing instance.	All levels
Operational Routing Instances	(operational keyword only) Names of all operational routing instances.	—
Type	Type of routing instance: forwarding , l2vpn , no-forwarding , vpls , virtual-router , or vrf .	All levels
State	State of the routing instance: active or inactive .	brief detail none
Interfaces	Name of interfaces belonging to this routing instance.	brief detail none
Restart State	Status of graceful restart for this instance: Pending or Complete .	detail
Path selection timeout	Maximum amount of time, in seconds, remaining until graceful restart is declared complete. The default is 300 .	detail
Tables	Tables (and number of routes) associated with this routing instance.	brief detail none
Route-distinguisher	Unique route distinguisher associated with this routing instance.	detail
Vrf-import	VPN routing and forwarding instance import policy name.	detail
Vrf-export	VPN routing and forwarding instance export policy name.	detail
Vrf-import-target	VPN routing and forwarding instance import target community name.	detail
Vrf-export-target	VPN routing and forwarding instance export target community name.	detail
Fast-reroute-priority	Fast reroute priority setting for a VPLS routing instance: high , medium , or low . The default is low .	detail
Restart State	Restart state: <ul style="list-style-type: none"> Pending;protocol-name—List of protocols that have not yet completed graceful restart for this routing table. Complete—All protocols have restarted for this routing table. 	detail
Primary rib	Primary table for this routing instance.	brief none summary
Active/holddown/hidden	Number of active, hold-down, and hidden routes.	All levels

Sample Output

show route instance

```

user@host> show route instance
Instance              Type
Primary RIB
master                forwarding
inet.0                16/0/1
iso.0                 1/0/0
mpls.0                0/0/0
inet6.0               2/0/0
l2circuit.0          0/0/0
__juniper_private1__ forwarding
__juniper_private1__.inet.0 12/0/0
__juniper_private1__.inet6.0 1/0/0

```

show route instance detail (Graceful Restart Complete)

```

user@host> show route instance detail
master:
  Router ID: 10.255.14.176
  Type: forwarding      State: Active
  Restart State: Complete Path selection timeout: 300
  Tables:
    inet.0              : 17 routes (15 active, 0 holddown, 1 hidden)
    Restart Complete
    inet.3              : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    iso.0               : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0              : 19 routes (19 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l3vpn.0         : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Complete
    inet6.0             : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0         : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
  BGP-INET:
    Router ID: 10.69.103.1
    Type: vrf           State: Active
    Restart State: Complete Path selection timeout: 300
    Interfaces:
      t3-0/0/0.103
    Route-distinguisher: 10.255.14.176:103
    Vrf-import: [ BGP-INET-import ]
    Vrf-export: [ BGP-INET-export ]
    Tables:
      BGP-INET.inet.0    : 4 routes (4 active, 0 holddown, 0 hidden)
      Restart Complete
  BGP-L:
    Router ID: 10.69.104.1
    Type: vrf           State: Active
    Restart State: Complete Path selection timeout: 300
    Interfaces:
      t3-0/0/0.104
    Route-distinguisher: 10.255.14.176:104
    Vrf-import: [ BGP-L-import ]
    Vrf-export: [ BGP-L-export ]
    Tables:

```

```
BGP-L.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
BGP-L.mpls.0          : 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
L2VPN:
Router ID: 0.0.0.0
Type: l2vpn            State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.512
Route-distinguisher: 10.255.14.176:512
Vrf-import: [ L2VPN-import ]
Vrf-export: [ L2VPN-export ]
Tables:
  L2VPN.l2vpn.0        : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
LDP:
Router ID: 10.69.105.1
Type: vrf              State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.105
Route-distinguisher: 10.255.14.176:105
Vrf-import: [ LDP-import ]
Vrf-export: [ LDP-export ]
Tables:
  LDP.inet.0           : 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
OSPF:
Router ID: 10.69.101.1
Type: vrf              State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.101
Route-distinguisher: 10.255.14.176:101
Vrf-import: [ OSPF-import ]
Vrf-export: [ OSPF-export ]
Vrf-import-target: [ target:11111
Tables:
  OSPF.inet.0          : 8 routes (7 active, 0 holddown, 0 hidden)
Restart Complete
RIP:
Router ID: 10.69.102.1
Type: vrf              State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.102
Route-distinguisher: 10.255.14.176:102
Vrf-import: [ RIP-import ]
Vrf-export: [ RIP-export ]
Tables:
  RIP.inet.0           : 6 routes (6 active, 0 holddown, 0 hidden)
Restart Complete
STATIC:
Router ID: 10.69.100.1
Type: vrf              State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.100
Route-distinguisher: 10.255.14.176:100
Vrf-import: [ STATIC-import ]
```

```

Vrf-export: [ STATIC-export ]
Tables:
  STATIC.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
  Restart Complete

```

show route instance detail (Graceful Restart Incomplete)

```

user@host> show route instance detail
master:
  Router ID: 10.255.14.176
  Type: forwarding      State: Active
  Restart State: Pending Path selection timeout: 300
  Tables:
    inet.0              : 17 routes (15 active, 1 holddown, 1 hidden)
    Restart Pending: OSPF LDP
    inet.3              : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Pending: OSPF LDP
    iso.0               : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0              : 23 routes (23 active, 0 holddown, 0 hidden)
    Restart Pending: LDP VPN
    bgp.l3vpn.0         : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
    inet6.0             : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0         : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
  BGP-INET:
    Router ID: 10.69.103.1
    Type: vrf            State: Active
    Restart State: Pending Path selection timeout: 300
    Interfaces:
      t3-0/0/0.103
    Route-distinguisher: 10.255.14.176:103
    Vrf-import: [ BGP-INET-import ]
    Vrf-export: [ BGP-INET-export ]
    Tables:
      BGP-INET.inet.0    : 6 routes (5 active, 0 holddown, 0 hidden)
      Restart Pending: VPN
  BGP-L:
    Router ID: 10.69.104.1
    Type: vrf            State: Active
    Restart State: Pending Path selection timeout: 300
    Interfaces:
      t3-0/0/0.104
    Route-distinguisher: 10.255.14.176:104
    Vrf-import: [ BGP-L-import ]
    Vrf-export: [ BGP-L-export ]
    Tables:
      BGP-L.inet.0       : 6 routes (5 active, 0 holddown, 0 hidden)
      Restart Pending: VPN
      BGP-L.mpls.0       : 2 routes (2 active, 0 holddown, 0 hidden)
      Restart Pending: VPN
  L2VPN:
    Router ID: 0.0.0.0
    Type: l2vpn          State: Active
    Restart State: Pending Path selection timeout: 300
    Interfaces:
      t3-0/0/0.512
    Route-distinguisher: 10.255.14.176:512
    Vrf-import: [ L2VPN-import ]

```

```

Vrf-export: [ L2VPN-export ]
Tables:
  L2VPN.l2vpn.0          : 2 routes (2 active, 0 holddown, 0 hidden)
  Restart Pending: VPN L2VPN
LDP:
  Router ID: 10.69.105.1
  Type: vrf               State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.105
  Route-distinguisher: 10.255.14.176:105
  Vrf-import: [ LDP-import ]
  Vrf-export: [ LDP-export ]
  Tables:
    LDP.inet.0           : 5 routes (4 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF LDP VPN
OSPF:
  Router ID: 10.69.101.1
  Type: vrf               State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.101
  Route-distinguisher: 10.255.14.176:101
  Vrf-import: [ OSPF-import ]
  Vrf-export: [ OSPF-export ]
  Tables:
    OSPF.inet.0          : 8 routes (7 active, 1 holddown, 0 hidden)
    Restart Pending: OSPF VPN
RIP:
  Router ID: 10.69.102.1
  Type: vrf               State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.102
  Route-distinguisher: 10.255.14.176:102
  Vrf-import: [ RIP-import ]
  Vrf-export: [ RIP-export ]
  Tables:
    RIP.inet.0           : 8 routes (6 active, 2 holddown, 0 hidden)
    Restart Pending: RIP VPN
STATIC:
  Router ID: 10.69.100.1
  Type: vrf               State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.100
  Route-distinguisher: 10.255.14.176:100
  Vrf-import: [ STATIC-import ]
  Vrf-export: [ STATIC-export ]
  Tables:
    STATIC.inet.0        : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Pending: VPN

```

show route instance detail (VPLS Routing Instance)

```

user@host> show route instance detail test-vpls
test-vpls:
  Router ID: 0.0.0.0
  Type: vpls              State: Active
  Interfaces:
    lsi.1048833

```

```

1si.1048832
fe-0/1/0.513
Route-distinguisher: 10.255.37.65:1
Vrf-import: [ __vrf-import-test-vpls-internal__ ]
Vrf-export: [ __vrf-export-test-vpls-internal__ ]
Vrf-import-target: [ target:300:1 ]
Vrf-export-target: [ target:300:1 ]
Fast-reroute-priority: high
Tables:
  test-vpls.l2vpn.0          : 3 routes (3 active, 0 holddown, 0 hidden)

```

show route instance operational

```

user@host> show route instance operational
Operational Routing Instances:

master
default

```

show route instance summary

```

user@host> show route instance summary

```

Instance	Type	Primary rib	Active/holddown/hidden
master	forwarding	inet.0	15/0/1
		iso.0	1/0/0
		mpls.0	35/0/0
		l3vpn.0	0/0/0
		inet6.0	2/0/0
		l2vpn.0	0/0/0
		l2circuit.0	0/0/0
BGP-INET	vrf	BGP-INET.inet.0	5/0/0
		BGP-INET.iso.0	0/0/0
		BGP-INET.inet6.0	0/0/0
BGP-L	vrf	BGP-L.inet.0	5/0/0
		BGP-L.iso.0	0/0/0
		BGP-L.mpls.0	4/0/0
		BGP-L.inet6.0	0/0/0
L2VPN	l2vpn	L2VPN.inet.0	0/0/0
		L2VPN.iso.0	0/0/0
		L2VPN.inet6.0	0/0/0
		L2VPN.l2vpn.0	2/0/0
LDP	vrf	LDP.inet.0	4/0/0
		LDP.iso.0	0/0/0
		LDP.mpls.0	0/0/0
		LDP.inet6.0	0/0/0
		LDP.l2circuit.0	0/0/0
OSPF	vrf	OSPF.inet.0	7/0/0
		OSPF.iso.0	0/0/0
		OSPF.inet6.0	0/0/0
RIP	vrf	RIP.inet.0	6/0/0
		RIP.iso.0	0/0/0
		RIP.inet6.0	0/0/0
STATIC	vrf	STATIC.inet.0	4/0/0

STATIC.iso.0	0/0/0
STATIC.inet6.0	0/0/0

show route label

List of Syntax	Syntax on page 285 Syntax (EX Series Switches) on page 285
Syntax	show route label <i>label</i> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show route label <i>label</i> <brief detail extensive terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.5 for EX Series switches.
Description	Display the routes based on a specified Multiprotocol Label Switching (MPLS) label value.
Options	<p><i>label</i>—Value of the MPLS label.</p> <p>brief detail extensive terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> Example: Configuring Multipoint LDP In-Band Signaling for Point-to-Multipoint LSPs
List of Sample Output	show route label terse on page 285 show route label on page 286 show route label detail on page 286 show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 286 show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 287 show route label extensive on page 287
Output Fields	For information about output fields, see the output field table for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route label terse

```

user@host> show route label 100016 terse

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

```

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
* 100016	V 170			>10.12.80.1	

show route label

```
user@host> show route label 100016
```

```
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
100016          *[VPN/170] 03:25:41
                > to 10.12.80.1 via ge-6/3/2.0, Pop
```

show route label detail

```
user@host> show route label 100016 detail
```

```
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
100016 (1 entry, 1 announced)
    *VPN      Preference: 170
              Next-hop reference count: 2
              Source: 10.12.80.1
              Next hop: 10.12.80.1 via ge-6/3/2.0, selected
              Label operation: Pop
              State: <Active Int Ext>
              Local AS: 1
              Age: 3:23:31
              Task: BGP.0.0.0.0+179
              Announcement bits (1): 0-KRT
              AS path: 100 I
              Ref Cnt: 2
```

show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```
user@host> show route label 299872 detail
```

```
mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
    *LDP      Preference: 9
              Next hop type: Flood
              Next-hop reference count: 3
              Address: 0x9097d90
              Next hop: via vt-0/1/0.1
              Next-hop index: 661
              Label operation: Pop
              Address: 0x9172130
              Next hop: via so-0/0/3.0
              Next-hop index: 654
              Label operation: Swap 299872
              State: **Active Int>
              Local AS: 1001
              Age: 8:20      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              FECs bound to route: P2MP root-addr 10.255.72.166, grp 232.1.1.1,
src 192.168.142.2
```


show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```

user@host> show route label 301568 detail

mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
  *LDP    Preference: 9
          Next hop type: Flood
          Address: 0x2735208
          Next-hop reference count: 3
          Next hop type: Router, Next hop index: 1397
          Address: 0x2735d2c
          Next-hop reference count: 3
          Next hop: 1.3.8.2 via ge-1/2/22.0
          Label operation: Pop
          Load balance label: None;
          Next hop type: Router, Next hop index: 1395
          Address: 0x2736290
          Next-hop reference count: 3
          Next hop: 1.3.4.2 via ge-1/2/18.0
          Label operation: Pop
          Load balance label: None;
          State: <Active Int AckRequest MulticastRPF>
          Local AS: 10
          Age: 54:05      Metric: 1
          Validation State: unverified
          Task: LDP
          Announcement bits (1): 0-KRT
          AS path: I
          FECs bound to route: P2MP root-addr 1.1.1.1, grp: 232.1.1.1, src:
192.168.219.11
          Primary Upstream : 1.1.1.3:0--1.1.1.2:0
          RPF Nexthops :
              ge-1/2/15.0, 1.2.94.1, Label: 301568, weight: 0x1
              ge-1/2/14.0, 1.2.3.1, Label: 301568, weight: 0x1
          Backup Upstream : 1.1.1.3:0--1.1.1.6:0
          RPF Nexthops :
              ge-1/2/20.0, 1.2.96.1, Label: 301584, weight: 0xffffe
              ge-1/2/19.0, 1.3.6.1, Label: 301584, weight: 0xffffe

```

show route label extensive

The output for the **show route label extensive** command is identical to that of the **show route label detail** command. For sample output, see [show route label detail on page 286](#).

show route label-switched-path

List of Syntax	Syntax on page 288 Syntax (EX Series Switches) on page 288
Syntax	show route label-switched-path <i>path-name</i> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show route label-switched-path <i>path-name</i> <brief detail extensive terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.5 for EX Series switches.
Description	Display the routes used in an MPLS label-switched path (LSP).
Options	brief detail extensive terse —(Optional) Display the specified level of output. <i>path-name</i> —LSP tunnel name. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route label-switched-path on page 288
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route label-switched-path

```

user@host> show route label-switched-path sf-to-ny
inet.0: 29 destinations, 29 routes (29 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.1/32          [MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
3.3.3.3/32          *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2.2.2.2/32          *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
4.4.4.4/32          *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path abc
> to 111.222.1.9 via s0-0/0/0, label-switched-path xyz
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

```

```
111.222.1.9/32      [MPLS/7] 00:00:06, metric 0  
                   > to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)  
+ = Active Route, - = Last Active, * = Both
```

```
mpls.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)  
+ = Active Route, - = Last Active, * = Both
```

show route martians

List of Syntax	Syntax on page 290 Syntax (EX Series Switches) on page 290
Syntax	<pre>show route martians <logical-system (all <i>logical-system-name</i>)> <table <i>routing-table-name</i>></pre>
Syntax (EX Series Switches)	<pre>show route martians <table <i>routing-table-name</i>></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display the martian (invalid and ignored) entries associated with each routing table.
Options	<p>none—Display standard information about route martians for all routing tables.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>table <i>routing-table-name</i>—(Optional) Display information about route martians for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the show route martians table inet command).</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> Example: Configuring Martian Addresses
List of Sample Output	show route martians on page 291
Output Fields	<p>Table 29 on page 290 lists the output fields for the show route martians command. Output fields are listed in the approximate order in which they appear</p>

Table 29: show route martians Output Fields

Field Name	Field Description
<i>table-name</i>	Name of the route table in which the route martians reside.
<i>destination-prefix</i>	Route destination.
<i>match value</i>	Route match parameter.
<i>status</i>	Status of the route: allowed or disallowed .

Sample Output

show route martians

```

user@host> show route martians

inet.0:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

inet.1:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed

inet.2:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

inet.3:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

...

inet6.0:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed

inet6.1:
    ::1/128 exact -- disallowed

inet6.2:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed

inet6.3:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed

...

```

show route next-hop

List of Syntax	Syntax on page 292 Syntax (EX Series Switches) on page 292
Syntax	<pre>show route next-hop <i>next-hop</i> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switches)	<pre>show route next-hop <i>next-hop</i> <brief detail extensive terse></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display the entries in the routing table that are being sent to the specified next-hop address.
Options	<p>brief detail extensive terse—(Optional) Display the specified level of output.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><i>next-hop</i>—Next-hop address.</p>
Required Privilege Level	view
List of Sample Output	show route next-hop on page 292 show route next-hop detail on page 293 show route next-hop extensive on page 295 show route next-hop terse on page 296
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route next-hop

```
user@host> show route next-hop 192.168.71.254

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
172.16.0.0/12    *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
192.168.0.0/16   *[Static/5] 06:26:25
```

```

> to 192.168.71.254 via fxp0.0
192.168.102.0/23  *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
207.17.136.0/24  *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
207.17.136.192/32 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

show route next-hop detail

```

user@host> show route next-hop 192.168.71.254 detail

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

172.16.0.0/12 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2

```

```
AS path: I

192.168.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

192.168.102.0/23 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.0/24 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.192/32 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```


show route next-hop extensive

```
user@host> show route next-hop 192.168.71.254 extensive
```

```
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
```

```
10.10.0.0/16 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
10.209.0.0/16 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
172.16.0.0/12 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
192.168.0.0/16 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 192.168.0.0/16 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
192.168.102.0/23 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 192.168.102.0/23 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```

Next-hop reference count: 22
Next hop: 192.168.71.254 via fxp0.0, selected
State: <Active NoReadvrt Int Ext>
Local AS: 69
Age: 2:02:28
Task: RT
Announcement bits (1): 0-KRT
AS path: I

207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
*Static Preference: 5
Next-hop reference count: 22
Next hop: 192.168.71.254 via fxp0.0, selected
State: <Active NoReadvrt Int Ext>
Local AS: 69
Age: 2:02:28
Task: RT
Announcement bits (1): 0-KRT
AS path: I

207.17.136.192/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.192/32 -> {192.168.71.254}
*Static Preference: 5
Next-hop reference count: 22
Next hop: 192.168.71.254 via fxp0.0, selected
State: <Active NoReadvrt Int Ext>
Local AS: 69
Age: 2:02:28
Task: RT
Announcement bits (1): 0-KRT
AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

red.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

show route next-hop terse

```

user@host> show route next-hop 192.168.71.254 terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* 10.10.0.0/16     S  5          5          >192.168.71.254
* 10.209.0.0/16    S  5          5          >192.168.71.254
* 172.16.0.0/12    S  5          5          >192.168.71.254

```

```
* 192.168.0.0/16      S   5                >192.168.71.254
* 192.168.102.0/23   S   5                >192.168.71.254
* 207.17.136.0/24    S   5                >192.168.71.254
* 207.17.136.192/32 S   5                >192.168.71.254

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

show route no-community

List of Syntax	Syntax on page 298 Syntax (EX Series Switches) on page 298
Syntax	show route no-community <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show route no-community <brief detail extensive terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the route entries in each routing table that are not associated with any community.
Options	<p>none—(Same as brief) Display the route entries in each routing table that are not associated with any community.</p> <p>brief detail extensive terse—(Optional) Display the specified level of output.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
List of Sample Output	show route no-community on page 298 show route no-community detail on page 299 show route no-community extensive on page 299 show route no-community terse on page 300
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route no-community

```

user@host> show route no-community
inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 00:36:27
> to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 00:36:27
> to 192.168.71.254 via fxp0.0
10.255.71.52/32  *[Direct/0] 00:36:27
> via lo0.0
10.255.71.63/32  *[OSPF/10] 00:04:39, metric 1
> to 35.1.1.2 via ge-3/1/0.0
10.255.71.64/32  *[OSPF/10] 00:00:08, metric 2

```

```

> to 35.1.1.2 via ge-3/1/0.0
10.255.71.240/32 * [OSPF/10] 00:05:04, metric 2
                  via so-0/1/2.0
> via so-0/3/2.0
10.255.71.241/32 * [OSPF/10] 00:05:14, metric 1
> via so-0/1/2.0
10.255.71.242/32 * [OSPF/10] 00:05:19, metric 1
> via so-0/3/2.0
12.1.1.0/24      * [OSPF/10] 00:05:14, metric 2
> via so-0/3/2.0
14.1.1.0/24      * [OSPF/10] 00:00:08, metric 3
> to 35.1.1.2 via ge-3/1/0.0
                  via so-0/1/2.0
                  via so-0/3/2.0
16.1.1.0/24      * [OSPF/10] 00:05:14, metric 2
> via so-0/1/2.0
.....

```

show route no-community detail

```

user@host> show route no-community detail

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 38:08
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 38:08
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

....

```

show route no-community extensive

```

user@host> show route no-community extensive

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:03:33
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

```

```

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:03:33
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

```

show route no-community terse

```
user@host> show route no-community terse
```

```

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.10.0.0/16	S	5			>192.168.71.254	
*	10.209.0.0/16	S	5			>192.168.71.254	
*	10.255.71.52/32	D	0			>100.0	
*	10.255.71.63/32	0	10	1		>35.1.1.2	
*	10.255.71.64/32	0	10	2		>35.1.1.2	
*	10.255.71.240/32	0	10	2		so-0/1/2.0	
						>so-0/3/2.0	
*	10.255.71.241/32	0	10	1		>so-0/1/2.0	
*	10.255.71.242/32	0	10	1		>so-0/3/2.0	
*	12.1.1.0/24	0	10	2		>so-0/3/2.0	
*	14.1.1.0/24	0	10	3		>35.1.1.2	
						so-0/1/2.0	
						so-0/3/2.0	
*	16.1.1.0/24	0	10	2		>so-0/1/2.0	
...							

show route protocol

List of Syntax	Syntax on page 301 Syntax (EX Series Switches) on page 301
Syntax	<pre>show route protocol <i>protocol</i> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switches)	<pre>show route protocol <i>protocol</i> <brief detail extensive terse></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>ospf2 and ospf3 options introduced in Junos OS Release 9.2.</p> <p>ospf2 and ospf3 options introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>flow option introduced in Junos OS Release 10.0.</p> <p>flow option introduced in Junos OS Release 10.0 for EX Series switches.</p>
Description	Display the route entries in the routing table that were learned from a particular protocol.
Options	<p>brief detail extensive terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><i>protocol</i>—Protocol from which the route was learned:</p> <ul style="list-style-type: none"> • access—Access route for use by DHCP application • access-internal—Access-internal route for use by DHCP application • aggregate—Locally generated aggregate route • arp—Route learned through the Address Resolution Protocol • atmvpn—Asynchronous Transfer Mode virtual private network • bgp—Border Gateway Protocol • ccc—Circuit cross-connect • direct—Directly connected route • dvmrp—Distance Vector Multicast Routing Protocol • esis—End System-to-Intermediate System • flow—Locally defined flow-specification route • frr—Precomputed protection route or backup route used when a link goes down • isis—Intermediate System-to-Intermediate System • ldp—Label Distribution Protocol • l2circuit—Layer 2 circuit

- **l2vpn**—Layer 2 virtual private network
- **local**—Local address
- **mpls**—Multiprotocol Label Switching
- **msdp**—Multicast Source Discovery Protocol
- **ospf**—Open Shortest Path First versions 2 and 3
- **ospf2**—Open Shortest Path First versions 2 only
- **ospf3**—Open Shortest Path First version 3 only
- **pim**—Protocol Independent Multicast
- **rip**—Routing Information Protocol
- **ripng**—Routing Information Protocol next generation
- **rsvp**—Resource Reservation Protocol
- **rtarget**—Local route target virtual private network
- **static**—Statically defined route
- **tunnel**—Dynamic tunnel
- **vpn**—Virtual private network



NOTE: EX Series switches run a subset of these protocols. See the switch CLI for details.

Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • <i>MPLS Feature Support on QFX Series and EX4600 Switches</i>
List of Sample Output	show route protocol access on page 303 show route protocol access-internal extensive on page 303 show route protocol arp on page 303 show route protocol bgp on page 304 show route protocol bgp detail on page 304 show route protocol bgp extensive on page 304 show route protocol bgp terse on page 305 show route protocol direct on page 305 show route protocol frr on page 306 show route protocol l2circuit detail on page 306 show route protocol l2vpn extensive on page 307 show route protocol ldp on page 308 show route protocol ldp extensive on page 308 show route protocol ospf (Layer 3 VPN) on page 309 show route protocol ospf detail on page 310

[show route protocol rip on page 310](#)
[show route protocol rip detail on page 310](#)
[show route protocol ripng table inet6 on page 311](#)
[show route protocol static detail on page 311](#)

Output Fields For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.

Sample Output

show route protocol access

```

user@host> show route protocol access
inet.0: 30380 destinations, 30382 routes (30379 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

13.160.0.3/32      *[Access/13] 00:00:09
                  > to 13.160.0.2 via fe-0/0/0.0
13.160.0.4/32      *[Access/13] 00:00:09
                  > to 13.160.0.2 via fe-0/0/0.0
13.160.0.5/32      *[Access/13] 00:00:09
                  > to 13.160.0.2 via fe-0/0/0.0

```

show route protocol access-internal extensive

```

user@host> show route protocol access-internal 13.160.0.19 extensive
inet.0: 100020 destinations, 100022 routes (100019 active, 0 holddown, 1 hidden)
13.160.0.19/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 13.160.0.19/32 -> {13.160.0.2}
    *Access-internal Preference: 12
        Next-hop reference count: 200000
        Next hop: 13.160.0.2 via fe-0/0/0.0, selected
        State: <Active Int>
    Age: 36
        Task: RPD Unix Domain Server./var/run/rpd_serv.local
        Announcement bits (1): 0-KRT
        AS path: I

```

show route protocol arp

```

user@host> show route protocol arp
inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.4/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.5/32      [ARP/4294967293] 00:04:32, from 20.20.1.1
                  Unusable
20.20.1.6/32      [ARP/4294967293] 00:04:34, from 20.20.1.1
                  Unusable
20.20.1.7/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable

```

```

20.20.1.8/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.9/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.10/32     [ARP/4294967293] 00:04:35, from 20.20.1.1
                  Unusable
20.20.1.11/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
                  Unusable
20.20.1.12/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
                  Unusable
20.20.1.13/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
                  Unusable
...

```

show route protocol bgp

```

user@host> show route protocol bgp 192.168.64.0/21
inet.0: 335832 destinations, 335833 routes (335383 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.64.0/21    *[BGP/170] 6d 10:41:16, localpref 100, from 192.168.69.71
                  AS path: 10458 14203 2914 4788 4788 I
                  > to 192.168.167.254 via fxp0.0

```

show route protocol bgp detail

```

user@host> show route protocol bgp 66.117.63.0/24 detail
inet.0: 335805 destinations, 335806 routes (335356 active, 0 holddown, 450 hidden)
66.117.63.0/24    (1 entry, 1 announced)
    *BGP          Preference: 170/-101
                  Next hop type: Indirect
                  Next-hop reference count: 1006436
                  Source: 192.168.69.71
                  Next hop type: Router, Next hop index: 324
                  Next hop: 192.168.167.254 via fxp0.0, selected
                  Protocol next hop: 192.168.69.71
                  Indirect next hop: 8e166c0 342
                  State: <Active Ext>
                  Local AS: 69 Peer AS: 10458
                  Age: 6d 10:42:42 Metric2: 0
                  Task: BGP_10458.192.168.69.71+179
                  Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree

1

    AS path: 10458 14203 2914 4788 4788 I
    Communities: 2914:410 2914:2403 2914:3400
    Accepted
    Localpref: 100
    Router ID: 207.17.136.192

```

show route protocol bgp extensive

```

user@host> show route protocol bgp 192.168.64.0/21 extensive

inet.0: 335827 destinations, 335828 routes (335378 active, 0 holddown, 450 hidden)
192.168.64.0/21 (1 entry, 1 announced)
TSI:
KRT in-kernel 1.9.0.0/16 -> {indirect(342)}
Page 0 idx 1 Type 1 val db31a80
  Nexthop: Self
  AS path: [69] 10458 14203 2914 4788 4788 I
  Communities: 2914:410 2914:2403 2914:3400
Path 1.9.0.0 from 192.168.69.71 Vector len 4. Val: 1

```

```

*BGP      Preference: 170/-101
          Next hop type: Indirect
          Next-hop reference count: 1006502
          Source: 192.168.69.71
          Next hop type: Router, Next hop index: 324
          Next hop: 192.168.167.254 via fxp0.0, selected
          Protocol next hop: 192.168.69.71
          Indirect next hop: 8e166c0 342
          State: <Active Ext>
          Local AS: 69 Peer AS: 10458
          Age: 6d 10:44:45 Metric2: 0
          Task: BGP_10458.192.168.69.71+179
          Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree

1
          AS path: 10458 14203 2914 4788 4788 I
          Communities: 2914:410 2914:2403 2914:3400
          Accepted
          Localpref: 100
          Router ID: 207.17.136.192
          Indirect next hops: 1
            Protocol next hop: 192.168.69.71
            Indirect next hop: 8e166c0 342
            Indirect path forwarding next hops: 1
              Next hop type: Router
              Next hop: 192.168.167.254 via fxp0.0
            192.168.0.0/16 Originating RIB: inet.0
              Node path count: 1
              Forwarding nexthops: 1
                Nexthop: 192.168.167.254 via fxp0.0

```

show route protocol bgp terse

```
user@host> show route protocol bgp 192.168.64.0/21 terse
```

```
inet.0: 24 destinations, 32 routes (23 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
192.168.64.0/21	B 170	100		>100.1.3.2	10023 21 I

show route protocol direct

```
user@host> show route protocol direct
```

```
inet.0: 335843 destinations, 335844 routes (335394 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both
```

```

8.8.8.0/24      *[Direct/0] 17w0d 10:31:49
                 > via fe-1/3/1.0
10.255.165.1/32 *[Direct/0] 25w4d 04:13:18
                 > via lo0.0
30.30.30.0/24   *[Direct/0] 17w0d 23:06:26
                 > via fe-1/3/2.0
192.168.164.0/22 *[Direct/0] 25w4d 04:13:20
                 > via fxp0.0

```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```

47.0005.80ff.f800.0000.0108.0001.0102.5516.5001/152
*[Direct/0] 25w4d 04:13:21

```

```

> via lo0.0

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

abcd::10:255:165:1/128
    *[Direct/0] 25w4d 04:13:21
    > via lo0.0
fe80::2a0:a5ff:fe12:ad7/128
    *[Direct/0] 25w4d 04:13:21
    > via lo0.0

```

show route protocol frr

```

user@host> show route protocol frr
inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.3 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.4/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.4 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.5/32      *[FRR/200] 00:05:35, from 20.20.1.1
                  > to 20.20.1.5 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.6/32      *[FRR/200] 00:05:37, from 20.20.1.1
                  > to 20.20.1.6 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.7/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.7 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.8/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.8 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.9/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.9 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.10/32     *[FRR/200] 00:05:38, from 20.20.1.1
...

```

show route protocol l2circuit detail

```

user@host> show route protocol l2circuit detail

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
100000 (1 entry, 1 announced)
    *L2CKT Preference: 7
        Next hop: via ge-2/0/0.0, selected
        Label operation: Pop      Offset: 4
        State: <Active Int>
        Local AS: 99
        Age: 9:52
        Task: Common L2 VC
        Announcement bits (1): 0-KRT
        AS path: I

```

```

ge-2/0/0.0 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000, Push 100000(top)[0] Offset: -4
    Protocol next hop: 10.245.255.63
    Push 100000 Offset: -4
    Indirect next hop: 86af0c0 298
    State: <Active Int>
    Local AS: 99
    Age: 9:52
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 1-Common L2 VC
    AS path: I

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000[0]
    Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
    State: <Active Int>
    Local AS: 99
    Age: 10:21
    Task: l2 circuit
    Announcement bits (1): 0-LDP
    AS path: I
    VC Label 100000, MTU 1500, VLAN ID 512

```

show route protocol l2vpn extensive

```

user@host> show route protocol l2vpn extensive

inet.0: 14 destinations, 15 routes (13 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
800001 (1 entry, 1 announced)
TSI:
KRT in-kernel 800001 /36 -> {so-0/0/0.0}
  *L2VPN Preference: 7
    Next hop: via so-0/0/0.0 weight 49087 balance 97%, selected
    Label operation: Pop Offset: 4
    State: <Active Int>
    Local AS: 69
    Age: 7:48
    Task: Common L2 VC
    Announcement bits (1): 0-KRT
    AS path: I

so-0/0/0.0 (1 entry, 1 announced)
TSI:
KRT in-kernel so-0/0/0.0 /16 -> {indirect(288)}
  *L2VPN Preference: 7
    Next hop: via so-0/0/1.0, selected

```

```

Label operation: Push 800000 Offset: -4
Protocol next hop: 10.255.14.220
Push 800000 Offset: -4
  Indirect next hop: 85142a0 288
State: <Active Int>
Local AS: 69
Age: 7:48
Task: Common L2 VC
Announcement bits (2): 0-KRT 1-Common L2 VC
AS path: I
Communities: target:69:1 Layer2-info: encaps:PPP,
control flags:2, mtu: 0

```

show route protocol ldp

```

user@host> show route protocol ldp
inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.16.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Push 100000
192.168.17.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0

private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

100064            *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Pop
100064(S=0)        *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Pop
100080            *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Swap 100000

```

show route protocol ldp extensive

```

user@host> show route protocol ldp extensive
192.168.16.1/32 (1 entry, 1 announced)
  State: <FlashAll>
  *LDP    Preference: 9
          Next-hop reference count: 3
          Next hop: via t1-4/0/0.0, selected
          Label operation: Push 100000
          State: <Active Int>
          Local AS: 65500
          Age: 1d 23:03:58      Metric: 1
          Task: LDP
          Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
          AS path: I

192.168.17.1/32 (1 entry, 1 announced)
  State: <FlashAll>
  *LDP    Preference: 9
          Next-hop reference count: 3
          Next hop: via t1-4/0/0.0, selected
          State: <Active Int>
          Local AS: 65500

```

```

Age: 1d 23:03:58      Metric: 1
Task: LDP
Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
AS path: I

private1__inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)

100064 (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /36 -> {t1-4/0/0.0}
    *LDP      Preference: 9
              Next-hop reference count: 2
              Next hop: via t1-4/0/0.0, selected
              State: <Active Int>
              Local AS: 65500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              Prefixes bound to route: 192.168.17.1/32

100064(S=0) (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /40 -> {t1-4/0/0.0}
    *LDP      Preference: 9
              Next-hop reference count: 2
              Next hop: via t1-4/0/0.0, selected
              Label operation: Pop
              State: <Active Int>
              Local AS: 65500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I

100080 (1 entry, 1 announced)
TSI:
KRT in-kernel 100080 /36 -> {t1-4/0/0.0}
    *LDP      Preference: 9
              Next-hop reference count: 2
              Next hop: via t1-4/0/0.0, selected
              Label operation: Swap 100000
              State: <Active Int>
              Local AS: 65500
              Age: 1d 23:03:58      Metric: 1
              Task: LDP
              Announcement bits (1): 0-KRT
              AS path: I
              Prefixes bound to route: 192.168.16.1/32

```

show route protocol ospf (Layer 3 VPN)

```

user@host> show route protocol ospf
inet.0: 40 destinations, 40 routes (39 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.4/30      * [OSPF/10] 00:05:18, metric 4
                  > via t3-3/2/0.0
10.39.1.8/30      [OSPF/10] 00:05:18, metric 2

```

```

> via t3-3/2/0.0
10.255.14.171/32  *[OSPF/10] 00:05:18, metric 4
> via t3-3/2/0.0
10.255.14.179/32  *[OSPF/10] 00:05:18, metric 2
> via t3-3/2/0.0
224.0.0.5/32     *[OSPF/10] 20:25:55, metric 1

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30     [OSPF/10] 00:05:43, metric 1
> via so-0/2/2.0
10.255.14.173/32  *[OSPF/10] 00:05:43, metric 1
> via so-0/2/2.0
224.0.0.5/32     *[OSPF/10] 20:26:20, metric 1

```

show route protocol ospf detail

```

user@host> show route protocol ospf detail
VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30 (2 entries, 0 announced)
  OSPF   Preference: 10
        Nexthop: via so-0/2/2.0, selected
        State: <Int>
        Inactive reason: Route Preference
        Age: 6:25      Metric: 1
        Area: 0.0.0.0
        Task: VPN-AB-OSPF
        AS path: I
        Communities: Route-Type:0.0.0.0:1:0

...

```

show route protocol rip

```

user@host> show route protocol rip
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32  *[RIP/100] 20:24:34, metric 2
> to 10.39.1.22 via t3-0/2/2.0
224.0.0.9/32     *[RIP/100] 00:03:59, metric 1

```

show route protocol rip detail

```

user@host> show route protocol rip detail
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 (1 entry, 1 announced)
  *RIP   Preference: 100
        Nexthop: 10.39.1.22 via t3-0/2/2.0, selected
        State: <Active Int>
        Age: 20:25:02  Metric: 2
        Task: VPN-AB-RIPv2
        Announcement bits (2): 0-KRT 2-BGP.0.0.0.0+179

```



```
AS path: I
Route learned from 10.39.1.22 expires in 96 seconds
```

show route protocol ripng table inet6

```
user@host> show route protocol ripng table inet6
inet6.0: 4215 destinations, 4215 routes (4214 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

1111::1/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::2/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::3/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::4/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::5/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::6/128      *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
```

show route protocol static detail

```
user@host> show route protocol static detail
inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
10.5.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next hop type: Router, Next hop index: 324
        Address: 0x9274010
        Next-hop reference count: 27
        Next hop: 192.168.187.126 via fxp0.0, selected
        Session Id: 0x0
        State: <Active NoReadvrt Int Ext>
        Age: 7w3d 21:24:25
        Validation State: unverified
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.10.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next hop type: Router, Next hop index: 324
        Address: 0x9274010
        Next-hop reference count: 27
        Next hop: 192.168.187.126 via fxp0.0, selected
        Session Id: 0x0
        State: <Active NoReadvrt Int Ext>
        Age: 7w3d 21:24:25
        Validation State: unverified
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.13.10.0/23 (1 entry, 1 announced)
    *Static Preference: 5
        Next hop type: Router, Next hop index: 324
        Address: 0x9274010
        Next-hop reference count: 27
        Next hop: 192.168.187.126 via fxp0.0, selected
        Session Id: 0x0
```

State: <Active NoReadvrt Int Ext>
Age: 7w3d 21:24:25
Validation State: unverified
Task: RT
Announcement bits (1): 0-KRT
AS path: I

show route range

List of Syntax	Syntax on page 313 Syntax (EX Series Switches) on page 313
Syntax	<pre>show route range <brief detail extensive terse> <destination-prefix> <logical-system (all logical-system-name)></pre>
Syntax (EX Series Switches)	<pre>show route range <brief detail extensive terse> <destination-prefix></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display routing table entries using a prefix range.
Options	<p>none—Display standard information about all routing table entries using a prefix range.</p> <p>brief detail extensive terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p>destination-prefix—Destination and prefix mask for the range.</p> <p>logical-system (all logical-system-name)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
List of Sample Output	show route range on page 313 show route range destination-prefix on page 314 show route range detail on page 314 show route range extensive on page 315 show route range terse on page 316
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route range

```
user@host> show route range

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 00:30:01
```

```

10.255.71.14/32      > to 192.168.71.254 via fxp0.0
                    *[Direct/0] 00:30:01
                    > via lo0.0
172.16.0.0/12       *[Static/5] 00:30:01
                    > to 192.168.71.254 via fxp0.0
192.168.0.0/16      *[Static/5] 00:30:01
                    > to 192.168.71.254 via fxp0.0
192.168.64.0/21     *[Direct/0] 00:30:01
                    > via fxp0.0
192.168.71.14/32    *[Local/0] 00:30:01
                    Local via fxp0.0
192.168.102.0/23    *[Static/5] 00:30:01
                    > to 192.168.71.254 via fxp0.0
...

```

show route range destination-prefix

```

user@host> show route range 192.168.0.0/16

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.0.0/16      *[Static/5] 00:31:14
                    > to 192.168.71.254 via fxp0.0
192.168.64.0/21     *[Direct/0] 00:31:14
                    > via fxp0.0
192.168.71.14/32    *[Local/0] 00:31:14
                    Local via fxp0.0
192.168.102.0/23    *[Static/5] 00:31:14
                    > to 192.168.71.254 via fxp0.0

```

show route range detail

```

user@host> show route range detail

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:05
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:05
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.255.71.14/32 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected

```

```

        State: <Active Int>
        Age: 30:05
        Task: IF
        AS path: I

172.16.0.0/12 (1 entry, 1 announced)
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Age: 30:05
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

...

```

show route range extensive

```

user@host> show route range extensive

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Age: 30:17
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 22
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Age: 30:17
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.255.71.14/32 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active Int>
        Age: 30:17
        Task: IF
        AS path: I

172.16.0.0/12 (1 entry, 1 announced)
TSI:
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 22

```

```

Next hop: 192.168.71.254 via fxp0.0, selected
State: <Active NoReadvrt Int Ext>
Age: 30:17
Task: RT
Announcement bits (1): 0-KRT
AS path: I

```

```
...
```

show route range terse

```
user@host> show route range terse
```

```
inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.10.0.0/16	S	5			>192.168.71.254	
*	10.209.0.0/16	S	5			>192.168.71.254	
*	10.255.71.14/32	D	0			>100.0	
*	172.16.0.0/12	S	5			>192.168.71.254	
*	192.168.0.0/16	S	5			>192.168.71.254	
*	192.168.64.0/21	D	0			>fxp0.0	
*	192.168.71.14/32	L	0			Local	
*	192.168.102.0/23	S	5			>192.168.71.254	
*	207.17.136.0/24	S	5			>192.168.71.254	
*	207.17.136.192/32	S	5			>192.168.71.254	

```

__juniper_private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0
hidden)
+ = Active Route, - = Last Active, * = Both

```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.0.0.0/8	D	0			>fxp2.0	
		D	0			>fxp1.0	
*	10.0.0.4/32	L	0			Local	

```

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
	47.0005.80ff.f800.0000.0108.0001.0102.5507.1014/152						
*		D	0			>100.0	

```

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
	abcd::10:255:71:14/128						
*		D	0			>100.0	
	fe80::280:42ff:fe11:226f/128						
*		D	0			>100.0	

```

__juniper_private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0
hidden)
+ = Active Route, - = Last Active, * = Both

```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
	fe80::280:42ff:fe11:226f/128						
*		D	0			>100.16385	

show route receive-protocol

List of Syntax	Syntax on page 317 Syntax (EX Series Switches) on page 317
Syntax	show route receive-protocol <i>protocol neighbor-address</i> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	show route receive-protocol <i>protocol neighbor-address</i> <brief detail extensive terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the routing information as it was received through a particular neighbor using a particular dynamic routing protocol.
Options	<p>brief detail extensive terse—(Optional) Display the specified level of output.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><i>protocol neighbor-address</i>—Protocol transmitting the route (bgp, dvmrp, msdp, pim, rip, or ripng) and address of the neighboring router from which the route entry was received.</p>
Additional Information	The output displays the selected routes and the attributes with which they were received, but does not show the effects of import policy on the routing attributes.
Required Privilege Level	view
List of Sample Output	show route receive-protocol bgp on page 320 show route receive-protocol bgp extensive on page 320 show route receive-protocol bgp table extensive on page 320 show route receive-protocol bgp logical-system extensive on page 321 show route receive-protocol bgp detail (Layer 2 VPN) on page 322 show route receive-protocol bgp extensive (Layer 2 VPN) on page 322 show route receive-protocol bgp (Layer 3 VPN) on page 323 show route receive-protocol bgp detail (Layer 3 VPN) on page 323 show route receive-protocol bgp extensive (Layer 3 VPN) on page 324
Output Fields	Table 30 on page 317 describes the output fields for the show route receive-protocol command. Output fields are listed in the approximate order in which they appear.

Table 30: show route receive-protocol Output Fields

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table—for example, inet.0.	All levels

Table 30: show route receive-protocol Output Fields (*continued*)

Field Name	Field Description	Level of Output
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.	All levels
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> • active • holddown (routes that are in pending state before being declared inactive) • hidden (routes that are not used because of a routing policy) 	All levels
Prefix	Destination prefix.	none brief
MED	Multiple exit discriminator value included in the route.	none brief
<i>destination-prefix (entry, announced)</i>	Destination prefix. The entry value is the number of routes for this destination, and the announced value is the number of routes being announced for this destination.	detail extensive
Route Distinguisher	64-bit prefix added to IP subnets to make them unique.	detail extensive
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.	detail extensive
VPN Label	Virtual private network (VPN) label. Packets are sent between CE and PE routing devices by advertising VPN labels. VPN labels transit over either an RSVP or an LDP label-switched path (LSP) tunnel.	detail extensive
Next hop	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	All levels
Localpref or Lclpref	Local preference value included in the route.	All levels

Table 30: show route receive-protocol Output Fields (*continued*)

Field Name	Field Description	Level of Output
AS path	<p>Autonomous system (AS) path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> • I—IGP. • E—EGP. • ?—Incomplete; typically, the AS path was aggregated. <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> • []—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used the AS-path merge process, as defined in RFC 4893. • []—If more than one AS number is configured on the router, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path. • { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. • ()—Parentheses enclose a confederation. • ([])—Parentheses and brackets enclose a confederation set. <p>NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>	All levels
Cluster list	(For route reflected output only) Cluster ID sent by the route reflector.	detail extensive
Originator ID	(For route reflected output only) Address of routing device that originally sent the route to the route reflector.	detail extensive
Communities	Community path attribute for the route. See the Output Field table in the show route detail command for all possible values for this field.	detail extensive
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.	detail extensive
Attrset AS	Number, local preference, and path of the AS that originated the route. These values are stored in the Attrset attribute at the originating routing device.	detail extensive
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).	detail extensive
control flags	Control flags: none or Site Down .	detail extensive
mtu	Maximum transmission unit (MTU) of the Layer 2 circuit.	detail extensive

Sample Output

show route receive-protocol bgp

```
user@host> show route receive-protocol bgp 10.255.245.215

inet.0: 28 destinations, 33 routes (27 active, 0 holddown, 1 hidden)
Prefix          Next hop          MED      Lclpref  AS path
10.22.1.0/24     10.255.245.215    0        100      I
10.22.2.0/24     10.255.245.215    0        100      I
```

show route receive-protocol bgp extensive

```
user@host> show route receive-protocol bgp 10.255.245.63 extensive
inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
Prefix          Next hop          MED      Lclpref  AS path
1.1.1.0/24 (1 entry, 1 announced)
  Next hop: 10.0.50.3
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
165.3.0.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
165.4.0.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
195.1.2.0/24 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref  AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref  AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Next hop          MED      Lclpref  AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)
```

show route receive-protocol bgp table extensive

```
user@host> show route receive-protocol bgp 207.17.136.192 table inet.0 66.117.68.0/24 extensive
inet.0: 227315 destinations, 227316 routes (227302 active, 0 holddown, 13 hidden)
* 66.117.63.0/24 (1 entry, 1 announced)
  Nexthop: 207.17.136.29
  Localpref: 100
  AS path: AS2 PA[6]: 14203 2914 3356 29748 33437 AS_TRANS
  AS path: AS4 PA[2]: 33437 393219
  AS path: Merged[6]: 14203 2914 3356 29748 33437 393219 I
  Communities: 2914:420
```

show route receive-protocol bgp logical-system extensive

```

user@host> show route receive-protocol bgp 10.0.0.9 logical-system PE4 extensive
inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)
* 10.0.0.0/30 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.0.0.4/30 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

10.0.0.8/30 (2 entries, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.9.9.1/32 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.100.1.1/32 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 44.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300096
  Nexthop: 10.0.0.9
  AS path: 13979 I
  AIGP: 203

* 55.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300112
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I
  AIGP: 25

* 66.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300144
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I

* 99.0.0.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300160
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I

```

show route receive-protocol bgp detail (Layer 2 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171 detail
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED      Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0
hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags: 0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0

```

show route receive-protocol bgp extensive (Layer 2 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171 extensive
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED      Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100

```

```

AS path: I
Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0

```

show route receive-protocol bgp (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171
inet.0: 33 destinations, 33 routes (32 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED      Lclpref AS path
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
VPN-A.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.14.175/32 10.255.14.171          100 2 I
10.255.14.179/32 10.255.14.171          2    100 I
VPN-B.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.14.175/32 10.255.14.171          100 2 I
10.255.14.177/32 10.255.14.171          100 I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.14.171:300:10.255.14.177/32
                  10.255.14.171          100 I
10.255.14.171:100:10.255.14.179/32
                  10.255.14.171          2    100 I
10.255.14.171:200:10.255.14.175/32
                  10.255.14.171          100 2 I

```

show route receive-protocol bgp detail (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.174 detail
inet.0: 16 destinations, 17 routes (15 active, 0 holddown, 1 hidden)
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
vpna.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
* 10.49.0.0/30 (1 entry, 1 announced)
  Route Distinguisher: 10.255.14.176:2
  VPN Label: 101264
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
* 10.255.14.172/32 (1 entry, 1 announced)
  Route Distinguisher: 10.255.14.176:2
  VPN Label: 101280
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

```

```

* 10.255.14.174:2:10.49.0.0/30 (1 entry, 0 announced)
  Route Distinguisher: 10.255.14.174:2
  VPN Label: 101264
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
* 10.255.14.174:2:10.255.14.172/32 (1 entry, 0 announced)
  Route Distinguisher: 10.255.14.174:2
  VPN Label: 101280
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

```

show route receive-protocol bgp extensive (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.245.63 extensive
inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
  1.1.1.0/24 (1 entry, 1 announced)
    Nexthop: 10.0.50.3
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.45
  165.3.0.0/16 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.68
  165.4.0.0/16 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.45
  195.1.2.0/24 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)

```

show route resolution

List of Syntax	Syntax on page 325 Syntax (EX Series Switches) on page 325
Syntax	<pre>show route resolution <brief detail extensive summary> <index <i>index</i>> <logical-system (all <i>logical-system-name</i>)> <prefix> <table <i>routing-table-name</i>> <unresolved></pre>
Syntax (EX Series Switches)	<pre>show route resolution <brief detail extensive summary> <index <i>index</i>> <prefix> <table <i>routing-table-name</i>> <unresolved></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	<p>Display the entries in the next-hop resolution database. This database provides for recursive resolution of next hops through other prefixes in the routing table.</p>
Options	<p>none—Display standard information about all entries in the next-hop resolution database.</p> <p>brief detail extensive summary—(Optional) Display the specified level of output.</p> <p>index <i>index</i>—(Optional) Show the index of the resolution tree.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>prefix <i>network/destination-prefix</i>—(Optional) Display database entries for the specified address.</p> <p>table <i>routing-table-name</i>—(Optional) Display information about a particular routing table (for example, inet.0) where policy-based export is currently enabled.</p> <p>unresolved—(Optional) Display routes that could not be resolved.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring Route Resolution on PE Routers
List of Sample Output	show route resolution detail on page 326 show route resolution summary on page 327 show route resolution unresolved on page 327

Output Fields Table 31 on page 326 describes the output fields for the **show route resolution** command. Output fields are listed in the approximate order in which they appear.

Table 31: show route resolution Output Fields

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table whose prefixes are resolved using the entries in the route resolution database. For routing table groups, this is the name of the primary routing table whose prefixes are resolved using the entries in the route resolution database.
Tree index	Tree index identifier.
Nodes	Number of nodes in the tree.
Reference count	Number of references made to the next hop.
Contributing routing tables	Routing tables used for next-hop resolution.
Originating RIB	Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of inet.0 resolving through inet.0 and inet.3 , this field indicates which routing table, inet.0 or inet.3 , provided the best path for a particular prefix.
Metric	Metric associated with the forwarding next hop.
Node path count	Number of nodes in the path.
Forwarding next hops	Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.

Sample Output

show route resolution detail

```

user@host> show route resolution detail
Tree Index: 1, Nodes 0, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 2, Nodes 23, Reference Count 1
Contributing routing tables: inet.0 inet.3
10.10.0.0/16 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.0/30 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.1/32 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 0
10.31.1.4/30 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.5/32 Originating RIB: inet.0

```



```

Node path count: 1
Forwarding nexthops: 0
10.31.2.0/30 Originating RIB: inet.0
Metric: 2 Node path count: 1
Forwarding nexthops: 2
10.31.11.0/24 Originating RIB: inet.0
Node path count: 1
Forwarding nexthops: 1

```

show route resolution summary

```

user@host> show route resolution summary
Tree Index: 1, Nodes 24, Reference Count 1
Contributing routing tables: :voice.inet.0 :voice.inet.3
Tree Index: 2, Nodes 2, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 3, Nodes 43, Reference Count 1
Contributing routing tables: inet.0 inet.3

```

show route resolution unresolved

```

user@host> show route resolution unresolved
Tree Index 1
vt-3/2/0.32769.0      /16
  Protocol Nexthop: 10.255.71.238 Push 800000
  Indirect nexthop: 0 -
vt-3/2/0.32772.0      /16
  Protocol Nexthop: 10.255.70.103 Push 800008
  Indirect nexthop: 0 -
Tree Index 2

```

show route snooping

Syntax	<pre>show route snooping <brief detail extensive terse> <all> <best address/prefix> <exact address> <range prefix-range> <summary> <table table-name></pre>
Release Information	<p>Command introduced in Junos OS Release 8.5.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display the entries in the routing table that were learned from snooping.
Options	<p>none—Display the entries in the routing table that were learned from snooping.</p> <p>brief detail extensive terse—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p>all—(Optional) Display all entries, including hidden entries.</p> <p>best address/prefix—(Optional) Display the longest match for the provided address and optional prefix.</p> <p>exact address/prefix—(Optional) Display exact matches for the provided address and optional prefix.</p> <p>range prefix-range—(Optional) Display information for the provided address range.</p> <p>summary—(Optional) Display route snooping summary statistics.</p> <p>table table-name—(Optional) Display information for the named table.</p>
Required Privilege Level	view
List of Sample Output	show route snooping detail on page 328
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route snooping detail

```
user@host> show route snooping detail
__+domainAll___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
224.0.0.2/32 (1 entry, 1 announced)
  *IGMP    Preference: 0
           Next hop type: MultiRecv
           Next-hop reference count: 4
           State: <Active NoReadvrt Int>
```

```

Age: 2:24
Task: IGMP
Announcement bits (1): 0-KRT
AS path: I

224.0.0.22/32 (1 entry, 1 announced)
  *IGMP Preference: 0
    Next hop type: MultiRecv
    Next-hop reference count: 4
    State: <Active NoReadvrt Int>
    Age: 2:24
    Task: IGMP
    Announcement bits (1): 0-KRT
    AS path: I

__+domainAll__.inet.1: 36 destinations, 36 routes (36 active, 0 holddown, 0 hidden)

224.0.0.0.0.0.0.0.0/24 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4), Next hop index: 1048584
    Next-hop reference count: 4
    State: <Active Int>
    Age: 2:24
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.2.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:13
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.3.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.4.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:17
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.5.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113

```

```

State: <Active Int>
Age: 1:58
Task: MC
Announcement bits (1): 0-KRT
AS path: I

225.0.0.6.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:14
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.7.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.9.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:13
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

225.0.0.10.11.11.11.100.3.9.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.1.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:09
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.2.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>

```

```
Age: 8
Task: MC
Announcement bits (1): 0-KRT
AS path: I

226.0.0.4.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:10
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.8.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

226.0.0.10.11.11.11.100.3.10.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 1:56
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.1.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:10
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.2.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:13
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.3.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:16
```

```

Task: MC
Announcement bits (1): 0-KRT
AS path: I

227.0.0.4.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.5.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 1:57
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.7.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 1:57
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.8.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:10
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

227.0.0.10.11.11.11.100.3.11.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.1.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:09
    Task: MC

```

```

Announcement bits (1): 0-KRT
AS path: I

228.0.0.2.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:18
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.7.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:11
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.8.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:17
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.9.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 8
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

228.0.0.10.11.11.11.100.3.12.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.3.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:09
    Task: MC
    Announcement bits (1): 0-KRT

```

```

AS path: I

229.0.0.4.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:12
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.5.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 9
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.6.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.7.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.8.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:15
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

229.0.0.9.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:14
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

```



```
229.0.0.10.11.11.11.100.3.13.0.0/80 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4)
    Next-hop reference count: 113
    State: <Active Int>
    Age: 2:13
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I
```

show route source-gateway

List of Syntax	Syntax on page 336 Syntax (EX Series Switches) on page 336
Syntax	<code>show route source-gateway address</code> <brief detail extensive terse> <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches)	<code>show route source-gateway address</code> <brief detail extensive terse>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the entries in the routing table that were learned from a particular address. The Source field in the <code>show route detail</code> command output lists the source for each route, if known.
Options	brief detail extensive terse —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief . address —IP address of the system. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show route source-gateway on page 336 show route source-gateway detail on page 337 show route source-gateway extensive on page 339
Output Fields	For information about output fields, see the output field tables for the show route command, the show route detail command, the show route extensive command, or the show route terse command.

Sample Output

show route source-gateway

```
user@host> show route source-gateway 10.255.70.103
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
```

```

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:1:3:1/96
    *[BGP/170] 12:12:24, localpref 100, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:2:3:1/96
    *[BGP/170] 12:12:24, localpref 0, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:1:3:1/96
    *[BGP/170] 12:12:24, localpref 100, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

10.255.70.103:2:3:1/96
    *[BGP/170] 12:12:24, localpref 0, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

```

show route source-gateway detail

```

user@host> show route source-gateway 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete
green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

```

```

Restart Complete
10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 10.255.70.103:1
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Secondary Active Int Ext>
          Local AS: 69 Peer AS: 69
          Age: 12:14:00 Metric2: 1
          Task: BGP_69.10.255.70.103+179
          Announcement bits (1): 0-green-12vpn
          AS path: I
          Communities: target:11111:1 Layer2-info: encaps:VPLS,
          control flags:, mtu: 0
          Label-base: 800008, range: 8
          Localpref: 100
          Router ID: 10.255.70.103
          Primary Routing Table bgp.12vpn.0

red.12vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete

10.255.70.103:2:3:1/96 (1 entry, 1 announced)
  *BGP    Preference: 170/-1
          Route Distinguisher: 10.255.70.103:2
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Secondary Active Int Ext>
          Local AS: 69 Peer AS: 69
          Age: 12:14:00 Metric2: 1
          Task: BGP_69.10.255.70.103+179
          Announcement bits (1): 0-red-12vpn
          AS path: I
          Communities: target:11111:2 Layer2-info: encaps:VPLS,
          control flags:Site-Down, mtu: 0
          Label-base: 800016, range: 8
          Localpref: 0
          Router ID: 10.255.70.103
          Primary Routing Table bgp.12vpn.0

bgp.12vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

10.255.70.103:1:3:1/96 (1 entry, 0 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 10.255.70.103:1
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Active Int Ext>
          Local AS: 69 Peer AS: 69
          Age: 12:14:00 Metric2: 1
          Task: BGP_69.10.255.70.103+179
          AS path: I
          Communities: target:11111:1 Layer2-info: encaps:VPLS, control
flags:, mtu: 0

```

```

Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Secondary Tables: green.l2vpn.0
10.255.70.103:2:3:1/96 (1 entry, 0 announced)
  *BGP Preference: 170/-1
    Route Distinguisher: 10.255.70.103:2
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 12:14:00 Metric2: 1
    Task: BGP_69.10.255.70.103+179
    AS path: I
    Communities: target:11111:2 Layer2-info: encaps:VPLS,
    control flags:Site-Down,
    mtu: 0
    Label-base: 800016, range: 8
    Localpref: 0
    Router ID: 10.255.70.103
    Secondary Tables: red.l2vpn.0

```

show route source-gateway extensive

```

user@host> show route source-gateway 10.255.70.103 extensive
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.70.103:1
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Secondary Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 12:15:24 Metric2: 1
    Task: BGP_69.10.255.70.103+179
    Announcement bits (1): 0-green-l2vpn
    AS path: I
    Communities: target:11111:1 Layer2-info: encaps:VPLS,
    control flags:, mtu: 0

```

```

Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Primary Routing Table bgp.l2vpn.0

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete

10.255.70.103:2:3:1/96 (1 entry, 1 announced)
  *BGP Preference: 170/-1
    Route Distinguisher: 10.255.70.103:2
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Secondary Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 12:15:24 Metric2: 1
    Task: BGP_69.10.255.70.103+179
    Announcement bits (1): 0-red-l2vpn
    AS path: I
    Communities: target:11111:2 Layer2-info: encaps:VPLS,
    control flags:Site-Down, mtu: 0
    Label-base: 800016, range: 8
    Localpref: 0
    Router ID: 10.255.70.103
    Primary Routing Table bgp.l2vpn.0

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

10.255.70.103:1:3:1/96 (1 entry, 0 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.70.103:1
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 12:15:24 Metric2: 1
    Task: BGP_69.10.255.70.103+179
    AS path: I
    Communities: target:11111:1 Layer2-info: encaps:VPLS,
    control flags:, mtu: 0
    Label-base: 800008, range: 8
    Localpref: 100
    Router ID: 10.255.70.103
    Secondary Tables: green.l2vpn.0
    Indirect next hops: 1
      Protocol next hop: 10.255.70.103 Metric: 2
      Indirect next hop: 2 no-forward
      Indirect path forwarding next hops: 1
    Next hop: via so-0/3/0.0 weight 0x1
      10.255.70.103/32 Originating RIB: inet.3
      Metric: 2 Node path count: 1
      Forwarding nexthops: 1
      Nexthop: via so-0/3/0.0

10.255.70.103:2:3:1/96 (1 entry, 0 announced)
  *BGP Preference: 170/-1

```

```
Route Distinguisher: 10.255.70.103:2
Next-hop reference count: 7
Source: 10.255.70.103
Protocol next hop: 10.255.70.103
Indirect next hop: 2 no-forward
State: <Active Int Ext>
Local AS: 69 Peer AS: 69
Age: 12:15:24 Metric2: 1
Task: BGP_69.10.255.70.103+179
AS path: I
Communities: target:11111:2 Layer2-info: encaps:VPLS,
control flags:Site-Down,
mtu: 0
Label-base: 800016, range: 8
Localpref: 0
Router ID: 10.255.70.103
Secondary Tables: red.12vpn.0
Indirect next hops: 1
    Protocol next hop: 10.255.70.103 Metric: 2
    Indirect next hop: 2 no-forward
    Indirect path forwarding next hops: 1
Next hop: via so-0/3/0.0 weight 0x1
    10.255.70.103/32 Originating RIB: inet.3
    Metric: 2 Node path count: 1
    Forwarding nexthops: 1
    Nexthop: via so-0/3/0.0
```

show route summary

List of Syntax	Syntax on page 342 Syntax (EX Series Switches) on page 342
Syntax	<pre>show route summary <logical-system (all <i>logical-system-name</i>)> <table <i>routing-table-name</i>></pre>
Syntax (EX Series Switches)	show route summary
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	<p>Display summary statistics about the entries in the routing table.</p> <p>CPU utilization might increase while the device learns routes. We recommend that you use the show route summary command after the device learns and enters the routes into the routing table. Depending on the size of your network, this might take several minutes. If you receive a “timeout communicating with routing daemon” error when using the show route summary command, wait several minutes before attempting to use the command again. This is not a critical system error, but you might experience a delay in using the command-line interface (CLI).</p>
Options	<p>none—Display summary statistics about the entries in the routing table.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>table <i>routing-table-name</i>—(Optional) Display summary statistics for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the show route summary table inet command). If you only want to display statistics for a specific routing table, make sure to enter the exact name of that routing table.</p>
Required Privilege Level	view
List of Sample Output	show route summary on page 343 show route summary table on page 344 show route summary table (with Route Limits Configured for the Routing Table) on page 344
Output Fields	<p>Table 32 on page 342 lists the output fields for the show route summary command. Output fields are listed in the approximate order in which they appear.</p>

Table 32: show route summary Output Fields

Field Name	Field Description
Router ID	Address of the local routing device.

Table 32: show route summary Output Fields (*continued*)

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
destinations	Number of destinations for which there are routes in the routing table.
routes	Number of routes in the routing table: <ul style="list-style-type: none"> active—Number of routes that are active. holddown—Number of routes that are in the hold-down state before being declared inactive. hidden—Number of routes that are not used because of routing policy.
Limit/Threshold	Displays the configured route limits for the routing table set with the maximum-prefixes and the maximum-paths statements. If you do not configure route limits for the routing table, the show output does not display this information. <ul style="list-style-type: none"> destinations—The first number represents the maximum number of route prefixes installed in the routing table. The second number represents the number of route prefixes that trigger a warning message. routes—The first number represents the maximum number of routes. The second number represents the number of routes that trigger a warning message.
Direct	Routes on the directly connected network.
Local	Local routes.
<i>protocol-name</i>	Name of the protocol from which the route was learned. For example, OSPF , RSVP , and Static .

Sample Output

show route summary

```

user@host> show route summary
Autonomous system number: 69
Router ID: 10.255.71.52
Maximum-ECMP: 32
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
      Direct:    6 routes,      5 active
      Local:    4 routes,      4 active
      OSPF:     5 routes,      4 active
      Static:   7 routes,      7 active
      IGMP:     1 routes,     1 active
      PIM:      2 routes,      2 active

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
      RSVP:      2 routes,      2 active

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

```

Restart Complete
  Direct:      1 routes,      1 active

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
  MPLS:       3 routes,      3 active
  VPLS:       4 routes,      2 active

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete
  Direct:     2 routes,      2 active
  PIM:        2 routes,      2 active
  MLD:        1 routes,      1 active

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
  BGP:        2 routes,      2 active
  L2VPN:      2 routes,      2 active

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
  BGP:        2 routes,      2 active
  L2VPN:      1 routes,      1 active

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
  BGP:        4 routes,      4 active

```

show route summary table

```

user@host> show route summary table inet
Router ID: 192.168.0.1

inet.0: 32 destinations, 34 routes (31 active, 0 holddown, 1 hidden)
  Direct:     6 routes,      5 active
  Local:      9 routes,      9 active
  OSPF:       3 routes,      1 active
  Static:    13 routes,     13 active
  ICMP:       1 routes,      1 active
  PIM:        2 routes,      2 active

inet.1: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
  Multicast:   1 routes,      1 active

inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
  Local:       1 routes,      1 active
  PIM:         2 routes,      2 active

inet6.1: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
  Multicast:   1 routes,      1 active

```

show route summary table (with Route Limits Configured for the Routing Table)

```

user@host> show route summary table VPN-A.inet.0
Autonomous system number: 100
Router ID: 10.255.182.142

VPN-A.inet.0: 13 destinations, 14 routes (13 active, 0 holddown, 0 hidden)
Limit/Threshold: 2000/200 destinations 20/12 routes
  Direct:     2 routes,      2 active
  Local:      1 routes,      1 active

```

OSPF:	4 routes,	3 active
BGP:	4 routes,	4 active
IGMP:	1 routes,	1 active
PIM:	2 routes,	2 active

show route table

List of Syntax	Syntax on page 346 Syntax (EX Series Switches) on page 346
Syntax	<code>show route table <i>routing-table-name</i></code> <code><brief detail extensive terse></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches)	<code>show route table <i>routing-table-name</i></code> <code><brief detail extensive terse></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 14.1X53-D30 for QFX Series switches.
Description	Display the route entries in a particular routing table.
Options	brief detail extensive terse —(Optional) Display the specified level of output. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system. <i>routing-table-name</i> —Display route entries for all routing tables whose names begin with this string (for example, inet.0 and inet6.0 are both displayed when you run the show route table inet command).
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• show route summary on page 342
List of Sample Output	show route table bgp.l2.vpn on page 357 show route table bgp.l3vpn.0 on page 357 show route table bgp.l3vpn.0 detail on page 357 show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured) on page 358 show route table bgp.evpn.0 on page 359 show route table evpna.evpn.0 on page 359 show route table inet.0 on page 359 show route table inet6.0 on page 360 show route table inet6.3 on page 360 show route table inetflow detail on page 360 show route table l2circuit.0 on page 361 show route table mpls on page 361 show route table mpls extensive on page 361 show route table mpls.0 on page 362 show route table mpls.0 detail (PTX Series) on page 363 show route table mpls.0 extensive (PTX Series) on page 363

[show route table mpls.0 \(RSVP Route—Transit LSP\) on page 364](#)
[show route table vpls_1 detail on page 364](#)
[show route table vpn-a on page 364](#)
[show route table vpn-a.mdt.0 on page 365](#)
[show route table VPN-A detail on page 365](#)
[show route table VPN-AB.inet.0 on page 366](#)
[show route table VPN_blue.mvpn-inet6.0 on page 366](#)
[show route table vrf1.mvpn.0 extensive on page 366](#)
[show route table inetflow detail on page 367](#)

Output Fields [Table 18 on page 189](#) describes the output fields for the **show route table** command. Output fields are listed in the approximate order in which they appear.

Table 33: show route table Output Fields

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
Restart complete	<p>All protocols have restarted for this routing table.</p> <p>Restart state:</p> <ul style="list-style-type: none"> • Pending:protocol-name—List of protocols that have not yet completed graceful restart for this routing table. • Complete—All protocols have restarted for this routing table. <p>For example, if the output shows-</p> <ul style="list-style-type: none"> • LDP.inet.0 : 5 routes (4 active, 1 holddown, 0 hidden) Restart Pending: OSPF LDP VPN <p>This indicates that OSPF, LDP, and VPN protocols did not restart for the LDP.inet.0 routing table.</p> <ul style="list-style-type: none"> • vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden) Restart Complete <p>This indicates that all protocols have restarted for the vpls_1.l2vpn.0 routing table.</p>
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> • active (routes that are active) • holddown (routes that are in the pending state before being declared inactive) • hidden (routes that are not used because of a routing policy)

Table 33: show route table Output Fields (*continued*)

Field Name	Field Description
<i>route-destination</i> (entry, announced)	<p>Route destination (for example:10.0.0.1/24). The entry value is the number of routes for this destination, and the announced value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> • MPLS-label (for example, 80001). • interface-name (for example, ge-1/0/2). • neighbor-address:control-word-status:encapsulation type:vc-id:source (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> • neighbor-address—Address of the neighbor. • control-word-status—Whether the use of the control word has been negotiated for this virtual circuit: NoCtrlWord or CtrlWord. • encapsulation type—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport. • vc-id—Virtual circuit identifier. • source—Source of the advertisement: Local or Remote. • inclusive multicast Ethernet tag route—Type of route destination represented by (for example, 3:100.100.100.10:100::0::10::100.100.100.10/384): <ul style="list-style-type: none"> • route distinguisher—(8 octets) Route distinguisher (RD) must be the RD of the EVPN instance (EVI) that is advertising the NLRI. • Ethernet tag ID—(4 octets) Identifier of the Ethernet tag. Can set to 0 or to a valid Ethernet tag value. • IP address length—(1 octet) Length of IP address in bits. • originating router's IP address—(4 or 16 octets) Must set to the provider edge (PE) device's IP address. This address should be common for all EVIs on the PE device, and may be the PE device's loopback address.
label stacking	<p>(Next-to-the-last-hop router for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> • S=0 route indicates that a packet with an incoming label stack depth of 2 or more exits on this router with one fewer label (the label-popping operation is performed). • If there is no S= information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).
[protocol, preference]	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> • +—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • -—A hyphen indicates the last active route. • *—An asterisk indicates that the route is both the active and the last active route. An asterisk before a to line indicates the best subpath to the route. <p>In every routing metric except for the BGP LocalPref attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the LocalPref value in the Preference2 field. For example, if the LocalPref value for Route 1 is 100, the Preference2 value is -101. If the LocalPref value for Route 2 is 155, the Preference2 value is -156. Route 2 is preferred because it has a higher LocalPref value and a lower Preference2 value.</p>

Table 33: show route table Output Fields (*continued*)

Field Name	Field Description
Level	(IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.
Route Distinguisher	IP subnet augmented with a 64-bit prefix.
PMSI	Provider multicast service interface (MVPN routing table).
Next-hop type	Type of next hop. For a description of possible values for this field, see Table 21 on page 222 .
Next-hop reference count	Number of references made to the next hop.
Flood nexthop branches exceed maximum message	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
Source	IP address of the route source.
Next hop	Network layer address of the directly reachable neighboring system.
via	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word Selected. This field can also contain the following information:</p> <ul style="list-style-type: none"> • Weight—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible. • Balance—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a router is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.
Label-switched-path lsp-path-name	Name of the LSP used to reach the next hop.
Label operation	MPLS label and operation occurring at this router. The operation can be pop (where a label is removed from the top of the stack), push (where another label is added to the label stack), or swap (where a label is replaced by another label).
Interface	(Local only) Local interface name.
Protocol next hop	Network layer address of the remote router that advertised the prefix. This address is used to derive a forwarding next hop.
Indirect next hop	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.
State	State of the route (a route can be in more than one state). See Table 22 on page 223 .

Table 33: show route table Output Fields (*continued*)

Field Name	Field Description
Local AS	AS number of the local routing devices.
Age	How long the route has been known.
AI GP	Accumulated interior gateway protocol (AI GP) BGP attribute.
Metric <i>n</i>	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
MED-plus-IGP	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
TTL-Action	For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.
Task	Name of the protocol that has added the route.
Announcement bits	<p>The number of BGP peers or protocols to which Junos OS has announced this route, followed by the list of the recipients of the announcement. Junos OS can also announce the route to the kernel routing table (KRT) for installing the route into the Packet Forwarding Engine, to a resolve tree, a Layer 2 VC, or even a VPN. For example, <i>n-Resolve inet</i> indicates that the specified route is used for route resolution for next hops found in the routing table.</p> <ul style="list-style-type: none"> <i>n</i>—An index used by Juniper Networks customer support only.
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> I—IGP. E—EGP. Recorded—The AS path is recorded by the sample process (sampled). ?—Incomplete; typically, the AS path was aggregated. <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> []—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893. []—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path. { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order. ()—Parentheses enclose a confederation. ([])—Parentheses and brackets enclose a confederation set. <p>NOTE: In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>

Table 33: show route table Output Fields (*continued*)

Field Name	Field Description
validation-state	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> • Invalid—Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database. • Unknown—Indicates that the prefix is not among the prefixes or prefix ranges in the database. • Unverified—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers. • Valid—Indicates that the prefix and autonomous system pair are found in the database.
FECs bound to route	Indicates point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.
Primary Upstream	When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, indicates the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.
RPF Nexthops	When multipoint LDP with MoFRR is configured, indicates the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.
Label	Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.
weight	Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See Table 23 on page 225 for all possible values for this field.
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).
control flags	Control flags: none or Site Down .
mtu	Maximum transmission unit (MTU) information.
Label-Base, range	First label in a block of labels and label block size. A remote PE router uses this first label when sending traffic toward the advertising PE router.
status vector	Layer 2 VPN and VPLS network layer reachability information (NLRI).

Table 33: show route table Output Fields (*continued*)

Field Name	Field Description
Accepted Multipath	Current active path when BGP multipath is configured.
Accepted LongLivedStale	The LongLivedStale flag indicates that the route was marked LLGR-stale by this router, as part of the operation of LLGR receiver mode. Either this flag or the LongLivedStaleImport flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.
Accepted LongLivedStaleImport	<p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy. Either this flag or the LongLivedStale flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.</p> <p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and import into the inet.0 routing table</p>
ImportAccepted LongLivedStaleImport	<p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and imported into the inet.0 routing table</p> <p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy.</p>
Accepted MultipathContrib	Path currently contributing to BGP multipath.
Localpref	Local preference value included in the route.
Router ID	BGP router ID as advertised by the neighbor in the open message.
Primary Routing Table	In a routing table group, the name of the primary routing table in which the route resides.
Secondary Tables	In a routing table group, the name of one or more secondary tables in which the route resides.

Table 21 on page 222 describes all possible values for the Next-hop Types output field.

Table 34: Next-hop Types Output Field Values

Next-Hop Type	Description
Broadcast (bcast)	Broadcast next hop.
Deny	Deny next hop.
Discard	Discard next hop.
Flood	Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast.

Table 34: Next-hop Types Output Field Values (*continued*)

Next-Hop Type	Description
Hold	Next hop is waiting to be resolved into a unicast or multicast type.
Indexed (idxd)	Indexed next hop.
Indirect (indr)	Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.
Interface	Used for a network address assigned to an interface. Unlike the router next hop, the interface next hop does not reference any specific node on the network.
Local (locl)	Local address on an interface. This next-hop type causes packets with this destination address to be received locally.
Multicast (mcst)	Wire multicast next hop (limited to the LAN).
Multicast discard (mdsc)	Multicast discard.
Multicast group (mgrp)	Multicast group member.
Receive (recv)	Receive.
Reject (rjct)	Discard. An ICMP unreachable message was sent.
Resolve (rslv)	Resolving next hop.
Routed multicast (mcrt)	Regular multicast next hop.
Router	<p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as a next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> • Must not be a direct or local subnet for the routing device. • Must have a next hop that is directly connected to the routing device.
Table	Routing table next hop.
Unicast (ucst)	Unicast.
Unilist (ulst)	List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.

Table 22 on page 223 describes all possible values for the State output field. A route can be in more than one state (for example, <Active NoReadvrt Int Ext>).

Table 35: State Output Field Values

Value	Description
Accounting	Route needs accounting.
Active	Route is active.
Always Compare MED	Path with a lower multiple exit discriminator (MED) is available.
AS path	Shorter AS path is available.
Cisco Non-deterministic MED selection	Cisco nondeterministic MED is enabled, and a path with a lower MED is available.
Clone	Route is a clone.
Cluster list length	Length of cluster list sent by the route reflector.
Delete	Route has been deleted.
Ex	Exterior route.
Ext	BGP route received from an external BGP neighbor.
FlashAll	Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes.
Hidden	Route not used because of routing policy.
IfCheck	Route needs forwarding RPF check.
IGP metric	Path through next hop with lower IGP metric is available.
Inactive reason	Flags for this route, which was not selected as best for a particular destination.
Initial	Route being added.
Int	Interior route.
Int Ext	BGP route received from an internal BGP peer or a BGP confederation peer.
Interior > Exterior > Exterior via Interior	Direct, static, IGP, or EBGp path is available.

Table 35: State Output Field Values (*continued*)

Value	Description
Local Preference	Path with a higher local preference value is available.
Martian	Route is a martian (ignored because it is obviously invalid).
MartianOK	Route exempt from martian filtering.
Next hop address	Path with lower metric next hop is available.
No difference	Path from neighbor with lower IP address is available.
NoReadvrt	Route not to be advertised.
NotBest	Route not chosen because it does not have the lowest MED.
Not Best in its group	Incoming BGP AS is not the best of a group (only one AS can be the best).
NotInstall	Route not to be installed in the forwarding table.
Number of gateways	Path with a greater number of next hops is available.
Origin	Path with a lower origin code is available.
Pending	Route pending because of a hold-down configured on another route.
Release	Route scheduled for release.
RIB preference	Route from a higher-numbered routing table is available.
Route Distinguisher	64-bit prefix added to IP subnets to make them unique.
Route Metric or MED comparison	Route with a lower metric or MED is available.
Route Preference	Route with lower preference value is available
Router ID	Path through a neighbor with lower ID is available.
Secondary	Route not a primary route.
Unusable path	Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> • The route is damped. • The route is rejected by an import policy. • The route is unresolved.
Update source	Last tiebreaker is the lowest IP address value.

Table 23 on page 225 describes the possible values for the Communities output field.

Table 36: Communities Output Field Values

Value	Description
<i>area-number</i>	4 bytes, encoding a 32-bit area number. For AS-external routes, the value is 0. A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.
bandwidth: local AS number:link-bandwidth-number	Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute.
domain-id	Unique configurable number that identifies the OSPF domain.
domain-id-vendor	Unique configurable number that further identifies the OSPF domain.
<i>link-bandwidth-number</i>	Link-bandwidth number: from 0 through 4,294,967,295 (bytes per second).
<i>local AS number</i>	Local AS number: from 1 through 65,535.
<i>options</i>	1 byte. Currently this is only used if the route type is 5 or 7. Setting the least significant bit in the field indicates that the route carries a type 2 metric.
origin	(Used with VPNs) Identifies where the route came from.
<i>ospf-route-type</i>	1 byte, encoded as 1 or 2 for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); 3 for summary routes; 5 for external routes (area number must be 0); 7 for NSSA routes; or 129 for sham link endpoint addresses.
route-type-vendor	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x8000. The format is area-number:ospf-route-type:options .
rte-type	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x0306. The format is area-number:ospf-route-type:options .
target	Defines which VPN the route participates in; target has the format 32-bit IP address:16-bit number . For example, 10.19.0.0:100.
unknown IANA	Incoming IANA codes with a value between 0x1 and 0x7fff. This code of the BGP extended community attribute is accepted, but it is not recognized.
unknown OSPF vendor community	Incoming IANA codes with a value above 0x8000. This code of the BGP extended community attribute is accepted, but it is not recognized.

Sample Output

show route table bgp.l2vpn

```
user@host> show route table bgp.l2vpn
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.24.1:1:4:1/96
    *[BGP/170] 01:08:58, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
```

show route table bgp.l3vpn.0

```
user@host> show route table bgp.l3vpn.0
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.71.15:100:10.255.71.17/32
    *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
    AS path: I
    > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.15:200:10.255.71.18/32
    *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
    AS path: I
    > via so-2/1/0.0, Push 100021, Push 100011(top)
```

show route table bgp.l3vpn.0 detail

```
user@host> show route table bgp.l3vpn.0 detail
bgp.l3vpn.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)

10.255.245.12:1:4.0.0.0/8 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182449
    Protocol next hop: 10.255.245.12
    Push 182449
    Indirect next hop: 863a630 297
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0.0+179
    AS path: 30 10458 14203 2914 3356 I (Atomic) Aggregator: 3356 4.68.0.11

    Communities: 2914:420 target:11111:1 origin:56:78
    VPN Label: 182449
    Localpref: 100
    Router ID: 10.255.245.12

10.255.245.12:1:4.17.225.0/24 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
```

```

Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 863a8f0 305
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496 6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100
Router ID: 10.255.245.12

10.255.245.12:1:4.17.226.0/23 (1 entry, 1 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.245.12:1
Source: 10.255.245.12
Next hop: 192.168.208.66 via fe-0/0/0.0, selected
Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 86bd210 330
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100
Router ID: 10.255.245.12

10.255.245.12:1:4.17.251.0/24 (1 entry, 1 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.245.12:1
Source: 10.255.245.12
Next hop: 192.168.208.66 via fe-0/0/0.0, selected
Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 86bd210 330
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100

```

show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured)

```
user@host> show route table bgp.rtarget.0
```



```

bgp.rtarget.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

100:100:100/96
    * [RTarget/5] 00:03:14
      Type Proxy
      for 10.255.165.103
      for 10.255.166.124
      Local

```

show route table bgp.evpn.0

```

user@host> show route table bgp.evpn.0
bgp.evpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2:100.100.100.2:100::0::00:26:88:5f:67:b0/304
    * [BGP/170] 11:00:05, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
2:100.100.100.2:100::0::00:51:51:51:51:51/304
    * [BGP/170] 11:00:05, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
2:100.100.100.3:100::0::00:52:52:52:52:52/304
    * [BGP/170] 10:59:58, localpref 100, from 100.100.100.3
      AS path: I, validation-state: unverified
      > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
2:100.100.100.3:100::0::a8:d0:e5:5b:01:c8/304
    * [BGP/170] 10:59:58, localpref 100, from 100.100.100.3
      AS path: I, validation-state: unverified
      > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
3:100.100.100.2:100::1000::100.100.100.2/304
    * [BGP/170] 11:00:16, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
3:100.100.100.2:100::2000::100.100.100.2/304
    * [BGP/170] 11:00:16, localpref 100, from 100.100.100.2
      AS path: I, validation-state: unverified
      > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1

```

show route table evpna.evpn.0

```

user@host> show route table evpna.evpn.0
evpna.evpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

3:100.100.100.10:100::0::10::100.100.100.10/384
    * [EVPN/170] 01:37:09
      Indirect
3:100.100.100.2:100::2000::100.100.100.2/304
    * [EVPN/170] 01:37:12
      Indirect

```

show route table inet.0

```

user@host> show route table inet.0
inet.0: 12 destinations, 12 routes (11 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0
    * [Static/5] 00:51:57
      > to 111.222.5.254 via fxp0.0

```

```

1.0.0.1/32      *[Direct/0] 00:51:58
                 > via at-5/3/0.0
1.0.0.2/32      *[Local/0] 00:51:58
                 Local
12.12.12.21/32  *[Local/0] 00:51:57
                 Reject
13.13.13.13/32  *[Direct/0] 00:51:58
                 > via t3-5/2/1.0
13.13.13.14/32  *[Local/0] 00:51:58
                 Local
13.13.13.21/32  *[Local/0] 00:51:58
                 Local
13.13.13.22/32  *[Direct/0] 00:33:59
                 > via t3-5/2/0.0
127.0.0.1/32    [Direct/0] 00:51:58
                 > via lo0.0
111.222.5.0/24  *[Direct/0] 00:51:58
                 > via fxp0.0
111.222.5.81/32 *[Local/0] 00:51:58
                 Local

```

show route table inet6.0

```

user@host> show route table inet6.0
inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Route, * = Both

fec0:0:0:3::/64 *[Direct/0] 00:01:34
>via fe-0/1/0.0

fec0:0:0:3::/128 *[Local/0] 00:01:34
>Local

fec0:0:0:4::/64 *[Static/5] 00:01:34
>to fec0:0:0:3::ffff via fe-0/1/0.0

```

show route table inet6.3

```

user@router> show route table inet6.3
inet6.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::10.255.245.195/128
                 *[LDP/9] 00:00:22, metric 1
                 > via so-1/0/0.0
::10.255.245.196/128
                 *[LDP/9] 00:00:08, metric 1
                 > via so-1/0/0.0, Push 100008

```

show route table inetflow detail

```

user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
    *BGP      Preference: 170/-101
                Next-hop reference count: 2
                State: <Active Ext>
                Local AS: 65002 Peer AS: 65000
                Age: 4
                Task: BGP_65000.10.12.99.5+3792
                Announcement bits (1): 0-Flow
                AS path: 65000 I

```

```

Communities: traffic-rate:0:0
Validation state: Accept, Originator: 10.12.99.5
Via: 10.12.44.0/24, Active
Localpref: 100
Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
  *Flow Preference: 5
    Next-hop reference count: 2
    State: <Active>
    Local AS: 65002
    Age: 6:30
    Task: RT Flow
    Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
    AS path: I
    Communities: 1:1

```

show route table l2circuit.0

```

user@host> show route table l2circuit.0
l2circuit.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.195:NoCtrlWord:1:1:Local/96
    *[L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    via so-0/1/3.0, Push 100049
10.1.1.195:NoCtrlWord:1:1:Remote/96
    *[LDP/9] 00:50:14
    Discard
10.1.1.195:CtrlWord:1:2:Local/96
    *[L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    via so-0/1/3.0, Push 100049
10.1.1.195:CtrlWord:1:2:Remote/96
    *[LDP/9] 00:50:14
    Discard

```

show route table mpls

```

user@host> show route table mpls
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          *[MPLS/0] 00:13:55, metric 1
            Receive
1          *[MPLS/0] 00:13:55, metric 1
            Receive
2          *[MPLS/0] 00:13:55, metric 1
            Receive
1024       *[VPN/0] 00:04:18
            to table red.inet.0, Pop

```

show route table mpls extensive

```

user@host> show route table mpls extensive
100000 (1 entry, 1 announced)
TSI:
KRT in-kerne] 100000 /36 -> {so-1/0/0.0}
  *LDP Preference: 9
    Next hop: via so-1/0/0.0, selected
    Pop

```

```

State: <Active Int>
Age: 29:50      Metric: 1
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
Prefixes bound to route: 10.0.0.194/32

```

show route table mpls.0

```

user@host> show route table mpls.0
mpls.0: 18 destinations, 19 routes (18 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          *[MPLS/0] 11:39:56, metric 1
           to table inet.0
0(S=0)     *[MPLS/0] 11:39:56, metric 1
           to table mpls.0
1          *[MPLS/0] 11:39:56, metric 1
           Receive
2          *[MPLS/0] 11:39:56, metric 1
           to table inet6.0
2(S=0)     *[MPLS/0] 11:39:56, metric 1
           to table mpls.0
13         *[MPLS/0] 11:39:56, metric 1
           Receive
303168     *[EVPN/7] 11:00:49, routing-instance pbbn10, route-type
Ingress-MAC, ISID 0
           to table pbbn10.evpn-mac.0
303184     *[EVPN/7] 11:00:53, routing-instance pbbn10, route-type
Ingress-IM, ISID 1000
           to table pbbn10.evpn-mac.0
           [EVPN/7] 11:00:53, routing-instance pbbn10, route-type
Ingress-IM, ISID 2000
           to table pbbn10.evpn-mac.0
303264     *[EVPN/7] 11:00:53, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-IM, ISID 1000
           > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303280     *[EVPN/7] 11:00:53, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-IM, ISID 2000
           > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303328     *[EVPN/7] 11:00:49, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
           > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303344     *[EVPN/7] 11:00:49, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
           > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303360     *[EVPN/7] 11:00:47, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:26:88:5f:67:b0
           > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303376     *[EVPN/7] 11:00:47, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:51:51:51:51:51
           > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303392     *[EVPN/7] 11:00:35, remote-pe 100.100.100.3, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
           > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303408     *[EVPN/7] 11:00:35, remote-pe 100.100.100.3, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
           > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303424     *[EVPN/7] 11:00:33, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC a8:d0:e5:5b:01:c8
           > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2

```

```

303440          *[EVPN/7] 11:00:33, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:52:52:52:52:52
> to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2

```

show route table mpls.0 detail (PTX Series)

```

user@host> show route table mpls.0 detail
ge-0/0/2.600 (1 entry, 1 announced)
  *L2VPN Preference: 7
    Next hop type: Indirect
    Address: 0x9438f34
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 567
    Next hop: 3.0.0.1 via ge-0/0/1.0, selected
    Label operation: Push 299808
    Label TTL action: prop-ttl
    Load balance label: Label 299808:None;
    Session Id: 0x1
    Protocol next hop: 10.255.255.1
    Label operation: Push 299872 Offset: 252
    Label TTL action: no-prop-ttl
    Load balance label: Label 299872:Flow label PUSH;
    Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
    Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
    State: <Active Int>
    Age: 21 Metric2: 1
    Validation State: unverified
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 2-Common L2 VC
    AS path: I

```

show route table mpls.0 extensive (PTX Series)

```

user@host> show route table mpls.0 extensive
ge-0/0/2.600 (1 entry, 1 announced)
TSI:
KRT in-kernel ge-0/0/2.600.0 /32 -> {composite(570)}
  *L2VPN Preference: 7
    Next hop type: Indirect
    Address: 0x9438f34
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 567
    Next hop: 3.0.0.1 via ge-0/0/1.0, selected
    Label operation: Push 299808
    Label TTL action: prop-ttl
    Load balance label: Label 299808:None;
    Session Id: 0x1
    Protocol next hop: 10.255.255.1
    Label operation: Push 299872 Offset: 252
    Label TTL action: no-prop-ttl
    Load balance label: Label 299872:Flow label PUSH;
    Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
    Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
    State: <Active Int>
    Age: 47 Metric2: 1
    Validation State: unverified
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 2-Common L2 VC
    AS path: I
    Composite next hops: 1
      Protocol next hop: 10.255.255.1 Metric: 1

```

```

Label operation: Push 299872 Offset: 252
Label TTL action: no-prop-ttl
Load balance label: Label 299872:Flow label PUSH;
Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 3.0.0.1 via ge-0/0/1.0
    Session Id: 0x1
10.255.255.1/32 Originating RIB: inet.3
    Metric: 1                      Node path count: 1
    Forwarding nexthops: 1
    Nexthop: 3.0.0.1 via ge-0/0/1.0

```

show route table mpls.0 (RSVP Route—Transit LSP)

```
user@host> show route table mpls.0
```

```

mpls.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

0          *[MPLS/0] 00:37:31, metric 1
            Receive
1          *[MPLS/0] 00:37:31, metric 1
            Receive
2          *[MPLS/0] 00:37:31, metric 1
            Receive
13         *[MPLS/0] 00:37:31, metric 1
            Receive
300352     *[RSVP/7/1] 00:08:00, metric 1
            > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300352(S=0) *[RSVP/7/1] 00:08:00, metric 1
            > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300384     *[RSVP/7/2] 00:05:20, metric 1
            > to 8.64.1.106 via ge-1/0/0.0, Pop
300384(S=0) *[RSVP/7/2] 00:05:20, metric 1
            > to 8.64.1.106 via ge-1/0/0.0, Pop

```

show route table vpls_1 detail

```
user@host> show route table vpls_1 detail
```

```

vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

```

```

1.1.1.11:1000:1:1/96 (1 entry, 1 announced)
*L2VPN Preference: 170/-1
Receive table: vpls_1.l2vpn.0
Next-hop reference count: 2
State: <Active Int Ext>
Age: 4:29:47 Metric2: 1
Task: vpls_1-l2vpn
Announcement bits (1): 1-BGP.0.0.0.0+179
AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:Site-Down
Label-base: 800000, range: 8, status-vector: 0xFF

```

show route table vpn-a

```
user@host> show route table vpn-a
```

```

vpn-a.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

```

```
+ = Active Route, - = Last Active, * = Both
```

```

192.168.16.1:1:1:1/96
    *[VPN/7] 05:48:27
    Discard
192.168.24.1:1:2:1/96
    *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
192.168.24.1:1:3:1/96
    *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am

```

show route table vpn-a.mdt.0

```

user@host> show route table vpn-a.mdt.0
vpn-a.mdt.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:1:0:10.255.14.216:232.1.1.1/144
    *[MVPN/70] 01:23:05, metric2 1
    Indirect
1:1:1:10.255.14.218:232.1.1.1/144
    *[BGP/170] 00:57:49, localpref 100, from 10.255.14.218
    AS path: I
    > via so-0/0/0.0, label-switched-path r0e-to-r1
1:1:2:10.255.14.217:232.1.1.1/144
    *[BGP/170] 00:57:49, localpref 100, from 10.255.14.217
    AS path: I
    > via so-0/0/1.0, label-switched-path r0-to-r2

```

show route table VPN-A detail

```

user@host> show route table VPN-A detail
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
    *BGP Preference: 170/-101
    Route Distinguisher: 10.255.179.13:200
    Next hop type: Indirect
    Next-hop reference count: 5
    Source: 10.255.179.13
    Next hop type: Router, Next hop index: 732
    Next hop: 10.39.1.14 via fe-0/3/0.0, selected
    Label operation: Push 299824, Push 299824(top)
    Protocol next hop: 10.255.179.13
    Push 299824
    Indirect next hop: 8f275a0 1048574
    State: (Secondary Active Int Ext)
    Local AS: 1 Peer AS: 1
    Age: 3:41:06 Metric: 1 Metric2: 1
    Task: BGP_1.10.255.179.13+64309
    Announcement bits (2): 0-KRT 1-BGP RT Background
    AS path: I
    Communities: target:1:200 rte-type:0.0.0.0:1:0
    Import Accepted
    VPN Label: 299824 TTL Action: vrf-ttl-propagate
    Localpref: 100
    Router ID: 10.255.179.13
    Primary Routing Table bgp.13vpn.0

```

show route table VPN-AB.inet.0

```

user@host> show route table VPN-AB.inet.0
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.0/30      *[OSPF/10] 00:07:24, metric 1
                  > via so-7/3/1.0
10.39.1.4/30      *[Direct/0] 00:08:42
                  > via so-5/1/0.0
10.39.1.6/32      *[Local/0] 00:08:46
                  Local
10.255.71.16/32   *[Static/5] 00:07:24
                  > via so-2/0/0.0
10.255.71.17/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
                  AS path: I
                  > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.18/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
                  AS path: I
                  > via so-2/1/0.0, Push 100021, Push 100011(top)
10.255.245.245/32 *[BGP/170] 00:08:35, localpref 100
                  AS path: 2 I
                  > to 10.39.1.5 via so-5/1/0.0
10.255.245.246/32 *[OSPF/10] 00:07:24, metric 1
                  > via so-7/3/1.0

```

show route table VPN_blue.mvpn-inet6.0

```

user@host> show route table VPN_blue.mvpn-inet6.0
vpn_blue.mvpn-inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:10.255.2.202:65535:10.255.2.202/432
                  *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
                  AS path: I
                  > via so-0/1/3.0
1:10.255.2.203:65535:10.255.2.203/432
                  *[BGP/170] 00:02:37, localpref 100, from 10.255.2.203
                  AS path: I
                  > via so-0/1/0.0
1:10.255.2.204:65535:10.255.2.204/432
                  *[MVPN/70] 00:57:23, metric2 1
                  Indirect
5:10.255.2.202:65535:128::192.168.90.2:128:ffff::1/432
                  *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
                  AS path: I
                  > via so-0/1/3.0
6:10.255.2.203:65535:65000:128::10.12.53.12:128:ffff::1/432
                  *[PIM/105] 00:02:37
                  Multicast (IPv6)
7:10.255.2.202:65535:65000:128::192.168.90.2:128:ffff::1/432
                  *[MVPN/70] 00:02:37, metric2 1
                  Indirect

```

show route table vrf1.mvpn.0 extensive

```

user@host> show route table vrf1.mvpn.0 extensive
1:10.255.50.77:1:10.255.50.77/240 (1 entry, 1 announced)
      *MVPN Preference: 70

```



```

PMSI: Flags 0x0: Label 0: RSVP-TE:
Session_13[10.255.50.77:0:25624:10.255.50.77]
  Next hop type: Indirect
  Address: 0xbb2c944
  Next-hop reference count: 360
  Protocol next hop: 10.255.50.77
  Indirect next hop: 0x0 - INH Session ID: 0x0
  State: <Active Int Ext>
  Age: 53:03      Metric2: 1
  Validation State: unverified
  Task: mvpn global task
  Announcement bits (3): 0-PIM.vrf1 1-mvpn global task 2-rt-export

AS path: I

```

show route table inetflow detail

```

user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
  *BGP      Preference: 170/-101
            Next-hop reference count: 2
            State: <Active Ext>
            Local AS: 65002 Peer AS: 65000
            Age: 4
            Task: BGP_65000.10.12.99.5+3792
            Announcement bits (1): 0-Flow
            AS path: 65000 I
            Communities: traffic-rate:0:0
            Validation state: Accept, Originator: 10.12.99.5
            Via: 10.12.44.0/24, Active
            Localpref: 100
            Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
  *Flow     Preference: 5
            Next-hop reference count: 2
            State: <Active>
            Local AS: 65002
            Age: 6:30
            Task: RT Flow
            Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
            AS path: I
            Communities: 1:1

user@PE1> show route table green.l2vpn.0 (VPLS Multihoming with FEC 129)
green.l2vpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.2:100:1.1.1.2/96 AD
      *[VPLS/170] 1d 03:11:03, metric2 1
      Indirect
1.1.1.4:100:1.1.1.4/96 AD
      *[BGP/170] 1d 03:11:02, localpref 100, from 1.1.1.4
      AS path: I, validation-state: unverified
      > via ge-1/2/1.5
1.1.1.2:100:1:0/96 MH
      *[VPLS/170] 1d 03:11:03, metric2 1
      Indirect
1.1.1.4:100:1:0/96 MH
      *[BGP/170] 1d 03:11:02, localpref 100, from 1.1.1.4

```

```

        AS path: I, validation-state: unverified
        > via ge-1/2/1.5
1.1.1.4:NoCtrlWord:5:100:100:1.1.1.2:1.1.1.4/176
        *[VPLS/7] 1d 03:11:02, metric2 1
        > via ge-1/2/1.5
1.1.1.4:NoCtrlWord:5:100:100:1.1.1.4:1.1.1.2/176
        *[LDP/9] 1d 03:11:02
        Discard

user@host> show route table red extensive
red.inet.0: 364481 destinations, 714087 routes (364480 active, 48448 holddown, 1
hidden)
22.0.0.0/32 (3 entries, 1 announced)
        State: <OnList CalcForwarding>
TSI:
KRT in-kerne 22.0.0.0/32 -> {composite(1048575)} Page 0 idx 1 Type 1 val 0x934342c

        Nexthop: Self
        AS path: [2] I
        Communities: target:2:1
Path 22.0.0.0 from 2.3.0.0 Vector len 4. Val: 1
    @BGP Preference: 170/-1
        Route Distinguisher: 2:1
        Next hop type: Indirect
        Address: 0x258059e4
        Next-hop reference count: 2
        Source: 2.2.0.0
        Next hop type: Router
        Next hop: 10.1.1.1 via ge-1/1/9.0, selected
        Label operation: Push 707633
        Label TTL action: prop-ttl
        Session Id: 0x17d8
        Protocol next hop: 2.2.0.0
        Push 16
        Composite next hop: 0x25805988 - INH Session ID: 0x193c
        Indirect next hop: 0x23eea900 - INH Session ID: 0x193c
        State: <Secondary Active Int Ext ProtectionPath ProtectionCand>
        Local AS: 2 Peer AS: 2
        Age: 23 Metric2: 35
        Validation State: unverified
        Task: BGP_2.2.2.0.0+34549
        AS path: I
        Communities: target:2:1
        Import Accepted
        VPN Label: 16
        Localpref: 0
        Router ID: 2.2.0.0
        Primary Routing Table bgp.13vpn.0
        Composite next hops: 1
            Protocol next hop: 2.2.0.0 Metric: 35
            Push 16
            Composite next hop: 0x25805988 - INH Session ID: 0x193c
            Indirect next hop: 0x23eea900 - INH Session ID: 0x193c
            Indirect path forwarding next hops: 1
                Next hop type: Router
                Next hop: 10.1.1.1 via ge-1/1/9.0
                Session Id: 0x17d8
            2.2.0.0/32 Originating RIB: inet.3
                Metric: 35 Node path count: 1
                Forwarding nexthops: 1
                    Nexthop: 10.1.1.1 via ge-1/1/9.0

```

```

BGP      Preference: 170/-1
          Route Distinguisher: 2:1
          Next hop type: Indirect
          Address: 0x9347028
          Next-hop reference count: 3
          Source: 2.3.0.0
          Next hop type: Router, Next hop index: 702
          Next hop: 10.1.4.2 via ge-1/0/0.0, selected
          Label operation: Push 634278
          Label TTL action: prop-ttl
          Session Id: 0x17d9
          Protocol next hop: 2.3.0.0
          Push 16
          Composite next hop: 0x93463a0 1048575 INH Session ID: 0x17da
          Indirect next hop: 0x91e8800 1048574 INH Session ID: 0x17da
          State: <Secondary NotBest Int Ext ProtectionPath ProtectionCand>

          Inactive reason: Not Best in its group - IGP metric
          Local AS:      2 Peer AS:      2
          Age: 3:34      Metric2: 70
          Validation State: unverified
          Task: BGP_2.2.3.0.0+32805
          Announcement bits (2): 0-KRT 1-BGP_RT_Background
          AS path: I
          Communities: target:2:1
          Import Accepted
          VPN Label: 16
          Localpref: 0
          Router ID: 2.3.0.0
          Primary Routing Table bgp.l3vpn.0
          Composite next hops: 1
            Protocol next hop: 2.3.0.0 Metric: 70
            Push 16
            Composite next hop: 0x93463a0 1048575 INH Session ID:
0x17da
            Indirect next hop: 0x91e8800 1048574 INH Session ID:
0x17da
            Indirect path forwarding next hops: 1
              Next hop type: Router
              Next hop: 10.1.4.2 via ge-1/0/0.0
              Session Id: 0x17d9
            2.3.0.0/32 Originating RIB: inet.3
              Metric: 70                      Node path count: 1
              Forwarding nexthops: 1
                Nexthop: 10.1.4.2 via ge-1/0/0.0
#Multipath Preference: 255
          Next hop type: Indirect
          Address: 0x24afca30
          Next-hop reference count: 1
          Next hop type: Router
          Next hop: 10.1.1.1 via ge-1/1/9.0, selected
          Label operation: Push 707633
          Label TTL action: prop-ttl
          Session Id: 0x17d8
          Next hop type: Router, Next hop index: 702
          Next hop: 10.1.4.2 via ge-1/0/0.0
          Label operation: Push 634278
          Label TTL action: prop-ttl
          Session Id: 0x17d9
          Protocol next hop: 2.2.0.0
          Push 16

```

Composite next hop: 0x25805988 - INH Session ID: 0x193c
Indirect next hop: 0x23eea900 - INH Session ID: 0x193c Weight 0x1

Protocol next hop: 2.3.0.0
Push 16
Composite next hop: 0x93463a0 1048575 INH Session ID: 0x17da
Indirect next hop: 0x91e8800 1048574 INH Session ID: 0x17da Weight

0x4000

State: <ForwardingOnly Int Ext>
Inactive reason: Forwarding use only
Age: 23 Metric2: 35
Validation State: unverified
Task: RT
AS path: I
Communities: target:2:1

show route terse


List of Syntax	Syntax on page 371 Syntax (EX Series Switches) on page 371
Syntax	<pre>show route terse <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switches)	show route terse
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display a high-level summary of the routes in the routing table.
<div>  <p>NOTE: For BGP routes, the <code>show route terse</code> command displays the local preference attribute and MED instead of the metric1 and metric2 values. This is mostly due to historical reasons.</p> <p>To display the metric1 and metric2 value of a BGP route, use the show route extensive command.</p> </div>	
Options	<p>none—Display a high-level summary of the routes in the routing table.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
List of Sample Output	show route terse on page 373
Output Fields	Table 37 on page 371 describes the output fields for the <code>show route terse</code> command. Output fields are listed in the approximate order in which they appear.

Table 37: show route terse Output Fields

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> active (routes that are active) holddown (routes that are in the pending state before being declared inactive) hidden (routes that are not used because of a routing policy)

Table 37: show route terse Output Fields (*continued*)

Field Name	Field Description
<i>route key</i>	<p>Key for the state of the route:</p> <ul style="list-style-type: none"> • +—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table. • -—A hyphen indicates the last active route. • *—An asterisk indicates that the route is both the active and the last active route. An asterisk before a to line indicates the best subpath to the route.
A	Active route. An asterisk (*) indicates this is the active route.
V	<p>Validation status of the route:</p> <ul style="list-style-type: none"> • ?—Not evaluated. Indicates that the route was not learned through BGP. • I—Invalid. Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database. • N—Unknown. Indicates that the prefix is not among the prefixes or prefix ranges in the database. • V—Valid. Indicates that the prefix and autonomous system pair are found in the database.
Destination	Destination of the route.
P	<p>Protocol through which the route was learned:</p> <ul style="list-style-type: none"> • A—Aggregate • B—BGP • C—CCC • D—Direct • G—GMPLS • I—IS-IS • L—L2CKT, L2VPN, LDP, Local • K—Kernel • M—MPLS, MSDP • O—OSPF • P—PIM • R—RIP, RIPng • S—Static • T—Tunnel
Prf	<p>Preference value of the route. In every routing metric except for the BGP LocalPref attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the LocalPref value in the Preference2 field. For example, if the LocalPref value for Route 1 is 100, the Preference2 value is -101. If the LocalPref value for Route 2 is 155, the Preference2 value is -156. Route 2 is preferred because it has a higher LocalPref value and a lower Preference2 value.</p>
Metric 1	First metric value in the route. For routes learned from BGP, this is the MED metric.
Metric 2	Second metric value in the route. For routes learned from BGP, this is the IGP metric.

Table 37: show route terse Output Fields (*continued*)

Field Name	Field Description
Next hop	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> I—IGP. E—EGP. ?—Incomplete; typically, the AS path was aggregated.

Sample Output

show route terse

```

user@host> show route terse
inet.0: 10 destinations, 12 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A V Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* ? 1.0.1.1/32        0 10      1           >10.0.0.2      I
?                               B 170      100           >10.0.0.2      I
  unverified
* ? 1.1.1.1/32        D 0           >10.0.0.2      200 I
* V 2.2.0.2/32        B 170     110         >10.0.0.2
  valid
* ? 10.0.0.0/30       D 0           >1t-1/2/0.1    I
?                               B 170     100         >10.0.0.2
  unverified
* ? 10.0.0.1/32       L 0           Local          I
* ? 10.0.0.4/30       B 170     100         >10.0.0.2      I
  unverified
* ? 10.0.0.8/30       B 170     100         >10.0.0.2      I
  unverified
* I 172.16.1.1/32     B 170      90         >10.0.0.2      200 I
  invalid
* N 192.168.2.3/32    B 170     100         >10.0.0.2      200 I
  unknown
* ? 224.0.0.5/32      O 10      1           MultiRecv

```

