



---

# Routing Options Feature Guide for QFX10000 Switches



---

Modified: 2018-02-20

Juniper Networks, Inc.  
1133 Innovation Way  
Sunnyvale, California 94089  
USA  
408-745-2000  
[www.juniper.net](http://www.juniper.net)

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. and/or its affiliates in the United States and other countries. All other trademarks may be property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

*Routing Options Feature Guide for QFX10000 Switches*  
Copyright © 2018 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

	About the Documentation . . . . .	xiii
	Documentation and Release Notes . . . . .	xiii
	Supported Platforms . . . . .	xiii
	Using the Examples in This Manual . . . . .	xiii
	Merging a Full Example . . . . .	xiv
	Merging a Snippet . . . . .	xiv
	Documentation Conventions . . . . .	xv
	Documentation Feedback . . . . .	xvii
	Requesting Technical Support . . . . .	xvii
	Self-Help Online Tools and Resources . . . . .	xvii
	Opening a Case with JTAC . . . . .	xviii
<b>Chapter 1</b>	<b>Configuring Routing Options . . . . .</b>	<b>19</b>
	Overview of Routing Options . . . . .	19
	Configuring Static Routing . . . . .	21
	Configuring Per-Packet Load Balancing . . . . .	21
	Examples: Configuring Per-Packet Load Balancing . . . . .	23
	Using a QFX10000 Switch with 6PE . . . . .	24
	Understanding Virtual Router Routing Instances . . . . .	25
	Configuring Virtual Router Routing Instances . . . . .	26
	Understanding Distributed Periodic Packet Management . . . . .	27
	Configuring Distributed Periodic Packet Management . . . . .	28
	Disabling or Enabling Distributed Periodic Packet Management Globally . . . . .	28
	Disabling or Enabling Distributed Periodic Packet Management for LACP Packets . . . . .	28
	Understanding Bidirectional Forwarding Detection (BFD) . . . . .	29
	Examples: Configuring BFD for Static Routes . . . . .	30
	Understanding BFD for Static Routes for Faster Network Failure Detection . . . . .	30
	Example: Configuring BFD for Static Routes for Faster Network Failure Detection . . . . .	34
	Example: Enabling BFD on Qualified Next Hops in Static Routes for Route Selection . . . . .	40
	Example: Configuring BFD Authentication for Static Routes . . . . .	47
	Understanding BFD Authentication for Static Route Security . . . . .	47
	BFD Authentication Algorithms . . . . .	48
	Security Authentication Keychains . . . . .	49
	Strict Versus Loose Authentication . . . . .	49
	Example: Configuring BFD Authentication for Securing Static Routes . . . . .	49

IPv4 Address Conservation Method for Hosting Providers . . . . .	56
The Issue, Illustrated . . . . .	56
Solution . . . . .	57
Configuration . . . . .	58
IPv6 Neighbor Discovery Overview . . . . .	59
Improvements Over Ipv4 Protocols . . . . .	60
Router Discovery . . . . .	61
Address Resolution . . . . .	61
Redirect . . . . .	61
Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery . . . . .	61
Neighbor Discovery Cache Protection Overview . . . . .	70
Configuring Neighbor Discovery Cache Protection . . . . .	71
Monitoring Routing Information . . . . .	72
Verifying That Virtual Router Routing Instances Are Working . . . . .	74
Troubleshooting Virtual Routing Instances . . . . .	75
Direct Routes Not Leaked Between Routing Instances . . . . .	75

## Part 1

### Chapter 2

## Configuration Statements and Operational Commands

<b>Configuration Statements (Routing Options) . . . . .</b>	<b>79</b>
active . . . . .	82
aggregate (Routing) . . . . .	84
as-path (Routing Options) . . . . .	86
autonomous-system . . . . .	88
backup-pe-group . . . . .	90
backups . . . . .	91
bandwidth . . . . .	92
bfd-liveness-detection (Routing Options Static Route) . . . . .	93
bgp-orf-cisco-mode . . . . .	97
bmp . . . . .	99
brief . . . . .	102
centralized . . . . .	103
community (Routing Options) . . . . .	104
confederation . . . . .	106
disable (Routing Options) . . . . .	107
description (Routing Instances) . . . . .	108
discard . . . . .	109
export (Routing Options) . . . . .	110
export-rib . . . . .	111
fate-sharing . . . . .	114
flow . . . . .	116
flow-map . . . . .	118
forwarding-cache (Flow Maps) . . . . .	119
forwarding-cache (Multicast) . . . . .	120
forwarding-options (chassis) . . . . .	121
forwarding-table . . . . .	124
generate . . . . .	125
graceful-restart (Enabling Globally) . . . . .	127
import . . . . .	128

import-policy	129
import-rib	130
indirect-next-hop	131
install (Routing Options)	132
instance-export	133
instance-import	133
instance-type	134
interface (Multicast Static Routes)	135
interface (Routing Instances)	136
interface (Routing Options)	137
interface-routes	138
local-address (Routing Options)	140
martians	141
maximum-bandwidth	142
maximum-paths	143
maximum-prefixes	145
med-igp-update-interval	147
metric (Aggregate, Generated, or Static Route)	148
multicast (Routing Options)	149
nd-system-cache-limit	150
nd6-max-cache	151
nd6-new-hold-limit	152
no-qos-adjust	153
options (Routing Options)	154
pim-to-igmp-proxy	155
pim-to-mld-proxy	156
policy (Aggregate and Generated Routes)	157
policy (Flow Maps)	158
policy-options	159
policy-statement	160
ppm	165
ppm (Ethernet Switching)	166
preference (Routing Options)	167
prefix	168
protocols	169
qualified-next-hop (Static Routes)	172
readvertise	174
redundant-sources	175
resolution	176
resolution-ribs	178
resolve	179
restart-duration (Routing Options)	180
retain	181
reverse-oif-mapping	182
rpf-check-policy (Routing Options RPF)	183
rib (General)	184
rib (Route Resolution)	186
rib-group (Routing Options)	187
rib-groups	188

	route-distinguisher-id . . . . .	190
	route-record . . . . .	191
	router-id . . . . .	192
	routing-instances . . . . .	193
	routing-options . . . . .	194
	scope . . . . .	195
	scope-policy . . . . .	196
	source (Source-Specific Multicast) . . . . .	197
	source-routing . . . . .	198
	ssm-groups . . . . .	199
	ssm-map (Routing Options Multicast) . . . . .	200
	static (Routes) . . . . .	201
	subscriber-leave-timer . . . . .	203
	tag (Routing Options) . . . . .	204
	threshold (Multicast Forwarding Cache) . . . . .	205
	timeout (Flow Maps) . . . . .	207
	timeout (Multicast) . . . . .	208
	traceoptions . . . . .	209
	upstream-interface . . . . .	212
<b>Chapter 3</b>	<b>Operational Commands (Routing Options) . . . . .</b>	<b>213</b>
	clear ipv6 neighbors . . . . .	215
	show as-path . . . . .	216
	show as-path domain . . . . .	221
	show as-path summary . . . . .	224
	show ipv6 neighbors . . . . .	226
	show ipv6 router-advertisement . . . . .	228
	show route . . . . .	231
	show route active-path . . . . .	252
	show route all . . . . .	257
	show route aspath-regex . . . . .	259
	show route best . . . . .	261
	show route brief . . . . .	264
	show route community . . . . .	266
	show route community-name . . . . .	268
	show route damping . . . . .	270
	show route detail . . . . .	275
	show route exact . . . . .	295
	show route export . . . . .	297
	show route extensive . . . . .	300
	show route flow validation . . . . .	318
	show route forwarding-table . . . . .	320
	show route inactive-path . . . . .	338
	show route inactive-prefix . . . . .	342
	show route instance . . . . .	344
	show route label . . . . .	352
	show route label-switched-path . . . . .	357
	show route martians . . . . .	359
	show route next-hop . . . . .	362

show route no-community . . . . .	368
show route protocol . . . . .	371
show route range . . . . .	384
show route receive-protocol . . . . .	389
show route resolution . . . . .	399
show route snooping . . . . .	404
show route source-gateway . . . . .	407
show route summary . . . . .	413
show route table . . . . .	417
show route terse . . . . .	455





# List of Figures

<b>Chapter 1</b>	<b>Configuring Routing Options . . . . .</b>	<b>19</b>
	Figure 1: Customer Routes Connected to a Service Provider . . . . .	35
	Figure 2: BFD Enabled on Qualified Next Hops . . . . .	41
	Figure 3: Customer Routes Connected to a Service Provider . . . . .	50
	Figure 4: Inefficient Use of IP Address Space . . . . .	57
	Figure 5: Configuration Using the Shared Address Space . . . . .	58
	Figure 6: ICMP Router Discover Topology . . . . .	63



# List of Tables

	<b>About the Documentation</b> . . . . .	<b>xiii</b>
	Table 1: Notice Icons . . . . .	xv
	Table 2: Text and Syntax Conventions . . . . .	xvi
<b>Chapter 1</b>	<b>Configuring Routing Options</b> . . . . .	<b>19</b>
	Table 3: Filtering Route Messages . . . . .	73
	Table 4: Summary of Key Routing Information Output Fields . . . . .	73
<b>Part 1</b>	<b>Configuration Statements and Operational Commands</b>	
<b>Chapter 2</b>	<b>Configuration Statements (Routing Options)</b> . . . . .	<b>79</b>
	Table 5: Unified Forwarding Table Profiles . . . . .	123
<b>Chapter 3</b>	<b>Operational Commands (Routing Options)</b> . . . . .	<b>213</b>
	Table 6: show as-path Output Fields . . . . .	217
	Table 7: show as-path domain Output Fields . . . . .	221
	Table 8: show as-path summary Output Fields . . . . .	224
	Table 9: show ipv6 neighbors Output Fields . . . . .	226
	Table 10: show ipv6 router-advertisement Output Fields . . . . .	229
	Table 11: show route Output Fields . . . . .	232
	Table 12: show route damping Output Fields . . . . .	271
	Table 13: show route detail Output Fields . . . . .	275
	Table 14: Next-hop Types Output Field Values . . . . .	281
	Table 15: State Output Field Values . . . . .	283
	Table 16: Communities Output Field Values . . . . .	285
	Table 17: show route export Output Fields . . . . .	298
	Table 18: show route extensive Output Fields . . . . .	300
	Table 19: show route flow validation Output Fields . . . . .	318
	Table 20: show route forwarding-table Output Fields . . . . .	323
	Table 21: show route instance Output Fields . . . . .	345
	Table 22: show route martians Output Fields . . . . .	359
	Table 23: show route receive-protocol Output Fields . . . . .	390
	Table 24: show route resolution Output Fields . . . . .	401
	Table 25: show route summary Output Fields . . . . .	414
	Table 26: show route table Output Fields . . . . .	418
	Table 27: Next-hop Types Output Field Values . . . . .	424
	Table 28: State Output Field Values . . . . .	425
	Table 29: Communities Output Field Values . . . . .	427
	Table 30: show route terse Output Fields . . . . .	455



# About the Documentation

- Documentation and Release Notes on page xiii
- Supported Platforms on page xiii
- Using the Examples in This Manual on page xiii
- Documentation Conventions on page xv
- Documentation Feedback on page xvii
- Requesting Technical Support on page xvii

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

## Supported Platforms

---

For the features described in this document, the following platforms are supported:

- [QFX Series](#)

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

## Documentation Conventions

Table 1 on page xv defines notice icons used in this guide.

Table 1: Notice Icons





Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xvi defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b>  No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies guide names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS CLI User Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols <b>ospf area area-id</b>] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Encloses optional keywords or variables.	<b>stub</b> <default-metric <i>metric</i> >;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast</b>   <b>multicast</b>  ( <i>string1</i>   <i>string2</i>   <i>string3</i> )
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Encloses a variable for which you can substitute one or more values.	<b>community name members</b> [ <b>community-ids</b> ]
Indentation and braces ( { } )	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	

---

#### GUI Conventions



Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
<b>Bold text like this</b>	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
<b>&gt;</b> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .

## Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback rating system—On any page of the Juniper Networks TechLibrary site at <http://www.juniper.net/techpubs/index.html>, simply click the stars to rate the content, and use the pop-up form to provide us with information about your experience. Alternately, you can use the online feedback form at <http://www.juniper.net/techpubs/feedback/>.
- E-mail—Send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net). Include the document or topic name, URL or page number, and software version (if applicable).

## Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <https://prsearch.juniper.net/>
- Find product documentation: <http://www.juniper.net/documentation/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes:  
<http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications:  
<http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum:  
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://entitlementsearch.juniper.net/entitlementsearch/>

## Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

## CHAPTER 1

# Configuring Routing Options

- [Overview of Routing Options on page 19](#)
- [Configuring Static Routing on page 21](#)
- [Configuring Per-Packet Load Balancing on page 21](#)
- [Examples: Configuring Per-Packet Load Balancing on page 23](#)
- [Using a QFX10000 Switch with 6PE on page 24](#)
- [Understanding Virtual Router Routing Instances on page 25](#)
- [Configuring Virtual Router Routing Instances on page 26](#)
- [Understanding Distributed Periodic Packet Management on page 27](#)
- [Configuring Distributed Periodic Packet Management on page 28](#)
- [Understanding Bidirectional Forwarding Detection \(BFD\) on page 29](#)
- [Examples: Configuring BFD for Static Routes on page 30](#)
- [Example: Configuring BFD Authentication for Static Routes on page 47](#)
- [IPv4 Address Conservation Method for Hosting Providers on page 56](#)
- [IPv6 Neighbor Discovery Overview on page 59](#)
- [Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 61](#)
- [Neighbor Discovery Cache Protection Overview on page 70](#)
- [Configuring Neighbor Discovery Cache Protection on page 71](#)
- [Monitoring Routing Information on page 72](#)
- [Verifying That Virtual Router Routing Instances Are Working on page 74](#)
- [Troubleshooting Virtual Routing Instances on page 75](#)

## Overview of Routing Options

---

In addition to dynamic routing protocols, you can configure static routing on QFX Series switches. You can also configure a variety of protocol-independent routing properties, such as

- Per-packet load balancing (equal cost multipath routing)
- Autonomous system numbers
- Autonomous system confederation members

- Router identifiers
- Routing table groups
- Multicast scoping

**Related  
Documentation**

- [Understanding Distributed Periodic Packet Management on page 27](#)
- [Understanding Virtual Router Routing Instances on page 25](#)

## Configuring Static Routing

Static routes are routes that are manually configured and entered into the routing table.

The switch uses static routes:

- When the switch does not have a route to a destination that has a better (lower) *preference* value. The preference is an arbitrary value in the range from 0 through 255 that the software uses to rank routes received from different protocols, interfaces, or remote systems. The routing protocol process generally determines the active route by selecting the route with the lowest preference value. In the given range, **0** is the lowest and **255** is the highest.
- When the switch cannot determine the route to a destination.
- When the switch is forwarding unroutable packets.

To configure basic static route options using the CLI:

- To configure the switch's default gateway:

```
[edit]
user@switch# set routing-options static route 0.0.0.0/0 next-hop 10.0.1.1
```

- To configure a static route and specify the next address to be used when routing traffic to the static route:

```
[edit]
user@switch# set routing-options static route 198.51.100.0/24 next-hop 10.0.0.2
```

- To always keep the static route in the forwarding table:

```
[edit]
user@switch# set routing-options static route 198.51.100.0/24 retain
```

- To prevent the static route from being readvertised:

```
[edit]
user@switch# set routing-options static route 198.51.100.0/24 no-readvertise
```

- To remove inactive routes from the forwarding table:

```
[edit]
user@switch# set routing-options static route 198.51.100.0/24 active
```

### Related Documentation

- [Monitoring Routing Information on page 72](#)

## Configuring Per-Packet Load Balancing

By default, when there are multiple equal-cost paths to the same destination for the active route, Junos OS chooses one of the next-hop addresses to install into the forwarding table in a random fashion. Whenever the set of next hops for a destination changes in any way, the next-hop address is chosen again, also in a random fashion.

You can configure Junos OS so that, for the active route, all next-hop addresses for a destination are installed in the forwarding table. This is called per-packet load balancing. You can use this feature to spread traffic across multiple paths.

On a QFX3500 standalone switch, with static routing configured, whenever a route pointing to an ECMP next-hop changes to a new ECMP next-hop with a different member list but contains the exact member count as before, the location of the retained members in the new member list is the same as in the old member list.

For example, if you have the following configuration on the switch:

```
set routing-options static route 0.0.0.0/0 next-hop 192.0.2.2
set routing-options static route 0.0.0.0/0 next-hop 192.0.2.3
set routing-options static route 0.0.0.0/0 next-hop 192.0.2.4
set routing-options static route 0.0.0.0/0 next-hop 198.51.100.2
set routing-options static route 0.0.0.0/0 next-hop 198.51.100.3
set routing-options static route 0.0.0.0/0 next-hop 198.51.100.4
set routing-options static route 0.0.0.0/0 next-hop 203.0.113.1
set routing-options static route 0.0.0.0/0 next-hop 203.0.113.2
```

and want to change the first and eighth route to point to another location, you can issue the following commands:

```
delete routing-options static route 0.0.0.0/0 next-hop 192.0.2.3
delete routing-options static route 0.0.0.0/0 next-hop 203.0.113.2
set routing-options static route 0.0.0.0/0 next-hop 192.0.2.5
set routing-options static route 0.0.0.0/0 next-hop 203.0.113.3
```

This configuration does not affect the second next-hop through the seventh next-hop.

When per-packet load balancing is configured, traffic is divided into individual flows (up to a maximum of 16). Packets for an individual flow are sent out a single interface. To determine flows, the switch examines each of the following packet fields:

- Source IP address
- Destination IP address
- Protocol
- Source port number
- Destination port number
- Source interface index
- Type of service (ToS)

The switch recognizes packets in which all of these parameters are identical and ensures that these packets are sent out through the same interface. This prevents problems that might otherwise occur with packets arriving at their destination out of their original sequence.



**NOTE:** Load balancing is not supported on management interfaces.

---

The following steps shows how to configure per-packet load balancing:

1. Define a load-balancing routing policy by including one or more **policy-statement** statements at the **[edit policy-options]** hierarchy level, defining an action of **load-balance per-packet**:

```
policy-statement policy-name {
  from {
    match-conditions;
    route-filter destination-prefix match-type <actions>;
    prefix-list name;
  }
  then {
    load-balance per-packet;
  }
}
```

2. Apply the policy to routes exported from the routing table to the forwarding table. To do this, include the **forwarding-table** and **export** statements:

```
forwarding-table {
  export policy-name;
}
```

When you enable per-packet load balancing on a QFabric system, packets might be switched across the fabric even though there is a local port with a same-cost route to the destination. For example, if per-packet load balancing is enabled and a packet arrives at network Node device A, it might be switched to network Node device B and forwarded from there even if there is a same-cost route through a port on Node device A to the destination. In this case, traffic transits the fabric needlessly. you can configure a QFabric system to choose a locally switched route if one is available. To enable this feature, include the **ecmp-do-local-lookup** statement at the **[edit forwarding-options]** hierarchy level.

#### Related Documentation

- [Examples: Configuring Per-Packet Load Balancing on page 23](#)
- [Understanding the Use of Resilient Hashing to Minimize Flow Remapping in Trunk/ECMP Groups](#)

## Examples: Configuring Per-Packet Load Balancing

Perform per-packet load balancing for all routes:

```
[edit]
policy-options {
  policy-statement load-balancing-policy {
    then {
      load-balance per-packet;
    }
  }
}
routing-options {
  forwarding-table {
    export load-balancing-policy;
  }
}
```

```
}  
}
```

Perform per-packet load balancing for a limited set of routes:

```
[edit]  
policy-options {  
  policy-statement load-balancing-policy {  
    from {  
      route-filter 192.168.10/24 orlonger;  
      route-filter 9.114/16 orlonger;  
    }  
    then {  
      load-balance per-packet;  
    }  
  }  
}  
routing-options {  
  forwarding-table {  
    export load-balancing-policy;  
  }  
}
```

- Related Documentation**
- [Configuring Per-Packet Load Balancing on page 21](#)
  - *Understanding the Use of Resilient Hashing to Minimize Flow Remapping in Trunk/ECMP Groups*

---

## Using a QFX10000 Switch with 6PE

Using 6PE allows service providers to provide new revenue-generating services to customers by offering native IPv6 connectivity over an MPLS core network without having to configure or upgrade the core routers or change the existing IPv4 and MPLS services. To use 6PE you configure dual-stack (IPv4 and IPv6) provider edge (PE) devices to tunnel IPv6 traffic over MPLS.

When you use a QFX10000 switch as a PE device in a 6PE topology, you must enable **family inet6** on the core-facing interfaces that will be used for the IPv6 traffic. If you do not do so, these interfaces drop the IPv6 traffic.

- Related Documentation**
- *MPLS Feature Guide for QFX10000 Switches*



## Understanding Virtual Router Routing Instances

---

Virtual router routing instances allow administrators to divide a QFX Series switch into multiple independent virtual routers, each with its own routing table. Virtual router routing instances enable you to isolate traffic without using multiple devices to segment your network. You can create routing instances for unicast routing protocols and PIM sparse mode.

Each virtual router routing instance consists of sets of the following:

- Routing tables
- Interfaces that belong to these routing tables
- Routing protocol configurations
- Routing option configurations

You can use virtual router routing instances to isolate customer traffic on a network and to bind customer-specific routing instances to customer-owned interfaces. Each interface can belong only to one routing instance.

### **Related Documentation**

- [Configuring Virtual Router Routing Instances on page 26](#)

## Configuring Virtual Router Routing Instances

Use virtual router routing instances to divide a QFX Series switch into multiple independent virtual routers, each with its own routing table. Virtual router routing instances enable you to isolate traffic without using multiple devices to segment your network. You can create routing instances for unicast routing protocols and PIM sparse mode.



**NOTE:** The QFX5100, QFX5110, and QFX5200 switches do not depend on the VRF match for loopback filters configured at different routing instances. Loopback filters per routing instance (such as lo0.100, lo0.103, lo0.105) are not supported and may cause unpredictable behavior. We recommend that you apply the loopback filter to the lo0.0 (master routing instance) only.

To configure virtual router routing instances:

1. Create a routing instance:

```
[edit routing-instances]
user@switch# set routing-instance-name instance-type virtual-router
```



**NOTE:** The default routing instance, master, refers to the main inet.0 routing table. The master routing instance is reserved and cannot be specified as a routing instance.

2. Bind each routing instance to the corresponding interfaces:

```
[edit routing-instances]
user@switch# set routing-instance-name interface
device-name:type-fpc/pic/port.logical-unit-number
```



**NOTE:**

- You must bind routing instances to interfaces from the Node devices assigned to the network Node group only. If you try to bind routing instances to interfaces from the Node devices assigned to server Node groups, the configuration does not commit.
- You can bind an interface to one routing instance only.

3. Create each of the logical interfaces bound to each routing instance:

```
[edit interfaces]
user@switch# set device-name:type-fpc/pic/port unit logical-unit-number family inet address
ip-address
```



**NOTE:** Do not create a logical interface using the family ethernet-switching option in this step. Binding an interface using the family ethernet-switching option to a routing instance can cause the interface to shut down.

4. (Optional) Configure routing protocols for the routing instance at the **[edit routing-instances *routing-instance-name* protocols]** hierarchy level.
5. (Optional) Configure routing options for the routing instance at the **[edit routing-instances *routing-instance-name* routing-options]** hierarchy level.

**Related  
Documentation**

- [Understanding Virtual Router Routing Instances on page 25](#)
- [Verifying That Virtual Router Routing Instances Are Working on page 74](#)

## Understanding Distributed Periodic Packet Management

Periodic packet management (PPM) is responsible for processing a variety of time-sensitive periodic tasks for particular processes so that other processes can more optimally direct their resources. PPM is responsible for the periodic transmission of packets on behalf of its various client processes, which include the processes that control the Link Aggregation Control Protocol (LACP) and Bidirectional Forwarding Detection (BFD) protocol, and also for receiving packets on behalf of these client processes. PPM also gathers some statistics and sends process-specific packets. PPM cannot be disabled and is always running on any operational switch.

The responsibility for PPM processing on the switch is distributed between the Routing Engine and the access interfaces for all protocols that use PPM by default. This distributed model provides a faster response time for protocols that use PPM than the response time provided by the nondistributed model.

If distributed PPM is disabled, the PPM process runs on the Routing Engine only.

You can disable distributed PPM for all protocols that use PPM. You can also disable distributed PPM for LACP packets only.



**BEST PRACTICE:** We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.

**Related  
Documentation**

- [Configuring Distributed Periodic Packet Management on page 28](#)

## Configuring Distributed Periodic Packet Management

---

Periodic packet management (PPM) is responsible for processing a variety of time-sensitive periodic tasks so that other processes can more optimally direct their resources.

The responsibility for PPM processing on the switch is distributed between the Routing Engine and the access interfaces for all protocols that use PPM by default. This distributed model provides a faster response time for protocols that use PPM than the response time provided by the nondistributed model.

If distributed PPM is disabled, the PPM process runs on the Routing Engine only.

You can disable distributed PPM for all protocols that use PPM. You can also disable distributed PPM for Link Aggregation Control Protocol (LACP) packets only.



**BEST PRACTICE:** We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.

This topic describes:

- [Disabling or Enabling Distributed Periodic Packet Management Globally on page 28](#)
- [Disabling or Enabling Distributed Periodic Packet Management for LACP Packets on page 28](#)

### Disabling or Enabling Distributed Periodic Packet Management Globally

Distributed PPM is enabled by default. Disable distributed PPM if you need to move all PPM processing to the Routing Engine. Enable distributed PPM if it was previously disabled and you need to run distributed PPM.

To disable distributed PPM:

```
[edit routing-options]
user@switch# set ppm no-delegate-processing
```

To enable distributed PPM if it was previously disabled:

```
[edit routing-options]
user@switch# delete ppm no-delegate-processing
```

### Disabling or Enabling Distributed Periodic Packet Management for LACP Packets

Distributed PPM is enabled by default. Disable distributed PPM for only LACP packets if you need to move all PPM processing for LACP packets to the Routing Engine.

To disable distributed PPM for LACP packets:

```
[edit protocols]
user@switch# set lacp ppm centralized
```

To enable distributed PPM for LACP packets if it was previously disabled:

```
[edit protocols]
user@switch# delete lacp ppm centralized
```

**Related  
Documentation**

- [Understanding Distributed Periodic Packet Management on page 27](#)
- [Understanding Aggregated Ethernet Interfaces and LACP](#)

## Understanding Bidirectional Forwarding Detection (BFD)

The Bidirectional Forwarding Detection (BFD) protocol is a simple mechanism that detects failures in a network and works in a wide variety of network environments and topologies. In BFD operation, switches exchange BFD hello packets at a specified interval and detect a neighbor failure if they do not receive a reply after a specified interval. The BFD failure detection timers support shorter time limits than the static route failure detection mechanisms, so they can provide faster detection of failures.

To configure faster failure detection, use lower BFD timer values. The timers can automatically adapt to a higher value if an adjacency fails, and they also adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. In this case, a back-off algorithm increases the receive interval by two if the local BFD instance is the reason for the session flap and increases the transmission interval by two if the remote BFD instance is the reason for the session flap.

You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. This command is hitless, meaning that it does not affect traffic flow.



**NOTE:** QFX10000 series switches support BFD timer values of less than 1 second.



**NOTE:** QFX5100 switches and EX4600 switches do not support BFD timer values of less than 1 second.



**NOTE:** BFD is not supported with ISIS for IPv6 on QFX10000 series switches.



**NOTE:** EX3300 supports BFD over static routes only.

**Related  
Documentation**

- [Examples: Configuring BFD for Static Routes on page 30](#)
- [Example: Configuring BFD Authentication for Static Routes on page 47](#)

## Examples: Configuring BFD for Static Routes

---

- [Understanding BFD for Static Routes for Faster Network Failure Detection on page 30](#)
- [Example: Configuring BFD for Static Routes for Faster Network Failure Detection on page 34](#)
- [Example: Enabling BFD on Qualified Next Hops in Static Routes for Route Selection on page 40](#)

### Understanding BFD for Static Routes for Faster Network Failure Detection

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchanges BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the static route failure detection mechanisms, so they provide faster detection.

The BFD failure detection timers can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

By default, BFD is supported on single-hop static routes.

To enable failure detection, include the **bfd-liveness-detection** statement in the static route configuration.



**NOTE:** Starting with Junos OS Release 15.1X49-D70 and Junos OS Release 17.3R1, the **bfd-liveness-detection** command includes the description field. The description is an attribute under the **bfd-liveness-detection** object and it is supported only on SRX Series devices. This field is applicable only for the static routes.

---

In Junos OS Release 9.1 and later, the BFD protocol is supported for IPv6 static routes. Global unicast and link-local IPv6 addresses are supported for static routes. The BFD protocol is not supported on multicast or anycast IPv6 addresses. For IPv6, the BFD protocol supports only static routes and only in Junos OS Release 9.3 and later. IPv6 for BFD is also supported for the eBGP protocol.



**NOTE:** Inline BFD is supported on PTX5000 routers with third-generation FPCs starting in Junos OS Release 15.1F3 and 16.1R2. Inline BFD is supported on PTX3000 routers with third-generation FPCs starting in Junos OS Release 15.1F6 and 16.1R2.

There are three types of BFD sessions based on the source from which BFD packets are sent to the neighbors. Different types of BFD sessions and their descriptions are:

Type of BFD session	Description
Non-distributed BFD	BFD sessions running completely on the Routing Engine.
Distributed BFD	BFD sessions running completely on the Packet Forwarding Engine.
Inline BFD	BFD sessions running on the FPC hardware.

**NOTE:** Starting in Junos OS Release 13.3, inline BFD is supported only on static MX Series routers with MPCs/MICs that have configured **enhanced-ip**.

**NOTE:** Starting in Junos OS Release 16.1R1, the inline BFD sessions are supported on integrated routing and bridging (IRB) interfaces.

To configure the BFD protocol for IPv6 static routes, include the **bfd-liveness-detection** statement at the **[edit routing-options rib inet6.0 static route destination-prefix]** hierarchy level.

In Junos OS Release 8.5 and later, you can configure a hold-down interval to specify how long the BFD session must remain up before a state change notification is sent.

To specify the hold-down interval, include the **holddown-interval** statement in the BFD configuration.

You can configure a number in the range from 0 through 255,000 milliseconds. The default is 0. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.



**NOTE:** If a single BFD session includes multiple static routes, the hold-down interval with the highest value is used.

To specify the minimum transmit and receive intervals for failure detection, include the **minimum-interval** statement in the BFD configuration.

This value represents both the minimum interval after which the local routing device transmits hello packets and the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead

of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements.



**NOTE:** BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

To specify the minimum receive interval for failure detection, include the **minimum-receive-interval** statement in the BFD configuration. This value represents the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the number of hello packets not received by the neighbor that causes the originating interface to be declared down, include the **multiplier** statement in the BFD configuration.

The default value is 3. You can configure a number in the range from 1 through 255.

To specify a threshold for detecting the adaptation of the detection time, include the **threshold** statement in the BFD configuration.

When the BFD session detection time adapts to a value equal to or higher than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the **minimum-interval** or the **minimum-receive-interval** value. The threshold must be a higher value than the multiplier for either of these configured values. For example if the **minimum-receive-interval** is 300 ms and the **multiplier** is 3, the total detection time is 900 ms. Therefore, the detection time threshold must have a value higher than 900.



To specify the minimum transmit interval for failure detection, include the **transmit-interval** **minimum-interval** statement in the BFD configuration.

This value represents the minimum interval after which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the threshold for the adaptation of the transmit interval, include the **transmit-interval threshold** statement in the BFD configuration.

The threshold value must be greater than the transmit interval. When the BFD session transmit time adapts to a value greater than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the value for the **minimum-interval** or the **minimum-receive-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level. The threshold must be a higher value than the multiplier for either of these configured values.

To specify the BFD version, include the **version** statement in the BFD configuration. The default is to have the version detected automatically.

To include an IP address for the next hop of the BFD session, include the **neighbor** statement in the BFD configuration.



**NOTE:** You must configure the **neighbor** statement if the next hop specified is an interface name. If you specify an IP address as the next hop, that address is used as the neighbor address for the BFD session.

In Junos OS Release 9.0 and later, you can configure BFD sessions not to adapt to changing network conditions.

To disable BFD adaptation, include the **no-adaptation** statement in the BFD configuration.



**NOTE:** We recommend that you not disable BFD adaptation unless it is preferable *not* to have BFD adaptation in your network.



**NOTE:** If BFD is configured only on one end of a static route, the route is removed from the routing table. BFD establishes a session when BFD is configured on both ends of the static route.

BFD is not supported on ISO address families in static routes. BFD does support IS-IS.

If you configure graceful Routing Engine switchover (GRES) at the same time as BFD, GRES does not preserve the BFD state information during a failover.

- See Also**
- [Enabling Dedicated and Real-Time BFD](#)
  - [Example: Configuring BFD for Static Routes for Faster Network Failure Detection on page 34](#)
  - [Example: Enabling BFD on Qualified Next Hops in Static Routes for Route Selection on page 40](#)

## Example: Configuring BFD for Static Routes for Faster Network Failure Detection

This example shows how to configure Bidirectional Forwarding Detection (BFD) for static routes.

- [Requirements on page 34](#)
- [Overview on page 34](#)
- [Configuration on page 35](#)
- [Verification on page 38](#)

### Requirements

---

In this example, no special configuration beyond device initialization is required.

### Overview

---


There are many practical applications for static routes. Static routing is often used at the network edge to support attachment to stub networks, which, given their single point of entry and egress, are well suited to the simplicity of a static route. In Junos OS, static routes have a global preference of 5. Static routes are activated if the specified next hop is reachable.

In this example, you configure the static route 192.168.47.0/24 from the provider network to the customer network, using the next-hop address of 172.16.1.2. You also configure a static default route of 0.0.0.0/0 from the customer network to the provider network, using a next-hop address of 172.16.1.1.

For demonstration purposes, some loopback interfaces are configured on Device B and Device D. These loopback interfaces provide addresses to ping and thus verify that the static routes are working.

[Figure 1 on page 35](#) shows the sample network.

Figure 1: Customer Routes Connected to a Service Provider

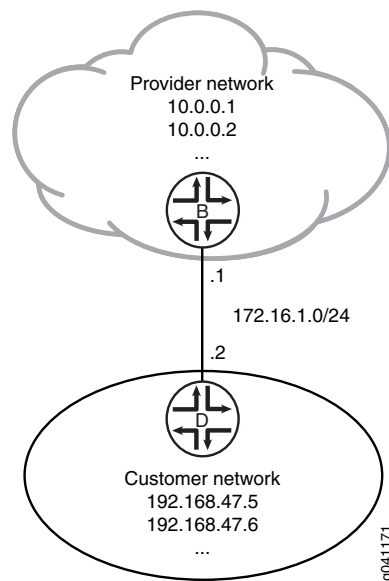

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Device B

```
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval 1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection description Site-xxx
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

#### Device D

```
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure BFD for static routes:

1. On Device B, configure the interfaces.

```
[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32
```

2. On Device B, create a static route and set the next-hop address.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2
```

3. On Device B, configure BFD for the static route.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection description
Site-xxx
```

4. On Device B, configure tracing operations for BFD.

```
[edit protocols]
user@B# set bfd traceoptions file bfd-trace
user@B# set bfd traceoptions flag all
```

5. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

6. On Device D, configure the interfaces.

```
[edit interfaces]
user@D# set ge-1/2/0 unit 1 description D->B
user@D# set ge-1/2/0 unit 1 family inet address 172.16.1.2/24
user@D# set lo0 unit 2 family inet address 192.168.47.5/32
user@D# set lo0 unit 2 family inet address 192.168.47.6/32
```

7. On Device D, create a static route and set the next-hop address.

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 next-hop 172.16.1.1
```

8. On Device D, configure BFD for the static route.

```
[edit routing-options]
```

```
user@D# set static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
```

9. On Device D, configure tracing operations for BFD.

```
[edit protocols]
user@D# set bfd traceoptions file bfd-trace
user@D# set bfd traceoptions flag all
```

10. If you are done configuring Device D, commit the configuration.

```
[edit]
user@D# commit
```

### Results

Confirm your configuration by issuing the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device B user@B# show interfaces
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1/24;
    }
  }
}
lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@D# show protocols
bfd {
  traceoptions {
    file bfd-trace;
    flag all;
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    next-hop 172.16.1.2;
    bfd-liveness-detection {
      description Site- xxx;
      minimum-interval 1000;
    }
  }
}
```

```

    }

Device D user@D# show interfaces
ge-1/2/0 {
  unit 1 {
    description D->B;
    family inet {
      address 172.16.1.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.47.5/32;
      address 192.168.47.6/32;
    }
  }
}

user@D# show routing-options
static {
  route 0.0.0.0/0 {
    next-hop 172.16.1.1;
    bfd-liveness-detection {
      description Site - xxx;
      minimum-interval 1000;
    }
  }
}

```

### Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 38](#)
- [Viewing Detailed BFD Events on page 39](#)

#### *Verifying That BFD Sessions Are Up*

**Purpose** Verify that the BFD sessions are up, and view details about the BFD sessions.

**Action** From operational mode, enter the **show bfd session extensive** command.

```

user@B> show bfd session extensive

```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	lt-1/2/0.0	3.000	1.000	3

```

Client Static, description Site-xxx, TX interval 1.000, RX interval 1.000
Session up time 00:14:30
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated, routing table index 172
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000

```

```

Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 2, remote discriminator 1
Echo mode disabled/inactive

```

```

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```



**NOTE:** The description Site- <xxx> is supported only on the SRX Series devices.

If each client has more than one description field, then it displays "and more" along with the first description field.

```

user@D> show bfd session extensive

```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.1	Up	lt-1/2/0.1	3.000	1.000	3

```

Client Static, TX interval 1.000, RX interval 1.000
Session up time 00:14:35
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated, routing table index 170
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 1, remote discriminator 2
Echo mode disabled/inactive

```

```

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```

**Meaning** The TX interval 1.000, RX interval 1.000 output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the **bfd-liveness-detection** statement.

### Viewing Detailed BFD Events

**Purpose** View the contents of the BFD trace file to assist in troubleshooting, if needed.

**Action** From operational mode, enter the file **show /var/log/bfd-trace** command.

```

user@B> file show /var/log/bfd-trace
Nov 23 14:26:55 Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 72
Nov 23 14:26:55 PPM Trace: BFD periodic xmit rt tbl index 172
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 108:
Nov 23 14:26:55 IfIndex (3) len 4: 0

```

```
Nov 23 14:26:55      Protocol (1) len 1: BFD
Nov 23 14:26:55      Data (9) len 83: (hex) 70 70 6d 64 5f 62 66 64 5f 73 65 6e 64
6d 73 67 20 3a 20
Nov 23 14:26:55 PPM Trace: ppmd_bfd_sendmsg : socket 12 len 24, ifl 78 src
172.16.1.1 dst 172.16.1.2 errno 65
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 93:
Nov 23 14:26:55      IfIndex (3) len 4: 0
Nov 23 14:26:55      Protocol (1) len 1: BFD
Nov 23 14:26:55      Data (9) len 68: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 74
```

**Meaning** BFD messages are being written to the trace file.

**See Also** • [Understanding BFD for Static Routes for Faster Network Failure Detection on page 30](#)

## Example: Enabling BFD on Qualified Next Hops in Static Routes for Route Selection

This example shows how to configure a static route with multiple possible next hops. Each next hop has Bidirectional Forwarding Detection (BFD) enabled.

- [Requirements on page 40](#)
- [Overview on page 40](#)
- [Configuration on page 41](#)
- [Verification on page 44](#)

### Requirements

---

In this example, no special configuration beyond device initialization is required.

### Overview

---

In this example, Device B has the static route **192.168.47.0/24** with two possible next hops. The two next hops are defined using two **qualified-next-hop** statements. Each next hop has BFD enabled.


BFD is also enabled on Device D because BFD must be enabled on both ends of the connection.

A next hop is included in the routing table if the BFD session is up. The next hop is removed from the routing table if the BFD session is down.

See [Figure 2 on page 41](#).



Figure 2: BFD Enabled on Qualified Next Hops

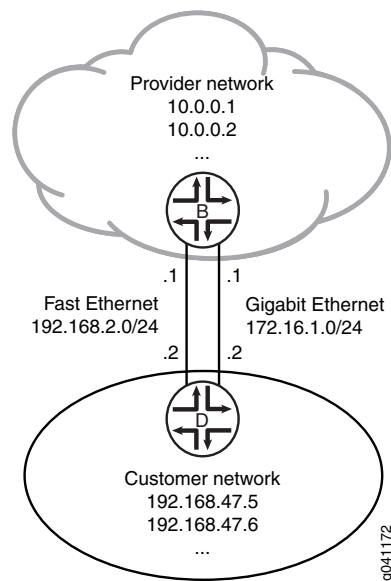

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device B**

```

set interfaces fe-0/1/0 unit 2 description secondary-B->D
set interfaces fe-0/1/0 unit 2 family inet address 192.168.2.1/24
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set routing-options static route 192.168.47.0/24 qualified-next-hop 192.168.2.2
  bfd-liveness-detection minimum-interval 60
set routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2
  bfd-liveness-detection minimum-interval 60

```

**Device D**

```

set interfaces fe-0/1/0 unit 3 description secondary-D->B
set interfaces fe-0/1/0 unit 3 family inet address 192.168.2.2/24
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set routing-options static route 0.0.0.0/0 qualified-next-hop 192.168.2.1
set routing-options static route 0.0.0.0/0 qualified-next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 60

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure a static route with two possible next hops, both with BFD enabled:

1. On Device B, configure the interfaces.

```
[edit interfaces fe-0/1/0]
user@B# set unit 2 description secondary-B->D
user@B# set unit 2 family inet address 192.168.2.1/24
```

```
[edit interfaces ge-1/2/0]
user@B# set unit 0 description B->D
user@B# set unit 0 family inet address 172.16.1.1/24
```

2. On Device B, configure the static route with two next hops, both with BFD enabled.

```
[edit routing-options static route 192.168.47.0/24]
user@B# set qualified-next-hop 192.168.2.2 bfd-liveness-detection minimum-interval
60
user@B# set qualified-next-hop 172.16.1.2 bfd-liveness-detection minimum-interval
60
```

3. On Device D, configure the interfaces.

```
[edit interfaces fe-0/1/0]
user@D# set unit 3 description secondary-D->B
user@D# set unit 3 family inet address 192.168.2.2/24
```

```
[edit interfaces ge-1/2/0]
user@D# set unit 1 description D->B
user@D# set unit 1 family inet address 172.16.1.2/24
```

4. On Device D, configure a BFD-enabled default static route with two next hops to the provider network.

In this case, BFD is enabled on the route, not on the next hops.

```
[edit routing-options static route 0.0.0.0/0]
user@D# set qualified-next-hop 192.168.2.1
user@D# set qualified-next-hop 172.16.1.1
user@D# set bfd-liveness-detection minimum-interval 60
```

**Results** Confirm your configuration by issuing the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
fe-0/1/0 {
  unit 2 {
    description secondary-B->D;
    family inet {
      address 192.168.2.1/24;
    }
  }
}
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
```

```

        address 172.16.1.1/24;
    }
}
}

user@B# show routing-options
static {
    route 192.168.47.0/24 {
        qualified-next-hop 192.168.2.2 {
            bfd-liveness-detection {
                minimum-interval 60;
            }
        }
        qualified-next-hop 172.16.1.2 {
            bfd-liveness-detection {
                minimum-interval 60;
            }
        }
    }
}

user@D# show interfaces
fe-0/1/0 {
    unit 3 {
        description secondary-D->B;
        family inet {
            address 192.168.2.2/24;
        }
    }
}
ge-1/2/0 {
    unit 1 {
        description D->B;
        family inet {
            address 172.16.1.2/24;
        }
    }
}

user@D# show routing-options
static {
    route 0.0.0.0/0 {
        qualified-next-hop 192.168.2.1;
        qualified-next-hop 172.16.1.1;
        bfd-liveness-detection {
            minimum-interval 60;
        }
    }
}
}

```

If you are done configuring the devices, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking the Routing Tables on page 44](#)
- [Verifying the BFD Sessions on page 44](#)
- [Removing BFD from Device D on page 45](#)
- [Removing BFD from One Next Hop on page 45](#)

### Checking the Routing Tables

**Purpose** Make sure that the static route appears in the routing table on Device B with two possible next hops.

**Action** user@B> show route 192.168.47.0 extensive  
 inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)  
 192.168.47.0/24 (1 entry, 1 announced)  
 TSI:  
 KRT in-kernel 192.168.47.0/24 -> {192.168.2.2}  
     \*Static Preference: 5  
         Next hop type: Router  
         Address: 0x9334010  
         Next-hop reference count: 1  
         Next hop: 172.16.1.2 via ge-1/2/0.0  
         Next hop: 192.168.2.2 via fe-0/1/0.2, selected  
         State: <Active Int Ext>  
         Age: 9  
         Task: RT  
         Announcement bits (1): 3-KRT  
         AS path: I

**Meaning** Both next hops are listed. The next hop 192.168.2.2 is the selected route.

### Verifying the BFD Sessions

**Purpose** Make sure that the BFD sessions are up.

**Action** user@B> show bfd session

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	0.720	0.240	3
192.168.2.2	Up	fe-0/1/0.2	0.720	0.240	3

2 sessions, 2 clients  
 Cumulative transmit rate 8.3 pps, cumulative receive rate 8.3 pps

**Meaning** The output shows that the BFD sessions are up.

**Removing BFD from Device D**

**Purpose** Demonstrate what happens when the BFD session is down for both next hops.

**Action** 1. Deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Rerun the **show bfd session** command on Device B.

```
user@B> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Down	ge-1/2/0.0	3.000	1.000	3
192.168.2.2	Down	fe-0/1/0.2	3.000	1.000	3

```
2 sessions, 2 clients
```

```
Cumulative transmit rate 2.0 pps, cumulative receive rate 2.0 pps
```

3. Rerun the **show route 192.168.47.0** command on Device B.

```
user@B> show route 192.168.47.0
```

**Meaning** As expected, when the BFD sessions are down, the static route is removed from the routing table.

**Removing BFD from One Next Hop**

**Purpose** Demonstrate what happens when only one next hop has BFD enabled.

**Action** 1. If it is not already deactivated, deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Deactivate BFD on one of the next hops on Device B.

```
[edit routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2]
user@B# deactivate bfd-liveness-detection
user@B# commit
```

3. Rerun the **show bfd session** command on Device B.

```
user@B> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
192.168.2.2	Down	fe-0/1/0.2	3.000	1.000	3

4. Rerun the **show route 192.168.47.0 extensive** command on Device B.

```
user@B> show route 192.168.47.0 extensive

inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
192.168.47.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.47.0/24 -> {172.16.1.2}
  *Static Preference: 5
    Next hop type: Router, Next hop index: 624
    Address: 0x92f0178
    Next-hop reference count: 3
    Next hop: 172.16.1.2 via ge-1/2/0.0, selected
    State: <Active Int Ext>
    Age: 2:36
    Task: RT
    Announcement bits (1): 3-KRT
    AS path: I
```

**Meaning** As expected, the BFD session is down for the 192.168.2.2 next hop. The 172.16.1.2 next hop remains in the routing table, and the route remains active, because BFD is not a condition for this next hop to remain valid.

**See Also**

- *Example: Configuring Static Route Preferences and Qualified Next Hops to Control Static Route Selection*
- *Understanding Static Route Preferences and Qualified Next Hops*
- [Understanding BFD for Static Routes for Faster Network Failure Detection on page 30](#)
- *Verifying the Static Route Configuration*

Release History Table

Release	Description
16.1R1	Starting in Junos OS Release 16.1R1, the inline BFD sessions are supported on integrated routing and bridging (IRB) interfaces.
15.1X49-D70	Starting with Junos OS Release 15.1X49-D70 and Junos OS Release 17.3R1, the <b>bfd-liveness-detection</b> command includes the description field. The description is an attribute under the <b>bfd-liveness-detection</b> object and it is supported only on SRX Series devices. This field is applicable only for the static routes.
15.1F6	Inline BFD is supported on PTX3000 routers with third-generation FPCs starting in Junos OS Release 15.1F6 and 16.1R2.
15.1F3	Inline BFD is supported on PTX5000 routers with third-generation FPCs starting in Junos OS Release 15.1F3 and 16.1R2.
13.3	Starting in Junos OS Release 13.3, inline BFD is supported only on static MX Series routers with MPCs/MICs that have configured <b>enhanced-ip</b> .

#### Related Documentation

- [Example: Configuring BFD Authentication for Static Routes on page 47](#)
- [Example: Configuring BFD for OSPF](#)
- [Example: Configuring BFD for BGP](#)
- [Example: Configuring BFD for IS-IS](#)
- [Configuring PIM and the Bidirectional Forwarding Detection \(BFD\) Protocol](#)

## Example: Configuring BFD Authentication for Static Routes

- [Understanding BFD Authentication for Static Route Security on page 47](#)
- [Example: Configuring BFD Authentication for Securing Static Routes on page 49](#)

### Understanding BFD Authentication for Static Route Security

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when you run BFD over Network Layer protocols, the risk of service attacks can be significant.



**NOTE:** We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels.

Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IPv4 and IPv6 static routes. BFD authentication is not supported on MPLS OAM sessions. BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.



**NOTE:** EX3300 supports BFD over static routes only.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 48](#)
- [Security Authentication Keychains on page 49](#)
- [Strict Versus Loose Authentication on page 49](#)

### **BFD Authentication Algorithms**

---

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.





**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

---

## Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

---

## Strict Versus Loose Authentication

By default, strict authentication is enabled, and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

**See Also** • [Example: Configuring BFD Authentication for Securing Static Routes on page 49](#)

## Example: Configuring BFD Authentication for Securing Static Routes

This example shows how to configure Bidirectional Forwarding Detection (BFD) authentication for static routes.

- [Requirements on page 49](#)
- [Overview on page 50](#)
- [Configuration on page 50](#)
- [Verification on page 54](#)

---

## Requirements

Junos OS Release 9.6 or later (Canda and United States version).

BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

## Overview

You can configure authentication for BFD sessions running over IPv4 and IPv6 static routes. Routing instances and logical systems are also supported.

The following steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the static route.
2. Associate the authentication keychain with the static route.
3. Configure the related security authentication keychain. This must be configured on the main router.




**TIP:** We recommend that you specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.

[edit]

```
user@host> set routing-options static route ipv4 bfd-liveness-detection
authentication loose-check
```

Figure 3 on page 50 shows the sample network.

**Figure 3: Customer Routes Connected to a Service Provider**

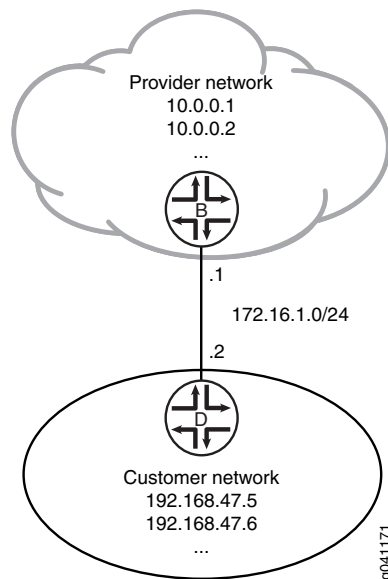

## Configuration

- [\[xref target has no title\]](#)
- [Results on page 53](#)

### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network

configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device B**

```

set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
  1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection description
  Site-xxx
set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication
  key-chain bfd-kc4
set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication
  algorithm keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret
  "$ABC123$ABC123$ABC123"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time
  "2011-1-1.12:00:00 -0800"

```

**Device D**

```

set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication key-chain
  bfd-kc4
set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication algorithm
  keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret
  "$ABC123$ABC123$ABC123"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time
  "2011-1-1.12:00:00 -0800"

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure BFD for static routes:

1. On Device B, configure the interfaces.  

```

[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24

user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32

```
2. On Device B, create a static route and set the next-hop address.  

```

[edit routing-options]

```

```
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2
```

3. On Device B, configure BFD for the static route.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection description
Site-xxx
```

4. On Device B, specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use for BFD authentication on the static route.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
algorithm keyed-sha-1
```



**NOTE:** Nonstop active routing (NSR) is not supported with the meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

5. On Device B, specify the keychain to be used to associate BFD sessions on the specified route with the unique security authentication keychain attributes.

This should match the keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
key-chain bfd-kc4
```

6. On Device B, specify the unique security authentication information for BFD sessions:

- The matching keychain name as specified in Step 5.
- At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
- The secret data used to allow access to the session.
- The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

```
[edit security authentication-key-chains key-chain bfd-kc4]
user@B# set key 5 secret "$ABC123$ABC123$ABC123"
user@B# set key 5 start-time "2011-1-12:00:00 -0800"
```

7. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

8. Repeat the configuration on Device D.

The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

### Results

Confirm your configuration by issuing the **show interfaces**, **show routing-options**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device B user@B# show interfaces
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}
lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    next-hop 172.16.1.2;
    bfd-liveness-detection {
      description Site- xxx;
      minimum-interval 1000;
      authentication {
        key-chain bfd-kc4;
        algorithm keyed-sha-1;
      }
    }
  }
}

user@B# show security
authentication-key-chains {
  key-chain bfd-kc4 {
    key 5 {
      secret "$ABC123$ABC123$ABC123"; ## SECRET-DATA
      start-time "2011-1-1.12:00:00 -0800";
    }
  }
}
```

```

    }
  }
}

```

## Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 54](#)
- [Viewing Details About the BFD Session on page 54](#)
- [Viewing Extensive BFD Session Information on page 55](#)

### *Verifying That BFD Sessions Are Up*

**Purpose** Verify that the BFD sessions are up.

**Action** From operational mode, enter the **show bfd session** command.

```
user@B> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** The command output shows that the BFD session is up.

### *Viewing Details About the BFD Session*

**Purpose** View details about the BFD sessions and make sure that authentication is configured.

**Action** From operational mode, enter the **show bfd session detail** command.

```
user@B> show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	ge-1/2/0.0	3.000	1.000	3

Client Static, TX interval 1.000, RX interval 1.000, **Authenticate**

Session up time 00:53:58

Local diagnostic NbrSignal, remote diagnostic None

Remote state Up, version 1

Logical system 9, routing table index 22

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured.

### Viewing Extensive BFD Session Information

**Purpose** View more detailed information about the BFD sessions.

**Action** From operational mode, enter the **show bfd session extensive** command.

```
user@B> show bfd session extensive
Address          State      Interface    Time      Interval  Multiplier
172.16.1.2       Up        ge-1/2/0.0   3.000     1.000     3
  Client Static, description Site-xxx, TX interval 1.000, RX interval 1.000,
Authenticate
  keychain bfd-kc4, algo keyed-sha-1, mode strict
Session up time 01:39:45
Local diagnostic NbrSignal, remote diagnostic None
Remote state Up, version 1
Logical system 9, routing table index 22
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 3, remote discriminator 4
Echo mode disabled/inactive
Authentication enabled/active, keychain bfd-kc4, algo keyed-sha-1, mode strict

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps
```

**Meaning** In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured. The output for the **extensive** command provides the keychain name, the authentication algorithm, and the mode for each client in the session.



**NOTE:** The description Site- <xxx> is supported only on the SRX Series devices.

If each client has more than one description field, then it displays "and more" along with the first description field.

**See Also** • [Understanding BFD Authentication for Static Route Security on page 47](#)

**Related Documentation** • [Examples: Configuring BFD for Static Routes on page 30](#)

## IPv4 Address Conservation Method for Hosting Providers

---

Hosting providers host multiple servers for multiple customers and want to conserve the usage of their IP address space. Traditionally, when a hosting provider client adds new servers, the servers are allocated a small block of IP addresses, such as a /29 block, and the client's servers are all located in that block of IP addresses.


- [The Issue, Illustrated on page 56](#)
- [Solution on page 57](#)
- [Configuration on page 58](#)

### The Issue, Illustrated

For example, Customer A might need three servers and is assigned the block 10.3.3.0/29 (10.3.3.0 through 10.3.3.7). In this scenario, several IP addresses are consumed. These include the network and broadcast IP addresses (10.3.3.0 and 10.3.3.7), the addresses for the router gateway that the servers are connected to, and the addresses of the individual servers. To allocate three servers, eight IP addresses have to be allocated. Breaking up a single /24 network into 32 /29 networks results in 96 IP addresses out of the 256, in that /24 is being consumed by the network, broadcast, and gateway addresses. When this effect is multiplied across thousands of hosting providers, IP address space is far from being used efficiently. [Figure 4 on page 57](#) illustrates the issue.



Figure 4: Inefficient Use of IP Address Space

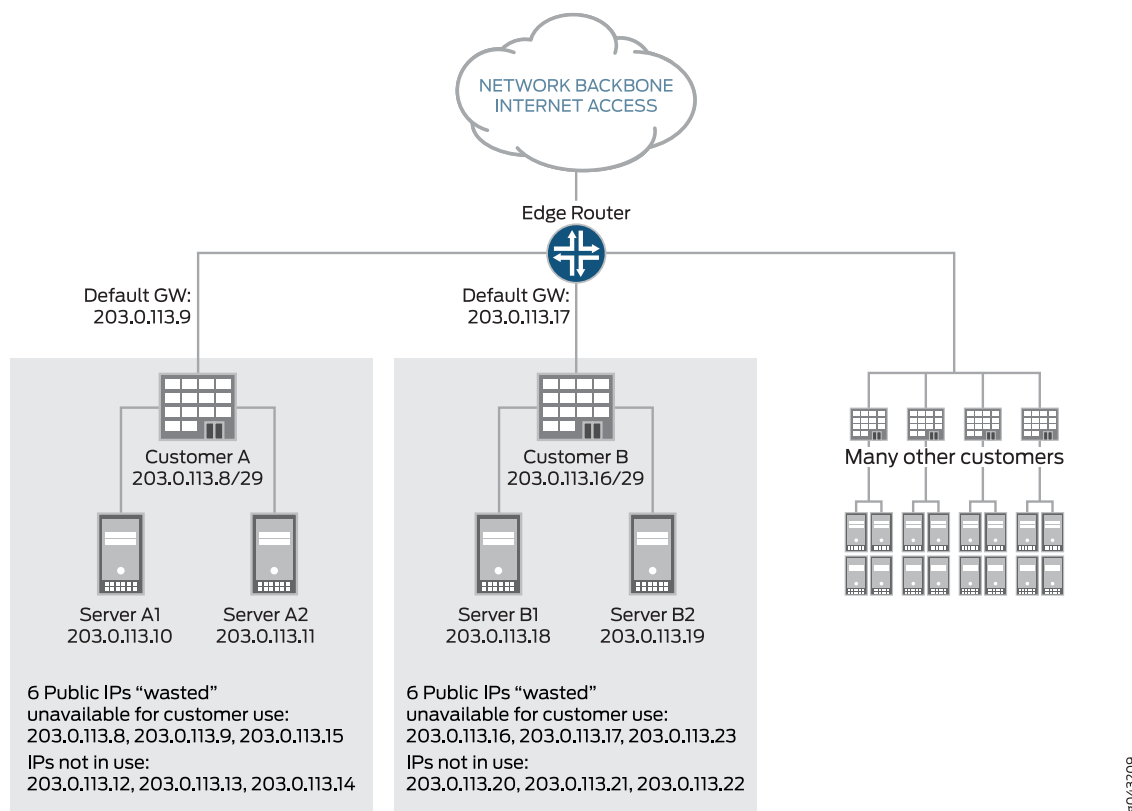

In this configuration, each customer is allocated a /29 block of address space. For each block, the network, broadcast, and gateway addresses are not available for server IP addressing, which results in three IP addresses being used inefficiently. In addition, the blocks consume unused IP addresses for future expansion.

## Solution


This issue can be resolved by configuring the interface on the router with an address from the reserved IPv4 prefix for shared address space (RFC 6598) and by using static routes pointed at interfaces. IANA has recorded the allocation of an IPv4 /10 for use as shared address space. The shared address space address range is 100.64.0.0/10.

The interface in the router gets allocated an IP address from the RFC 6598 space, so it is not consuming publicly routable address space, and connectivity is handled with static routes on an interface. The interface in the server is configured with a publicly routable address, but the router interfaces are not. Network and broadcast addresses are consumed out of the RFC 6598 space rather than the publicly routable address space.

This feature is supported on QFX10000 switches starting with Junos OS 17.1R1.

Figure 5 on page 58 shows the efficient use of IP address space.

Figure 5: Configuration Using the Shared Address Space

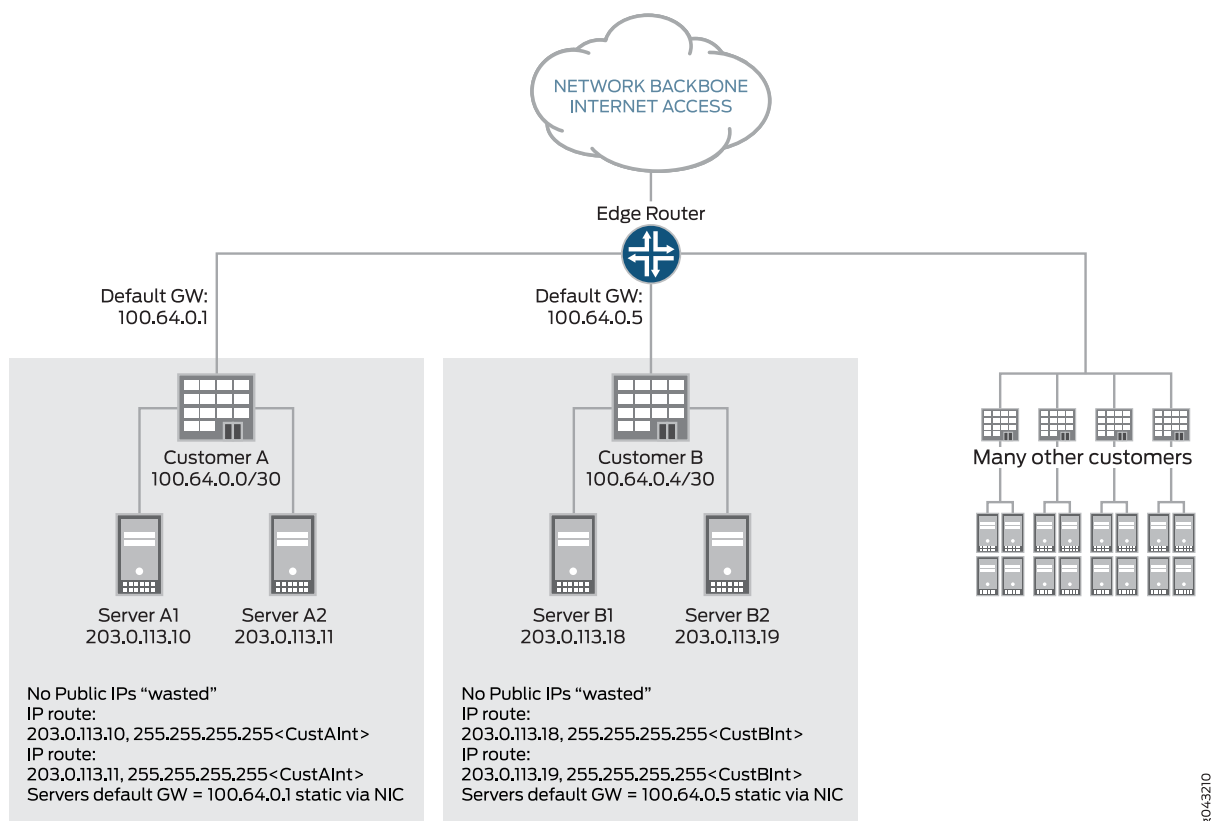

8043210

In this configuration, each customer gets allocated individual IP addresses per server. There is a static route that can be configured as a host route. The interface in the router gets allocated an IP address from the RFC 6598 space, so it does not consume publicly routable address space, and connectivity is handled with static routes out to an interface.

## Configuration

The configuration would look like this for Customer A on the gateway router:

```

interfaces {
  ge-1/0/1 {
    unit 0 {
      family inet {
        address 100.64.0.1/30;
      }
    }
  }
}

routing-options {
  static {
    route 203.0.113.10/32 {
      qualified-next-hop ge-1/0/1.0;
    }
  }
}

```

```
route 203.0.113.11 {
    qualified-next-hop ge-1/0/1.0;
}
}
```

With this configuration, no publicly routable IP addresses are wasted. It is worth noting that when a packet is forwarded in this configuration from the router to the server of Customer A's server 203.0.113.10, the route is forwarded out to the interface ge-1/0/1.0 which has an IP address of 100.64.0.1.

The servers for customer A would be configured as follows:

```
ifconfig eth0 203.0.113.10 netmask 255.255.255.255
route add -host 100.64.0.1/32 dev eth0 route add default gw 100.64.0.1

ifconfig eth0 203.0.113.11 netmask 255.255.255.255
route add -host 100.64.0.1/32 dev eth0 route add default gw 100.64.0.1
```

This example shows a single host route per server, which is a 1:1 mapping. This could equate to a large number of static host routes, if maintained. For scaling purposes, we need to support nonhost routes in this environment. For example, if there were a Customer C in this configuration that had eight servers, it would be much more efficient to allocate a /29 route on the router that points out the interface on which the eight servers are connected. If Customer C were allocated server IPs from 203.0.114.8 through 203.0.114.15 and these were connected via interface ge-1/0/2.0, this would look like:

```
user@host# set routing-options static route 203.0.114.8/29 qualified-next-hop ge-1/0/2.0
```

Release History Table

Release	Description
17.1R1	This feature is supported on QFX10000 switches starting with Junos OS 17.1R1.

## IPv6 Neighbor Discovery Overview

Neighbor discovery is a protocol that allows different nodes on the same link to advertise their existence to their neighbors, and to learn about the existence of their neighbors.

Routers and hosts (nodes) use Neighbor Discovery (ND) messages to determine the link-layer addresses of neighbors that reside on attached links and to overwrite invalid cache entries. Hosts also use ND to find neighboring routers that can forward packets on their behalf.

In addition, nodes use ND to actively track the ability to reach neighbors. When a router (or the path to a router) fails, nodes actively search for alternatives to reach the destination.

This section discusses the following topics:

- [Improvements Over Ipv4 Protocols on page 60](#)
- [Router Discovery on page 61](#)

- [Address Resolution on page 61](#)
- [Redirect on page 61](#)

## Improvements Over Ipv4 Protocols

IPv6 Neighbor Discovery corresponds to a number of the IPv4 protocols — ARP, ICMP Router Discovery, and ICMP Redirect. However, Neighbor Discovery provides many improvements over the IPv4 set of protocols. These improvements address the following:

- Router discovery—How a host locates routers residing on an attached link.
- Prefix discovery—How a host discovers address prefixes for destinations residing on an attached link. Nodes use prefixes to distinguish between destinations that reside on an attached link and those destinations that it can reach only through a router.
- Parameter discovery—How a node learns various parameters (link parameters or Internet parameters) that it places in outgoing packets.
- Address resolution—How a node uses only a destination IPv6 address to determine a link-layer address for destinations on an attached link.
- Next-hop determination—The algorithm that a node uses for mapping an IPv6 destination address into a neighbor IPv6 address (either the next router hop or the destination itself) to which it plans to send traffic for the destination.
- Neighbor unreachability detection—How a node determines that it can no longer reach a neighbor.
- Duplicate address detection—How a node determines whether an address is already in use by another node.

A router periodically multicasts a router advertisement from each of its multicast interfaces, announcing its availability. Hosts listen for these advertisements for address autoconfiguration and discovery of link-local addresses of the neighboring routers. When a host starts, it multicasts a router solicitation to ask for immediate advertisements.

The router discovery messages do not constitute a routing protocol. They enable hosts to discover the existence of neighboring routers, but are not used to determine which router is best to reach a particular destination.

Neighbor discovery uses the following Internet Control Message Protocol version 6 (ICMPv6) messages: router solicitation, router advertisement, neighbor solicitation, neighbor advertisement, and redirect.

Neighbor discovery for IPv6 replaces the following IPv4 protocols: router discovery (RDISC), Address Resolution Protocol (ARP), and ICMPv4 redirect.

Junos OS Release 9.3 and later supports Secure Neighbor Discovery (SEND). SEND enables you to secure Neighbor Discovery protocol (NDP) messages. It is applicable in environments where physical security on a link is not assured and attacks on NDP messages are a concern. The Junos OS secures NDP messages through cryptographically generated addresses (CGAs).

## Router Discovery

Router advertisements can contain a list of prefixes. These prefixes are used for address autoconfiguration, to maintain a database of onlink (on the same data link) prefixes, and for duplication address detection. If a node is onlink, the router forwards packets to that node. If the node is not onlink, the packets are sent to the next router for consideration. For IPv6, each prefix in the prefix list can contain a prefix length, a valid lifetime for the prefix, a preferred lifetime for the prefix, an onlink flag, and an autoconfiguration flag. This information enables address autoconfiguration and the setting of link parameters such as maximum transmission unit (MTU) size and hop limit.

## Address Resolution

For IPv6, ICMPv6 neighbor discovery replaces Address Resolution Protocol (ARP) for resolving network addresses to link-level addresses. Neighbor discovery also handles changes in link-layer addresses, inbound load balancing, anycast addresses, and proxy advertisements.

Nodes requesting the link-layer address of a target node multicast a neighbor solicitation message with the target address. The target sends back a neighbor advertisement message containing its link-layer address.

Neighbor solicitation and advertisement messages are used for detecting duplicate unicast addresses on the same link. Autoconfiguration of an IP address depends on whether there is a duplicate address on that link. Duplicate address detection is a requirement for autoconfiguration.

Neighbor solicitation and advertisement messages are also used for neighbor unreachability detection. Neighbor unreachability detection involves detecting the presence of a target node on a given link.

## Redirect

Redirect messages are sent to inform a host of a better next-hop router to a particular destination or an onlink neighbor. This is similar to ICMPv4 redirect. Very similar to the ICMPv4 Redirect feature, the ICMPv6 redirect message is used by routers to inform on-link hosts of a better next-hop for a given destination. The intent is to allow the routers to help hosts make the most efficient local routing decisions possible.

### Related Documentation

- [Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery on page 61](#)

---

## Example: Configuring IPv6 Interfaces and Enabling Neighbor Discovery

This example shows how to configure the router or switch to send IPv6 neighbor discovery messages.

- [Requirements on page 62](#)
- [Overview on page 62](#)

- [Configuration on page 63](#)
- [Verification on page 66](#)

## Requirements

In this example, no special configuration beyond device initialization is required.

## Overview

In this example, all of the interfaces in the sample topology are configured with IPv6 addresses. If you plan to extend IPv6 functionality into your LAN, datacenter, or customer networks, you might want to use Stateless Address Auto-Configuration (SLAAC) and that means configuring router advertisements. SLAAC is an IPv6 protocol that provides some similar functionality to DHCP in IPv4. Using SLAAC, network hosts can autoconfigure a globally unique IPv6 address based on the prefix provided by a nearby router in a router advertisement. This removes the need to explicitly configure every interface in a given section of the network. Router advertisement messages are disabled by default, and you must enable them to take advantage of SLAAC.

To configure the router to send router advertisement messages, you must include at least the following statements in the configuration. All other router advertisement configuration statements are optional.

```
protocols {
  router-advertisement {
    interface interface-name {
      prefix prefix;
    }
  }
}
```

To configure neighbor discovery, include the following statements. You configure router advertisement on a per-interface basis.

```
protocols {
  router-advertisement {
    interface interface-name {
      current-hop-limit number;
      default-lifetime seconds;
      (link-mtu | no-link-mtu);
      (managed-configuration | no-managed-configuration);
      max-advertisement-interval seconds;
      min-advertisement-interval seconds;
      (other-stateful-configuration | no-other-stateful-configuration);
      prefix prefix {
        (autonomous | no-autonomous);
        (on-link | no-on-link);
        preferred-lifetime seconds;
        valid-lifetime seconds;
      }
      reachable-time milliseconds;
      retransmit-timer milliseconds;
      solicit-router-advertisement-unicast;
      virtual-router-only;
    }
  }
}
```


```

}
traceoptions {
  file filename <files number> <size maximum-file-size> <world-readable |
    no-world-readable>;
  flag flag;
}
}
}

```

Figure 6 on page 63 shows a simplified sample topology.

Figure 6: ICMP Router Discover Topology

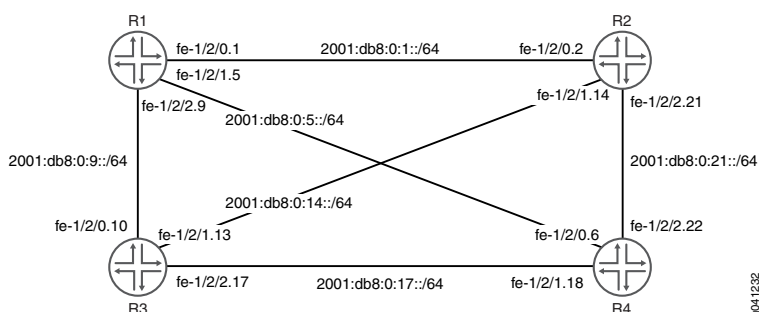

This example shows how to make sure that all of the IPv6 hosts attached to the subnets in the sample topology can auto-configure a local EUI-64 address.

“CLI Quick Configuration” on page 63 shows the configuration for all of the devices in Figure 6 on page 63. “Step-by-Step Procedure” on page 64 describes the steps on Device R1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces fe-1/2/0 unit 1 description to-P2
set interfaces fe-1/2/0 unit 1 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces fe-1/2/1 unit 5 description to-P4
set interfaces fe-1/2/1 unit 5 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces fe-1/2/2 unit 9 description to-P3
set interfaces fe-1/2/2 unit 9 family inet6 address 2001:db8:0:9::/64 eui-64
set interfaces lo0 unit 1 family inet6 address 2001:db8::1/128
set protocols router-advertisement interface fe-1/2/0.1 prefix 2001:db8:0:1::/64
set protocols router-advertisement interface fe-1/2/1.5 prefix 2001:db8:0:5::/64
set protocols router-advertisement interface fe-1/2/2.9 prefix 2001:db8:0:9::/64

```

**Device R2**

```

set interfaces fe-1/2/0 unit 2 description to-P1
set interfaces fe-1/2/0 unit 2 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces fe-1/2/1 unit 14 description to-P3
set interfaces fe-1/2/1 unit 14 family inet6 address 2001:db8:0:14::/64 eui-64
set interfaces fe-1/2/2 unit 21 description to-P4

```

```

set interfaces fe-1/2/2 unit 21 family inet6 address 2001:db8:0:21::/64 eui-64
set interfaces lo0 unit 2 family inet6 address 2001:db8::2/128
set protocols router-advertisement interface fe-1/2/0.2 prefix 2001:db8:0:1::/64
set protocols router-advertisement interface fe-1/2/1.14 prefix 2001:db8:0:14::/64
set protocols router-advertisement interface fe-1/2/2.21 prefix 2001:db8:0:21::/64

```

**Device R3**

```

set interfaces fe-1/2/0 unit 10 description to-P1
set interfaces fe-1/2/0 unit 10 family inet6 address 2001:db8:0:9::/64 eui-64
set interfaces fe-1/2/1 unit 13 description to-P2
set interfaces fe-1/2/1 unit 13 family inet6 address 2001:db8:0:14::/64 eui-64
set interfaces fe-1/2/2 unit 17 description to-P4
set interfaces fe-1/2/2 unit 17 family inet6 address 2001:db8:0:17::/64 eui-64
set interfaces lo0 unit 3 family inet6 address 2001:db8::3/128
set protocols router-advertisement interface fe-1/2/0.10 prefix 2001:db8:0:9::/64
set protocols router-advertisement interface fe-1/2/1.13 prefix 2001:db8:0:14::/64
set protocols router-advertisement interface fe-1/2/2.17 prefix 2001:db8:0:17::/64

```

**Device R4**

```

set interfaces fe-1/2/0 unit 6 description to-P1
set interfaces fe-1/2/0 unit 6 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces fe-1/2/1 unit 18 description to-P3
set interfaces fe-1/2/1 unit 18 family inet6 address 2001:db8:0:17::/64 eui-64
set interfaces fe-1/2/2 unit 22 description to-P2
set interfaces fe-1/2/2 unit 22 family inet6 address 2001:db8:0:21::/64 eui-64
set interfaces lo0 unit 4 family inet6 address 2001:db8::4/128
set protocols router-advertisement interface fe-1/2/0.6 prefix 2001:db8:0:5::/64
set protocols router-advertisement interface fe-1/2/1.18 prefix 2001:db8:0:17::/64
set protocols router-advertisement interface fe-1/2/2.22 prefix 2001:db8:0:21::/64

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure a IPv6 neighbor discovery:

1. Configure the network interfaces.

This example shows multiple loopback interface addresses to simulate attached networks.

[edit interfaces]

```

user@R1# set fe-1/2/0 unit 1 description to-P2
user@R1# set fe-1/2/0 unit 1 family inet6 address 2001:db8:0:1::/64 eui-64

```

```

user@R1# set fe-1/2/1 unit 5 description to-P4
user@R1# set fe-1/2/1 unit 5 family inet6 address 2001:db8:0:5::/64 eui-64

```

```

user@R1# set fe-1/2/2 unit 9 description to-P3
user@R1# set fe-1/2/2 unit 9 family inet6 address 2001:db8:0:9::/64 eui-64

```

```

user@R1# set lo0 unit 1 family inet6 address 2001:db8::1/128

```

2. Enable neighbor discovery.



```
[edit protocols router-advertisement]
user@R1# set interface fe-1/2/0.1 prefix 2001:db8:0:1::/64
user@R1# set interface fe-1/2/1.5 prefix 2001:db8:0:5::/64
user@R1# set interface fe-1/2/2.9 prefix 2001:db8:0:9::/64
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    description to-P2;
    family inet6 {
      address 2001:db8:0:1::/64 {
        eui-64;
      }
    }
  }
}
fe-1/2/1 {
  unit 5 {
    description to-P4;
    family inet6 {
      address 2001:db8:0:5::/64 {
        eui-64;
      }
    }
  }
}
fe-1/2/2 {
  unit 9 {
    description to-P3;
    family inet6 {
      address 2001:db8:0:9::/64 {
        eui-64;
      }
    }
  }
}
lo0 {
  unit 1 {
    family inet6 {
      address 2001:db8::1/128;
    }
  }
}

user@R1# show protocols
router-advertisement {
  interface fe-1/2/0.1 {
    prefix 2001:db8:0:1::/64;
  }
  interface fe-1/2/1.5 {
```

```

    prefix 2001:db8:0:5::/64;
  }
  interface fe-1/2/2.9 {
    prefix 2001:db8:0:9::/64;
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

To confirm that the configuration is working properly, perform this task:

- [Checking the Interfaces on page 66](#)
- [Pinging the Interfaces on page 67](#)
- [Checking the IPv6 Neighbor Cache on page 67](#)
- [Verifying IPv6 Router Advertisements on page 68](#)
- [Tracing Neighbor Discovery Events on page 69](#)

### Checking the Interfaces

**Purpose** Verify that the interfaces are up, and view the assigned EUI-64 addresses.

**Action** From operational mode, enter the **show interfaces terse** command.

```

user@R1> show interfaces terse
Interface      Admin Link Proto  Local                               Remote
fe-1/2/0
fe-1/2/0.1      up    up    inet6  2001:db8:0:1:2a0:a514:0:14c/64
                fe80::2a0:a514:0:14c/64
fe-1/2/1.5      up    up    inet6  2001:db8:0:5:2a0:a514:0:54c/64
                fe80::2a0:a514:0:54c/64
fe-1/2/2.9      up    up    inet6  2001:db8:0:9:2a0:a514:0:94c/64
                fe80::2a0:a514:0:94c/64
lo0
lo0.1           up    up    inet6  2001:db8::1
                fe80::2a0:a50f:fc56:14c

```

**Meaning** The output shows that all interfaces are configured with the IPv6 (inet6) address family. Each IPv6-enabled interface has two IPv6 addresses; one link-local address, and one global address. The global addresses match those shown in [Figure 6 on page 63](#). Junos OS automatically creates a link-local address for any interface that is enabled for IPv6 operation. All link-local addresses begin with the fe80::/64 prefix. The host portion of the address is a full 64 bits long and matches the link-local interface identifier. When an interface address is configured using the **eui-64** statement, its interface identifier matches the interface identifier of the link-local address. This is because link-local addresses are coded according to the EUI-64 specification.

## Pinging the Interfaces

**Purpose** Verify connectivity between the directly connected interfaces.

**Action** 1. Determine the remote router's IPv6 interface address.

On Device R2, run the **show interfaces terse** command for the interface that is directly connected to Device R1, and copy the global address into the capture buffer of your terminal emulator.

```
user@R2> show interfaces fe-1/2/0.2 terse
Interface      Admin Link Proto  Local                               Remote
fe-1/2/0.2      up    up    inet6  2001:db8:0:1:2a0:a514:0:24c/64
                                   fe80::2a0:a514:0:24c/64
```

2. On Device R1, run the **ping** command, using the global address that you copied.

```
user@R1> ping 2001:db8:0:1:2a0:a514:0:24c
PING6(56=40+8+8 bytes) 2001:db8:0:1:2a0:a514:0:14c -->
2001:db8:0:1:2a0:a514:0:24c
16 bytes from 2001:db8:0:1:2a0:a514:0:24c, icmp_seq=0 hlim=64 time=20.412 ms
16 bytes from 2001:db8:0:1:2a0:a514:0:24c, icmp_seq=1 hlim=64 time=18.897 ms
16 bytes from 2001:db8:0:1:2a0:a514:0:24c, icmp_seq=2 hlim=64 time=1.389 ms
```

**Meaning** Junos OS uses the same ping command for both IPv4 and IPv6 testing. The lack of any interior gateway protocol (IGP) in the network limits the ping testing to directly-connected neighbors. Repeat the ping test for other directly connected neighbors.

## Checking the IPv6 Neighbor Cache

**Purpose** Display information about the IPv6 neighbors.

After conducting ping testing, you can find an entries for interface addresses in the IPv6 neighbor cache.

**Action** From operational mode, enter the **show ipv6 neighbors** command.

```
user@R1> show ipv6 neighbors
IPv6 Address      Linklayer Address  State      Exp Rtr Secure
Interface
2001:db8:0:1:2a0:a514:0:24c 00:05:85:8f:c8:bd stale      546 yes no
fe-1/2/0.1
fe80::2a0:a514:0:24c      00:05:85:8f:c8:bd stale      258 yes no
fe-1/2/0.1
fe80::2a0:a514:0:64c      00:05:85:8f:c8:bd stale      111 yes no
fe-1/2/1.5
fe80::2a0:a514:0:a4c      00:05:85:8f:c8:bd stale      327 yes no
fe-1/2/2.9
```

**Meaning** In IPv6, the Address Resolution Protocol (ARP) has been replaced by the Neighbor Discovery Protocol (NDP). The IPv4 command **show arp** is replaced by the IPv6 command **show ipv6 neighbors**. The key pieces of information displayed by this command are the IP address, the MAC (Link Layer) address, and the interface.

---

### Verifying IPv6 Router Advertisements

---

**Purpose** Confirm that devices can be added to the network using SLAAC by ensuring that router advertisements are working properly.

**Action** From operational mode, enter the **show ipv6 router-advertisement** command.

```
user@R1> show ipv6 router-advertisement
Interface: fe-1/2/0.1
  Advertisements sent: 37, last sent 00:01:41 ago
  Solicits received: 0
  Advertisements received: 38
  Advertisement from fe80::2a0:a514:0:24c, heard 00:05:46 ago
  Managed: 0
  Other configuration: 0
  Reachable time: 0 ms
  Default lifetime: 1800 sec
  Retransmit timer: 0 ms
  Current hop limit: 64
  Prefix: 2001:db8:0:1::/64
    Valid lifetime: 2592000 sec
    Preferred lifetime: 604800 sec
  On link: 1
  Autonomous: 1
Interface: fe-1/2/1.5
  Advertisements sent: 36, last sent 00:05:49 ago
  Solicits received: 0
  Advertisements received: 37
  Advertisement from fe80::2a0:a514:0:64c, heard 00:00:54 ago
  Managed: 0
  Other configuration: 0
  Reachable time: 0 ms
  Default lifetime: 1800 sec
  Retransmit timer: 0 ms
  Current hop limit: 64
  Prefix: 2001:db8:0:5::/64
    Valid lifetime: 2592000 sec
    Preferred lifetime: 604800 sec
  On link: 1
  Autonomous: 1
Interface: fe-1/2/2.9
  Advertisements sent: 36, last sent 00:01:37 ago
  Solicits received: 0
  Advertisements received: 38
  Advertisement from fe80::2a0:a514:0:a4c, heard 00:01:00 ago
  Managed: 0
  Other configuration: 0
  Reachable time: 0 ms
  Default lifetime: 1800 sec
  Retransmit timer: 0 ms
  Current hop limit: 64
  Prefix: 2001:db8:0:9::/64
```

```
Valid lifetime: 2592000 sec
Preferred lifetime: 604800 sec
On link: 1
Autonomous: 1
```

**Meaning** The output shows that router advertisements are being sent and received on Device R1's interfaces, indicating that both Device R1 and its directly connected neighbors are configured to generate router-advertisements.

### Tracing Neighbor Discovery Events

**Purpose** Perform additional validation by tracing router advertisements.

**Action** 1. Configure trace operations.

```
[edit protocols router-advertisement traceoptions]
user@R1# set file ipv6-nd-trace
user@R1# set traceoptions flag all
user@R1# commit
```

2. Run the **show log** command.

```
user@R1> show log ipv6-nd-trace
Mar 29 14:07:16 trace_on: Tracing to "/var/log/P1/ipv6-nd-trace" started
Mar 29 14:07:16.287229 background dispatch running job
ipv6_ra_delete_interface_config_job for task Router-Advertisement
Mar 29 14:07:16.287452 task_job_delete: delete background job
ipv6_ra_delete_interface_config_job for task Router-Advertisement
Mar 29 14:07:16.287505 background dispatch completed job
ipv6_ra_delete_interface_config_job for task Router-Advertisement
Mar 29 14:07:16.288288 ipv6_ra_iflchange(Router-Advertisement): ifl 0xb904378
ifl fe-1/2/2.9 104 change 0, intf 0xba140d8
Mar 29 14:07:16.288450 ipv6_ra_iflchange(Router-Advertisement): ifl 0xb904250
ifl fe-1/2/0.1 85 change 0, intf 0xba14000
Mar 29 14:07:16.288656 ipv6_ra_iflchange(Router-Advertisement): ifl 0xb9044a0
ifl fe-1/2/1.5 80 change 0, intf 0xba1406c
Mar 29 14:07:16.289293 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba002bc
fe80::2a0:a514:0:54c ifl fe-1/2/1.5 80 change 0, intf 0xba1406c
Mar 29 14:07:16.289358 -- nochange/add
Mar 29 14:07:16.289624 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba00230
2001:db8:0:5:2a0:a514:0:54c ifl fe-1/2/1.5 80 change 0, intf 0xba1406c
Mar 29 14:07:16.289682 -- nochange/add
Mar 29 14:07:16.289950 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba001a4
fe80::2a0:a514:0:14c ifl fe-1/2/0.1 85 change 0, intf 0xba14000
Mar 29 14:07:16.290009 -- nochange/add
Mar 29 14:07:16.290302 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba00118
2001:db8:0:1:2a0:a514:0:14c ifl fe-1/2/0.1 85 change 0, intf 0xba14000
Mar 29 14:07:16.290365 -- nochange/add
Mar 29 14:07:16.290634 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba003d4
fe80::2a0:a514:0:94c ifl fe-1/2/2.9 104 change 0, intf 0xba140d8
Mar 29 14:07:16.290694 -- nochange/add
Mar 29 14:07:16.290958 ipv6_ra_ifachange(Router-Advertisement): ifa 0xba00348
2001:db8:0:9:2a0:a514:0:94c ifl fe-1/2/2.9 104 change 0, intf 0xba140d8
Mar 29 14:07:16.291017 -- nochange/add
Mar 29 14:07:20.808516 task_job_create_foreground: create job ipv6 ra for task
Router-Advertisement
```

```
Mar 29 14:07:20.808921 foreground dispatch running job ipv6 ra for task
Router-Advertisement
Mar 29 14:07:20.809027 ipv6_ra_send_advertisement: sending advertisement for
ifl 104 to ff02::1
Mar 29 14:07:20.809087 (4810916) sending advertisement for ifl 104
Mar 29 14:07:20.809170 ifa 0xba00348 2001:db8:0:9:2a0:a514:0:94c/64
Mar 29 14:07:20.809539 --> sent 56 bytes
Mar 29 14:07:20.809660 task_timer_reset: reset Router-Advertisement_ipv6ra
Mar 29 14:07:20.809725 task_timer_set_oneshot_latest: timer
Router-Advertisement_ipv6ra interval set to 7:07
Mar 29 14:07:20.809772 foreground dispatch completed job ipv6 ra for task
Router-Advertisement
```

**Related Documentation** • [IPv6 Neighbor Discovery Overview on page 59](#)

---

## Neighbor Discovery Cache Protection Overview

Routing Engines can be susceptible to certain denial-of-service (DoS) attacks in IPv6 deployment scenarios. IPv6 subnets in general tend to be very large—for example, a /64 subnet might have a high number of unassigned addresses. The control plane of the Routing Engine performs the address resolution for unknown addresses. An attacker can quickly overwhelm the control plane of the Routing Engine by generating resolution requests for this unassigned address space, resulting in a cache overflow. The attacker relies on both the number of requests generated and the rate at which requests are queued up. Such scenarios can tie up router resources and prevent the Routing Engine from answering valid neighbor solicitations and maintaining existing neighbor cache entries, effectively resulting in a DoS attack for legitimate users.

The strategies for mitigating such DoS attacks are as follows:

- Filter unused address space.
- Minimize the size of subnets.
- Configure discard routes for subnets.
- Enforce limits to the size and rate of resolution for entries in the neighbor discovery cache.

Neighbor discovery queue limits can be enforced by restricting the number of IPv6 neighbors that can be added to the cache and the rate of resolution, and by prioritizing certain categories of neighbor discovery traffic. You can set limits per interface by using the **nd6-max-cache** and the **nd6-new-hold-limit** configuration statements or system-wide by using the **nd-system-cache-limit** configuration statement.

**NOTE:**

- For small sized platforms such as ACX, EX22XX, EX3200, EX33XX, and SRX, default is 20,000.
- For medium sized platforms such as EX4200, EX45XX, EX4300, EX62XX, QFX, and MX, default is 75,000.
- For rest of the platforms, default is 100,000.

**Related Documentation**

- [Configuring Neighbor Discovery Cache Protection on page 71](#)
- *Example: Configuring Neighbor Discovery Cache Protection to Prevent Denial-of-Service Attacks*
- [nd-system-cache-limit on page 150](#)
- [nd6-max-cache on page 151](#)
- [nd6-new-hold-limit on page 152](#)

## Configuring Neighbor Discovery Cache Protection

Routing Engines can be susceptible to certain types of denial-of-service (DoS) attacks in IPv6 deployment scenarios. IPv6 subnets in general tend to be very large; for example, a /64 subnet might have a high number of unassigned addresses. The control plane of the Routing Engine performs the address resolution for unknown addresses. An attacker can quickly overwhelm the control plane of the Routing Engine by generating resolution requests for this unassigned address space, resulting in a cache overflow. An attacker relies on both the number of requests generated and the rate at which requests are queued up.

The neighbor discovery process is that part of the control plane that implements the Neighbor Discovery Protocol. It is responsible for performing address resolution and maintaining the entries in the neighbor cache. One way to mitigate the DoS attacks is by enforcing limits to the size of the neighbor discovery cache and the rate of resolution of new next-hop entries, and by prioritizing certain categories of neighbor discovery traffic. You can configure limits to the neighbor discovery cache per interface and systemwide.

Before you begin, ensure that you are running Junos OS Release 15.1 or later.

Local limits apply to individual interfaces and are defined for resolved and unresolved entries in the neighbor discovery queue, while global limits apply systemwide.

To configure neighbor discovery cache protection on an interface:

1. Configure IPv6 family for the interface.

```
[edit interfaces interface-name unit unit number family]
user@host# set inet6
```

2. Configure the maximum size of the neighbor discovery cache for the interface.

```
[edit interfaces interface-name unit unit number family inet6]
user@host# set nd6-max-cache limit
```

3. Configure the maximum number of unresolved entries in the neighbor discovery cache that can be attached to the interface.

```
[edit interfaces interface-name unit unit number family inet6]
user@host# set nd6-new-hold-limit limit
```

To verify the configuration, execute the **show interfaces *interface-name*** operational command.

To configure neighbor discovery cache protection systemwide:

- Configure the systemwide limit for the neighbor discovery cache.

```
[edit]
user@host# set system nd-system-cache-limit limit
```

To verify the configured system-wide limits, execute the **show system statistics icmp6** operational command.

**NOTE:**

- For small sized platforms such as ACX, EX22XX, EX3200, EX33XX, and SRX, default is 20,000.
  - For medium sized platforms such as EX4200, EX45XX, EX4300, EX62XX, QFX, and MX, default is 75,000.
  - For rest of the platforms, default is 100,000.
- 

**Related Documentation**

- *Example: Configuring Neighbor Discovery Cache Protection to Prevent Denial-of-Service Attacks*
- [IPv6 Neighbor Discovery Overview on page 59](#)
- [Neighbor Discovery Cache Protection Overview on page 70](#)

---

## Monitoring Routing Information

---

**Purpose** Use the monitoring functionality to view the **inet.0** routing table on the routing device.

**Action** To view the routing table, enter the following commands in the CLI interface:

- **show route terse**
- **show route detail**



**Meaning** Table 3 on page 73 describes the different filters, their functions, and the associated actions.

Table 4 on page 73 summarizes key output fields in the routing information display.

**Table 3: Filtering Route Messages**

Field	Function	Your Action
Destination Address	Specifies the destination address of the route.	Enter the destination address.
Next hop address	Specifies the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.	Enter the next hop address.
Best route	Specifies only the best route available.	Select the view details of the best route.
Inactive routes	Specifies the inactive routes.	Select the view details of inactive routes.
Exact route	Specifies the exact route.	Select the view details of the exact route.
Hidden routes	Specifies the hidden routes.	Select the view details of hidden routes.
Search	Applies the specified filter and displays the matching messages.	To apply the filter and display messages, click <b>Search</b> .

**Table 4: Summary of Key Routing Information Output Fields**

Field	Values	Additional Information
Static Route Addresses	The list of static route addresses.	
Protocol	Protocol from which the route was learned: <b>Static</b> , <b>Direct</b> , <b>Local</b> .	
Preference	The preference is the individual preference value for the route.	The route preference is used as one of the route selection criteria.
Next-Hop	Network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.	<p>If a next hop is listed as <b>Discard</b>, all traffic with that destination address is discarded rather than routed. This value generally means that the route is a static route for which the <b>discard</b> attribute has been set.</p> <p>If a next hop is listed as <b>Reject</b>, all traffic with that destination address is rejected. This value generally means that the address is unreachable. For example, if the address is a configured interface address and the interface is unavailable, traffic bound for that address is rejected.</p> <p>If a next hop is listed as <b>Local</b>, the destination is an address on the host (either the loopback address or Ethernet management port 0 address, for example).</p>

Table 4: Summary of Key Routing Information Output Fields (*continued*)

Field	Values	Additional Information
Age	How long the route has been active.	
State	Flags for this route.	There are many possible flags.

**Related Documentation** • [Configuring Static Routing on page 21](#)

## Verifying That Virtual Router Routing Instances Are Working

**Purpose** After creating a virtual router routing instance, verify that it has been set up properly.

**Action** 1. Use the **show route instance** command to list all the routing instances and their properties:

```
user@switch> show route instance
Instance              Type
Primary RIB
master                forwarding
inet.0                4/0/1
__juniper_private1__ forwarding
__juniper_private1__.inet.0 1/0/3
__juniper_private2__ forwarding
__juniper_private2__.inet.0 0/0/1
__juniper_private3__ forwarding
__juniper_private3__.inet.0 1/0/2
__juniper_private4__ forwarding
__juniper_private4__.inet.0 4/0/2
__master.anon__       forwarding
r1                    virtual-router
r2                    virtual-router
```

2. Use the **show route forwarding-table** command to view the forwarding table information for each routing instance:

```
user@switch> show route forwarding-table
Routing table: r1---qfabric.inet
Internet:
Destination          Type RtRef Next hop          Type Index NhRef Netif
default              perm  0      0                          rjct 1628  1
0.0.0.0/32           perm  0      0                          dscd 1626  1
224.0.0.0/4          perm  0      0                          mdsc 1627  1
224.0.0.1/32         perm  0 224.0.0.1                 mcst 1623  1
255.255.255.255/32  perm  0      0                          bcst 1624  1
```

**Meaning** The output displays the routing table information and confirms that the virtual router routing instances have been created and the links are up.

**Related Documentation**

- [Configuring Virtual Router Routing Instances on page 26](#)

## Troubleshooting Virtual Routing Instances

- [Direct Routes Not Leaked Between Routing Instances on page 75](#)

### Direct Routes Not Leaked Between Routing Instances

**Problem Description:** Direct routes are not exported (leaked) between virtual routing instances. For example, consider the following scenario:

- Switch with two virtual routing instances:
  - Routing instance 1 connects to downstream device through interface xe-0/0/1.
  - Routing instance 2 connects to upstream device through interface xe-0/0/2.

If you enable route leaking between the routing instances (by using the **rib-group** statement, for example), the downstream device cannot connect to the upstream device because the switch connects to the upstream device over a direct route and these routes are not leaked between instances.



**NOTE:** You can see a route to the upstream device in the routing table of the downstream device, but this route is not functional.

Indirect routes *are* leaked between routing instances, so the downstream device can connect to any upstream devices that are connected to the switch over indirect routes.

**Solution** This is expected behavior.

**See Also**

- [Understanding Virtual Router Routing Instances on page 25](#)
- [Configuring Virtual Router Routing Instances on page 26](#)
- [rib-group on page 187](#)

**Related Documentation**

- [Understanding Virtual Router Routing Instances on page 25](#)
- [Configuring Virtual Router Routing Instances on page 26](#)
- [rib-group on page 187](#)



## PART 1

# Configuration Statements and Operational Commands

- Configuration Statements (Routing Options) on page 79
- Operational Commands (Routing Options) on page 213



## CHAPTER 2

# Configuration Statements (Routing Options)

- [active](#) on page 82
- [aggregate \(Routing\)](#) on page 84
- [as-path \(Routing Options\)](#) on page 86
- [autonomous-system](#) on page 88
- [backup-pe-group](#) on page 90
- [backups](#) on page 91
- [bandwidth](#) on page 92
- [bfd-liveness-detection \(Routing Options Static Route\)](#) on page 93
- [bgp-orf-cisco-mode](#) on page 97
- [bmp](#) on page 99
- [brief](#) on page 102
- [centralized](#) on page 103
- [community \(Routing Options\)](#) on page 104
- [confederation](#) on page 106
- [disable \(Routing Options\)](#) on page 107
- [description \(Routing Instances\)](#) on page 108
- [discard](#) on page 109
- [export \(Routing Options\)](#) on page 110
- [export-rib](#) on page 111
- [fate-sharing](#) on page 114
- [flow](#) on page 116
- [flow-map](#) on page 118
- [forwarding-cache \(Flow Maps\)](#) on page 119
- [forwarding-cache \(Multicast\)](#) on page 120
- [forwarding-options \(chassis\)](#) on page 121
- [forwarding-table](#) on page 124

- [generate](#) on page 125
- [graceful-restart \(Enabling Globally\)](#) on page 127
- [import](#) on page 128
- [import-policy](#) on page 129
- [import-rib](#) on page 130
- [indirect-next-hop](#) on page 131
- [install \(Routing Options\)](#) on page 132
- [instance-export](#) on page 133
- [instance-import](#) on page 133
- [instance-type](#) on page 134
- [interface \(Multicast Static Routes\)](#) on page 135
- [interface \(Routing Instances\)](#) on page 136
- [interface \(Routing Options\)](#) on page 137
- [interface-routes](#) on page 138
- [local-address \(Routing Options\)](#) on page 140
- [martians](#) on page 141
- [maximum-bandwidth](#) on page 142
- [maximum-paths](#) on page 143
- [maximum-prefixes](#) on page 145
- [med-igp-update-interval](#) on page 147
- [metric \(Aggregate, Generated, or Static Route\)](#) on page 148
- [multicast \(Routing Options\)](#) on page 149
- [nd-system-cache-limit](#) on page 150
- [nd6-max-cache](#) on page 151
- [nd6-new-hold-limit](#) on page 152
- [no-qos-adjust](#) on page 153
- [options \(Routing Options\)](#) on page 154
- [pim-to-igmp-proxy](#) on page 155
- [pim-to-mld-proxy](#) on page 156
- [policy \(Aggregate and Generated Routes\)](#) on page 157
- [policy \(Flow Maps\)](#) on page 158
- [policy-options](#) on page 159
- [policy-statement](#) on page 160
- [ppm](#) on page 165
- [ppm \(Ethernet Switching\)](#) on page 166
- [preference \(Routing Options\)](#) on page 167
- [prefix](#) on page 168



- [protocols](#) on page 169
- [qualified-next-hop \(Static Routes\)](#) on page 172
- [readvertise](#) on page 174
- [redundant-sources](#) on page 175
- [resolution](#) on page 176
- [resolution-ribs](#) on page 178
- [resolve](#) on page 179
- [restart-duration \(Routing Options\)](#) on page 180
- [retain](#) on page 181
- [reverse-oif-mapping](#) on page 182
- [rpf-check-policy \(Routing Options RPF\)](#) on page 183
- [rib \(General\)](#) on page 184
- [rib \(Route Resolution\)](#) on page 186
- [rib-group \(Routing Options\)](#) on page 187
- [rib-groups](#) on page 188
- [route-distinguisher-id](#) on page 190
- [route-record](#) on page 191
- [router-id](#) on page 192
- [routing-instances](#) on page 193
- [routing-options](#) on page 194
- [scope](#) on page 195
- [scope-policy](#) on page 196
- [source \(Source-Specific Multicast\)](#) on page 197
- [source-routing](#) on page 198
- [ssm-groups](#) on page 199
- [ssm-map \(Routing Options Multicast\)](#) on page 200
- [static \(Routes\)](#) on page 201
- [subscriber-leave-timer](#) on page 203
- [tag \(Routing Options\)](#) on page 204
- [threshold \(Multicast Forwarding Cache\)](#) on page 205
- [timeout \(Flow Maps\)](#) on page 207
- [timeout \(Multicast\)](#) on page 208
- [traceoptions](#) on page 209
- [upstream-interface](#) on page 212

## active

<b>Syntax</b>	(active   passive);
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static)   (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>     <b>generate</b>   static) (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   static)   (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>   (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit routing-options (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)], [edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   static) (defaults   route)]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Determine whether static, aggregate, or generated routes are removed from the routing and forwarding tables when they become inactive. Static routes are only removed from the routing table if the next hop becomes unreachable. This can occur if the local or neighbor interface goes down. Routes that have been configured to remain continually installed in the routing and forwarding tables are marked with <b>reject</b> next hops when they are inactive.</p> <ul style="list-style-type: none"> <li>• <b>active</b>—Remove a route from the routing and forwarding tables when it becomes inactive.</li> <li>• <b>passive</b>—Have a route remain continually installed in the routing and forwarding tables even when it becomes inactive.</li> </ul> <p>Include the <b>active</b> statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>passive</b> option specified in the <b>defaults</b> portion of the statement.</p>
<b>Default</b>	active
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Summarizing Static Routes Through Route Aggregation</i></li> </ul>

- *Example: Configuring a Conditional Default Route Policy*

## aggregate (Routing)

Syntax	<pre> aggregate {   defaults {     ... aggregate-options ...   }   route destination-prefix {     policy policy-name;     ... aggregate-options ...   } } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options <b>rib</b> <i>routing-table-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Configure aggregate routes.
Options	<p><b>aggregate-options</b>—Additional information about aggregate routes that is included with the route when it is installed in the routing table. Specify zero or more of the following options in <b>aggregate-options</b>. Each option is explained separately.</p> <ul style="list-style-type: none"> <li>• <b>active</b>— Removes inactive routes from the forwarding table.</li> <li>• <b>passive</b>— Retains inactive routes in the forwarding table.</li> <li>• <b>as-path</b> <i>&lt;as-path&gt;</i> <i>&lt;origin (egp   igp   incomplete)&gt;</i> <i>&lt;atomic-aggregate&gt;</i> <i>&lt;aggregator as-number ip-address&gt;</i>;</li> <li>• (<b>brief</b>   <b>full</b>);</li> <li>• <b>community</b> [<i>community-ids</i>];</li> <li>• <b>discard</b>;</li> <li>• (<b>metric</b>   <i>metric2</i>   <i>metric3</i>   <i>metric4</i>) <i>value</i> <i>&lt;type type&gt;</i>;</li> <li>• (<b>preference</b>   <i>preference2</i>   <i>color</i>   <i>color2</i>) <i>preference</i> <i>&lt;type type&gt;</i>;</li> <li>• <b>tag</b> <i>metric type number</i>;</li> </ul>

**defaults**—Specify global aggregate route options. These options only set default attributes inherited by all newly created aggregate routes. These are treated as global defaults and apply to all the aggregate routes you configure in the **aggregate** statement. This part of the **aggregate** statement is optional.

**route destination-prefix**—Configure a nondefault aggregate route:

- **default**—For the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.
- **destination-prefix/prefix-length**—**destination-prefix** is the network portion of the IP address, and **prefix-length** is the destination prefix length.

The **policy** statement is explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Summarizing Static Routes Through Route Aggregation</i></li></ul>
------------------------------	---

## as-path (Routing Options)

<b>Syntax</b>	<code>as-path &lt;as-path&gt; &lt;aggregator as-number ip-address&gt; &lt;atomic-aggregate&gt; &lt;origin (egp   igp   incomplete)&gt;;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Associate BGP autonomous system (AS) path information with a static, aggregate, or generated route.</p> <p>In Junos OS Release 9.1 and later, the numeric range for the AS number is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.2 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <i>&lt;16-bit high-order value in decimal&gt;.&lt;16-bit low-order value in decimal&gt;</i>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format. You can specify a value in the range from 0.0 through 65535.65535 in AS-dot notation format.</p>
<b>Default</b>	No AS path information is associated with static routes.
<b>Options</b>	<p><b>aggregator</b>—(Optional) Attach the BGP <b>aggregator</b> path attribute to the aggregate route. You must specify the last AS number that formed the aggregate route (encoded as</p>

two octets) for **as-number**, followed by the IP address of the BGP system that formed the aggregate route for **ip-address**.

**as-path**—(Optional) AS path to include with the route. It can include a combination of individual AS path numbers and AS sets. Enclose sets in brackets ( [ ] ). The first AS number in the path represents the AS immediately adjacent to the local AS. Each subsequent number represents an AS that is progressively farther from the local AS, heading toward the origin of the path. You cannot specify a regular expression for **as-path**. You must use a complete, valid AS path.

**atomic-aggregate**—(Optional) Attach the BGP **atomic-aggregate** path attribute to the aggregate route. This path attribute indicates that the local system selected a less specific route instead of a more specific route.

**origin egp**—(Optional) BGP origin attribute that indicates that the path information originated in another AS.

**origin igp**—(Optional) BGP origin attribute that indicates that the path information originated within the local AS.

**origin incomplete**—(Optional) BGP origin attribute that indicates that the path information was learned by some other means.

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Summarizing Static Routes Through Route Aggregation</i></li> <li>• <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li> </ul>
------------------------------	--

## autonomous-system

<b>Syntax</b>	<pre>autonomous-system <i>autonomous-system</i> &lt;asdot-notation&gt; &lt;loops <i>number</i>&gt; {     independent-domain &lt;no-attrset&gt;; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>asdot-notation</b> option introduced in Junos OS Release 9.3.</p> <p><b>asdot-notation</b> option introduced in Junos OS Release 9.3 for EX Series switches.</p> <p><b>no-attrset</b> option introduced in Junos OS Release 10.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Specify the routing device's AS number.</p> <p>An autonomous system (AS) is a set of routing devices that are under a single technical administration and that generally use a single interior gateway protocol (IGP) and metrics to propagate routing information within the set of routing devices. An AS appears to other ASs to have a single, coherent interior routing plan and presents a consistent picture of what destinations are reachable through it. ASs are identified by a number that is assigned by the Network Information Center (NIC) in the United States (<a href="http://www.isi.edu">http://www.isi.edu</a>).</p> <p>If you are using BGP on the routing device, you must configure an AS number.</p> <p>The AS path attribute is modified when a route is advertised to an EBGp peer. Each time a route is advertised to an EBGp peer, the local routing device prepends its AS number to the existing path attribute, and a value of 1 is added to the AS number.</p> <p>In Junos OS Release 9.1 and later, the numeric range is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <i>&lt;16-bit high-order value in decimal&gt;.&lt;16-bit low-order value in decimal&gt;</i>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format.</p>



**Options** *autonomous-system*—AS number. Use a number assigned to you by the NIC.

**Range:** 1 through 4,294,967,295 ( $2^{32} - 1$ ) in plain-number format for 4-byte AS numbers

In this example, the 4-byte AS number 65,546 is represented in plain-number format:

```
[edit]
routing-options {
  autonomous-system 65546;
}
```

**Range:** 0.0 through 65535.65535 in AS-dot notation format for 4-byte numbers

In this example, 1.10 is the AS-dot notation format for 65,546:

```
[edit]
routing-options {
  autonomous-system 1.10;
}
```

**Range:** 1 through 65,535 in plain-number format for 2-byte AS numbers (this is a subset of the 4-byte range)

In this example, the 2-byte AS number 60,000 is represented in plain-number format:

```
[edit]
routing-options {
  autonomous-system 60000;
}
```

**asdot-notation**—(Optional) Display the configured 4-byte autonomous system number in the AS-dot notation format.

**Default:** Even if a 4-byte AS number is configured in the AS-dot notation format, the default is to display the AS number in the plain-number format.

**loops number**—(Optional) Specify the number of times detection of the AS number in the AS\_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.

**Range:** 1 through 10

**Default:** 1



**NOTE:** When you specify the same AS number in more than one routing instance on the local routing device, you must configure the same number of loops for the AS number in each instance. For example, if you configure a value of 3 for the **loops** statement in a VRF routing instance that uses the same AS number as that of the master instance, you must also configure a value of 3 loops for the AS number in the master instance.

Use the **independent-domain** option if the **loops** statement must be enabled only on a subset of routing instances.

The remaining statement is explained separately. See [CLI Explorer](#).

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Examples: Configuring External BGP Peering</i></li><li>• <i>Examples: Configuring Internal BGP Peering</i></li></ul>

---

## backup-pe-group

---

<b>Syntax</b>	<pre>backup-pe-group <i>group-name</i> {     backups [ <i>addresses</i> ];     local-address <i>address</i>; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0. Statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure a backup provider edge (PE) group for ingress PE redundancy when point-to-multipoint label-switched paths (LSPs) are used for multicast distribution.
<b>Options</b>	<i>group-name</i> —Name of the group for PE backups.  The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring Ingress PE Redundancy</i></li></ul>

## backups

---

<b>Syntax</b>	<code>backups [ <i>addresses</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</p> <p>[edit routing-options multicast <b>backup-pe-group</b> <i>group-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure the address of backup PEs for ingress PE redundancy when point-to-multipoint label-switched paths (LSPs) are used for multicast distribution.
<b>Options</b>	<b><i>addresses</i></b> —Addresses of other PEs in the backup group.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring Ingress PE Redundancy</i></li> </ul>

## bandwidth

---

<b>Syntax</b>	<code>bandwidth ( <i>bps</i>   adaptive );</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">flow-map</a>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">flow-map</a>],</code> <code>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">flow-map</a>],</code> <code>[edit routing-options multicast <a href="#">flow-map</a>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 8.3. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure the bandwidth property for multicast flow maps.
<b>Options</b>	<b>adaptive</b> —Specify that the bandwidth is measured for the flows that are matched by the flow map.  <b>bps</b> —Bandwidth, in bits per second, for the flow map. <b>Range:</b> 0 through any amount of bandwidth <b>Default:</b> 2 Mbps
<b>Required Privilege Level</b>	<code>routing</code> —To view this statement in the configuration. <code>routing-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li><i>Example: Configuring a Multicast Flow Map</i></li></ul>

## bfd-liveness-detection (Routing Options Static Route)

**Syntax**

```

bfd-liveness-detection {
  description Site- xxx;
  authentication {
    algorithm algorithm-name;
    key-chain key-chain-name;
    loose-check;
  }
  detection-time {
    threshold milliseconds;
  }
  holddown-interval milliseconds;
  local-address ip-address;
  minimum-interval milliseconds;
  minimum-receive-interval milliseconds;
  minimum-receive-ttl number;
  multiplier number;
  neighbor address;
  no-adaptation;
  transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
  }
  version (1 | automatic);
}

```

**Hierarchy Level**

```

[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options rib routing-table-name static route destination-prefix],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options rib routing-table-name static route destination-prefix qualified-next-hop
 (interface-name | address)],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options static route destination-prefix],
[edit logical-systems logical-system-name routing-instances routing-instance-name
 routing-options static route destination-prefix qualified-next-hop (interface-name |
 address)],
[edit logical-systems logical-system-name routing-options rib routing-table-name static
 route destination-prefix],
[edit logical-systems logical-system-name routing-options rib routing-table-name static
 route destination-prefix qualified-next-hop (interface-name | address)],
[edit logical-systems logical-system-name routing-options static route destination-prefix],
[edit logical-systems logical-system-name routing-options static route destination-prefix
 qualified-next-hop (interface-name | address)],
[edit routing-instances routing-instance-name routing-options rib routing-table-name static
 route destination-prefix],
[edit routing-instances routing-instance-name routing-options rib routing-table-name static
 route destination-prefix qualified-next-hop (interface-name | address)],
[edit routing-instances routing-instance-name routing-options static route destination-prefix],
[edit routing-instances routing-instance-name routing-options static route destination-prefix
 qualified-next-hop (interface-name | address)],
[edit routing-options rib routing-table-name static route destination-prefix],
[edit routing-options rib routing-table-name static route destination-prefix qualified-next-hop
 (interface-name | address)],

```

```
[edit routing-options static route destination-prefix],
[edit routing-options static route destination-prefix qualified-next-hop (interface-name |
address)]
```

<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p><b>detection-time threshold</b> and <b>transmit-interval threshold</b> options introduced in Junos OS Release 8.2.</p> <p><b>local-address</b> statement introduced in Junos OS Release 8.2.</p> <p><b>minimum-receive-ttl</b> statement introduced in Junos OS Release 8.2.</p> <p>Support for logical routers introduced in Junos OS Release 8.3.</p> <p><b>holddown-interval</b> statement introduced in Junos OS Release 8.5.</p> <p><b>no-adaptation</b> statement introduced in Junos OS Release 9.0.</p> <p>Support for IPv6 static routes introduced in Junos OS Release 9.1.</p> <p><b>authentication algorithm</b>, <b>authentication key-chain</b>, and <b>authentication loose-check</b> statements introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Configure bidirectional failure detection timers and authentication criteria for static routes.</p>

**Options** **authentication algorithm** *algorithm-name*—Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, or **meticulous-keyed-sha-1**.

**authentication key-chain** *key-chain-name*—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

**authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.

**detection-time threshold** *milliseconds*—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

**holddown-interval** *milliseconds*—Configure an interval specifying how long a BFD session must remain up before a state change notification is sent. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.

**Range:** 0 through 255,000

**Default:** 0

**local-address** *ip-address*—Enable a multihop BFD session and configure the source address for the BFD session.

**minimum-interval** *milliseconds*—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.

**Range:** 1 through 255,000

**minimum-receive-interval** *milliseconds*—Configure the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

**Range:** 1 through 255,000

**minimum-receive-ttl** *number*—Configure the time to live (TTL) for the multihop BFD session.

**Range:** 1 through 255

**Default:** 255

**multiplier** *number*—Configure number of hello packets not received by the neighbor that causes the originating interface to be declared down.

**Range:** 1 through 255

**Default:** 3

**neighbor *address***—Configure a next-hop address for the BFD session for a next hop specified as an interface name.

**no-adaptation**—Specify for BFD sessions not to adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold *milliseconds***—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295

**transmit-interval minimum-interval *milliseconds***—Configure the minimum interval at which the routing device transmits hello packets to a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version).

**Default:** automatic

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes for Faster Network Failure Detection on page 34</a></li><li>• <a href="#">Example: Configuring BFD Authentication for Securing Static Routes on page 49</a></li></ul>
------------------------------	--



## bgp-orf-cisco-mode

**Syntax** `bgp-orf-cisco-mode;`

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols bgp outbound-route-filter],  
 [edit logical-systems *logical-system-name* protocols bgp group *group-name* outbound-route-filter],  
 [edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address* outbound-route-filter],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp outbound-route-filter],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* outbound-route-filter],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* outbound-route-filter],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options outbound-route-filter],  
 [edit logical-systems *logical-system-name* routing-options outbound-route-filter],  
 [edit protocols bgp outbound-route-filter],  
 [edit protocols bgp group *group-name* outbound-route-filter],  
 [edit protocols bgp group *group-name* neighbor *address* outbound-route-filter],  
 [edit routing-instances *routing-instance-name* protocols bgp outbound-route-filter],  
 [edit routing-instances *routing-instance-name* protocols bgp group *group-name* outbound-route-filter],  
 [edit routing-instances *routing-instance-name* protocols bgp group *group-name* neighbor *address* outbound-route-filter],  
 [edit routing-instances *routing-instance-name* routing-options outbound-route-filter],  
 [edit routing-options outbound-route-filter]

**Release Information** Statement introduced in Junos OS Release 9.2.  
 Statement introduced in Junos OS Release 9.2 for EX Series switches.  
 Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.2.  
 Support for the BGP group and neighbor hierarchy levels introduced in Junos OS Release 9.3 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.  
 Statement introduced in Junos OS Release 12.3 for ACX Series routers.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Enable interoperability with routing devices that use the vendor-specific outbound route filter compatibility code of 130 and code type of 128.



**NOTE:** To enable interoperability for all BGP peers configured on the routing device, include the statement at the [edit routing-options outbound-route-filter] hierarchy level.

**Default** Disabled

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring BGP Prefix-Based Outbound Route Filtering</i></li></ul>

## bmp

```
Syntax  bmp {
    authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
    authentication-key key;
    authentication-key-chain authentication-key-chain;
    connection-mode (active | passive);
    hold-down {
        seconds;
        flaps flaps;
        period seconds;
    }
    initiation-message text;
    local-address address;
    local-port port;
    monitor (disable | enable);
    priority (high | low | medium);
    route-monitoring {
        none;
        post-policy {
            exclude-non-eligible;
        }
        pre-policy {
            exclude-non-feasible;
        }
    }
}
station station-name {
    authentication-algorithm (aes-128-cmac-96 | hmac-sha-1-96 | md5);
    authentication-key key;
    authentication-key-chain authentication-key-chain;
    connection-mode (active | passive);
    hold-down {
        seconds;
        flaps flaps;
        period seconds;
    }
    initiation-message text;
    local-address address;
    local-port port;
    monitor (disable | enable);
    priority (high | low | medium);
    route-monitoring {
        none;
        post-policy {
            exclude-non-eligible;
        }
        pre-policy {
            exclude-non-feasible;
        }
    }
}
station-address (ip-address | name);
station-port port-number;
statistics-timeout seconds;
traceoptions {
```

```

        file filename <files number> <size size> <world-readable | no-world-readable>;
        flag flag <flag-modifier>;
    }
}
station-address (ip-address | name);
station-port port-number;
statistics-timeout seconds;
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-readable>;
    flag flag <flag-modifier>;
}
}

```

**Hierarchy Level** [edit routing-options]  
 [edit logical-systems *logical-system-name* routing-options],  
 [edit logical-systems *logical-system-name* protocols bgp],  
 [edit logical-systems *logical-system-name* protocols bgp group *group-name*],  
 [edit logical-systems *logical-system-name* protocols bgp group *group-name* neighbor *address*],  
 [edit protocols bgp],  
 [edit protocols bgp group *group-name*],  
 [edit protocols bgp group *group-name* neighbor *address*],



**NOTE:** 1. Complete BMP configuration, as mentioned in the syntax, can be done under the first two hierarchy levels only

2. Under other hierarchy levels, only the following configurations are supported:

- Either we can inherit or not inherit the configuration data
- Enable/disable monitoring
- Control route monitoring settings

<b>Release Information</b>	Statement introduced in Junos OS Release 9.5. Statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Support for BMP version 3 introduced in Junos OS Release 13.3.
<b>Description</b>	Configure the BGP Monitoring Protocol (BMP), which enables the routing device to collect data from the BGP Adjacency-RIB-In routing tables and periodically send that data to a monitoring station.
<b>Options</b>	The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.


**Related Documentation** • *Example: Configuring the BGP Monitoring Protocol*

## brief


<b>Syntax</b>	(brief   full);
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults     route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>     <b>generate</b>) (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>)   (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i>   (<b>aggregate</b>   <b>generate</b>) (defaults   route)], [edit routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)], [edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Configure all AS numbers from all contributing paths to be included in the aggregate or generated route's path.</p> <ul style="list-style-type: none"> <li>• <b>brief</b>—Include only the longest common leading sequences from the contributing AS paths. If this results in AS numbers being omitted from the aggregate route, the BGP <b>ATOMIC_ATTRIBUTE</b> path attribute is included with the aggregate route.</li> <li>• <b>full</b>—Include all AS numbers from all contributing paths in the aggregate or generated route's path. Include this option when configuring an individual route in the <b>route</b> portion of the <b>generate</b> statement to override a <b>retain</b> option specified in the <b>defaults</b> portion of the statement.</li> </ul>
<b>Default</b>	<b>full</b>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Summarizing Static Routes Through Route Aggregation</i></li> <li>• <i>Example: Configuring a Conditional Default Route Policy</i></li> <li>• <i>Understanding Conditionally Generated Routes</i></li> <li>• <a href="#">aggregate on page 84</a></li> </ul>

- [generate on page 125](#)

## centralized

<b>Syntax</b>	centralized;
<b>Hierarchy Level</b>	[edit protocols lacp <a href="#">ppm</a> ]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.4 for MX Series routers.</p> <p>Statement introduced in Junos OS Release 10.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Disable distributed periodic packet management (PPM) processing for Link Aggregation Control Protocol (LACP) packets and run all PPM processing for LACP packets on the Routing Engine.</p> <p>This statement disables distributed PPM processing for only LACP packets. You can disable distributed PPM processing for all packets that use PPM and run all PPM processing on the Routing Engine by configuring the <b>no-delegate-processing</b> statement in the <a href="#">[edit routing-options ppm]</a> hierarchy.</p>
	<div>  <p><b>BEST PRACTICE:</b> We generally recommend that you disable distributed PPM only if Juniper Networks Customer Service advises you to do so. You should disable distributed PPM only if you have a compelling reason to disable it.</p> </div>
<b>Default</b>	Distributed PPM processing is enabled for all packets that use PPM.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</i></li> <li>• <i>Configuring Aggregated Ethernet LACP (CLI Procedure)</i></li> <li>• <a href="#">Configuring Distributed Periodic Packet Management on page 28</a></li> <li>• <i>Configuring Link Aggregation</i></li> </ul>

## community (Routing Options)

<b>Syntax</b>	<code>community ([ <i>community-ids</i> ]   no-advertise   no-export   no-export-subconfed   none   llgr-stale   no-llgr);</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p><b>llgr-stale</b> and <b>no-llgr</b> options added in Junos OS Release 15.1.</p> <p>Support for BGP large community introduced in Junos OS Release 17.3 for MX Series, PTX Series, and QFX Series.</p>
<b>Description</b>	Associate BGP community information with a static, aggregate, or generated route.
<div>  <b>NOTE:</b> BGP large community is available only for static routes. </div>	
<b>Default</b>	No BGP community information is associated with static routes.
<b>Options</b>	<p><b><i>community-ids</i></b>—One or more community identifiers. The <b><i>community-ids</i></b> format varies according to the type of attribute that you use.</p> <p>The BGP community attribute format is <b><i>as-number:community-value</i></b>:</p> <ul style="list-style-type: none"> <li><b><i>as-number</i></b>—AS number of the community member. It can be a value from 1 through 65,535. The AS number can be a decimal or hexadecimal value.</li> <li><b><i>community-value</i></b>—Identifier of the community member. It can be a number from 0 through 65,535.</li> </ul>



For more information about BGP community attributes, see the “Configuring the Extended Communities Attribute” section in the *Routing Policies, Firewall Filters, and Traffic Policers Feature Guide*.

For specifying the BGP community attribute only, you also can specify **community-ids** as one of the following well-known community names defined in RFC 1997:

- **no-advertise**—Routes containing this community name are not advertised to other BGP peers.
- **no-export**—Routes containing this community name are not advertised outside a BGP confederation boundary.
- **no-export-subconfed**—Routes containing this community are advertised to IBGP peers with the same AS number, but not to members of other confederations.
- **llgr-stale**—Adds a community to a long-lived stale route when it is readvertised.
- **no-llgr**—Marks routes which a BGP speaker does not want to be retained by LLGR. The Notification message feature does not have any associated configuration parameters.



**NOTE:** Extended community attributes are not supported at the [edit routing-options] hierarchy level. You must configure extended communities at the [edit policy-options] hierarchy level. For information about configuring extended communities, see the *Routing Policies, Firewall Filters, and Traffic Policers Feature Guide*.

As defined in RFC 8092, BGP large community uses 12-byte encoding and the format for BGP large **community-ids** is:

**large:** *global-administrator:assigned-number:assigned-number*

**large** indicates BGP large community.

**global-administrator** is the administrator. It is a 4-byte AS number.

**assigned-number** is a 4-byte value used to identify the local provider. BGP large community uses two 4-byte assigned number to identify the local provider.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Summarizing Static Routes Through Route Aggregation</i></li> <li>• <a href="#">aggregate on page 84</a></li> <li>• <a href="#">generate on page 125</a></li> <li>• <i>static</i></li> </ul>
------------------------------	--

## confederation

---

<b>Syntax</b>	<code>confederation <i>confederation-autonomous-system</i> members [ <i>autonomous-systems</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	<p>Specify the routing device's confederation AS number.</p> <p>If you administer multiple ASs that contain a very large number of BGP systems, you can group them into one or more <i>confederations</i>. Each confederation is identified by its own AS number, which is called a <i>confederation AS number</i>. To external ASs, a confederation appears to be a single AS. Thus, the internal topology of the ASs making up the confederation is hidden.</p> <p>The BGP path attributes <b>NEXT_HOP</b>, <b>LOCAL_PREF</b>, and <b>MULTI_EXIT_DISC</b>, which normally are restricted to a single AS, are allowed to be propagated throughout the ASs that are members of the same confederation.</p> <p>Because each confederation is treated as if it were a single AS, you can apply the same routing policy to all the ASs that make up the confederation.</p> <p>Grouping ASs into confederations reduces the number of BGP connections required to interconnect ASs.</p> <p>If you are using BGP, you can enable the local routing device to participate as a member of an AS confederation. To do this, include the <b>confederation</b> statement.</p> <p>Specify the AS confederation identifier, along with the peer AS numbers that are members of the confederation.</p> <p>Note that peer adjacencies do not form if two BGP neighbors disagree about whether an adjacency falls within a particular confederation.</p>
<b>Options</b>	<p><b><i>autonomous-systems</i></b>—AS numbers of the confederation members.</p> <p><b>Range:</b> 1 through 65,535</p> <p><b><i>confederation-autonomous-system</i></b>—Confederation AS number. Use one of the numbers assigned to you by the NIC.</p> <p><b>Range:</b> 1 through 65,535</p>

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Configuring BGP Confederations*
- *Understanding BGP Confederations*

## disable (Routing Options)

**Syntax** disable;

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options graceful-restart],  
[edit logical-systems *logical-system-name* routing-options graceful-restart],  
[edit routing-instances *routing-instance-name* routing-options graceful-restart],  
[edit routing-options graceful-restart]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 12.3 for ACX Series routers.

**Description** Disable graceful restart.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Junos OS High Availability Library for Routing Devices*

## description (Routing Instances)

---

<b>Syntax</b>	<code>description text;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> ], [edit routing-instances <i>routing-instance-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 11.1 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Provide a text description for the routing instance. If the text includes one or more spaces, enclose it in quotation marks (" "). Any descriptive text you include is displayed in the output of the <b>show route instance detail</b> command and has no effect on the operation of the routing instance.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

## discard

**Syntax** `discard;`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-instances *routing-instance-name* routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.  
 Statement introduced in Junos OS Release 12.3 for ACX Series routers.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.

To propagate static routes into the routing protocols, include the **discard** statement when you define the route, along with a routing policy.



**NOTE:** In other vendors' software, a common way to propagate static routes into routing protocols is to configure the routes so that the next-hop routing device is the loopback address (commonly, 127.0.0.1). However, configuring static routes in this way (by including a statement such as **route address/mask-length next-hop 127.0.0.1**) does not propagate the static routes, because the forwarding table ignores static routes whose next-hop routing device is the loopback address.

**Default** When an aggregate route becomes active, it is installed in the routing table with a reject next hop, which means that ICMP unreachable messages are sent.

**Required Privilege Level** routing—To view this statement in the configuration.  
 routing-control—To add this statement to the configuration.

- Related Documentation**
- [Example: Summarizing Static Routes Through Route Aggregation](#)
  - [aggregate on page 84](#)
  - [generate on page 125](#)

---

## export (Routing Options)

---

<b>Syntax</b>	<code>export [ <i>policy-name</i> ];</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options forwarding-table],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-options forwarding-table],</code> <code>[edit routing-instances <i>routing-instance-name</i> routing-options forwarding-table],</code> <code>[edit routing-options forwarding-table]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	<p>Apply one or more policies to routes being exported from the routing table into the forwarding table.</p> <p>In the <b>export</b> statement, list the name of the routing policy to be evaluated when routes are being exported from the routing table into the forwarding table. Only active routes are exported from the routing table.</p> <p>You can reference the same routing policy one or more times in the same or a different <b>export</b> statement.</p> <p>You can apply export policies to routes being exported from the routing table into the forwarding table for the following features:</p> <ul style="list-style-type: none"><li>• Per-packet load balancing</li><li>• Class of service (CoS)</li></ul>
<b>Options</b>	<i>policy-name</i> —Name of one or more policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Example: Load Balancing BGP Traffic</a></li></ul>

## export-rib

<b>Syntax</b>	<code>export-rib <i>routing-table-name</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-options <b>rib-groups</b> <i>group-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Specify the name of the routing table from which Junos OS should export routing information. For any individual RIB group, only one table can be specified in the <b>export-rib</b> statement.</p> <p>The <b>export-rib</b> statement specifies the source table from which routing information is advertised.</p> <p>One common use of the <b>export-rib</b> statement is interdomain routing. The export RIB is the table used when BGP extracts routes to advertise to peers. In multicast interdomain routing, for example, the export RIB is likely to be inet.2.</p> <p>Another use of <b>export-rib</b> is dynamic route leaking between the global routing table (inet.0) and a VRF routing table (<i>instance.inet.0</i>). For example, you can use a RIB group to copy routes learned in the VRF into the global routing table, inet.0, or copy routes learned in inet.0 into a VRF. You define the use of this RIB group in the VRF's BGP configuration. In a routing policy you can do dynamic filtering of routes. For instance, you can use an import policy to only copy routes with certain communities into the global routing table.</p> <p>For example:</p> <pre> rib-groups {   rib-interface-routes-v4 {     import-rib [ inet.0 VRF.inet.0 ];   }   rib-import-VRF-routes-to-inet0-v4 {     export-rib VRF.inet.0;     import-rib [ VRF.inet.0 inet.0 ];     import-policy rib-import-VRF-routes-to-inet0-v4;   }   rib-import-inet0-routes-to-VRF-v4 {     export-rib inet.0;     import-rib [ inet.0 VRF.inet.0 ];     import-policy rib-import-inet0-routes-to-VRF-v4;   } } </pre>

```

routing-options {
  interface-routes {
    rib-group {
      inet rib-interface-routes-v4;
    }
  }
}
protocols {
  bgp {
    group iBGP-peers {
      type internal;
      family inet {
        unicast {
          rib-group rib-import-inet0-routes-to-VRF-v4;
        }
      }
    }
  }
}
routing-instances {
  VRF {
    routing-options {
      interface-routes {
        rib-group {
          inet rib-interface-routes-v4;
        }
      }
    }
    protocols {
      bgp {
        group peersin-VRF {
          family inet {
            unicast {
              rib-group rib-import-VRF-routes-to-inet0-v4;
            }
          }
        }
      }
    }
  }
}

```

**Options** *routing-table-name*—Routing table group name.

**Required Privilege** routing—To view this statement in the configuration.  
**Level** routing-control—To add this statement to the configuration.



**Related  
Documentation**

- *Example: Exporting Specific Routes from One Routing Table Into Another Routing Table*
- *Example: Configuring a PIM RPF Routing Table*
- *Example: Configuring DVMRP to Announce Unicast Routes*
- *Example: Configuring a Dedicated PIM RPF Routing Table*
- *Example: Configuring Any-Source Multicast for Draft-Rosen VPNs*
- [import-rib on page 130](#)
- *passive*

## fate-sharing

<b>Syntax</b>	<pre>fate-sharing {   group <i>group-name</i> {     cost <i>value</i>;     from <i>address</i> &lt;to <i>address</i>&gt;;   } }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-options],  [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],  [edit routing-options],  [edit routing-instances <i>routing-instance-name</i> routing-options]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.  Statement introduced in Junos OS Release 9.0 for EX Series switches.  Statement introduced in Junos OS Release 11.3 for the QFX Series.  Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Specify a backup path in case the primary path becomes unusable.</p> <p>You specify one or more objects with common characteristics within a group. All objects are treated as /32 host addresses. The objects can be a LAN interface, a router ID, or a point-to-point link. Sequence is insignificant.</p> <p>Changing the fate-sharing database does not affect existing established LSPs until the next CSPF reoptimization. The fate-sharing database does affect fast-reroute detour path computations.</p>
<b>Options</b>	<p><b>cost <i>value</i></b>—Cost assigned to the group.  <b>Range:</b> 1 through 65,535  <b>Default:</b> 1</p> <p><b>from <i>address</i></b>—Address of the router or address of the LAN/NBMA interface. For example, an Ethernet network with four hosts in the same fate-sharing group would require you to list all four of the separate <b>from</b> addresses in the group.</p> <p><b>group <i>group-name</i></b>—Each fate-sharing group must have a name, which can have a maximum of 32 characters, including letters, numbers, periods (.), and hyphens (-). You can define up to 512 groups.</p> <p><b>to <i>address</i></b>—(Optional) Address of egress router. For point-to-point link objects, you must specify both a <b>from</b> and a <b>to</b> address.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.  routing-control—To add this statement to the configuration.</p>

- Related Documentation**
- *Configuring the Ingress Router for MPLS-Signaled LSPs*
  - *MPLS Applications Feature Guide*

## flow

<b>Syntax</b>	<pre> flow {     route <i>name</i> {         match {             <i>match-conditions</i>;         }         term-order (legacy   standard);         then {             <i>actions</i>;         }     }     firewall-install-disable;     term-order (legacy   standard);     validation {         traceoptions {             file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;             flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;;         }     } } </pre>
<b>Hierarchy Level</b>	<p>[edit routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>term-order</b> statement introduced in Junos OS Release 10.0</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>firewall-install-disable</b> statement introduced in Junos OS Releases 12.1X48 and 12.3 for PTX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Configure a flow route.
<b>Default</b>	legacy
<b>Options</b>	<p><b>actions</b>—An action to take if conditions match.</p> <p><b>firewall-install-disable</b>—(PTX Series routers only) Disable installing flow-specification firewall filters in the firewall process (dfwd).</p> <p><b>Default:</b> For PTX Series routers, the <b>firewall-install-disable</b> statement appears in the default configuration, preventing installation of flow-specification firewall filters into dfwd. For other models, this setting is omitted from the default configuration, allowing installation of flow-specification firewall filters into dfwd.</p> <p><b>match-conditions</b>—Match packets to these conditions.</p> <p><b>route <i>name</i></b>—Name of the flow route.</p>

**standard**—Specify to use version 7 or later of the flow-specification algorithm.

**term-order (legacy | standard)**—Specify the version of the flow-specification algorithm.

- **legacy**—Use version 6 of the flow-specification algorithm.
- **standard**—Use version 7 of the flow-specification algorithm.

**then**—Actions to take on matching packets.

The remaining statements are explained separately. See [CLI Explorer](#).

<b>Required Privilege Level</b>	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	• <i>Example: Enabling BGP to Carry Flow-Specification Routes</i>
	• <i>Understanding BGP Flow Routes for Traffic Filtering</i>

## flow-map

---

<b>Syntax</b>	<pre>flow-map <i>flow-map-name</i> {     bandwidth (<i>bps</i>   adaptive);     forwarding-cache {         timeout (never non-discard-entry-only   <i>minutes</i>);     }     policy [ <i>policy-names</i> ];     redundant-sources [ <i>addresses</i> ]; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>     routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]</pre>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure multicast flow maps.
<b>Options</b>	<p><i>flow-map-name</i>—Name of the flow-map.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring a Multicast Flow Map</i></li></ul>

## forwarding-cache (Flow Maps)

---

<b>Syntax</b>	forwarding-cache { timeout (minutes   never non-discard-entry-only ); }
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ], [edit logical-systems <i>logical-system-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ], [edit routing-options multicast <b>flow-map</b> <i>flow-map-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	Configure multicast forwarding cache properties for the flow map.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring a Multicast Flow Map</i></li> </ul>

## forwarding-cache (Multicast)

---

<b>Syntax</b>	<pre>forwarding-cache {     threshold suppress <i>value</i> &lt;reuse <i>value</i>&gt;;     <i>timeout minutes</i>; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Configure multicast forwarding cache properties. These properties include threshold suppression and reuse limits and timeout values.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring the Multicast Forwarding Cache</i></li></ul>



## forwarding-options (chassis)

<b>Syntax</b>	<pre>forwarding options <i>profile-name</i> {     num-65-127-prefix <i>number</i>; }</pre>
<b>Syntax</b>	<pre>forwarding-options lpm-profile {     prefix-65-127-disable;     unicast-in-lpm; }</pre>
<b>Syntax</b>	<pre>forwarding-options custom-profile {     l2-entries   l3-entries   lpm-entries {         num-banks <i>number</i>;     } }</pre>
<b>Hierarchy Level</b>	[edit chassis]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 13.2.</p> <p><b>custom-profile</b> option introduced in Junos OS Release 15.1x53-D30 for QFX5200 Series switches only.</p>
<b>Description</b>	<p>Configure a unified forwarding table profile to allocate the amount of memory available for the following:</p> <ul style="list-style-type: none"> <li>• MAC addresses.</li> <li>• Layer 3 host entries.</li> <li>• Longest prefix match table entries.</li> </ul> <p>This feature enables you to select a profile that optimizes the amount of memory available for various types of forwarding-table entries based on the needs of your network. For example, for a switch that handles a great deal of Layer 2 traffic, such as a virtualized network with many servers and virtualized machines, you would choose the <b>l2-profile-one</b>, which allocates the highest amount of memory to MAC addresses.</p> <p>You configure the memory allocation for LPM table entries differently, depending on whether you using Junos OS Release 13.2X51-D10 or Junos OS Release 13.2X51-D15 and later. For more information about configuring memory allocation for LPM table entries, see <i>Configuring the Unified Forwarding Table on Switches</i>.</p> <p>The <b>num-65-127-prefix <i>number</i></b> statement is not supported on the <b>custom-profile</b> and the <b>lpm-profile</b>. The <b>prefix-65-127-disable</b> and <b>unicast-in-lpm</b> statements are supported only on the <b>lpm-profile</b>.</p> <p>When you commit a configuration with a forwarding table profile change, in most cases the Packet Forwarding Engine restarts automatically to apply the new parameters, which brings the data interfaces down and then up again.</p>

However, starting with Junos OS Releases 14.1X53-D40, 15.1R5, and 16.1R3, for a Virtual Chassis or Virtual Chassis Fabric (VCF) comprised of EX4600 or QFX5100 switches, the Packet Forwarding Engine in member switches does not automatically restart upon configuring and committing a unified forwarding table profile change. This behavior avoids having Virtual Chassis or VCF instability and a prolonged convergence period if a profile change is propagated to member switches and multiple Packet Forwarding Engines all restart at the same time. In this environment, instead of automatically restarting when you initially commit a profile configuration change, the message **Reboot required for configuration to take effect** is displayed at the master switch CLI prompt, notifying you that the profile change does not take effect until the next time you restart the Virtual Chassis or VCF. The profile configuration change is propagated to member switches that support this feature, and a reminder that a reboot is required to apply this pending configuration change appears in the system log of the master switch and applicable member switches. You then enable the profile change subsequently during a planned downtime period using the **request system reboot** command, which quickly establishes a stable Virtual Chassis or VCF with the new configuration.



**NOTE:** You should plan to make unified forwarding table profile changes only when you are ready to perform a Virtual Chassis or VCF system reboot *immediately* after committing the configuration update. Otherwise, in the intervening period between committing the configuration change and rebooting the Virtual Chassis or VCF, the system can become inconsistent if a member experiences a problem and restarts. In that case, the new configuration takes effect on the member that was restarted, while the change is not yet activated on all the other members.

---

**Options** **profile-name**—name of the profile to use for memory allocation in the unified forwarding table. [Table 5 on page 123](#) lists the profiles you can choose that have set values and the associated values for each type of entry.

On QFX5200 Series switches only, you can also select **custom-profile**. This profile enables you to allocate from one to four banks of shared hash memory to a specific type of forwarding-table entry. Each shared hash memory bank can store a maximum of the equivalent of 32,000 IPv4 unicast addresses.

**Table 5: Unified Forwarding Table Profiles**

Profile Name	MAC Table	Host Table (unicast and multicast addresses)					
	MAC Addresses	IPv4 unicast	IPv6 unicast	IPv4 (*, G)	IPv4 (S, G)	IPv6 (*, G)	IPv6 (S, G)
<b>l2-profile-one</b>	288K	16K	8K	8K	8K	4K	4K
<b>l2-profile-two</b>	224K	80K	40K	40K	40K	20K	20K
<b>l2-profile-three (default)</b>	160K	144K	72K	72K	72K	36K	36K
<b>l3-profile</b>	96K	208K	104K	104K	104K	52K	52K
<b>lpm-profile*</b>	32K	16K	8K	8K	8K	4K	4K

\* This profile supports only IPv4 in Junos OS Release 13.2X51-D10. Starting in Junos OS Release 13.2X51-D15, the **lpm-profile** supports IPv4 and IPv6 entries.



**NOTE:** If the host stores the maximum number of entries for any given type, the entire table is full and is unable to accommodate *any* entries of any other type. For information about valid combinations of table entries see *Understanding the Unified Forwarding Table*.

**l2-entries | l3-entries | lpm-entries—(custom-profile only)** Select a type of forwarding-table entry—Layer 2, Layer 3, or LPM—to allocate a specific number of shared memory banks. You configure the amount of memory to allocate for each type of entry separately.

**num-banks *number*—(custom-profile only)** Specify the number of shared memory banks to allocate for a specific type of forwarding-table entry. Each shared memory bank stores the equivalent of 32,000 IPv4 unicast addresses.

**Range:** 0 through 4.



**NOTE:** There are four shared memory banks, which can be allocated flexibly among the three types of forwarding-table entries. To allocate

no shared memory for a particular entry type, specify the number 0. When you commit the configuration, the system issues a commit check to ensure that you have not configured more than four memory banks. You do not have to configure all four shared memory banks. By default, each entry type is allocated the equivalent of 32,000 IPv4 unicast addresses in shared memory.

---

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- *Understanding the Unified Forwarding Table*
- *Example: Configuring a Unified Forwarding Table Custom Profile on QFX Series Switches*

---

## forwarding-table

---

**Syntax** forwarding-table {  
    **export** [ *policy--names* ];  
    (**indirect-next-hop** | no-indirect-next-hop);  
}

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure information about the routing device's forwarding table.  
  
The remaining statements are explained separately. See [CLI Explorer](#).

**Options** **remnant-holdtime**—Sets the remnant hold time, which is required for the MXVC-ISSU, where the recommended value is 900..

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Per-Packet Load Balancing on page 21](#)

## generate


<b>Syntax</b>	<pre> generate {   defaults {     generate-options;   }   route destination-prefix {     policy policy-name;     generate-options;   } } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options <b>rib</b> <i>routing-table-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Configure generated routes, which are used as routes of last resort.
<b>Options</b>	<p><b>defaults</b>—(Optional) Specify global generated route options. These options only set default attributes inherited by all newly created generated routes. These are treated as global defaults and apply to all the generated routes you configure in the <b>generate</b> statement.</p> <p><b>generate-options</b>—Additional information about generated routes, which is included with the route when it is installed in the routing table. Specify zero or more of the following options in <b>generate-options</b>. Each option is explained separately.</p> <ul style="list-style-type: none"> <li>• (<b>active</b>   <b>passive</b>);</li> <li>• <b>as-path</b> &lt;<i>as-path</i>&gt; &lt;origin (egp   igp   incomplete)&gt; &lt;atomic-aggregate&gt; &lt;aggregator <i>as-number in-address</i>&gt;;</li> <li>• (<b>brief</b>   <b>full</b>);</li> <li>• <b>community</b> [ <i>community-ids</i> ];</li> <li>• <b>discard</b>;</li> <li>• (<b>metric</b>   <b>metric2</b>   <b>metric3</b>   <b>metric4</b>) <i>value</i> &lt;type <i>type</i>&gt;;</li> <li>• (<b>preference</b>   <b>preference2</b>   <b>color</b>   <b>color2</b>) <i>preference</i> &lt;type <i>type</i>&gt;;</li> <li>• <b>tag</b> <i>metric type number</i>;</li> </ul> <p><b>route destination-prefix</b>—Configure a non-default generated route:</p>

- **default**—For the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.
- ***destination-prefix/prefix-length***—/***destination-prefix*** is the network portion of the IP address, and ***prefix-length*** is the destination prefix length.

The [policy](#) statement is explained separately.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.

## graceful-restart (Enabling Globally)

<b>Syntax</b>	<pre> graceful-restart {   disable;   helper-disable;   maximum-helper-recovery-time <i>seconds</i>;   maximum-helper-restart-time <i>seconds</i>;   notify-duration <i>seconds</i>;   recovery-time <i>seconds</i>;   restart-duration <i>seconds</i>;   stale-routes-time <i>seconds</i>; } </pre>
<b>Hierarchy Level</b>	<pre> [edit logical-systems <i>logical-system-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options], [edit routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options] </pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>You configure the graceful restart routing option globally to enable the feature, but not to enable graceful restart for all routing protocols in a routing instance. Because all routing protocols are not usually run on every routing instance, you must also configure graceful restart for individual routing protocols running on a routing instance, including the main routing instance. You can, optionally, modify the global settings at the individual protocol level.</p>
	<div>  <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>For VPNs, the <code>graceful-restart</code> statement allows a router whose VPN control plane is undergoing a restart to continue to forward traffic while recovering its state from neighboring routers.</li> <li>For BGP, if you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.</li> <li>LDP sessions flap when <code>graceful-restart</code> configurations change.</li> </ul> </div>
<b>Default</b>	Graceful restart is disabled by default.
<b>Options</b>	The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Enabling Graceful Restart*
- *Configuring Routing Protocols Graceful Restart*
- *Configuring Graceful Restart for MPLS-Related Protocols*
- *Configuring VPN Graceful Restart*
- *Configuring Logical System Graceful Restart*
- *Configuring Graceful Restart for QFabric Systems*

---

## import

---

**Syntax** `import [ policy-names ];`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options resolution [rib](#)],  
[edit logical-systems *logical-system-name* routing-options resolution [rib](#)],  
[edit routing-instances *routing-instance-name* routing-options resolution [rib](#)],  
[edit routing-options resolution [rib](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Specify one or more import policies to use for route resolution.

**Options** *policy-names*—Name of one or more import policies.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Configuring Route Resolution on PE Routers*



## import-policy

**Syntax** `import-policy [ policy-names ];`

**Hierarchy Level** `[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options rib-groups group-name],`  
`[edit logical-systems logical-system-name routing-options rib-groups group-name],`  
`[edit routing-instances routing-instance-name routing-options rib-groups group-name],`  
`[edit routing-options rib-groups group-name]`

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Apply one or more policies to routes imported into the routing table group. The **import-policy** statement complements the **import-rib** statement and cannot be used unless you first specify the routing tables to which routes are being imported.



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.

**Options** *policy-names*—Name of one or more policies.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Exporting Specific Routes from One Routing Table Into Another Routing Table*
- [export-rib on page 111](#)
- *passive*

## import-rib

**Syntax** `import-rib [ routing-table-names ];`

**Hierarchy Level** `[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options rib-groups group-name],`  
`[edit logical-systems logical-system-name routing-options rib-groups group-name],`  
`[edit routing-instances routing-instance-name routing-options rib-groups group-name],`  
`[edit routing-options rib-groups group-name]`

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Specify the name of the routing table into which Junos OS should import routing information. The first routing table name you enter is the primary routing table. Any additional names you enter identify secondary routing tables. When a protocol imports routes, it imports them into the primary and any secondary routing tables. If the primary route is deleted, the secondary route also is deleted. For IPv4 import routing tables, the primary routing table must be `inet.0` or `routing-instance-name.inet.0`. For IPv6 import routing tables, the primary routing table must be `inet6.0`.

In Junos OS Release 9.5 and later, you can configure an IPv4 import routing table that includes both IPv4 and IPv6 routing tables. Including both types of routing tables permits you, for example, to populate an IPv6 routing table with IPv6 addresses that are compatible with IPv4. In releases prior to Junos OS Release 9.5, you could configure an import routing table with only either IPv4 or IPv6 routing tables.



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.


**Options** `routing-table-names`—Name of one or more routing tables.

**Required Privilege Level** `routing`—To view this statement in the configuration.  
`routing-control`—To add this statement to the configuration.

**Related Documentation**

- *Example: Exporting Specific Routes from One Routing Table Into Another Routing Table*
- [export-rib on page 111](#)
- *passive*

## indirect-next-hop

<b>Syntax</b>	(indirect-next-hop   no-indirect-next-hop);
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options forwarding-table], [edit routing-options forwarding-table]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 14.1X53-D30 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Enable indirectly connected next hops for route convergence. This statement is implemented on the Packet Forward Engine to speed up forwarding information base (FIB) updates. Configuring this statement significantly speeds convergence times. The only downside of configuring this statement is that some additional FIB memory overhead is required. Unless routes have an extremely high number of next hops, this increased memory usage should not be noticeable.
<div>  <b>NOTE:</b> <ul style="list-style-type: none"> <li>When virtual private LAN service (VPLS) is configured on the routing device, the <b>indirect-next-hop</b> statement is configurable at the [edit routing-options forwarding-table] hierarchy level. However, this configuration is not applicable to indirect nexthops specific to VPLS routing instances.</li> <li>By default, the Junos Trio Modular Port Concentrator (MPC) chipset on MX Series routers is enabled with indirectly connected next hops, and this cannot be disabled using the <b>no-indirect-next-hop</b> statement.</li> <li>By default, indirectly connected next hops are enabled on PTX Series routers.</li> </ul> </div>	
<b>Default</b>	Disabled.
<b>Options</b>	<b>indirect-next-hop</b> —Enable indirectly connected next hops.  <b>no-indirect-next-hop</b> —Explicitly disable indirect next hops.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><i>Example: Optimizing Route Reconvergence by Enabling Indirect Next Hops on the Packet Forwarding Engine</i></li> </ul>

## install (Routing Options)

---

<b>Syntax</b>	(install   no-install);
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options rib <i>routing-table-name</i> static (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static   (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options static (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static   (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)], [edit routing-options rib <i>routing-table-name</i> static (defaults   route)] [edit routing-options static (defaults   route)]</pre>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Configure whether Junos OS installs all static routes into the forwarding table. Even if you configure a route so it is not installed in the forwarding table, the route is still eligible to be exported from the routing table to other protocols.
<b>Options</b>	<p><b>install</b>—Explicitly install all static routes into the forwarding table. Include this statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>no-install</b> option specified in the <b>defaults</b> portion of the statement.</p> <p><b>no-install</b>—Do not install the route into the forwarding table, even if it is the route with the lowest preference.</p> <p><b>Default:</b> install</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li><i>static</i></li></ul>

## instance-export

---

<b>Syntax</b>	<code>instance-export [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Apply one or more policies to routes being exported from a routing instance.
<b>Options</b>	<i>policy-names</i> —Name of one or more export policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Routing Policies, Firewall Filters, and Traffic Policers Feature Guide</i></li> </ul>

## instance-import

---

<b>Syntax</b>	<code>instance-import [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Apply one or more policies to routes being imported into a routing instance.
<b>Options</b>	<i>policy-names</i> —Name of one or more import policies.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Routing Policies, Firewall Filters, and Traffic Policers Feature Guide</i></li> </ul>

## instance-type

---

<b>Syntax</b>	instance-type virtual-router
<b>Hierarchy Level</b>	[edit <a href="#">routing-instances</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Specify the type of routing instance.
<b>Options</b>	<b>virtual-router</b> —Virtual router routing instance.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Using Virtual Routing Instances to Route Among VLANs on EX Series Switches</i></li><li>• <i>Configuring Virtual Routing Instances (CLI Procedure)</i></li><li>• <a href="#">Configuring Virtual Router Routing Instances on page 26</a></li></ul>

## interface (Multicast Static Routes)

<b>Syntax</b>	<pre> interface <i>interface-names</i> {     disable;     maximum-bandwidth <i>bps</i>;     no-qos-adjust;     reverse-oif-mapping {         no-qos-adjust;     }     subscriber-leave-timer <i>seconds</i>; } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>multicast</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>multicast</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>multicast</b>],</p> <p>[edit routing-options <b>multicast</b>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Enable multicast traffic on an interface.</p> <p>By default, multicast packets are forwarded by enabling Protocol Independent Multicast (PIM) on an interface. PIM adds multicast routes into the routing table.</p> <p>You can also configure multicast packets to be forwarded over a static route, such as a static route associated with an LSP next hop. Multicast packets are accepted on an interface and forwarded over a static route in the forwarding table. This is useful when you want to enable multicast traffic on a specific interface without configuring PIM on the interface.</p> <p>You cannot enable multicast traffic on an interface and configure PIM on the same interface simultaneously.</p> <p>Static routes must be configured before you can enable multicast on an interface. Configuring the <b>interface</b> statement alone does not install any routes into the routing table. This feature relies on the static route configuration.</p>
<b>Options</b>	<p><b><i>interface-names</i></b>—Name of one or more interfaces on which to enable multicast traffic.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

- Related Documentation**
- [Example: Defining Interface Bandwidth Maximums](#)
  - [Example: Configuring Multicast with Subscriber VLANs](#)

## interface (Routing Instances)

---

**Syntax** `interface interface-name;`

**Hierarchy Level** [edit [routing-instances](#)]

**Release Information** Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** For virtual router routing instances, configure an interface.



**NOTE:**

- You must configure only interfaces from the Node devices assigned to the network Node group. If you try to configure interfaces from the Node devices assigned to server Node groups, the configuration does not commit.
  - You can configure an interface for one routing instance only.
- 

**Options** *interface-name*—Name of an interface.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring Virtual Router Routing Instances on page 26](#)



## interface (Routing Options)

**Syntax** `interface interface-names {  
     maximum-bandwidth bps;  
     no-qos-adjust;  
     reverse-oif-mapping {  
         no-qos-adjust;  
     }  
     subscriber-leave-timer seconds;  
 }`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast],  
 [edit logical-systems *logical-system-name* routing-options multicast],  
 [edit routing-instances *routing-instance-name* routing-options multicast],  
 [edit routing-options multicast]

**Release Information** Statement introduced in Junos OS Release 8.3.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Enable multicast traffic on an interface.



**TIP:** You cannot enable multicast traffic on an interface by using the `routing-options multicast interface` statement and configure PIM on the interface.

**Options** *interface-name*—Names of the physical or logical interface.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
 routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Defining Interface Bandwidth Maximums*
- *Example: Configuring Multicast with Subscriber VLANs*

## interface-routes

**Syntax**

```
interface-routes {
    family (inet | inet6) {
        export {
            lan;
            point-to-point;
        }
    }
    rib-group group-name;
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.

**Description** Associate a routing table group with the routing device's interfaces, and specify routing table groups into which interface routes are imported.

By default, IPv4 interface routes (also called direct routes) are imported into routing table **inet.0**, and IPv6 interface routes are imported into routing table **inet6.0**. If you are configuring alternate routing tables for use by some routing protocols, it might be necessary to import the interface routes into the alternate routing tables. To define the routing tables into which interface routes are imported, you create a routing table group and associate it with the routing device's interfaces.

To create the routing table groups, include the **passive** statement at the [edit routing-options] hierarchy level.

If you have configured a routing table, configure the OSPF primary instance at the [edit protocols ospf] hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group.

To export local routes, include the **export** statement.

To export LAN routes, include the **lan** option. To export point-to-point routes, include the **point-to-point** option.

Only local routes on point-to-point interfaces configured with a destination address are exportable.

- Options**
- inet**—Specify the IPv4 address family.
  - inet6**—Specify the IPv6 address family.
  - lan**—Export LAN routes.
  - point-to-point**—Export point-to-point routes.

The remaining statements are explained separately. See [CLI Explorer](#).

- Required Privilege Level**
- routing—To view this statement in the configuration.
  - routing-control—To add this statement to the configuration.

- Related Documentation**
- *Example: Importing Direct and Static Routes Into a Routing Instance*
  - *Example: Configuring Multiple Routing Instances of OSPF*
  - *passive*

## local-address (Routing Options)

---

<b>Syntax</b>	<code>local-address <i>address</i>;</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>backup-pe-group</b> <i>group-name</i>],</code> <code>[edit routing-options multicast <b>backup-pe-group</b> <i>group-name</i>]</code>
<b>Release Information</b>	Statement introduced in Junos OS Release 9.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement added to the multicast hierarchy in Junos OS Release 13.2.
<b>Description</b>	Configure the address of the local PE for ingress PE redundancy when point-to-multipoint LSPs are used for multicast distribution.
<b>Options</b>	<b><i>address</i></b> —Address of local PEs in the backup group.
<b>Required Privilege Level</b>	<code>routing</code> —To view this statement in the configuration. <code>routing-control</code> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring Ingress PE Redundancy</i></li></ul>

## martians

<b>Syntax</b>	<pre>martians {     destination-prefix match-type &lt;allow&gt;; }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options <b>rib</b> <i>routing-table-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Configure martian addresses.
<b>Options</b>	<p><b>allow</b>—(Optional) Explicitly allow a subset of a range of addresses that has been disallowed. The <b>allow</b> option is the only supported action.</p> <p><b>destination-prefix</b>—Destination route you are configuring:</p> <ul style="list-style-type: none"> <li><b>destination-prefix/prefix-length</b>—<b>destination-prefix</b> is the network portion of the IP address, and <b>prefix-length</b> is the destination prefix length.</li> <li><b>default</b>—Default route to use when routing packets do not match a network or host in the routing table. This is equivalent to specifying the IP address <b>0.0.0.0/0</b>.</li> </ul> <p><b>match-type</b>—Criteria that the destination must match:</p> <ul style="list-style-type: none"> <li><b>exact</b>—Exactly match the route's mask length.</li> <li><b>longer</b>—The route's mask length is greater than the specified mask length.</li> <li><b>orlonger</b>—The route's mask length is equal to or greater than the specified mask length.</li> <li><b>through destination-prefix</b>—The route matches the first prefix, the route matches the second prefix for the number of bits in the route, and the number of bits in the route is less than or equal to the number of bits in the second prefix.</li> <li><b>upto prefix-length</b>—The route's mask length falls between the two destination prefix lengths, inclusive.</li> </ul>

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Configuring Class E Martian Addresses for Routing*

---

## maximum-bandwidth

---

**Syntax** maximum-bandwidth *bps*;

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast [interface interface-name](#)],  
[edit logical-systems *logical-system-name* routing-options multicast [interface interface-name](#)],  
[edit routing-instances *routing-instance-name* routing-options multicast [interface interface-name](#)],  
[edit routing-options multicast [interface interface-name](#)]

**Release Information** Statement introduced in Junos OS Release 8.3.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure the multicast bandwidth for the interface.

**Options** *bps*—Bandwidth rate, in bits per second, for the multicast interface.  
**Range:** 0 through any amount of bandwidth

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Defining Interface Bandwidth Maximums*

## maximum-paths

<b>Syntax</b>	<code>maximum-paths <i>path-limit</i> &lt;log-interval <i>seconds</i>&gt; &lt;log-only   threshold <i>value</i>&gt;;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Configure a limit for the number of routes installed in a routing table based upon the route path.



**NOTE:** The `maximum-paths` statement is similar to the `maximum-prefixes` statement. The `maximum-prefixes` statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:

```
OSPF 10.10.10.0/24
ISIS 10.10.10.0/24
```

These are two routes, but only one destination (prefix). The `maximum-paths` limit applies the total number of routes (two). The `maximum-prefixes` limit applies to the total number of unique prefixes (one).

<b>Options</b>	<b>log-interval <i>seconds</i></b> —(Optional) Minimum time interval (in seconds) between log messages. <b>Range:</b> 5 through 86,400
	<b>log-only</b> —(Optional) Sets the route limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.
	<b><i>path-limit</i></b> —Maximum number of routes. If this limit is reached, a warning is triggered and additional routes are rejected. <b>Range:</b> 1 through 4,294,967,295 ( $2^{32} - 1$ ) <b>Default:</b> No default
	<b>threshold <i>value</i></b> —(Optional) Percentage of the maximum number of routes that starts triggering a warning. You can configure a percentage of the <b><i>path-limit</i></b> value that starts triggering the warnings. <b>Range:</b> 1 through 100



**NOTE:** When the number of routes reaches the threshold value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the *path-limit* value, then additional routes are rejected.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Limiting the Number of Paths and Prefixes Accepted from CE Routers in Layer 3 VPNs*



## maximum-prefixes

**Syntax** `maximum-prefixes prefix-limit <log-interval seconds> <log-only | threshold percentage>;`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced in Junos OS Release 8.0.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure a limit for the number of routes installed in a routing table based upon the route prefix.

Using a prefix limit, you can curtail the number of prefixes received from a CE router in a VPN. Prefix limits apply only to dynamic routing protocols and are not applicable to static or interface routes.



**NOTE:** The `maximum-prefixes` statement is similar to the `maximum-paths` statement. The `maximum-prefixes` statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:

```
OSPF 10.10.10.0/24
ISIS 10.10.10.0/24
```

These are two routes, but only one destination (prefix). The `maximum-paths` limit applies the total number of routes (two). The `maximum-prefixes` limit applies to the total number of unique prefixes (one).

**Options** `log-interval seconds`—(Optional) Minimum time interval (in seconds) between log messages.

**Range:** 5 through 86,400

`log-only`—(Optional) Sets the prefix limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.

`prefix-limit`—Maximum number of route prefixes. If this limit is reached, a warning is triggered and any additional routes are rejected.

**Range:** 1 through 4,294,967,295

**Default:** No default

**threshold value**—(Optional) Percentage of the maximum number of prefixes that starts triggering a warning. You can configure a percentage of the *prefix-limit* value that starts triggering the warnings.

**Range:** 1 through 100



**NOTE:** When the number of routes reaches the threshold value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the *prefix-limit* value, then additional routes are rejected.

---

<b>Required Privilege</b>	routing—To view this statement in the configuration.
<b>Level</b>	routing-control—To add this statement to the configuration.

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Limiting the Number of Paths and Prefixes Accepted from CE Routers in Layer 3 VPNs</i></li></ul>
------------------------------	---

## med-igp-update-interval

<b>Syntax</b>	<code>med-igp-update-interval <i>minutes</i>;</code>
<b>Hierarchy Level</b>	[edit routing-options]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.0</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Configure a timer for how long to delay updates for the multiple exit discriminator (MED) path attribute for BGP groups and peers configured with the <b>metric-out igp offset delay-med-update</b> statement. The timer delays MED updates for the interval configured unless the MED is lower than the previously advertised attribute or another attribute associated with the route has changed or if the BGP peer is responding to a refresh route request.</p>
<b>Options</b>	<p><b><i>minutes</i></b>—Interval to delay MED updates.</p> <p><b>Range:</b> 10 through 600</p> <p><b>Default:</b> 10 minutes</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates</i></li> <li>• <i>metric-out</i></li> </ul>

## metric (Aggregate, Generated, or Static Route)

<b>Syntax</b>	(metric   metric2   metric3   metric4) <i>metric</i> <type <i>type</i> >;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options ( <a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)], [edit routing-options ( <a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Specify the metric value for an aggregate, generated, or static route. You can specify up to four metric values, starting with <b>metric</b> (for the first metric value) and continuing with <b>metric2</b> , <b>metric3</b> , and <b>metric4</b> .
<b>Options</b>	<b>metric</b> —Metric value. <b>Range:</b> 0 through 4,294,967,295 ( $2^{32} - 1$ ) <b>type type</b> —(Optional) Type of route.  When routes are exported to OSPF, type 1 routes are advertised in type 1 externals, and routes of any other type are advertised in type 2 externals. Note that if a qualified-next-hop metric value is configured, this value overrides the route metric. <b>Range:</b> 1 through 16
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">aggregate on page 84</a></li> <li><a href="#">generate on page 125</a></li> <li><i>static</i></li> <li><i>Example: Summarizing Static Routes Through Route Aggregation</i></li> <li><i>Understanding Route Aggregation</i></li> </ul>

## multicast (Routing Options)

<b>Syntax</b>	<pre> multicast {   forwarding-cache {     threshold suppress value &lt;reuse value&gt;;   }   interface interface-name {     enable;   }   local-address address   scope scope-name {     interface [ interface-names ];     prefix destination-prefix;   }   ssm-groups {     address;   } } </pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	Configure generic multicast properties.



**NOTE:** You cannot apply a scoping policy to a specific routing instance. All scoping policies are applied to all routing instances. However, you can apply the `scope` statement to a specific routing instance.

The remaining statements are explained separately. See [CLI Explorer](#).

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Examples: Configuring Administrative Scoping</i></li> <li>• <i>Example: Configuring Source-Specific Multicast Groups with Any-Source Override</i></li> <li>• <i>Examples: Configuring the Multicast Forwarding Cache</i></li> <li>• <i>Multicast Protocols Feature Guide</i></li> </ul>
------------------------------	---

- ([indirect-next-hop on page 131](#) | no-indirect-next-hop)

## nd-system-cache-limit

---

<b>Syntax</b>	nd-system-cache-limit <i>number</i> ;
<b>Hierarchy Level</b>	[edit system]
<b>Release Information</b>	Statement introduced in Junos OS Release 15.1.
<b>Description</b>	Specify the maximum system cache size for IPv6 next-hop addresses. This limit enforces a systemwide cap on the neighbor discovery cache entries for all interfaces, including the loopback interface for the internal routing instance, management interfaces, and the public interfaces.
<b>Default</b>	100,000
<b>Options</b>	<i>number</i> —Maximum system cache size for IPv6 next-hop addresses. <b>Range:</b> 200 through 2,000,000
<b>Required Privilege Level</b>	admin—To view this statement in the configuration. admin-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring Neighbor Discovery Cache Protection to Prevent Denial-of-Service Attacks</i></li><li>• <a href="#">nd6-max-cache on page 151</a></li><li>• <a href="#">nd6-new-hold-limit on page 152</a></li></ul>

## nd6-max-cache

---

<b>Syntax</b>	<code>nd6-max-cache <i>nd6-max-cache</i>;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6]
<b>Release Information</b>	Statement introduced in Junos OS Release 15.1.
<b>Description</b>	Specify the maximum number of entries that can be added to the Neighbor Discovery Protocol (NDP) IPv6 neighbor discovery cache for an interface. When this maximum is reached, no new entries are allowed.
<b>Default</b>	<ul style="list-style-type: none"> <li>• 100,000 for M Series.</li> <li>• 75,000 for MX Series and QFX Series.</li> <li>• 20,000 for EX Series.</li> </ul>
<b>Options</b>	<p><b><i>nd6-max-cache</i></b>—Maximum size of the neighbor discovery next-hop cache for an interface.</p> <p><b>Range:</b> 1 through 2,000,000 for MX Series or QFX Series.</p> <p><b>Range:</b> 1 through 700,000 for M Series.</p>
<b>Required Privilege Level</b>	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Neighbor Discovery Cache Protection on page 71</a></li> <li>• <a href="#">Example: Configuring Neighbor Discovery Cache Protection to Prevent Denial-of-Service Attacks</a></li> <li>• <a href="#">IPv6 Neighbor Discovery Overview on page 59</a></li> <li>• <a href="#">nd6-new-hold-limit on page 152</a></li> <li>• <a href="#">nd-system-cache-limit on page 150</a></li> </ul>

## nd6-new-hold-limit

---

<b>Syntax</b>	<code>nd6-new-hold-limit <i>nd6-new-hold-limit</i>;</code>
<b>Hierarchy Level</b>	[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family inet6]
<b>Release Information</b>	Statement introduced in Junos OS Release 15.1.
<b>Description</b>	Specify the maximum number of entries for unresolved next-hop addresses that can be added to the Neighbor Discovery Protocol (NDP) IPv6 neighbor discovery cache for an interface.
<b>Default</b>	<ul style="list-style-type: none"><li>• 100,000 for M Series.</li><li>• 75,000 for MX Series and QFX Series.</li><li>• 20,000 for EX Series.</li></ul>
<b>Options</b>	<b><i>nd6-new-hold-limit</i></b> —Maximum number of new unresolved next-hop addresses that can be added to the IPv6 neighbor discovery cache. <b>Range:</b> 1 through 2,000,000
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Neighbor Discovery Cache Protection on page 71</a></li><li>• <i>Example: Configuring Neighbor Discovery Cache Protection to Prevent Denial-of-Service Attacks</i></li><li>• <a href="#">IPv6 Neighbor Discovery Overview on page 59</a></li><li>• <a href="#">nd-system-cache-limit on page 150</a></li><li>• <a href="#">nd6-max-cache on page 151</a></li><li>• <i>nd6-stale-time</i></li></ul>



## no-qos-adjust

<b>Syntax</b>	no-qos-adjust;
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i> <b>reverse-oif-mapping</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>interface</b> <i>interface-name</i> <b>reverse-oif-mapping</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i> <b>reverse-oif-mapping</b>],</p> <p>[edit routing-options multicast <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-options multicast <b>interface</b> <i>interface-name</i> <b>reverse-oif-mapping</b>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.5.</p> <p>Statement introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Statement added to [edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>], and [edit routing-options multicast <b>interface</b> <i>interface-name</i>] hierarchy levels in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Disable hierarchical bandwidth adjustment for all subscriber interfaces that are identified by their MLD or IGMP request from a specific multicast interface.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring Multicast with Subscriber VLANs</i></li> </ul>

## options (Routing Options)

---

<b>Syntax</b>	<pre>options {     syslog (level <i>level</i>   upto level <i>level</i>); }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Configure the types of system logging messages sent about the routing protocols process to the system message logging file. These messages are also displayed on the system console. You can log messages at a particular level, or up to and including a particular level.
<b>Options</b>	<p><b>level <i>level</i></b>—Severity of the message. It can be one or more of the following levels, in order of decreasing urgency:</p> <ul style="list-style-type: none"><li>• <b>alert</b>—Conditions that should be corrected immediately, such as a corrupted system database.</li><li>• <b>critical</b>—Critical conditions, such as hard drive errors.</li><li>• <b>debug</b>—Software debugging messages.</li><li>• <b>emergency</b>—Panic or other conditions that cause the system to become unusable.</li><li>• <b>error</b>—Standard error conditions.</li><li>• <b>info</b>—Informational messages.</li><li>• <b>notice</b>—Conditions that are not error conditions, but might warrant special handling.</li><li>• <b>warning</b>—System warning messages.</li></ul> <p><b>upto level <i>level</i></b>—Log all messages up to a particular level.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <b>syslog</b> in the <i>Junos OS Administration Library</i></li></ul>

## pim-to-igmp-proxy

---

<b>Syntax</b>	<code>pim-to-igmp-proxy {     upstream-interface [ interface-names ]; }</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-options multicast]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6. Statement introduced in Junos OS Release 9.6 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series.
<b>Description</b>	<p>Configure the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain to translate PIM join or prune messages into corresponding Internet Group Management Protocol (IGMP) report or leave messages. The routing device then transmits the report or leave messages by proxying them to one or two upstream interfaces that you configure on the RP routing device. Including the <b>pim-to-igmp-proxy</b> statement enables you to use IGMP to forward IPv4 multicast traffic across the PIM sparse mode domains.</p> <p>The <b>pim-to-igmp-proxy</b> statement is not supported for routing instances.</p> <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring PIM-to-IGMP Message Translation</i></li> </ul>

## pim-to-mld-proxy

---

<b>Syntax</b>	<pre>pim-to-mld-proxy {     upstream-interface [ interface-names ]; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.6. Statement introduced in Junos OS Release 9.6 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	<p>Configure the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain to translate PIM join or prune messages into corresponding Multicast Listener Discovery (MLD) report or leave messages. The routing device then transmits the report or leave messages by proxying them to one or two upstream interfaces that you configure on the RP routing device. Including the <b>pim-to-mld-proxy</b> statement enables you to use MLD to forward IPv6 multicast traffic across the PIM sparse mode domains.</p> <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring PIM-to-MLD Message Translation</i></li></ul>

## policy (Aggregate and Generated Routes)

**Syntax** `policy policy-name;`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-instances *routing-instance-name* routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-options (**aggregate** | **generate**) (defaults | route)],  
 [edit routing-options rib *routing-table-name* (**aggregate** | **generate**) (defaults | route)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.  
 Statement introduced in Junos OS Release 12.3 for ACX Series routers.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Associate a routing policy when configuring an aggregate or generated route's destination prefix in the **routes** part of the **aggregate** or **generate** statement. This provides the equivalent of an import routing policy filter for the destination prefix. That is, each potential contributor to an aggregate route, along with any aggregate options, is passed through the policy filter. The policy then can accept or reject the route as a contributor to the aggregate route.

If the contributor is accepted, the policy can modify the default preferences. The contributor with the numerically smallest prefix becomes the most preferred, or *primary*, contributor. A rejected contributor still can contribute to a less specific aggregate route. If you do not specify a policy filter, all candidate routes contribute to an aggregate route.

The following algorithm is used to compare two generated contributing routes in order to determine which one is the primary or preferred contributor:

1. Compare the protocol's **preference** of the contributing routes. The lower the preference, the better the route. This is similar to the comparison that is done while determining the best route for the routing table.
2. Compare the protocol's **preference2** of the contributing routes. The lower **preference2** value is better. If only one route has **preference2**, then this route is preferred.
3. The preference values are the same. Proceed with a numerical comparison of the prefixes' values.
  - a. The primary contributor is the numerically smallest prefix value.

- b. If the two prefixes are numerically equal, the primary contributor is the route that has the smallest prefix length value.

At this point, the two routes are the same. The primary contributor does not change. An additional next hop is available for the existing primary contributor.

A rejected contributor still can contribute to less specific generated route. If you do not specify a policy filter, all candidate routes contribute to a generated route.

**Options** *policy-name*—Name of a routing policy.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Summarizing Static Routes Through Route Aggregation*
- [aggregate on page 84](#)
- [generate on page 125](#)

---

## policy (Flow Maps)

---

**Syntax** policy [ *policy-names* ];

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast [flow-map](#) *flow-map-name*],  
[edit logical-systems *logical-system-name* routing-options multicast [flow-map](#) *flow-map-name*],  
[edit routing-instances *routing-instance-name* routing-options multicast [flow-map](#) *flow-map-name*],  
[edit routing-options multicast [flow-map](#) *flow-map-name*]

**Release Information** Statement introduced in Junos OS Release 8.2.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure a flow map policy.

**Options** *policy-names*—Name of one or more policies for flow mapping.

**Required Privilege Level** routing—To view this statement in the configuration.

## policy-options

```
Syntax  policy-options
        application-maps application-map-name {
            application application-name {
                code-points [ aliases ] [ bit-patterns ];
            }
        }
        policy-statement policy-name {
            term term-name {
                from {
                    family family-name;
                    match-conditions;
                    policy subroutine-policy-name;
                    prefix-list prefix-list-name;
                    prefix-list-filter prefix-list-name match-type <actions>;
                    route-filter destination-prefix match-type <actions>;
                    source-address-filter source-prefix match-type <actions>;
                }
                to {
                    match-conditions;
                    policy subroutine-policy-name;
                }
                then actions;
            }
        }
    }
```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 12.1 for the QFX Series.  
Statement introduced in Junos OS Release 12.1 for the EX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure options such as application maps for DCBX application protocol exchange and policy statements.

**Required Privilege Level** storage—To view this statement in the configuration.  
storage-control—To add this statement to the configuration.

**Related Documentation**

- *Defining an Application for DCBX Application Protocol TLV Exchange*
- *Example: Configuring DCBX Application Protocol TLV Exchange*
- *Example: Configuring DCBX to Support an iSCSI Application*
- *Understanding DCBX Application Protocol TLV Exchange*
- *Understanding DCBX Application Protocol TLV Exchange on EX Series Switches*

## policy-statement

```
Syntax  policy-statement policy-name {
        term term-name {
            from {
                as-path-unique-count count (equal | orhigher | orlower);
                family family-name;
                match-conditions;
                policy subroutine-policy-name;
                prefix-list prefix-list-name;
                prefix-list-filter prefix-list-name match-type <actions>;
                protocol protocol-name;
                route-filter destination-prefix match-type <actions>;
                source-address-filter source-prefix match-type <actions>;
                tag value;
                traffic-engineering;
            }
            to {
                match-conditions;
                policy subroutine-policy-name;
            }
            then actions;
        }
    then {
        aggregate-bandwidth;
        dynamic-tunnel-attributes dynamic-tunnel-attributes;
        limit-bandwidth limit-bandwidth;
        multipath-resolve multipath-resolve;
        no-entropy-label-capability;
        prefix-segment {
            index index;
            node-segment;
        }
        priority (high | medium | low);
    }
}
```

**Hierarchy Level** [edit dynamic-profiles *profile-name* policy-options],  
[edit logical-systems *logical-system-name* policy-options],  
[edit policy-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Support for configuration in the dynamic database introduced in Junos OS Release 9.5.  
Support for configuration in the dynamic database introduced in Junos OS Release 9.5 for EX Series switches.  
**inet-mdt** option introduced in Junos OS Release 10.0R2.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
**route-target** option introduced in Junos OS Release 12.2.  
Statement introduced in Junos OS 14.1X53-D20 for the OCX Series.  
**protocol** and **traffic-engineering** options introduced in Junos OS Release 14.2.  
**no-entropy-label-capability** option introduced in Junos OS Release 15.1.



**priority** and **tag value** options introduced in Junos OS Release 17.1.

**as-path-unique-count** option introduced in Junos OS Release 17.2R1.

**prefix-segment** option introduced in Junos OS Release 17.2R1 for MX Series routers, PTX Series routers, QFX5100 switches, and QFX10000 switches.

**multipath-resolve** and **dynamic-tunnel-attributes** options introduced in Junos OS Release 17.3R1.

**aggregate-bandwidth** and **limit-bandwidth** *limit-bandwidth* options introduced in Junos OS Release 17.4R1 for MX Series, PTX Series, and QFX Series.

**Description** Define a routing policy, including subroutine policies.

A *term* is a named structure in which match conditions and actions are defined. Routing policies are made up of one or more terms. Each routing policy term is identified by a term name. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose the entire name in double quotation marks.

Each term contains a set of match conditions and a set of actions:

- Match conditions are criteria that a route must match before the actions can be applied. If a route matches all criteria, one or more actions are applied to the route.
- Actions specify whether to accept or reject the route, control how a series of policies are evaluated, and manipulate the characteristics associated with a route.

Generally, a router compares a route against the match conditions of each term in a routing policy, starting with the first and moving through the terms in the order in which they are defined, until a match is made and an explicitly configured or default action of **accept** or **reject** is taken. If none of the terms in the policy match the route, the router compares the route against the next policy, and so on, until either an action is taken or the default policy is evaluated.

If none of the match conditions of each term evaluates to true, the final action is executed. The final action is defined in an unnamed term. Additionally, you can define a default action (either **accept** or **reject**) that overrides any action intrinsic to the protocol.

The order of match conditions in a term is not relevant, because a route must match all match conditions in a term for an action to be taken.

To list the routing policies under the **[edit policy-options]** hierarchy level by **policy-statement** *policy-name* in alphabetical order, enter the **show policy-options** configuration command.

The statements are explained separately.

**Options** *actions*—(Optional) One or more actions to take if the conditions match. The actions are described in *Configuring Flow Control Actions*.

**family** *family-name*—(Optional) Specify an address family protocol. Specify **inet** for IPv4. Specify **inet6** for 128-bit IPv6, and to enable interpretation of IPv6 router filter addresses. For IS-IS traffic, specify **iso**. For IPv4 multicast VPN traffic, specify **inet-mvpn**. For IPv6 multicast VPN traffic, specify **inet6-mvpn**. For multicast-distribution-tree (MDT) IPv4 traffic, specify **inet-mdt**. For BGP route target VPN traffic, specify **route-target**. For traffic engineering, specify **traffic-engineering**.



**NOTE:** When family is not specified, the routing device or routing instance uses the address family or families carried by BGP. If multiprotocol BGP (MP-BGP) is enabled, the policy defaults to the protocol family or families carried in the network layer reachability information (NLRI) as configured in the *family* statement for BGP. If MP-BGP is not enabled, the policy uses the default BGP address family unicast IPv4.

**from**—(Optional) Match a route based on its source address.

**as-path-unique-count** *count (equal | orhigher | orlower)*—(Optional) Specify a number from 0 through 1024 to filter routes based on the number of unique autonomous systems (ASs) in the AS path. Specify the match condition for the unique AS path count.

**aggregate-bandwidth**—(Optional) Enable BGP to advertise aggregate outbound link bandwidth for load balancing.

**dynamic-tunnel-attributes** *dynamic-tunnel-attributes*—(Optional) Choose a set of defined dynamic tunnel attributes for forwarding traffic over V4oV6 tunnels.

**match-conditions**—(Optional in **from** statement; required in **to** statement) One or more conditions to use to make a match. The qualifiers are described in *Routing Policy Match Conditions*.

**multipath-resolve** *multipath-resolve*—(Optional) Enable the use of all paths for resolution over the specified prefix.

**limit-bandwidth** *limit-bandwidth*—(Optional) Specify the limit for advertised aggregate outbound link bandwidth for load balancing.

**Range:** 0 through 4,294,967,295 bytes

**no-entropy-label-capability**—(Optional) Disable the entropy label capability advertisement at egress or transit routes specified in the policy.

**priority** (*high | medium | low*)—(Optional) Configure the priority for an IS-IS route to change the default order in which the routes are installed in the routing table, in the event of a network topology change.

**policy-subroutine-policy-name**—Use another policy as a match condition within this policy. The name identifying the subroutine policy can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" "). Policy names cannot take the form **\_\_.\*-internal\_\_**, as this form is reserved. For information about how to configure subroutines, see *Understanding Policy Subroutines in Routing Policy Match Conditions*.

**policy-name**—Name that identifies the policy. The name can contain letters, numbers, and hyphens (-) and can be up to 255 characters long. To include spaces in the name, enclose it in quotation marks (" ").

**prefix-list prefix-list-name**—Name of a list of IPv4 or IPv6 prefixes.

**prefix-list-filter prefix-list-name**—Name of a prefix list to evaluate using qualifiers; **match-type** is the type of match (see *Configuring Prefix List Filters*), and **actions** is the action to take if the prefixes match.

**protocol-protocol-name**—Name of the protocol used to control traffic engineering database import at the originating point.

**route-filter destination-prefix match-type <actions>**—(Optional) List of routes on which to perform an immediate match; **destination-prefix** is the IPv4 or IPv6 route prefix to match, **match-type** is the type of match (see *Configuring Route Lists*), and **actions** is the action to take if the **destination-prefix** matches.

**source-address-filter source-prefix match-type <actions>**—(Optional) Unicast source addresses in multiprotocol BGP (MBGP) and Multicast Source Discovery Protocol (MSDP) environments on which to perform an immediate match. **source-prefix** is the IPv4 or IPv6 route prefix to match, **match-type** is the type of match (see *Configuring Route Lists*), and **actions** is the action to take if the **source-prefix** matches.

**tag value**—(Optional) A numeric value that identifies a route. You can tag certain routes to prioritize them over other routes. In the event of a network topology change, Junos OS updates these routes in the routing table before updating other routes with lower priority. You can also tag some routes to identify and reject them based on your requirement.

**term term-name**—Name that identifies the term. The term name must be unique in the policy. It can contain letters, numbers, and hyphens (-) and can be up to 64 characters long. To include spaces in the name, enclose the entire name in quotation marks (" "). A policy statement can include multiple terms. We recommend that you name all terms. However, you do have the option to include an unnamed term which must be the final term in the policy. To configure an unnamed term, omit the **term** statement when defining match conditions and actions.

**to**—(Optional) Match a route based on its destination address or the protocols into which the route is being advertised.

**then**—(Optional) Actions to take on matching routes. The actions are described in *Configuring Flow Control Actions* and *Configuring Actions That Manipulate Route Characteristics*.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>dynamic-db</i></li><li>• <i>Understanding Source Packet Routing in Networking (SPRING)</i></li></ul>

## ppm

<b>Syntax</b>	<pre>ppm {   no-delegate-processing; }</pre>
<b>Hierarchy Level</b>	[edit routing-options]
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.4.</p> <p>Statement introduced in Junos OS Release 10.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Statement introduced in Junos OS Releases 15.1X49-D10, 15.1X49-D20, 15.1X49-D30, 15.1X49-D35, 15.1X49-D40, 15.1X49-D45, and 15.1X49-D50 for the SRX Series.</p>
<b>Description</b>	<p>(M120, M320, MX Series, T Series, TX Matrix routers, M7i and M10i routers with Enhanced CFEB [CFEB-E], EX Series switches, and QFX Series only) Disable distributed periodic packet management (PPM) to the Packet Forwarding Engine (on routers), to access ports (on EX3200 and EX4200 switches, and QFX Series), or to line cards (on EX6200 and EX8200 switches).</p> <p>After you disable PPM, PPM processing continues to run on the Routing Engine.</p> <p>In Junos OS Release 8.2, PPM was moved from the Routing Engine to the Packet Forwarding Engine, access ports, or line cards. The <b>no-delegate-processing</b> statement disables the default behavior and restores the legacy behavior.</p>
<b>Default</b>	<p>Distributed PPM processing is enabled for all protocols that use PPM such as:</p> <ul style="list-style-type: none"> <li>• Bidirectional Forwarding Detection (BFD)</li> <li>• Connectivity Fault Management (CFM)</li> <li>• Link Aggregation Control Protocol (LACP)</li> <li>• Link Fault Management (LFM)</li> <li>• Real-time Performance Monitoring (RPM)</li> <li>• Spanning Tree Protocol (STP)</li> <li>• Synchronous Ethernet (SYNCE)</li> <li>• Virtual Router Redundancy Protocol (VRRP)</li> </ul>



**NOTE:** The protocols BFD and CFM are supported on SRX300, SRX320, SRX340, SRX345 and SRX1500 devices.

The protocol LACP is supported on SRX5400, SRX 5600, and SRX5800 devices.

<b>Options</b>	<b>no-delegate-processing</b> —Disable PPM to the Packet Forwarding Engine, access ports, or line cards. Distributed PPM is enabled by default.
	<b>redistribution-timer</b> — Ensures that link aggregation (and STP) work properly for the periodic packet management (PPM) daemons on the aggregation and satellite devices. A value of 120 is recommended for MXVC-ISSU.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration.
	routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Ensuring That Distributed ppm Is Not Disabled</i></li></ul>

---

## ppm (Ethernet Switching)

---

<b>Syntax</b>	ppm { <a href="#">centralized</a> ; }
<b>Hierarchy Level</b>	[edit protocols lacp]
<b>Release Information</b>	Statement introduced in Junos OS Release 9.4 for MX Series routers. Statement introduced in Junos OS Release 10.2 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.1 for T Series devices. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Configure PPM processing options for Link Aggregation Control Protocol (LACP) packets.  This command configures the PPM processing options for LACP packets only. You can disable distributed PPM processing for all packets that use PPM and run all PPM processing on the Routing Engine by configuring the <b>no-delegate-processing</b> configuration statement in the <b>[edit routing-options ppm]</b> statement hierarchy.
<b>Default</b>	Distributed PPM processing is enabled for all packets that use PPM.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</i></li><li>• <a href="#">Configuring Distributed Periodic Packet Management on page 28</a></li></ul>

## preference (Routing Options)

<b>Syntax</b>	<pre> preference {     metric-value;     &lt;type metric_type&gt; } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Preference value for a static, aggregate, or generated route. You also can specify a secondary preference value, as well as color values, which are even finer-grained preference values.</p> <p>You can specify a primary route preference (by including the <b>preference</b> statement in the configuration), and a secondary preference that is used as a tiebreaker (by including the <b>preference2</b> statement). You can also mark route preferences with additional route tiebreaker information by specifying a color and a tiebreaker color (by including the <b>color</b> and <b>color2</b> statements in the configuration).</p> <p>If the Junos OS routing table contains a dynamic route to a destination that has a better (lower) preference value than the static, aggregate, or generated route, the dynamic route is chosen as the active route and is installed in the forwarding table.</p>
<b>Options</b>	<p><b>metric_value</b>—The metric value for an aggregate, a generated, or a static route to determine the best route among multiple routes to a destination</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 5 (for static routes), 130 (for aggregate and generated routes)</p> <p><b>type metric_type</b>—(Optional) External metric type for routes exported by OSPF. When routes are exported to OSPF, type 1 routes are advertised in type 1 externals, and</p>

routes of any other type are advertised in type 2 externals. Note that if a qualified-next-hop metric value is configured, this value overrides the route metric.

**Range:** 1 through 16

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Summarizing Static Routes Through Route Aggregation*
- [aggregate on page 84](#)
- [generate on page 125](#)
- *static*
- *color*

---

## prefix

**Syntax** `prefix destination-prefix;`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast [scope scope-name](#)],  
[edit logical-systems *logical-system-name* routing-options multicast [scope scope-name](#)],  
[edit routing-instances *routing-instance-name* routing-options multicast [scope scope-name](#)],  
[edit routing-options multicast [scope scope-name](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 12.3 for ACX Series routers.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure the prefix for multicast scopes.

**Options** *destination-prefix*—Address range for the multicast scope.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Examples: Configuring Administrative Scoping*
- *Example: Creating a Named Scope for Multicast Scoping*
- *multicast*



## protocols

```

Syntax protocols {
    bgp {
        ... bgp-configuration ...
    }
    isis {
        ... isis-configuration ...
    }
    ldp {
        ... ldp-configuration ...
    }
    mpls {
        ... mpls-configuration ...
    }
    msdp {
        ... msdp-configuration ...
    }
    mstp {
        ... mstp-configuration ...
    }
    ospf {
        domain-id domain-id;
        domain-vpn-tag number;
        route-type-community (iana | vendor);
        traffic-engineering {
            <advertise-unnumbered-interfaces>;
            <credibility-protocol-preference>;
            ignore-lsp-metrics;
            multicast-rpf-routes;
            no-topology;
            shortcuts {
                lsp-metric-into-summary;
            }
        }
        ... ospf-configuration ...
    }
    ospf3 {
        domain-id domain-id;
        domain-vpn-tag number;
        route-type-community (iana | vendor);
        traffic-engineering {
            <advertise-unnumbered-interfaces>;
            <credibility-protocol-preference>;
            ignore-lsp-metrics;
            multicast-rpf-routes;
            no-topology;
            shortcuts {
                lsp-metric-into-summary;
            }
        }
        ... ospf3-configuration ...
    }
    pim {

```

```
    ... pim-configuration ...  
  }  
  rip {  
    ... rip-configuration ...  
  }  
  ripng {  
    ... ripng-configuration ...  
  }  
  rstp {  
    rstp-configuration;  
  }  
  rsvp {  
    ... rsvp-configuration ...  
  }  
  vstp {  
    vstp configuration;  
  }  
  vpls {  
    vpls configuration;  
  }  
}
```

<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> ], [edit routing-instances <i>routing-instance-name</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Support for RIPng introduced in Junos OS Release 9.0. Statement introduced in Junos OS Release 11.1 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. <b>mpls</b> and <b>rsvp</b> options added in Junos OS Release 15.1. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Specify the protocol for a routing instance. You can configure multiple instances of many protocol types. Not all protocols are supported on the switches. See the switch CLI.

<b>Options</b>	<b>bgp</b> —Specify BGP as the protocol for a routing instance.
	<b>isis</b> —Specify IS-IS as the protocol for a routing instance.
	<b>ldp</b> —Specify LDP as the protocol for a routing instance or for a virtual router instance.
	<b>l2vpn</b> —Specify Layer 2 VPN as the protocol for a routing instance.
	<b>mpls</b> —Specify MPLS as the protocol for a routing instance.
	<b>msdp</b> —Specify the Multicast Source Discovery Protocol (MSDP) for a routing instance.
	<b>mstp</b> —Specify the Multiple Spanning Tree Protocol (MSTP) for a virtual switch routing instance.
	<b>ospf</b> —Specify OSPF as the protocol for a routing instance.
	<b>ospf3</b> —Specify OSPF version 3 (OSPFv3) as the protocol for a routing instance.



**NOTE:** OSPFv3 supports the **no-forwarding**, **virtual-router**, and **vrf** routing instance types only.

	<b>pim</b> —Specify the Protocol Independent Multicast (PIM) protocol for a routing instance.
	<b>rip</b> —Specify RIP as the protocol for a routing instance.
	<b>ripng</b> —Specify RIP next generation (RIPng) as the protocol for a routing instance.
	<b>rstp</b> —Specify the Rapid Spanning Tree Protocol (RSTP) for a virtual switch routing instance.
	<b>rsvp</b> —Specify the RSVP for a routing instance.
	<b>vstp</b> —Specify the VLAN Spanning Tree Protocol (VSTP) for a virtual switch routing instance.
	<b>vpls</b> —Specify VPLS as the protocol for a routing instance.

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring Multiple Routing Instances of OSPF</i></li> </ul>
------------------------------	--

## qualified-next-hop (Static Routes)

**Syntax** `qualified-next-hop (address | interface-name) {  
     bfd-liveness-detection {  
         authentication {  
             algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 | meticulous-keyed-sha-1 |  
                 simple-password);  
             key-chain key-chain-name;  
             loose-check;  
         }  
         detection-time {  
             threshold milliseconds;  
         }  
         holddown-interval milliseconds;  
         minimum-interval milliseconds;  
         minimum-receive-interval milliseconds;  
         multiplier number;  
         no-adaptation;  
         transmit-interval {  
             minimum-interval milliseconds;  
             threshold milliseconds;  
         }  
         version (1 | automatic);  
     }  
     interface interface-name;  
     metric metric;  
     preference preference;  
}`

**Hierarchy Level** `[edit logical-systems logical-system-name routing-instances routing-instance-name  
     routing-options static route destination-prefix],  
     [edit logical-systems logical-system-name routing-options rib inet6.0 static route  
         destination-prefix],  
     [edit logical-systems logical-system-name routing-options static route destination-prefix],  
     [edit routing-instances routing-instance-name routing-options static route destination-prefix],  
     [edit routing-options rib inet6.0 static route destination-prefix],  
     [edit routing-options static route destination-prefix]`

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.  
 Statement introduced in Junos OS Release 12.3 for ACX Series routers.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure a static route with multiple possible next hops, each of which can have its own preference value, IGP metric that is used when the route is exported into an IGP, and Bidirectional Forwarding Detection (BFD) settings. If multiple links are operational, the one with the most preferred next hop is used. The most preferred next hop is the one with the lowest preference value.

**Options** *address*—IPv4, IPv6, or ISO network address of the next hop.

**interface-name**—Name of the interface on which to configure an independent metric or preference for a static route. To configure an unnumbered interface as the next-hop interface for a static route, specify **qualified-next-hop interface-name**, where **interface-name** is the name of the IPv4 or IPv6 unnumbered interface.



**NOTE:** For an Ethernet interface to be configured as the qualified next hop for a static route, it must be an unnumbered interface.

To configure an Ethernet interface as an unnumbered interface, configure the **unnumbered-address <interface-name>** statement at the [edit interfaces <interface-name> unit <logical-unit-number> family <family-name>] hierarchy level as described in *Configuring an Unnumbered Interface*.

The remaining statements are explained separately. See [CLI Explorer](#).

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Example: Enabling BFD on Qualified Next Hops in Static Routes for Route Selection on page 40</a></li> </ul>
------------------------------	--

## readvertise

<b>Syntax</b>	(readvertise   no-readvertise);
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options static (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> static (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options static (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> static (defaults   route)],</p> <p>[edit routing-options static (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Configure whether static routes are eligible to be readvertised by routing protocols:
<b>Default</b>	Static routes are eligible to be readvertised (that is, exported from the routing table into dynamic routing protocols) if a policy to do so is configured. To mark an IPv4 static route as being ineligible for readvertisement, include the <b>no-readvertise</b> statement.
<b>Options</b>	<p><b>readvertise</b>—Readvertise static routes. Include the <b>readvertise</b> statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>no-readvertise</b> option specified in the <b>defaults</b> portion of the statement.</p> <p><b>no-readvertise</b>—Mark a static route as being ineligible for readvertisement. Include the <b>no-readvertise</b> option when configuring the route.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Preventing a Static Route from Being Readvertised</i></li> <li>• <i>Understanding Static Route Control in Routing and Forwarding Tables</i></li> <li>• <i>static</i></li> </ul>

## redundant-sources

---

<b>Syntax</b>	<code>redundant-sources [ <i>addresses</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-options multicast <b>flow-map</b> <i>flow-map-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.3.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>
<b>Description</b>	Configure a list of redundant sources for multicast flows defined by a flow map.
<b>Options</b>	<b><i>addresses</i></b> —List of IPv4 or IPv6 addresses for use as redundant (backup) sources for multicast flows defined by a flow map.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring a Multicast Flow Map</i></li> </ul>

## resolution

**Syntax**

```
resolution {
    rib routing-table-name {
        import [ policy-names ];
        inet-import [ policy-names ];
        inet-resolution-ribs [ routing-table-names ];
        inet6-import [ policy-names ];
        inet6-resolution-ribs [ routing-table-names ];
        iso-import [ policy-names ];
        iso-resolution-ribs [ routing-table-names ];
        resolution-family resolution-family;
        resolution-ribs [ routing-table-names ];
    }
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.  
inet6-import and inet6-resolution-ribs options added in Junos OS Release 17.2R1.

**Description** Configure the router to perform custom route resolution on protocol next hops of routes in a certain routing table. The protocol next hop is used to determine the forwarding next hop.

For example, you might want to direct **inet.2** route resolution to use topology routing tables **:red.inet.0** and **:blue.inet.0** for protocol next-hop IP address lookups. Or you might want to direct **bgp.l3vpn.0** to use the information in **inet.0** to resolve routes, thus overriding the default behavior, which is to use **inet.3**.

You can specify up to two routing tables in the **resolution-ribs** statement. The route resolution scheme first checks the first-listed routing table for the protocol next-hop address. If the address is found, it uses this entry. If it is not found, the resolution scheme checks the second-listed routing table. Hence, only one routing table is used for each protocol next-hop address. For example, if you configure **resolution rib bgp.l3vpn.0 resolution-ribs [inet.0 inet.3]**, **inet.0** is checked first and then **inet.3** is checked.



**NOTE:** Customizing route resolution might cause the routing protocol process (rpd) to consume more memory resources than it ordinarily would. When you customize route resolution, we recommend that you check the memory resources by running the **show system processes** and the **show task memory** commands. For more information, see *Routing Protocol Process Overview*.



The remaining statements are explained separately. See [CLI Explorer](#).

- Options**
- inet-import [ *policy-names* ]**—(Optional) Import policy for IPv4 family resolution tree.
  - inet-resolution-ribs [ *routing-table-names* ]**—(Optional) Specify routing tables to use for IPv4 family protocol-next-hop resolution.
  - inet6-import [ *policy-names* ]**—(Optional) Import policy for IPv6 family resolution tree.
  - inet6-resolution-ribs [ *routing-table-names* ]**—(Optional) Specify routing tables to use for IPv6 family protocol-next-hop resolution.
- Enabling the **inet6-resolution-ribs** option causes the static LSP route resolution to happen over the more preferred resolving route (lowest protocol preference) among the longest-matching-prefix routes in both the inet6.0 and inet6.3 routing tables.
- iso-import [ *policy-names* ]**—(Optional) Import policy for ISO family resolution tree.
  - iso-resolution-ribs [ *routing-table-names* ]**—(Optional) Specify routing tables to use for ISO family protocol-next-hop resolution.
  - resolution-family *resolution-family***—(Optional) Specify a family of resolution tree.

**Required Privilege Level**

- routing—To view this statement in the configuration.
- routing-control—To add this statement to the configuration.

- Related Documentation**
- *Example: Configuring Route Resolution on PE Routers*
  - *Example: Configuring Route Resolution on Route Reflectors*
  - *Understanding Multitopology Routing in Conjunction with PIM*
  - *Example: Configuring Multitopology Routing to Provide Redundancy for Multicast Traffic over Separate Network Paths*

## resolution-ribs

---

<b>Syntax</b>	<code>resolution-ribs [ <i>routing-table-names</i> ];</code>
<b>Hierarchy Level</b>	<code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution <i>rib</i>],</code> <code>[edit logical-systems <i>logical-system-name</i> routing-options resolution <i>rib</i>],</code> <code>[edit routing-instances <i>routing-instance-name</i> routing-options resolution <i>rib</i>],</code> <code>[edit routing-options resolution <i>rib</i>]</code>
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	<p>Specify one or more routing tables to use for route resolution.</p> <p>This statement enables you to override the default routing tables that Junos OS uses for route resolution. For example, suppose that the resolution routing table is <b>inet.3</b>, but you want to allow fallback resolution through <b>inet.0</b>. One example use case is overriding the <b>bgp.rtarget.0 (family route-target)</b> routing table resolution from using only <b>inet.3</b> to using both <b>inet.3</b> and <b>inet.0</b>.</p>
<b>Options</b>	<i>routing-table-names</i> —Name of one or more routing tables.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring Route Resolution on PE Routers</i></li><li>• <i>Example: Configuring Multitopology Routing to Provide Redundancy for Multicast Traffic over Separate Network Paths</i></li><li>• <i>Understanding Multitopology Routing in Conjunction with PIM</i></li></ul>

## resolve

**Syntax**    resolve;

**Hierarchy Level**    [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* static (defaults | route)],  
                           [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options static (defaults | route)],  
                           [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* static (defaults | route)],  
                           [edit logical-systems *logical-system-name* routing-options static (defaults | route)],  
                           [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* static (defaults | route)],  
                           [edit routing-instances *routing-instance-name* routing-options static (defaults | route)],  
                           [edit routing-options rib *routing-table-name* static (defaults | route)],  
                           [edit routing-options static (defaults | route)]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                                   Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                                   Statement introduced in Junos OS Release 11.3 for the QFX Series.  
                                   Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description**    Statically configure routes to be resolved to a next hop that is not directly connected. The route is resolved through the **inet.0** and **inet.3** routing tables.



**NOTE:** You cannot configure both **resolve** and **retain** options for a statically configured route because resolved next hops cannot be retained.

**Default**    Static routes can point only to a directly connected next hop.



**TIP:** We recommend configuring the **no-resolve** option for individual routes to override default configuration.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                   routing-control—To add this statement to the configuration.

**Related Documentation**    • *static*

## restart-duration (Routing Options)

---

<b>Syntax</b>	<code>restart-duration <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options graceful-restart], [edit logical-systems <i>logical-system-name</i> routing-options graceful-restart], [edit routing-instances <i>routing-instance-name</i> routing-options graceful-restart], [edit routing-options graceful-restart]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Configure the restart timer for graceful restart.
<b>Options</b>	<b><i>seconds</i></b> —Configure the time period for the restart to last. <b>Range:</b> 120 through 900 seconds <b>Default:</b> 300 seconds
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Junos OS High Availability Library for Routing Devices</i></li></ul>

## retain

**Syntax** (no-retain | retain);

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* static (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options static (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* static (defaults | route)],  
 [edit logical-systems *logical-system-name* routing-options static (defaults | route)],  
 [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* static (defaults | route)],  
 [edit routing-instances *routing-instance-name* routing-options static (defaults | route)],  
 [edit routing-options rib *routing-table-name* static (defaults | route)],  
 [edit routing-options static (defaults | route)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.  
 Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure statically configured routes to be deleted from or retained in the forwarding table when the routing protocol process shuts down normally.



**NOTE:** You cannot configure both **retain** and **resolve** options for a statically configured route because resolved next hops cannot be retained.

**Default** Statically configured routes are deleted from the forwarding table when the routing protocol process shuts down normally.

The retention policy applied to defaults and route is as follows:

- **defaults**— The default route retention policy. By default, the default route retention policy is no-retain for the configured scope using the **defaults** configuration statement. This default retention policy is overridden on a per route basis using the routes option.
- **route**—The retention policy for this route. The default retention policy for a route is the policy of its routing table.

**Options** **no-retain**—Delete statically configured routes from the forwarding table when the routing protocol process shuts down normally. To explicitly specify that routes be deleted from the forwarding table, include the **no-retain** statement. Include this statement when configuring an individual route in the **route** portion of the **static** statement to override a **retain** option specified in the **defaults** portion of the statement.

**retain**—Have a static route remain in the forwarding table when the routing protocol process shuts down normally. Doing this greatly reduces the time required to restart a system that has a large number of routes in its routing table.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *static*

---

## reverse-oif-mapping

---

**Syntax** `reverse-oif-mapping {  
    no-qos-adjust;  
}`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options multicast [interface interface-name](#)],  
[edit logical-systems *logical-system-name* routing-options multicast [interface interface-name](#)],  
[edit routing-instances *routing-instance-name* routing-options multicast [interface interface-name](#)],  
[edit routing-options multicast [interface interface-name](#)]

**Release Information** Statement introduced in Junos OS Release 9.2.  
Statement introduced in Junos OS Release 9.2 for EX Series switches.  
The **no-qos-adjust** statement added in Junos OS Release 9.5.  
The **no-qos-adjust** statement introduced in Junos OS Release 9.5 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Enable the routing device to identify a subscriber VLAN or interface based on an IGMP or MLD request it receives over the multicast VLAN.

The remaining statement is explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Configuring Multicast with Subscriber VLANs*

## rpf-check-policy (Routing Options RPF)

<b>Syntax</b>	<code>rpf-check-policy [ <i>policy-names</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Apply policies for disabling RPF checks on arriving multicast packets. The policies must be correctly configured.
<b>Options</b>	<i>policy-names</i> —Name of one or more multicast RPF check policies.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring RPF Policies</i></li> </ul>

## rib (General)

```
Syntax  rib routing-table-name {
        aggregate {
            defaults {
                ... aggregate-options ...
            }
            route destination-prefix {
                policy policy-name;
                ... aggregate-options ...
            }
        }
        generate {
            defaults {
                generate-options;
            }
            route destination-prefix {
                policy policy-name;
                generate-options;
            }
        }
        martians {
            destination-prefix match-type <allow>;
        }
    }
    static {
        defaults {
            static-options;
        }
        rib-group group-name;
        route destination-prefix {
            next-hop;
            static-options;
        }
    }
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Create a routing table.

Explicitly creating a routing table with ***routing-table-name*** is optional if you are not adding any static, martian, aggregate, or generated routes to the routing table and if you also are creating a routing table group.





**NOTE:** The IPv4 multicast routing table (`inet.1`) and the IPv6 multicast routing table (`inet6.1`) are not supported for this statement.

**Default** If you do not specify a routing table name with the *routing-table-name* option, the software uses the default routing tables, which are `inet.0` for unicast routes and `inet.1` for the multicast cache.

**Options** *routing-table-name*—Name of the routing table, in the following format:  
*protocol [.identifier]*.

In a routing instance, the routing table name must include the routing instance name.

For example, if the routing instance name is `link0`, the routing table name might be `link0.inet6.0`.

- *protocol* is the protocol family. It can be `inet6` for the IPv6 family, `inet` for the IPv4 family, `iso` for the ISO protocol family, or *instance-name.iso.0* for an ISO routing instance.
- *identifier* is a positive integer that specifies the instance of the routing table.

**Default:** `inet.0`

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** `routing`—To view this statement in the configuration.  
`routing-control`—To add this statement to the configuration.

**Related Documentation**

- *Example: Creating Routing Tables*
- *passive*

## rib (Route Resolution)

---

<b>Syntax</b>	<pre>rib <i>routing-table-name</i> {     <b>import</b> [ <i>policy-names</i> ];     <b>resolution-ribs</b> [ <i>routing-table-names</i> ]; }</pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>resolution</b> ], [edit logical-systems <i>logical-system-name</i> routing-options <b>resolution</b> ], [edit routing-instances <i>routing-instance-name</i> routing-options <b>resolution</b> ], [edit routing-options <b>resolution</b> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Specify a routing table name for route resolution.  The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring Route Resolution on PE Routers</i></li></ul>

## rib-group (Routing Options)

<b>Syntax</b>	<code>rib-group group-name;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <a href="#">interface-routes</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">interface-routes</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options static],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">interface-routes</a>],</p> <p>[edit routing-options <a href="#">interface-routes</a>],</p> <p>[edit routing-options rib <i>routing-table-name</i> static],</p> <p>[edit routing-options static]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Configure which routing table groups interface routes are imported into.
<b>Options</b>	<p><b>group-name</b>—Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens. It generally does not make sense to specify more than a single routing table group.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Importing Direct and Static Routes Into a Routing Instance</i></li> <li>• <i>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</i></li> <li>• <a href="#">interface-routes on page 138</a></li> <li>• <a href="#">rib-groups on page 188</a></li> </ul>

## rib-groups

<b>Syntax</b>	<pre> rib-groups {     group-name {         export-rib group-name;         import-policy [ policy-names ];         import-rib [ group-names ];     } } </pre>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Group one or more routing tables to form a routing table group. A routing protocol can import routes into all the routing tables in the group and can export routes from a single routing table.</p> <p>Each routing table group must contain one or more routing tables that Junos OS uses when importing routes (specified in the <b>import-rib</b> statement) and optionally can contain one routing table group that Junos OS uses when exporting routes to the routing protocols (specified in the <b>export-rib</b> statement).</p> <p>The first routing table you specify is the <i>primary routing table</i>, and any additional routing tables are the <i>secondary routing tables</i>.</p> <p>The primary routing table determines the address family of the routing table group. To configure an IP version 4 (IPv4) routing table group, specify <b>inet.0</b> as the primary routing table. To configure an IP version 6 (IPv6) routing table group, specify <b>inet6.0</b> as the primary routing table. If you configure an IPv6 routing table group, the primary and all secondary routing tables must be IPv6 routing tables (<b>inet6.x</b>).</p> <p>In Junos OS Release 9.5 and later, you can include both IPv4 and IPv6 routing tables in an IPv4 import routing table group using the <b>import-rib</b> statement. In releases prior to Junos OS Release 9.5, you can only include either IPv4 or IPv6 routing tables in the same <b>import-rib</b> statement. The ability to configure an import routing table group with both IPv4 and IPv6 routing tables enables you, for example, to populate the <b>inet6.3</b> routing table with IPv6 addresses that are compatible with IPv4. Specify <b>inet.0</b> as the primary routing table, and specify <b>inet6.3</b> as a secondary routing table.</p>



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.



**NOTE:** If you configure an import routing table group that includes both IPv4 and IPv6 routing tables, any corresponding export routing table group must include only IPv4 routing tables.

If you have configured a routing table, configure the OSPF primary instance at the **[edit protocols ospf]** hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group. For more information, see *Example: Configuring Multiple Routing Instances of OSPF*.

After specifying the routing table from which to import routes, you can apply one or more policies to control which routes are installed in the routing table group. To apply a policy to routes being imported into the routing table group, include the **import-policy** statement.

**Options** **group-name**—Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens.

The remaining statements are explained separately. See [CLI Explorer](#).


**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**


- *Example: Exporting Specific Routes from One Routing Table Into Another Routing Table*
- [rib-group on page 187](#)

## route-distinguisher-id

---

<b>Syntax</b>	<code>route-distinguisher-id <i>ip-address</i>;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	<p>Automatically assign a route distinguisher to the routing instance.</p> <p>If you configure the <b>route-distinguisher</b> statement in addition to the <b>route-distinguisher-id</b> statement, the value configured for <b>route-distinguisher</b> supersedes the value generated from <b>route-distinguisher-id</b>.</p> <div><b>NOTE:</b> To avoid a conflict in the two route distinguisher values, it is recommended to ensure that the first half of the route distinguisher obtained by configuring the <b>route-distinguisher</b> statement is different from the first half of the route distinguisher obtained by configuring the <b>route-distinguisher-id</b> statement.</div>
<b>Options</b>	<i>ip-address</i> —Address for routing instance.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring BGP Route Target Filtering for VPNs</i></li><li>• <i>Configuring Routing Instances on PE Routers in VPNs</i></li></ul>

## route-record

<b>Syntax</b>	route-record;
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-options]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Export the AS path and routing information to the traffic sampling process.  Before you can perform flow aggregation, the routing protocol process must export the AS path and routing information to the sampling process.
<div>  <p><b>NOTE:</b> Starting with Junos OS Release 15.1, when you commit a minor configuration change, the routing protocol process sends only AS paths that are active routes to the FPCs. Not all known AS paths are sent to the FPC, thereby considerably reducing the memory and CPU usage, resulting in a faster route record database update.</p> </div>	
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Enabling Flow Aggregation</i></li> <li>• <i>Junos OS Services Interfaces Library for Routing Devices</i></li> </ul>

## router-id

<b>Syntax</b>	<code>router-id address;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Specify the routing device's IP address.</p> <p>The router identifier is used by BGP and OSPF to identify the routing device from which a packet originated. The router identifier usually is the IP address of the local routing device. If you do not configure a router identifier, the IP address of the first interface to come online is used. This is usually the loopback interface. Otherwise, the first hardware interface with an IP address is used.</p>



**NOTE:** We strongly recommend that you configure the router identifier under the [edit routing-options] hierarchy level to avoid unpredictable behavior if the interface address on a loopback interface changes.

You must configure a router-id in order for BGP and OSPF to function in a routing instance. Use the **show route instance detail** command to display the router-id value for a routing instance. If the router-id is **0.0.0.0**, then the routing instance has no router-id.

For more information about the router identifier in OSPF, see *Example: Configuring an OSPF Router Identifier*.



**NOTE:** If you run OSPF for IPv6 or BGP for IPv6 in a routing instance, you must configure an IPv4 router identifier (router-id) in the routing instance itself. In other words, the IPv4 router-id in the main routing instance is not inherited by other routing instances. Even if you run *only* IPv6 OSPF or BGP in a routing instance, the IPv4 router-id must be configured because OSPF and BGP, even when used exclusively with IPv6, use the IPv4 router-id for handshaking. If you do not configure the IPv4 router-id in the IPv6 OSPF or BGP routing instance, then the IPv6 protocols will use invalid IPv4 address 0.0.0.0 and the adjacencies and connections will fail.



<b>Options</b>	<b>address</b> —IP address of the routing device. <b>Default:</b> Address of the first interface encountered by Junos OS
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Examples: Configuring External BGP Peering</i></li> <li>• <i>Examples: Configuring Internal BGP Peering</i></li> </ul>

## routing-instances

<b>Syntax</b>	<pre>routing-instances <i>routing-instance-name</i> {     <i>description</i>;     instance-type virtual-router;     <i>interface</i> <i>interface-name</i>;     <i>protocols</i>;     <i>routing-options</i> }</pre>
<b>Hierarchy Level</b>	[edit]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	(QFabric switches only) Configure a virtual router routing instance.
<b>Options</b>	<p><b><i>routing-instance-name</i></b>—Name of this routing instance.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">Configuring Virtual Router Routing Instances on page 26</a></li> </ul>

## routing-options

---

<b>Syntax</b>	routing-options { ... }
<b>Hierarchy Level</b>	[edit], [edit routing-instances <i>routing-instance-name</i> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Configure protocol-independent routing properties.
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Overview of Routing Options on page 19</a></li><li>• <a href="#">Understanding Distributed Periodic Packet Management on page 27</a></li><li>• <a href="#">Example: Configuring SSM Maps for Different Groups to Different Sources</a></li></ul>

## scope

---

<b>Syntax</b>	<pre>scope scope-name {     interface [ interface-names ];     prefix destination-prefix; }</pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Configure multicast scoping.
<b>Options</b>	<p><b><i>scope-name</i></b>—Name of the multicast scope.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Configuring Multicast Snooping</i></li> </ul>

## scope-policy

---

**Syntax**    `scope-policy [ policy-names ];`

**Hierarchy Level**    `[edit logical-systems logical-system-name routing-options multicast],`  
`[edit routing-options multicast]`



**NOTE:** You can configure a scope policy at these two hierarchy levels only. You cannot apply a scope policy to a specific routing instance, because all scoping policies are applied to all routing instances. However, you can apply the `scope` statement to a specific routing instance at the `[edit routing-instances routing-instance-name routing-options multicast]` or `[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options multicast]` hierarchy level.

**Release Information**    Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description**    Apply policies for scoping. The policy must be correctly configured at the `edit policy-options policy-statement` hierarchy level.

**Options**    *policy-names*—Name of one or more multicast scope policies.

**Required Privilege Level**    routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.


**Related Documentation**    • [scope on page 195](#)

## source (Source-Specific Multicast)

<b>Syntax</b>	<code>source [ <i>addresses</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>],</p> <p>[edit routing-options multicast <a href="#">ssm-map</a> <i>ssm-map-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p>
<b>Description</b>	Specify IPv4 or IPv6 source addresses for an SSM map.
<b>Options</b>	<i>addresses</i> —IPv4 or IPv6 source addresses.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To view this statement in the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring SSM Mapping</i></li> </ul>

## source-routing

---

<b>Syntax</b>	source-routing { (ip   ipv6) }
<b>Hierarchy Level</b>	[edit routing-options]
<b>Release Information</b>	Statement for IPv6 introduced in Junos OS Release 8.2. Statement for IPv4 introduced in Junos OS Release 8.5. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.3 for ACX Series routers.
<b>Description</b>	<p>Enable source routing.</p> <p>Source routing allows a sender of a packet to partially or completely specify the route the packet takes through the network. In contrast, in non-source routing protocols, routers in the network determine the path based on the packet's destination.</p> <div> <b>NOTE:</b> We recommend that you not use source routing. Instead, we recommend that you use policy-based routing or filter-based forwarding to route packets based on source addresses.</div>
<b>Default</b>	Disabled
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring Filter-Based Forwarding on the Source Address</i></li></ul>

## ssm-groups

<b>Syntax</b>	<code>ssm-groups [ <i>ip-addresses</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Configure source-specific multicast (SSM) groups.</p> <p>By default, the SSM group multicast address is limited to the IP address range from 232.0.0.0 through 232.255.255.255. However, you can extend SSM operations into another Class D range by including the <b>ssm-groups</b> statement in the configuration. The default SSM address range from 232.0.0.0 through 232.255.255.255 cannot be used in the <b>ssm-groups</b> statement. This statement is for adding other multicast addresses to the default SSM group addresses. This statement does not override the default SSM group address range.</p> <p>IGMPv3 supports SSM groups. By utilizing inclusion lists, only sources that are specified send to the SSM group.</p>
<b>Options</b>	<i>ip-addresses</i> —List of one or more additional SSM group addresses separated by a space.
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring Source-Specific Multicast Groups with Any-Source Override</i></li> </ul>

## ssm-map (Routing Options Multicast)

---

<b>Syntax</b>	<code>ssm-map <i>ssm-map-name</i> {     policy [ <i>policy-names</i> ];     source [ <i>addresses</i> ]; }</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast], [edit logical-systems <i>logical-system-name</i> routing-options multicast], [edit routing-instances <i>routing-instance-name</i> routing-options multicast], [edit routing-options multicast]
<b>Release Information</b>	Statement introduced in Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Configure SSM mapping.
<b>Options</b>	<i>ssm-map-name</i> —Name of the SSM map.  The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .
<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring SSM Mapping</i></li></ul>



## static (Routes)

Syntax	<pre> static {   defaults {     static-options;   }   rib-group <i>group-name</i>;   route <i>destination-prefix</i> {     next-hop <i>address</i>;     next-hop <i>options</i>;     qualified-next-hop <i>address</i> {       metric <i>metric</i>;       preference <i>preference</i>;     }     static-options;   } } </pre>
Hierarchy Level	<p>[edit routing-options], [edit routing-options rib <i>routing-table-name</i>]</p>
Release Information	<p>Statement introduced in Junos OS Release 11.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure static routes to be installed in the routing table. You can specify any number of routes within a single <b>static</b> statement, and you can specify any number of <b>static</b> options in the configuration.</p>
Options	<p><b>defaults</b>—Specify global static route options. These options only set default attributes inherited by all newly created static routes. These are treated as global defaults and apply to all the static routes you configure in the <b>static</b> statement. This part of the <b>static</b> statement is optional.</p> <p><b>route <i>destination-prefix</i></b>—Destination of the static route.</p> <ul style="list-style-type: none"> <li><b>defaults</b>—For the default route to the destination. This is equivalent to specifying an IP address of <b>0.0.0.0/0</b>.</li> <li><b><i>destination-prefix/prefix-length—destination-prefix</i></b> is the network portion of the IP address, and <b><i>prefix-length</i></b> is the destination prefix length.</li> <li><b>next-hop <i>address</i></b>—Reach the next-hop routing device by specifying an IP address, an interface name, or an ISO network entity title (NET).</li> <li><b><i>nsap-prefix—nsap-prefix</i></b> is the network service access point (NSAP) address for ISO.</li> </ul> <p><b>next-hop <i>options</i></b>—Additional information for how to manage forwarding of packets to the next hop.</p>

- **discard**—Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.
- **iso-net**—Reach the next-hop routing device by specifying an ISO NSAP.
- **next-table *routing-table-name***—Name of the next routing table to the destination.
- **receive**—Install a receive route for this destination into the routing table.
- **reject**—Do not forward packets addressed to this destination. Instead, drop the packets, send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.

***static-options***—(Optional under **route**) Additional information about static routes, which is included with the route when it is installed in the routing table.

You can specify one or more of the following in ***static-options***. Each of the options is explained separately.

- **(active | passive);**
- **(install | no-install);**
- **(metric | metric2 | metric3 | metric4) *value* <type type>;**
- **(preference | preference2 | color | color2) *preference* <type type>;**
- **(resolve | no-resolve);**
- **(no-retain | retain);**

The remaining statements are explained separately. See [CLI Explorer](#).

<b>Required Privilege Level</b>	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
---------------------------------	---

<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">Configuring Static Routing on page 21</a></li></ul>
------------------------------	---

## subscriber-leave-timer

<b>Syntax</b>	<code>subscriber-leave-timer <i>seconds</i>;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-options multicast <b>interface</b> <i>interface-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.2.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Length of time before the multicast VLAN updates QoS data (for example, available bandwidth) for subscriber interfaces after it receives an IGMP leave message.
<b>Options</b>	<p><b>seconds</b>—Length of time before the multicast VLAN updates QoS data (for example, available bandwidth) for subscriber interfaces after it receives an IGMP leave message. Specifying a value of 0 results in an immediate update. This is the same as if the statement were not configured.</p> <p><b>Range:</b> 0 through 30</p> <p><b>Default:</b> 0 seconds</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

## tag (Routing Options)

<b>Syntax</b>	<code>tag metric type number;</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   static) (defaults   route)]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Associate a tag with a static, aggregate, or generated route.
<b>Default</b>	No tag strings are associated with routes.
<b>Options</b>	<p><i>metric</i>—Tag metric.</p> <p><b>Range:</b> 0 through 4,294,967,295</p> <p><i>type number</i>—Tag type.</p> <p><b>Range:</b> 1 through 16</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Summarizing Static Routes Through Route Aggregation</i></li> <li>• <a href="#">aggregate on page 84</a></li> <li>• <a href="#">generate on page 125</a></li> <li>• <i>static</i></li> </ul>

## threshold (Multicast Forwarding Cache)

<b>Syntax</b>	<pre>threshold {   log-warning <i>value</i>;   suppress <i>value</i>;   reuse <i>value</i>;   mvpn-rpt-suppress <i>value</i>;   mvpn-rpt-reuse <i>value</i>; }</pre>
<b>Hierarchy Level</b>	<pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options multicast <b>forwarding-cache</b>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options multicast <b>forwarding-cache</b> family (inet   inet6)], [edit logical-systems <i>logical-system-name</i> routing-options multicast <b>forwarding-cache</b>], [edit logical-systems <i>logical-system-name</i> routing-options multicast <b>forwarding-cache</b>   family (inet   inet6)], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>forwarding-cache</b>], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>forwarding-cache</b>   (inet   inet6)], [edit routing-options multicast <b>forwarding-cache</b>], [edit routing-options multicast <b>forwarding-cache</b> family (inet   inet6)]</pre>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Configure the suppression, reuse, and warning log message thresholds for multicast forwarding cache limits. You can configure the thresholds globally for the multicast forwarding cache or individually for the IPv4 and IPv6 multicast forwarding caches. Configuring the <b>threshold</b> statement globally for the multicast forwarding cache or including the <b>family</b> statement to configure the thresholds for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.</p> <p>When general forwarding-cache suppression is active, the multicast forwarding-cache prevents forwarding traffic on the shared RP tree (RPT). At the same time, MVPN (*G) forwarding states are not created for new RPT c-mcast entries, and , (*G) installed by BGP-MVPN protocol are deleted. When general forwarding-cache suppression ends, BGP-MVPN (*G) entries are re-added in the RIB and restored to the FIB (up to the MVPN (*G) limit).</p> <p>When MVPN RPT suppression is active, for all PE routers in excess of the threshold (including RP PEs), MVPN will not add new (*G) forwarding entries to the forwarding-cache. Changes are visible once the entries in the current forwarding-cache have timed out or are deleted.</p> <p>To use <b>mvpn-rpt-suppress</b> and/or <b>mvpn-rpt-reuse</b>, you must first configure the general <b>suppress</b> threshold. If <b>suppress</b> is configured but <b>mvpn-rpt-suppress</b> is not, both</p>

**mvpn-rpt-suppress** and **mvpn-rpt-reuse** will inherit *and use* the value set for the general **suppress**.

**Options**     **reuse** or **mvpn-rpt-reusevalue** (Optional) Value at which to begin creating new multicast forwarding cache entries. If configured, this number should be less than the **suppress** value.

**Range:** 1 through 200,000

**suppress** or **mvpn-rpt-suppressvalue** —Value at which to begin suppressing new multicast forwarding cache entries. This value is mandatory. This number should be greater than the **reuse** value.

**Range:** 1 through 200,000

**Required Privilege Level**     routing—To view this statement in the configuration.  
    routing-control—To add this statement to the configuration.

**Related Documentation**

- *Examples: Configuring the Multicast Forwarding Cache*
- *show multicast forwarding-cache statistics*

## timeout (Flow Maps)

<b>Syntax</b>	<code>timeout (never non-discard-entry-only   <i>minutes</i>);</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <b>flow-map</b> <i>flow-map-name</i>],</p> <p>[edit routing-options multicast <b>flow-map</b> <i>flow-map-name</i>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 8.2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Configure the timeout value for multicast forwarding cache entries associated with the flow map.
<b>Options</b>	<p><b><i>minutes</i></b>—Length of time that the forwarding cache entry remains active.</p> <p><b>Range:</b> 1 through 720</p> <p><b><i>never non-discard-entry-only</i></b>—Specify that the forwarding cache entry always remain active. If you omit the <b><i>non-discard-entry-only</i></b> option, all multicast forwarding entries, including those in forwarding and pruned states, are kept forever. If you include the <b><i>non-discard-entry-only</i></b> option, entries with forwarding states are kept forever, and entries with pruned states time out.</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

## timeout (Multicast)

---

<b>Syntax</b>	<code>timeout <i>minutes</i> &lt;family (inet   inet6)&gt;;</code>
<b>Hierarchy Level</b>	[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">forwarding-cache</a> ], [edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">forwarding-cache</a> ], [edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">forwarding-cache</a> ], [edit routing-options multicast <a href="#">forwarding-cache</a> ]
<b>Release Information</b>	Statement introduced in Junos OS Release 8.2. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 11.3 for the QFX Series. Statement introduced in Junos OS Release 12.3 for ACX Series routers. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Configure the timeout value for multicast forwarding cache entries.
<b>Options</b>	<b><i>minutes</i></b> —Length of time that the forwarding cache limit remains active. <b>Range:</b> 1 through 720  <b><i>family (inet   inet6)</i></b> —(Optional) Apply the configured timeout to either IPv4 or IPv6 multicast forwarding cache entries. Configuring the <b>timeout</b> statement globally for the multicast forwarding cache or including the <b>family</b> statement to configure the timeout value for the IPv4 and IPv6 multicast forwarding caches are mutually exclusive.  <b>Default:</b> By default, the configured timeout applies to both IPv4 and IPv6 multicast forwarding cache entries.
<b>Required Privilege Level</b>	<b>routing</b> —To view this statement in the configuration. <b>routing-control</b> —To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Configuring the Multicast Forwarding Cache</i></li></ul>



## traceoptions

<b>Syntax</b>	<pre> traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;disable&gt;; } </pre>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options],</p> <p>[edit routing-options flow],</p> <p>[edit routing-options multicast]</p>
<b>Release Information</b>	<p>Statement introduced before Junos OS Release 7.4.</p> <p><b>nsr-synchronization</b> flag for BGP, IS-IS, LDP, and OSPF added in Junos OS Release 8.4.</p> <p><b>nsr-synchronization</b> and <b>nsr-packet</b> flags for BFD sessions added in Junos OS Release 8.5.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>nsr-synchronization</b> flag for RIP and RIPng added in Junos OS Release 9.0.</p> <p><b>nsr-synchronization</b> flag for Layer 2 VPNs and VPLS added in Junos OS Release 9.1.</p> <p><b>nsr-synchronization</b> flag for PIM added in Junos OS Release 9.3.</p> <p><b>nsr-synchronization</b> flag for MPLS added in Junos OS Release 10.1.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p><b>nsr-synchronization</b> flag for MSDP added in Junos OS Release 12.1.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Define tracing operations that track all routing protocol functionality in the routing device.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p>
<b>Default</b>	If you do not include this statement, no global tracing operations are performed.
<b>Options</b>	<p><b>Values:</b></p> <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place global routing protocol tracing output in the file <b>routing-log</b>.</p>

**files *number***—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 10 files

**flag *flag***—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. These are the global routing protocol tracing options:

- **all**—All tracing operations
- **condition-manager**—Condition-manager events
- **config-internal**—Configuration internals
- **general**—All normal operations and routing table changes (a combination of the **normal** and **route** trace operations)
- **graceful-restart**—Graceful restart operations
- **normal**—All normal operations
- **nsr-packet**—Detailed trace information for BFD nonstop active routing only
- **nsr-synchronization**—Tracing operations for nonstop active routing
- **nsr-synchronization**—Nonstop active routing synchronization
- **parse**—Configuration parsing
- **policy**—Routing policy operations and actions
- **regex-parse**—Regular-expression parsing
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size *size***—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file.0***. When the ***trace-file*** again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** ***xk*** to specify KB, ***xm*** to specify MB, or ***xg*** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

<b>Required Privilege</b>	routing and trace—To view this statement in the configuration.
<b>Level</b>	routing-control and trace-control—To add this statement to the configuration.
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Tracing Global Routing Protocol Operations</i></li></ul>

## upstream-interface

<b>Syntax</b>	<code>upstream-interface [ <i>interface-names</i> ];</code>
<b>Hierarchy Level</b>	<p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">pim-to-mld-proxy</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">pim-to-mld-proxy</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">pim-to-mld-proxy</a>],</p> <p>[edit routing-options multicast <a href="#">pim-to-igmp-proxy</a>],</p> <p>[edit routing-options multicast <a href="#">pim-to-mld-proxy</a>]</p>
<b>Release Information</b>	<p>Statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3 for ACX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	<p>Configure at least one, but not more than two, upstream interfaces on the rendezvous point (RP) routing device that resides between a customer edge-facing Protocol Independent Multicast (PIM) domain and a core-facing PIM domain. The RP routing device translates PIM join or prune messages into corresponding IGMP report or leave messages (if you include the <a href="#">pim-to-igmp-proxy</a> statement), or into corresponding MLD report or leave messages (if you include the <a href="#">pim-to-mld-proxy</a> statement). The routing device then proxies the IGMP or MLD report or leave messages to one or both upstream interfaces to forward IPv4 multicast traffic (for IGMP) or IPv6 multicast traffic (for MLD) across the PIM domains.</p>
<b>Options</b>	<p><b><i>interface-names</i></b>—Names of one or two upstream interfaces to which the RP routing device proxies IGMP or MLD report or leave messages for transmission of multicast traffic across PIM domains. You can specify a maximum of two upstream interfaces on the RP routing device. To configure a set of two upstream interfaces, specify the full interface names, including all physical and logical address components, within square brackets ( [ ] ).</p>
<b>Required Privilege Level</b>	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Configuring PIM-to-IGMP Message Translation</a></li> <li><a href="#">Configuring PIM-to-MLD Message Translation</a></li> </ul>

## CHAPTER 3

# Operational Commands (Routing Options)

- `clear ipv6 neighbors`
- `show as-path`
- `show as-path domain`
- `show as-path summary`
- `show ipv6 neighbors`
- `show ipv6 router-advertisement`
- `show route`
- `show route active-path`
- `show route all`
- `show route aspath-regex`
- `show route best`
- `show route brief`
- `show route community`
- `show route community-name`
- `show route damping`
- `show route detail`
- `show route exact`
- `show route export`
- `show route extensive`
- `show route flow validation`
- `show route forwarding-table`
- `show route inactive-path`
- `show route inactive-prefix`
- `show route instance`
- `show route label`
- `show route label-switched-path`

- `show route martians`
- `show route next-hop`
- `show route no-community`
- `show route protocol`
- `show route range`
- `show route receive-protocol`
- `show route resolution`
- `show route snooping`
- `show route source-gateway`
- `show route summary`
- `show route table`
- `show route terse`

## clear ipv6 neighbors

---

<b>Syntax</b>	clear ipv6 neighbors <all   host <i>hostname</i> >
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.3 for EX Series switches. Command introduced in Junos OS Release 12.2 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Clear IPv6 neighbor cache information.
<b>Options</b>	<b>none</b> —Clear all IPv6 neighbor cache information.  <b>all</b> —(Optional) Clear all IPv6 neighbor cache information.  <b>host <i>hostname</i></b> —(Optional) Clear the information for the specified IPv6 neighbors.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show ipv6 neighbors on page 226</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">clear ipv6 neighbors on page 215</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

#### clear ipv6 neighbors

```
user@host> clear ipv6 neighbors
```

## show as-path

---

List of Syntax	<a href="#">Syntax on page 216</a> <a href="#">Syntax (EX Series Switches) on page 216</a>
Syntax	<code>show as-path</code> <code>&lt;brief   detail&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
Syntax (EX Series Switches)	<code>show as-path</code> <code>&lt;brief   detail&gt;</code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Display the distribution of autonomous system (AS) paths that the local routing device is using (usually through the routing table). Use this command to debug problems for AS paths and to understand how AS paths have been manipulated through a policy (through the <b>as-path-prepend</b> action) or through aggregation.</p> <p>AS paths are stored in a hash table. A hash table is one method for fast lookup. Each entry in the table is called a bucket. Junos OS computes a hash value that indicates in which bucket the AS path is stored. The AS paths are dispersed among the hash buckets so that a manageable number of AS paths is stored in each bucket. Only unique AS paths are stored. Duplicate AS paths increase a reference count, but do not increase the number of AS paths stored in the hash table.</p>
Options	<p><b>none</b>—Display basic information about AS paths that the local routing device is using (same as brief).</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"><li>• <a href="#">show as-path summary on page 224</a></li></ul>
List of Sample Output	<a href="#">show as-path on page 217</a> <a href="#">show as-path detail on page 218</a>
Output Fields	<a href="#">Table 6 on page 217</a> lists the output fields for the <b>show as-path</b> command. Output fields are listed in the approximate order in which they appear.



Table 6: show as-path Output Fields

Field Name	Field Description	Level of Output
<b>Total AS paths</b>	Total number of AS paths.	<b>brief none</b>
<b>Bucket</b>	Bucket number.	All levels
<b>Count</b>	Number of AS path entries in this bucket.	All levels
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> <li>• <b>Atomic</b>—Route is an aggregate of several route prefixes.</li> <li>• <b>Aggregator</b>—Routing device has summarized a range of prefixes.</li> </ul>	All levels
<b>domain</b>	Number of independent AS domains. The AS paths of an independent AS domain are not shared with the AS paths and AS path attributes of other domains, including the master routing instance domain.	<b>detail</b>
<b>neighbor as</b>	AS peer address.	<b>detail</b>
<b>length</b>	Length of the AS path.	<b>detail</b>
<b>segments</b>	Length of the AS segment descriptor.	<b>detail</b>
<b>unique-count</b>	Number of unique autonomous systems (ASs) present in the AS path	<b>detail</b>
<b>references</b>	Path reference count.	<b>detail</b>

## Sample Output

### show as-path

```

user@host> show as-path
Total AS paths: 30382
  Bucket 0      Count: 36
    I
    14203 2914 174 31752 I
    14203 2914 701 21512 I
    14203 2914 1239 26632 I
    14203 2914 1239 29704 I
    14203 2914 4323 10248 I
    14203 2914 4766 23560 I
    14203 2914 6395 32776 I
    14203 2914 7911 11272 I
    14203 2914 12180 18440 I
    14203 2914 17408 17416 I
    14203 2914 701 702 24586 I
    14203 2914 1239 4657 9226 I

```

```

14203 2914 1239 7132 16394 I
14203 2914 1299 8308 34826 I
14203 2914 3320 5603 28682 I
14203 2914 3491 1680 33802 I
14203 2914 3549 7908 27658 I
14203 2914 3549 20804 30730 I
14203 2914 7018 2687 9226 I
14203 2914 174 9318 9318 23564 I
14203 2914 701 3786 3786 23564 I
14203 2914 701 4761 4795 9228 I
14203 2914 1239 7132 5673 18444 I
14203 2914 3491 20485 24588 24588 I
14203 2914 5511 2200 1945 2060 I
14203 2914 7911 14325 14325 14348 I
14203 2914 701 4637 9230 9230 9230 I
14203 2914 6395 14 14 14 14 I
14203 2914 9299 6163 6163 6163 9232 I
14203 2914 3356 3356 3356 3356 11955 21522 I
14203 2914 9837 9837 9219 I Aggregator: 9219 202.27.91.253
14203 2914 174 30209 30222 30222 30222 ?
14203 2914 1299 5377 I (Atomic) Aggregator: 5377 193.219.192.22
14203 2914 4323 36097 I (Atomic) Aggregator: 36097 216.69.252.254
14203 2914 209 2516 17676 23813 I (Atomic) Aggregator: 23813 219.127.233.66
Bucket 1    Count: 28
14203 2914 35847 I
14203 2914 174 19465 I
14203 2914 174 35849 I
14203 2914 2828 32777 I
14203 2914 4323 14345 I
14203 2914 4323 29705 I
14203 2914 6395 32777 I

...

```

### show as-path detail

```

user@host> show as-path detail
Total AS paths: 30410
Bucket 0    Count: 36
  AS path: I
    domain 0, length 0, segments 0, unique-count 0, references 54
  AS path: 14203 2914 174 31752 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 701 21512 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 1239 26632 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 5,
references 2
  AS path: 14203 2914 1239 29704 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 4323 10248 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 6,
references 2
  AS path: 14203 2914 4766 23560 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 6395 32776 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 5,

```

```

references 3
  AS path: 14203 2914 7911 11272 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 6,
references 2
  AS path: 14203 2914 12180 18440 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 3,
references 3
  AS path: 14203 2914 17408 17416 I
    domain 1, neighbor as: 14203, length 4, segments 1, unique-count 8,
references 3
  AS path: 14203 2914 701 702 24586 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 4,
references 3
  AS path: 14203 2914 1239 4657 9226 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 5,
references 7
  AS path: 14203 2914 1239 7132 16394 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 7,
references 2
  AS path: 14203 2914 1299 8308 34826 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 8,
references 2
  AS path: 14203 2914 3320 5603 28682 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 3491 1680 33802 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 14,
references 2
  AS path: 14203 2914 3549 7908 27658 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 6,
references 2
  AS path: 14203 2914 3549 20804 30730 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 24,
references 2
  AS path: 14203 2914 7018 2687 9226 I
    domain 1, neighbor as: 14203, length 5, segments 1, unique-count 4,
references 3
  AS path: 14203 2914 174 9318 9318 23564 I
    domain 1, neighbor as: 14203, length 6, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 701 3786 3786 23564 I
    domain 1, neighbor as: 14203, length 6, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 701 4761 4795 9228 I
    domain 1, neighbor as: 14203, length 6, segments 1, unique-count 4,
references 14
  AS path: 14203 2914 1239 7132 5673 18444 I
    domain 1, neighbor as: 14203, length 6, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 3491 20485 24588 24588 I
    domain 1, neighbor as: 14203, length 6, segments 1, unique-count 4,
references 4
  AS path: 14203 2914 5511 2200 1945 2060 I
    domain 1, neighbor as: 14203, length 6, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 7911 14325 14325 14348 I
    domain 1, neighbor as: 14203, length 6, segments 1, unique-count 4,
references 2
  AS path: 14203 2914 701 4637 9230 9230 9230 I
    domain 1, neighbor as: 14203, length 7, segments 1, unique-count 4,
references 3

```

```
AS path: 14203 2914 6395 14 14 14 14 I
        domain 1, neighbor as: 14203, length 7, segments 1, unique-count 4,
references 10
...
```

## show as-path domain

<b>List of Syntax</b>	<a href="#">Syntax on page 221</a> <a href="#">Syntax (EX Series Switches) on page 221</a>
<b>Syntax</b>	show as-path domain <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show as-path domain
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display autonomous system (AS) path domain information.
<b>Options</b>	<b>none</b> —(Optional) Display AS path domain information for all routing instances.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show as-path domain on page 223</a>
<b>Output Fields</b>	<a href="#">Table 7 on page 221</a> lists the output fields for the <b>show as-path domain</b> command. Output fields are listed in the approximate order in which they appear

**Table 7: show as-path domain Output Fields**

Field Name	Field Description
<b>Domain</b>	Number of independent AS domains. The AS paths of an independent AS domain are not shared with the AS paths and AS path attributes of other domains, including the master routing instance domain.
<b>Primary</b>	Primary AS number.
<b>References</b>	Path reference count.
<b>Number Paths</b>	Number of known AS paths.

Table 7: show as-path domain Output Fields (*continued*)

Field Name	Field Description
<b>Flags</b>	Information about the AS path: <ul style="list-style-type: none"><li>• <b>ASLoop</b>—Path contains an AS loop.</li><li>• <b>Atomic</b>—Path includes the ATOMIC_AGGREGATE path attribute.</li><li>• <b>Local</b>—Path was created by local aggregation.</li><li>• <b>Master</b>—Path was created by the master routing instance.</li></ul>
<b>Local AS</b>	AS number of the local routing device.
<b>Loops</b>	How many times this AS number can appear in an AS path.

## Sample Output

`show as-path domain`

```
user@host> show as-path domain
Domain: 1          Primary: 10458
References:        3 Paths:      30383
Flags: Master
Local AS: 10458   Loops: 1
```

## show as-path summary

<b>List of Syntax</b>	<a href="#">Syntax on page 224</a> <a href="#">Syntax (EX Series Switches) on page 224</a>
<b>Syntax</b>	show as-path summary <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show as-path summary
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	<p>Display autonomous system (AS) path summary information.</p> <p>AS paths are stored in a hash table. A hash table is one method for fast lookup. Each entry in the table is called a bucket. Junos OS computes a hash value that indicates in which bucket the AS path is stored. The AS paths are dispersed among the hash buckets so that a manageable number of AS paths is stored in each bucket. Only unique AS paths are stored. Duplicate AS paths increase a reference count, but do not increase the number of AS paths stored in the hash table.</p>
<b>Options</b>	<p><b>none</b>—(Optional) Display AS path summary information for all routing instances.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show as-path on page 216</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show as-path summary on page 225</a>
<b>Output Fields</b>	<p><a href="#">Table 8 on page 224</a> lists the output fields for the <b>show as-path summary</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 8: show as-path summary Output Fields**

Field Name	Field Description
AS Paths	Number of AS paths.
Buckets	Number of hash buckets in use.
Max	Maximum number of AS path entries per bucket.



Table 8: show as-path summary Output Fields (*continued*)

Field Name	Field Description
<b>Min</b>	Minimum number of AS path entries per bucket.
<b>Avg</b>	Average number of AS path entries per bucket.
<b>Std deviation</b>	Standard deviation of AS path entries per bucket.

## Sample Output

show as-path summary

```
user@host> show as-path summary
AS Paths  Buckets  Max   Min   Avg   Std deviation
30425     1024     95    12    29    6.481419
```

## show ipv6 neighbors

**Syntax** `show ipv6 neighbors`

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.3 for EX Series switches.  
 Command introduced in Junos OS Release 12.2 for the QFX Series.  
 Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Display information about the IPv6 neighbor cache.



**NOTE:** Starting with Junos OS Release 16.1, `show ipv6 neighbors` command does not display the underlying ifl information if enhanced-convergence statement at `[edit irb unit unit-number]` hierarchy level and enhanced-ip statement at `[edit chassis network-services]` hierarchy level is configured for the destination interface IRB.

**Options** This command has no options.

**Required Privilege Level** view

**Related Documentation** • [clear ipv6 neighbors on page 215](#)

**List of Sample Output** [show ipv6 neighbors on page 227](#)  
[show ipv6 neighbors on page 227](#)

**Output Fields** [Table 9 on page 226](#) describes the output fields for the `show ipv6 neighbors` command. Output fields are listed in the approximate order in which they appear.

**Table 9: show ipv6 neighbors Output Fields**

Field Name	Field Description
IPv6 Address	Name of the IPv6 interface.
Linklayer Address	Link-layer address.
State	State of the link: <b>up</b> , <b>down</b> , <b>incomplete</b> , <b>reachable</b> , <b>stale</b> , or <b>unreachable</b> .
Exp	Number of seconds until the entry expires.
Rtr	Whether the neighbor is a routing device: <b>yes</b> or <b>no</b> .

Table 9: show ipv6 neighbors Output Fields (*continued*)

Field Name	Field Description
<b>Secure</b>	Whether this entry was created using the Secure Neighbor Discovery (SEND) protocol: <b>yes</b> or <b>no</b> .
<b>Interface</b>	Name of the interface.

## Sample Output

### show ipv6 neighbors

```

user@host> show ipv6 neighbors
IPv6 Address      Linklayer Address  State      Exp Rtr Secure
Interface
2001:db8:0:1:2a0:a514:0:24c  00:05:85:8f:c8:bd  stale      546 yes no
fe-1/2/0.1
fe80::2a0:a514:0:24c      00:05:85:8f:c8:bd  stale      258 yes no
fe-1/2/0.1
fe80::2a0:a514:0:64c      00:05:85:8f:c8:bd  stale      111 yes no
fe-1/2/1.5
fe80::2a0:a514:0:a4c      00:05:85:8f:c8:bd  stale      327 yes no
fe-1/2/2.9

```

### show ipv6 neighbors

The command displaying the underlying l2 ifl information when **enhanced-convergence** statement and **enhanced-ip** statement is not configured.

```

IPv6 Address      Linklayer Address  State      Exp Rtr Secure
Interface
23::23:0:0:2      00:00:23:00:00:02  reachable  0   no  no      irb.0
[xe-2/2/0.0]

```

The command not displaying the underlying l2 ifl information when **enhanced-convergence** statement and **enhanced-ip** statement is configured.

```

IPv6 Address      Linklayer Address  State      Exp Rtr Secure
Interface
23::23:0:0:2      00:00:23:00:00:02  reachable  0   no  no      irb.0

```

## show ipv6 router-advertisement

---

<b>Syntax</b>	<code>show ipv6 router-advertisement</code> <code>&lt;conflicts&gt;</code> <code>&lt;interface <i>interface</i>&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code> <code>&lt;prefix <i>prefix/prefix length</i>&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 12.2 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Display information about IPv6 router advertisements, including statistics about messages sent and received on interfaces, and information received from advertisements from other routers.
<b>Options</b>	<b>none</b> —Display all IPv6 router advertisement information for all interfaces.  <b>conflicts</b> —(Optional) Display only the IPv6 router advertisement information that is conflicting.  <b>interface <i>interface</i></b> —(Optional) Display IPv6 router advertisement information for the specified interface.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b>prefix <i>prefix/prefix length</i></b> —(Optional) Display IPv6 router advertisement information for the specified prefix.
<b>Additional Information</b>	The display identifies conflicting information by enclosing the value the router is advertising in brackets.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">clear ipv6 router-advertisement</a></li></ul>
<b>List of Sample Output</b>	<a href="#">show ipv6 router-advertisement on page 229</a> <a href="#">show ipv6 router-advertisement conflicts on page 230</a> <a href="#">show ipv6 router-advertisement prefix on page 230</a>
<b>Output Fields</b>	<a href="#">Table 10 on page 229</a> describes the output fields for the <b>show ipv6 router-advertisement</b> command. Output fields are listed in the approximate order in which they appear.

Table 10: show ipv6 router-advertisement Output Fields

Field Name	Field Description
<b>Interface</b>	Name of the interface.
<b>Advertisements sent</b>	Number of router advertisements sent and the elapsed time since they were sent.
<b>Solicits received</b>	Number of solicitation messages received.
<b>Advertisements received</b>	Number of router advertisements received.
<b>Advertisements from</b>	Names of interfaces from which router advertisements have been received and the elapsed time since the last one was received.
<b>Managed</b>	Managed address configuration flag: 0 (stateless) or 1 (stateful).
<b>Other configuration</b>	Other stateful configuration flag: 0 (stateless) or 1 (stateful).
<b>Reachable time</b>	Time that a node identifies a neighbor as reachable after receiving a reachability confirmation, in milliseconds.
<b>Default lifetime</b>	Default lifetime, in seconds: from 0 seconds to 18.2 hours. A setting of 0 indicates that the router is not a default router.
<b>Retransmit timer</b>	Time between retransmitted Neighbor Solicitation messages, in milliseconds.
<b>Current hop limit</b>	Configured current hop limit.
<b>Prefix</b>	Name and length of the prefix.
<b>Valid lifetime</b>	How long the prefix remains valid for onlink determination.
<b>Preferred lifetime</b>	How long the prefix generated by stateless autoconfiguration remains preferred.
<b>On link</b>	Onlink flag: 0 (not onlink) or 1 (onlink).
<b>Autonomous</b>	Autonomous address configuration flag: 0 (not autonomous) or 1 (autonomous).

## Sample Output

### show ipv6 router-advertisement

```

user@host> show ipv6 router-advertisement
Interface: fe-0/1/1.0
  Advertisements sent: 0
  Solicits received: 0
  Advertisements received: 0
Interface: fxp0.0
  Advertisements sent: 0
  Solicits received: 0
  Advertisements received: 1

```

```
Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:00:13 ago
Managed: 0
Other configuration: 0 [1]
  Reachable time: 0 ms
  Default lifetime: 1800 sec
  Retransmit timer: 0 ms
  Current hop limit: 64
```

#### show ipv6 router-advertisement conflicts

```
user@host> show ipv6 router-advertisement conflicts
Interface: fxp0.0
  Advertisement from fe80::2d0:b7ff:fe1e:7b0e, heard 00:01:08 ago
  Other configuration: 0 [1]
```

#### show ipv6 router-advertisement prefix

```
user@host> show ipv6 router-advertisement prefix 2001:db8:8040::/16
Interface: fe-0/1/3.0
  Advertisements sent: 3, last sent 00:04:11 ago
  Solicits received: 0
  Advertisements received: 3
  Advertisement from fe80::290:69ff:fe9a:5403, heard 00:00:05 ago
  Managed: 0
  Other configuration: 0
  Reachable time: 0 ms
  Default lifetime: 180 sec [1800 sec]
  Retransmit timer: 0 ms
  Current hop limit: 64
  Prefix: 2001:db8:8040:1::/64
    Valid lifetime: 2592000 sec
    Preferred lifetime: 604800 sec
    On link: 1
    Autonomous: 1
```

## show route

**List of Syntax**    [Syntax on page 231](#)  
                           [Syntax \(EX Series Switches\) on page 231](#)

**Syntax**    show route  
                   <all>  
                   <destination-prefix>  
                   <logical-system (all | *logical-system-name*)>  
                   <private>  
                   <te-ipv4-prefix-ip *te-ipv4-prefix-ip*>  
                   <te-ipv4-prefix-node-ip *te-ipv4-prefix-node-ip*>  
                   <te-ipv4-prefix-node-iso *te-ipv4-prefix-node-iso*>

**Syntax (EX Series Switches)**    show route  
   <all>  
   <destination-prefix>  
   <private>

**Release Information**    Command introduced before Junos OS Release 7.4.  
                                   Command introduced in Junos OS Release 9.0 for EX Series switches.  
                                   Option **private** introduced in Junos OS Release 9.5.  
                                   Option **private** introduced in Junos OS Release 9.5 for EX Series switches.  
                                   Command introduced in Junos OS Release 15.1R3 on MX Series routers for enhanced subscriber management.  
                                   Option **display-client-data** introduced in Junos OS Release 16.2R1 on MX80, MX104, MX240, MX480, MX960, MX2010, MX2020, vMX Series routers.  
                                   Options **te-ipv4-prefix-ip**, **te-ipv4-prefix-node-ip**, and **te-ipv4-prefix-node-iso** introduced in Junos OS Release 17.2R1 on MX Series and PTX Series.

**Description**    Display the active entries in the routing tables.

**Options**    **none**—Display brief information about all active entries in the routing tables.

**all**—(Optional) Display information about all routing tables, including private, or internal, routing tables.

**destination-prefix**—(Optional) Display active entries for the specified address or range of addresses.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**private**—(Optional) Display information only about all private, or internal, routing tables.

**display-client-data** —(Optional) Display client id and cookie information for routes installed by the routing protocol process client applications.

**te-ipv4-prefix-ip *te-ipv4-prefix-ip***—(Optional) Display IPv4 address of the traffic-engineering prefix, without the mask length if present in the routing table.

**te-ipv4-prefix-node-ip** *te-ipv4-prefix-node-ip*—(Optional) Display all prefixes that have originated from the traffic-engineering node. You can filter IPv4 node addresses from the traffic-engineered routes in the **lsdist.0** table.

**te-ipv4-prefix-node-iso** *te-ipv4-prefix-node-iso*—(Optional) Display all prefixes that have originated from the traffic-engineering node. You can filter IPv4 routes with the specified ISO circuit ID from the **lsdist.0** table.

**Required Privilege Level**

view

**Related Documentation**

- *Understanding IS-IS Configuration*
- *Example: Configuring IS-IS*
- *Examples: Configuring Internal BGP Peering*
- *Examples: Configuring External BGP Peering*
- *Examples: Configuring OSPF Routing Policy*
- *Verifying and Managing Junos OS Enhanced Subscriber Management*

**List of Sample Output**

[show route on page 235](#)  
[show route \(VPN\) on page 236](#)  
[show route \(with Destination Prefix\) on page 236](#)  
[show route destination-prefix detail on page 236](#)  
[show route extensive on page 236](#)  
[show route extensive \( ECMP\) on page 237](#)  
[show route extensive \(Multipath Resolution\) on page 237](#)  
[show route \(Enhanced Subscriber Management\) on page 241](#)  
[show route \(IPv6 Flow Specification\) on page 242](#)  
[show route display-client-data detail on page 242](#)  
[show route te-ipv4-prefix-ip on page 243](#)  
[show route te-ipv4-prefix-ip extensive on page 243](#)  
[show route te-ipv4-prefix-node-iso on page 246](#)  
[show route te-ipv4-prefix-node-iso extensive on page 246](#)  
[show route te-ipv4-prefix-node-iso detail on page 249](#)

**Output Fields**

[Table 11 on page 232](#) describes the output fields for the **show route** command. Output fields are listed in the approximate order in which they appear.

**Table 11: show route Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.



Table 11: show route Output Fields (*continued*)

Field Name	Field Description
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active).</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive). A holddown route was once the active route and is no longer the active route. The route is in the holddown state because a protocol still has interest in the route, meaning that the interest bit is set. A protocol might have its interest bit set on the previously active route because the protocol is still advertising the route. The route will be deleted after all protocols withdraw their advertisement of the route and remove their interest bit. A persistent holddown state often means that the interested protocol is not releasing its interest bit properly.</li> </ul> <p>However, if you have configured advertisement of multiple routes (with the <b>add-path</b> or <b>advertise-inactive</b> statement), the holddown bit is most likely set because BGP is advertising the route as an active route. In this case, you can ignore the holddown state because nothing is wrong.</p> <ul style="list-style-type: none"> <li>• <b>hidden</b> (routes that are not used because of a routing policy).</li> </ul>
<i>destination-prefix</i>	<p>Route destination (for example:10.0.0.1/24). Sometimes the route information is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only. For example, 10.1.1.195:NoCtrlWord:1:1:Local/96): <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>
[ <i>protocol, preference</i> ]	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>
<i>weeks:days hours:minutes:seconds</i>	How long the route been known (for example, <b>2w4d 13:11:14</b> , or 2 weeks, 4 days, 13 hours, 11 minutes, and 14 seconds).
<i>metric</i>	Cost value of the indicated route. For routes within an AS, the cost is determined by the IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.

Table 11: show route Output Fields (*continued*)

Field Name	Field Description
<b>localpref</b>	Local preference value included in the route.
<b>from</b>	Interface from which the route was received.
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
<b>encapsulated</b>	Extended next-hop encoding capability enabled for the specified BGP community for routing IPv4 traffic over IPv6 tunnels. When BGP receives routes without the tunnel community, IPv4-Over IPv6 tunnels are not created and BGP routes are resolved without encapsulation.
<b>Route Labels</b>	Stack of labels carried in the BGP route update.
<b>validation-state</b>	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>
<b>to</b>	<p>Next hop to the destination. An angle bracket (&gt;) indicates that the route is the selected route.</p> <p>If the destination is <b>Discard</b>, traffic is dropped.</p>

Table 11: show route Output Fields (*continued*)

Field Name	Field Description
via	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> <li>• <b>lsp-path-name</b>—Name of the LSP used to reach the next hop.</li> <li>• <b>label-action</b>—MPLS label and operation occurring at the next hop. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label). For VPNs, expect to see multiple <b>push</b> operations, corresponding to the inner and outer labels required for VPN routes (in the case of a direct PE-to-PE connection, the VPN route would have the inner label push only).</li> </ul>
Private unicast	(Enhanced subscriber management for MX Series routers) Indicates that an access-internal route is managed by enhanced subscriber management. By contrast, access-internal routes <i>not</i> managed by enhanced subscriber management are displayed with associated next-hop and media access control (MAC) address information.
balance	Distribution of the load based on the underlying operational interface bandwidth for equal-cost multipaths (ECMP) across the nexthop gateways in percentages.

## Sample Output

### show route

```

user@host> show route
inet.0: 11 destinations, 12 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:65500:1:10.0.0.20/240
    * [MVPN/70] 19:53:41, metric2 1
    Indirect
1:65500:1:10.0.0.40/240
    * [BGP/170] 19:53:29, localpref 100, from 10.0.0.30
    AS path: I
    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
    [BGP/170] 19:53:26, localpref 100, from 10.0.0.33
    AS path: I
    > to 10.0.24.4 via lt-0/3/0.24, label-switched-path toD
1:65500:1:10.0.0.60/240
    * [BGP/170] 19:53:29, localpref 100, from 10.0.0.30
    AS path: I
    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF
    [BGP/170] 19:53:25, localpref 100, from 10.0.0.33
    AS path: I
    > to 10.0.28.8 via lt-0/3/0.28, label-switched-path toF

```

### show route (VPN)

The following sample output shows a VPN route with composite next hops enabled. The first **Push** operation corresponds to the outer label. The second **Push** operation corresponds to the inner label.

```
user@host> show route 192.0.2.0
```

```
13979:665001.inet.0: 871 destinations, 3556 routes (871 active, 0 holddown, 0 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

```
192.0.2.0/24      [BGP/170] 00:28:32, localpref 100, from 10.9.9.160
                  AS path: 13980 ?, validation-state: unverified
                  > to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
                  [BGP/170] 00:28:28, localpref 100, from 10.9.9.169
                  AS path: 13980 ?, validation-state: unverified
                  > to 10.100.0.42 via ae2.0, Push 126016, Push 300368(top)
                  #[Multipath/255] 00:28:28, metric2 102
                  > to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
                  to 10.100.0.42 via ae2.0, Push 16, Push 300368(top)
```

### show route (with Destination Prefix)

```
user@host> show route 172.16.0.0/12
```

```
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

```
172.16.0.0/12    *[Static/5] 2w4d 12:54:27
                  > to 192.168.167.254 via fxp0.0
```

### show route destination-prefix detail

```
user@host> show route 198.51.100.0 detail
```

```
inet.0: 15 destinations, 20 routes (15 active, 0 holddown, 0 hidden)
```

```
198.51.100.0/24 (2 entries, 2 announced)
```

```
*BGP Preference: 170/-101
```

```
...
```

```
BGP-Static Preference: 4294967292
```

```
Next hop type: Discard
```

```
Address: 0x9041ae4
```

```
Next-hop reference count: 2
```

```
State: <NoReadvrt Int Ext AlwaysFlash>
```

```
Inactive reason: Route Preference
```

```
Local AS: 200
```

```
Age: 4d 1:40:40
```

```
Validation State: unverified
```

```
Task: RT
```

```
Announcement bits (1): 2-BGP_RT_Background
```

```
AS path: 4 5 6 I
```

### show route extensive

```
user@host> show route extensive
```

```
v1.mvpn.0: 5 destinations, 8 routes (5 active, 1 holddown, 0 hidden)
```

```
1:65500:1:10.0.0.40/240 (1 entry, 1 announced)
```

```
*BGP Preference: 170/-101
```

```

PMSI: Flags 0x0: Label[0:0:0]: PIM-SM: Sender 10.0.0.40 Group
203.0.113.1
Next hop type: Indirect
Address: 0x92455b8
Next-hop reference count: 2
Source: 10.0.0.30
Protocol next hop: 10.0.0.40
Indirect next hop: 2 no-forward
State: <Active Int Ext>
    Local AS: 64510 Peer AS: 64511
Age: 3 Metric2: 1
Validation State: unverified
Task: BGP_64510.10.0.0.30+179
Announcement bits (2): 0-PIM.v1 1-mvpn global task
AS path: I (Originator) Cluster list: 10.0.0.30
AS path: Originator ID: 10.0.0.40
Communities: target:64502:100 encapsulation:0L:14 Import
Accepted
Localpref: 100
Router ID: 10.0.0.30
Primary Routing Table bgp.mvpn.0
Indirect next hops: 1
    Protocol next hop: 10.0.0.40 Metric: 1
    Indirect next hop: 2 no-forward
    Indirect path forwarding next hops: 1
        Next hop type: Router
        Next hop: 10.0.24.4 via lt-0/3/0.24 weight 0x1
    10.0.0.40/32 Originating RIB: inet.3
        Metric: 1 Node path count: 1
        Forwarding nexthops: 1
            Nexthop: 10.0.24.4 via lt-0/3/0.24

```

### show route extensive ( ECMP)

```

user@host> show route extensive
*IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 1048577
    Address: 0xFFFFFFFF
    Next-hop reference count: YY
    Next hop: 172.16.50.2 via ae1.0 balance 43%, selected
    Session Id: 0x141
    Next hop: 192.0.2.2 via ae0.0 balance 57%

```

### show route extensive (Multipath Resolution)

```

user@host> show route extensive
inet.0: 37 destinations, 37 routes (36 active, 0 holddown, 1 hidden)
10.1.1.2/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.1.1.2/32 -> {indirect(1048574)}
*Static Preference: 5
    Next hop type: Indirect, Next hop index: 0
    Address: 0xb39d1b0
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 581
    Next hop: 12.1.1.2 via ge-2/0/1.0, selected
    Session Id: 0x144
    Next hop: 13.1.1.2 via ge-2/0/2.0, selected
    Session Id: 0x145

```

```

Protocol next hop: 10.1.1.1
Indirect next hop: 0xb2b20f0 1048574 INH Session ID: 0x143
State: <Active Int Ext>
Age: 2:53 Metric2: 0
Validation State: unverified
Task: RT
Announcement bits (2): 0-KRT 2-Resolve tree 1
AS path: I
Indirect next hops: 1
    Protocol next hop: 10.1.1.1
    Indirect next hop: 0xb2b20f0 1048574 INH Session ID: 0x143

    Indirect path forwarding next hops: 2
        Next hop type: Router
        Next hop: 12.1.1.2 via ge-2/0/1.0
        Session Id: 0x144
        Next hop: 13.1.1.2 via ge-2/0/2.0
        Session Id: 0x145
10.1.1.1/32 Originating RIB: inet.0
    Node path count: 1
    Node flags: 1
    Forwarding nexthops: 2 (Merged)
    Nexthop: 12.1.1.2 via ge-2/0/1.0
    Nexthop: 13.1.1.2 via ge-2/0/2.0

user@host> show route active-path extensive
user@host> show route 141.1.1.1 active-path extensive

inet.0: 1000061 destinations, 1000082 routes (1000061 active, 0 holddown, 0 hidden)
141.1.1.1/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 141.1.1.1/32 -> {indirect(1051215)}
unicast reverse-path: 0
[ae0.0 ae1.0]
Page 0 idx 0, (group Internet-IPv4 type External) Type 1 val 0xbb2e53d8 (adv_entry)
Advertised metrics:
Nexthop: Self
AS path: [500] 410 I
Communities:
Path 141.1.1.1 from 50.0.0.11 Vector len 4. Val: 0
*BGP Preference: 170/-101
Next hop type: Indirect, Next hop index: 0
Address: 0x2e9aacdc
Next-hop reference count: 500000
Source: 50.0.0.11
Next hop type: Router, Next hop index: 0
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 25, Push 20(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 20: None;
Label element ptr: 0xb5dc1780
Label parent element ptr: 0x18d48080
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 25, Push 22(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 22: None;
Label element ptr: 0xb5dc1700
Label parent element ptr: 0x18d41000

```

```

Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 24, Push 48(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 48: None;
Label element ptr: 0x18d40800
Label parent element ptr: 0x18d49780
Label element references: 3
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Label operation: Push 3851, Push 24, Push 49(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 49: None;
Label element ptr: 0xb5dc1680
Label parent element ptr: 0x18d48f00
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1
Label operation: Push 3851, Push 25, Push 21(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 21: None;
Label element ptr: 0xb5dc1600
Label parent element ptr: 0x18d44d80
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1
Label operation: Push 3851, Push 25, Push 25(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 25: None; Label 25: None;
Label element ptr: 0xb5dc1580
Label parent element ptr: 0x18d3da80
Label element references: 2
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1, selected
Label operation: Push 3851, Push 24, Push 68(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 68: None;
Label element ptr: 0x18d41500
Label parent element ptr: 0x18d49000
Label element references: 3
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1
Label operation: Push 3851, Push 24, Push 69(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 3851: None; Label 24: None; Label 69: None;
Label element ptr: 0xb5dc1500
Label parent element ptr: 0x18d48300
Label element references: 2

```

```
Label element child references: 0
Label element lsp id: 0
Session Id: 0x0
Protocol next hop: 50.0.0.11
Label operation: Push 3851
Label TTL action: prop-ttl
Load balance label: Label 3851: None;
Indirect next hop: 0x1883e200 1051215 INH Session ID: 0xb0d
State:
Local AS: 500 Peer AS: 500
Age: 1:40:03 Metric2: 2
Validation State: unverified
Task: BGP_500.50.0.0.11
Announcement bits (5): 0-KRT 8-KRT 9-BGP_RT_Background 10-Resolve tree 5 11-Resolve
tree 8
AS path: 410 I
Accepted
Route Label: 3851
Localpref: 100
Router ID: 50.0.0.11
Indirect next hops: 1
Protocol next hop: 50.0.0.11 Metric: 2
Label operation: Push 3851
Label TTL action: prop-ttl
Load balance label: Label 3851: None;
Indirect next hop: 0x1883e200 1051215 INH Session ID: 0xb0d
Indirect path forwarding next hops (Merged): 8
Next hop type: Router
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 50.0.12.2 via ae0.0 weight 0x1
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
Next hop: 50.0.13.3 via ae1.0 weight 0x1
Session Id: 0x0
50.0.0.11/32 Originating RIB: inet.3
Metric: 1 Node path count: 4
Node flags: 1
Indirect nexthops: 4
Protocol Nexthop: 50.0.0.4 Metric: 1 Push 24
Indirect nexthop: 0x1880f200 1048597 INH Session ID: 0xb0c
Path forwarding nexthops link: 0x36120400
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0
50.0.0.4/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
```



```

Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0
Protocol Nexthop: 50.0.0.5 Metric: 1 Push 24
Indirect nexthop: 0x18810000 1048596 INH Session ID: 0xb0b
Path forwarding nexthops link: 0x1545be00
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0
50.0.0.5/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0
Protocol Nexthop: 50.0.0.6 Metric: 1 Push 25
Indirect nexthop: 0x1880e600 1048588 INH Session ID: 0xb0a
Path forwarding nexthops link: 0x3611f440
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0
50.0.0.6/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0
Protocol Nexthop: 50.0.0.7 Metric: 1 Push 25
Indirect nexthop: 0x1880dc00 1048586 INH Session ID: 0xb09
Path forwarding nexthops link: 0x15466d80
Path inh link: 0x0
Indirect path forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0
50.0.0.7/32 Originating RIB: inet.3
Metric: 1 Node path count: 1
Forwarding nexthops: 2
Nexthop: 50.0.12.2 via ae0.0
Session Id: 0
Nexthop: 50.0.13.3 via ae1.0
Session Id: 0

```

### show route (Enhanced Subscriber Management)

```

user@host> show route
inet.0: 41 destinations, 41 routes (40 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

198.51.100.11/24    *[Access-internal/12] 00:00:08
> to #0 10.0.0.1.93.65 via demux0.1073741824

```

```
198.51.100.12/24    *[Access-internal/12] 00:00:08
                  Private unicast
```

### show route (IPv6 Flow Specification)

```
user@host> show route
inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::10:255:185:19/128
    *[Direct/0] 05:11:27
    > via lo0.0
2001:db8::11:11:11:0/120
    *[BGP/170] 00:28:58, localpref 100
    AS path: 2000 I, validation-state: unverified
    > to 2001:db8::13:14:2:2 via ge-1/1/4.0
2001:db8::13:14:2:0/120*[Direct/0] 00:45:07
    > via ge-1/1/4.0
2001:db8::13:14:2:1/128*[Local/0] 00:45:18
    Local via ge-1/1/4.0
fe80::2a0:a50f:fc71:71d5/128
    *[Direct/0] 05:11:27
    > via lo0.0
fe80::5e5e:abff:feb0:933e/128
    *[Local/0] 00:45:18
    Local via ge-1/1/4.0

inet6flow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::11:11:11:10/128,* ,proto=6,dstport=80,srcport=65535/term:1
    *[BGP/170] 00:28:58, localpref 100, from 2001:db8::13:14:2:2
    AS path: 2000 I, validation-state: unverified
    Fictitious
2001:db8::11:11:11:30/128,* ,icmp6-type=128,len=100,dscp=10/term:2
    *[BGP/170] 00:20:54, localpref 100, from 2001:db8::13:14:2:2
    AS path: 2000 I, validation-state: unverified
    Fictitious
```

### show route display-client-data detail

```
user@host> show route 198.51.100.0/24 display-client-data detail
inet.0: 59 destinations, 70 routes (59 active, 0 holddown, 0 hidden)
198.51.100.0/24 (1 entry, 1 announced)
    State: <FlashAll>
    *BGP-Static Preference: 5/-101
    Next hop type: Indirect, Next hop index: 0
    Address: 0xa5c2af8
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 1641
    Next hop: 192.0.2.1 via ge-2/1/1.0, selected
    Session Id: 0x160
    Protocol next hop: 192.0.2.1
    Indirect next hop: 0xa732cb0 1048621 INH Session ID: 0x17e
    State: <Active Int Ext AlwaysFlash NSR-incapable Programmed>
    Age: 3:13 Metric2: 0
    Validation State: unverified
    Announcement bits (3): 0-KRT 5-LDP 6-Resolve tree 3
```

```
AS path: I
Client id: 1, Cookie: 1
```

### show route te-ipv4-prefix-ip

```
user@host> show route te-ipv4-prefix-ip 10.10.10.10
lsdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0
}/1152
      *[IS-IS/15] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0101.0101.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0202.0202.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0303.0303.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0404.0404.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0505.0505.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0606.0606.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0707.0707.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:01:01
      Fictitious
```

### show route te-ipv4-prefix-ip extensive

```
user@host> show route te-ipv4-prefix-ip 10.10.10.10 extensive
lsdist.0: 298 destinations, 298 routes (298 active, 0 holddown, 0 hidden)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:
    State:<Active NotInstall>
    Local AS: 100
    Age: 7:58
```

```

Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0x40, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0101.0101.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
      Age: 7:58
      Validation State: unverified
      Task: IS-IS
      AS path: I
      Prefix SID: 1000, Flags: 0xe0, Algo: 0>

PREFIX { Node { AS:100 ISO:0100.0202.0202.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
      Age: 7:58
      Validation State: unverified
      Task: IS-IS
      AS path: I
      Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0303.0303.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
      Age: 7:58
      Validation State: unverified
      Task: IS-IS
      AS path: I
      Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0404.0404.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 298
    Next hop:

```

```

State: <Active NotInstall>
Local AS: 100
Age: 7:58
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0505.0505.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 298
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 7:58
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0606.0606.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 298
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 7:58
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0707.0707.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 298
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 7:58
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0

```

```

Address: 0xa1a2ac4
Next-hop reference count: 298
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 7:58
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1000, Flags: 0x40, Algo: 0

```

### show route te-ipv4-prefix-node-iso

```

user@host> show route te-ipv4-prefix-node-iso 0100.0a0a.0a0a.00
Isdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0
}/1152
      *[IS-IS/15] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:1.1.1.1/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:2.2.2.2/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:3.3.3.3/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:4.4.4.4/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:5.5.5.5/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:6.6.6.6/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:7.7.7.7/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152
      *[IS-IS/18] 00:05:20
      Fictitious

```

### show route te-ipv4-prefix-node-iso extensive

```

user@host> show route te-ipv4-prefix-node-iso 0100.0a0a.0a0a.00 extensive
Isdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0

```

```

}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0x40, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:1.1.1.1/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1001, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:2.2.2.2/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1002, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:3.3.3.3/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I

```

```
Prefix SID: 1003, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:4.4.4.4/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1004, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:5.5.5.5/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1005, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:6.6.6.6/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1006, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:7.7.7.7/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
```



```

Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1007, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:47
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0x40, Algo: 0

```

#### show route te-ipv4-prefix-node-iso detail

```

user@host> show route te-ipv4-prefix-node-iso 0100.0a0a.0a0a.00 detail
lsdist.0: 283 destinations, 283 routes (283 active, 0 holddown, 0 hidden)
PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L1:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0x40, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:1.1.1.1/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1001, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:2.2.2.2/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18

```

```
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 283
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 6:54
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1002, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:3.3.3.3/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 283
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 6:54
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1003, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:4.4.4.4/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 283
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 6:54
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1004, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:5.5.5.5/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
*IS-IS Preference: 18
Level: 2
Next hop type: Fictitious, Next hop index: 0
Address: 0xa1a2ac4
Next-hop reference count: 283
Next hop:
State: <Active NotInstall>
Local AS: 100
Age: 6:54
Validation State: unverified
Task: IS-IS
AS path: I
Prefix SID: 1005, Flags: 0xe0, Algo: 0
```

```

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:6.6.6.6/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1006, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:7.7.7.7/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1007, Flags: 0xe0, Algo: 0

PREFIX { Node { AS:100 ISO:0100.0a0a.0a0a.00 } { IPv4:10.10.10.10/32 } ISIS-L2:0
}/1152 (1 entry, 0 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Fictitious, Next hop index: 0
    Address: 0xa1a2ac4
    Next-hop reference count: 283
    Next hop:
    State: <Active NotInstall>
    Local AS: 100
    Age: 6:54
    Validation State: unverified
    Task: IS-IS
    AS path: I
    Prefix SID: 1000, Flags: 0x40, Algo: 0

```

## show route active-path

---

<b>List of Syntax</b>	<a href="#">Syntax on page 252</a> <a href="#">Syntax (EX Series Switches) on page 252</a>
<b>Syntax</b>	<code>show route active-path</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route active-path</code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 8.0. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display all active routes for destinations. An active route is a route that is selected as the best path. Inactive routes are not displayed.
<b>Options</b>	<b>none</b> —Display all active routes.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route active-path on page 252</a> <a href="#">show route active-path brief on page 253</a> <a href="#">show route active-path detail on page 253</a> <a href="#">show route active-path extensive on page 254</a> <a href="#">show route active-path terse on page 256</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route active-path

```
user@host> show route active-path

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.70.19/32    *[Direct/0] 21:33:52
```

```

> via lo0.0
10.255.71.50/32 * [IS-IS/15] 00:18:13, metric 10
> to 172.16.100.1 via so-2/1/3.0
172.16.100.1/24 * [Direct/0] 00:18:36
> via so-2/1/3.0
172.16.100.1/32 * [Local/0] 00:18:41
Local via so-2/1/3.0
192.168.64.0/21 * [Direct/0] 21:33:52
> via fxp0.0
192.168.70.19/32 * [Local/0] 21:33:52
Local via fxp0.0

```

### show route active-path brief

The output for the **show route active-path brief** command is identical to that for the **show route active-path** command. For sample output, see [show route active-path on page 252](#).

### show route active-path detail

```

user@host> show route active-path detail

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)

10.255.70.19/32 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

10.255.71.50/32 (1 entry, 1 announced)
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 397
    Next-hop reference count: 4
    Next hop: 172.16.100.1 via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:31 Metric: 10
    Task: IS-IS
    Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
    AS path: I

172.16.100.0/24 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:54
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

```

```

AS path: I

172.16.100.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: so-2/1/3.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 21:59
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.64.0/21 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via fxp0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.70.19/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: fxp0.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 21:37:10
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

```

### show route active-path extensive

```

user@host> show route active-path extensive

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
10.255.70.19/32 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:39:47
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

AS path: I

10.255.71.50/32 (1 entry, 1 announced)

```

```

TSI:
KRT in-kernel 10.255.71.50/32 -> {172.16.100.1}
IS-IS level 2, LSP fragment 0
  *IS-IS Preference: 15
    Level: 1
    Next hop type: Router, Next hop index: 397
    Next-hop reference count: 4
    Next hop: 172.16.100.1 via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 24:08 Metric: 10
    Task: IS-IS
    Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
    AS path: I

172.16.100.1/24 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via so-2/1/3.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 24:31
    Task: IF
    Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

172.16.100.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: so-2/1/3.0
    State: <Active NoReadvrt Int>
    Local AS: 200
    Age: 24:36
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.64.0/21 (1 entry, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 3
    Next hop: via fxp0.0, selected
    State: <Active Int>
    Local AS: 200
    Age: 21:39:47
    Task: IF
    Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
    AS path: I

192.168.70.19/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 11
    Interface: fxp0.0

```

```

State: <Active NoReadvrt Int>
Local AS: 200
Age: 21:39:47
Task: IF
Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
AS path: I

```

### show route active-path terse

```
user@host> show route active-path terse
```

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
```

```
+ = Active Route, - = Last Active, * = Both
```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.255.70.19/32	D	0			>lo0.0	
*	10.255.71.50/32	I	15	10		>172.16.100.1.	
*	172.16.100.0/24	D	0			>so-2/1/3.0	
*	172.16.100.2/32	L	0			Local	
*	192.168.64.0/21	D	0			>fxp0.0	
*	192.168.70.19/32	L	0			Local	



## show route all

<b>List of Syntax</b>	<a href="#">Syntax on page 257</a> <a href="#">Syntax (EX Series Switches) on page 257</a>
<b>Syntax</b>	<pre>show route all &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route all</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	<p>Display information about all routes in all routing tables, including private, or internal, tables.</p>
<b>Options</b>	<p><b>none</b>—Display information about all routes in all routing tables, including private, or internal, tables.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	<p>view</p>
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show route brief on page 264</a></li> <li>• <a href="#">show route detail on page 275</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show route all on page 257</a>
<b>Output Fields</b>	<p>In Junos OS Release 9.5 and later, only the output fields for the <b>show route all</b> command display all routing tables, including private, or hidden, routing tables. The output field table of the <a href="#">show route</a> command does not display entries for private, or hidden, routing tables in Junos OS Release 9.5 and later.</p>

## Sample Output

### show route all

The following example displays a snippet of output from the **show route** command and then displays the same snippet of output from the **show route all** command:

```
user@host> show route
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0                *[MPLS/0] 2d 02:24:39, metric 1
```

```

1          Receive
          *[MPLS/0] 2d 02:24:39, metric 1
          Receive
2          *[MPLS/0] 2d 02:24:39, metric 1
          Receive
800017     *[VPLS/7] 1d 14:00:16
          > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 14:00:26
          > via vt-3/2/0.32772, Pop

user@host> show route all
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0          *[MPLS/0] 2d 02:19:12, metric 1
          Receive
1          *[MPLS/0] 2d 02:19:12, metric 1
          Receive
2          *[MPLS/0] 2d 02:19:12, metric 1
          Receive
800017     *[VPLS/7] 1d 13:54:49
          > via vt-3/2/0.32769, Pop
800018     *[VPLS/7] 1d 13:54:59
          > via vt-3/2/0.32772, Pop
vt-3/2/0.32769 [VPLS/7] 1d 13:54:49
              Unusable
vt-3/2/0.32772 [VPLS/7] 1d 13:54:59
              Unusable

```

## show route aspath-regex

<b>List of Syntax</b>	<a href="#">Syntax on page 259</a> <a href="#">Syntax (EX Series Switches) on page 259</a>
<b>Syntax</b>	<pre>show route aspath-regex <i>regular-expression</i> &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route aspath-regex <i>regular-expression</i></pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	<p>Display the entries in the routing table that match the specified autonomous system (AS) path regular expression.</p>
<b>Options</b>	<p><b><i>regular-expression</i></b>—Regular expression that matches an entire AS path.</p> <p><b><i>logical-system (all   logical-system-name)</i></b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Additional Information</b>	<p>You can specify a regular expression as:</p> <ul style="list-style-type: none"> <li>• An individual AS number</li> <li>• A period wildcard used in place of an AS number</li> <li>• An AS path regular expression that is enclosed in parentheses</li> </ul> <p>You also can include the operators described in the table of AS path regular expression operators in the <i>Junos Policy Framework Configuration Guide</i>. The following list summarizes these operators:</p> <ul style="list-style-type: none"> <li>• <b><i>{m,n}</i></b>—At least <i>m</i> and at most <i>n</i> repetitions of the AS path term.</li> <li>• <b><i>{m}</i></b>—Exactly <i>m</i> repetitions of the AS path term.</li> <li>• <b><i>{m,}</i></b>—<i>m</i> or more repetitions of the AS path term.</li> <li>• <b><i>*</i></b>—Zero or more repetitions of an AS path term.</li> <li>• <b><i>+</i></b>—One or more repetitions of an AS path term.</li> <li>• <b><i>?</i></b>—Zero or one repetition of an AS path term.</li> <li>• <b><i>aspath_term   aspath_term</i></b>—Match one of the two AS path terms.</li> </ul> <p>When you specify more than one AS number or path term, or when you include an operator in the regular expression, enclose the entire regular expression in quotation marks. For example, to match any path that contains AS number 234, specify the following command:</p>

```
show route aspath-regex ".* 234.*"
```

**Required Privilege Level** view

**Related Documentation**

- *Example: Using AS Path Regular Expressions*

**List of Sample Output** [show route aspath-regex \(Matching a Specific AS Number\) on page 260](#)  
[show route aspath-regex \(Matching Any Path with Two AS Numbers\) on page 260](#)

**Output Fields** For information about output fields, see the output field table for the [show route](#) command.

## Sample Output

### show route aspath-regex (Matching a Specific AS Number)

```
user@host> show route aspath-regex 65477
inet.0: 46411 destinations, 46411 routes (46409 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

111.222.1.0/25      *[BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65548 65536}) IGP
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
111.222.1.128/25   *[IS-IS/15] 09:15:37, metric 37, tag 1
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
                   [BGP/170] 00:08:48, localpref 100, from 111.222.2.24
                   AS Path: [65477] ({65548 65536}) IGP
                   to 111.222.18.225 via fpa0.0(111.222.18.233)
...
```

### show route aspath-regex (Matching Any Path with Two AS Numbers)

```
user@host> show route aspath-regex ".* 234 3561.*"

inet.0: 46351 destinations, 46351 routes (46349 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

9.20.0.0/17        *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 2685 2686 Incomplete
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
12.10.231.0/24     *[BGP/170] 01:35:00, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 5696 7369 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
24.64.32.0/19      *[BGP/170] 01:34:59, localpref 100, from 131.103.20.49
                   AS Path: [666] 234 3561 6327 IGP
                   to 192.156.169.1 via 192.156.169.14(so-0/0/0)
...
```

## show route best

---

<b>List of Syntax</b>	<a href="#">Syntax on page 261</a> <a href="#">Syntax (EX Series Switches) on page 261</a>
<b>Syntax</b>	show route best <i>destination-prefix</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route best <i>destination-prefix</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the route in the routing table that is the best route to the specified address or range of addresses. The best route is the longest matching route.
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b><i>destination-prefix</i></b>—Address or range of addresses.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show route brief on page 264</a></li> <li>• <a href="#">show route detail on page 275</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show route best on page 261</a> <a href="#">show route best detail on page 262</a> <a href="#">show route best extensive on page 263</a> <a href="#">show route best terse on page 263</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route best

```
user@host> show route best 10.255.70.103
```

```

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32    *[OSPF/10] 1d 13:19:20, metric 2
                  > to 10.31.1.6 via ge-3/1/0.0
                  via so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32    *[RSVP/7] 1d 13:20:13, metric 2
                  > via so-0/3/0.0, label-switched-path green-r1-r3

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.0.0.0/8          *[Direct/0] 2d 01:43:34
                  > via fxp2.0
                  [Direct/0] 2d 01:43:34
                  > via fxp1.0

```

### show route best detail

```

user@host> show route best 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
    *OSPF    Preference: 10
             Next-hop reference count: 9
             Next hop: 10.31.1.6 via ge-3/1/0.0, selected
             Next hop: via so-0/3/0.0
             State: <Active Int>
             Local AS:    69
             Age: 1d 13:20:06      Metric: 2
             Area: 0.0.0.0
             Task: OSPF
             Announcement bits (2): 0-KRT 3-Resolve tree 2
             AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
    State: <FlashAll>
    *RSVP    Preference: 7
             Next-hop reference count: 5
             Next hop: via so-0/3/0.0 weight 0x1, selected
             Label-switched-path green-r1-r3
             Label operation: Push 100016
             State: <Active Int>
             Local AS:    69
             Age: 1d 13:20:59      Metric: 2
             Task: RSVP
             Announcement bits (1): 1-Resolve tree 2
             AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
10.0.0.0/8 (2 entries, 0 announced)
    *Direct Preference: 0
             Next hop type: Interface
             Next-hop reference count: 1
             Next hop: via fxp2.0, selected
             State: <Active Int>

```

```

Age: 2d 1:44:20
Task: IF
AS path: I
Direct Preference: 0
Next hop type: Interface
Next-hop reference count: 1
Next hop: via fxp1.0, selected
State: <NotBest Int>
Inactive reason: No difference
Age: 2d 1:44:20
Task: IF
AS path: I

```

### show route best extensive

The output for the **show route best extensive** command is identical to that for the **show route best detail** command. For sample output, see [show route best detail on page 262](#).

### show route best terse

```

user@host> show route best 10.255.70.103 terse
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  0  10           2           >10.31.1.6
                                   so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.255.70.103/32  R   7           2           >so-0/3/0.0

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 10.0.0.0/8        D   0           0           >fxp2.0
                   D   0           0           >fxp1.0

```

## show route brief

<b>List of Syntax</b>	<a href="#">Syntax on page 264</a> <a href="#">Syntax (EX Series Switches) on page 264</a>
<b>Syntax</b>	<pre>show route brief &lt;destination-prefix&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route brief &lt;destination-prefix&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Display brief information about the active entries in the routing tables.
<b>Options</b>	<p><b>none</b>—Display all active entries in the routing table.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show route all on page 257</a></li> <li>• <a href="#">show route best on page 261</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show route brief on page 264</a>
<b>Output Fields</b>	For information about output fields, see the Output Field table of the <a href="#">show route</a> command.

## Sample Output

### show route brief

```
user@host> show route brief
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[Static/5] 1w5d 20:30:29
                   Discard
10.255.245.51/32  *[Direct/0] 2w4d 13:11:14
                   > via 100.0
```



```
172.16.0.0/12      *[Static/5] 2w4d 13:11:14
                  > to 192.168.167.254 via fxp0.0
192.168.0.0/18     *[Static/5] 1w5d 20:30:29
                  > to 192.168.167.254 via fxp0.0
192.168.40.0/22    *[Static/5] 2w4d 13:11:14
                  > to 192.168.167.254 via fxp0.0
192.168.64.0/18    *[Static/5] 2w4d 13:11:14
                  > to 192.168.167.254 via fxp0.0
192.168.164.0/22   *[Direct/0] 2w4d 13:11:14
                  > via fxp0.0
192.168.164.51/32  *[Local/0] 2w4d 13:11:14
                  Local via fxp0.0
207.17.136.192/32  *[Static/5] 2w4d 13:11:14
                  > to 192.168.167.254 via fxp0.0
green.inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
100.101.0.0/16     *[Direct/0] 1w5d 20:30:28
                  > via fe-0/0/3.0
100.101.2.3/32     *[Local/0] 1w5d 20:30:28
                  Local via fe-0/0/3.0
172.16.233.5/32    *[OSPF/10] 1w5d 20:30:29, metric 1
                  MultiRecv
```

## show route community

---

List of Syntax	<a href="#">Syntax on page 266</a> <a href="#">Syntax (EX Series Switches) on page 266</a>
Syntax	<code>show route community <i>as-number:community-value</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
Syntax (EX Series Switches)	<code>show route community <i>as-number:community-value</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
Description	Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community.
Options	<p><b><i>as-number:community-value</i></b>—One or more community identifiers. <b><i>as-number</i></b> is the AS number, and <b><i>community-value</i></b> is the community identifier. When you specify more than one community identifier, enclose the identifiers in double quotation marks. Community identifiers can include wildcards.</p> <p>For example:</p> <pre>user@host&gt; show route table inet.0 protocol bgp community "12083:6015" community "12083:65551"</pre> <p>or</p> <pre>user@host&gt; show route table inet.0 protocol bgp community [12083:6014 12083:65551]</pre> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Additional Information	Specifying the community option displays all routes matching the community found within the routing table. The community option does not limit the output to only the routes being advertised to the neighbor after any egress routing policy.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"><li><a href="#">show route detail on page 275</a></li></ul>

List of Sample Output [show route community on page 267](#)

**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.

## Sample Output

### [show route community](#)

```
user@host> show route community 234:80
inet.0: 46511 destinations, 46511 routes (46509 active, 0 holddown, 2 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.4.0/8          *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                     AS Path: {666} 234 2548 1 IGP
                     to 192.156.169.1 via 192.156.169.14(so-0/0/0)
172.16.6.0/8          *[BGP/170] 03:33:07, localpref 100, from 131.103.20.49
                     AS Path: {666} 234 2548 568 721 Incomplete
                     to 192.156.169.1 via 192.156.169.14(so-0/0/0)
172.16.92.0/16        *[BGP/170] 03:33:06, localpref 100, from 131.103.20.49
                     AS Path: {666} 234 2548 1673 1675 1747 IGP
                     to 192.156.169.1 via 192.156.169.14(so-0/0/0)
```

## show route community-name

<b>List of Syntax</b>	<a href="#">Syntax on page 268</a> <a href="#">Syntax (EX Series Switches) on page 268</a>
<b>Syntax</b>	show route community-name <i>community-name</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches)</b>	show route community-name <i>community-name</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the route entries in each routing table that are members of a Border Gateway Protocol (BGP) community, specified by a community name.
<b>Options</b>	<p><b><i>community-name</i></b>—Name of the community.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route community-name on page 268</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route community-name

```

user@host> show route community-name red-com
inet.0: 17 destinations, 17 routes (16 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

instance1.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.212/32  *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                   AS path: 300 I

```

```

172.16.20.20/32      > to 172.16.100.1 via ge-1/1/0.0, label-switched-path to_fix
                    *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                    AS path: I
172.16.100.0/24     > to 172.16.100.1 via ge-1/1/0.0, label-switched-path to_fix
                    *[BGP/170] 00:04:40, localpref 100, from 10.255.245.204
                    AS path: I
                    > to 172.16.100.1 via ge-1/1/0.0, label-switched-path to_fix

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

bgp.l3vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.245.204:10:10.255.245.212/32
                    *[BGP/170] 00:06:40, localpref 100, from 10.255.245.204
                    AS path: 300 I
                    > to 172.16.100.1 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:172.16.20.20/32
                    *[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
                    AS path: I
                    > to 172.16.100.1 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.204:10:100.1.4.0/24
                    *[BGP/170] 00:36:02, localpref 100, from 10.255.245.204
                    AS path: I
                    > to 172.16.100.1 via ge-1/1/0.0, label-switched-path to_fix

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

instance1.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

## show route damping

---

<b>List of Syntax</b>	<a href="#">Syntax on page 270</a> <a href="#">Syntax (EX Series Switch and QFX Series) on page 270</a>
<b>Syntax</b>	<code>show route damping (decayed   history   suppressed)</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switch and QFX Series)</b>	<code>show route damping (decayed   history   suppressed)</code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Display the BGP routes for which updates might have been reduced because of route flap damping.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.  <b>decayed</b> —Display route damping entries that might no longer be valid, but are not suppressed.  <b>history</b> —Display entries that have already been withdrawn, but have been logged.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b>suppressed</b> —Display entries that have been suppressed and are no longer being installed into the forwarding table or exported by routing protocols.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>clear bgp damping</i></li><li>• <i>show policy damping</i></li></ul>
<b>List of Sample Output</b>	<a href="#">show route damping decayed detail on page 273</a> <a href="#">show route damping history on page 274</a> <a href="#">show route damping history detail on page 274</a>
<b>Output Fields</b>	<a href="#">Table 12 on page 271</a> lists the output fields for the <b>show route damping</b> command. Output fields are listed in the approximate order in which they appear.

Table 12: show route damping Output Fields

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table—for example, <b>inet.0</b> .	All levels
<b>destinations</b>	Number of destinations for which there are routes in the routing table.	All levels
<b>number routes</b>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b></li> <li>• <b>holdddown</b> (routes that are in a pending state before being declared inactive)</li> <li>• <b>hidden</b> (the routes are not used because of a routing policy)</li> </ul>	All levels
<b>destination-prefix (entry, announced)</b>	Destination prefix. The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination.	<b>detail extensive</b>
<b>[protocol, preference]</b>	Protocol from which the route was learned and the preference value for the route. <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>	All levels
<b>Next-hop reference count</b>	Number of references made to the next hop.	<b>detail extensive</b>
<b>Source</b>	IP address of the route source.	<b>detail extensive</b>
<b>Next hop</b>	Network layer address of the directly reachable neighboring system.	<b>detail extensive</b>
<b>via</b>	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b> .	<b>detail extensive</b>
<b>Protocol next hop</b>	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.	<b>detail extensive</b>
<b>Indirect next hop</b>	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.	<b>detail extensive</b>
<b>State</b>	Flags for this route. For a description of possible values for this field, see the output field table for the <a href="#">show route detail</a> command.	<b>detail extensive</b>

Table 12: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
Local AS	AS number of the local routing device.	detail extensive
Peer AS	AS number of the peer routing device.	detail extensive
Age	How long the route has been known.	detail extensive
Metric	Metric for the route.	detail extensive
Task	Name of the protocol that has added the route.	detail extensive
Announcement bits	List of protocols that announce this route. <i>n-Resolve inet</i> indicates that the route is used for route resolution for next hops found in the routing table. <i>n</i> is an index used by Juniper Networks customer support only.	detail extensive
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• I—IGP.</li> <li>• E—EGP.</li> <li>• ?—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• [ ]—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device or if AS path prepending is configured.</li> <li>• { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• ( )—Parentheses enclose a confederation.</li> <li>• ( [ ] )—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>	All levels
to	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	brief none
via	Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b> .	brief none
Communities	Community path attribute for the route. See the output field table for the <a href="#">show route detail</a> command.	detail extensive
Localpref	Local preference value included in the route.	All levels
Router ID	BGP router ID as advertised by the neighbor in the open message.	detail extensive



Table 12: show route damping Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Merit (last update/now)</b>	Last updated and current figure-of-merit value.	<b>detail extensive</b>
<b>damping-parameters</b>	Name that identifies the damping parameters used, which is defined in the damping statement at the <b>[edit policy-options]</b> hierarchy level.	<b>detail extensive</b>
<b>Last update</b>	Time of most recent change in path attributes.	<b>detail extensive</b>
<b>First update</b>	Time of first change in path attributes, which started the route damping process.	<b>detail extensive</b>
<b>Flaps</b>	Number of times the route has gone up or down or its path attributes have changed.	<b>detail extensive</b>
<b>Suppressed</b>	( <b>suppressed</b> keyword only) This route is currently suppressed. A suppressed route does not appear in the forwarding table and routing protocols do not export it.	All levels
<b>Reusable in</b>	( <b>suppressed</b> keyword only) Time when a suppressed route will again be available.	All levels
<b>Preference will be</b>	( <b>suppressed</b> keyword only) Preference value that will be applied to the route when it is again active.	All levels

## Sample Output

### show route damping decayed detail

```

user@host> show route damping decayed detail
inet.0: 173319 destinations, 1533668 routes (172625 active, 4 holddown, 108083
hidden)
10.0.111.0/24 (7 entries, 1 announced)
  *BGP      Preference: 170/-101
            Next-hop reference count: 151973
            Source: 172.23.2.129
            Next hop: via so-1/2/0.0
            Next hop: via so-5/1/0.0, selected
            Next hop: via so-6/0/0.0
            Protocol next hop: 172.23.2.129
            Indirect next hop: 89a1a00 264185
            State: <Active Ext>
            Local AS: 64500 Peer AS: 64490
            Age: 3:28      Metric2: 0
            Task: BGP_64490.172.23.2.129+179
            Announcement bits (6): 0-KRT 1-RT 4-KRT 5-BGP.0.0.0.0+179

  6-Resolve tree 2 7-Resolve tree 3
    AS path: 64499 64510 645511 645511 645511 645511 I ()
    Communities: 65551:390 65551:2000 65551:3000 65550:701
    Localpref: 100
    Router ID: 172.23.2.129
    Merit (last update/now): 1934/1790
    damping-parameters: damping-high

```

```
                Last update:      00:03:28 First update:      00:06:40
                Flaps: 2
```

### show route damping history

```
user@host> show route damping history
inet.0: 173320 destinations, 1533529 routes (172624 active, 6 holddown, 108122
hidden)
+ = Active Route, - = Last Active, * = Both

10.108.0.0/15      [BGP ] 2d 22:47:58, localpref 100
                  AS path: 64220 65541 65542 I
                  > to 192.168.60.85 via so-3/1/0.0
```

### show route damping history detail

```
user@host> show route damping history detail
inet.0: 173319 destinations, 1533435 routes (172627 active, 2 holddown, 108105
hidden)
10.108.0.0/15 (3 entries, 1 announced)
    BGP                /-101
        Next-hop reference count: 69058
        Source: 192.168.60.85
        Next hop: 192.168.60.85 via so-3/1/0.0, selected
        State: <Hidden Ext>
        Inactive reason: Unusable path
        Local AS: 64500 Peer AS: 64220
        Age: 2d 22:48:10
        Task: BGP_64220.192.168.60.85+179
        AS path: 64220 65541 65542 I ()
        Communities: 65541:390 65541:2000 65541:3000 65504:3561
        Localpref: 100
        Router ID: 192.168.80.25
        Merit (last update/now): 1000/932
        damping-parameters: set-normal
        Last update:      00:01:05 First update:      00:01:05
        Flaps: 1
```

## show route detail

<b>List of Syntax</b>	<a href="#">Syntax on page 275</a> <a href="#">Syntax (EX Series Switches) on page 275</a>
<b>Syntax</b>	<pre>show route detail &lt;destination-prefix&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route detail &lt;destination-prefix&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 13.2X51-D15 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
<b>Description</b>	Display detailed information about the active entries in the routing tables.
<b>Options</b>	<p><b>none</b>—Display all active entries in the routing table on all systems.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route detail on page 286</a> <a href="#">show route detail (with BGP Multipath) on page 292</a> <a href="#">show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 293</a> <a href="#">show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 293</a>
<b>Output Fields</b>	<p><a href="#">Table 13 on page 275</a> describes the output fields for the <b>show route detail</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 13: show route detail Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.

Table 13: show route detail Output Fields (*continued*)

Field Name	Field Description
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active)</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>
<i>route-destination</i> (entry, announced)	<p>Route destination (for example:10.0.0.1/24). The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>
<i>label stacking</i>	<p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>

Table 13: show route detail Output Fields (*continued*)

Field Name	Field Description
<code>[protocol, preference]</code>	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value.</p> <p><b>Preference2</b> values are signed integers, that is, <b>Preference2</b> values can be either positive or negative values. However, Junos OS evaluates <b>Preference2</b> values as unsigned integers that are represented by positive values. Based on the <b>Preference2</b> values, Junos OS evaluates a preferred route differently in the following scenarios:</p> <ul style="list-style-type: none"> <li>• <b>Both Signed Preference2 values</b> <ul style="list-style-type: none"> <li>• Route A = -101</li> <li>• Route B = -156</li> </ul> <p>Where both the <b>Preference2</b> values are signed, Junos OS evaluates only the unsigned value of <b>Preference2</b> and Route A, which has a lower <b>Preference2</b> value is preferred.</p> </li> <li>• <b>Unsigned Preference2 values</b> <p>Now consider both unsigned <b>Preference2</b> values:</p> <ul style="list-style-type: none"> <li>• Route A = 4294967096</li> <li>• Route B = 200</li> </ul> <p>Here, Junos OS considers the lesser <b>Preference2</b> value and Route B with a <b>Preference2</b> value of 200 is preferred because it is less than 4294967096.</p> </li> <li>• <b>Combination of signed and unsigned Preference2 values</b> <p>When <b>Preference2</b> values of two routes are compared, and for one route the <b>Preference2</b> is a signed value, and for the other route it is an unsigned value, Junos OS prefers the route with the positive <b>Preference2</b> value over the negative <b>Preference2</b> value. For example, consider the following signed and unsigned <b>Preference2</b> values:</p> <ul style="list-style-type: none"> <li>• Route A = -200</li> <li>• Route B = 200</li> </ul> <p>In this case, Route B with a <b>Preference2</b> value of 200 is preferred although this value is greater than -200, because Junos OS evaluates only the unsigned value of the <b>Preference2</b> value.</p> </li> </ul>
<b>Level</b>	(IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.
<b>Route Distinguisher</b>	IP subnet augmented with a 64-bit prefix.
<b>PMSI</b>	Provider multicast service interface (MVPN routing table).

Table 13: show route detail Output Fields (*continued*)

Field Name	Field Description
<b>Next-hop type</b>	Type of next hop. For a description of possible values for this field, see <a href="#">Table 14 on page 281</a> .
<b>Next-hop reference count</b>	Number of references made to the next hop.
<b>Flood nexthop branches exceed maximum message</b>	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
<b>Source</b>	IP address of the route source.
<b>Next hop</b>	Network layer address of the directly reachable neighboring system.
<b>via</b>	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul>
<b>Label-switched-path lsp-path-name</b>	Name of the LSP used to reach the next hop.
<b>Label operation</b>	MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).
<b>Interface</b>	(Local only) Local interface name.
<b>Protocol next hop</b>	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.
<b>Indirect next hop</b>	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.
<b>State</b>	State of the route (a route can be in more than one state). See <a href="#">Table 15 on page 283</a> .
<b>Local AS</b>	AS number of the local routing device.
<b>Age</b>	How long the route has been known.
<b>AIGP</b>	Accumulated interior gateway protocol (AIGP) BGP attribute.

Table 13: show route detail Output Fields (*continued*)

Field Name	Field Description
<b>Metric</b>	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
<b>MED-plus-IGP</b>	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
<b>TTL-Action</b>	For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.  For sample output, see <a href="#">show route table</a> .
<b>Task</b>	Name of the protocol that has added the route.
<b>Announcement bits</b>	The number of BGP peers or protocols to which Junos OS has announced this route, followed by the list of the recipients of the announcement. Junos OS can also announce the route to the KRT for installing the route into the Packet Forwarding Engine, to a resolve tree, a L2 VC, or even a VPN. For example, <b>n-Resolve inet</b> indicates that the specified route is used for route resolution for next hops found in the routing table.  <ul style="list-style-type: none"> <li><b>n</b>—An index used by Juniper Networks customer support only.</li> </ul>
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li><b>I</b>—IGP.</li> <li><b>E</b>—EGP.</li> <li><b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li><b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li><b>[ ]</b>—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893.</li> <li><b>[ ]</b>—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li><b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li><b>( )</b>—Parentheses enclose a confederation.</li> <li><b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>

Table 13: show route detail Output Fields (*continued*)

Field Name	Field Description
<b>validation-state</b>	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGP peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>
ORR Generation-ID	Displays the optimal route reflection (ORR) generation identifier. ISIS and OSPF interior gateway protocol (IGP) updates filed whenever any of the corresponding ORR route has its metric valued changed, or if the ORR route is added or deleted.
FECs bound to route	Point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.
Primary Upstream	When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.
RPF Nexthops	When multipoint LDP with MoFRR is configured, the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.
Label	Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.
weight	Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See <a href="#">Table 16 on page 285</a> for all possible values for this field.
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).
control flags	Control flags: <b>none</b> or <b>Site Down</b> .
mtu	Maximum transmission unit (MTU) information.



Table 13: show route detail Output Fields (*continued*)

Field Name	Field Description
<b>Label-Base, range</b>	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
<b>status vector</b>	Layer 2 VPN and VPLS network layer reachability information (NLRI).
<b>Accepted Multipath</b>	Current active path when BGP multipath is configured.
<b>Accepted LongLivedStale</b>	The LongLivedStale flag indicates that the route was marked LLGR-stale by this router, as part of the operation of LLGR receiver mode. Either this flag or the LongLivedStaleImport flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.
<b>Accepted LongLivedStaleImport</b>	<p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy. Either this flag or the LongLivedStale flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.</p> <p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and import into the inet.0 routing table</p>
<b>ImportAccepted LongLivedStaleImport</b>	<p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and imported into the inet.0 routing table</p> <p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy.</p>
<b>Accepted MultipathContrib</b>	Path currently contributing to BGP multipath.
<b>Localpref</b>	Local preference value included in the route.
<b>Router ID</b>	BGP router ID as advertised by the neighbor in the open message.
<b>Primary Routing Table</b>	In a routing table group, the name of the primary routing table in which the route resides.
<b>Secondary Tables</b>	In a routing table group, the name of one or more secondary tables in which the route resides.

[Table 14 on page 281](#) describes all possible values for the Next-hop Types output field.

Table 14: Next-hop Types Output Field Values

Next-Hop Type	Description
<b>Broadcast (bcast)</b>	Broadcast next hop.
<b>Deny</b>	Deny next hop.
<b>Discard</b>	Discard next hop.

Table 14: Next-hop Types Output Field Values (*continued*)

Next-Hop Type	Description
<b>Flood</b>	Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast.
<b>Hold</b>	Next hop is waiting to be resolved into a unicast or multicast type.
<b>Indexed (idxd)</b>	Indexed next hop.
<b>Indirect (indr)</b>	Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.
<b>Interface</b>	Used for a network address assigned to an interface. Unlike the router next hop, the interface next hop does not reference any specific node on the network.
<b>Local (locl)</b>	Local address on an interface. This next-hop type causes packets with this destination address to be received locally.
<b>Multicast (mcst)</b>	Wire multicast next hop (limited to the LAN).
<b>Multicast discard (mdsc)</b>	Multicast discard.
<b>Multicast group (mgrp)</b>	Multicast group member.
<b>Receive (recv)</b>	Receive.
<b>Reject (rjct)</b>	Discard. An ICMP unreachable message was sent.
<b>Resolve (rslv)</b>	Resolving next hop.
<b>Routed multicast (mcrt)</b>	Regular multicast next hop.
<b>Router</b>	<p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> <li>• Must not be a direct or local subnet for the routing device.</li> <li>• Must have a next hop that is directly connected to the routing device.</li> </ul>
<b>Table</b>	Routing table next hop.

Table 14: Next-hop Types Output Field Values (*continued*)

Next-Hop Type	Description
Unicast (ucst)	Unicast.
Unilist (ulst)	List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.

Table 15 on page 283 describes all possible values for the State output field. A route can be in more than one state (for example, <Active NoReadvrt Int Ext>).

Table 15: State Output Field Values

Value	Description
Accounting	Route needs accounting.
Active	Route is active.
Always Compare MED	Path with a lower multiple exit discriminator (MED) is available.
AS path	Shorter AS path is available.
Cisco Non-deterministic MED selection	Cisco nondeterministic MED is enabled, and a path with a lower MED is available.
Clone	Route is a clone.
Cluster list length	Length of cluster list sent by the route reflector.
Delete	Route has been deleted.
Ex	Exterior route.
Ext	BGP route received from an external BGP neighbor.
FlashAll	Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes.
Hidden	Route not used because of routing policy.
IfCheck	Route needs forwarding RPF check.
IGP metric	Path through next hop with lower IGP metric is available.
Inactive reason	Flags for this route, which was not selected as best for a particular destination.
Initial	Route being added.

Table 15: State Output Field Values (*continued*)

Value	Description
<b>Int</b>	Interior route.
<b>Int Ext</b>	BGP route received from an internal BGP peer or a BGP confederation peer.
<b>Interior &gt; Exterior &gt; Exterior via Interior</b>	Direct, static, IGP, or EBGp path is available.
<b>Local Preference</b>	Path with a higher local preference value is available.
<b>Martian</b>	Route is a martian (ignored because it is obviously invalid).
<b>MartianOK</b>	Route exempt from martian filtering.
<b>Next hop address</b>	Path with lower metric next hop is available.
<b>No difference</b>	Path from neighbor with lower IP address is available.
<b>NoReadvrt</b>	Route not to be advertised.
<b>NotBest</b>	Route not chosen because it does not have the lowest MED.
<b>Not Best in its group</b>	Incoming BGP AS is not the best of a group (only one AS can be the best).
<b>NotInstall</b>	Route not to be installed in the forwarding table.
<b>Number of gateways</b>	Path with a greater number of next hops is available.
<b>Origin</b>	Path with a lower origin code is available.
<b>Pending</b>	Route pending because of a hold-down configured on another route.
<b>Programmed</b>	Route installed programmatically by on-box or off-box applications using API.
<b>Release</b>	Route scheduled for release.
<b>RIB preference</b>	Route from a higher-numbered routing table is available.
<b>Route Distinguisher</b>	64-bit prefix added to IP subnets to make them unique.
<b>Route Metric or MED comparison</b>	Route with a lower metric or MED is available.
<b>Route Preference</b>	Route with lower preference value is available
<b>Router ID</b>	Path through a neighbor with lower ID is available.

Table 15: State Output Field Values (*continued*)

Value	Description
Secondary	Route not a primary route.
Unusable path	Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> <li>The route is damped.</li> <li>The route is rejected by an import policy.</li> <li>The route is unresolved.</li> </ul>
Update source	Last tiebreaker is the lowest IP address value.
ProtectionCand	Indicates paths requesting protection.
ProtectionPath	Indicates the route entry that can be used as a protection path.

Table 16 on page 285 describes the possible values for the Communities output field.

Table 16: Communities Output Field Values

Value	Description
<i>area-number</i>	4 bytes, encoding a 32-bit area number. For AS-external routes, the value is <b>0</b> . A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.
<b>bandwidth: local AS number:link-bandwidth-number</b>	Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute.
<b>domain-id</b>	Unique configurable number that identifies the OSPF domain.
<b>domain-id-vendor</b>	Unique configurable number that further identifies the OSPF domain.
<i>link-bandwidth-number</i>	Link-bandwidth number: from <b>0</b> through <b>4,294,967,295</b> (bytes per second).
<i>local AS number</i>	Local AS number: from <b>1</b> through <b>65,535</b> .
<i>options</i>	1 byte. Currently this is only used if the route type is <b>5</b> or <b>7</b> . Setting the least significant bit in the field indicates that the route carries a type 2 metric.
<b>origin</b>	(Used with VPNs) Identifies where the route came from.
<i>ospf-route-type</i>	1 byte, encoded as <b>1</b> or <b>2</b> for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); <b>3</b> for summary routes; <b>5</b> for external routes (area number must be <b>0</b> ); <b>7</b> for NSSA routes; or <b>129</b> for sham link endpoint addresses.
<b>route-type-vendor</b>	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x8000</b> . The format is <i>area-number:ospf-route-type:options</i> .

Table 16: Communities Output Field Values (*continued*)

Value	Description
<b>rte-type</b>	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x0306</b> . The format is <b>area-number:ospf-route-type:options</b> .
<b>target</b>	Defines which VPN the route participates in; <b>target</b> has the format <b>32-bit IP address:16-bit number</b> . For example, 10.19.0.0:100.
<b>unknown IANA</b>	Incoming IANA codes with a value between <b>0x1</b> and <b>0x7fff</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.
<b>unknown OSPF vendor community</b>	Incoming IANA codes with a value above <b>0x8000</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.

## Sample Output

### show route detail

```

user@host> show route detail

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:31:43
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

10.31.1.0/30 (2 entries, 1 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 2
    Next hop: via so-0/3/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:30:17
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I
  OSPF Preference: 10
    Next-hop reference count: 1
    Next hop: via so-0/3/0.0, selected
    State: <Int>
    Inactive reason: Route Preference
    Local AS: 69
    Age: 1:30:17 Metric: 1
    ORR Generation-ID: 1
  Area: 0.0.0.0
    Task: OSPF
    AS path: I

```

```

10.31.1.1/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 7
    Interface: so-0/3/0.0
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:30:20
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I

...

10.31.2.0/30 (1 entry, 1 announced)
  *OSPF Preference: 10
    Next-hop reference count: 9
    Next hop: via so-0/3/0.0
    Next hop: 10.31.1.6 via ge-3/1/0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:29:56 Metric: 2
    Area: 0.0.0.0
    ORR Generation-ID: 1
  Task: OSPF
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

...

172.16.233.2/32 (1 entry, 1 announced)
  *PIM Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:45
    Task: PIM Recv
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

...

172.16.233.22/32 (1 entry, 1 announced)
  *IGMP Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 69
    Age: 1:31:43
    Task: IGMP
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
    Next-hop reference count: 6
    Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
    Label-switched-path green-r1-r3
    Label operation: Push 100096

```

```

        State: <Active Int>
        Local AS: 69
        Age: 1:25:49 Metric: 2
        Task: RSVP
        Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
        AS path: I

10.255.71.238/32 (1 entry, 1 announced)
    State: <FlashAll>
    *RSVP Preference: 7
        Next-hop reference count: 6
        Next hop: via so-0/3/0.0 weight 0x1, selected
        Label-switched-path green-r1-r2
        State: <Active Int>
        Local AS: 69
        Age: 1:25:49 Metric: 1
        Task: RSVP
        Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
        AS path: I

private__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active Int>
        Local AS: 69
        Age: 1:31:44
        Task: IF
        AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
0 (1 entry, 1 announced)
    *MPLS Preference: 0
        Next hop type: Receive
        Next-hop reference count: 6
        State: <Active Int>
        Local AS: 69
        Age: 1:31:45 Metric: 1
        Task: MPLS
        Announcement bits (1): 0-KRT
        AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

299840 (1 entry, 1 announced)
TSI:
KRT in-kerne 299840 /52 -> {indirect(1048575)}
    *RSVP Preference: 7/2
        Next hop type: Flood
        Address: 0x9174a30
        Next-hop reference count: 4
        Next hop type: Router, Next hop index: 798
        Address: 0x9174c28
        Next-hop reference count: 2

```



```

Next hop: 172.16.0.2 via lt-1/2/0.9 weight 0x1
Label-switched-path R2-to-R4-2p2mp
Label operation: Pop
Next hop type: Router, Next hop index: 1048574
Address: 0x92544f0
Next-hop reference count: 2
Next hop: 172.16.0.2 via lt-1/2/0.7 weight 0x1
Label-switched-path R2-to-R200-p2mp
Label operation: Pop
Next hop: 172.16.0.2 via lt-1/2/0.5 weight 0x8001
Label operation: Pop
State: <Active Int>
Age: 1:29      Metric: 1
Task: RSVP
Announcement bits (1): 0-KRT
AS path: I...

800010 (1 entry, 1 announced)
  *VPLS Preference: 7
    Next-hop reference count: 2
    Next hop: via vt-3/2/0.32769, selected
    Label operation: Pop
    State: <Active Int>
    Age: 1:29:30
    Task: Common L2 VC
    Announcement bits (1): 0-KRT
    AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
  *VPLS Preference: 7
    Next-hop reference count: 2
    Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
    Label-switched-path green-r1-r3
    Label operation: Push 800012, Push 100096(top)
    Protocol next hop: 10.255.70.103
    Push 800012
    Indirect next hop: 87272e4 1048574
    State: <Active Int>
    Age: 1:29:30      Metric2: 2
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 1-Common L2 VC
    AS path: I
    Communities: target:11111:1 Layer2-info: encaps:VPLS,
    control flags:, mtu: 0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 69
    Age: 1:31:44
    Task: IF
    AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface

```

```

        Next-hop reference count: 1
        Next hop: via lo0.0, selected
        State: <Active NoReadvrt Int>
        Local AS:    69
        Age: 1:31:44
        Task: IF
        AS path: I

ff02::2/128 (1 entry, 1 announced)
  *PIM    Preference: 0
          Next-hop reference count: 18
          State: <Active NoReadvrt Int>
          Local AS:    69
          Age: 1:31:45
          Task: PIM Recv6
          Announcement bits (1): 0-KRT
          AS path: I

ff02::d/128 (1 entry, 1 announced)
  *PIM    Preference: 0
          Next-hop reference count: 18
          State: <Active NoReadvrt Int>
          Local AS:    69
          Age: 1:31:45
          Task: PIM Recv6
          Announcement bits (1): 0-KRT
          AS path: I

ff02::16/128 (1 entry, 1 announced)
  *MLD    Preference: 0
          Next-hop reference count: 18
          State: <Active NoReadvrt Int>
          Local AS:    69
          Age: 1:31:43
          Task: MLD
          Announcement bits (1): 0-KRT
          AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
  *Direct Preference: 0
          Next hop type: Interface
          Next-hop reference count: 1
          Next hop: via lo0.16385, selected
          State: <Active NoReadvrt Int>
          Age: 1:31:44
          Task: IF
          AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 10.255.70.103:1
          Next-hop reference count: 7
          Source: 10.255.70.103
          Protocol next hop: 10.255.70.103
          Indirect next hop: 2 no-forward
          State: <Secondary Active Int Ext>
          Local AS:    69 Peer AS:    69

```

```

Age: 1:25:49    Metric2: 1
AIGP 210
Task: BGP_69.10.255.70.103+179
Announcement bits (1): 0-green-l2vpn
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0
Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-1
    Next-hop reference count: 5
    Protocol next hop: 10.255.71.52
    Indirect next hop: 0 -
    State: <Active Int Ext>
    Age: 1:31:40    Metric2: 1
    Task: green-l2vpn
    Announcement bits (1): 1-BGP.0.0.0.0+179
    AS path: I
    Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
    mtu: 0
    Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
  *L2VPN Preference: 170/-101
    Next-hop reference count: 5
    Protocol next hop: 10.255.71.52
    Indirect next hop: 0 -
    State: <Active Int Ext>
    Age: 1:31:40    Metric2: 1
    Task: green-l2vpn
    Announcement bits (1): 1-BGP.0.0.0.0+179
    AS path: I
    Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
    Label-base: 800008, range: 8, status-vector: 0x9F

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000[0]
    Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
    State: <Active Int>
    Local AS: 99
    Age: 10:21
    Task: l2 circuit
    Announcement bits (1): 0-LDP
    AS path: I
    VC Label 100000, MTU 1500, VLAN ID 512

inet.0: 45 destinations, 47 routes (44 active, 0 holddown, 1 hidden)
1.1.1.3/32 (1 entry, 1 announced)
  *IS-IS Preference: 18
    Level: 2
    Next hop type: Router, Next hop index: 580

```

```

Address: 0x9db6ed0
Next-hop reference count: 8
Next hop: 10.1.1.6 via lt-1/0/10.5, selected
Session Id: 0x18a
State: <Active Int>
Local AS: 2
Age: 1:32 Metric: 10
Validation State: unverified
ORR Generation-ID: 1
Task: IS-IS
Announcement bits (3): 0-KRT 5-Resolve tree 4 6-Resolve_IGP_FRR
task
AS path: I

inet.0: 61 destinations, 77 routes (61 active, 1 holddown, 0 hidden)
1.1.1.1/32 (2 entries, 1 announced)
*OSPF Preference: 10
Next hop type: Router, Next hop index: 673
Address: 0xc008830
Next-hop reference count: 3
Next hop: 10.1.1.1 via ge-0/0/2.0, selected
Session Id: 0x1b7
State: <Active Int>
Local AS: 1
Age: 3:06:59 Metric: 100
Validation State: unverified
ORR Generation-ID: 1
Area: 0.0.0.0
Task: OSPF
Announcement bits (2): 1-KRT 9-Resolve tree 2
AS path: I

```

### show route detail (with BGP Multipath)

```

user@host> show route detail

10.1.1.8/30 (2 entries, 1 announced)
*BGP Preference: 170/-101
Next hop type: Router, Next hop index: 262142
Address: 0x901a010
Next-hop reference count: 2
Source: 10.1.1.2
Next hop: 10.1.1.2 via ge-0/3/0.1, selected
Next hop: 10.1.1.6 via ge-0/3/0.5
State: <Active Ext>
Local AS: 1 Peer AS: 2
Age: 5:04:43
Validation State: unverified
Task: BGP_2.10.1.1.2+59955
Announcement bits (1): 0-KRT
AS path: 2 I
Accepted Multipath
Localpref: 100
Router ID: 172.16.1.2
BGP Preference: 170/-101
Next hop type: Router, Next hop index: 678
Address: 0x8f97520
Next-hop reference count: 9
Source: 10.1.1.6
Next hop: 10.1.1.6 via ge-0/3/0.5, selected
State: <NotBest Ext>

```

```

Inactive reason: Not Best in its group - Active preferred
Local AS:      1 Peer AS:      2
Age: 5:04:43
Validation State: unverified
Task: BGP_2.10.1.1.6+58198
AS path: 2 I
Accepted MultipathContrib
Localpref: 100
Router ID: 172.16.1.3

```

#### show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```

user@host> show route label 299872 detail
mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
  *LDP    Preference: 9
          Next hop type: Flood
          Next-hop reference count: 3
          Address: 0x9097d90
          Next hop: via vt-0/1/0.1
          Next-hop index: 661
          Label operation: Pop
          Address: 0x9172130
          Next hop: via so-0/0/3.0
          Next-hop index: 654
          Label operation: Swap 299872
          State: **Active Int>
          Local AS: 1001
          Age: 8:20      Metric: 1
          Task: LDP
          Announcement bits (1): 0-KRT
          AS path: I
          FECs bound to route: P2MP root-addr 10.255.72.166, grp 232.1.1.1,
src 192.168.142.2

```

#### show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```

user@host> show route label 301568 detail
mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
  *LDP    Preference: 9
          Next hop type: Flood
          Address: 0x2735208
          Next-hop reference count: 3
          Next hop type: Router, Next hop index: 1397
          Address: 0x2735d2c
          Next-hop reference count: 3
          Next hop: 1.3.8.2 via ge-1/2/22.0
          Label operation: Pop
          Load balance label: None;
          Next hop type: Router, Next hop index: 1395
          Address: 0x2736290
          Next-hop reference count: 3
          Next hop: 1.3.4.2 via ge-1/2/18.0
          Label operation: Pop
          Load balance label: None;
          State: <Active Int AckRequest MulticastRPF>
          Local AS: 10
          Age: 54:05      Metric: 1

```

```

Validation State: unverified
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 172.16.1.1, grp: 232.1.1.1,
src: 192.168.219.11
Primary Upstream : 172.16.1.3:0--172.16.1.2:0
RPF Nexthops :
    ge-1/2/15.0, 1.2.94.1, Label: 301568, weight: 0x1
    ge-1/2/14.0, 1.2.3.1, Label: 301568, weight: 0x1
Backup Upstream : 172.16.1.3:0--172.16.1.6:0
RPF Nexthops :
    ge-1/2/20.0, 1.2.96.1, Label: 301584, weight: 0xffffe
    ge-1/2/19.0, 1.3.6.1, Label: 301584, weight: 0xffffe
    
```

## show route exact

<b>List of Syntax</b>	<a href="#">Syntax on page 295</a> <a href="#">Syntax (EX Series Switches) on page 295</a>
<b>Syntax</b>	<code>show route exact <i>destination-prefix</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route exact <i>destination-prefix</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Display only the routes that exactly match the specified address or range of addresses.
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b><i>destination-prefix</i></b>—Address or range of addresses.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route exact on page 295</a> <a href="#">show route exact detail on page 296</a> <a href="#">show route exact extensive on page 296</a> <a href="#">show route exact terse on page 296</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route exact

```

user@host> show route exact 207.17.136.0/24

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
207.17.136.0/24    *[Static/5] 2d 03:30:22
                  > to 192.168.71.254 via fxp0.0

```

**show route exact detail**

```

user@host> show route exact 207.17.136.0/24 detail

inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
207.17.136.0/24 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2d 3:30:26
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

```

**show route exact extensive**

```

user@host> show route exact 207.17.136.0/24 extensive

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 29
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 1:25:18
    Task: RT
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

```

**show route exact terse**

```

user@host> show route exact 207.17.136.0/24 terse

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* 207.17.136.0/24  S  5                >192.168.71.254

```



## show route export

---

<b>List of Syntax</b>	<a href="#">Syntax on page 297</a> <a href="#">Syntax (EX Series Switches) on page 297</a>
<b>Syntax</b>	<pre>show route export &lt;brief   detail&gt; &lt;instance &lt;instance-name&gt;   routing-table-name&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route export &lt;brief   detail&gt; &lt;instance &lt;instance-name&gt;   routing-table-name&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	<p>Display policy-based route export information. Policy-based export simplifies the process of exchanging route information between routing instances.</p>
<b>Options</b>	<p><b>none</b>—(Same as <b>brief</b>.) Display standard information about policy-based export for all instances and routing tables on all systems.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>instance &lt;instance-name&gt;</b>—(Optional) Display a particular routing instance for which policy-based export is currently enabled.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>routing-table-name</b>—(Optional) Display information about policy-based export for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the <b>show route export inet</b> command).</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route export on page 298</a> <a href="#">show route export detail on page 298</a> <a href="#">show route export instance detail on page 299</a>
<b>Output Fields</b>	<p><a href="#">Table 17 on page 298</a> lists the output fields for the <b>show route export</b> command. Output fields are listed in the approximate order in which they appear.</p>

Table 17: show route export Output Fields

Field Name	Field Description	Level of Output
Table or <i>table-name</i>	Name of the routing tables that either import or export routes.	All levels
Routes	Number of routes exported from this table into other tables. If a particular route is exported to different tables, the counter will only increment by one.	<b>brief</b> none
Export	Whether the table is currently exporting routes to other tables: <b>Y</b> or <b>N</b> (Yes or No).	<b>brief</b> none
Import	Tables currently importing routes from the originator table. (Not displayed for tables that are not exporting any routes.)	<b>detail</b>
Flags	( <b>instance</b> keyword only) Flags for this feature on this instance: <ul style="list-style-type: none"> <li><b>config auto-policy</b>—The policy was deduced from the configured IGP export policies.</li> <li><b>cleanup</b>—Configuration information for this instance is no longer valid.</li> <li><b>config</b>—The instance was explicitly configured.</li> </ul>	<b>detail</b>
Options	( <b>instance</b> keyword only) Configured option displays the type of routing tables the feature handles: <ul style="list-style-type: none"> <li><b>unicast</b>—Indicates <i>instance.inet.0</i>.</li> <li><b>multicast</b>—Indicates <i>instance.inet.2</i>.</li> <li><b>unicast multicast</b>—Indicates <i>instance.inet.0</i> and <i>instance.inet.2</i>.</li> </ul>	<b>detail</b>
Import policy	( <b>instance</b> keyword only) Policy that <b>route export</b> uses to construct the import-export matrix. Not displayed if the instance type is <b>vrf</b> .	<b>detail</b>
Instance	( <b>instance</b> keyword only) Name of the routing instance.	<b>detail</b>
Type	( <b>instance</b> keyword only) Type of routing instance: <b>forwarding</b> , <b>non-forwarding</b> , or <b>vrf</b> .	<b>detail</b>

## Sample Output

### show route export

```

user@host> show route export
Table           Export      Routes
inet.0          N           0
black.inet.0    Y           3
red.inet.0      Y           4

```

### show route export detail

```

user@host> show route export detail
inet.0                      Routes:      0
black.inet.0                Routes:      3
  Import: [ inet.0 ]
red.inet.0                  Routes:      4
  Import: [ inet.0 ]

```

### show route export instance detail

```
user@host> show route export instance detail
Instance: master                               Type: forwarding
  Flags: <config auto-policy> Options: <unicast multicast>
  Import policy: [ (ospf-master-from-red || isis-master-from-black) ]
Instance: black                               Type: non-forwarding
Instance: red                                 Type: non-forwarding
```

## show route extensive

<b>List of Syntax</b>	<a href="#">Syntax on page 300</a> <a href="#">Syntax (EX Series Switches) on page 300</a>
<b>Syntax</b>	<pre>show route extensive &lt;destination-prefix&gt; &lt;logical-system (all   logical-system-name)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route extensive &lt;destination-prefix&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Display extensive information about the active entries in the routing tables.
<b>Options</b>	<p><b>none</b>—Display all active entries in the routing table.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route extensive on page 307</a> <a href="#">show route extensive (Access Route) on page 314</a> <a href="#">show route extensive (BGP PIC Edge) on page 314</a> <a href="#">show route extensive (FRR and LFA) on page 315</a> <a href="#">show route extensive (IS-IS) on page 316</a> <a href="#">show route extensive (Route Reflector) on page 316</a> <a href="#">show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 316</a> <a href="#">show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 317</a>
<b>Output Fields</b>	<p><a href="#">Table 18 on page 300</a> describes the output fields for the <b>show route extensive</b> command. Output fields are listed in the approximate order in which they appear.</p>

**Table 18: show route extensive Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.

Table 18: show route extensive Output Fields (*continued*)

Field Name	Field Description
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active).</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive).</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy).</li> </ul>
<i>route-destination</i> (entry, announced)	<p>Route destination (for example: 10.0.0.1/24). The <b>entry</b> value is the number of route for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>
<b>TSI</b>	Protocol header information.
<b>label stacking</b>	<p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of two or more exits this router with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>
<b>[protocol, preference]</b>	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+—</b>A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>—</b>A hyphen indicates the last active route.</li> <li>• <b>*—</b>An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>

Table 18: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>Level</b>	(IS-IS only). In IS-IS, a single autonomous system (AS) can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.
<b>Route Distinguisher</b>	IP subnet augmented with a 64-bit prefix.
<b>PMSI</b>	Provider multicast service interface (MVPN routing table).
<b>Next-hop type</b>	Type of next hop. For a description of possible values for this field, see the Output Field table in the <a href="#">show route detail</a> command.
<b>Next-hop reference count</b>	Number of references made to the next hop.
<b>Flood nexthop branches exceed maximum message</b>	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
<b>Source</b>	IP address of the route source.
<b>Next hop</b>	Network layer address of the directly reachable neighboring system.
<b>via</b>	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul>
<b>Label-switched-path lsp-path-name</b>	Name of the LSP used to reach the next hop.
<b>Label operation</b>	MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).
<b>Offset</b>	Whether the metric has been increased or decreased by an offset value.
<b>Interface</b>	(Local only) Local interface name.
<b>Protocol next hop</b>	Network layer address of the remote routing device that advertised the prefix. This address is used to recursively derive a forwarding next hop.

Table 18: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b><i>label-operation</i></b>	MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).
<b>Indirect next hops</b>	<p>When present, a list of nodes that are used to resolve the path to the next-hop destination, in the order that they are resolved.</p> <p>When BGP PIC Edge is enabled, the output lines that contain <b>Indirect next hop: weight</b> follow next hops that the software can use to repair paths where a link failure occurs. The next-hop weight has one of the following values:</p> <ul style="list-style-type: none"> <li>• 0x1 indicates active next hops.</li> <li>• 0x4000 indicates passive next hops.</li> </ul>
<b>State</b>	State of the route (a route can be in more than one state). See the Output Field table in the <a href="#">show route detail</a> command.
<b>Session ID</b>	The BFD session ID number that represents the protection using MPLS fast reroute (FRR) and loop-free alternate (LFA).
<b>Weight</b>	<p>Weight for the backup path. If the weight of an indirect next hop is larger than zero, the weight value is shown.</p> <p>For sample output, see <a href="#">show route table</a>.</p>

Table 18: show route extensive Output Fields (*continued*)

Field Name	Field Description
Inactive reason	<p>If the route is inactive, the reason for its current state is indicated. Typical reasons include:</p> <ul style="list-style-type: none"> <li>• <b>Active preferred</b>—Currently active route was selected over this route.</li> <li>• <b>Always compare MED</b>—Path with a lower multiple exit discriminator (MED) is available.</li> <li>• <b>AS path</b>—Shorter AS path is available.</li> <li>• <b>Cisco Non-deterministic MED selection</b>—Cisco nondeterministic MED is enabled and a path with a lower MED is available.</li> <li>• <b>Cluster list length</b>—Path with a shorter cluster list length is available.</li> <li>• <b>Forwarding use only</b>—Path is only available for forwarding purposes.</li> <li>• <b>IGP metric</b>—Path through the next hop with a lower IGP metric is available.</li> <li>• <b>IGP metric type</b>—Path with a lower OSPF link-state advertisement type is available.</li> <li>• <b>Interior &gt; Exterior &gt; Exterior via Interior</b>—Direct, static, IGP, or EBGP path is available.</li> <li>• <b>Local preference</b>—Path with a higher local preference value is available.</li> <li>• <b>Next hop address</b>—Path with a lower metric next hop is available.</li> <li>• <b>No difference</b>—Path from a neighbor with a lower IP address is available.</li> <li>• <b>Not Best in its group</b>—Occurs when multiple peers of the same external AS advertise the same prefix and are grouped together in the selection process. When this reason is displayed, an additional reason is provided (typically one of the other reasons listed).</li> <li>• <b>Number of gateways</b>—Path with a higher number of next hops is available.</li> <li>• <b>Origin</b>—Path with a lower origin code is available.</li> <li>• <b>OSPF version</b>—Path does not support the indicated OSPF version.</li> <li>• <b>RIB preference</b>—Route from a higher-numbered routing table is available.</li> <li>• <b>Route distinguisher</b>—64-bit prefix added to IP subnets to make them unique.</li> <li>• <b>Route metric or MED comparison</b>—Route with a lower metric or MED is available.</li> <li>• <b>Route preference</b>—Route with a lower preference value is available.</li> <li>• <b>Router ID</b>—Path through a neighbor with a lower ID is available.</li> <li>• <b>Unusable path</b>—Path is not usable because of one of the following conditions: the route is damped, the route is rejected by an import policy, or the route is unresolved.</li> <li>• <b>Update source</b>—Last tiebreaker is the lowest IP address value.</li> </ul>
Local AS	Autonomous system (AS) number of the local routing device.
Age	How long the route has been known.
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.
Metric	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
MED-plus-IGP	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
TTL-Action	<p>For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.</p> <p>For sample output, see <a href="#">show route table</a>.</p>



Table 18: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>Task</b>	Name of the protocol that has added the route.
<b>Announcement bits</b>	<p>List of protocols that are consumers of the route. Using the following output as an example, <b>Announcement bits (3): 0-KRT 5-Resolve tree 2 8-BGP RT Background</b> there are (3) announcement bits to reflect the three clients (protocols) that have state for this route: Kernel (0-KRT), 5 (resolution tree process 2), and 8 (BGP).</p> <p>The notation <b><i>n</i>-Resolve inet</b> indicates that the route is used for route resolution for next hops found in the routing table. <i>n</i> is an index used by Juniper Networks customer support only.</p>
<b>AS path</b>	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
<b>validation-state</b>	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>
<b>FECs bound to route</b>	Point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.
<b>AS path: I &lt;Originator&gt;</b>	(For route reflected output only) Originator ID attribute set by the route reflector.

Table 18: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>route status</b>	<p>Indicates the status of a BGP route:</p> <ul style="list-style-type: none"> <li>• <b>Accepted</b>—The specified BGP route is imported by the default BGP policy.</li> <li>• <b>Import</b>—The route is imported into a Layer 3 VPN routing instance.</li> <li>• <b>Import-Protect</b>—A remote instance egress that is protected.</li> <li>• <b>Multipath</b>—A BGP multipath active route.</li> <li>• <b>MultipathContrib</b>—The route is not active but contributes to the BGP multipath.</li> <li>• <b>Protect</b>—An egress route that is protected.</li> <li>• <b>Stale</b>—A route that is marked stale due to graceful restart.</li> </ul>
Primary Upstream	When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.
RPF Nexthops	When multipoint LDP with MoFRR is configured, the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.
Label	Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.
weight	Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Cluster list	(For route reflected output only) Cluster ID sent by the route reflector.
Originator ID	(For route reflected output only) Address of router that originally sent the route to the route reflector.
Prefixes bound to route	Forwarding Equivalent Class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See the Output Field table in the <a href="#">show route detail</a> command for all possible values for this field.
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).
control flags	Control flags: <b>none</b> or Site Down.
mtu	Maximum transmission unit (MTU) information.
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.

Table 18: show route extensive Output Fields (*continued*)

Field Name	Field Description
<b>status vector</b>	Layer 2 VPN and VPLS network layer reachability information (NLRI).
<b>Localpref</b>	Local preference value included in the route.
<b>Router ID</b>	BGP router ID as advertised by the neighbor in the open message.
<b>Primary Routing Table</b>	In a routing table group, the name of the primary routing table in which the route resides.
<b>Secondary Tables</b>	In a routing table group, the name of one or more secondary tables in which the route resides.
<b>Originating RIB</b>	Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of inet.0 resolving through inet.0 and inet.3, this field indicates which routing table, inet.0 or inet.3, provided the best path for a particular prefix.
<b>Node path count</b>	Number of nodes in the path.
<b>Forwarding nexthops</b>	Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.

## Sample Output

### show route extensive

```

user@host> show route extensive
inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
203.0.113.10/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 203.0.113.10/16 -> {192.168.71.254}
    *Static Preference: 5
        Next-hop reference count: 29
        Next hop: 192.168.71.254 via fxp0.0, selected
        State: <Active NoReadvrt Int Ext>
        Local AS: 64496
        Age: 1:34:06
        Task: RT
        Announcement bits (2): 0-KRT 3-Resolve tree 2
        AS path: I

203.0.113.30/30 (2 entries, 1 announced)
    *Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 2
        Next hop: via so-0/3/0.0, selected
        State: <Active Int>
        Local AS: 64496
        Age: 1:32:40
        Task: IF
        Announcement bits (1): 3-Resolve tree 2
        AS path: I
    OSPF Preference: 10
        Next-hop reference count: 1
        Next hop: via so-0/3/0.0, selected

```

```

State: <Int>
Inactive reason: Route Preference
Local AS: 64496
Age: 1:32:40 Metric: 1
Area: 0.0.0.0
Task: OSPF
AS path: I

203.0.113.103/32 (1 entry, 1 announced)
  *Local Preference: 0
    Next hop type: Local
    Next-hop reference count: 7
    Interface: so-0/3/0.0
    State: <Active NoReadvrt Int>
    Local AS: 644969
    Age: 1:32:43
    Task: IF
    Announcement bits (1): 3-Resolve tree 2
    AS path: I

...

203.0.113.203/30 (1 entry, 1 announced)
TSI:
KRT in-kernel 203.0.113.203/30 -> {203.0.113.216}
  *OSPF Preference: 10
    Next-hop reference count: 9
    Next hop: via so-0/3/0.0
    Next hop: 203.0.113.216 via ge-3/1/0.0, selected
    State: <Active Int>
    Local AS: 64496
    Age: 1:32:19 Metric: 2
    Area: 0.0.0.0
    Task: OSPF
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

...

198.51.100.2/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 198.51.100.2/32 -> {}
  *PIM Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 64496
    Age: 1:34:08
    Task: PIM Recv
    Announcement bits (2): 0-KRT 3-Resolve tree 2
    AS path: I

...

198.51.100.22/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 198.51.100.22/32 -> {}
  *IGMP Preference: 0
    Next-hop reference count: 18
    State: <Active NoReadvrt Int>
    Local AS: 64496
    Age: 1:34:06

```

```

Task: IGMP
Announcement bits (2): 0-KRT 3-Resolve tree 2
AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

203.0.113.103/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
    Next-hop reference count: 6
    Next hop: 203.0.113.216 via ge-3/1/0.0 weight 0x1, selected
    Label-switched-path green-r1-r3
    Label operation: Push 100096
    State: <Active Int>
    Local AS: 64496
    Age: 1:28:12 Metric: 2
    Task: RSVP
    Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
    AS path: I

203.0.113.238/32 (1 entry, 1 announced)
  State: <FlashAll>
  *RSVP Preference: 7
    Next-hop reference count: 6
    Next hop: via so-0/3/0.0 weight 0x1, selected
    Label-switched-path green-r1-r2
    State: <Active Int>
    Local AS: 64496
    Age: 1:28:12 Metric: 1
    Task: RSVP
    Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
    AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

...

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 64496
    Age: 1:34:07
    Task: IF
    AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

0 (1 entry, 1 announced)
  TSI:
  KRT in-kernel 0 /36 -> {}
  *MPLS Preference: 0
    Next hop type: Receive
    Next-hop reference count: 6
    State: <Active Int>
    Local AS: 64496
    Age: 1:34:08 Metric: 1

```

```

Task: MPLS
Announcement bits (1): 0-KRT
AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
  299840 (1 entry, 1 announced)
    TSI:
      KRT in-kernel 299840 /52 -> {indirect(1048575)}
        *RSVP Preference: 7/2
          Next hop type: Flood
          Address: 0x9174a30
          Next-hop reference count: 4
          Next hop type: Router, Next hop index: 798
          Address: 0x9174c28
          Next-hop reference count: 2
          Next hop: 198.51.100.2 via lt-1/2/0.9 weight 0x1
          Label-switched-path R2-to-R4-2p2mp
          Label operation: Pop
          Next hop type: Router, Next hop index: 1048574
          Address: 0x92544f0
          Next-hop reference count: 2
          Next hop: 198.51.100.2 via lt-1/2/0.7 weight 0x1
          Label-switched-path R2-to-R200-p2mp
          Label operation: Pop
          Next hop: 198.51.100.2 via lt-1/2/0.5 weight 0x8001
          Label operation: Pop
          State: <Active Int>
          Age: 1:29 Metric: 1
          Task: RSVP
          Announcement bits (1): 0-KRT
          AS path: I...

      800010 (1 entry, 1 announced)
        TSI:
          KRT in-kernel 800010 /36 -> {vt-3/2/0.32769}
            *VPLS Preference: 7
              Next-hop reference count: 2
              Next hop: via vt-3/2/0.32769, selected
              Label operation: Pop
              State: <Active Int>
              Age: 1:31:53
              Task: Common L2 VC
              Announcement bits (1): 0-KRT
              AS path: I

          vt-3/2/0.32769 (1 entry, 1 announced)
            TSI:
              KRT in-kernel vt-3/2/0.32769.0 /16 -> {indirect(1048574)}
                *VPLS Preference: 7
                  Next-hop reference count: 2
                  Next hop: 203.0.113.216 via ge-3/1/0.0 weight 0x1, selected
                  Label-switched-path green-r1-r3
                  Label operation: Push 800012, Push 100096(top)
                  Protocol next hop: 203.0.113.103
                  Push 800012
                  Indirect next hop: 87272e4 1048574
                  State: <Active Int>
                  Age: 1:31:53 Metric2: 2

```

```

Task: Common L2 VC
Announcement bits (2): 0-KRT 1-Common L2 VC
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0
Indirect next hops: 1
    Protocol next hop: 203.0.113.103 Metric: 2
    Push 800012
    Indirect next hop: 87272e4 1048574
    Indirect path forwarding next hops: 1
        Next hop: 203.0.113.216 via ge-3/1/0.0 weight 0x1

    203.0.113.103/32 Originating RIB: inet.3
    Metric: 2 Node path count: 1
    Forwarding nexthops: 1
        Nexthop: 203.0.113.216 via ge-3/1/0.0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

2001:db8::10:255:71:52/128 (1 entry, 0 announced)
*Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Local AS: 64496
    Age: 1:34:07
    Task: IF
    AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
*Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active NoReadvrt Int>
    Local AS: 64496
    Age: 1:34:07
    Task: IF
    AS path: I

ff02::2/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::2/128 -> {}
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 64496
        Age: 1:34:08
        Task: PIM Recv6
        Announcement bits (1): 0-KRT
        AS path: I

ff02::d/128 (1 entry, 1 announced)
TSI:
KRT in-kernel ff02::d/128 -> {}
    *PIM Preference: 0
        Next-hop reference count: 18
        State: <Active NoReadvrt Int>
        Local AS: 64496
        Age: 1:34:08

```

```

Task: PIM Recv6
Announcement bits (1): 0-KRT
AS path: I

ff02::16/128 (1 entry, 1 announced)
TSI:
KRT in-kerne| ff02::16/128 -> {}
  *MLD    Preference: 0
          Next-hop reference count: 18
          State: <Active NoReadvrt Int>
          Local AS: 64496
          Age: 1:34:06
          Task: MLD
          Announcement bits (1): 0-KRT
          AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
  *Direct Preference: 0
          Next hop type: Interface
          Next-hop reference count: 1
          Next hop: via lo0.16385, selected
          State: <Active NoReadvrt Int>
          Age: 1:34:07
          Task: IF
          AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

203.0.113.103:1:3:1/96 (1 entry, 1 announced)
  *BGP    Preference: 170/-101
          Route Distinguisher: 203.0.113.103:1
          Next-hop reference count: 7
          Source: 203.0.113.103
          Protocol next hop: 203.0.113.103
          Indirect next hop: 2 no-forward
          State: <Secondary Active Int Ext>
          Local AS: 64496 Peer AS: 64496
          Age: 1:28:12 Metric2: 1
          Task: BGP_69.203.0.113.103+179
          Announcement bits (1): 0-green-l2vpn
          AS path: I
          Communities: target:11111:1 Layer2-info: encaps:VPLS,
          control flags:, mtu: 0
          Label-base: 800008, range: 8
          Localpref: 100
          Router ID: 203.0.113.103
          Primary Routing Table bgp.l2vpn.0

203.0.113.152:1:1:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699540
  *L2VPN Preference: 170/-1
          Next-hop reference count: 5
          Protocol next hop: 203.0.113.152
          Indirect next hop: 0 -
          State: <Active Int Ext>
          Age: 1:34:03 Metric2: 1
          Task: green-l2vpn
          Announcement bits (1): 1-BGP.0.0.0.0+179

```



```

AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
mtu: 0
Label-base: 800016, range: 8, status-vector: 0x9F

203.0.113.152:1:5:1/96 (1 entry, 1 announced)
TSI:
Page 0 idx 0 Type 1 val 8699528
  *L2VPN Preference: 170/-101
    Next-hop reference count: 5
    Protocol next hop: 203.0.113.152
    Indirect next hop: 0 -
    State: <Active Int Ext>
    Age: 1:34:03 Metric2: 1
    Task: green-l2vpn
    Announcement bits (1): 1-BGP.0.0.0.0+179
    AS path: I
    Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
    Label-base: 800008, range: 8, status-vector: 0x9F

...

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
TSI:

203.0.113.163:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000[0]
    Protocol next hop: 203.0.113.163 Indirect next hop: 86af000 296
    State: <Active Int>
    Local AS: 64499
    Age: 10:21
    Task: l2 circuit
    Announcement bits (1): 0-LDP
    AS path: I
    VC Label 100000, MTU 1500, VLAN ID 512

203.0.113.55/24 (1 entry, 1 announced)
TSI:
KRT queued (pending) add
  198.51.100.0/24 -> {Push 300112}
    *BGP Preference: 170/-101
      Next hop type: Router
      Address: 0x925c208
      Next-hop reference count: 2
      Source: 203.0.113.9
      Next hop: 203.0.113.9 via ge-1/2/0.15, selected
      Label operation: Push 300112
      Label TTL action: prop-ttl
      State: <Active Ext>
      Local AS: 64509 Peer AS: 65539
      Age: 1w0d 23:06:56
      AIGP: 25
      Task: BGP_65539.203.0.113.9+56732
      Announcement bits (1): 0-KRT
      AS path: 65539 64508 I
      Accepted

```

```

Route Label: 300112
Localpref: 100
Router ID: 213.0.113.99

```

### show route extensive (Access Route)

```

user@host> show route 203.0.113.102 extensive
inet.0: 39256 destinations, 39258 routes (39255 active, 0 holddown, 1 hidden)
203.0.113.102/32 (1 entry, 1 announced)
TSI:
KRT in-kerne1 203.0.113.102/32 -> {192.0.2.2}
OSPF area : 0.0.0.0, LSA ID : 203.0.113.102, LSA type : Extern
  *Access Preference: 13
    Next-hop reference count: 78472
    Next hop: 192.0.2.2 via fe-0/0/0.0, selected
    State: <Active Int>
  Age: 12
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (2): 0-KRT 1-OSPFv2
    AS path: I

```

```

user@host> show route 2001:db8:4641:1::/48 extensive

inet6.0: 75 destinations, 81 routes (75 active, 0 holddown, 0 hidden)
2001:db8:4641:1::/48 (1 entry, 1 announced)
TSI:
KRT in-kerne1 2001:db8:4641:1::/48 -> {#0 0.13.1.0.0.1}
  *Access Preference: 13
    Next hop type: Router, Next hop index: 74548
    Address: 0x1638c1d8
    Next-hop reference count: 6
    Next hop: #0 0.13.1.0.0.1 via demux0.1073753267, selected
    Session Id: 0x0
    State: <Active Int>
    Age: 4:17
    Validation State: unverified
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (2): 0-KRT 4-Resolve tree 2
    AS path: I
2001:db8:4641:1::/128 (1 entry, 1 announced)
TSI:
KRT in-kerne1 2001:db8:4641:1::/128 -> {#0 0.13.1.0.0.1}
  *Access-internal Preference: 12
    Next hop type: Router, Next hop index: 74548
    Address: 0x1638c1d8
    Next-hop reference count: 6
    Next hop: #0 0.13.1.0.0.1 via demux0.1073753267, selected
    Session Id: 0x0
    State: <Active Int>
    Age: 4:17
    Validation State: unverified
    Task: RPD Unix Domain Server./var/run/rpd_serv.local
    Announcement bits (2): 0-KRT 4-Resolve tree 2
    AS path: I

```

### show route extensive (BGP PIC Edge)

```

user@host> show route 198.51.100.6 extensive
ed.inet.0: 6 destinations, 9 routes (6 active, 0 holddown, 0 hidden)
198.51.100.6/32 (3 entries, 2 announced)

```

```

        State: <CalcForwarding>
TSI:
KRT in-kerne1 198.51.100.6/32 -> {indirect(1048574), indirect(1048577)}
Page 0 idx 0 Type 1 val 9219e30
  Nexthop: Self
  AS path: [2] 3 I
  Communities: target:2:1
Path 198.51.100.6 from 198.51.100.4 Vector len 4. Val: 0
..
    #Multipath Preference: 255
      Next hop type: Indirect
      Address: 0x93f4010
      Next-hop reference count: 2
..
      Protocol next hop: 198.51.1001.4
      Push 299824
      Indirect next hop: 944c000 1048574 INH Session ID: 0x3
      Indirect next hop: weight 0x1
      Protocol next hop: 198.51.100.5
      Push 299824
      Indirect next hop: 944c1d8 1048577 INH Session ID: 0x4
      Indirect next hop: weight 0x4000
      State: <ForwardingOnly Int Ext>
      Inactive reason: Forwarding use only
      Age: 25          Metric2: 15
      Validation State: unverified
      Task: RT
      Announcement bits (1): 0-KRT
      AS path: 3 I
      Communities: target:2:1

```

### show route extensive (FRR and LFA)

```

user@host> show route 203.0.113.20 extensive
inet.0: 46 destinations, 49 routes (45 active, 0 holddown, 1 hidden)
203.0.113.20/24 (2 entries, 1 announced)
  State: FlashAll
TSI:
KRT in-kerne1 203.0.113.20/24 -> {Push 299776, Push 299792}
  *RSVP Preference: 7/1
    Next hop type: Router, Next hop index: 1048574
    Address: 0xbbbc010
    Next-hop reference count: 5
    Next hop: 203.0.113.112 via ge-2/1/8.0 weight 0x1, selected
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299776
    Label TTL action: prop-ttl
    Session Id: 0x201
    Next hop: 203.0.113.122 via ge-2/1/4.0 weight 0x4001
    Label-switched-path europa-d-to-europa-e
    Label operation: Push 299792
    Label TTL action: prop-ttl
    Session Id: 0x202
    State: Active Int
    Local AS: 64500
    Age: 5:31 Metric: 2
    Task: RSVP
    Announcement bits (1): 0-KRT
    AS path: I
  OSPF Preference: 10
    Next hop type: Router, Next hop index: 615

```

```

Address: 0xb9d78c4
Next-hop reference count: 7
Next hop: 203.0.113.112 via ge-2/1/8.0, selected
Session Id: 0x201
State: Int
Inactive reason: Route Preference
Local AS: 64500
Age: 5:35 Metric: 3
Area: 0.0.0.0
Task: OSPF
AS path: I

```

### show route extensive (IS-IS)

```

user@host> show route extensive
IS-IS Preference: 15
Level: 1
Next hop type: Router, Next hop index: 1048577
Address: 0XXXXXXXXXX
Next-hop reference count: YY
Next hop: 203.0.113.22 via ae1.0 balance 43%, selected
Session Id: 0x141
Next hop: 203.0.113.22 via ae0.0 balance 57%

```

### show route extensive (Route Reflector)

```

user@host> show route extensive
203.0.113.0/8 (1 entry, 1 announced)

TSI:
KRT in-kernel 203.0.113.0/8 -> {indirect(40)}
*BGP Preference: 170/-101
Source: 192.168.4.214
Protocol next hop: 198.51.100.192 Indirect next hop: 84ac908 40
State: <Active Int Ext>
Local AS: 65548 Peer AS: 65548
Age: 3:09 Metric: 0 Metric2: 0
Task: BGP_65548.192.168.4.214+1033
Announcement bits (2): 0-KRT 4-Resolve inet.0
AS path: 65544 64507 I <Originator>
Cluster list: 198.51.100.1
Originator ID: 203.0.113.88
Communities: 7777:7777
Localpref: 100
Router ID: 203.0.113.4
Indirect next hops: 1
Protocol next hop: 203.0.113.192 Metric: 0
Indirect next hop: 84ac908 40
Indirect path forwarding next hops: 0
Next hop type: Discard

```

### show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```

user@host> show route label 299872 detail
mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
*LDP Preference: 9
Next hop type: Flood
Next-hop reference count: 3
Address: 0x9097d90

```

```

Next hop: via vt-0/1/0.1
Next-hop index: 661
Label operation: Pop
Address: 0x9172130
Next hop: via so-0/0/3.0
Next-hop index: 654
Label operation: Swap 299872
State: **Active Int>
Local AS: 64511
Age: 8:20      Metric: 1
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 203.0.113.166, grp 203.0.1.1,
src 192.168.142.2

```

### show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```

user@host> show route label 301568 detail

mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
  *LDP    Preference: 9
          Next hop type: Flood
          Address: 0x2735208
          Next-hop reference count: 3
          Next hop type: Router, Next hop index: 1397
          Address: 0x2735d2c
          Next-hop reference count: 3
          Next hop: 203.0.113.82 via ge-1/2/22.0
          Label operation: Pop
          Load balance label: None;
          Next hop type: Router, Next hop index: 1395
          Address: 0x2736290
          Next-hop reference count: 3
          Next hop: 203.0.113.2 via ge-1/2/18.0
          Label operation: Pop
          Load balance label: None;
          State: <Active Int AckRequest MulticastRPF>
          Local AS: 64500
          Age: 54:05      Metric: 1
          Validation State: unverified
          Task: LDP
          Announcement bits (1): 0-KRT
          AS path: I
          FECs bound to route: P2MP root-addr 198.51.100.1, grp: 232.1.1.1,
src: 192.168.219.11
          Primary Upstream : 198.51.100.3:0--198.51.100.2:0
            RPF Nexthops :
              ge-1/2/15.0, 1.2.94.1, Label: 301568, weight: 0x1
              ge-1/2/14.0, 1.2.3.1, Label: 301568, weight: 0x1
          Backup Upstream : 198.51.100.3:0--198.51.100.6:0
            RPF Nexthops :
              ge-1/2/20.0, 198.51.100.96, Label: 301584, weight: 0xffffe
              ge-1/2/19.0, 198.51.100.36, Label: 301584, weight: 0xffffe

```

## show route flow validation

<b>List of Syntax</b>	<a href="#">Syntax on page 318</a> <a href="#">Syntax (EX Series Switches) on page 318</a>
<b>Syntax</b>	show route flow validation <brief   detail> <ip-prefix> <table table-name> <logical-system (all   logical-system-name)>
<b>Syntax (EX Series Switches)</b>	show route flow validation <brief   detail> <ip-prefix> <table table-name>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display flow route information.
<b>Options</b>	<p><b>none</b>—Display flow route information.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>ip-prefix</b>—(Optional) IP address for the flow route.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>table table-name</b>—(Optional) Display flow route information for all routing tables whose name begins with this string (for example, inet.0 and inet6.0 are both displayed when you run the <b>show route flow validation inet</b> command).</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route flow validation on page 319</a> <a href="#">show route flow validation (IPv6) on page 319</a>
<b>Output Fields</b>	Table 19 on page 318 lists the output fields for the <b>show route flow validation</b> command. Output fields are listed in the approximate order in which they appear.

Table 19: show route flow validation Output Fields

Field Name	Field Description	Level of Output
routing-table-name	Name of the routing table (for example, inet.0).	All levels

Table 19: show route flow validation Output Fields (*continued*)

Field Name	Field Description	Level of Output
<i>prefix</i>	Route address.	All levels
Active unicast route	Active route in the routing table.	All levels
Dependent flow destinations	Number of flows for which there are routes in the routing table.	All levels
Origin	Source of the route flow.	All levels
Neighbor AS	Autonomous system identifier of the neighbor.	All levels
Flow destination	Number of entries and number of destinations that match the route flow.	All levels
Unicast best match	Destination that is the best match for the route flow.	All levels
Flags	Information about the route flow.	All levels

## Sample Output

### show route flow validation

```

user@host> show route flow validation
inet.0:
10.0.5.0/24Active unicast route
Dependent flow destinations: 1
Origin: 192.168.224.218, Neighbor AS: 64501
Flow destination (3 entries, 1 match origin)
Unicast best match: 10.0.5.0/24
Flags: SubtreeApex Consistent

```

### show route flow validation (IPv6)

```

user@host> show route flow validation
inet6.0:
2001:db8::11:11:11:0/120
    Active unicast route
        Dependent flow destinations: 2
        Origin: 2001:db8::13:14:2:2, Neighbor AS: 2000
2001:db8::11:11:11:10/128
    Flow destination (1 entries, 1 match origin, next-as)
        Unicast best match: 2001:db8::11:11:11:0/120
        Flags: Consistent
2001:db8::11:11:11:30/128
    Flow destination (1 entries, 1 match origin, next-as)
        Unicast best match: 2001:db8::11:11:11:0/120
        Flags: Consistent

```

## show route forwarding-table

- List of Syntax**    [Syntax on page 320](#)  
                          [Syntax \(MX Series Routers\) on page 320](#)  
                          [Syntax \(TX Matrix and TX Matrix Plus Routers\) on page 320](#)

**Syntax**    show route forwarding-table  
                  <detail | extensive | summary>  
                  <all>  
                  <ccc *interface-name*>  
                  <destination *destination-prefix*>  
                  <family *family* | matching *matching*>  
                  <interface-name *interface-name*>  
                  <label *name*>  
                  <matching *matching*>  
                  <multicast>  
                  <table (default | *logical-system-name/routing-instance-name* | *routing-instance-name*)>  
                  <vlan (all | *vlan-name*)>  
                  <vpn *vpn*>

**Syntax (MX Series Routers)**    show route forwarding-table  
                  <detail | extensive | summary>  
                  <all>  
                  <bridge-domain (all | *domain-name*)>  
                  <ccc *interface-name*>  
                  <destination *destination-prefix*>  
                  <family *family* | matching *matching*>  
                  <interface-name *interface-name*>  
                  <label *name*>  
                  <learning-vlan-id *learning-vlan-id*>  
                  <matching *matching*>  
                  <multicast>  
                  <table (default | *logical-system-name/routing-instance-name* | *routing-instance-name*)>  
                  <vlan (all | *vlan-name*)>  
                  <vpn *vpn*>

**Syntax (TX Matrix and TX Matrix Plus Routers)**    show route forwarding-table  
                  <detail | extensive | summary>  
                  <all>  
                  <ccc *interface-name*>  
                  <destination *destination-prefix*>  
                  <family *family* | matching *matching*>  
                  <interface-name *interface-name*>  
                  <matching *matching*>  
                  <label *name*>  
                  <lcc *number*>  
                  <multicast>  
                  <table *routing-instance-name*>  
                  <vpn *vpn*>

**Release Information**    Command introduced before Junos OS Release 7.4.  
                                  Option **bridge-domain** introduced in Junos OS Release 7.5



Option **learning-vlan-id** introduced in Junos OS Release 8.4

Options **all** and **vlan** introduced in Junos OS Release 9.6.

Command introduced in Junos OS Release 11.3 for the QFX Series.

Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Display the Routing Engine's forwarding table, including the network-layer prefixes and their next hops. This command is used to help verify that the routing protocol process has relayed the correction information to the forwarding table. The Routing Engine constructs and maintains one or more routing tables. From the routing tables, the Routing Engine derives a table of active routes, called the forwarding table.



**NOTE:** The Routing Engine copies the forwarding table to the Packet Forwarding Engine, the part of the router that is responsible for forwarding packets. To display the entries in the Packet Forwarding Engine's forwarding table, use the **show pfe route** command.

**Options** **none**—Display the routes in the forwarding tables. By default, the **show route forwarding-table** command does not display information about private, or internal, forwarding tables.

**detail | extensive | summary**—(Optional) Display the specified level of output.

**all**—(Optional) Display routing table entries for all forwarding tables, including private, or internal, tables.

**bridge-domain (all | bridge-domain-name)**—(MX Series routers only) (Optional) Display route entries for all bridge domains or the specified bridge domain.

**ccc interface-name**—(Optional) Display route entries for the specified circuit cross-connect interface.

**destination destination-prefix**—(Optional) Destination prefix.

**family family**—(Optional) Display routing table entries for the specified family: **bridge** (ccc | destination | detail | extensive | interface-name | label | learning-vlan-id | matching | multicast | summary | table | vlan | vpn), **ethernet-switching**, **evpn**, **fibre-channel**, **fmembers**, **inet**, **inet6**, **iso**, **mcsnoop-inet**, **mcsnoop-inet6**, **mpls**, **satellite-inet**, **satellite-inet6**, **satellite-vpls**, **tnp**, **unix**, **vpls**, or **vlan-classification**.

**interface-name interface-name**—(Optional) Display routing table entries for the specified interface.

**label name**—(Optional) Display route entries for the specified label.

**lcc number**—(TX Matrix and TX matrix Plus routers only) (Optional) On a routing matrix composed of a TX Matrix router and T640 routers, display information for the specified T640 router (or line-card chassis) connected to the TX Matrix router. On a routing matrix composed of the TX Matrix Plus router and T1600 or T4000 routers,

display information for the specified router (line-card chassis) connected to the TX Matrix Plus router.

Replace *number* with the following values depending on the LCC configuration:

- 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix.
- 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix.
- 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.
- 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.

**learning-vlan-id** *learning-vlan-id*—(MX Series routers only) (Optional) Display learned information for all VLANs or for the specified VLAN.

**matching** *matching*—(Optional) Display routing table entries matching the specified prefix or prefix length.

**multicast**—(Optional) Display routing table entries for multicast routes.

**table** —(Optional) Display route entries for all the routing tables in the main routing instance or for the specified routing instance. If your device supports logical systems, you can also display route entries for the specified logical system and routing instance. To view the routing instances on your device, use the [show route instance](#) command.

**vlan** (**all** | *vlan-name*)—(Optional) Display information for all VLANs or for the specified VLAN.

**vpn** *vpn*—(Optional) Display routing table entries for a specified VPN.

**Required Privilege Level**

view

**List of Sample Output**

[show route forwarding-table on page 327](#)  
[show route forwarding-table detail on page 328](#)  
[show route forwarding-table destination extensive \(Weights and Balances\) on page 328](#)  
[show route forwarding-table extensive on page 329](#)  
[show route forwarding-table extensive \(RPF\) on page 330](#)  
[show route forwarding-table \(dynamic list next hop\) on page 331](#)  
[show route forwarding-table family mpls on page 332](#)  
[show route forwarding-table family mpls ccc ge-0/0/1.1004 on page 332](#)  
[show route forwarding-table family vpls on page 332](#)  
[show route forwarding-table vpls \(Broadcast, unknown unicast, and multicast \(BUM\) hashing is enabled\) on page 332](#)  
[show route forwarding-table vpls \(Broadcast, unknown unicast, and multicast \(BUM\) hashing is enabled with MAC Statistics\) on page 333](#)  
[show route forwarding-table family vpls extensive on page 333](#)

[show route forwarding-table table default on page 334](#)

[show route forwarding-table table](#)

[logical-system-name/routing-instance-name on page 335](#)

[show route forwarding-table vpn on page 336](#)

**Output Fields** Table 20 on page 323 lists the output fields for the **show route forwarding-table** command. Output fields are listed in the approximate order in which they appear. Field names might be abbreviated (as shown in parentheses) when no level of output is specified, or when the **detail** keyword is used instead of the **extensive** keyword.

Table 20: show route forwarding-table Output Fields

Field Name	Field Description	Level of Output
Logical system	Name of the logical system. This field is displayed if you specify the <b>table logical-system-name/routing-instance-name</b> option on a device that is configured for and supports logical systems.	All levels
Routing table	Name of the routing table (for example, inet, inet6, mpls).	All levels

Table 20: show route forwarding-table Output Fields (*continued*)

Field Name	Field Description	Level of Output
Enabled protocols	<p>The features and protocols that have been enabled for a given routing table. This field can contain the following values:</p> <ul style="list-style-type: none"> <li>• BUM hashing—BUM hashing is enabled.</li> <li>• MAC Stats—Mac Statistics is enabled.</li> <li>• Bridging—Routing instance is a normal layer 2 bridge.</li> <li>• No VLAN—No VLANs are associated with the bridge domain.</li> <li>• All VLANs—The <b>vlan-id all</b> statement has been enabled for this bridge domain.</li> <li>• Single VLAN—Single VLAN ID is associated with the bridge domain.</li> <li>• MAC action drop—New MACs will be dropped when the MAC address limit is reached.</li> <li>• Dual VLAN—Dual VLAN tags are associated with the bridge domain</li> <li>• No local switching—No local switching is enabled for this routing instance..</li> <li>• Learning disabled—Layer 2 learning is disabled for this routing instance.</li> <li>• MAC limit reached—The maximum number of MAC addresses that was configured for this routing instance has been reached.</li> <li>• VPLS—The VPLS protocol is enabled.</li> <li>• No IRB I2-copy—The no-irb-layer-2-copy feature is enabled for this routing instance.</li> <li>• ACKed by all peers—All peers have acknowledged this routing instance.</li> <li>• BUM Pruning—BUM pruning is enabled on the VPLS instance.</li> <li>• Def BD VXLAN—VXLAN is enabled for the default bridge domain.</li> <li>• EVPN—EVPN protocol is enabled for this routing instance.</li> <li>• Def BD OVSDb—Open vSwitch Database (OVSDb) is enabled on the default bridge domain.</li> <li>• Def BD Ingress replication—VXLAN ingress node replication is enabled on the default bridge domain.</li> <li>• L2 backhaul—Layer 2 backhaul is enabled.</li> <li>• FRR optimize—Fast reroute optimization</li> <li>• MAC pinning—MAC pinning is enabled for this bridge domain.</li> <li>• MAC Aging Timer—The MAC table aging time is set per routing instance.</li> <li>• EVPN VXLAN—This routing instance supports EVPN with VXLAN encapsulation.</li> <li>• PBBN—This routing instance is configured as a provider backbone bridged network.</li> <li>• PBN—This routing instance is configured as a provider bridge network.</li> <li>• ETREE—The ETREE protocol is enabled on this EVPN routing instance.</li> <li>• ARP/NDP suppression—EVPN ARP NDP suppression is enabled in this routing instance.</li> <li>• Def BD EVPN VXLAN—EVPN VXLAN is enabled for the default bridge domain.</li> <li>• MPLS control word—Control word is enabled for this MPLS routing instance.</li> </ul>	All levels
Address family	Address family (for example, IP, IPv6, ISO, MPLS, and VPLS).	All levels
Destination	Destination of the route.	<b>detail extensive</b>

Table 20: show route forwarding-table Output Fields (*continued*)

Field Name	Field Description	Level of Output
Route Type (Type)	<p>How the route was placed into the forwarding table. When the <b>detail</b> keyword is used, the route type might be abbreviated (as shown in parentheses):</p> <ul style="list-style-type: none"> <li>• <b>cloned (clon)</b>—(TCP or multicast only) Cloned route.</li> <li>• <b>destination (dest)</b>—Remote addresses directly reachable through an interface.</li> <li>• <b>destination down (iddn)</b>—Destination route for which the interface is unreachable.</li> <li>• <b>interface cloned (ifcl)</b>—Cloned route for which the interface is unreachable.</li> <li>• <b>route down (ifdn)</b>—Interface route for which the interface is unreachable.</li> <li>• <b>ignore (ignr)</b>—Ignore this route.</li> <li>• <b>interface (intf)</b>—Installed as a result of configuring an interface.</li> <li>• <b>permanent (perm)</b>—Routes installed by the kernel when the routing table is initialized.</li> <li>• <b>user</b>—Routes installed by the routing protocol process or as a result of the configuration.</li> </ul>	All levels
Route Reference (RtRef)	Number of routes to reference.	<b>detail extensive</b>
Flags	<p>Route type flags:</p> <ul style="list-style-type: none"> <li>• <b>none</b>—No flags are enabled.</li> <li>• <b>accounting</b>—Route has accounting enabled.</li> <li>• <b>cached</b>—Cache route.</li> <li>• <b>incoming-iface interface-number</b>—Check against incoming interface.</li> <li>• <b>prefix load balance</b>—Load balancing is enabled for this prefix.</li> <li>• <b>rt nh decoupled</b>—Route has been decoupled from the next hop to the destination.</li> <li>• <b>sent to PFE</b>—Route has been sent to the Packet Forwarding Engine.</li> <li>• <b>static</b>—Static route.</li> </ul>	<b>extensive</b>
Next hop	IP address of the next hop to the destination.	<b>detail extensive</b>

Table 20: show route forwarding-table Output Fields (*continued*)

Field Name	Field Description	Level of Output
Next hop Type (Type)	<p>Next-hop type. When the <b>detail</b> keyword is used, the next-hop type might be abbreviated (as indicated in parentheses):</p> <ul style="list-style-type: none"> <li>• <b>broadcast (bcst)</b>—Broadcast.</li> <li>• <b>deny</b>—Deny.</li> <li>• <b>discard (dscd)</b>—Discard.</li> <li>• <b>hold</b>—Next hop is waiting to be resolved into a unicast or multicast type.</li> <li>• <b>indexed (idxd)</b>—Indexed next hop.</li> <li>• <b>indirect (indr)</b>—Indirect next hop.</li> <li>• <b>local (locl)</b>—Local address on an interface.</li> <li>• <b>routed multicast (mcrst)</b>—Regular multicast next hop.</li> <li>• <b>multicast (mcst)</b>—Wire multicast next hop (limited to the LAN).</li> <li>• <b>multicast discard (mdsc)</b>—Multicast discard.</li> <li>• <b>multicast group (mgrp)</b>—Multicast group member.</li> <li>• <b>receive (rcv)</b>—Receive.</li> <li>• <b>reject (rjct)</b>—Discard. An ICMP unreachable message was sent.</li> <li>• <b>resolve (rslv)</b>—Resolving the next hop.</li> <li>• <b>unicast (ucst)</b>—Unicast.</li> <li>• <b>unilist (ulst)</b>—List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.</li> </ul>	<b>detail extensive</b>
Index	Software index of the next hop that is used to route the traffic for a given prefix.	<b>detail extensive none</b>
Route interface-index	Logical interface index from which the route is learned. For example, for interface routes, this is the logical interface index of the route itself. For static routes, this field is zero. For routes learned through routing protocols, this is the logical interface index from which the route is learned.	<b>extensive</b>
Reference (NhRef)	Number of routes that refer to this next hop.	<b>detail extensive none</b>
Next-hop interface (Netif)	Interface used to reach the next hop.	<b>detail extensive none</b>
Weight	Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible (see the <b>Balance</b> field description).	<b>extensive</b>
Balance	Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a router is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.	<b>extensive</b>
RPF interface	List of interfaces from which the prefix can be accepted. Reverse path forwarding (RPF) information is displayed only when <b>rpf-check</b> is configured on the interface.	<b>extensive</b>

## Sample Output

### show route forwarding-table

```

user@host> show route forwarding-table
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  46    4
0.0.0.0/32       perm  0                               dscd  44    1
172.16.1.0/24    ifdn  0                               rslv  608    1 ge-2/0/1.0
172.16.1.0/32    iddn  0 172.16.1.0        recv  606    1 ge-2/0/1.0
172.16.1.1/32    user  0                               rjct  46    4
172.16.1.1/32    intf  0 172.16.1.1        locl  607    2
172.16.1.1/32    iddn  0 172.16.1.1        locl  607    2
172.16.1.255/32  iddn  0 ff:ff:ff:ff:ff:ff bcst  605    1 ge-2/0/1.0
10.0.0.0/24      intf  0                               rslv  616    1 ge-2/0/0.0
10.0.0.0/32      dest  0 10.0.0.0          recv  614    1 ge-2/0/0.0
10.0.0.1/32      intf  0 10.0.0.1          locl  615    2
10.0.0.1/32      dest  0 10.0.0.1          locl  615    2
10.0.0.255/32    dest  0 10.0.0.255        bcst  613    1 ge-2/0/0.0
10.1.1.0/24      ifdn  0                               rslv  612    1 ge-2/0/1.0
10.1.1.0/32      iddn  0 10.1.1.0          recv  610    1 ge-2/0/1.0
10.1.1.1/32      user  0                               rjct  46    4
10.1.1.1/32      intf  0 10.1.1.1          locl  611    2
10.1.1.1/32      iddn  0 10.1.1.1          locl  611    2
10.1.1.255/32    iddn  0 ff:ff:ff:ff:ff:ff bcst  609    1 ge-2/0/1.0
10.206.0.0/16    user  0 10.209.63.254      ucst  419    20 fxp0.0
10.209.0.0/16    user  1 0:12:1e:ca:98:0    ucst  419    20 fxp0.0
10.209.0.0/18    intf  0                               rslv  418    1 fxp0.0
10.209.0.0/32    dest  0 10.209.0.0        recv  416    1 fxp0.0
10.209.2.131/32  intf  0 10.209.2.131      locl  417    2
10.209.2.131/32  dest  0 10.209.2.131      locl  417    2
10.209.17.55/32  dest  0 0:30:48:5b:78:d2  ucst  435    1 fxp0.0
10.209.63.42/32  dest  0 0:23:7d:58:92:ca  ucst  434    1 fxp0.0
10.209.63.254/32 dest  0 0:12:1e:ca:98:0    ucst  419    20 fxp0.0
10.209.63.255/32 dest  0 10.209.63.255      bcst  415    1 fxp0.0
10.227.0.0/16    user  0 10.209.63.254      ucst  419    20 fxp0.0

...

Routing table: iso
ISO:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  27    1
47.0005.80ff.f800.0000.0108.0003.0102.5524.5220.00
intf  0                               locl  28    1

Routing table: inet6
Internet6:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  6    1
ff00::/8         perm  0                               mdsc  4    1
ff02::1/128      perm  0 ff02::1          mcst  3    1

Routing table: ccc
MPLS:
Interface.Label  Type RtRef Next hop          Type Index NhRef Netif
default          perm  0                               rjct  16    1
100004(top)fe-0/0/1.0

```

## show route forwarding-table detail

```

user@host> show route forwarding-table detail
Routing table: inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          user   2 0:90:69:8e:b1:1b ucst  132   4 fxp0.0
default          perm   0                               rjct   14    1
10.1.1.0/24      intf   0 ff.3.0.21         ucst  322   1 so-5/3/0.0
10.1.1.0/32      dest   0 10.1.1.0          recv  324   1 so-5/3/0.0
10.1.1.1/32      intf   0 10.1.1.1          locl  321   1
10.1.1.255/32    dest   0 10.1.1.255        bcst  323   1 so-5/3/0.0
10.21.21.0/24    intf   0 ff.3.0.21         ucst  326   1 so-5/3/0.0
10.21.21.0/32    dest   0 10.21.21.0        recv  328   1 so-5/3/0.0
10.21.21.1/32    intf   0 10.21.21.1        locl  325   1
10.21.21.255/32  dest   0 10.21.21.255      bcst  327   1 so-5/3/0.0
127.0.0.1/32     intf   0 127.0.0.1         locl  320   1
172.17.28.19/32  clon   1 192.168.4.254     ucst  132   4 fxp0.0
172.17.28.44/32  clon   1 192.168.4.254     ucst  132   4 fxp0.0

...

Routing table: private1__inet
Internet:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct   46    1
10.0.0.0/8       intf   0                               rslv  136   1 fxp1.0
10.0.0.0/32      dest   0 10.0.0.0          recv  134   1 fxp1.0
10.0.0.4/32      intf   0 10.0.0.4          locl  135   2
10.0.0.4/32      dest   0 10.0.0.4          locl  135   2

...

Routing table: iso
ISO:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct   38    1

Routing table: inet6
Internet6:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct   22    1
ff00::/8         perm   0                               mdsc   21    1
ff02::1/128      perm   0 ff02::1          mcst   17    1

...

Routing table: mpls
MPLS:
Destination      Type RtRef Next hop          Type Index NhRef Netif
default          perm   0                               rjct  28    1

```

## show route forwarding-table destination extensive (Weights and Balances)

```

user@host> show route forwarding-table destination 3.4.2.1 extensive
Routing table: inet [Index 0]
Internet:

Destination: 3.4.2.1/32
Route type: user

```



Route reference: 0	Route interface-index: 0
Flags: sent to PFE	
Next-hop type: unicast	Index: 262143    Reference: 1
Nexthop: 172.16.4.4	
Next-hop type: unicast	Index: 335    Reference: 2
Next-hop interface: so-1/1/0.0	Weight: 22    Balance: 3
Nexthop: 145.12.1.2	
Next-hop type: unicast	Index: 337    Reference: 2
Next-hop interface: so-0/1/2.0	Weight: 33    Balance: 33

### show route forwarding-table extensive

```

user@host> show route forwarding-table extensive
Routing table: inet [Index 0]
Internet:

Destination: default
  Route type: user
  Route reference: 2
  Flags: sent to PFE
  Nexthop: 00:00:5E:00:53:1b
  Next-hop type: unicast
  Next-hop interface: fxp0.0
  Route interface-index: 0
  Index: 132    Reference: 4

Destination: default
  Route type: permanent
  Route reference: 0
  Flags: none
  Next-hop type: reject
  Route interface-index: 0
  Index: 14    Reference: 1

Destination: 127.0.0.1/32
  Route type: interface
  Route reference: 0
  Flags: sent to PFE
  Nexthop: 127.0.0.1
  Next-hop type: local
  Route interface-index: 0
  Index: 320    Reference: 1

...

Routing table: private1__inet [Index 1]
Internet:

Destination: default
  Route type: permanent
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: reject
  Route interface-index: 0
  Index: 46    Reference: 1

Destination: 10.0.0.0/8
  Route type: interface
  Route reference: 0
  Flags: sent to PFE
  Next-hop type: resolve
  Next-hop interface: fxp1.0
  Route interface-index: 3
  Index: 136    Reference: 1

...

Routing table: iso [Index 0]
ISO:

Destination: default

```

```

Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 38      Reference: 1

Routing table: inet6 [Index 0]
Internet6:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 22      Reference: 1

Destination: ff00::/8
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: multicast discard
Route interface-index: 0
Index: 21      Reference: 1

...

Routing table: private1__inet6 [Index 1]
Internet6:

Destination: default
Route type: permanent
Route reference: 0
Flags: sent to PFE
Next-hop type: reject
Route interface-index: 0
Index: 54      Reference: 1

Destination: fe80::2a0:a5ff:fe3d:375/128
Route type: interface
Route reference: 0
Flags: sent to PFE
Next-hop: fe80::2a0:a5ff:fe3d:375
Next-hop type: local
Route interface-index: 0
Index: 75      Reference: 1

...

```

### show route forwarding-table extensive (RPF)

The next example is based on the following configuration, which enables an RPF check on all routes that are learned from this interface, including the interface route:

```

so-1/1/0 {
  unit 0 {
    family inet {
      rpf-check;
      address 192.0.2.2/30;
    }
  }
}

user@host> show route forwarding-table extensive
Routing table: inet [Index 0]
Internet:
...
...
Destination: 192.0.2.3/32

```

```

Route type: destination
Route reference: 0
Flags: sent to PFE
Nexthop: 192.0.2.3
Next-hop type: broadcast
Next-hop interface: so-1/1/0.0
RPF interface: so-1/1/0.0
Route interface-index: 67
Index: 328      Reference: 1

```

### show route forwarding-table (dynamic list next hop)

The **show route forwarding table** output shows the two next hop elements for a multihomed EVPN destination.

```

user@host> show route forwarding-table label 299952 extensive
MPLS:

Destination: 299952
Route type: user
Route reference: 0
Multicast RPF nh index: 0
P2mpidx: 0
Flags: sent to PFE, rt nh decoupled
Next-hop type: indirect
Nexthop:
Next-hop type: composite
Next-hop type: indirect
Nexthop: 1.0.0.4
Next-hop type: Push 301632, Push 299776(top) Index: 600 Reference: 2
Load Balance Label: None
Next-hop interface: ge-0/0/1.0
Next-hop type: indirect
Nexthop: 1.0.0.4
Next-hop type: Push 301344, Push 299792(top) Index: 619 Reference: 2
Load Balance Label: None
Next-hop interface: ge-0/0/1.0
Route interface-index: 0
Index: 1048575 Reference: 2
Index: 601      Reference: 2
Index: 1048574 Reference: 3
Index: 1048577 Reference: 3

```

After one of the PE router has been disabled in the EVPN multihomed network, the same **show route forwarding table** output command shows one next hop element and one empty next hop element.

```

user@host> show route forwarding-table label 299952 extensive
Routing table: default.mpls [Index 0]
MPLS:

Destination: 299952
Route type: user
Route reference: 0
Multicast RPF nh index: 0
P2mpidx: 0
Flags: sent to PFE, rt nh decoupled
Next-hop type: indirect
Nexthop:
Next-hop type: composite
Next-hop type: indirect
Nexthop: 1.0.0.4
Next-hop type: Push 301344, Push 299792(top) Index: 619 Reference: 2
Load Balance Label: None
Next-hop interface: ge-0/0/1.0
Route interface-index: 0
Index: 1048575 Reference: 2
Index: 601      Reference: 2
Index: 1048577 Reference: 3

```

**show route forwarding-table family mpls**

```

user@host> show route forwarding-table family mpls
Routing table: mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0                rjct   19    1
0                user  0                recv   18    3
1                user  0                recv   18    3
2                user  0                recv   18    3
100000           user  0 10.31.1.6        swap  100001 fe-1/1/0.0
800002           user  0                Pop                                vt-0/3/0.32770

vt-0/3/0.32770 (VPLS)
                    user  0                indr   351    4
                    Push 800000, Push 100002(top)

so-0/0/0.0

```

**show route forwarding-table family mpls ccc ge-0/0/1.1004**

```

user@host> show route forwarding-table mpls ccc ge-0/0/1.1004
Routing table: default.mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
ge-0/0/1.1004    (CCC) user  0                ulst   1048577 2
                  comp      754      3
                  comp      755      3
                  comp      756      3

Routing table: __mpls-oam__.mpls
MPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0                dscd   556    1

```

**show route forwarding-table family vpls**

```

user@host> show route forwarding-table family vpls
Routing table: green.vpls
VPLS:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          dnm  0                flood  353    1
default          perm  0                rjct   298    1
fe-0/1/0.0       dnm  0                flood  355    1
00:00:5E:00:53:1f/48 <<<<<Remote CE
                    dnm  0                indr   351    4
                    Push 800000, Push 100002(top)

so-0/0/0.0
00:00:5E:00:53:1f/48 <<<<<Local CE
                    dnm  0                ucst   354    2 fe-0/1/0.0

```

**show route forwarding-table vpls (Broadcast, unknown unicast, and multicast (BUM) hashing is enabled)**

```

user@host> show route forwarding-table vpls
Routing table: green.vpls
VPLS:
Enabled protocols: BUM hashing
Destination      Type RtRef Next hop      Type Index NhRef Netif

```

```

default          perm    0          dscd      519      1
lsi.1048832      intf    0          indr     1048574  4
                  172.16.3.2      Push 262145    621      2

ge-3/0/0.0
00:00:5E:00:53:01/48 user    0          ucst      590      5 ge-2/3/9.0
0x30003/51      user    0          comp      627      2
ge-2/3/9.0      intf    0          ucst      590      5 ge-2/3/9.0
ge-3/1/3.0      intf    0          ucst      619      4 ge-3/1/3.0
0x30002/51      user    0          comp      600      2
0x30001/51      user    0          comp      597      2

```

**show route forwarding-table vpls (Broadcast, unknown unicast, and multicast (BUM) hashing is enabled with MAC Statistics)**

```

user@host> show route forwarding-table vpls
Routing table: green.vpls
VPLS:
Enabled protocols: BUM hashing, MAC Stats
Destination      Type RtRef Next hop      Type Index  NhRef Netif
default          perm    0          dscd      519      1
lsi.1048834      intf    0          indr     1048574  4
                  172.16.3.2      Push 262145    592      2

ge-3/0/0.0
00:19:e2:25:d0:01/48 user    0          ucst      590      5 ge-2/3/9.0
0x30003/51      user    0          comp      630      2
ge-2/3/9.0      intf    0          ucst      590      5 ge-2/3/9.0
ge-3/1/3.0      intf    0          ucst      591      4 ge-3/1/3.0
0x30002/51      user    0          comp      627      2
0x30001/51      user    0          comp      624      2

```

**show route forwarding-table family vpls extensive**

```

user@host> show route forwarding-table family vpls extensive
Routing table: green.vpls [Index 2]
VPLS:

Destination: default
Route type: dynamic
Route reference: 0
Flags: sent to PFE
Next-hop type: flood
Next-hop type: unicast
Next-hop interface: fe-0/1/3.0
Next-hop type: unicast
Next-hop interface: fe-0/1/2.0
Route interface-index: 72
Index: 289      Reference: 1
Index: 291      Reference: 3
Index: 290      Reference: 3

Destination: default
Route type: permanent
Route reference: 0
Flags: none
Next-hop type: discard
Route interface-index: 0
Index: 341      Reference: 1

Destination: fe-0/1/2.0
Route type: dynamic
Route reference: 0
Flags: sent to PFE
Next-hop type: flood
Next-hop type: indirect
Next-hop type: Push 800016
Next-hop interface: at-1/0/1.0
Route interface-index: 69
Index: 293      Reference: 1
Index: 363      Reference: 4

```

```

Next-hop type: indirect          Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0
Next-hop type: unicast          Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0

Destination: fe-0/1/3.0
Route type: dynamic
Route reference: 0              Route interface-index: 70
Flags: sent to PFE
Next-hop type: flood           Index: 292      Reference: 1
Next-hop type: indirect        Index: 363      Reference: 4
Next-hop type: Push 800016
Next-hop interface: at-1/0/1.0
Next-hop type: indirect        Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0
Next-hop type: unicast          Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0

Destination: 00:00:5E:00:53:01/48
Route type: dynamic
Route reference: 0              Route interface-index: 70
Flags: sent to PFE, prefix load balance
Next-hop type: unicast          Index: 291      Reference: 3
Next-hop interface: fe-0/1/3.0
Route used as destination:
  Packet count:      6640    Byte count:      675786
Route used as source
  Packet count:      6894    Byte count:      696424

Destination: 00:00:5E:00:53:04/48
Route type: dynamic
Route reference: 0              Route interface-index: 69
Flags: sent to PFE, prefix load balance
Next-hop type: unicast          Index: 290      Reference: 3
Next-hop interface: fe-0/1/2.0
Route used as destination:
  Packet count:      96      Byte count:      8079
Route used as source:
  Packet count:      296      Byte count:      24955

Destination: 00:00:5E:00:53:05/48
Route type: dynamic
Route reference: 0              Route interface-index: 74
Flags: sent to PFE, prefix load balance
Next-hop type: indirect        Index: 301      Reference: 5
Next hop: 10.31.3.2
Next-hop type: Push 800000
Next-hop interface: fe-0/1/1.0

```

### show route forwarding-table table default

```

user@host> show route forwarding-table table default
Routing table: default.inet
Internet:
Destination      Type RtRef Next hop      Type Index NhRef Netif
default          perm  0         0              rjct  36    2
0.0.0.0/32       perm  0         0              dscd  34    1

```

```

10.0.60.0/30      user    0 10.0.60.13      ucst    713    5 fe-0/1/3.0
10.0.60.12/30     intf    0                rslv    688    1 fe-0/1/3.0
10.0.60.12/32     dest    0 10.0.60.12      recv    686    1 fe-0/1/3.0
10.0.60.13/32     dest    0 0:5:85:8b:bc:22 ucst    713    5 fe-0/1/3.0
10.0.60.14/32     intf    0 10.0.60.14      locl    687    2
10.0.60.14/32     dest    0 10.0.60.14      locl    687    2
10.0.60.15/32     dest    0 10.0.60.15      bcst    685    1 fe-0/1/3.0
10.0.67.12/30     user    0 10.0.60.13      ucst    713    5 fe-0/1/3.0
10.0.80.0/30      ifdn    0 ff.3.0.21        ucst    676    1 so-0/0/1.0
10.0.80.0/32      dest    0 10.0.80.0        recv    678    1 so-0/0/1.0
10.0.80.2/32      user    0                rjct    36     2
10.0.80.2/32      intf    0 10.0.80.2        locl    675    1
10.0.80.3/32      dest    0 10.0.80.3        bcst    677    1 so-0/0/1.0
10.0.90.12/30     intf    0                rslv    684    1 fe-0/1/0.0
10.0.90.12/32     dest    0 10.0.90.12      recv    682    1 fe-0/1/0.0
10.0.90.14/32     intf    0 10.0.90.14      locl    683    2
10.0.90.14/32     dest    0 10.0.90.14      locl    683    2
10.0.90.15/32     dest    0 10.0.90.15      bcst    681    1 fe-0/1/0.0
10.5.0.0/16       user    0 192.168.187.126 ucst    324    15 fxp0.0
10.10.0.0/16      user    0 192.168.187.126 ucst    324    15 fxp0.0
10.13.10.0/23     user    0 192.168.187.126 ucst    324    15 fxp0.0
10.84.0.0/16      user    0 192.168.187.126 ucst    324    15 fxp0.0
10.150.0.0/16     user    0 192.168.187.126 ucst    324    15 fxp0.0
10.157.64.0/19    user    0 192.168.187.126 ucst    324    15 fxp0.0
10.209.0.0/16     user    0 192.168.187.126 ucst    324    15 fxp0.0

```

...

Routing table: default.iso

ISO:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	60	1	

Routing table: default.inet6

Internet6:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	44	1	
::/128	perm	0		dscd	42	1	
ff00::/8	perm	0		mdsc	43	1	
ff02::1/128	perm	0	ff02::1	mcst	39	1	

Routing table: default.mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		dscd	50	1	

### show route forwarding-table table logical-system-name/routing-instance-name

```
user@host> show route forwarding-table table R4/vpn-red
```

Logical system: R4

Routing table: vpn-red.inet

Internet:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	563	1	
0.0.0.0/32	perm	0		dscd	561	2	
172.16.0.1/32	user	0		dscd	561	2	
172.16.2.0/24	intf	0		rslv	771	1	ge-1/2/0.3
172.16.2.0/32	dest	0	172.16.2.0	recv	769	1	ge-1/2/0.3
172.16.2.1/32	intf	0	172.16.2.1	locl	770	2	
172.16.2.1/32	dest	0	172.16.2.1	locl	770	2	
172.16.2.2/32	dest	0	0.4.80.3.0.1b.c0.d5.e4.bd.0.1b.c0.d5.e4.bc.8.0				

```

172.16.2.255/32    dest    0 172.16.2.255    ucst    789    1 ge-1/2/0.3
172.16.233.0/4     perm    1                bcst    768    1 ge-1/2/0.3
172.16.233.1/32    perm    0 172.16.233.1    mdsc    562    1
255.255.255.255/32 perm    0                mcst    558    1
                                bcst    559    1

```

Logical system: R4

Routing table: vpn-red.iso

ISO:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	608	1	

Logical system: R4

Routing table: vpn-red.inet6

Internet6:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		rjct	708	1	
::/128	perm	0		dscd	706	1	
ff00::/8	perm	0		mdsc	707	1	
ff02::1/128	perm	0	ff02::1	mcst	704	1	

Logical system: R4

Routing table: vpn-red.mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		dscd	638		

## show route forwarding-table vpn

```
user@host> show route forwarding-table vpn VPN-A
```

Routing table:: VPN-A.inet

Internet:

Destination	Type	RtRef	Nexthop	Type	Index	NhRef	Netif
default	perm	0		rjct	4	4	
10.39.10.20/30	intf	0	ff.3.0.21	ucst	40	1	
so-0/0/0.0							
10.39.10.21/32	intf	0	10.39.10.21	loc1	36	1	
10.255.14.172/32	user	0		ucst	69	2	
so-0/0/0.0							
10.255.14.175/32	user	0		indr	81	3	
				Push	100004	Push	
100004(top) so-1/0/0.0							
172.16.233.0/4	perm	2		mdsc	5	3	
172.16.233.1/32	perm	0	172.16.233.1	mcst	1	8	
172.16.233.5/32	user	1	172.16.233.5	mcst	1	8	
255.255.255.255/32	perm	0		bcst	2	3	

On QFX5200, the results for this command look like this:

```
show route forwarding-table family mpls
```

Routing table: default.mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0	dscd	65	1		
0	user	0	recv	64	4		
1	user	0	recv	64	4		
2	user	0	recv	64	4		
13	user	0	recv	64	4		
300384	user	0	9.1.1.1 Pop	1711	2	xe-0/0/34.0	
300384(S=0)	user	0	9.1.1.1 Pop	1712	2	xe-0/0/34.0	



```
300400 user 0 ulst 131071 2
                                10.1.1.2 Pop 1713 1 xe-0/0/38.0
                                172.16.11.2 Pop 1714 1 xe-0/0/40.0
300400(S=0) user 0 ulst 131072 2
                                10.1.1.2 Pop 1715 1 xe-0/0/38.0
                                172.16.11.2 Pop 1716 1 xe-0/0/40.0
```

Routing table: \_\_mpls-oam\_\_.mpls

MPLS:

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0	dscd	1681	1		

## show route inactive-path

---

<b>List of Syntax</b>	<a href="#">Syntax on page 338</a> <a href="#">Syntax (EX Series Switches) on page 338</a>
<b>Syntax</b>	<code>show route inactive-path</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route inactive-path</code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display routes for destinations that have no active route. An inactive route is a route that was not selected as the best path.
<b>Options</b>	<b>none</b> —Display all inactive routes.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <a href="#">show route active-path on page 252</a></li></ul>
<b>List of Sample Output</b>	<a href="#">show route inactive-path on page 338</a> <a href="#">show route inactive-path detail on page 339</a> <a href="#">show route inactive-path extensive on page 340</a> <a href="#">show route inactive-path terse on page 340</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route inactive-path

```
user@host> show route inactive-path

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
```

```

Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.100.12/30      [OSPF/10] 03:57:28, metric 1
                    > via so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/8          [Direct/0] 04:39:56
                    > via fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.80.0/30       [BGP/170] 04:38:17, localpref 100
                    AS path: 100 I
                    > to 10.12.80.1 via ge-6/3/2.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

### show route inactive-path detail

```

user@host> show route inactive-path detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete

10.12.100.12/30 (2 entries, 1 announced)
  OSPF   Preference: 10
        Next-hop reference count: 1
        Next hop: via so-0/3/0.0, selected
        State: <Int>
        Inactive reason: Route Preference
        Local AS:      1
        Age: 3:58:24   Metric: 1
        Area: 0.0.0.0
        Task: OSPF
        AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

10.0.0.0/8 (2 entries, 0 announced)
  Direct Preference: 0
        Next hop type: Interface
        Next-hop reference count: 1
        Next hop: via fxp1.0, selected
        State: <NotBest Int>

```

```

Inactive reason: No difference
Age: 4:40:52
Task: IF
AS path: I

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.12.80.0/30 (2 entries, 1 announced)
  BGP Preference: 170/-101
    Next-hop reference count: 6
    Source: 10.12.80.1
    Next hop: 10.12.80.1 via ge-6/3/2.0, selected
    State: <Ext>
    Inactive reason: Route Preference
    Peer AS: 100
    Age: 4:39:13
    Task: BGP_100.10.12.80.1+179
    AS path: 100 I
    Localpref: 100
    Router ID: 10.0.0.0

```

### show route inactive-path extensive

The output for the **show route inactive-path extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see [show route inactive-path detail on page 339](#).

### show route inactive-path terse

```

user@host> show route inactive-path terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
  10.12.100.12/30   0 10           1             >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
  10.0.0.0/8        D  0           0             >fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
  10.12.80.0/30     B 170          100             >10.12.80.1    100 I

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```

bgp.13vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)  
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)  
Restart Complete

private1\_\_inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

## show route inactive-prefix

---

<b>List of Syntax</b>	<a href="#">Syntax on page 342</a> <a href="#">Syntax (EX Series Switches) on page 342</a>
<b>Syntax</b>	<code>show route inactive-prefix</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route inactive-prefix</code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display inactive route destinations in each routing table.
<b>Options</b>	<b>none</b> —Display all inactive route destination.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route inactive-prefix on page 342</a> <a href="#">show route inactive-prefix detail on page 343</a> <a href="#">show route inactive-prefix extensive on page 343</a> <a href="#">show route inactive-prefix terse on page 343</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route inactive-prefix

```
user@host> show route inactive-prefix

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

127.0.0.1/32          [Direct/0] 00:04:54
> via lo0.0
```

### show route inactive-prefix detail

```

user@host> show route inactive-prefix detail

inet.0: 14 destinations, 14 routes (13 active, 0 holddown, 1 hidden)
127.0.0.1/32 (1 entry, 0 announced)
  Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Hidden Martian Int>
    Age: 4:51
    Task: IF
    AS path: I00:04:54
      > via lo0.0

```

### show route inactive-prefix extensive

The output for the **show route inactive-prefix extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see [show route inactive-prefix detail on page 343](#).

### show route inactive-prefix terse

```

user@host> show route inactive-prefix terse

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
127.0.0.1/32      D   0                >100.0

```

## show route instance

---

<b>List of Syntax</b>	<a href="#">Syntax on page 344</a> <a href="#">Syntax (EX Series Switches and QFX Series) on page 344</a>
<b>Syntax</b>	<pre>show route instance &lt;brief   detail   summary&gt; &lt;instance-name&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;operational&gt;</pre>
<b>Syntax (EX Series Switches and QFX Series)</b>	<pre>show route instance &lt;brief   detail   summary&gt; &lt;instance-name&gt; &lt;operational&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 11.3 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
<b>Description</b>	Display routing instance information.
<b>Options</b>	<p><b>none</b>—(Same as <b>brief</b>) Display standard information about all routing instances.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>. (These options are not available with the <b>operational</b> keyword.)</p> <p><b>instance-name</b>—(Optional) Display information for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show route instance cust1</b> command).</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>operational</b>—(Optional) Display operational routing instances.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"><li>• <i>Example: Transporting IPv6 Traffic Across IPv4 Using Filter-Based Tunneling</i></li><li>• <i>Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart</i></li></ul>
<b>List of Sample Output</b>	<a href="#">show route instance on page 346</a> <a href="#">show route instance detail (Graceful Restart Complete) on page 346</a> <a href="#">show route instance detail (Graceful Restart Incomplete) on page 348</a>



[show route instance detail \(VPLS Routing Instance\) on page 350](#)

[show route instance operational on page 350](#)

[show route instance summary on page 350](#)

**Output Fields** Table 21 on page 345 lists the output fields for the **show route instance** command. Output fields are listed in the approximate order in which they appear.

**Table 21: show route instance Output Fields**

Field Name	Field Description	Level of Output
Instance or <i>instance-name</i>	Name of the routing instance.	All levels
Operational Routing Instances	( <b>operational</b> keyword only) Names of all operational routing instances.	—
Type	Type of routing instance: <b>forwarding</b> , <b>l2vpn</b> , <b>no-forwarding</b> , <b>vpls</b> , <b>virtual-router</b> , or <b>vrf</b> .	All levels
State	State of the routing instance: <b>active</b> or <b>inactive</b> .	<b>brief detail none</b>
Interfaces	Name of interfaces belonging to this routing instance.	<b>brief detail none</b>
Restart State	Status of graceful restart for this instance: <b>Pending</b> or <b>Complete</b> .	<b>detail</b>
Path selection timeout	Maximum amount of time, in seconds, remaining until graceful restart is declared complete. The default is <b>300</b> .	<b>detail</b>
Tables	Tables (and number of routes) associated with this routing instance.	<b>brief detail none</b>
Route-distinguisher	Unique route distinguisher associated with this routing instance.	<b>detail</b>
Vrf-import	VPN routing and forwarding instance import policy name.	<b>detail</b>
Vrf-export	VPN routing and forwarding instance export policy name.	<b>detail</b>
Vrf-import-target	VPN routing and forwarding instance import target community name.	<b>detail</b>
Vrf-export-target	VPN routing and forwarding instance export target community name.	<b>detail</b>
Vrf-edge-protection-id	Context identifier configured for edge-protection.	<b>detail</b>
Fast-reroute-priority	Fast reroute priority setting for a VPLS routing instance: <b>high</b> , <b>medium</b> , or <b>low</b> . The default is <b>low</b> .	<b>detail</b>
Restart State	Restart state: <ul style="list-style-type: none"> <li>• <b>Pending:protocol-name</b>—List of protocols that have not yet completed graceful restart for this routing table.</li> <li>• <b>Complete</b>—All protocols have restarted for this routing table.</li> </ul>	<b>detail</b>

Table 21: show route instance Output Fields (*continued*)

Field Name	Field Description	Level of Output
Primary rib	Primary table for this routing instance.	<b>brief</b> none <b>summary</b>
Active/holddown/hidden	Number of active, hold-down, and hidden routes.	All levels

## Sample Output

### show route instance

```

user@host> show route instance
Instance          Type
Primary RIB
master            forwarding
inet.0            16/0/1
iso.0             1/0/0
mpls.0            0/0/0
inet6.0           2/0/0
l2circuit.0       0/0/0
__juniper_private1__ forwarding
__juniper_private1__.inet.0 12/0/0
__juniper_private1__.inet6.0 1/0/0

```

### show route instance detail (Graceful Restart Complete)

```

user@host> show route instance detail
master:
  Router ID: 10.255.14.176
  Type: forwarding      State: Active
  Restart State: Complete Path selection timeout: 300
  Tables:
    inet.0              : 17 routes (15 active, 0 holddown, 1 hidden)
    Restart Complete
    inet.3              : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    iso.0               : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0              : 19 routes (19 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l3vpn.0         : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Complete
    inet6.0             : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0         : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
  BGP-INET:
    Router ID: 10.69.103.1
    Type: vrf           State: Active
    Restart State: Complete Path selection timeout: 300
    Interfaces:
      t3-0/0/0.103
    Route-distinguisher: 10.255.14.176:103
    Vrf-import: [ BGP-INET-import ]
    Vrf-export: [ BGP-INET-export ]
    Tables:
      BGP-INET.inet.0    : 4 routes (4 active, 0 holddown, 0 hidden)

```

```

Restart Complete
BGP-L:
Router ID: 10.69.104.1
Type: vrf                      State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.104
Route-distinguisher: 10.255.14.176:104
Vrf-import: [ BGP-L-import ]
Vrf-export: [ BGP-L-export ]
Tables:
  BGP-L.inet.0                : 4 routes (4 active, 0 holddown, 0 hidden)
  Restart Complete
  BGP-L.mpls.0                : 3 routes (3 active, 0 holddown, 0 hidden)
  Restart Complete
L2VPN:
Router ID: 0.0.0.0
Type: l2vpn                    State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.512
Route-distinguisher: 10.255.14.176:512
Vrf-import: [ L2VPN-import ]
Vrf-export: [ L2VPN-export ]
Tables:
  L2VPN.l2vpn.0              : 2 routes (2 active, 0 holddown, 0 hidden)
  Restart Complete
LDP:
Router ID: 10.69.105.1
Type: vrf                      State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.105
Route-distinguisher: 10.255.14.176:105
Vrf-import: [ LDP-import ]
Vrf-export: [ LDP-export ]
Tables:
  LDP.inet.0                 : 5 routes (4 active, 0 holddown, 0 hidden)
  Restart Complete
OSPF:
Router ID: 10.69.101.1
Type: vrf                      State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.101
Route-distinguisher: 10.255.14.176:101
Vrf-import: [ OSPF-import ]
Vrf-export: [ OSPF-export ]
Vrf-import-target: [ target:11111
Tables:
  OSPF.inet.0                : 8 routes (7 active, 0 holddown, 0 hidden)
  Restart Complete
RIP:
Router ID: 10.69.102.1
Type: vrf                      State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
  t3-0/0/0.102
Route-distinguisher: 10.255.14.176:102
Vrf-import: [ RIP-import ]
Vrf-export: [ RIP-export ]

```

```

Tables:
  RIP.inet.0          : 6 routes (6 active, 0 holddown, 0 hidden)
  Restart Complete
STATIC:
  Router ID: 10.69.100.1
  Type: vrf           State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.100
  Route-distinguisher: 10.255.14.176:100
  Vrf-import: [ STATIC-import ]
  Vrf-export: [ STATIC-export ]
  Tables:
    STATIC.inet.0      : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete

```

### show route instance detail (Graceful Restart Incomplete)

```

user@host> show route instance detail
master:
  Router ID: 10.255.14.176
  Type: forwarding      State: Active
  Restart State: Pending Path selection timeout: 300
  Tables:
    inet.0              : 17 routes (15 active, 1 holddown, 1 hidden)
    Restart Pending: OSPF LDP
    inet.3              : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Pending: OSPF LDP
    iso.0               : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0              : 23 routes (23 active, 0 holddown, 0 hidden)
    Restart Pending: LDP VPN
    bgp.l3vpn.0         : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
    inet6.0             : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0         : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Pending: BGP VPN
  BGP-INET:
    Router ID: 10.69.103.1
    Type: vrf           State: Active
    Restart State: Pending Path selection timeout: 300
    Interfaces:
      t3-0/0/0.103
    Route-distinguisher: 10.255.14.176:103
    Vrf-import: [ BGP-INET-import ]
    Vrf-export: [ BGP-INET-export ]
    Tables:
      BGP-INET.inet.0    : 6 routes (5 active, 0 holddown, 0 hidden)
      Restart Pending: VPN
  BGP-L:
    Router ID: 10.69.104.1
    Type: vrf           State: Active
    Restart State: Pending Path selection timeout: 300
    Interfaces:
      t3-0/0/0.104
    Route-distinguisher: 10.255.14.176:104
    Vrf-import: [ BGP-L-import ]
    Vrf-export: [ BGP-L-export ]
    Tables:
      BGP-L.inet.0       : 6 routes (5 active, 0 holddown, 0 hidden)

```

```

Restart Pending: VPN
BGP-L.mpls.0      : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: VPN
L2VPN:
Router ID: 0.0.0.0
Type: l2vpn        State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.512
Route-distinguisher: 10.255.14.176:512
Vrf-import: [ L2VPN-import ]
Vrf-export: [ L2VPN-export ]
Tables:
  L2VPN.l2vpn.0      : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: VPN L2VPN
LDP:
Router ID: 10.69.105.1
Type: vrf          State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.105
Route-distinguisher: 10.255.14.176:105
Vrf-import: [ LDP-import ]
Vrf-export: [ LDP-export ]
Tables:
  LDP.inet.0         : 5 routes (4 active, 1 holddown, 0 hidden)
Restart Pending: OSPF LDP VPN
OSPF:
Router ID: 10.69.101.1
Type: vrf          State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.101
Route-distinguisher: 10.255.14.176:101
Vrf-import: [ OSPF-import ]
Vrf-export: [ OSPF-export ]
Tables:
  OSPF.inet.0        : 8 routes (7 active, 1 holddown, 0 hidden)
Restart Pending: OSPF VPN
RIP:
Router ID: 10.69.102.1
Type: vrf          State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.102
Route-distinguisher: 10.255.14.176:102
Vrf-import: [ RIP-import ]
Vrf-export: [ RIP-export ]
Tables:
  RIP.inet.0          : 8 routes (6 active, 2 holddown, 0 hidden)
Restart Pending: RIP VPN
STATIC:
Router ID: 10.69.100.1
Type: vrf          State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
  t3-0/0/0.100
Route-distinguisher: 10.255.14.176:100
Vrf-import: [ STATIC-import ]
Vrf-export: [ STATIC-export ]
Tables:

```

```

STATIC.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
Restart Pending: VPN

```

### show route instance detail (VPLS Routing Instance)

```

user@host> show route instance detail test-vpls
test-vpls:
  Router ID: 0.0.0.0
  Type: vpls          State: Active
  Interfaces:
    lsi.1048833
    lsi.1048832
    fe-0/1/0.513
  Route-distinguisher: 10.255.37.65:1
  Vrf-import: [ __vrf-import-test-vpls-internal__ ]
  Vrf-export: [ __vrf-export-test-vpls-internal__ ]
  Vrf-import-target: [ target:300:1 ]
  Vrf-export-target: [ target:300:1 ]
  Vrf-edge-protection-id: 166.1.3.1 Fast-reroute-priority: high
  Tables:
    test-vpls.l2vpn.0          : 3 routes (3 active, 0 holddown, 0 hidden)

```

### show route instance operational

```

user@host> show route instance operational
Operational Routing Instances:

master
default

```

### show route instance summary

```

user@host> show route instance summary

```

Instance	Type	Primary rib	Active/holddown/hidden
master	forwarding	inet.0	15/0/1
		iso.0	1/0/0
		mpls.0	35/0/0
		l3vpn.0	0/0/0
		inet6.0	2/0/0
		l2vpn.0	0/0/0
		l2circuit.0	0/0/0
BGP-INET	vrf	BGP-INET.inet.0	5/0/0
		BGP-INET.iso.0	0/0/0
		BGP-INET.inet6.0	0/0/0
BGP-L	vrf	BGP-L.inet.0	5/0/0
		BGP-L.iso.0	0/0/0
		BGP-L.mpls.0	4/0/0
		BGP-L.inet6.0	0/0/0
L2VPN	l2vpn	L2VPN.inet.0	0/0/0
		L2VPN.iso.0	0/0/0
		L2VPN.inet6.0	0/0/0
		L2VPN.l2vpn.0	2/0/0
LDP	vrf	LDP.inet.0	4/0/0
		LDP.iso.0	0/0/0
		LDP.mpls.0	0/0/0

OSPF	vrf	LDP.inet6.0	0/0/0
		LDP.l2circuit.0	0/0/0
RIP	vrf	OSPF.inet.0	7/0/0
		OSPF.iso.0	0/0/0
		OSPF.inet6.0	0/0/0
		RIP.inet.0	6/0/0
STATIC	vrf	RIP.iso.0	0/0/0
		RIP.inet6.0	0/0/0
		STATIC.inet.0	4/0/0
		STATIC.iso.0	0/0/0
		STATIC.inet6.0	0/0/0

## show route label

---

<b>List of Syntax</b>	<a href="#">Syntax on page 352</a> <a href="#">Syntax (EX Series Switches) on page 352</a>
<b>Syntax</b>	<pre>show route label <i>label</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route label <i>label</i> &lt;brief   detail   extensive   terse&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.5 for EX Series switches.</p>
<b>Description</b>	Display the routes based on a specified Multiprotocol Label Switching (MPLS) label value.
<b>Options</b>	<p><b><i>label</i></b>—Value of the MPLS label.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li><a href="#">Example: Configuring Multipoint LDP In-Band Signaling for Point-to-Multipoint LSPs</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show route label terse on page 353</a> <a href="#">show route label on page 353</a> <a href="#">show route label detail on page 353</a> <a href="#">show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 353</a> <a href="#">show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs) on page 354</a> <a href="#">show route label detail (Multipoint LDP with Multicast-Only Fast Reroute) on page 354</a> <a href="#">show route label detail (Dynamic List Next Hop) on page 355</a> <a href="#">show route label extensive on page 356</a>
<b>Output Fields</b>	For information about output fields, see the output field table for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.



## Sample Output

### show route label terse

```
user@host> show route label 100016 terse

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1   Metric 2   Next hop      AS path
* 100016          V 170                >10.12.80.1
```

### show route label

```
user@host> show route label 100016

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
100016          *[VPN/170] 03:25:41
                > to 10.12.80.1 via ge-6/3/2.0, Pop
```

### show route label detail

```
user@host> show route label 100016 detail

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
100016 (1 entry, 1 announced)
  *VPN      Preference: 170
            Next-hop reference count: 2
            Source: 10.12.80.1
            Next hop: 10.12.80.1 via ge-6/3/2.0, selected
            Label operation: Pop
            State: <Active Int Ext>
            Local AS:      1
            Age: 3:23:31
            Task: BGP.0.0.0.0+179
            Announcement bits (1): 0-KRT
            AS path: 100 I
            Ref Cnt: 2
```

### show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```
user@host> show route label 299872 detail

mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
  *LDP      Preference: 9
            Next hop type: Flood
            Next-hop reference count: 3
            Address: 0x9097d90
            Next hop: via vt-0/1/0.1
            Next-hop index: 661
            Label operation: Pop
            Address: 0x9172130
            Next hop: via so-0/0/3.0
            Next-hop index: 654
            Label operation: Swap 299872
```

```

State: **Active Int>
Local AS: 1001
Age: 8:20      Metric: 1
Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 10.255.72.166, grp 232.1.1.1,
src 192.168.142.2

```

#### show route label detail (Multipoint LDP Inband Signaling for Point-to-Multipoint LSPs)

```

user@host> show route label 299872 detail
mpls.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
299872 (1 entry, 1 announced)
  *LDP      Preference: 9
            Next hop type: Flood
            Next-hop reference count: 3
            Address: 0x9097d90
            Next hop: via vt-0/1/0.1
            Next-hop index: 661
            Label operation: Pop
            Address: 0x9172130
            Next hop: via so-0/0/3.0
            Next-hop index: 654
            Label operation: Swap 299872
            State: **Active Int>
            Local AS: 1001
            Age: 8:20      Metric: 1
            Task: LDP
            Announcement bits (1): 0-KRT
            AS path: I
            FECs bound to route: P2MP root-addr 10.255.72.166, grp 232.1.1.1,
src 192.168.142.2

```

#### show route label detail (Multipoint LDP with Multicast-Only Fast Reroute)

```

user@host> show route label 301568 detail
mpls.0: 18 destinations, 18 routes (18 active, 0 holddown, 0 hidden)
301568 (1 entry, 1 announced)
  *LDP      Preference: 9
            Next hop type: Flood
            Address: 0x2735208
            Next-hop reference count: 3
            Next hop type: Router, Next hop index: 1397
            Address: 0x2735d2c
            Next-hop reference count: 3
            Next hop: 1.3.8.2 via ge-1/2/22.0
            Label operation: Pop
            Load balance label: None;
            Next hop type: Router, Next hop index: 1395
            Address: 0x2736290
            Next-hop reference count: 3
            Next hop: 1.3.4.2 via ge-1/2/18.0
            Label operation: Pop
            Load balance label: None;
            State: <Active Int AckRequest MulticastRPF>
            Local AS: 10
            Age: 54:05      Metric: 1
            Validation State: unverified

```

```

Task: LDP
Announcement bits (1): 0-KRT
AS path: I
FECs bound to route: P2MP root-addr 1.1.1.1, grp: 232.1.1.1, src:
192.168.219.11
Primary Upstream : 1.1.1.3:0--1.1.1.2:0
RPF Nexthops :
    ge-1/2/15.0, 1.2.94.1, Label: 301568, weight: 0x1
    ge-1/2/14.0, 1.2.3.1, Label: 301568, weight: 0x1
Backup Upstream : 1.1.1.3:0--1.1.1.6:0
RPF Nexthops :
    ge-1/2/20.0, 1.2.96.1, Label: 301584, weight: 0xfffe
    ge-1/2/19.0, 1.3.6.1, Label: 301584, weight: 0xfffe

```

### show route label detail (Dynamic List Next Hop)

The output for **show route label detail** shows the two indirect next hop for an ESI.

```

user@host> show route label 299952 detail
mpls.0: 14 destinations, 14 routes (14 active, 0 holddown, 0 hidden)
299952 (1 entry, 1 announced)
TSI:
KRT in-kernel 299952 /52 -> {Dyn list:indirect(1048577), indirect(1048574)}
*EVPN Preference: 7
Next hop type: Dynamic List, Next hop index: 1048575
Address: 0x13f497fc
Next-hop reference count: 5
Next hop: ELNH Address 0xb7a3d90 uflags EVPN data
    Next hop type: Indirect, Next hop index: 0
    Address: 0xb7a3d90
    Next-hop reference count: 3
    Protocol next hop: 10.255.255.2
    Label operation: Push 301344
    Indirect next hop: 0x135b5c00 1048577 INH Session ID: 0x181
        Next hop type: Router, Next hop index: 619
        Address: 0xb7a3d30
        Next-hop reference count: 4
        Next hop: 1.0.0.4 via ge-0/0/1.0
        Label operation: Push 301344, Push 299792(top)
        Label TTL action: no-prop-ttl, no-prop-ttl(top)
        Load balance label: Label 301344: None; Label 299792:
None;
        Label element ptr: 0xb7a3cc0
        Label parent element ptr: 0xb7a34e0
        Label element references: 1
        Label element child references: 0
        Label element lsp id: 0
    Next hop: ELNH Address 0xb7a37f0 uflags EVPN data
        Next hop type: Indirect, Next hop index: 0
        Address: 0xb7a37f0
        Next-hop reference count: 3
        Protocol next hop: 10.255.255.3
        Label operation: Push 301632
        Indirect next hop: 0x135b5480 1048574 INH Session ID: 0x180
            Next hop type: Router, Next hop index: 600
            Address: 0xb7a3790
            Next-hop reference count: 4
            Next hop: 1.0.0.4 via ge-0/0/1.0
            Label operation: Push 301632, Push 299776(top)
            Label TTL action: no-prop-ttl, no-prop-ttl(top)
            Load balance label: Label 301632: None; Label 299776:

```

```
None;
Label element ptr: 0xb7a3720
Label parent element ptr: 0xb7a3420
Label element references: 1
Label element child references: 0
Label element lsp id: 0
State: <Active Int>
Age: 1:18
Validation State: unverified
Task: evpn global task
Announcement bits (2): 1-KRT 2-evpn global task
AS path: I
Routing Instance blue, Route Type Egress-MAC, ESI
00:11:22:33:44:55:66:77:88:99
```

### **show route label extensive**

The output for the show route label extensive command is identical to that of the **show route label detail** command. For sample output, see [show route label detail on page 353](#).

## show route label-switched-path

<b>List of Syntax</b>	<a href="#">Syntax on page 357</a> <a href="#">Syntax (EX Series Switches) on page 357</a>
<b>Syntax</b>	<pre>show route label-switched-path <i>path-name</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route label-switched-path <i>path-name</i> &lt;brief   detail   extensive   terse&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.5 for EX Series switches.</p>
<b>Description</b>	Display the routes used in an MPLS label-switched path (LSP).
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b><i>path-name</i></b>—LSP tunnel name.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route label-switched-path on page 357</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route label-switched-path

```
user@host> show route label-switched-path sf-to-ny
inet.0: 29 destinations, 29 routes (29 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.1/32          [MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
3.3.3.3/32          *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2.2.2.2/32          *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
```

```

4.4.4.4/32      *[MPLS/7] 00:00:06, metric 0
                 to 111.222.1.9 via s0-0/0/0, label-switched-path abc
                 > to 111.222.1.9 via s0-0/0/0, label-switched-path xyz
                 to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
111.222.1.9/32  *[MPLS/7] 00:00:06, metric 0
                 > to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

```

```

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

mpls.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

## show route martians

**List of Syntax** [Syntax on page 359](#)  
[Syntax \(EX Series Switches\) on page 359](#)

**Syntax** show route martians  
 <logical-system (all | *logical-system-name*)>  
 <table *routing-table-name*>

**Syntax (EX Series Switches)** show route martians  
 <table *routing-table-name*>

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Display the martian (invalid and ignored) entries associated with each routing table.

**Options** **none**—Display standard information about route martians for all routing tables.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**table *routing-table-name***—(Optional) Display information about route martians for all routing tables whose name begins with this string (for example, **inet.0** and **inet6.0** are both displayed when you run the **show route martians table inet** command).

**Required Privilege Level** view

**Related Documentation**

- *Example: Configuring Class E Martian Addresses for Routing*
- *Understanding Martian Addresses*

**List of Sample Output** [show route martians on page 360](#)

**Output Fields** [Table 22 on page 359](#) lists the output fields for the **show route martians** command. Output fields are listed in the approximate order in which they appear

**Table 22: show route martians Output Fields**

Field Name	Field Description
<i>table-name</i>	Name of the route table in which the route martians reside.
<i>destination-prefix</i>	Route destination.
<i>match value</i>	Route match parameter.

Table 22: show route martians Output Fields (*continued*)

Field Name	Field Description
<b>status</b>	Status of the route: <b>allowed</b> or <b>disallowed</b> .

## Sample Output

### show route martians

```

user@host> show route martians

inet.0:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

inet.1:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed

inet.2:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

inet.3:
    0.0.0.0/0 exact -- allowed
    0.0.0.0/8 orlonger -- disallowed
    127.0.0.0/8 orlonger -- disallowed
    192.0.0.0/24 orlonger -- disallowed
    240.0.0.0/4 orlonger -- disallowed
    224.0.0.0/4 exact -- disallowed
    224.0.0.0/24 exact -- disallowed

...

inet6.0:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed

inet6.1:
    ::1/128 exact -- disallowed

inet6.2:
    ::1/128 exact -- disallowed
    ff00::/8 exact -- disallowed
    ff02::/16 exact -- disallowed

```



```
inet6.3:      ::1/128 exact -- disallowed
               ff00::/8 exact -- disallowed
               ff02::/16 exact -- disallowed
...

```

## show route next-hop

---

<b>List of Syntax</b>	<a href="#">Syntax on page 362</a> <a href="#">Syntax (EX Series Switches) on page 362</a>
<b>Syntax</b>	<code>show route next-hop <i>next-hop</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route next-hop <i>next-hop</i></code> <code>&lt;brief   detail   extensive   terse&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the entries in the routing table that are being sent to the specified next-hop address.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. <b><i>next-hop</i></b> —Next-hop address.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route next-hop on page 362</a> <a href="#">show route next-hop detail on page 363</a> <a href="#">show route next-hop extensive on page 365</a> <a href="#">show route next-hop terse on page 366</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route next-hop

```
user@host> show route next-hop 192.168.71.254

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 06:26:25
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 06:26:25
```

```

> to 192.168.71.254 via fxp0.0
172.16.0.0/12    *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
192.168.0.0/16    *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
192.168.102.0/23  *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
207.17.136.0/24  *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
207.17.136.192/32 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

### show route next-hop detail

```

user@host> show route next-hop 192.168.71.254 detail

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

172.16.0.0/12 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>

```

```
Local AS:      1
Age: 6:27:41
Task: RT
Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
AS path: I

192.168.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

192.168.102.0/23 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.0/24 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

207.17.136.192/32 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 36
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS:      1
    Age: 6:27:41
    Task: RT
    Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
    AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
```

```
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
```

```
private1__inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

### show route next-hop extensive

```
user@host> show route next-hop 192.168.71.254 extensive
```

```
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
10.209.0.0/16 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
172.16.0.0/12 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```
192.168.0.0/16 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 192.168.0.0/16 -> {192.168.71.254}
```

```
*Static Preference: 5
```

```
Next-hop reference count: 22
```

```
Next hop: 192.168.71.254 via fxp0.0, selected
```

```
State: <Active NoReadvrt Int Ext>
```

```
Local AS: 69
```

```
Age: 2:02:28
```

```
Task: RT
```

```
Announcement bits (1): 0-KRT
```

```
AS path: I
```

```

192.168.102.0/23 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.102.0/23 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

207.17.136.192/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.192/32 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Local AS: 69
    Age: 2:02:28
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

red.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

### show route next-hop terse

```

user@host> show route next-hop 192.168.71.254 terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.10.0.0/16	S	5			>192.168.71.254	
*	10.209.0.0/16	S	5			>192.168.71.254	
*	172.16.0.0/12	S	5			>192.168.71.254	
*	192.168.0.0/16	S	5			>192.168.71.254	
*	192.168.102.0/23	S	5			>192.168.71.254	
*	207.17.136.0/24	S	5			>192.168.71.254	
*	207.17.136.192/32	S	5			>192.168.71.254	

private1\_\_\_.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)  
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)  
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)  
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)  
Restart Complete

private1\_\_\_.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

## show route no-community

<b>List of Syntax</b>	<a href="#">Syntax on page 368</a> <a href="#">Syntax (EX Series Switches) on page 368</a>
<b>Syntax</b>	<pre>show route no-community &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route no-community &lt;brief   detail   extensive   terse&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	Display the route entries in each routing table that are not associated with any community.
<b>Options</b>	<p><b>none</b>—(Same as <b>brief</b>) Display the route entries in each routing table that are not associated with any community.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route no-community on page 368</a> <a href="#">show route no-community detail on page 369</a> <a href="#">show route no-community extensive on page 369</a> <a href="#">show route no-community terse on page 370</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route no-community

```
user@host> show route no-community
inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16      *[Static/5] 00:36:27
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 00:36:27
                  > to 192.168.71.254 via fxp0.0
10.255.71.52/32  *[Direct/0] 00:36:27
```



```

> via lo0.0
10.255.71.63/32  * [OSPF/10] 00:04:39, metric 1
> to 35.1.1.2 via ge-3/1/0.0
10.255.71.64/32  * [OSPF/10] 00:00:08, metric 2
> to 35.1.1.2 via ge-3/1/0.0
10.255.71.240/32 * [OSPF/10] 00:05:04, metric 2
> via so-0/1/2.0
> via so-0/3/2.0
10.255.71.241/32 * [OSPF/10] 00:05:14, metric 1
> via so-0/1/2.0
10.255.71.242/32 * [OSPF/10] 00:05:19, metric 1
> via so-0/3/2.0
172.16.12.0/24   * [OSPF/10] 00:05:14, metric 2
> via so-0/3/2.0
172.16.14.0/24   * [OSPF/10] 00:00:08, metric 3
> to 35.1.1.2 via ge-3/1/0.0
> via so-0/1/2.0
> via so-0/3/2.0
172.16.16.0/24   * [OSPF/10] 00:05:14, metric 2
> via so-0/1/2.0
.....

```

#### show route no-community detail

```

user@host> show route no-community detail

inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 38:08
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 38:08
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

.....

```

#### show route no-community extensive

```

user@host> show route no-community extensive

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>

```

```

Local AS: 69
Age: 2:03:33
Task: RT
Announcement bits (1): 0-KRT
AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
*Static Preference: 5
  Next-hop reference count: 22
  Next hop: 192.168.71.254 via fxp0.0, selected
  State: <Active NoReadvrt Int Ext>
  Local AS: 69
  Age: 2:03:33
  Task: RT
  Announcement bits (1): 0-KRT
  AS path: I

```

### show route no-community terse

```
user@host> show route no-community terse
```

```
inet.0: 28 destinations, 30 routes (27 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*	10.10.0.0/16	S	5			>192.168.71.254	
*	10.209.0.0/16	S	5			>192.168.71.254	
*	10.255.71.52/32	D	0			>100.0	
*	10.255.71.63/32	0	10	1		>35.1.1.2	
*	10.255.71.64/32	0	10	2		>35.1.1.2	
*	10.255.71.240/32	0	10	2		so-0/1/2.0	
						>so-0/3/2.0	
*	10.255.71.241/32	0	10	1		>so-0/1/2.0	
*	10.255.71.242/32	0	10	1		>so-0/3/2.0	
*	172.16.12.0/24	0	10	2		>so-0/3/2.0	
*	172.16.14.0/24	0	10	3		>35.1.1.2	
						so-0/1/2.0	
						so-0/3/2.0	
*	172.16.16.0/24	0	10	2		>so-0/1/2.0	
...							

## show route protocol

<b>List of Syntax</b>	<a href="#">Syntax on page 371</a> <a href="#">Syntax (EX Series Switches) on page 371</a>
<b>Syntax</b>	<pre>show route protocol <i>protocol</i> &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route protocol <i>protocol</i> &lt;brief   detail   extensive   terse&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>ospf2</b> and <b>ospf3</b> options introduced in Junos OS Release 9.2.</p> <p><b>ospf2</b> and <b>ospf3</b> options introduced in Junos OS Release 9.2 for EX Series switches.</p> <p><b>flow</b> option introduced in Junos OS Release 10.0.</p> <p><b>flow</b> option introduced in Junos OS Release 10.0 for EX Series switches.</p>
<b>Description</b>	Display the route entries in the routing table that were learned from a particular protocol.
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>protocol</i></b>—Protocol from which the route was learned:</p> <ul style="list-style-type: none"> <li>• <b>access</b>—Access route for use by DHCP application</li> <li>• <b>access-internal</b>—Access-internal route for use by DHCP application</li> <li>• <b>aggregate</b>—Locally generated aggregate route</li> <li>• <b>arp</b>—Route learned through the Address Resolution Protocol</li> <li>• <b>atmvpn</b>—Asynchronous Transfer Mode virtual private network</li> <li>• <b>bgp</b>—Border Gateway Protocol</li> <li>• <b>ccc</b>—Circuit cross-connect</li> <li>• <b>direct</b>—Directly connected route</li> <li>• <b>dvmrp</b>—Distance Vector Multicast Routing Protocol</li> <li>• <b>esis</b>—End System-to-Intermediate System</li> <li>• <b>flow</b>—Locally defined flow-specification route</li> <li>• <b>frr</b>—Precomputed protection route or backup route used when a link goes down</li> <li>• <b>isis</b>—Intermediate System-to-Intermediate System</li> </ul>

- **ldp**—Label Distribution Protocol
- **l2circuit**—Layer 2 circuit
- **l2vpn**—Layer 2 virtual private network
- **local**—Local address
- **mpls**—Multiprotocol Label Switching
- **msdp**—Multicast Source Discovery Protocol
- **ospf**—Open Shortest Path First versions 2 and 3
- **ospf2**—Open Shortest Path First versions 2 only
- **ospf3**—Open Shortest Path First version 3 only
- **pim**—Protocol Independent Multicast
- **rip**—Routing Information Protocol
- **ripng**—Routing Information Protocol next generation
- **rsvp**—Resource Reservation Protocol
- **rtarget**—Local route target virtual private network
- **static**—Statically defined route
- **tunnel**—Dynamic tunnel
- **vpn**—Virtual private network



**NOTE:** EX Series switches run a subset of these protocols. See the switch CLI for details.

<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route protocol access on page 373</a> <a href="#">show route protocol access-internal extensive on page 373</a> <a href="#">show route protocol arp on page 373</a> <a href="#">show route protocol bgp on page 374</a> <a href="#">show route protocol bgp detail on page 374</a> <a href="#">show route protocol bgp detail (Labeled Unicast) on page 375</a> <a href="#">show route protocol bgp detail (Aggregate Extended Community Bandwidth) on page 375</a> <a href="#">show route protocol bgp extensive on page 376</a> <a href="#">show route protocol bgp terse on page 377</a> <a href="#">show route protocol direct on page 377</a> <a href="#">show route protocol frr on page 377</a> <a href="#">show route protocol l2circuit detail on page 378</a>

[show route protocol l2vpn extensive on page 379](#)  
[show route protocol ldp on page 379](#)  
[show route protocol ldp extensive on page 380](#)  
[show route protocol ospf \(Layer 3 VPN\) on page 381](#)  
[show route protocol ospf detail on page 382](#)  
[show route protocol rip on page 382](#)  
[show route protocol rip detail on page 382](#)  
[show route protocol ripng table inet6 on page 382](#)  
[show route protocol static detail on page 383](#)

**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.

## Sample Output

### show route protocol access

```

user@host> show route protocol access
inet.0: 30380 destinations, 30382 routes (30379 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

13.160.0.3/32      *[Access/13] 00:00:09
                  > to 13.160.0.2 via fe-0/0/0.0
13.160.0.4/32      *[Access/13] 00:00:09
                  > to 13.160.0.2 via fe-0/0/0.0
13.160.0.5/32      *[Access/13] 00:00:09
                  > to 13.160.0.2 via fe-0/0/0.0

```

### show route protocol access-internal extensive

```

user@host> show route protocol access-internal 13.160.0.19 extensive
inet.0: 100020 destinations, 100022 routes (100019 active, 0 holddown, 1 hidden)
13.160.0.19/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 13.160.0.19/32 -> {13.160.0.2}
    *Access-internal Preference: 12
      Next-hop reference count: 200000
      Next hop: 13.160.0.2 via fe-0/0/0.0, selected
      State: <Active Int>
    Age: 36
      Task: RPD Unix Domain Server./var/run/rpd_serv.local
      Announcement bits (1): 0-KRT
      AS path: I

```

### show route protocol arp

```

user@host> show route protocol arp
inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32      [ARP/4294967293] 00:04:35, from 20.20.1.1

```

```

Unusable
20.20.1.4/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.5/32      [ARP/4294967293] 00:04:32, from 20.20.1.1
Unusable
20.20.1.6/32      [ARP/4294967293] 00:04:34, from 20.20.1.1
Unusable
20.20.1.7/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.8/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.9/32      [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.10/32     [ARP/4294967293] 00:04:35, from 20.20.1.1
Unusable
20.20.1.11/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
Unusable
20.20.1.12/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
Unusable
20.20.1.13/32     [ARP/4294967293] 00:04:33, from 20.20.1.1
Unusable
...

```

### show route protocol bgp

```

user@host> show route protocol bgp 192.168.64.0/21
inet.0: 335832 destinations, 335833 routes (335383 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.64.0/21      *[BGP/170] 6d 10:41:16, localpref 100, from 192.168.69.71
                     AS path: 10458 14203 2914 4788 4788 I
                     > to 192.168.167.254 via fxp0.0

```

### show route protocol bgp detail

```

user@host> show route protocol bgp 66.117.63.0/24 detail
inet.0: 335805 destinations, 335806 routes (335356 active, 0 holddown, 450 hidden)
66.117.63.0/24      (1 entry, 1 announced)
    *BGP           Preference: 170/-101
                    Next hop type: Indirect
                    Next-hop reference count: 1006436
                    Source: 192.168.69.71
                    Next hop type: Router, Next hop index: 324
                    Next hop: 192.168.167.254 via fxp0.0, selected
                    Protocol next hop: 192.168.69.71
                    Indirect next hop: 8e166c0 342
                    State: <Active Ext>
                    Local AS: 69 Peer AS: 10458
                    Age: 6d 10:42:42 Metric2: 0
                    Task: BGP_10458.192.168.69.71+179
                    Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree

1
    AS path: 10458 14203 2914 4788 4788 I
    Communities: 2914:410 2914:2403 2914:3400
    Accepted
    Localpref: 100
    Router ID: 207.17.136.192

```

**show route protocol bgp detail (Labeled Unicast)**

```

user@host> show route protocol bgp 1.1.1.8/32 detail
inet.0: 45 destinations, 46 routes (45 active, 0 holddown, 0 hidden)
1.1.1.8/32 (2 entries, 2 announced)
State:
*BGP Preference: 1/-101
Next hop type: Indirect, Next hop index: 0
Address: 0xc007f30
Next-hop reference count: 2
Source: 1.1.1.1
Next hop type: Router, Next hop index: 614
Next hop: 20.1.1.2 via ge-0/0/1.0, selected
Label-switched-path lsp1
Label operation: Push 1000126, Push 1000125, Push 1000124, Push 1000123, Push
299872(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl, prop-ttl, prop-ttl(top)
Load balance label: Label 1000126: None; Label 1000125: None; Label 1000124: None;
Label 1000123: None; Label 299872: None;
Label element ptr: 0xc007860
Label parent element ptr: 0xc0089a0
Label element references: 1
Label element child references: 0
Label element lsp id: 0
Session Id: 0x140
Protocol next hop: 1.1.1.4
Label operation: Push 1000126, Push 1000125, Push 1000124, Push 1000123(top)
Label TTL action: prop-ttl, prop-ttl, prop-ttl, prop-ttl
Load balance label: Label 1000126: None; Label 1000125: None; Label 1000124: None;
Label 1000123: None;
Indirect next hop: 0xae8d300 1048576 INH Session ID: 0x142
State:
Local AS: 5 Peer AS: 5
Age: 22:43 Metric2: 2
Validation State: unverified
Task: BGP_5.1.1.1.1
Announcement bits (2): 0-KRT 7-Resolve tree 2
AS path: I
Accepted
Route Labels: 1000123(top) 1000124 1000125 1000126
Localpref: 100
Router ID: 1.1.1.1

```

**show route protocol bgp detail (Aggregate Extended Community Bandwidth)**

```

user@host> show route 10.0.2.0 protocol bgp detail
inet.0: 20 destinations, 26 routes (20 active, 0 holddown, 0 hidden)
10.0.2.0/30 (2 entries, 1 announced)
*BGP Preference: 170/-101
Next hop type: Router, Next hop index: 0
Address: 0xb618990
Next-hop reference count: 3
Source: 10.0.1.1
Next hop: 10.0.0.2 via ge-0/0/0.0 balance 40%
Session Id: 0x0
Next hop: 10.0.1.1 via ge-0/0/1.0 balance 60%, selected
Session Id: 0x0
State: <Active Ext>
Local AS: 65000 Peer AS: 65001
Age: 20:33

```

```

Validation State: unverified
Task: BGP_65001.10.0.1.1
Announcement bits (3): 0-KRT 2-BGP_Listen.0.0.0.0+179
3-BGP_RT_Background
AS path: 65001 I
Communities: bandwidth:65000:60000000
Accepted Multipath
Localpref: 100
Router ID: 128.49.121.137
BGP Preference: 170/-101
Next hop type: Router, Next hop index: 595
Address: 0xb7a1330
Next-hop reference count: 9
Source: 10.0.0.2
Next hop: 10.0.0.2 via ge-0/0/0.0, selected
Session Id: 0x141
State: <NotBest Ext>
Inactive reason: Not Best in its group - Active preferred
Local AS: 65000 Peer AS: 65001
Age: 20:33
Validation State: unverified
Task: BGP_65001.10.0.0.2
AS path: 65001 I
Communities: bandwidth:65000:40000000
Accepted MultipathContrib
Localpref: 100
Router ID: 128.49.121.132

```

### show route protocol bgp extensive

```

user@host> show route protocol bgp 192.168.64.0/21 extensive

inet.0: 335827 destinations, 335828 routes (335378 active, 0 holddown, 450 hidden)
192.168.64.0/21 (1 entry, 1 announced)
TSI:
KRT in-kernel 1.9.0.0/16 -> {indirect(342)}
Page 0 idx 1 Type 1 val db31a80
  Nexthop: Self
  AS path: [69] 10458 14203 2914 4788 4788 I
  Communities: 2914:410 2914:2403 2914:3400
Path 1.9.0.0 from 192.168.69.71 Vector len 4. Val: 1
  *BGP Preference: 170/-101
    Next hop type: Indirect
    Next-hop reference count: 1006502
    Source: 192.168.69.71
    Next hop type: Router, Next hop index: 324
    Next hop: 192.168.167.254 via fxp0.0, selected
    Protocol next hop: 192.168.69.71
    Indirect next hop: 8e166c0 342
    State: <Active Ext>
    Local AS: 69 Peer AS: 10458
    Age: 6d 10:44:45 Metric2: 0
    Task: BGP_10458.192.168.69.71+179
    Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree
1
  AS path: 10458 14203 2914 4788 4788 I
  Communities: 2914:410 2914:2403 2914:3400
  Accepted
  Localpref: 100
  Router ID: 207.17.136.192
  Indirect next hops: 1

```



```

Protocol next hop: 192.168.69.71
Indirect next hop: 8e166c0 342
Indirect path forwarding next hops: 1
  Next hop type: Router
  Next hop: 192.168.167.254 via fxp0.0
192.168.0.0/16 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
  Nexthop: 192.168.167.254 via fxp0.0

```

### show route protocol bgp terse

```
user@host> show route protocol bgp 192.168.64.0/21 terse
```

```

inet.0: 24 destinations, 32 routes (23 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
192.168.64.0/21    B 170      100          >172.16.100.1  10023 21 I

```

### show route protocol direct

```
user@host> show route protocol direct
```

```

inet.0: 335843 destinations, 335844 routes (335394 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

172.16.8.0/24      *[Direct/0] 17w0d 10:31:49
> via fe-1/3/1.0
10.255.165.1/32    *[Direct/0] 25w4d 04:13:18
> via lo0.0
172.16.30.0/24     *[Direct/0] 17w0d 23:06:26
> via fe-1/3/2.0
192.168.164.0/22   *[Direct/0] 25w4d 04:13:20
> via fxp0.0

```

```

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

47.0005.80ff.f800.0000.0108.0001.0102.5516.5001/152
*[Direct/0] 25w4d 04:13:21
> via lo0.0

```

```

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

2001:db8::10:255:165:1/128
*[Direct/0] 25w4d 04:13:21
> via lo0.0
fe80::2a0:a5ff:fe12:ad7/128
*[Direct/0] 25w4d 04:13:21
> via lo0.0

```

### show route protocol frr

```
user@host> show route protocol frr
```

```
inet.0: 43 destinations, 43 routes (42 active, 0 holddown, 1 hidden)
```

```
inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
```

```

cust1.inet.0: 1033 destinations, 2043 routes (1033 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

20.20.1.3/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.3 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.4/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.4 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.5/32      *[FRR/200] 00:05:35, from 20.20.1.1
                  > to 20.20.1.5 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.6/32      *[FRR/200] 00:05:37, from 20.20.1.1
                  > to 20.20.1.6 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.7/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.7 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.8/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.8 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.9/32      *[FRR/200] 00:05:38, from 20.20.1.1
                  > to 20.20.1.9 via ge-4/1/0.0
                  to 10.10.15.1 via ge-0/2/4.0, Push 16, Push 299792(top)
20.20.1.10/32     *[FRR/200] 00:05:38, from 20.20.1.1
...

```

### show route protocol l2circuit detail

```

user@host> show route protocol l2circuit detail

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
100000 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via ge-2/0/0.0, selected
    Label operation: Pop      Offset: 4
    State: <Active Int>
    Local AS: 99
    Age: 9:52
    Task: Common L2 VC
    Announcement bits (1): 0-KRT
    AS path: I

ge-2/0/0.0 (1 entry, 1 announced)
  *L2CKT Preference: 7
    Next hop: via so-1/1/2.0 weight 1, selected
    Label-switched-path my-lsp
    Label operation: Push 100000, Push 100000(top)[0] Offset: -4
    Protocol next hop: 10.245.255.63
    Push 100000 Offset: -4
    Indirect next hop: 86af0c0 298
    State: <Active Int>
    Local AS: 99
    Age: 9:52
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 1-Common L2 VC
    AS path: I

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)

```

```

*L2CKT Preference: 7
Next hop: via so-1/1/2.0 weight 1, selected
Label-switched-path my-lsp
Label operation: Push 100000[0]
Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
State: <Active Int>
Local AS: 99
Age: 10:21
Task: l2 circuit
Announcement bits (1): 0-LDP
AS path: I
VC Label 100000, MTU 1500, VLAN ID 512

```

### show route protocol l2vpn extensive

```

user@host> show route protocol l2vpn extensive

inet.0: 14 destinations, 15 routes (13 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
800001 (1 entry, 1 announced)
TSI:
KRT in-kernel 800001 /36 -> {so-0/0/0.0}
    *L2VPN Preference: 7
      Next hop: via so-0/0/0.0 weight 49087 balance 97%, selected
      Label operation: Pop      Offset: 4
      State: <Active Int>
      Local AS: 69
      Age: 7:48
      Task: Common L2 VC
      Announcement bits (1): 0-KRT
      AS path: I

so-0/0/0.0 (1 entry, 1 announced)
TSI:
KRT in-kernel so-0/0/0.0 /16 -> {indirect(288)}
    *L2VPN Preference: 7
      Next hop: via so-0/0/1.0, selected
      Label operation: Push 800000 Offset: -4
      Protocol next hop: 10.255.14.220
      Push 800000 Offset: -4
      Indirect next hop: 85142a0 288
      State: <Active Int>
      Local AS: 69
      Age: 7:48
      Task: Common L2 VC
      Announcement bits (2): 0-KRT 1-Common L2 VC
      AS path: I
      Communities: target:69:1 Layer2-info: encaps:PPP,
      control flags:2, mtu: 0

```

### show route protocol ldp

```

user@host> show route protocol ldp

inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)

```

```

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.16.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Push 100000
192.168.17.1/32    *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0

private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

100064            *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Pop
100064(S=0)       *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Pop
100080            *[LDP/9] 1d 23:03:35, metric 1
                  > via t1-4/0/0.0, Swap 100000

```

### show route protocol ldp extensive

```

user@host> show route protocol ldp extensive
192.168.16.1/32 (1 entry, 1 announced)
  State: <FlashAll>
    *LDP Preference: 9
      Next-hop reference count: 3
      Next hop: via t1-4/0/0.0, selected
      Label operation: Push 100000
      State: <Active Int>
      Local AS: 64500
      Age: 1d 23:03:58      Metric: 1
      Task: LDP
      Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
      AS path: I

192.168.17.1/32 (1 entry, 1 announced)
  State: <FlashAll>
    *LDP Preference: 9
      Next-hop reference count: 3
      Next hop: via t1-4/0/0.0, selected
      State: <Active Int>
      Local AS: 64500
      Age: 1d 23:03:58      Metric: 1
      Task: LDP
      Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
      AS path: I

private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)

100064 (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /36 -> {t1-4/0/0.0}
  *LDP Preference: 9
    Next-hop reference count: 2
    Next hop: via t1-4/0/0.0, selected
    State: <Active Int>
    Local AS: 64500
    Age: 1d 23:03:58      Metric: 1

```

```

Task: LDP
Announcement bits (1): 0-KRT
AS path: I
Prefixes bound to route: 192.168.17.1/32

100064(S=0) (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /40 -> {t1-4/0/0.0}
  *LDP   Preference: 9
        Next-hop reference count: 2
        Next hop: via t1-4/0/0.0, selected
        Label operation: Pop
        State: <Active Int>
        Local AS: 64500
        Age: 1d 23:03:58      Metric: 1
        Task: LDP
        Announcement bits (1): 0-KRT
        AS path: I

100080 (1 entry, 1 announced)
TSI:
KRT in-kernel 100080 /36 -> {t1-4/0/0.0}
  *LDP   Preference: 9
        Next-hop reference count: 2
        Next hop: via t1-4/0/0.0, selected
        Label operation: Swap 100000
        State: <Active Int>
        Local AS: 64500
        Age: 1d 23:03:58      Metric: 1
        Task: LDP
        Announcement bits (1): 0-KRT
        AS path: I
        Prefixes bound to route: 192.168.16.1/32

```

### show route protocol ospf (Layer 3 VPN)

```

user@host> show route protocol ospf
inet.0: 40 destinations, 40 routes (39 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.4/30      *[OSPF/10] 00:05:18, metric 4
                  > via t3-3/2/0.0
10.39.1.8/30      [OSPF/10] 00:05:18, metric 2
                  > via t3-3/2/0.0
10.255.14.171/32 *[OSPF/10] 00:05:18, metric 4
                  > via t3-3/2/0.0
10.255.14.179/32 *[OSPF/10] 00:05:18, metric 2
                  > via t3-3/2/0.0
172.16.233.5/32  *[OSPF/10] 20:25:55, metric 1

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30     [OSPF/10] 00:05:43, metric 1
                  > via so-0/2/2.0
10.255.14.173/32 *[OSPF/10] 00:05:43, metric 1
                  > via so-0/2/2.0
172.16.233.5/32  *[OSPF/10] 20:26:20, metric 1

```

**show route protocol ospf detail**

```

user@host> show route protocol ospf detail
VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30 (2 entries, 0 announced)
  OSPF Preference: 10
    Nexthop: via so-0/2/2.0, selected
    State: <Int>
    Inactive reason: Route Preference
    Age: 6:25 Metric: 1
    Area: 0.0.0.0
    Task: VPN-AB-OSPF
    AS path: I
    Communities: Route-Type:0.0.0.0:1:0

...

```

**show route protocol rip**

```

user@host> show route protocol rip
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 * [RIP/100] 20:24:34, metric 2
                  > to 10.39.1.22 via t3-0/2/2.0
172.16.233.9/32 * [RIP/100] 00:03:59, metric 1

```

**show route protocol rip detail**

```

user@host> show route protocol rip detail
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 (1 entry, 1 announced)
  *RIP Preference: 100
    Nexthop: 10.39.1.22 via t3-0/2/2.0, selected
    State: <Active Int>
    Age: 20:25:02 Metric: 2
    Task: VPN-AB-RIPv2
    Announcement bits (2): 0-KRT 2-BGP.0.0.0.0+179
    AS path: I
    Route learned from 10.39.1.22 expires in 96 seconds

```

**show route protocol ripng table inet6**

```

user@host> show route protocol ripng table inet6
inet6.0: 4215 destinations, 4215 routes (4214 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

1111::1/128 * [RIPng/100] 02:13:33, metric 2
              > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::2/128 * [RIPng/100] 02:13:33, metric 2
              > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::3/128 * [RIPng/100] 02:13:33, metric 2

```

```

1111::4/128      > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
                  *[RIPng/100] 02:13:33, metric 2
1111::5/128      > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
                  *[RIPng/100] 02:13:33, metric 2
1111::6/128      > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
                  *[RIPng/100] 02:13:33, metric 2
                  > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0

```

### show route protocol static detail

```

user@host> show route protocol static detail
inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
10.5.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next hop type: Router, Next hop index: 324
        Address: 0x9274010
        Next-hop reference count: 27
        Next hop: 192.168.187.126 via fxp0.0, selected
        Session Id: 0x0
        State: <Active NoReadvrt Int Ext>
        Age: 7w3d 21:24:25
        Validation State: unverified
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.10.0.0/16 (1 entry, 1 announced)
    *Static Preference: 5
        Next hop type: Router, Next hop index: 324
        Address: 0x9274010
        Next-hop reference count: 27
        Next hop: 192.168.187.126 via fxp0.0, selected
        Session Id: 0x0
        State: <Active NoReadvrt Int Ext>
        Age: 7w3d 21:24:25
        Validation State: unverified
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

10.13.10.0/23 (1 entry, 1 announced)
    *Static Preference: 5
        Next hop type: Router, Next hop index: 324
        Address: 0x9274010
        Next-hop reference count: 27
        Next hop: 192.168.187.126 via fxp0.0, selected
        Session Id: 0x0
        State: <Active NoReadvrt Int Ext>
        Age: 7w3d 21:24:25
        Validation State: unverified
        Task: RT
        Announcement bits (1): 0-KRT
        AS path: I

```

## show route range

---

<b>List of Syntax</b>	<a href="#">Syntax on page 384</a> <a href="#">Syntax (EX Series Switches) on page 384</a>
<b>Syntax</b>	<code>show route range</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;destination-prefix&gt;</code> <code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>
<b>Syntax (EX Series Switches)</b>	<code>show route range</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;destination-prefix&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display routing table entries using a prefix range.
<b>Options</b>	<b>none</b> —Display standard information about all routing table entries using a prefix range.  <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b> .  <b>destination-prefix</b> —Destination and prefix mask for the range.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route range on page 384</a> <a href="#">show route range destination-prefix on page 385</a> <a href="#">show route range detail on page 385</a> <a href="#">show route range extensive on page 386</a> <a href="#">show route range terse on page 387</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route range

```
user@host> show route range
```

```
inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
```



+ = Active Route, - = Last Active, \* = Both

```

10.10.0.0/16      *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
10.209.0.0/16    *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
10.255.71.14/32  *[Direct/0] 00:30:01
                  > via lo0.0
172.16.0.0/12    *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
192.168.0.0/16   *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
192.168.64.0/21  *[Direct/0] 00:30:01
                  > via fxp0.0
192.168.71.14/32 *[Local/0] 00:30:01
                  Local via fxp0.0
192.168.102.0/23 *[Static/5] 00:30:01
                  > to 192.168.71.254 via fxp0.0
...

```

### show route range destination-prefix

user@host> show route range 192.168.0.0/16

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)  
 + = Active Route, - = Last Active, \* = Both

```

192.168.0.0/16    *[Static/5] 00:31:14
                  > to 192.168.71.254 via fxp0.0
192.168.64.0/21  *[Direct/0] 00:31:14
                  > via fxp0.0
192.168.71.14/32 *[Local/0] 00:31:14
                  Local via fxp0.0
192.168.102.0/23 *[Static/5] 00:31:14
                  > to 192.168.71.254 via fxp0.0

```

### show route range detail

user@host> show route range detail

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)  
 10.10.0.0/16 (1 entry, 1 announced)

```

*Static Preference: 5
  Next-hop reference count: 22
  Next hop: 192.168.71.254 via fxp0.0, selected
  State: <Active NoReadvrt Int Ext>
  Age: 30:05
  Task: RT
  Announcement bits (1): 0-KRT
  AS path: I

```

10.209.0.0/16 (1 entry, 1 announced)

```

*Static Preference: 5
  Next-hop reference count: 22
  Next hop: 192.168.71.254 via fxp0.0, selected
  State: <Active NoReadvrt Int Ext>
  Age: 30:05
  Task: RT
  Announcement bits (1): 0-KRT
  AS path: I

```

```

10.255.71.14/32 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Age: 30:05
    Task: IF
    AS path: I

172.16.0.0/12 (1 entry, 1 announced)
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:05
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

...

```

#### show route range extensive

```

user@host> show route range extensive

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:17
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:17
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

10.255.71.14/32 (1 entry, 0 announced)
  *Direct Preference: 0
    Next hop type: Interface
    Next-hop reference count: 1
    Next hop: via lo0.0, selected
    State: <Active Int>
    Age: 30:17
    Task: IF
    AS path: I

```

```

172.16.0.0/12 (1 entry, 1 announced)
TSI:
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
  *Static Preference: 5
    Next-hop reference count: 22
    Next hop: 192.168.71.254 via fxp0.0, selected
    State: <Active NoReadvrt Int Ext>
    Age: 30:17
    Task: RT
    Announcement bits (1): 0-KRT
    AS path: I

```

...

### show route range terse

```
user@host> show route range terse
```

```

inet.0: 11 destinations, 11 routes (10 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

```

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
* 10.10.0.0/16	S 5			>192.168.71.254	
* 10.209.0.0/16	S 5			>192.168.71.254	
* 10.255.71.14/32	D 0			>lo0.0	
* 172.16.0.0/12	S 5			>192.168.71.254	
* 192.168.0.0/16	S 5			>192.168.71.254	
* 192.168.64.0/21	D 0			>fxp0.0	
* 192.168.71.14/32	L 0			Local	
* 192.168.102.0/23	S 5			>192.168.71.254	
* 207.17.136.0/24	S 5			>192.168.71.254	
* 207.17.136.192/32	S 5			>192.168.71.254	

```

__juniper_private1__.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0
hidden)

```

+ = Active Route, - = Last Active, \* = Both

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
* 10.0.0.0/8	D 0			>fxp2.0	
	D 0			>fxp1.0	
* 10.0.0.4/32	L 0			Local	

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

+ = Active Route, - = Last Active, \* = Both

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
47.0005.80ff.f800.0000.0108.0001.0102.5507.1014/152					
*	D 0			>lo0.0	

```
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

+ = Active Route, - = Last Active, \* = Both

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
abcd::10:255:71:14/128					
*	D 0			>lo0.0	
fe80::280:42ff:fe11:226f/128					
*	D 0			>lo0.0	

```

__juniper_private1__.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0
hidden)

```

+ = Active Route, - = Last Active, \* = Both

A	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
	fe80::280:42ff:fe11:226f/128						
*		D	0			>1o0.16385	

## show route receive-protocol

<b>List of Syntax</b>	<a href="#">Syntax on page 389</a> <a href="#">Syntax (EX Series Switches) on page 389</a>
<b>Syntax</b>	show route receive-protocol <i>protocol neighbor-address</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )
<b>Syntax (EX Series Switches)</b>	show route receive-protocol <i>protocol neighbor-address</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the routing information as it was received through a particular neighbor using a particular dynamic routing protocol.
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>protocol neighbor-address</i></b>—Protocol transmitting the route (<b>bgp</b>, <b>dvmrp</b>, <b>msdp</b>, <b>pim</b>, <b>rip</b>, or <b>ripng</b>) and address of the neighboring router from which the route entry was received.</p>
<b>Additional Information</b>	The output displays the selected routes and the attributes with which they were received, but does not show the effects of import policy on the routing attributes.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route receive-protocol bgp on page 392</a> <a href="#">show route receive-protocol bgp extensive on page 392</a> <a href="#">show route receive-protocol bgp table extensive on page 393</a> <a href="#">show route receive-protocol bgp logical-system extensive on page 393</a> <a href="#">show route receive-protocol bgp detail (Layer 2 VPN) on page 394</a> <a href="#">show route receive-protocol bgp extensive (Layer 2 VPN) on page 394</a> <a href="#">show route receive-protocol bgp (Layer 3 VPN) on page 395</a> <a href="#">show route receive-protocol bgp detail (Layer 3 VPN) on page 395</a> <a href="#">show route receive-protocol bgp detail (Long-Lived Graceful Restart) on page 396</a> <a href="#">show route receive-protocol bgp detail (Labeled Unicast) on page 396</a> <a href="#">show route receive-protocol bgp extensive (Layer 3 VPN) on page 397</a> <a href="#">Show route receive protocol (Segment Routing Traffic Engineering) on page 397</a>

**Output Fields** Table 23 on page 390 describes the output fields for the **show route receive-protocol** command. Output fields are listed in the approximate order in which they appear.

**Table 23: show route receive-protocol Output Fields**

Field Name	Field Description	Level of Output
<i>routing-table-name</i>	Name of the routing table—for example, inet.0.	All levels
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.	All levels
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b></li> <li>• <b>holddown</b> (routes that are in pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>	All levels
Prefix	Destination prefix.	none <b>brief</b>
MED	Multiple exit discriminator value included in the route.	none <b>brief</b>
<i>destination-prefix</i> (entry, announced)	Destination prefix. The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination.	<b>detail extensive</b>
<b>Accepted LongLivedStale</b>	The LongLivedStale flag indicates that the route was marked LLGR-stale by this router, as part of the operation of LLGR receiver mode. Either this flag or the LongLivedStaleImport flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.	<b>detail extensive</b>
<b>Accepted LongLivedStaleImport</b>	The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy. Either this flag or the LongLivedStale flag may be displayed for a route. Neither of these flags are displayed at the same time as the Stale (ordinary GR stale) flag.  Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and import into the inet.0 routing table	<b>detail extensive</b>
<b>ImportAccepted LongLivedStaleImport</b>	Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and imported into the inet.0 routing table  The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy.	<b>detail extensive</b>
<b>Route Distinguisher</b>	64-bit prefix added to IP subnets to make them unique.	<b>detail extensive</b>
<b>Label-Base, range</b>	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.	<b>detail extensive</b>

Table 23: show route receive-protocol Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>VPN Label</b>	Virtual private network (VPN) label. Packets are sent between CE and PE routing devices by advertising VPN labels. VPN labels transit over either an RSVP or an LDP label-switched path (LSP) tunnel.	<b>detail extensive</b>
<b>Next hop</b>	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.	All levels
<b>Localpref or Lclpref</b>	Local preference value included in the route.	All levels
<b>AS path</b>	<p>Autonomous system (AS) path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• I—IGP.</li> <li>• E—EGP.</li> <li>• ?—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• [ ]—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used the AS-path merge process, as defined in RFC 4893.</li> <li>• [ ]—If more than one AS number is configured on the router, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li>• { }—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• ( )—Parentheses enclose a confederation.</li> <li>• ( [ ] )—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>	All levels
<b>Route Labels</b>	Stack of labels carried in the BGP route update.	<b>detail extensive</b>
<b>Cluster list</b>	(For route reflected output only) Cluster ID sent by the route reflector.	<b>detail extensive</b>
<b>Originator ID</b>	(For route reflected output only) Address of routing device that originally sent the route to the route reflector.	<b>detail extensive</b>
<b>Communities</b>	Community path attribute for the route. See the Output Field table in the <a href="#">show route detail</a> command for all possible values for this field.	<b>detail extensive</b>
<b>AIGP</b>	Accumulated interior gateway protocol (AIGP) BGP attribute.	<b>detail extensive</b>
<b>Attrset AS</b>	Number, local preference, and path of the AS that originated the route. These values are stored in the <b>Attrset</b> attribute at the originating routing device.	<b>detail extensive</b>

Table 23: show route receive-protocol Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Layer2-info: encaps</b>	Layer 2 encapsulation (for example, VPLS).	<b>detail extensive</b>
<b>control flags</b>	Control flags: <b>none</b> or <b>Site Down</b> .	<b>detail extensive</b>
<b>mtu</b>	Maximum transmission unit (MTU) of the Layer 2 circuit.	<b>detail extensive</b>

## Sample Output

### show route receive-protocol bgp

```

user@host> show route receive-protocol bgp 10.255.245.215

inet.0: 28 destinations, 33 routes (27 active, 0 holddown, 1 hidden)
Prefix                Next hop                MED      Lclpref  AS path
10.22.1.0/24           10.255.245.215          0        100      I
10.22.2.0/24           10.255.245.215          0        100      I

```

### show route receive-protocol bgp extensive

```

user@host> show route receive-protocol bgp 10.255.245.63 extensive
inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
Prefix                Next hop                MED      Lclpref  AS path
172.16.1.0/24 (1 entry, 1 announced)
  Next hop: 10.0.50.3
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
172.16.163.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
172.16.164.0/16 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.45
172.16.195.0/24 (1 entry, 1 announced)
  Next hop: 111.222.5.254
  Localpref: 100
  AS path: I <Originator>
  Cluster list: 10.2.3.1
  Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
Prefix                Next hop                MED      Lclpref  AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix                Next hop                MED      Lclpref  AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix                Next hop                MED      Lclpref  AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)

```



**show route receive-protocol bgp table extensive**

```

user@host> show route receive-protocol bgp 207.17.136.192 table inet.0 66.117.68.0/24 extensive
inet.0: 227315 destinations, 227316 routes (227302 active, 0 holddown, 13 hidden)
* 66.117.63.0/24 (1 entry, 1 announced)
  Nexthop: 207.17.136.29
  Localpref: 100
  AS path: AS2 PA[6]: 14203 2914 3356 29748 33437 AS_TRANS
  AS path: AS4 PA[2]: 33437 393219
  AS path: Merged[6]: 14203 2914 3356 29748 33437 393219 I
  Communities: 2914:420

```

**show route receive-protocol bgp logical-system extensive**

```

user@host> show route receive-protocol bgp 10.0.0.9 logical-system PE4 extensive
inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)
* 10.0.0.0/30 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.0.0.4/30 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

10.0.0.8/30 (2 entries, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.9.9.1/32 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 10.100.1.1/32 (1 entry, 1 announced)
  Accepted
  Route Label: 3
  Nexthop: 10.0.0.9
  AS path: 13979 I

* 172.16.44.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300096
  Nexthop: 10.0.0.9
  AS path: 13979 I
  AIGP: 203

* 172.16.55.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300112
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I
  AIGP: 25

```

```

* 172.16.66.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300144
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I

* 172.16.99.0/24 (1 entry, 1 announced)
  Accepted
  Route Label: 300160
  Nexthop: 10.0.0.9
  AS path: 13979 7018 I

```

### show route receive-protocol bgp detail (Layer 2 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171 detail
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED      Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0
hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags: 0, mtu: 0
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
  Route Distinguisher: 10.255.245.35:1
  Label-base : 800000, range : 4, status-vector : 0x0
  Nexthop: 10.255.245.35
  Localpref: 100
  AS path: I
  Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0

```

### show route receive-protocol bgp extensive (Layer 2 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171 extensive
inet.0: 68 destinations, 68 routes (67 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED      Lclpref AS path
inet.3: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
frame-vpn.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED      Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 1 announced)
  Route Distinguisher: 10.255.245.35:1

```

```

Label-base : 800000, range : 4, status-vector : 0x0
Nexthop: 10.255.245.35
Localpref: 100
AS path: I
Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0
bgp.12vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.245.35:1:5:1/96 (1 entry, 0 announced)
Route Distinguisher: 10.255.245.35:1
Label-base : 800000, range : 4, status-vector : 0x0
Nexthop: 10.255.245.35
Localpref: 100
AS path: I
Communities: target:65299:100 Layer2-info: encaps:FRAME RELAY,
control flags:0, mtu: 0

```

### show route receive-protocol bgp (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.171
inet.0: 33 destinations, 33 routes (32 active, 0 holddown, 1 hidden)
Prefix          Nexthop          MED    Lclpref AS path
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
VPN-A.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.175/32  10.255.14.171          100 2 I
10.255.14.179/32  10.255.14.171          2    100 I
VPN-B.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.175/32  10.255.14.171          100 2 I
10.255.14.177/32  10.255.14.171          100 I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
mpls.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
bgp.13vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Prefix          Nexthop          MED    Lclpref AS path
10.255.14.171:300:10.255.14.177/32
10.255.14.171          100 I
10.255.14.171:100:10.255.14.179/32
10.255.14.171          2    100 I
10.255.14.171:200:10.255.14.175/32
10.255.14.171          100 2 I

```

### show route receive-protocol bgp detail (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.14.174 detail
inet.0: 16 destinations, 17 routes (15 active, 0 holddown, 1 hidden)
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
vpna.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
* 10.49.0.0/30 (1 entry, 1 announced)
Route Distinguisher: 10.255.14.176:2
VPN Label: 101264
Nexthop: 10.255.14.174
Localpref: 100
AS path: I
Communities: target:200:100
AttrSet AS: 100
Localpref: 100

```

```

        AS path: I
* 10.255.14.172/32 (1 entry, 1 announced)
  Route Distinguisher: 10.255.14.176:2
  VPN Label: 101280
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
* 10.255.14.174:2:10.49.0.0/30 (1 entry, 0 announced)
  Route Distinguisher: 10.255.14.174:2
  VPN Label: 101264
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
* 10.255.14.174:2:10.255.14.172/32 (1 entry, 0 announced)
  Route Distinguisher: 10.255.14.174:2
  VPN Label: 101280
  Nexthop: 10.255.14.174
  Localpref: 100
  AS path: I
  Communities: target:200:100
  AttrSet AS: 100
    Localpref: 100
    AS path: I
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

```

#### show route receive-protocol bgp detail (Long-Lived Graceful Restart)

```

user@host> show route receive-protocol bgp 10.4.12.11 detail

bgp.l2vpn.0: 38 destinations, 39 routes (37 active, 0 holddown, 1 hidden)
* 172.16.1.4:100:172.16.1.4/96 AD (1 entry, 1 announced)
  Accepted LongLivedStale LongLivedStaleImport
  Nexthop: 10.4.12.11
  Localpref: 100
  AS path: I

```

#### show route receive-protocol bgp detail (Labeled Unicast)

```

user@host> show route receive-protocol bgp 1.1.1.1 detail
inet.0: 45 destinations, 46 routes (45 active, 0 holddown, 0 hidden)
* 1.1.1.8/32 (2 entries, 2 announced)
Accepted
Route Labels: 1000123(top) 1000124 1000125 1000126
Nexthop: 1.1.1.4
Localpref: 100
AS path: I
Entropy label capable, next hop field matches route next hop

inet.3: 15 destinations, 21 routes (6 active, 0 holddown, 14 hidden)

```

```

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)

inet6.0: 26 destinations, 28 routes (26 active, 0 holddown, 0 hidden)

* 100::1/128 (2 entries, 2 announced)
Accepted
Route Labels: 1000123(top) 1000124 1000125 1000126
Nexthop: ::ffff:1.1.1.4
Localpref: 100
AS path: I

inet6.3: 22 destinations, 23 routes (22 active, 0 holddown, 0 hidden)

```

### show route receive-protocol bgp extensive (Layer 3 VPN)

```

user@host> show route receive-protocol bgp 10.255.245.63 extensive
inet.0: 244 destinations, 244 routes (243 active, 0 holddown, 1 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
  172.16.1.0/24 (1 entry, 1 announced)
    Nexthop: 10.0.50.3
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.45
  172.16.163.0/16 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.68
  172.16.164.0/16 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.45
  172.16.195.0/24 (1 entry, 1 announced)
    Nexthop: 111.222.5.254
    Localpref: 100
    AS path: I <Originator>
    Cluster list: 10.2.3.1
    Originator ID: 10.255.245.68
inet.2: 63 destinations, 63 routes (63 active, 0 holddown, 0 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
inet.3: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
  Prefix          Nexthop          MED      Lclpref AS path
mpls.0: 48 destinations, 48 routes (48 active, 0 holddown, 0 hidden)

```

### Show route receive protocol (Segment Routing Traffic Engineering)

```

show route receive protocol bgp 10.1.1.4
bgp.inetcolor.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

* 50-4.4.4.4-1234<sr6>/96 (1 entry, 0 announced)
  Import Accepted

```

```
Distinguisher: 50
Color: 1234
Nexthop: 10.1.1.4
Localpref: 100
AS path: 3 I
Communities: target:1.1.1.1:1
```

```
inetcolor.0: 6 destinations, 7 routes (6 active, 0 holddown, 0 hidden)
* 4.4.4.4-1234<c6>/64 (1 entry, 1 announced)
  Import Accepted
  Color: 1234
  Nexthop: 10.1.1.4
  Localpref: 100
  AS path: 3 I
  Communities: target:1.1.1.1:1
```

```
user@host# run show route receive-protocol bgp 5001:1::4
bgp.inet6color.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
```

```
* 50-2001:1::4-1234<sr6>/192 (1 entry, 0 announced)
  Import Accepted
  Distinguisher: 50
  Color: 1234
  Nexthop: ::ffff:1.1.1.4
  Localpref: 100
  AS path: 3 I
  Communities: target:1.1.1.1:1
```

```
inet6color.0: 6 destinations, 7 routes (6 active, 0 holddown, 0 hidden)
* 2001::5-1234<c6>/160 (1 entry, 1 announced)
  Import Accepted
  Color: 1234
  Nexthop: ::ffff:1.1.1.5
  Localpref: 100
  AS path: 3 I
  Communities: target:2:1
```

## show route resolution

<b>List of Syntax</b>	<a href="#">Syntax on page 399</a> <a href="#">Syntax (EX Series Switches) on page 399</a>
<b>Syntax</b>	<pre>show route resolution &lt;brief   detail   extensive   summary&gt; &lt;index <i>index</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;prefix&gt; &lt;table <i>routing-table-name</i>&gt; &lt;unresolved&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route resolution &lt;brief   detail   extensive   summary&gt; &lt;index <i>index</i>&gt; &lt;prefix&gt; &lt;table <i>routing-table-name</i>&gt; &lt;unresolved&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	<p>Display the entries in the next-hop resolution database. This database provides for recursive resolution of next hops through other prefixes in the routing table.</p>
<b>Options</b>	<p><b>none</b>—Display standard information about all entries in the next-hop resolution database.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>index <i>index</i></b>—(Optional) Show the index of the resolution tree.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b><i>prefix network/destination-prefix</i></b>—(Optional) Display database entries for the specified address.</p> <p><b>table <i>routing-table-name</i></b>—(Optional) Display information about a particular routing table (for example, <i>inet.0</i>) where policy-based export is currently enabled.</p> <p><b>unresolved</b>—(Optional) Display routes that could not be resolved.</p>
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <i>Example: Configuring Route Resolution on PE Routers</i></li> </ul>

- List of Sample Output**
- [show route resolution detail on page 401](#)
  - [show route resolution \(Multipath Resolution\) on page 402](#)
  - [show route resolution summary on page 403](#)
  - [show route resolution unresolved on page 403](#)



**Output Fields** Table 24 on page 401 describes the output fields for the **show route resolution** command. Output fields are listed in the approximate order in which they appear.

**Table 24: show route resolution Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table whose prefixes are resolved using the entries in the route resolution database. For routing table groups, this is the name of the primary routing table whose prefixes are resolved using the entries in the route resolution database.
<b>Tree index</b>	Tree index identifier.
<b>Nodes</b>	Number of nodes in the tree.
<b>Reference count</b>	Number of references made to the next hop.
<b>Contributing routing tables</b>	Routing tables used for next-hop resolution.
<b>Originating RIB</b>	Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of <b>inet.0</b> resolving through <b>inet.0</b> and <b>inet.3</b> , this field indicates which routing table, <b>inet.0</b> or <b>inet.3</b> , provided the best path for a particular prefix.
<b>Metric</b>	Metric associated with the forwarding next hop.
<b>Node path count</b>	Number of nodes in the path.
<b>Forwarding next hops</b>	Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.
	Merged—Merged next hops when recursive resolution of multipath is configured.

## Sample Output

### show route resolution detail

```

user@host> show route resolution detail
Tree Index: 1, Nodes 0, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 2, Nodes 23, Reference Count 1
Contributing routing tables: inet.0 inet.3
10.10.0.0/16 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.0/30 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 1
10.31.1.1/32 Originating RIB: inet.0
  Node path count: 1
  Forwarding nexthops: 0
10.31.1.4/30 Originating RIB: inet.0
  Node path count: 1

```

```

Forwarding nexthops: 1
10.31.1.5/32 Originating RIB: inet.0
Node path count: 1
Forwarding nexthops: 0
10.31.2.0/30 Originating RIB: inet.0
Metric: 2 Node path count: 1
Forwarding nexthops: 2
10.31.11.0/24 Originating RIB: inet.0
Node path count: 1
Forwarding nexthops: 1

```

### show route resolution (Multipath Resolution)

```

user@host> show route resolution detail
user@host> show route resolution detail 10.1.1.2
Tree Index: 1, Nodes 36, Reference Count 3
Contributing routing tables: inet.0 inet.3
Policy: [ abc ]
10.1.1.2/32 Originating RIB: inet.0
Node path count: 1
Next hop subtype: INDIRECT
Indirect next hops: 2
  Protocol next hop: 10.1.1.1
  Inode flags: 0x206 path flags: 0x08
  Path fnh link: 0xc9321c0 path inh link: 0x0
  Indirect next hop: 0xb2b20f0 1048574 INH Session ID: 0x143
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 12.1.1.2 via ge-2/0/1.0
    Session Id: 0x144
    Next hop: 13.1.1.2 via ge-2/0/2.0
    Session Id: 0x145

10.1.1.1/32 Originating RIB: inet.0
Node path count: 1
Node flags: 1
Forwarding nexthops: 1 (Merged)
Nexthop: 12.1.1.2 via ge-2/0/1.0

Nexthop: 13.1.1.2 via ge-2/0/2.0

user@host> show route resolution summary
Tree Index: 1, Nodes 7, Reference Count 2
Contributing routing tables: inet.3
Tree Index: 2, Nodes 7, Reference Count 8213
Contributing routing tables: inet.3
Policy: [ RRwM ]
Tree Index: 3, Nodes 7, Reference Count 2
Contributing routing tables: inet6.3
Tree Index: 4, Nodes 1, Reference Count 1
Contributing routing tables: iso.0
Tree Index: 5, Nodes 1000061, Reference Count 13
Contributing routing tables: inet.0 inet.3
Policy: [ Community-RRwM ]
Tree Index: 6, Nodes 2013, Reference Count 6
Contributing routing tables: inet6.0 inet6.3
Policy: [ RRwM ]
Tree Index: 7, Nodes 7, Reference Count 1501
Contributing routing tables: inet6.3
Policy: [ RRwM ]

```

```
Tree Index: 8, Nodes 1000061, Reference Count 2
Contributing routing tables: inet.0 inet.3
Policy: [ RRWM ]
```

#### show route resolution summary

```
user@host> show route resolution summary
Tree Index: 1, Nodes 24, Reference Count 1
Contributing routing tables: :voice.inet.0 :voice.inet.3
Tree Index: 2, Nodes 2, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 3, Nodes 43, Reference Count 1
Contributing routing tables: inet.0 inet.3
```

#### show route resolution unresolved

```
user@host> show route resolution unresolved
Tree Index 1
vt-3/2/0.32769.0      /16
    Protocol Nexthop: 10.255.71.238 Push 800000
    Indirect nexthop: 0 -
vt-3/2/0.32772.0      /16
    Protocol Nexthop: 10.255.70.103 Push 800008
    Indirect nexthop: 0 -
Tree Index 2
```

## show route snooping

---

<b>Syntax</b>	<code>show route snooping</code> <code>&lt;brief   detail   extensive   terse&gt;</code> <code>&lt;all&gt;</code> <code>&lt;best address/prefix&gt;</code> <code>&lt;exact address&gt;</code> <code>&lt;logical-system logical-system-name&gt;</code> <code>&lt;range prefix-range&gt;</code> <code>&lt;summary&gt;</code> <code>&lt;table table-name&gt;</code>
<b>Release Information</b>	Command introduced in Junos OS Release 8.5. Command introduced in Junos OS Release 9.0 for EX Series switches.
<b>Description</b>	Display the entries in the routing table that were learned from snooping.
<b>Options</b>	<p><b>none</b>—Display the entries in the routing table that were learned from snooping.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>all</b>—(Optional) Display all entries, including hidden entries.</p> <p><b>best address/prefix</b>—(Optional) Display the longest match for the provided address and optional prefix.</p> <p><b>exact address/prefix</b>—(Optional) Display exact matches for the provided address and optional prefix.</p> <p><b>logical-system logical-system-name</b>—(Optional) Display information about a particular logical system, or type 'all'.</p> <p><b>range prefix-range</b>—(Optional) Display information for the provided address range.</p> <p><b>summary</b>—(Optional) Display route snooping summary statistics.</p> <p><b>table table-name</b>—(Optional) Display information for the named table.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route snooping detail on page 405</a> <a href="#">show route snooping logical-system all on page 405</a>
<b>Output Fields</b>	For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.

## Sample Output

### show route snooping detail

```

user@host> show route snooping detail
__+domainAll___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

224.0.0.2/32 (1 entry, 1 announced)
  *IGMP Preference: 0
    Next hop type: MultiRecv
    Next-hop reference count: 4
    State: <Active NoReadvrt Int>
    Age: 2:24
    Task: IGMP
    Announcement bits (1): 0-KRT
    AS path: I

224.0.0.22/32 (1 entry, 1 announced)
  *IGMP Preference: 0
    Next hop type: MultiRecv
    Next-hop reference count: 4
    State: <Active NoReadvrt Int>
    Age: 2:24
    Task: IGMP
    Announcement bits (1): 0-KRT
    AS path: I

__+domainAll___.inet.1: 36 destinations, 36 routes (36 active, 0 holddown, 0 hidden)

224.0.0.0.0.0.0.0.0/24 (1 entry, 1 announced)
  *Multicast Preference: 180
    Next hop type: Multicast (IPv4), Next hop index: 1048584
    Next-hop reference count: 4
    State: <Active Int>
    Age: 2:24
    Task: MC
    Announcement bits (1): 0-KRT
    AS path: I

<snip>

```

### show route snooping logical-system all

```

user@host> show route snooping logical-system all

logical-system: default

inet.1: 20 destinations, 20 routes (20 active, 0 holddown, 0 hidden)
Restart Unsupported
+ = Active Route, - = Last Active, * = Both

0.0,0.1,0.0,232.1.1.65,100.1.1.2/112*[Multicast/180] 00:07:36
    Multicast (IPv4) Composite
0.0,0.1,0.0,232.1.1.66,100.1.1.2/112*[Multicast/180] 00:07:36
    Multicast (IPv4) Composite
0.0,0.1,0.0,232.1.1.67,100.1.1.2/112*[Multicast/180] 00:07:36

<snip>

default-switch.inet.1: 237 dest, 237 rts (237 active, 0 holddown, 0 hidden)

```

Restart Complete

+ = Active Route, - = Last Active, \* = Both

0.15,0.1,0.0,0.0.0.0,0.0.0.0,2/120\*[Multicast/180] 00:08:21

Multicast (IPv4) Composite

0.15,0.1,0.0,0.0.0.0,0.0.0.0,2,17/128\*[Multicast/180] 00:08:21

Multicast (IPv4) Composite

<snip>

## show route source-gateway

<b>List of Syntax</b>	<a href="#">Syntax on page 407</a> <a href="#">Syntax (EX Series Switches) on page 407</a>
<b>Syntax</b>	<pre>show route source-gateway address &lt;brief   detail   extensive   terse&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>
<b>Syntax (EX Series Switches)</b>	<pre>show route source-gateway address &lt;brief   detail   extensive   terse&gt;</pre>
<b>Release Information</b>	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
<b>Description</b>	<p>Display the entries in the routing table that were learned from a particular address. The <b>Source</b> field in the <b>show route detail</b> command output lists the source for each route, if known.</p>
<b>Options</b>	<p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>.</p> <p><b>address</b>—IP address of the system.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show route source-gateway on page 407</a> <a href="#">show route source-gateway detail on page 408</a> <a href="#">show route source-gateway extensive on page 410</a>
<b>Output Fields</b>	<p>For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.</p>

## Sample Output

### show route source-gateway

```
user@host> show route source-gateway 10.255.70.103
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
```

```

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:1:3:1/96
    *[BGP/170] 12:12:24, localpref 100, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:2:3:1/96
    *[BGP/170] 12:12:24, localpref 0, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.255.70.103:1:3:1/96
    *[BGP/170] 12:12:24, localpref 100, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

10.255.70.103:2:3:1/96
    *[BGP/170] 12:12:24, localpref 0, from 10.255.70.103
    AS path: I
    > via so-0/3/0.0, label-switched-path green-r1-r3

```

### show route source-gateway detail

```

user@host> show route source-gateway 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

```



```
inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete
green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
```

```
Restart Complete
```

```
10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP   Preference: 170/-101
        Route Distinguisher: 10.255.70.103:1
        Next-hop reference count: 7
        Source: 10.255.70.103
        Protocol next hop: 10.255.70.103
        Indirect next hop: 2 no-forward
        State: <Secondary Active Int Ext>
        Local AS: 69 Peer AS: 69
        Age: 12:14:00 Metric2: 1
        Task: BGP_69.10.255.70.103+179
        Announcement bits (1): 0-green-l2vpn
        AS path: I
        Communities: target:11111:1 Layer2-info: encaps:VPLS,
        control flags:, mtu: 0
        Label-base: 800008, range: 8
        Localpref: 100
        Router ID: 10.255.70.103
        Primary Routing Table bgp.l2vpn.0
```

```
red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
```

```
10.255.70.103:2:3:1/96 (1 entry, 1 announced)
  *BGP   Preference: 170/-1
        Route Distinguisher: 10.255.70.103:2
        Next-hop reference count: 7
        Source: 10.255.70.103
        Protocol next hop: 10.255.70.103
        Indirect next hop: 2 no-forward
        State: <Secondary Active Int Ext>
        Local AS: 69 Peer AS: 69
        Age: 12:14:00 Metric2: 1
        Task: BGP_69.10.255.70.103+179
        Announcement bits (1): 0-red-l2vpn
        AS path: I
        Communities: target:11111:2 Layer2-info: encaps:VPLS,
        control flags:Site-Down, mtu: 0
        Label-base: 800016, range: 8
        Localpref: 0
        Router ID: 10.255.70.103
        Primary Routing Table bgp.l2vpn.0
```

```
bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
```

```
10.255.70.103:1:3:1/96 (1 entry, 0 announced)
  *BGP   Preference: 170/-101
        Route Distinguisher: 10.255.70.103:1
        Next-hop reference count: 7
        Source: 10.255.70.103
        Protocol next hop: 10.255.70.103
        Indirect next hop: 2 no-forward
        State: <Active Int Ext>
        Local AS: 69 Peer AS: 69
```

```

Age: 12:14:00 Metric2: 1
Task: BGP_69.10.255.70.103+179
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS, control
flags:, mtu: 0
Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Secondary Tables: green.l2vpn.0
10.255.70.103:2:3:1/96 (1 entry, 0 announced)
  *BGP Preference: 170/-1
    Route Distinguisher: 10.255.70.103:2
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 12:14:00 Metric2: 1
    Task: BGP_69.10.255.70.103+179
    AS path: I
    Communities: target:11111:2 Layer2-info: encaps:VPLS,
    control flags:Site-Down,
    mtu: 0
    Label-base: 800016, range: 8
    Localpref: 0
    Router ID: 10.255.70.103
    Secondary Tables: red.l2vpn.0

```

### show route source-gateway extensive

```

user@host> show route source-gateway 10.255.70.103 extensive
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103:1:3:1/96 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.70.103:1
    Next-hop reference count: 7
    Source: 10.255.70.103
    Protocol next hop: 10.255.70.103
    Indirect next hop: 2 no-forward
    State: <Secondary Active Int Ext>
    Local AS: 69 Peer AS: 69
    Age: 12:15:24 Metric2: 1

```

```

Task: BGP_69.10.255.70.103+179
Announcement bits (1): 0-green-l2vpn
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0
Label-base: 800008, range: 8
Localpref: 100
Router ID: 10.255.70.103
Primary Routing Table bgp.l2vpn.0

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete

10.255.70.103:2:3:1/96 (1 entry, 1 announced)
  *BGP   Preference: 170/-1
        Route Distinguisher: 10.255.70.103:2
        Next-hop reference count: 7
        Source: 10.255.70.103
        Protocol next hop: 10.255.70.103
        Indirect next hop: 2 no-forward
        State: <Secondary Active Int Ext>
        Local AS: 69 Peer AS: 69
        Age: 12:15:24 Metric2: 1
        Task: BGP_69.10.255.70.103+179
        Announcement bits (1): 0-red-l2vpn
        AS path: I
        Communities: target:11111:2 Layer2-info: encaps:VPLS,
        control flags:Site-Down, mtu: 0
        Label-base: 800016, range: 8
        Localpref: 0
        Router ID: 10.255.70.103
        Primary Routing Table bgp.l2vpn.0

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

10.255.70.103:1:3:1/96 (1 entry, 0 announced)
  *BGP   Preference: 170/-101
        Route Distinguisher: 10.255.70.103:1
        Next-hop reference count: 7
        Source: 10.255.70.103
        Protocol next hop: 10.255.70.103
        Indirect next hop: 2 no-forward
        State: <Active Int Ext>
        Local AS: 69 Peer AS: 69
        Age: 12:15:24 Metric2: 1
        Task: BGP_69.10.255.70.103+179
        AS path: I
        Communities: target:11111:1 Layer2-info: encaps:VPLS,
        control flags:, mtu: 0
        Label-base: 800008, range: 8
        Localpref: 100
        Router ID: 10.255.70.103
        Secondary Tables: green.l2vpn.0
        Indirect next hops: 1
          Protocol next hop: 10.255.70.103 Metric: 2
          Indirect next hop: 2 no-forward
          Indirect path forwarding next hops: 1
        Next hop: via so-0/3/0.0 weight 0x1
                  10.255.70.103/32 Originating RIB: inet.3
                  Metric: 2 Node path count: 1

```

```

                                Forwarding nexthops: 1
                                Nexthop: via so-0/3/0.0

10.255.70.103:2:3:1/96 (1 entry, 0 announced)
  *BGP    Preference: 170/-1
           Route Distinguisher: 10.255.70.103:2
           Next-hop reference count: 7
           Source: 10.255.70.103
           Protocol next hop: 10.255.70.103
           Indirect next hop: 2 no-forward
           State: <Active Int Ext>
           Local AS: 69 Peer AS: 69
           Age: 12:15:24 Metric2: 1
           Task: BGP_69.10.255.70.103+179
           AS path: I
           Communities: target:11111:2 Layer2-info: encaps:VPLS,
           control flags:Site-Down,
           mtu: 0
           Label-base: 800016, range: 8
           Localpref: 0
           Router ID: 10.255.70.103
           Secondary Tables: red.12vpn.0
           Indirect next hops: 1
             Protocol next hop: 10.255.70.103 Metric: 2
             Indirect next hop: 2 no-forward
             Indirect path forwarding next hops: 1
           Next hop:      via so-0/3/0.0 weight 0x1
             10.255.70.103/32 Originating RIB: inet.3
             Metric: 2 Node path count: 1
             Forwarding nexthops: 1
             Nexthop: via so-0/3/0.0

```

## show route summary

---

List of Syntax	<a href="#">Syntax on page 413</a> <a href="#">Syntax (EX Series Switches) on page 413</a>
Syntax	<pre>show route summary &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;table <i>routing-table-name</i>&gt;</pre>
Syntax (EX Series Switches)	show route summary
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	<p>Display summary statistics about the entries in the routing table.</p> <p>CPU utilization might increase while the device learns routes. We recommend that you use the <b>show route summary</b> command after the device learns and enters the routes into the routing table. Depending on the size of your network, this might take several minutes. If you receive a “timeout communicating with routing daemon” error when using the <b>show route summary</b> command, wait several minutes before attempting to use the command again. This is not a critical system error, but you might experience a delay in using the command-line interface (CLI).</p>
Options	<p><b>none</b>—Display summary statistics about the entries in the routing table.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>table <i>routing-table-name</i></b>—(Optional) Display summary statistics for all routing tables whose name begins with this string (for example, <b>inet.0</b> and <b>inet6.0</b> are both displayed when you run the <b>show route summary table inet</b> command). If you only want to display statistics for a specific routing table, make sure to enter the exact name of that routing table.</p>
Required Privilege Level	view
List of Sample Output	<a href="#">show route summary on page 415</a> <a href="#">show route summary table on page 415</a> <a href="#">show route summary table (with Route Limits Configured for the Routing Table) on page 416</a>
Output Fields	<p><a href="#">Table 25 on page 414</a> lists the output fields for the <b>show route summary</b> command. Output fields are listed in the approximate order in which they appear.</p>

Table 25: show route summary Output Fields

Field Name	Field Description
<b>Router ID</b>	Address of the local routing device.
<b><i>routing-table-name</i></b>	Name of the routing table (for example, <b>inet.0</b> ).
<b>destinations</b>	Number of destinations for which there are routes in the routing table.
<b>routes</b>	<p>Number of routes in the routing table:</p> <ul style="list-style-type: none"> <li>• <b>active</b>—Number of routes that are active.</li> <li>• <b>holddown</b>—Number of routes that are in the hold-down state before being declared inactive.</li> <li>• <b>hidden</b>—Number of routes that are not used because of routing policy.</li> </ul>
<b>Restart complete</b>	<p>All protocols have restarted for this routing table.</p> <p>Restart state:</p> <ul style="list-style-type: none"> <li>• <b>Pending:protocol-name</b>—List of protocols that have not yet completed graceful restart for this routing table.</li> <li>• <b>Complete</b>—All protocols have restarted for this routing table.</li> </ul> <p>For example, if the output shows-</p> <ul style="list-style-type: none"> <li>• LDP.inet.0: 5 routes (4 active, 1 holddown, 0 hidden) Restart Pending: OSPF LDP VPN</li> </ul> <p>This indicates that <b>OSPF</b>, <b>LDP</b>, and <b>VPN</b> protocols did not restart for <b>LDP.inet.0</b> routing table.</p> <ul style="list-style-type: none"> <li>• vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden) Restart Complete</li> </ul> <p>This indicates that all protocols have restarted for <b>vpls_1.l2vpn.0</b> routing table.</p>
<b>Limit/Threshold</b>	<p>Displays the configured route limits for the routing table set with the <b>maximum-prefixes</b> and the <b>maximum-paths</b> statements. If you do not configure route limits for the routing table, the show output does not display this information.</p> <ul style="list-style-type: none"> <li>• <b>destinations</b>—The first number represents the maximum number of route prefixes installed in the routing table. The second number represents the number of route prefixes that trigger a warning message.</li> <li>• <b>routes</b>—The first number represents the maximum number of routes. The second number represents the number of routes that trigger a warning message.</li> </ul>
<b>Direct</b>	Routes on the directly connected network.
<b>Local</b>	Local routes.
<b><i>protocol-name</i></b>	Name of the protocol from which the route was learned. For example, <b>OSPF</b> , <b>RSVP</b> , and <b>Static</b> .

## Sample Output

### show route summary

```

user@host> show route summary
Autonomous system number: 69
Router ID: 10.255.71.52
Maximum-ECMP: 32
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
    Direct:    6 routes,    5 active
    Local:    4 routes,    4 active
    OSPF:     5 routes,    4 active
    Static:   7 routes,    7 active
    IGMP:     1 routes,    1 active
    PIM:      2 routes,    2 active

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
    RSVP:     2 routes,    2 active

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
    Direct:    1 routes,    1 active

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
    MPLS:     3 routes,    3 active
    VPLS:     4 routes,    2 active

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete
    Direct:    2 routes,    2 active
    PIM:       2 routes,    2 active
    MLD:       1 routes,    1 active

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
    BGP:       2 routes,    2 active
    L2VPN:     2 routes,    2 active

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
    BGP:       2 routes,    2 active
    L2VPN:     1 routes,    1 active

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
    BGP:       4 routes,    4 active

```

### show route summary table

```

user@host> show route summary table inet
Router ID: 192.168.0.1

inet.0: 32 destinations, 34 routes (31 active, 0 holddown, 1 hidden)
    Direct:    6 routes,    5 active
    Local:     9 routes,    9 active
    OSPF:      3 routes,    1 active
    Static:   13 routes,   13 active

```

```
IGMP:      1 routes,      1 active
PIM:       2 routes,      2 active

inet.1: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Multicast: 1 routes,      1 active

inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Local:    1 routes,      1 active
PIM:     2 routes,      2 active

inet6.1: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Multicast: 1 routes,      1 active
```

#### show route summary table (with Route Limits Configured for the Routing Table)

```
user@host> show route summary table VPN-A.inet.0
Autonomous system number: 100
Router ID: 10.255.182.142

VPN-A.inet.0: 13 destinations, 14 routes (13 active, 0 holddown, 0 hidden)
Limit/Threshold: 2000/200 destinations 20/12 routes
Direct:      2 routes,      2 active
Local:       1 routes,      1 active
OSPF:        4 routes,      3 active
BGP:         4 routes,      4 active
IGMP:        1 routes,      1 active
PIM:         2 routes,      2 active
```



## show route table

<b>List of Syntax</b>	<a href="#">Syntax on page 417</a> <a href="#">Syntax (EX Series Switches, QFX Series Switches) on page 417</a>
<b>Syntax</b>	show route table <i>routing-table-name</i> <brief   detail   extensive   terse> <logical-system (all   <i>logical-system-name</i> )>
<b>Syntax (EX Series Switches, QFX Series Switches)</b>	show route table <i>routing-table-name</i> <brief   detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 14.1X53-D15 for QFX Series switches. Show route table evpn statement introduced in Junos OS Release 15.1X53-D30 for QFX Series switches.
<b>Description</b>	Display the route entries in a particular routing table.
<b>Options</b>	<b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output.  <b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.  <b><i>routing-table-name</i></b> —Display route entries for all routing tables whose names begin with this string (for example, inet.0 and inet6.0 are both displayed when you run the <b>show route table inet</b> command).
<b>Required Privilege Level</b>	view
<b>Related Documentation</b>	<ul style="list-style-type: none"> <li>• <a href="#">show route summary on page 413</a></li> </ul>
<b>List of Sample Output</b>	<a href="#">show route table bgp.l2.vpn on page 428</a> <a href="#">show route table bgp.l3vpn.0 on page 428</a> <a href="#">show route table bgp.l3vpn.0 detail on page 429</a> <a href="#">show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured) on page 430</a> <a href="#">show route table bgp.evpn.0 on page 430</a> <a href="#">show route table evpna.evpn.0 on page 431</a> <a href="#">show route table inet.0 on page 431</a> <a href="#">show route table inet.3 on page 432</a> <a href="#">show route table inet.3 protocol ospf on page 432</a> <a href="#">show route table inet6.0 on page 432</a> <a href="#">show route table inet6.3 on page 432</a>

[show route table inetflow detail on page 433](#)  
[show route table lsdist.0 extensive on page 433](#)  
[show route table l2circuit.0 on page 435](#)  
[show route table mpls on page 435](#)  
[show route table mpls extensive on page 435](#)  
[show route table mpls.0 on page 436](#)  
[show route table mpls.0 detail \(PTX Series\) on page 437](#)  
[show route table mpls.0 ccc ge-0/0/1.1004 detail on page 437](#)  
[show route table mpls.0 protocol evpn on page 438](#)  
[show route table mpls.0 protocol ospf on page 444](#)  
[show route table mpls.0 extensive \(PTX Series\) on page 445](#)  
[show route table mpls.0 \(RSVP Route—Transit LSP\) on page 445](#)  
[show route table vpls\\_1 detail on page 446](#)  
[show route table vpn-a on page 446](#)  
[show route table vpn-a.mdt.0 on page 446](#)  
[show route table VPN-A detail on page 447](#)  
[show route table VPN-AB.inet.0 on page 447](#)  
[show route table VPN\\_blue.mvpn-inet6.0 on page 448](#)  
[show route table vrf1.mvpn.0 extensive on page 448](#)  
[show route table inetflow detail on page 448](#)  
[show route table bgp.evpn.0 extensive |no-more \(EVPN\) on page 451](#)

**Output Fields** [Table 11 on page 232](#) describes the output fields for the **show route table** command. Output fields are listed in the approximate order in which they appear.

**Table 26: show route table Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
Restart complete	<p>All protocols have restarted for this routing table.</p> <p>Restart state:</p> <ul style="list-style-type: none"> <li>• <b>Pending:</b><i>protocol-name</i>—List of protocols that have not yet completed graceful restart for this routing table.</li> <li>• <b>Complete</b>—All protocols have restarted for this routing table.</li> </ul> <p>For example, if the output shows-</p> <ul style="list-style-type: none"> <li>• LDP.inet.0 : 5 routes (4 active, 1 holddown, 0 hidden) Restart Pending: OSPF LDP VPN</li> </ul> <p>This indicates that <b>OSPF</b>, <b>LDP</b>, and <b>VPN</b> protocols did not restart for the <b>LDP.inet.0</b> routing table.</p> <ul style="list-style-type: none"> <li>• vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden) Restart Complete</li> </ul> <p>This indicates that all protocols have restarted for the <b>vpls_1.l2vpn.0</b> routing table.</p>
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.

Table 26: show route table Output Fields (*continued*)

Field Name	Field Description
<i>number routes</i>	<p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active)</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>
<i>route-destination</i> (entry, announced)	<p>Route destination (for example:10.0.0.1/24). The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96). <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> <li>• <b>inclusive multicast Ethernet tag route</b>—Type of route destination represented by (for example, 3:100.100.100.10:100::0::10::100.100.100.10/384): <ul style="list-style-type: none"> <li>• <b>route distinguisher</b>—(8 octets) Route distinguisher (RD) must be the RD of the EVPN instance (EVI) that is advertising the NLRI.</li> <li>• <b>Ethernet tag ID</b>—(4 octets) Identifier of the Ethernet tag. Can set to 0 or to a valid Ethernet tag value.</li> <li>• <b>IP address length</b>—(1 octet) Length of IP address in bits.</li> <li>• <b>originating router's IP address</b>—(4 or 16 octets) Must set to the provider edge (PE) device's IP address. This address should be common for all EVIs on the PE device, and may be the PE device's loopback address.</li> </ul> </li> </ul>
label stacking	<p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>

Table 26: show route table Output Fields (*continued*)

Field Name	Field Description
[ <i>protocol, preference</i> ]	<p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>
Level	(IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area. When the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.
Route Distinguisher	IP subnet augmented with a 64-bit prefix.
PMSI	Provider multicast service interface (MVPN routing table).
Next-hop type	Type of next hop. For a description of possible values for this field, see <a href="#">Table 14 on page 281</a> .
Next-hop reference count	Number of references made to the next hop.
Flood nexthop branches exceed maximum message	Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.
Source	IP address of the route source.
Next hop	Network layer address of the directly reachable neighboring system.
via	<p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul>
Label-switched-path <i>lsp-path-name</i>	Name of the LSP used to reach the next hop.

Table 26: show route table Output Fields (*continued*)

Field Name	Field Description
Label operation	MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).
Interface	(Local only) Local interface name.
Protocol next hop	Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.
Indirect next hop	Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.
State	State of the route (a route can be in more than one state). See <a href="#">Table 15 on page 283</a> .
Local AS	AS number of the local routing devices.
Age	How long the route has been known.
AIGP	Accumulated interior gateway protocol (AIGP) BGP attribute.
Metric	Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.
MED-plus-IGP	Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.
TTL-Action	For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.
Task	Name of the protocol that has added the route.
Announcement bits	<p>The number of BGP peers or protocols to which Junos OS has announced this route, followed by the list of the recipients of the announcement. Junos OS can also announce the route to the kernel routing table (KRT) for installing the route into the Packet Forwarding Engine, to a resolve tree, a Layer 2 VC, or even a VPN. For example, <b><i>n-Resolve inet</i></b> indicates that the specified route is used for route resolution for next hops found in the routing table.</p> <ul style="list-style-type: none"> <li><b><i>n</i></b>—An index used by Juniper Networks customer support only.</li> </ul>

Table 26: show route table Output Fields (*continued*)

Field Name	Field Description
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>Recorded</b>—The AS path is recorded by the sample process (sampled).</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893.</li> <li>• <b>[ ]</b>—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p>
validation-state	<p>(BGP-learned routes) Validation status of the route:</p> <ul style="list-style-type: none"> <li>• <b>Invalid</b>—Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>Unknown</b>—Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>Unverified</b>—Indicates that the origin of the prefix is not verified against the database. This is because the database got populated and the validation is not called for in the BGP import policy, although origin validation is enabled, or the origin validation is not enabled for the BGP peers.</li> <li>• <b>Valid</b>—Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>
FECs bound to route	Indicates point-to-multipoint root address, multicast source address, and multicast group address when multipoint LDP (M-LDP) inband signaling is configured.
Primary Upstream	When multipoint LDP with multicast-only fast reroute (MoFRR) is configured, indicates the primary upstream path. MoFRR transmits a multicast join message from a receiver toward a source on a primary path, while also transmitting a secondary multicast join message from the receiver toward the source on a backup path.
RPF Nexthops	When multipoint LDP with MoFRR is configured, indicates the reverse-path forwarding (RPF) next-hop information. Data packets are received from both the primary path and the secondary paths. The redundant packets are discarded at topology merge points due to the RPF checks.
Label	Multiple MPLS labels are used to control MoFRR stream selection. Each label represents a separate route, but each references the same interface list check. Only the primary label is forwarded while all others are dropped. Multiple interfaces can receive packets using the same label.

Table 26: show route table Output Fields (*continued*)

Field Name	Field Description
weight	Value used to distinguish MoFRR primary and backup routes. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.
VC Label	MPLS label assigned to the Layer 2 circuit virtual connection.
MTU	Maximum transmission unit (MTU) of the Layer 2 circuit.
VLAN ID	VLAN identifier of the Layer 2 circuit.
Prefixes bound to route	Forwarding equivalent class (FEC) bound to this route. Applicable only to routes installed by LDP.
Communities	Community path attribute for the route. See <a href="#">Table 16 on page 285</a> for all possible values for this field.
Layer2-info: encaps	Layer 2 encapsulation (for example, VPLS).
control flags	Control flags: <b>none</b> or <b>Site Down</b> .
mtu	Maximum transmission unit (MTU) information.
Label-Base, range	First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device.
status vector	Layer 2 VPN and VPLS network layer reachability information (NLRI).
Accepted Multipath	Current active path when BGP multipath is configured.
Accepted LongLivedStale	The LongLivedStale flag indicates that the route was marked LLGR-stale by this router, as part of the operation of LLGR receiver mode. Either this flag or the LongLivedStaleImport flag might be displayed for a route. Neither of these flags is displayed at the same time as the Stale (ordinary GR stale) flag.
Accepted LongLivedStaleImport	<p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy. Either this flag or the LongLivedStale flag might be displayed for a route. Neither of these flags is displayed at the same time as the Stale (ordinary GR stale) flag.</p> <p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and import into the inet.0 routing table</p>
ImportAccepted LongLivedStaleImport	<p>Accept all received BGP long-lived graceful restart (LLGR) and LLGR stale routes learned from configured neighbors and imported into the inet.0 routing table</p> <p>The LongLivedStaleImport flag indicates that the route was marked LLGR-stale when it was received from a peer, or by import policy.</p>
Accepted MultipathContrib	Path currently contributing to BGP multipath.
Localpref	Local preference value included in the route.
Router ID	BGP router ID as advertised by the neighbor in the open message.

Table 26: show route table Output Fields (*continued*)

Field Name	Field Description
Primary Routing Table	In a routing table group, the name of the primary routing table in which the route resides.
Secondary Tables	In a routing table group, the name of one or more secondary tables in which the route resides.

[Table 14 on page 281](#) describes all possible values for the Next-hop Types output field.

Table 27: Next-hop Types Output Field Values

Next-Hop Type	Description
Broadcast (bcast)	Broadcast next hop.
Deny	Deny next hop.
Discard	Discard next hop.
Flood	Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by point-to-multipoint RSVP, point-to-multipoint LDP, point-to-multipoint CCC, and multicast.
Hold	Next hop is waiting to be resolved into a unicast or multicast type.
Indexed (idxd)	Indexed next hop.
Indirect (indr)	Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.
Interface	Used for a network address assigned to an interface. Unlike the router next hop, the interface next hop does not reference any specific node on the network.
Local (locl)	Local address on an interface. This next-hop type causes packets with this destination address to be received locally.
Multicast (mcst)	Wire multicast next hop (limited to the LAN).
Multicast discard (mdsc)	Multicast discard.
Multicast group (mgrp)	Multicast group member.
Receive (recv)	Receive.
Reject (rjct)	Discard. An ICMP unreachable message was sent.



Table 27: Next-hop Types Output Field Values (*continued*)

Next-Hop Type	Description
Resolve (rslv)	Resolving next hop.
Routed multicast (mcrtr)	Regular multicast next hop.
Router	<p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as a next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> <li>• Must not be a direct or local subnet for the routing device.</li> <li>• Must have a next hop that is directly connected to the routing device.</li> </ul>
Table	Routing table next hop.
Unicast (ucst)	Unicast.
Unilist (ulst)	List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.

Table 15 on page 283 describes all possible values for the State output field. A route can be in more than one state (for example, <Active NoReadvrt Int Ext>).

Table 28: State Output Field Values

Value	Description
Accounting	Route needs accounting.
Active	Route is active.
Always Compare MED	Path with a lower multiple exit discriminator (MED) is available.
AS path	Shorter AS path is available.
Cisco Non-deterministic MED selection	Cisco nondeterministic MED is enabled, and a path with a lower MED is available.
Clone	Route is a clone.
Cluster list length	Length of cluster list sent by the route reflector.
Delete	Route has been deleted.
Ex	Exterior route.

Table 28: State Output Field Values (*continued*)

Value	Description
Ext	BGP route received from an external BGP neighbor.
FlashAll	Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes.
Hidden	Route not used because of routing policy.
IfCheck	Route needs forwarding RPF check.
IGP metric	Path through next hop with lower IGP metric is available.
Inactive reason	Flags for this route, which was not selected as best for a particular destination.
Initial	Route being added.
Int	Interior route.
Int Ext	BGP route received from an internal BGP peer or a BGP confederation peer.
Interior > Exterior > Exterior via Interior	Direct, static, IGP, or EBGp path is available.
Local Preference	Path with a higher local preference value is available.
Martian	Route is a martian (ignored because it is obviously invalid).
MartianOK	Route exempt from martian filtering.
Next hop address	Path with lower metric next hop is available.
No difference	Path from neighbor with lower IP address is available.
NoReadvrt	Route not to be advertised.
NotBest	Route not chosen because it does not have the lowest MED.
Not Best in its group	Incoming BGP AS is not the best of a group (only one AS can be the best).
NotInstall	Route not to be installed in the forwarding table.
Number of gateways	Path with a greater number of next hops is available.
Origin	Path with a lower origin code is available.

Table 28: State Output Field Values (*continued*)

Value	Description
Pending	Route pending because of a hold-down configured on another route.
Release	Route scheduled for release.
RIB preference	Route from a higher-numbered routing table is available.
Route Distinguisher	64-bit prefix added to IP subnets to make them unique.
Route Metric or MED comparison	Route with a lower metric or MED is available.
Route Preference	Route with lower preference value is available.
Router ID	Path through a neighbor with lower ID is available.
Secondary	Route not a primary route.
Unusable path	Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> <li>• The route is damped.</li> <li>• The route is rejected by an import policy.</li> <li>• The route is unresolved.</li> </ul>
Update source	Last tiebreaker is the lowest IP address value.

Table 16 on page 285 describes the possible values for the Communities output field.

Table 29: Communities Output Field Values

Value	Description
<i>area-number</i>	4 bytes, encoding a 32-bit area number. For AS-external routes, the value is 0. A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.
<b>bandwidth: local AS</b> <b>number:link-bandwidth-number</b>	Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute.
<b>domain-id</b>	Unique configurable number that identifies the OSPF domain.
<b>domain-id-vendor</b>	Unique configurable number that further identifies the OSPF domain.
<i>link-bandwidth-number</i>	Link-bandwidth number: from 0 through 4,294,967,295 (bytes per second).
<i>local AS number</i>	Local AS number: from 1 through 65,535.

Table 29: Communities Output Field Values (*continued*)

Value	Description
<i>options</i>	1 byte. Currently this is only used if the route type is <b>5</b> or <b>7</b> . Setting the least significant bit in the field indicates that the route carries a type 2 metric.
<i>origin</i>	(Used with VPNs) Identifies where the route came from.
<i>ospf-route-type</i>	1 byte, encoded as <b>1</b> or <b>2</b> for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); <b>3</b> for summary routes; <b>5</b> for external routes (area number must be <b>0</b> ); <b>7</b> for NSSA routes; or <b>129</b> for sham link endpoint addresses.
<i>route-type-vendor</i>	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x8000</b> . The format is <i>area-number:ospf-route-type:options</i> .
<i>rte-type</i>	Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute <b>0x0306</b> . The format is <i>area-number:ospf-route-type:options</i> .
<i>target</i>	Defines which VPN the route participates in; <b>target</b> has the format <i>32-bit IP address:16-bit number</i> . For example, 10.19.0.0:100.
<i>unknown IANA</i>	Incoming IANA codes with a value between <b>0x1</b> and <b>0x7fff</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.
<i>unknown OSPF vendor community</i>	Incoming IANA codes with a value above <b>0x8000</b> . This code of the BGP extended community attribute is accepted, but it is not recognized.

## Sample Output

### show route table bgp.l2vpn

```

user@host> show route table bgp.l2vpn
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.24.1:1:4:1/96
    *[BGP/170] 01:08:58, localpref 100, from 192.168.24.1
    AS path: I
    > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am

```

### show route table bgp.l3vpn.0

```

user@host> show route table bgp.l3vpn.0
bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.71.15:100:10.255.71.17/32
    *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
    AS path: I
    > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.15:200:10.255.71.18/32

```

```

10.255.71.15          *[BGP/170] 00:03:59, MED 1, localpref 100, from
                        AS path: I
                        > via so-2/1/0.0, Push 100021, Push 100011(top)

```

### show route table bgp.l3vpn.0 detail

```

user@host> show route table bgp.l3vpn.0 detail
bgp.l3vpn.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)

10.255.245.12:1:172.16.4.0/8 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182449
    Protocol next hop: 10.255.245.12
    Push 182449
    Indirect next hop: 863a630 297
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0.0+179
    AS path: 30 10458 14203 2914 3356 I (Atomic) Aggregator: 3356 4.68.0.11

    Communities: 2914:420 target:11111:1 origin:56:78
    VPN Label: 182449
    Localpref: 100
    Router ID: 10.255.245.12

10.255.245.12:1:4.17.225.0/24 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182465
    Protocol next hop: 10.255.245.12
    Push 182465
    Indirect next hop: 863a8f0 305
    State: <Active Int Ext>
    Local AS: 35 Peer AS: 35
    Age: 12:19 Metric2: 1
    Task: BGP_35.10.255.245.12+179
    Announcement bits (1): 0-BGP.0.0.0.0+179
  AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496 6496 I
    Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
    VPN Label: 182465
    Localpref: 100
    Router ID: 10.255.245.12

10.255.245.12:1:4.17.226.0/23 (1 entry, 1 announced)
  *BGP Preference: 170/-101
    Route Distinguisher: 10.255.245.12:1
    Source: 10.255.245.12
    Next hop: 192.168.208.66 via fe-0/0/0.0, selected
    Label operation: Push 182465
    Protocol next hop: 10.255.245.12
    Push 182465
    Indirect next hop: 86bd210 330
    State: <Active Int Ext>

```

```

Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496

6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100
Router ID: 10.255.245.12

10.255.245.12:1:4.17.251.0/24 (1 entry, 1 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.245.12:1
Source: 10.255.245.12
Next hop: 192.168.208.66 via fe-0/0/0.0, selected
Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 86bd210 330
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496

6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100

```

### show route table bgp.rtarget.0 (When Proxy BGP Route Target Filtering Is Configured)

```

user@host> show route table bgp.rtarget.0
bgp.rtarget.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

100:100:100/96
    *[RTarget/5] 00:03:14
        Type Proxy
        for 10.255.165.103
        for 10.255.166.124
        Local

```

### show route table bgp.evpn.0

```

user@host> show route table bgp.evpn.0
bgp.evpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2:100.100.100.2:100::0::00:26:88:5f:67:b0/304
    *[BGP/170] 11:00:05, localpref 100, from 100.100.100.2
        AS path: I, validation-state: unverified
        > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1
2:100.100.100.2:100::0::00:51:51:51:51:51/304
    *[BGP/170] 11:00:05, localpref 100, from 100.100.100.2
        AS path: I, validation-state: unverified
        > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1

```

```

2:100.100.100.3:100::0::00:52:52:52:52:52/304
    *[BGP/170] 10:59:58, localpref 100, from 100.100.100.3
    AS path: I, validation-state: unverified
    > to 100.64.13.3 via ge-2/0/8.0, label-switched-path R0toR2
2:100.100.100.3:100::0::a8:d0:e5:5b:01:c8/304
    *[BGP/170] 10:59:58, localpref 100, from 100.100.100.3
    AS path: I, validation-state: unverified
    > to 100.64.13.3 via ge-2/0/8.0, label-switched-path R0toR2
3:100.100.100.2:100::1000::100.100.100.2/304
    *[BGP/170] 11:00:16, localpref 100, from 100.100.100.2
    AS path: I, validation-state: unverified
    > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1
3:100.100.100.2:100::2000::100.100.100.2/304
    *[BGP/170] 11:00:16, localpref 100, from 100.100.100.2
    AS path: I, validation-state: unverified
    > to 100.64.12.2 via xe-2/2/0.0, label-switched-path R0toR1

```

### show route table evpna.evpn.0

```

user@host> show route table evpna.evpn.0
evpna.evpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

3:100.100.100.10:100::0::10::100.100.100.10/384
    *[EVPN/170] 01:37:09
    Indirect
3:100.100.100.2:100::2000::100.100.100.2/304
    *[EVPN/170] 01:37:12
    Indirect

```

### show route table inet.0

```

user@host> show route table inet.0
inet.0: 12 destinations, 12 routes (11 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0      *[Static/5] 00:51:57
                > to 172.16.5.254 via fxp0.0
10.0.0.1/32    *[Direct/0] 00:51:58
                > via at-5/3/0.0
10.0.0.2/32    *[Local/0] 00:51:58
                Local
10.12.12.21/32 *[Local/0] 00:51:57
                Reject
10.13.13.13/32 *[Direct/0] 00:51:58
                > via t3-5/2/1.0
10.13.13.14/32 *[Local/0] 00:51:58
                Local
10.13.13.21/32 *[Local/0] 00:51:58
                Local
10.13.13.22/32 *[Direct/0] 00:33:59
                > via t3-5/2/0.0
127.0.0.1/32   [Direct/0] 00:51:58
                > via lo0.0
10.222.5.0/24  *[Direct/0] 00:51:58
                > via fxp0.0
10.222.5.81/32 *[Local/0] 00:51:58
                Local

```

### show route table inet.3

```

user@host> show route table inet.3
inet.3: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.5/32      *[LDP/9] 00:25:43, metric 10, tag 200
                  to 10.2.94.2 via lt-1/2/0.49
                  > to 10.2.3.2 via lt-1/2/0.23

```

### show route table inet.3 protocol ospf

```

user@host> show route table inet.3 protocol ospf
inet.3: 9 destinations, 18 routes (9 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.20/32      [L-OSPF/10] 1d 00:00:56, metric 2
                  > to 10.0.10.70 via lt-1/2/0.14, Push 800020
                  to 10.0.6.60 via lt-1/2/0.12, Push 800020, Push 800030(top)
1.1.1.30/32      [L-OSPF/10] 1d 00:01:01, metric 3
                  > to 10.0.10.70 via lt-1/2/0.14, Push 800030
                  to 10.0.6.60 via lt-1/2/0.12, Push 800030
1.1.1.40/32      [L-OSPF/10] 1d 00:01:01, metric 4
                  > to 10.0.10.70 via lt-1/2/0.14, Push 800040
                  to 10.0.6.60 via lt-1/2/0.12, Push 800040
1.1.1.50/32      [L-OSPF/10] 1d 00:01:01, metric 5
                  > to 10.0.10.70 via lt-1/2/0.14, Push 800050
                  to 10.0.6.60 via lt-1/2/0.12, Push 800050
1.1.1.60/32      [L-OSPF/10] 1d 00:01:01, metric 6
                  > to 10.0.10.70 via lt-1/2/0.14, Push 800060
                  to 10.0.6.60 via lt-1/2/0.12, Pop

```

### show route table inet6.0

```

user@host> show route table inet6.0
inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Route, * = Both

fec0:0:0:3::/64 *[Direct/0] 00:01:34
>via fe-0/1/0.0

fec0:0:0:3::/128 *[Local/0] 00:01:34
>Local

fec0:0:0:4::/64 *[Static/5] 00:01:34
>to fec0:0:0:3::ffff via fe-0/1/0.0

```

### show route table inet6.3

```

user@router> show route table inet6.3
inet6.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::10.255.245.195/128
                  *[LDP/9] 00:00:22, metric 1
                  > via so-1/0/0.0
::10.255.245.196/128
                  *[LDP/9] 00:00:08, metric 1
                  > via so-1/0/0.0, Push 100008

```



**show route table inetflow detail**

```

user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
    *BGP    Preference: 170/-101
            Next-hop reference count: 2
            State: <Active Ext>
            Local AS: 64502 Peer AS: 64500
            Age: 4
            Task: BGP_64500.10.12.99.5+3792
            Announcement bits (1): 0-Flow
            AS path: 64500 I
            Communities: traffic-rate:0:0
            Validation state: Accept, Originator: 10.12.99.5
            Via: 10.12.44.0/24, Active
            Localpref: 100
            Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
    *Flow    Preference: 5
            Next-hop reference count: 2
            State: <Active>
            Local AS: 64502
            Age: 6:30
            Task: RT Flow
            Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179
            AS path: I
            Communities: 1:1

```

**show route table lsdist.0 extensive**

```

user@host> show route table lsdist.0 extensive
lsdist.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
NODE { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 ISIS-L1:0 }/1152
(1 entry, 1 announced)
TSI:
Page 0 idx 0, (group ibgp type Internal) Type 1 val 0xa62f378 (adv_entry)
  Advertised metrics:
    Nexthop: Self
    Localpref: 100
    AS path: [4170512532] I
    Communities:
Path NODE { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 ISIS-L1:0 }
Vector len 4. Val: 0
    *IS-IS  Preference: 15
            Level: 1
            Next hop type: Fictitious, Next hop index: 0
            Address: 0x95dfc64
            Next-hop reference count: 9
            State: <Active NotInstall>
            Local AS: 4170512532
            Age: 6:05
            Validation State: unverified
            Task: IS-IS
            Announcement bits (1): 0-BGP_RT_Background
            AS path: I
            IPv4 Router-ids:
                128.220.11.197
            Area membership:

```

```

47 00 05 80 ff f8 00 00 00 01 08 00 01
SPRING-Capabilities: - SRGB block [Start: 800000,
Range: 256, Flags: 0xc0]
SPRING-Algorithms:
- Algo: 0
LINK { Local { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 }.{
IPv4:8.65.1.105 } Remote { AS:4170512532 BGP-LS ID:4170512532 ISO:4284.3300.5067)
TSI:
Page 0 idx 0, (group ibgp type Internal) Type 1 val 0xa62f3cc (adv_entry)
Advertised metrics:
Nexthop: Self
Localpref: 100
AS path: [4170512532] I
Communities:
Path LINK { Local { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 }.{
IPv4:8.65.1.105 } Remote { AS:4170512532 BGP-LS ID:4170512532 ISO:4284.33000
*IS-IS Preference: 15
Level: 1
Next hop type: Fictitious, Next hop index: 0
Address: 0x95dfc64
Next-hop reference count: 9
State: <Active NotInstall>
Local AS: 4170512532
Age: 6:05
Validation State: unverified
Task: IS-IS
Announcement bits (1): 0-BGP_RT_Background
AS path: I
Color: 32768
Maximum bandwidth: 1000Mbps
Reservable bandwidth: 1000Mbps
Unreserved bandwidth by priority:
0 1000Mbps
1 1000Mbps
2 1000Mbps
3 1000Mbps
4 1000Mbps
5 1000Mbps
6 1000Mbps
7 1000Mbps
Metric: 10
TE Metric: 10
LAN IPV4 Adj-SID - Label: 299776, Flags: 0x30,
Weight: 0, Nbr: 10.220.1.83

PREFIX { Node { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 } {
IPv4:128.220.11.197/32 } ISIS-L1:0 }/1152 (1 entry, 1 announced) TSI: Page 0 idx
0, (group ibgp type Internal) Type 1 val 0xa62f43c (adv_entry)
Advertised metrics:
Nexthop: Self
Localpref: 100
AS path: [4170512532] I
Communities:
Path PREFIX { Node { AS:4170512532 BGP-LS ID:4170512532 ISO:3245.3412.3456.00 }
{ IPv4:128.220.11.197/32 } ISIS-L1:0 } Vector len 4. Val: 0
*IS-IS Preference: 15
Level: 1
Next hop type: Fictitious, Next hop index: 0
Address: 0x95dfc64
Next-hop reference count: 9
State:<Active NotInstall>

```

```

Local AS: 4170512532
Age: 6:05
Validation State: unverified
Task: IS-IS
Announcement bits (1): 0-BGP_RT_Background
AS path: I
Prefix SID: 67, Flags: 0x40, Algo: 0

```

### show route table l2circuit.0

```

user@host> show route table l2circuit.0
l2circuit.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.195:NoCtrlWord:1:1:Local/96
    *[L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    > via so-0/1/3.0, Push 100049
10.1.1.195:NoCtrlWord:1:1:Remote/96
    *[LDP/9] 00:50:14
    Discard
10.1.1.195:CtrlWord:1:2:Local/96
    *[L2CKT/7] 00:50:47
    > via so-0/1/2.0, Push 100049
    > via so-0/1/3.0, Push 100049
10.1.1.195:CtrlWord:1:2:Remote/96
    *[LDP/9] 00:50:14
    Discard

```

### show route table mpls

```

user@host> show route table mpls
mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          *[MPLS/0] 00:13:55, metric 1
            Receive
1          *[MPLS/0] 00:13:55, metric 1
            Receive
2          *[MPLS/0] 00:13:55, metric 1
            Receive
1024       *[VPN/0] 00:04:18
            to table red.inet.0, Pop

```

### show route table mpls extensive

```

user@host> show route table mpls extensive
100000 (1 entry, 1 announced)
TSI:
KRT in-kernel 100000 /36 -> {so-1/0/0.0}
    *LDP Preference: 9
    Next hop: via so-1/0/0.0, selected
    Pop
    State: <Active Int>
    Age: 29:50 Metric: 1
    Task: LDP
    Announcement bits (1): 0-KRT
    AS path: I
    Prefixes bound to route: 10.0.0.194/32

```

## show route table mpls.0

```

user@host> show route table mpls.0
mpls.0: 18 destinations, 19 routes (18 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0                *[MPLS/0] 11:39:56, metric 1
                  to table inet.0
0(S=0)           *[MPLS/0] 11:39:56, metric 1
                  to table mpls.0
1                *[MPLS/0] 11:39:56, metric 1
                  Receive
2                *[MPLS/0] 11:39:56, metric 1
                  to table inet6.0
2(S=0)           *[MPLS/0] 11:39:56, metric 1
                  to table mpls.0
13               *[MPLS/0] 11:39:56, metric 1
                  Receive
303168           *[EVPN/7] 11:00:49, routing-instance pbbn10, route-type
Ingress-MAC, ISID 0
                  to table pbbn10.evpn-mac.0
303184           *[EVPN/7] 11:00:53, routing-instance pbbn10, route-type
Ingress-IM, ISID 1000
                  to table pbbn10.evpn-mac.0
                  [EVPN/7] 11:00:53, routing-instance pbbn10, route-type
Ingress-IM, ISID 2000
                  to table pbbn10.evpn-mac.0
303264           *[EVPN/7] 11:00:53, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-IM, ISID 1000
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303280           *[EVPN/7] 11:00:53, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-IM, ISID 2000
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303328           *[EVPN/7] 11:00:49, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303344           *[EVPN/7] 11:00:49, remote-pe 100.100.100.2, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303360           *[EVPN/7] 11:00:47, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:26:88:5f:67:b0
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303376           *[EVPN/7] 11:00:47, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:51:51:51:51:51
                  > to 100.1.12.2 via xe-2/2/0.0, label-switched-path R0toR1
303392           *[EVPN/7] 11:00:35, remote-pe 100.100.100.3, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303408           *[EVPN/7] 11:00:35, remote-pe 100.100.100.3, routing-instance
pbbn10, route-type Egress-MAC, ISID 0
                  > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303424           *[EVPN/7] 11:00:33, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC a8:d0:e5:5b:01:c8
                  > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2
303440           *[EVPN/7] 11:00:33, routing-instance pbbn10, route-type
Egress-MAC, ISID 0, BMAC 00:52:52:52:52:52
                  > to 100.1.13.3 via ge-2/0/8.0, label-switched-path R0toR2

```

**show route table mpls.0 detail (PTX Series)**

```

user@host> show route table mpls.0 detail
ge-0/0/2.600 (1 entry, 1 announced)
  *L2VPN Preference: 7
    Next hop type: Indirect
    Address: 0x9438f34
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 567
    Next hop: 10.0.0.1 via ge-0/0/1.0, selected
    Label operation: Push 299808
    Label TTL action: prop-ttl
    Load balance label: Label 299808:None;
    Session Id: 0x1
    Protocol next hop: 10.255.255.1
    Label operation: Push 299872 Offset: 252
    Label TTL action: no-prop-ttl
    Load balance label: Label 299872:Flow label PUSH;
    Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
    Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
    State: <Active Int>
    Age: 21 Metric2: 1
    Validation State: unverified
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 2-Common L2 VC
    AS path: I

```

**show route table mpls.0 ccc ge-0/0/1.1004 detail**

```

user@host> show route table mpls.0 ccc ge-0/0/1.1004 detail
mpls.0: 121 destinations, 121 routes (121 active, 0 holddown, 0 hidden)
ge-0/0/1.1004 (1 entry, 1 announced)
  *EVPN Preference: 7
    Next hop type: List, Next hop index: 1048577
    Address: 0xdc14770
    Next-hop reference count: 3
    Next hop: ELNH Address 0xd011e30
      Next hop type: Indirect, Next hop index: 0
      Address: 0xd011e30
      Next-hop reference count: 3
      Protocol next hop: 100.100.100.1
      Label operation: Push 301952
      Composite next hop: 0xd011dc0 754 INH Session ID: 0x146
      Indirect next hop: 0xb69a890 1048615 INH Session ID: 0x146
        Next hop type: Router, Next hop index: 735
        Address: 0xd00e530
        Next-hop reference count: 23
        Next hop: 100.46.1.2 via ge-0/0/5.0
        Label-switched-path pe4_to_pe1
        Label operation: Push 300320
        Label TTL action: prop-ttl
        Load balance label: Label 300320: None;
        Label element ptr: 0xd00e580
        Label parent element ptr: 0x0
        Label element references: 18
        Label element child references: 16
        Label element lsp id: 5
      Next hop: ELNH Address 0xd012070
        Next hop type: Indirect, Next hop index: 0
        Address: 0xd012070

```

```

Next-hop reference count: 3
Protocol next hop: 100.100.100.2
Label operation: Push 301888
Composite next hop: 0xd012000 755 INH Session ID: 0x143
Indirect next hop: 0xb69a9a0 1048641 INH Session ID: 0x143
  Next hop type: Router, Next hop index: 716
  Address: 0xd00e710
  Next-hop reference count: 23
  Next hop: 100.46.1.2 via ge-0/0/5.0
  Label-switched-path pe4_to_pe2
  Label operation: Push 300304
  Label TTL action: prop-ttl
  Load balance label: Label 300304: None;
  Label element ptr: 0xd00e760
  Label parent element ptr: 0x0
  Label element references: 15
  Label element child references: 13
  Label element lsp id: 6
Next hop: ELNH Address 0xd0121f0, selected
Next hop type: Indirect, Next hop index: 0
Address: 0xd0121f0
Next-hop reference count: 3
Protocol next hop: 100.100.100.3
Label operation: Push 301984
Composite next hop: 0xd012180 756 INH Session ID: 0x145
Indirect next hop: 0xb69aab0 1048642 INH Session ID: 0x145
  Next hop type: Router, Next hop index: 801
  Address: 0xd010ed0
  Next-hop reference count: 32
  Next hop: 100.46.1.2 via ge-0/0/5.0
  Label-switched-path pe4_to_pe3
  Label operation: Push 300336
  Label TTL action: prop-ttl
  Load balance label: Label 300336: None;
  Label element ptr: 0xd0108c0
  Label parent element ptr: 0x0
  Label element references: 22
  Label element child references: 20
  Label element lsp id: 7
State: < Active Int >
Age: 2:06:50
Validation State: unverified
Task: evpn global task
Announcement bits (1): 1-KRT
AS path: I

```

### show route table mpls.0 protocol evpn

```

user@host>show route table mpls.0 protocol evpn
mpls.0: 121 destinations, 121 routes (121 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

299872          *[EVPN/7] 02:30:58, routing-instance mhevpn, route-type
Ingress-IM, vlan-id 10
                  to table mhevpn.evpn-mac.0
300016          *[EVPN/7] 02:30:38, routing-instance VS-1, route-type
Ingress-IM, vlan-id 110
                  to table VS-1.evpn-mac.0
300032          *[EVPN/7] 02:30:38, routing-instance VS-1, route-type
Ingress-IM, vlan-id 120
                  to table VS-1.evpn-mac.0

```

```

300048          *[EVPN/7] 02:30:38, routing-instance VS-1, route-type
Ingress-IM, vlan-id 130
                to table VS-1.evpn-mac.0
300064          *[EVPN/7] 02:30:38, routing-instance VS-2, route-type
Ingress-IM, vlan-id 210
                to table VS-2.evpn-mac.0
300080          *[EVPN/7] 02:30:38, routing-instance VS-2, route-type
Ingress-IM, vlan-id 220
                to table VS-2.evpn-mac.0
300096          *[EVPN/7] 02:30:38, routing-instance VS-2, route-type
Ingress-IM, vlan-id 230
                to table VS-2.evpn-mac.0
300112          *[EVPN/7] 02:27:06, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:44:44:44:44:44:44:44:44
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300128          *[EVPN/7] 02:29:22, routing-instance mhevpn, route-type
Ingress-Aliasing
                to table mhevpn.evpn-mac.0
300144          *[EVPN/7] 02:27:06, routing-instance VS-1, route-type
Egress-MAC, ESI 00:44:44:44:44:44:44:44:44
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300160          *[EVPN/7] 02:29:22, routing-instance VS-1, route-type
Ingress-Aliasing
                to table VS-1.evpn-mac.0
300176          *[EVPN/7] 02:27:07, routing-instance VS-2, route-type
Egress-MAC, ESI 00:44:44:44:44:44:44:44:44
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300192          *[EVPN/7] 02:29:22, routing-instance VS-2, route-type
Ingress-Aliasing
                to table VS-2.evpn-mac.0
300208          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-IM, vlan-id 120
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300224          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
mhevpn, route-type Egress-IM, vlan-id 10
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300240          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-IM, vlan-id 110
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300256          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-IM, vlan-id 130
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300272          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-IM, vlan-id 210
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300288          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-IM, vlan-id 220
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300304          *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-IM, vlan-id 230
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300320          *[EVPN/7] 02:27:06, routing-instance VS-1, route-type
Egress-MAC, ESI 00:11:11:11:11:11:11:11:11
                to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
                to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
                > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300336          *[EVPN/7] 02:27:06, routing-instance VS-1, route-type
Egress-MAC, ESI 00:33:33:33:33:33:33:33:33
                to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

```

```

> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300368 * [EVPN/7] 02:27:07, routing-instance VS-2, route-type
Egress-MAC, ESI 00:33:33:33:33:33:33:33
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300384 * [EVPN/7] 02:27:07, routing-instance VS-2, route-type
Egress-MAC, ESI 00:11:11:11:11:11:11:11
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300416 * [EVPN/7] 02:27:06, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:33:33:33:33:33:33:33
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300432 * [EVPN/7] 02:27:06, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:11:11:11:11:11:11:11
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
300480 * [EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300496 * [EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300560 * [EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300592 * [EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
300608 * [EVPN/7] 02:29:23
> via ge-0/0/1.1001, Pop
300624 * [EVPN/7] 02:29:23
> via ge-0/0/1.2001, Pop
301232 * [EVPN/7] 02:29:17
> via ge-0/0/1.1002, Pop
301296 * [EVPN/7] 02:29:10
> via ge-0/0/1.1003, Pop
301312 * [EVPN/7] 02:27:06
> via ae10.2003, Pop
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301360 * [EVPN/7] 02:29:01
> via ge-0/0/1.1004, Pop
301408 * [EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
vpws1004, route-type Egress, vlan-id 2004
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301456 * [EVPN/7] 02:27:06
> via ae10.1010, Pop
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301552 * [EVPN/7] 02:27:07, routing-instance VS-1, route-type
Egress-MAC, ESI 00:22:22:22:22:22:22:22
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301568 * [EVPN/7] 02:27:07, routing-instance VS-2, route-type

```



```

Egress-MAC, ESI 00:22:22:22:22:22:22:22:22
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301648    *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
vpws1010, route-type Egress, vlan-id 2010
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301664    *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
mhevpn, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301680    *[EVPN/7] 02:27:07, remote-pe 100.100.100.2, routing-instance
mhevpn, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
301696    *[EVPN/7] 02:27:07, routing-instance mhevpn, route-type
Egress-MAC, ESI 00:22:22:22:22:22:22:22:22
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301712    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301728    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301744    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-IM, vlan-id 230
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301760    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
vpws1010, route-type Egress, vlan-id 2010
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301776    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-MAC
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301792    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-IM, vlan-id 130
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301808    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
vpws1004, route-type Egress, vlan-id 2004
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301824    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-IM, vlan-id 10
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301840    *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1002, route-type Egress, vlan-id 2002
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301856    *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1003, route-type Egress, vlan-id 2003
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301872    *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1003, route-type Egress Protection, vlan-id 2003
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301888    *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
vpws1010, route-type Egress Protection, vlan-id 1010
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301904    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-IM, vlan-id 220
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301920    *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-IM, vlan-id 210
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
301936    *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-IM, vlan-id 230
    > to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301952    *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-SH, vlan-id 230

```

```
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301968      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-IM, vlan-id 220
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
301984      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-SH, vlan-id 220
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302000      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-IM, vlan-id 210
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302016      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-SH, vlan-id 210
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302032      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302048      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302064      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302080      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-2, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302096      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302112      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302128      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302144      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302160      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-IM, vlan-id 120
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302176      *[EVPN/7] 02:27:07, remote-pe 100.100.100.1, routing-instance
VS-1, route-type Egress-IM, vlan-id 110
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302192      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-IM, vlan-id 130
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302208      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-SH, vlan-id 130
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302224      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-IM, vlan-id 120
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302240      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-SH, vlan-id 120
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302256      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-IM, vlan-id 110
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302272      *[EVPN/7] 02:27:07, remote-pe 100.100.100.3, routing-instance
VS-1, route-type Egress-SH, vlan-id 110
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
```

```

302288          *[EVPN/7] 02:27:06, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302304          *[EVPN/7] 02:27:06, remote-pe 100.100.100.1, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302320          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302336          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-MAC
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302352          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
vpws1004, route-type Egress, vlan-id 2004
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302368          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-IM, vlan-id 10
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302384          *[EVPN/7] 02:27:06, remote-pe 100.100.100.3, routing-instance
mhevpn, route-type Egress-SH, vlan-id 10
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302400          *[EVPN/7] 02:26:21
> via ge-0/0/1.3001, Pop
302432          *[EVPN/7] 02:26:21, remote-pe 100.100.100.3, routing-instance
vpws3001, route-type Egress, vlan-id 40000
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302448          *[EVPN/7] 02:26:21, remote-pe 100.100.100.1, routing-instance
vpws3001, route-type Egress, vlan-id 40000
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302464          *[EVPN/7] 02:26:20, remote-pe 100.100.100.2, routing-instance
vpws3001, route-type Egress, vlan-id 40000
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302480          *[EVPN/7] 02:26:14
> via ge-0/0/1.3016, Pop
302512          *[EVPN/7] 02:26:14, remote-pe 100.100.100.1, routing-instance
vpws3016, route-type Egress, vlan-id 40016
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302528          *[EVPN/7] 02:26:14, remote-pe 100.100.100.2, routing-instance
vpws3016, route-type Egress, vlan-id 40016
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302560          *[EVPN/7] 02:26:06
> via ae10.3011, Pop
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302592          *[EVPN/7] 02:26:07, remote-pe 100.100.100.1, routing-instance
vpws3011, route-type Egress, vlan-id 401100
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
302608          *[EVPN/7] 02:26:07, remote-pe 100.100.100.2, routing-instance
vpws3011, route-type Egress, vlan-id 401100
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302624          *[EVPN/7] 02:26:07, remote-pe 100.100.100.3, routing-instance
vpws3011, route-type Egress Protection, vlan-id 301100
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302656          *[EVPN/7] 02:25:59
> via ae10.3006, Pop
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302688          *[EVPN/7] 02:26:00, remote-pe 100.100.100.2, routing-instance
vpws3006, route-type Egress, vlan-id 400600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2
302704          *[EVPN/7] 02:26:00, remote-pe 100.100.100.1, routing-instance
vpws3006, route-type Egress, vlan-id 400600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

```

```

302720          *[EVPN/7] 02:25:59, remote-pe 100.100.100.3, routing-instance
vpws3006, route-type Egress, vlan-id 400600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
302736          *[EVPN/7] 02:25:59, remote-pe 100.100.100.3, routing-instance
vpws3006, route-type Egress Protection, vlan-id 300600
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ge-0/0/1.1001   *[EVPN/7] 02:29:23
> via ge-0/0/1.2001
ge-0/0/1.2001   *[EVPN/7] 02:29:23
> via ge-0/0/1.1001
ge-0/0/1.1002   *[EVPN/7] 02:27:06
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ae10.2003       *[EVPN/7] 02:29:10
> via ge-0/0/1.1003
ge-0/0/1.1003   *[EVPN/7] 02:27:06
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3

> via ae10.2003
ge-0/0/1.1004   *[EVPN/7] 02:27:06
to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ae10.1010       *[EVPN/7] 02:27:06
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
ge-0/0/1.3001   *[EVPN/7] 02:26:20
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3
ge-0/0/1.3016   *[EVPN/7] 02:26:13
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
ae10.3011       *[EVPN/7] 02:26:06
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1
ae10.3006       *[EVPN/7] 02:25:59
> to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe1

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe2

to 100.46.1.2 via ge-0/0/5.0, label-switched-path pe4_to_pe3

```

### show route table mpls.0 protocol ospf

```

user@host> show route table mpls.0 protocol ospf
mpls.0: 29 destinations, 29 routes (29 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

299952          *[L-OSPF/10] 23:59:42, metric 0
> to 10.0.10.70 via lt-1/2/0.14, Pop
to 10.0.6.60 via lt-1/2/0.12, Swap 800070, Push 800030(top)
299952(S=0)     *[L-OSPF/10] 23:59:42, metric 0
> to 10.0.10.70 via lt-1/2/0.14, Pop
to 10.0.6.60 via lt-1/2/0.12, Swap 800070, Push 800030(top)
299968          *[L-OSPF/10] 23:59:48, metric 0
> to 10.0.6.60 via lt-1/2/0.12, Pop

```

**show route table mpls.0 extensive (PTX Series)**

```

user@host> show route table mpls.0 extensive
ge-0/0/2.600 (1 entry, 1 announced)
TSI:
KRT in-kernel ge-0/0/2.600.0      /32 -> {composite(570)}
  *L2VPN Preference: 7
    Next hop type: Indirect
    Address: 0x9438f34
    Next-hop reference count: 2
    Next hop type: Router, Next hop index: 567
    Next hop: 10.0.0.1 via ge-0/0/1.0, selected
    Label operation: Push 299808
    Label TTL action: prop-ttl
    Load balance label: Label 299808:None;
    Session Id: 0x1
    Protocol next hop: 10.255.255.1
    Label operation: Push 299872 Offset: 252
    Label TTL action: no-prop-ttl
    Load balance label: Label 299872:Flow label PUSH;
    Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
    Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
    State: <Active Int>
    Age: 47      Metric2: 1
    Validation State: unverified
    Task: Common L2 VC
    Announcement bits (2): 0-KRT 2-Common L2 VC
    AS path: I
    Composite next hops: 1
      Protocol next hop: 10.255.255.1 Metric: 1
      Label operation: Push 299872 Offset: 252
      Label TTL action: no-prop-ttl
      Load balance label: Label 299872:Flow label PUSH;
      Composite next hop: 0x9438ed8 570 INH Session ID: 0x2
      Indirect next hop: 0x9448208 262142 INH Session ID: 0x2
      Indirect path forwarding next hops: 1
        Next hop type: Router
        Next hop: 10.0.0.1 via ge-0/0/1.0
        Session Id: 0x1
      10.255.255.1/32 Originating RIB: inet.3
        Metric: 1      Node path count: 1
        Forwarding nexthops: 1
        Nexthop: 10.0.0.1 via ge-0/0/1.0

```

**show route table mpls.0 (RSVP Route—Transit LSP)**

```

user@host> show route table mpls.0

mpls.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0          * [MPLS/0] 00:37:31, metric 1
            Receive
1          * [MPLS/0] 00:37:31, metric 1
            Receive
2          * [MPLS/0] 00:37:31, metric 1
            Receive
13         * [MPLS/0] 00:37:31, metric 1
            Receive
300352     * [RSVP/7/1] 00:08:00, metric 1

```

```

300352(S=0)      > to 10.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
                  *[RSVP/7/1] 00:08:00, metric 1
300384           > to 10.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
                  *[RSVP/7/2] 00:05:20, metric 1
                  > to 10.64.1.106 via ge-1/0/0.0, Pop
300384(S=0)      *[RSVP/7/2] 00:05:20, metric 1
                  > to 10.64.1.106 via ge-1/0/0.0, Pop

```

### show route table vpls\_1 detail

```

user@host> show route table vpls_1 detail
vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

172.16.1.11:1000:1:1/96 (1 entry, 1 announced)
*L2VPN Preference: 170/-1
Receive table: vpls_1.l2vpn.0
Next-hop reference count: 2
State: <Active Int Ext>
Age: 4:29:47 Metric2: 1
Task: vpls_1-l2vpn
Announcement bits (1): 1-BGP.0.0.0+179
AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:Site-Down
Label-base: 800000, range: 8, status-vector: 0xFF

```

### show route table vpn-a

```

user@host> show route table vpn-a
vpn-a.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

+ = Active Route, - = Last Active, * = Both
192.168.16.1:1:1/96
    *[VPN/7] 05:48:27
        Discard
192.168.24.1:1:2:1/96
    *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
        AS path: I
        > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
192.168.24.1:1:3:1/96
    *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
        AS path: I
        > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am

```

### show route table vpn-a.mdt.0

```

user@host> show route table vpn-a.mdt.0
vpn-a.mdt.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:1:0:10.255.14.216:232.1.1.1/144
    *[MVPN/70] 01:23:05, metric2 1
        Indirect
1:1:1:10.255.14.218:232.1.1.1/144
    *[BGP/170] 00:57:49, localpref 100, from 10.255.14.218
        AS path: I
        > via so-0/0/0.0, label-switched-path r0e-to-r1
1:1:2:10.255.14.217:232.1.1.1/144
    *[BGP/170] 00:57:49, localpref 100, from 10.255.14.217

```

```

AS path: I
> via so-0/0/1.0, label-switched-path r0-to-r2

```

### show route table VPN-A detail

```

user@host> show route table VPN-A detail
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
    *BGP      Preference: 170/-101
                Route Distinguisher: 10.255.179.13:200
                Next hop type: Indirect
                Next-hop reference count: 5
                Source: 10.255.179.13
                Next hop type: Router, Next hop index: 732
                Next hop: 10.39.1.14 via fe-0/3/0.0, selected
                Label operation: Push 299824, Push 299824(top)
                Protocol next hop: 10.255.179.13
                Push 299824
                Indirect next hop: 8f275a0 1048574
                State: (Secondary Active Int Ext)
                Local AS: 1 Peer AS: 1
                Age: 3:41:06 Metric: 1 Metric2: 1
                Task: BGP_1.10.255.179.13+64309
                Announcement bits (2): 0-KRT 1-BGP RT Background
                AS path: I
                Communities: target:1:200 rte-type:0.0.0.0:1:0
                Import Accepted
                VPN Label: 299824 TTL Action: vrf-ttl-propagate
                Localpref: 100
                Router ID: 10.255.179.13
                Primary Routing Table bgp.13vpn.0

```

### show route table VPN-AB.inet.0

```

user@host> show route table VPN-AB.inet.0
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.0/30      *[OSPF/10] 00:07:24, metric 1
> via so-7/3/1.0
10.39.1.4/30      *[Direct/0] 00:08:42
> via so-5/1/0.0
10.39.1.6/32      *[Local/0] 00:08:46
Local
10.255.71.16/32   *[Static/5] 00:07:24
> via so-2/0/0.0
10.255.71.17/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
AS path: I
> via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.18/32   *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
AS path: I
> via so-2/1/0.0, Push 100021, Push 100011(top)
10.255.245.245/32 *[BGP/170] 00:08:35, localpref 100
AS path: 2 I
> to 10.39.1.5 via so-5/1/0.0
10.255.245.246/32 *[OSPF/10] 00:07:24, metric 1
> via so-7/3/1.0

```

**show route table VPN\_blue.mvpn-inet6.0**

```

user@host> show route table VPN_blue.mvpn-inet6.0
vpn_blue.mvpn-inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:10.255.2.202:65536:10.255.2.202/432
    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
    AS path: I
    > via so-0/1/3.0
1:10.255.2.203:65536:10.255.2.203/432
    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.203
    AS path: I
    > via so-0/1/0.0
1:10.255.2.204:65536:10.255.2.204/432
    *[MVPN/70] 00:57:23, metric2 1
    Indirect
5:10.255.2.202:65536:128:::192.168.90.2:128:ffff::1/432
    *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
    AS path: I
    > via so-0/1/3.0
6:10.255.2.203:65536:64500:128:::10.12.53.12:128:ffff::1/432
    *[PIM/105] 00:02:37
    Multicast (IPv6)
7:10.255.2.202:65536:64500:128:::192.168.90.2:128:ffff::1/432
    *[MVPN/70] 00:02:37, metric2 1
    Indirect

```

**show route table vrf1.mvpn.0 extensive**

```

user@host> show route table vrf1.mvpn.0 extensive
1:10.255.50.77:1:10.255.50.77/240 (1 entry, 1 announced)
    *MVPN Preference: 70
    PMSI: Flags 0x0: Label 0: RSVP-TE:
Session_13[10.255.50.77:0:25624:10.255.50.77]
    Next hop type: Indirect
    Address: 0xbb2c944
    Next-hop reference count: 360
    Protocol next hop: 10.255.50.77
    Indirect next hop: 0x0 - INH Session ID: 0x0
    State: <Active Int Ext>
    Age: 53:03 Metric2: 1
    Validation State: unverified
    Task: mvpn global task
    Announcement bits (3): 0-PIM.vrf1 1-mvpn global task 2-rt-export

    AS path: I

```

**show route table inetflow detail**

```

user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
    *BGP Preference: 170/-101
    Next-hop reference count: 2
    State: <Active Ext>
    Local AS: 64502 Peer AS: 64500
    Age: 4
    Task: BGP_64500.10.12.99.5+3792
    Announcement bits (1): 0-Flow

```



```

AS path: 64500 I
Communities: traffic-rate:0:0
Validation state: Accept, Originator: 10.12.99.5
Via: 10.12.44.0/24, Active
Localpref: 100
Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
  *Flow Preference: 5
    Next-hop reference count: 2
    State: <Active>
    Local AS: 64502
    Age: 6:30
    Task: RT Flow
    Announcement bits (2): 0-Flow 1-BGP.0.0.0+179
    AS path: I
    Communities: 1:1

user@host> show route table green.l2vpn.0 (VPLS Multihoming with FEC 129)
green.l2vpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.2:100:10.1.1.2/96 AD
    *[VPLS/170] 1d 03:11:03, metric2 1
    Indirect
10.1.1.4:100:10.1.1.4/96 AD
    *[BGP/170] 1d 03:11:02, localpref 100, from 10.1.1.4
    AS path: I, validation-state: unverified
    > via ge-1/2/1.5
10.1.1.2:100:1:0/96 MH
    *[VPLS/170] 1d 03:11:03, metric2 1
    Indirect
10.1.1.4:100:1:0/96 MH
    *[BGP/170] 1d 03:11:02, localpref 100, from 10.1.1.4
    AS path: I, validation-state: unverified
    > via ge-1/2/1.5
10.1.1.4:NoCtrlWord:5:100:100:10.1.1.2:10.1.1.4/176
    *[VPLS/7] 1d 03:11:02, metric2 1
    > via ge-1/2/1.5
10.1.1.4:NoCtrlWord:5:100:100:10.1.1.4:10.1.1.2/176
    *[LDP/9] 1d 03:11:02
    Discard

user@host> show route table red extensive
red.inet.0: 364481 destinations, 714087 routes (364480 active, 48448 holddown, 1
hidden)
10.0.0.0/32 (3 entries, 1 announced)
    State: <OnList CalcForwarding>
TSI:
KRT in-kernel 10.0.0.0/32 -> {composite(1048575)} Page 0 idx 1 Type 1 val 0x934342c

    Nexthop: Self
    AS path: [2] I
    Communities: target:2:1
Path 10.0.0.0 from 10.3.0.0 Vector len 4. Val: 1
  @BGP Preference: 170/-1
    Route Distinguisher: 2:1
    Next hop type: Indirect
    Address: 0x258059e4
    Next-hop reference count: 2

```

```

Source: 2.2.0.0
Next hop type: Router
Next hop: 10.1.1.1 via ge-1/1/9.0, selected
Label operation: Push 707633
Label TTL action: prop-ttl
Session Id: 0x17d8
Protocol next hop: 10.2.0.0
Push 16
Composite next hop: 0x25805988 - INH Session ID: 0x193c
Indirect next hop: 0x23eea900 - INH Session ID: 0x193c
State: <Secondary Active Int Ext ProtectionPath ProtectionCand>
Local AS:      2 Peer AS:      2
Age: 23        Metric2: 35
Validation State: unverified
Task: BGP_172.16.2.0.0+34549
AS path: I
Communities: target:2:1
Import Accepted
VPN Label: 16
Localpref: 0
Router ID: 10.2.0.0
Primary Routing Table bgp.13vpn.0
Composite next hops: 1
  Protocol next hop: 10.2.0.0 Metric: 35
  Push 16
  Composite next hop: 0x25805988 - INH Session ID: 0x193c
  Indirect next hop: 0x23eea900 - INH Session ID: 0x193c
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 10.1.1.1 via ge-1/1/9.0
    Session Id: 0x17d8
  2.2.0.0/32 Originating RIB: inet.3
    Metric: 35                      Node path count: 1
    Forwarding nexthops: 1
      Nexthop: 10.1.1.1 via ge-1/1/9.0
BGP Preference: 170/-1
Route Distinguisher: 2:1
Next hop type: Indirect
Address: 0x9347028
Next-hop reference count: 3
Source: 10.3.0.0
Next hop type: Router, Next hop index: 702
Next hop: 10.1.4.2 via ge-1/0/0.0, selected
Label operation: Push 634278
Label TTL action: prop-ttl
Session Id: 0x17d9
Protocol next hop: 10.3.0.0
Push 16
Composite next hop: 0x93463a0 1048575 INH Session ID: 0x17da
Indirect next hop: 0x91e8800 1048574 INH Session ID: 0x17da
State: <Secondary NotBest Int Ext ProtectionPath ProtectionCand>

Inactive reason: Not Best in its group - IGP metric
Local AS:      2 Peer AS:      2
Age: 3:34      Metric2: 70
Validation State: unverified
Task: BGP_172.16.3.0.0+32805
Announcement bits (2): 0-KRT 1-BGP_RT_Background
AS path: I
Communities: target:2:1
Import Accepted

```

```

VPN Label: 16
Localpref: 0
Router ID: 10.3.0.0
Primary Routing Table bgp.13vpn.0
Composite next hops: 1
  Protocol next hop: 10.3.0.0 Metric: 70
  Push 16
  Composite next hop: 0x93463a0 1048575 INH Session ID:
0x17da
  Indirect next hop: 0x91e8800 1048574 INH Session ID:
0x17da
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 10.1.4.2 via ge-1/0/0.0
    Session Id: 0x17d9
  10.3.0.0/32 Originating RIB: inet.3
    Metric: 70
    Node path count: 1
    Forwarding nexthops: 1
    Nexthop: 10.1.4.2 via ge-1/0/0.0
#Multipath Preference: 255
  Next hop type: Indirect
  Address: 0x24afca30
  Next-hop reference count: 1
  Next hop type: Router
  Next hop: 10.1.1.1 via ge-1/1/9.0, selected
  Label operation: Push 707633
  Label TTL action: prop-ttl
  Session Id: 0x17d8
  Next hop type: Router, Next hop index: 702
  Next hop: 10.1.4.2 via ge-1/0/0.0
  Label operation: Push 634278
  Label TTL action: prop-ttl
  Session Id: 0x17d9
  Protocol next hop: 10.2.0.0
  Push 16
  Composite next hop: 0x25805988 - INH Session ID: 0x193c
  Indirect next hop: 0x23eea900 - INH Session ID: 0x193c Weight 0x1

  Protocol next hop: 10.3.0.0
  Push 16
  Composite next hop: 0x93463a0 1048575 INH Session ID: 0x17da
  Indirect next hop: 0x91e8800 1048574 INH Session ID: 0x17da Weight
0x4000
  State: <ForwardingOnly Int Ext>
  Inactive reason: Forwarding use only
  Age: 23 Metric2: 35
  Validation State: unverified
  Task: RT
  AS path: I
  Communities: target:2:1

```

### show route table bgp.evpn.0 extensive [no-more (EVPN)]

```

show route table bgp.evpn.0 extensive | no-more
bgp.evpn.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
2:1000:10::100::00:aa:aa:aa:aa:aa/304 (1 entry, 0 announced)
  *BGP Preference: 170/-101
  Route Distinguisher: 1000:10
  Next hop type: Indirect
  Address: 0x9420fd0
  Next-hop reference count: 12

```

```

Source: 10.2.3.4
Protocol next hop: 10.2.3.4
Indirect next hop: 0x2 no-forward INH Session ID: 0x0
State: Local AS: 17 Peer AS:17 Age:21:12 Metric2:1 Validation State:
unverified
Task: BGP_17.1.2.3.4+50756
AS path: I
Communities: target:1111:8388708 encapsulation0:0:0:0:3
Import Accepted
Route Label: 100
ESI: 00:00:00:00:00:00:00:00:00
Localpref: 100
Router ID: 10.2.3.4
Secondary Tables: default-switch.evpn.0
Indirect next hops: 1
  Protocol next hop: 10.2.3.4 Metric: 1
  Indirect next hop: 0x2 no-forward INH Session ID: 0x0
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 10.10.10.1 via xe-0/0/1.0
    Session Id: 0x2
  1.2.3.4/32 Originating RIB: inet.0
    Metric: 1 Node path count: 1
    Forwarding nexthops: 2
    Nexthop: 10.92.78.102 via em0.0

2:1000:10::200::00:bb:bb:bb:bb:bb/304 (1 entry, 0 announced)
*BGP Preference: 170/-101
Route Distinguisher: 1000:10
Next hop type: Indirect
Address: 0x9420fd0
Next-hop reference count: 12
Source: 10.2.3.4
Protocol next hop: 10.2.3.4
Indirect next hop: 0x2 no-forward INH Session ID: 0x0
State: Local AS:17 Peer AS:17 Age:19:43 Metric2:1 Validation
State:unverified
Task: BGP_17.1.2.3.4+50756
AS path: I
Communities: target:2222:22 encapsulation0:0:0:0:3
Import Accepted
Route Label: 200
ESI: 00:00:00:00:00:00:00:00:00
Localpref: 100
Router ID: 10.2.3.4
Secondary Tables: default-switch.evpn.0
Indirect next hops: 1
  Protocol next hop: 10.2.3.4 Metric: 1
  Indirect next hop: 0x2 no-forward INH Session ID: 0x0
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 10.10.10.1 via xe-0/0/1.0
    Session Id: 0x2
  10.2.3.4/32 Originating RIB: inet.0
    Metric: 1 Node path count: 1
    Forwarding nexthops: 2
    Nexthop: 10.92.78.102 via em0.0

2:1000:10::300::00:cc:cc:cc:cc:cc/304 (1 entry, 0 announced)
*BGP Preference: 170/-101
Route Distinguisher: 1000:10

```

```

Next hop type: Indirect
Address: 0x9420fd0
Next-hop reference count: 12
Source: 10.2.3.4
Protocol next hop: 10.2.3.4
Indirect next hop: 0x2 no-forward INH Session ID: 0x0
State: Local AS:17 Peer AS:17 Age:17:21 Metric2:1 Validation State:
unverified Task: BGP 17,1,2,3,4+50756
AS path: I
Communities: target:3333:33 encapsulation0:0:0:0:3
Import Accepted
Route Label: 300
ESI: 00:00:00:00:00:00:00:00:00:00:00:00
Localpref: 100
Router ID: 10.2.3.4
Secondary Tables: default-switch.evpn.0
Indirect next hops: 1
  Protocol next hop: 10.2.3.4 Metric: 1
  Indirect next hop: 0x2 no-forward INH Session ID: 0x0
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 10.10.10.1 via xe-0/0/1.0
    Session Id: 0x2
  10.2.3.4/32 Originating RIB: inet.0
    Metric: 1 Node path count: 1
    Forwarding nexthops: 2
    Nexthop: 10.92.78.102 via em0.0

3:1000:10::100::1.2.3.4/304 (1 entry, 0 announced)
*BGP Preference: 170/-101
Route Distinguisher: 1000:10
PMSI: Flags 0x0: Label 100: Type INGRESS-REPLICATION 1.2.3.4
Next hop type: Indirect
Address: 0x9420fd0
Next-hop reference count: 12
Source: 10.2.3.4
Protocol next hop: 10.2.3.4
Indirect next hop: 0x2 no-forward INH Session ID: 0x0
State: Local AS:17 Peer AS:17 Age:37:01 Metric2:1 Validation State:
unverified Task: BGP 17.1.2.3.4+50756
AS path: I
Communities: target:1111:8388708 encapsulation0:0:0:0:3
Import Accepted
Localpref: 100
Router ID: 10.2.3.4
Secondary Tables: default-switch.evpn.0
Indirect next hops: 1
  Protocol next hop: 10.2.3.4 Metric: 1
  Indirect next hop: 0x2 no-forward INH Session ID: 0x0
  Indirect path forwarding next hops: 1
    Next hop type: Router
    Next hop: 10.10.10.1 via xe-0/0/1.0
    Session Id: 0x2
  10.2.3.4/32 Originating RIB: inet.0
    Metric: 1 Node path count: 1
    Forwarding nexthops: 2
    Nexthop: 10.92.78.102 via em0.0

3:1000:10::200::1.2.3.4/304 (1 entry, 0 announced)
*BGP Preference: 170/-101
Route Distinguisher: 1000:10

```

```

PMSI: Flags 0x0: Label 200: Type INGRESS-REPLICATION 1.2.3.4
Next hop type: Indirect
Address: 0x9420fd0
Next-hop reference count: 12
Source: 10.2.3.4
Protocol next hop: 10.2.3.4
Indirect next hop: 0x2 no-forward INH Session ID: 0x0
State: Local AS: 17 Peer AS: 17 Age:35:22 Metric2:1 Validation
State:unverified Task: BGP 17.1.2.3.4+50756
AS path:I Communities: target:2222:22 encapsulation):0:0:0:0:3

Import Accepted
Localpref: 100
Router ID: 10.2.3.4
Secondary Tables: default-switch.evpn.0
Indirect next hops: 1
    Protocol next hop: 10.2.3.4 Metric: 1
    Indirect next hop: 0x2 no-forward INH Session ID: 0x0
    Indirect path forwarding next hops: 1
        Next hop type: Router
        Next hop: 10.10.10.1 via xe-0/0/1.0
        Session Id: 0x2
    10.2.3.4/32 Originating RIB: inet.0
        Metric: 1 Node path count: 1
        Forwarding nexthops: 2
        Nexthop: 10.92.78.102 via em0.0

3:1000:10::300::1.2.3.4/304 (1 entry, 0 announced)
*BGP Preference: 170/-101
Route Distinguisher: 1000:10
PMSI: Flags 0x0: Label 300: Type INGRESS-REPLICATION 1.2.3.4
Next hop type: Indirect
Address: 0x9420fd0
Next-hop reference count: 12
Source: 10.2.3.4
Protocol next hop: 10.2.3.4
Indirect next hop: 0x2 no-forward INH Session ID: 0x0
State: Local AS: 17 Peer AS: 17 Age 35:22 Metric2:1 Validation State:
unverified Task: BGP 17.1.2.3.4+5075
6 AS path: I Communities: target:3333:33 encapsulation0:0:0:0:3
Import Accepted Localpref:100
Router ID: 10.2.3.4
Secondary Tables: default-switch.evpn.0
Indirect next hops: 1
    Protocol next hop: 10.2.3.4 Metric: 1
    Indirect next hop: 0x2 no-forward INH Session ID: 0x0
    Indirect path forwarding next hops: 1
        Next hop type: Router
        Next hop: 10.10.10.1 via xe-0/0/1.0
        Session Id: 0x2
    10.2.3.4/32 Originating RIB: inet.0
        Metric: 1 Node path count: 1
        Forwarding nexthops: 2
        Nexthop: 10.92.78.102 via em0.0

```

## show route terse

**List of Syntax** [Syntax on page 455](#)  
[Syntax \(EX Series Switches\) on page 455](#)

**Syntax** show route terse  
 <logical-system (all | *logical-system-name*)>

**Syntax (EX Series Switches)** show route terse

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Display a high-level summary of the routes in the routing table.



**NOTE:** For BGP routes, the `show route terse` command displays the local preference attribute and MED instead of the metric1 and metric2 values. This is mostly due to historical reasons.

To display the metric1 and metric2 value of a BGP route, use the [show route extensive](#) command.

**Options** **none**—Display a high-level summary of the routes in the routing table.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level** view

**List of Sample Output** [show route terse on page 457](#)

**Output Fields** [Table 30 on page 455](#) describes the output fields for the `show route terse` command. Output fields are listed in the approximate order in which they appear.

**Table 30: show route terse Output Fields**

Field Name	Field Description
<i>routing-table-name</i>	Name of the routing table (for example, inet.0).
<i>number destinations</i>	Number of destinations for which there are routes in the routing table.

Table 30: show route terse Output Fields (*continued*)

Field Name	Field Description
<i>number routes</i>	Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active)</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li>• <b>hidden</b> (routes that are not used because of a routing policy)</li> </ul>
<i>route key</i>	Key for the state of the route: <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul>
<b>A</b>	Active route. An asterisk (*) indicates this is the active route.
<b>V</b>	Validation status of the route: <ul style="list-style-type: none"> <li>• <b>?</b>—Not evaluated. Indicates that the route was not learned through BGP.</li> <li>• <b>I</b>—Invalid. Indicates that the prefix is found, but either the corresponding AS received from the EBGp peer is not the AS that appears in the database, or the prefix length in the BGP update message is longer than the maximum length permitted in the database.</li> <li>• <b>N</b>—Unknown. Indicates that the prefix is not among the prefixes or prefix ranges in the database.</li> <li>• <b>V</b>—Valid. Indicates that the prefix and autonomous system pair are found in the database.</li> </ul>
Destination	Destination of the route.
<b>P</b>	Protocol through which the route was learned: <ul style="list-style-type: none"> <li>• <b>A</b>—Aggregate</li> <li>• <b>B</b>—BGP</li> <li>• <b>C</b>—CCC</li> <li>• <b>D</b>—Direct</li> <li>• <b>G</b>—GMPLS</li> <li>• <b>I</b>—IS-IS</li> <li>• <b>L</b>—L2CKT, L2VPN, LDP, Local</li> <li>• <b>K</b>—Kernel</li> <li>• <b>M</b>—MPLS, MSDP</li> <li>• <b>O</b>—OSPF</li> <li>• <b>P</b>—PIM</li> <li>• <b>R</b>—RIP, RIPng</li> <li>• <b>S</b>—Static</li> <li>• <b>T</b>—Tunnel</li> </ul>
<b>Prf</b>	Preference value of the route. In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.



Table 30: show route terse Output Fields (*continued*)

Field Name	Field Description
Metric 1	First metric value in the route. For routes learned from BGP, this is the MED metric.
Metric 2	Second metric value in the route. For routes learned from BGP, this is the IGP metric.
Next hop	Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.
AS path	<p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>I—IGP.</li> <li>E—EGP.</li> <li>?—Incomplete; typically, the AS path was aggregated.</li> </ul>

## Sample Output

### show route terse

```

user@host> show route terse
inet.0: 10 destinations, 12 routes (10 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A V Destination      P Prf  Metric 1  Metric 2  Next hop      AS path
* ? 172.16.1.1/32    0 10      1          >10.0.0.2      I
?                               B 170      100          >10.0.0.2
unverified                               >10.0.0.2
* ? 172.16.1.1/32    D 0      110        >10.0.2        200 I
* V 2.2.0.2/32       B 170      110        >10.0.0.2
valid                               >10.0.0.2
* ? 10.0.0.0/30      D 0      100        >1t-1/2/0.1    I
?                               B 170      100          >10.0.0.2
unverified                               >10.0.0.2
* ? 10.0.0.1/32      L 0      100        Local          I
* ? 10.0.0.4/30      B 170      100          >10.0.0.2      I
unverified                               >10.0.0.2
* ? 10.0.0.8/30      B 170      100          >10.0.0.2      I
unverified                               >10.0.0.2
* I 172.16.1.1/32    B 170      90          >10.0.0.2      200 I
invalid                               >10.0.0.2
* N 192.168.2.3/32   B 170      100          >10.0.0.2      200 I
unknown                               >10.0.0.2
* ? 172.16.233.5/32  0 10      1          MultiRecv

```

