



Junos[®] OS

Security Services Administration Guide



Modified: 2018-09-25

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. and/or its affiliates in the United States and other countries. All other trademarks may be property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Junos® OS Security Services Administration Guide
Copyright © 2018 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://www.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

About the Documentation	xxxiii
Documentation and Release Notes	xxxiii
Using the Examples in This Manual	xxxiii
Merging a Full Example	xxxiv
Merging a Snippet	xxxiv
Documentation Conventions	xxxv
Documentation Feedback	xxxvii
Requesting Technical Support	xxxvii
Self-Help Online Tools and Resources	xxxviii
Opening a Case with JTAC	xxxviii

Part 1

Chapter 1

SSH and SSL Digital Certificates

Configuring Digital Certificates	3
Digital Certificates Overview	3
Configuring SSH Host Keys for Secure Copying of Data	4
Configuring SSH Known Hosts	5
Configuring Support for SCP File Transfer	5
Updating SSH Host Key Information	6
Retrieving Host Key Information Manually	6
Importing Host Key Information from a File	6
Importing SSL Certificates for Junos XML Protocol Support	7
Configuration Statements for Setting Up Digital Certificates for an ES PIC	8
Obtaining a Certificate from a Certificate Authority for an ES PIC	9
Requesting a CA Digital Certificate for an ES PIC on an M Series or T Series Router	9
Example: Requesting a CA Digital Certificate	10
Generating a Private and Public Key Pair for Digital Certificates for an ES PIC ..	10
Obtaining a Signed Certificate from the CA for an ES PIC	10
Configuring Digital Certificates for an ES PIC	11
Configuring the Certificate Authority Properties for an ES PIC	12
Specifying the Certificate Authority Name	13
Configuring the Certificate Revocation List	13
Configuring the Type of Encoding Your CA Supports	13
Specifying an Enrollment URL	14
Specifying a File to Read the Digital Certificate	14
Specifying an LDAP URL	14
Configuring the Cache Size	14
Configuring the Negative Cache	15
Configuring the Number of Enrollment Retries	15
Configuring the Maximum Number of Peer Certificates	15

Configuring the Path Length for the Certificate Hierarchy	16
Configuring an IKE Policy for Digital Certificates for an ES PIC	16
Configuring the Type of Encoding Your CA Supports	17
Configuring the Identity to Define the Remote Certificate Name	17
Specifying the Certificate Filename	17
Specifying the Private and Public Key File	17
Associating the Configured Security Association with a Logical Interface	18
Configuring Digital Certificates for Adaptive Services Interfaces	18
Configuring the Certificate Authority Properties	20
Specifying the CA Profile Name	20
Specifying an Enrollment URL	20
Specifying the Enrollment Properties	21
Configuring the Certificate Revocation List	21
Specifying an LDAP URL	21
Configuring the Interval Between CRL Updates	22
Overriding Certificate Verification if CRL Download Fails	22
Managing Digital Certificates	22
Requesting a CA Digital Certificate for AS and Multiservices PICs installed on M Series and T Series Routers	23
Generating a Public/Private Key Pair	23
Generating and Enrolling a Local Digital Certificate	23
Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA	24
Specify the Certificate ID	26
Specify the CA Profile	26
Specify the Challenge Password	26
Specify the Reenroll Trigger Time	26
Specify the Regenerate Key Pair	26
Specify the Validity Period	27
Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA	27
Specify the Certificate ID	28
Specify the CA Profile	28
Specify the Challenge Password	29
Specify the Reenroll Trigger Time	29
Specify the Regenerate Key Pair	29
Specify the Validity Period	29
Part 2	Distributed Denial-of-Service (DDoS) Protection
Chapter 2	DDoS Overview 33
	Distributed Denial-of-Service (DDoS) Protection Overview 33
	Platform Support 34
	Policer Types and Packet Priorities 35
	Example of Policer Priority Behavior 36
	Policer Hierarchy 36
	Example of Policer Bandwidth Limit Behavior 39

DDoS Protection Compared to Subscriber Login Packet Overload Protection	39
Example: Configuring DDoS Protection	40
Understanding Distributed Denial-of-Service Protection on PTX Series and QFX Series Devices	50
Host-Bound Traffic Limits	50
DDoS Violations	50
Policer Types and Packet Priorities	51
Example of Policer Priority Behavior	51
Policer Enforcement Points on QFX Series Switches	52
Example: Configuring DDoS Protection on QFX Series Switches	52
Configuring DDoS Protection Policers on QFX Series Switches	56
Configuring the Aggregate Policer for a Protocol Group	57
Configuring Packet-Type Policers for a Protocol Group	58
Configuring Policers on Individual Line Cards	59
Disabling Policers and Policer Logging	59
Configuring Protection Against DDoS Attacks	60
Configuring DDoS Protection Policers for Individual Packet Types	61
Configuring the DDoS Protection Trace Log Filename	65
Configuring the Number and Size of DDoS Protection Log Files	65
Configuring Access to the DDoS Protection Log File	66
Configuring a Regular Expression for DDoS Protection Messages to Be Logged	66
Configuring the DDoS Protection Tracing Flags	66
Configuring the Severity Level to Filter Which DDoS Protection Messages Are Logged	67
Disabling DDoS Protection Policers and Logging Globally	67
Tracing DDoS Protection Operations	68
Tracing DDoS Protection Operations	69
Configuring the DDoS Protection Trace Log Filename	70
Configuring the Number and Size of DDoS Protection Log Files	70
Configuring Access to the DDoS Protection Log File	71
Configuring a Regular Expression for DDoS Protection Messages to Be Logged	71
Configuring the DDoS Protection Tracing Flags	72
Configuring the Severity Level to Filter Which DDoS Protection Messages Are Logged	72
Chapter 3	
Configuring Flow Detection for DDoS Protection	73
DDoS Protection Flow Detection Overview	74
Flow Detection and Control	74
Flow Tracking	75
Notifications	75
Configuring Flow Detection for DDoS Protection	77
Enabling Flow Detection for All Protocol Groups and Packet Types	79
Configuring the Culprit Flow Reporting Rate for All Protocol Groups and Packet Types	79
Configuring the Violation Reporting Rate for All Protocol Groups and Packet Types	80

	Configuring the Detection Period for Suspicious Flows	80
	Configuring the Recovery Period for a Culprit Flow	81
	Configuring the Timeout Period for a Culprit Flow	81
	Configuring How Flow Detection Operates Globally	82
	Configuring How Flow Detection Operates for Individual Protocol Groups or Packets	83
	Configuring How Flow Detection Operates at Each Flow Aggregation Level	84
	Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level	85
	Configuring How Traffic in a Culprit Flow Is Controlled Globally	86
	Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level	87
	Disabling Automatic Logging of Culprit Flow Events for a Packet Type	88
	Disabling DDoS Protection Policers and Logging Globally	89
	Verifying and Managing Flow Detection	90
	Verifying and Managing DDoS Protection	90
Part 3	IPsec	
Chapter 4	Understanding How IPsec Secures Network Traffic	95
	Considering General IPsec Issues	95
	Overview of IPsec	99
	Authentication Algorithms	100
	Encryption Algorithms	100
	IPsec Protocols	102
	IPsec Security Associations Overview	104
	Security Associations Overview	104
	IPsec Modes	105
	IKE Key Management Protocol Overview	106
	Digital Certificates	107
	Service Sets	109
	IPsec Terms and Acronyms	110
Chapter 5	IPsec System Requirements	113
	IPsec System Requirements	113
	IPsec Requirements for Junos-FIPS	114
	IPsec-Enabled Line Cards	114
Chapter 6	Configuring IPsec Security Associations	117
	Configuring Security Associations	117
	Configuring Manual SAs	117
	Example: AS PIC Manual SA Configuration	119
	Verifying Your Work	124
	Router 1	125
	Router 2	125
	Router 3	126
	Example: ES PIC Manual SA Configuration	127
	Verifying Your Work	133
	Router 1	133
	Router 2	133
	Router 3	134

Router 4	135
Configuring IKE Dynamic SAs	135
Example: AS PIC IKE Dynamic SA Configuration	140
Verifying Your Work	145
Router 1	146
Router 2	146
Router 3	147
Router 4	148
Example: AS PIC IKE Dynamic SA with Digital Certificates Configuration	149
Verifying Your Work	159
Router 1	159
Router 2	160
Router 3	163
Router 4	166
Example: ES PIC IKE Dynamic SA Configuration	167
Verifying Your Work	174
Router 1	174
Router 2	175
Router 3	176
Router 4	177
Example: IKE Dynamic SA Between an AS PIC and an ES PIC Configuration	178
Verifying Your Work	186
Router 1	187
Router 2	187
Router 3	189
Router 4	190
Option: Configuring Multiple Routed Tunnels in a Single Next-Hop Service Set	190
Chapter 7	
Configuring IPsec on an ES PIC	193
IPsec Configuration for an ES PIC Overview	193
Configuring Minimum Manual Security Associations for IPsec on an ES PIC	194
Configuring Minimum IKE Requirements for IPsec on an ES PIC	194
Configuring Minimum Digital Certificate Requirements for IKE on an ES PIC	195
Configuring Security Associations for IPsec on an ES PIC	195
Configuring the Description for an SA	196
Configuring IPsec Transport Mode	196
Configuring IPsec Tunnel Mode	197
Configuring Manual IPsec Security Associations for an ES PIC	198
Configuring the Processing Direction	198
Configuring the Protocol for a Manual SA	199
Configuring the Security Parameter Index	200
Configuring the Auxiliary Security Parameter Index	200
Configuring the Authentication Algorithm and Key	200
Configuring the Encryption Algorithm and Key	201
Configuring Dynamic IPsec Security Associations	202

Enabling Dynamic IPsec Security Associations	202
Configuring Manual IPsec Security Associations for an ES PIC	203
Configuring the Processing Direction	203
Configuring the Protocol for a Manual SA	204
Configuring the Security Parameter Index	205
Configuring the Auxiliary Security Parameter Index	205
Configuring the Authentication Algorithm and Key	205
Configuring the Encryption Algorithm and Key	206
Configuring Dynamic IPsec Security Associations	207
Configuring an IKE Proposal for Dynamic SAs	207
Configuring the Authentication Algorithm for an IKE Proposal	208
Configuring the Authentication Method for an IKE Proposal	208
Configuring the Description for an IKE Proposal	208
Configuring the Diffie-Hellman Group for an IKE Proposal	209
Configuring the Encryption Algorithm for an IKE Proposal	209
Configuring the Lifetime for an IKE SA	209
Example: Configuring an IKE Proposal	210
Configuring an IKE Policy for Preshared Keys	210
Configuring the Description for an IKE Policy	211
Configuring the Mode for an IKE Policy	211
Configuring the Preshared Key for an IKE Policy	211
Associating Proposals with an IKE Policy	212
Example: Configuring an IKE Policy	212
Configuring an IPsec Proposal for an ES PIC	213
Configuring the Authentication Algorithm for an IPsec Proposal	213
Configuring the Description for an IPsec Proposal	214
Configuring the Encryption Algorithm for an IPsec Proposal	214
Configuring the Lifetime for an IPsec SA	214
Configuring the Protocol for a Dynamic IPsec SA	215
Configuring the IPsec Policy for an ES PIC	215
Configuring Perfect Forward Secrecy	216
Example: Configuring an IPsec Policy	216
Configuring IPsec for Enabling Internal Communications Between Routing Engines	
for Junos OS in FIPS Mode	217
Configuring the SA Direction	218
Configuring the IPsec SPI	219
Configuring the IPsec Key	219
Example: Configuring Internal IPsec	220
Chapter 8	
Configuring Traffic Filters to Direct Traffic Through the Desired IPsec Tunnel	221
IPsec Tunnel Traffic Configuration Overview	221
Using a Filter to Select Traffic to Be Secured	223
Applying the Filter or Service Set to the Interface Receiving Traffic to Be Secured	225
Using Filter-Based Forwarding to Select Traffic to Be Secured	225
Example: Configuring an Outbound Traffic Filter	226
Example: Applying an Outbound Traffic Filter	227
Example: Configuring an Inbound Traffic Filter for a Policy Check	228

	Example: Applying an Inbound Traffic Filter to an ES PIC for a Policy Check . . .	230
Chapter 9	Configuring IPsec Dynamic Endpoints	233
	Option: Configuring IPsec Dynamic Endpoints	233
	IPsec Dynamic Endpoint Tunnel Architecture	234
	Authentication Process	234
	Dynamic Implicit Rules	235
	Reverse Route Insertion	235
	Configuring an IKE Access Profile for IPsec Dynamic Endpoint Tunnels	236
	Configuring the Service Set for IPsec Dynamic Endpoint Tunnels	237
	Configuring the Interface Identifier for IPsec Dynamic Endpoint Tunnels	237
	Example: Dynamic Endpoint Tunneling Configuration	238
	Verifying Your Work	239
Chapter 10	Configuring Digital Certificates for IPsec	241
	Using Digital Certificates for IPsec	241
	Configuring a CA Profile	242
	Configuring a Certificate Revocation List	242
	Requesting a CA Digital Certificate	243
	Generating a Private/Public Key Pair	243
	Generating and Enrolling a Local Digital Certificate	244
	Applying the Local Digital Certificate to an IPsec Configuration	244
	Configuring Automatic Reenrollment of Digital Certificates	244
	Monitoring Digital Certificates	245
	Clearing Digital Certificates	245
	Securing BGP Sessions with IPsec Transport Mode	246
Chapter 11	Using Security and Encryption on EX Series Switches	247
	Understanding Public Key Cryptography on Switches	248
	Public Key Infrastructure (PKI) and Digital Certificates	248
	Understanding Self-Signed Certificates on EX Series Switches	249
	Manually Generating Self-Signed Certificates on Switches (CLI Procedure) . . .	250
	Generating a Public-Private Key Pair on Switches	250
	Generating Self-Signed Certificates on Switches	251
	Deleting Self-Signed Certificates (CLI Procedure)	251
	Enabling HTTPS and XNM-SSL Services on Switches Using Self-Signed Certificates (CLI Procedure)	252
Chapter 12	Using IPsec with a Layer 3 VPN	253
	Using IPsec with a Layer 3 VPN	253
	ES Tunnel Interface Configuration for a Layer 3 VPN	255
Part 4	Monitoring and Troubleshooting Information	
Chapter 13	Tracing Security Services Operations for Troubleshooting Purposes . . .	259
	Configuring Tracing Operations for Security Services	259
	Configuring Tracing Operations for IPsec Events for Adaptive Services PICs . .	260
	Monitoring IPsec by Using SNMP	260

Part 5

Chapter 14

Port Security

Port Security Overview	265
Understanding Access Control on Switches	266
Understanding How to Protect Access Ports on EX Series Switches from	
Common Attacks	268
Mitigation of Ethernet Switching Table Overflow Attacks	268
Mitigation of Rogue DHCP Server Attacks	268
Protection Against ARP Spoofing Attacks	269
Protection Against DHCP Snooping Database Alteration Attacks	269
Protection Against DHCP Starvation Attacks	270
Overview of Access Port Protection	270
Mitigation of Ethernet Switching Table Overflow Attacks	271
Mitigation of Rogue DHCP Server Attacks	271
Protection Against ARP Spoofing Attacks	272
Protection Against DHCP Snooping Database Alteration Attacks	272
Protection Against DHCP Starvation Attacks	272
Understanding DHCP Snooping for Monitoring DHCP Messages Received from	
Untrusted Devices	273
DHCP Snooping Basics	273
DHCP Snooping Process	274
DHCPv6 Snooping	275
Rapid Commit for DHCPv6	276
DHCP Server Access	276
Switching Device, DHCP Clients, and DHCP Server Are All on the Same	
VLAN	276
Switching Device Acts as DHCP Server	277
Switching Device Acts as Relay Agent	278
Static IP Address Additions to the DHCP Snooping Database	279
Snooping DHCP Packets That Have Invalid IP Addresses	279
Prioritizing Snooped Packets	280
Monitoring Port Security	280
Understanding Port Security Features to Protect the Access Ports on Your Device	
Against the Loss of Information and Productivity	282
Configuring Port Security (CLI Procedure)	284
Enabling DHCP Snooping	285
Enabling Dynamic ARP Inspection (DAI)	285
Enabling IPv6 Neighbor Discovery Inspection	285
Limiting Dynamic MAC Addresses on an Interface	286
Enabling Persistent MAC Learning on an Interface	286
Limiting MAC Address Movement	286
Restricting a VoIP Client MAC Address in a VoIP VLAN	286
Configuring Trusted DHCP Servers on an Interface	287
Configuring Port Security Features	287
Example: Configuring Basic Port Security Features	289
Verifying That DHCP Snooping Is Working Correctly	297
Understanding MAC Limiting and MAC Move Limiting for Port Security	299
MAC Limiting	299
MAC Move Limiting	299

Actions for MAC Limiting	300
MAC Addresses That Exceed the MAC Limit or MAC Move Limit	300
Verifying That MAC Limiting Is Working Correctly	300
Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly	301
Verifying That MAC Limiting for a Specific Interface Within a Specific VLAN Is Working Correctly	302
Verifying That Allowed MAC Addresses Are Working Correctly	302
Verifying Results of Various Action Settings When the MAC Limit Is Exceeded	303
Customizing the Ethernet Switching Table Display to View Information for a Specific Interface	305
Verifying That MAC Move Limiting Is Working Correctly	306
Understanding Trusted and Untrusted Ports	307
Verifying That a Trusted DHCP Server Is Working Correctly	307
Verifying That the Port Error Disable Setting Is Working Correctly	308
Verifying That the Port Error Disable Setting Is Working Correctly	309
Understanding DHCP Option 82 for Port Security	310
DHCP Option 82 Processing	310
Suboption Components of Option 82	311
Configurations That Support Option 82	311
Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)	313
Enabling DHCPv6 Rapid Commit Support	315
Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure)	316
Enabling a Trusted DHCP Server (CLI Procedure)	318
Chapter 15	
Enabling IPv6 ND Inspection and RA Guard to Prevent IPv6 Spoofing Attacks	319
Understanding IPv6 Neighbor Discovery Inspection	319
Enabling IPv6 Neighbor Discovery Inspection	321
Understanding IPv6 Router Advertisement Guard	321
Configuring Stateless IPv6 Router Advertisement Guard on Switches	324
Configuring a Discard Policy for RA Guard	325
Configuring an Accept Policy for RA Guard	326
Enabling Stateless RA Guard on an Interface	328
Enabling Stateless RA Guard on a VLAN	329
Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard	330
Configuring Stateful IPv6 Router Advertisement Guard on Switches	330
Configuring a Discard Policy for RA Guard	331
Configuring an Accept Policy for RA Guard	332
Enabling Stateful RA Guard on an Interface	334
Enabling Stateful RA Guard on a VLAN	335
Configuring the Learning State on an Interface	336
Configuring the Forwarding State on an Interface	337
Configuring the Blocking State on an Interface	337

	Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard	337
	Configuring a Discard Policy for RA Guard	338
	Configuring an Accept Policy for RA Guard	339
	Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard	341
Chapter 16	Configuring MAC Limiting, MAC Move Limiting and Persistent MAC Learning to Prevent DHCP Starvation Attacks	343
	Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches	343
	MAC Limiting	344
	MAC Move Limiting	344
	Actions for MAC Limiting and MAC Move Limiting	345
	Configuring MAC Limiting (CLI Procedure)	346
	Configuring MAC Limiting for Port Security by Limiting the Number of MAC Addresses That Can be Learned on Interfaces	347
	Configuring MAC Limiting for Port Security by Specifying MAC Addresses That Are Allowed	347
	Configuring MAC Limiting for VLANs	348
	Configuring MAC Move Limiting (CLI Procedure)	350
	Understanding Persistent MAC Learning (Sticky MAC)	352
	Configuring Persistent MAC Learning (CLI Procedure)	353
Chapter 17	Configuring Media Access Control Security (MACsec) on Routers	355
	Example: Configuring MACsec over an MPLS CCC on MX Series Routers	355
	Example: Configuring MACsec over an MPLS CCC	377
	Understanding MACSec on PTX10K-LC1105 line card	400
	MACsec Supported Line Cards	400
Chapter 18	Configuring Media Access Control Security (MACsec) on Switches	403
	Understanding Media Access Control Security (MACsec)	403
	How MACsec Works	404
	Understanding Connectivity Associations and Secure Channels	404
	Understanding Static Connectivity Association Key Security Mode (Security Mode for Router-to-Router Links)	405
	Understanding MACsec Hardware Requirements for MX Series Routers	405
	Understanding MACsec Software Requirements for MX Series Routers	406
	Understanding MACsec Security Modes	406
	Understanding Static Connectivity Association Key Security Mode (Recommended Security Mode for Switch-to-Switch Links)	406
	Understanding Dynamic Secure Association Key Security Mode (Switch-to-Host Links)	408
	Understanding Static Secure Association Key Security Mode (Supported for Switch-to-Switch Links)	408
	Understanding the Requirements to Enable MACsec on a Switch-to-Host Link	409

	MACsec Software Image Requirements for EX Series and QFX Series	
	Switches	409
	Junos OS Release 16.1 and Later	409
	Junos OS Releases Prior to 16.1	410
	MACsec Hardware and Software Support Summary	410
	Understanding MACsec in a Virtual Chassis	412
	Understanding the MACsec Feature License Requirement	412
	MACsec Limitations	413
	Configuring Media Access Control Security (MACsec)	413
	Acquiring and Downloading the Junos OS Software	414
	Acquiring and Downloading the MACsec Feature License	415
	Configuring the PIC Mode of the MACsec-capable Interfaces (EX4200 switches only)	416
	Configuring MACsec Using Static Connectivity Association Key Security Mode (Recommended for Enabling MACsec on Switch-to-Switch Links)	418
	Configuring MACsec on the Switch Using Dynamic Secure Association Key Security Mode to Secure a Switch-to-Host Link	423
	Configuring MACsec Using Static Secure Association Key Security Mode to Secure a Switch-to-Switch Link	428
Chapter 19	Configuration Examples	433
	Configuring MAC Limiting	434
	Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI Procedure)	435
	Configuring the none Action to Override a MAC Limit Applied to All Interfaces (CLI Procedure)	436
	Configuring MAC Limiting (CLI Procedure)	436
	Limiting the Number of MAC Addresses Learned by an Interface	437
	Limiting the Number of MAC Addresses Learned by a VLAN	437
	Configuring Persistent MAC Learning (CLI Procedure)	438
	Configuring MAC Move Limiting (CLI Procedure)	440
	Verifying That MAC Limiting Is Working Correctly	442
	Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly	442
	Verifying That Allowed MAC Addresses Are Working Correctly	443
	Verifying That Interfaces Are Shut Down	443
	Customizing the Ethernet Switching Table Display to View Information for a Specific Interface	444
	Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks	445
	Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks	449
	Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks	452
	Enabling a Trusted Port for DHCP	456

Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks	456
Verifying That DAI Is Working Correctly	461
Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks	462
Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch	465
Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic	473
Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces	478
Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN	488
Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server	497
Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server	500
Enabling DHCP Snooping (CLI Procedure)	504
Enabling DHCP Snooping	505
Applying CoS Forwarding Classes to Prioritize Snooped Packets	505
Setting the none Action on an Interface to Override a MAC Limit Applied to All Interfaces (CLI Procedure)	507
Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure)	508
Making IP-MAC Bindings in the DHCP Snooping Database Persistent (CLI Procedure)	511
Verifying That IP Source Guard Is Working Correctly	512
Verifying That Persistent MAC Learning Is Working Correctly	513
Chapter 20	
Configuring DHCP Snooping to Filter DHCP Messages from Untrusted Hosts	515
Understanding DHCP Snooping for Port Security	516
DHCP Snooping Basics	516
Enabling DHCP Snooping	517
DHCP Snooping Process	518
DHCPv6 Snooping	519
Rapid Commit for DHCPv6	519
DHCP Server Access	520
Switch, DHCP Clients, and the DHCP Server Are All on the Same VLAN	520
Switch Acts as the DHCP Server	521
Switch Acts as a Relay Agent	522
Static IP Address Additions to the DHCP Snooping Database	523
Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks	524
DHCP Option 82 Overview	524
Suboption Components of Option 82	525

	Switching Device Configurations That Support Option 82	526
	Switching Device, DHCP Clients, and the DHCP Server Are on the Same VLAN or Bridge Domain	526
	Switching Device Acts as a Relay Agent	526
	DHCPv6 Options	527
	Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)	528
	Enabling DHCPv6 Options by Using a Lightweight DHCPv6 Relay Agent (LDRA) (CLI Procedure)	531
	Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure)	533
	Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance (CLI Procedure)	533
Chapter 21	Enabling Trusted DHCP Servers to Protect Against Rogue DHCP Servers	537
	Understanding Trusted DHCP Servers for Port Security	537
	Enabling a Trusted DHCP Server (CLI Procedure)	538
Chapter 22	Configuring Layer 2 Port Security	539
	Configuring Port Security to Protect Access Ports on the Device Against Loss of Information and Productivity (CLI Procedure)	540
	Configuring IP Source Guard to Mitigate the Effects of Source IP Address Spoofing and Source MAC Address Spoofing (CLI Procedure)	543
	Configuring IP Source Guard (CLI Procedure)	544
	Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing	545
	Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers (CLI Procedure)	549
	Configuring Dynamic ARP Inspection to Protect Switching Devices Against ARP Spoofing (CLI Procedure)	550
	Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases (CLI Procedure)	550
	Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure)	551
	Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks	553
Part 6	Device Security	
Chapter 23	Configuring Device Security	561
	Understanding Storm Control	561
	Example: Configuring Storm Control to Prevent Network Outages	563
	Understanding Unicast RPF	565
	Unicast RPF for Switches Overview	565
	Unicast RPF Implementation	566
	Unicast RPF Packet Filtering	566
	Bootstrap Protocol (BOOTP) and DHCP Requests	566
	Default Route Handling	566
	When to Enable Unicast RPF	566

	When Not to Enable Unicast RPF	568
	Limitations of the Unicast RPF Implementation on EX3200, EX4200, and EX4300 Switches	568
	Configuring Unicast RPF (CLI Procedure)	569
	Verifying Unicast RPF Status	571
	Disabling Unicast RPF (CLI Procedure)	573
	Understanding How Unicast Reverse Path Forwarding Prevents Spoofed IP Packet Forwarding	574
	Example: Configuring Unicast Reverse-Path-Forwarding Checking to Prevent DoS and DDoS Attacks	575
Chapter 24	Storm Control	585
	Understanding Storm Control for Managing Traffic Levels	585
	Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches	587
	Configuring or Disabling Storm Control (CLI Procedure)	591
	Configuring Storm Control	592
	Disabling Storm Control on Broadcast Traffic	592
	Disabling Storm Control on All Multicast Traffic	593
	Disabling Storm Control on Registered Multicast Traffic	593
	Disabling Storm Control on Unregistered Multicast Traffic	594
	Disabling Storm Control on Unknown Unicast Traffic	594
	Disabling Storm Control on Multiple Types of Traffic	595
	Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces (CLI Procedure)	596
	Understanding Storm Control on EX Series Switches	597
	Disabling or Enabling Storm Control (CLI Procedure)	599
	Disabling Storm Control on Broadcast Traffic	601
	Disabling Storm Control on All Multicast Traffic	601
	Disabling Storm Control on Registered Multicast Traffic (EX8200 Switches Only)	601
	Disabling Storm Control on Unregistered Multicast Traffic (EX8200 Switches Only)	601
	Disabling Storm Control on Unknown Unicast Traffic	602
	Enabling Storm Control on Multicast Traffic	602
	Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers	602
	Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches	607
	Example: Configuring Storm Control to Prevent Network Outages	610
	Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces (CLI Procedure)	613
Chapter 25	Configuring IP Source Guard to Prevent IP Spoofing Attacks	615
	Understanding IP Source Guard for Port Security on Switches	615
	IP Address Spoofing	615
	How IP Source Guard Works	615
	IPv6 Source Guard	616
	The DHCP Snooping Table	616

	Typical Uses of Other Junos OS Features with IP Source Guard	617
	Configuring IP Source Guard (CLI Procedure)	617
	Configuring IP Source Guard	618
	Configuring IPv6 Source Guard	619
	Disabling IP Source Guard	620
	Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing	621
	Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing	626
Chapter 26	Configuring Dynamic ARP Inspection to Prevent ARP Spoofing Attacks	633
	Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing	633
	Address Resolution Protocol	633
	ARP Spoofing	634
	Dynamic ARP Inspection	634
	Prioritizing Inspected Packets	635
	Enabling Dynamic ARP Inspection (CLI Procedure)	636
	Enabling DAI	636
	Applying CoS Forwarding Classes to Prioritize Inspected Packets	636
	Enabling Dynamic ARP Inspection (CLI Procedure)	638
Chapter 27	Unknown Unicast Forwarding	639
	Understanding Unknown Unicast Forwarding	639
	Configuring Unknown Unicast Forwarding (CLI Procedure)	640
	Configuring Unknown Unicast Forwarding (CLI Procedure)	641
	Configuring Unknown Unicast Forwarding on EX4300 Switches	641
	Configuring Unknown Unicast Forwarding on EX9200 Switches	641
	Verifying That Unknown Unicast Packets Are Forwarded to a Single Interface	643
	Configuring Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages	644
	Configuring Junos OS ICMPv6 Rate Limit for ICMPv6 Routing Engine Messages	644
	Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface	645
Part 7	Configuration Statements and Operational Commands	
Chapter 28	Configuration Statements	649
	Security Services Configuration Statements	657
	accept	660
	accept-source-mac	662
	access-security	664
	action-priority	665
	action-shutdown	666
	algorithm (Authentication Keychain)	668
	algorithm (Junos FIPS)	668
	allowed-mac	669
	arp-inspection	670

arp-inspection (MX Series)	671
authentication (Security IPsec)	672
authentication-algorithm (Security IKE)	673
authentication-algorithm (Security IPsec)	674
authentication-key-chains	676
authentication-method	677
auto-re-enrollment	678
auxiliary-spi (Security IPsec)	679
bandwidth	680
bandwidth (DDoS)	681
bandwidth-level	682
bandwidth-percentage	683
bandwidth-scale (DDoS)	684
bridge-domains	685
burst (DDoS)	686
burst-scale (DDoS)	687
bypass-aggregate (DDoS)	688
cache-size	689
cache-timeout-negative	690
ca-identity	691
cak	692
cak (MX Series)	693
ca-name	694
ca-profile	695
certificate-id	696
certificates	697
certification-authority	698
challenge-password	699
cipher-suite (MACsec)	700
circuit-id	702
ckn	703
connectivity-association	704
connectivity-association (MACsec Interfaces)	705
connectivity-association (MACsec Interfaces for MX Series)	705
crl (Adaptive Services Interface)	706
crl (Encryption Interface)	707
ddos-protection (DDoS)	708
ddos-protection (DDoS) (PTX Series and QFX Series)	710
description (Authentication Keychain)	711
description (IKE policy)	712
dhcp-option82	713
dhcp-security	715
dhcp-security (MX Series)	718
dhcp-service	720
dhcp-snooping-file	721
dhcp-snooping-file	722
dhcp-trusted	723
dhcpv6-options	724
dhcpv6-snooping-file	725

dh-group	726
direction	727
direction (Junos OS)	728
direction (Junos-FIPS Software)	729
direction (MX Series)	730
disable-fpc (DDoS)	731
disable-logging (DDoS)	732
disable-routing-engine (DDoS)	733
disable-timeout	734
disable-timeout (Port Error Disable)	735
discard	736
dynamic	737
eapol-address (MX Series)	738
encoding	739
encryption (MACsec)	740
encryption (MACsec for MX Series)	741
encryption (Junos OS)	742
encryption (Junos-FIPS Software)	743
encryption-algorithm (Security)	744
enrollment	745
enrollment-retry	746
enrollment-url	747
ethernet-switching-options	748
examine-dhcp	754
examine-dhcpv6	756
examine-fip	758
exclude-protocol	759
exclude-protocol (MX Series)	760
family vpls (Layer 2 Pseudowires)	761
fc-map	762
fcoe-trusted	764
file	765
flood (VLANs)	766
flow-detection (DDoS Flow Detection)	767
flow-detection (DDoS Packet Level)	768
flow-detection-mode (DDoS Flow Detection)	769
flow-detection-mode (DDoS Global Flow Detection)	770
flow-detect-time (DDoS Flow Detection)	771
flow-level-bandwidth (DDoS Flow Detection)	772
flow-level-control (DDoS Flow Detection)	773
flow-level-control (DDoS Global Flow Detection)	774
flow-level-detection (DDoS Flow Detection)	775
flow-recover-time (DDoS Flow Detection)	776
flow-report-rate (DDoS Flow Detection)	777
flow-timeout-time (DDoS Flow Detection)	778
forwarding-class (for DHCP Snooping or DAI Packets)	779
forwarding-options	780
fpc (DDoS)	786
global (DDoS)	787

group (DHCP Security)	788
group (DHCP Security for MX Series)	789
group-type (Unknown Unicast Forwarding)	790
host-name	791
icmpv4-rate-limit	792
icmpv6-rate-limit	793
id	794
id (MACsec for MX Series)	795
identity	795
ike (Security)	796
include-sci	797
include-sci (MACsec for MX Series)	798
interface (Access Port Security)	799
interface (DHCP Security for MX Series)	800
interface (RA Guard)	801
interface (Secure Access Port)	802
interface (Static MAC Bypass)	803
interface (Storm Control)	804
interface (Unknown Unicast Forwarding)	805
interface-mac-limit	806
interface-shutdown-action	808
interfaces (MACsec)	809
interfaces (MACsec for MX Series)	810
internal	811
ipsec (Security)	812
ip-source-guard	814
ip-source-guard (MX Series)	816
source-ip-address-list	817
ipv6-source-guard	818
ipv6-source-guard-sessions	819
key (Authentication Keychain)	820
key (Junos FIPS)	821
key (MACsec)	822
key-chain (Security)	823
key-name	824
key-server-priority (MACsec)	825
key-server-priority (MACsec for MX Series)	826
ldap-url	827
level	828
lifetime-seconds (Security)	829
light-weight-dhcpv6-relay	830
local	832
local-certificate (Security)	833
local-key-pair	833
location	834
location (DHCP Snooping Database)	835
logical-interface (DDoS Flow Detection)	836
mac	838
mac (Option 82)	839

mac-address (MACsec)	840
mac-address (MACsec)	841
mac-limit	842
mac-limit (Access Port Security)	843
mac-list	845
mac-move-limit	846
macsec	848
macsec (MX Series)	850
manual (Junos OS)	851
manual (Junos-FIPS Software)	852
mark-interface (RA Guard)	853
match-list	854
match-option	856
maximum-certificates	857
mka	858
mka (MX Series)	858
mode (IKE)	859
mode (IPsec)	860
multicast	861
must-secure	862
neighbor-discovery-inspection	863
next-hop-group (Unknown Unicast Forwarding)	864
no-allowed-mac-log	865
no-broadcast	866
no-dhcp-snooping	868
no-dhcp-trusted	869
no-dhcpv6-options	870
no-dhcpv6-snooping	870
no-encryption (MACsec)	871
no-encryption (MACsec for MX Series)	872
no-examine-dhcpv6	873
no-fcoe-trusted	874
no-flow-logging (DDoS Flow Detection)	875
no-gratuitous-arp-request	876
no-gratuitous-arp-request	877
no-multicast	878
no-option16	879
no-option18	880
no-option37	880
no-option82	881
no-registered-multicast	882
no-unknown-unicast	883
no-unregistered-multicast	885
offset	886
offset (MX Series)	888
option-16 (DHCPv6 Snooping)	889
option-18 (DHCPv6 Snooping)	890
option-37 (DHCPv6 Snooping)	892
no-option-37	893

option-82	894
options (Security)	895
overrides (DHCP Security)	896
overrides (DHCP Security for MX Series)	897
packet-action	898
path-length	901
perfect-forward-secrecy (Security)	902
perfect-forward-secrecy (Services)	903
persistent-learning	904
persistent-learning	904
physical-interface (DDoS Flow Detection)	905
pki	907
policy	909
policy (Security IKE)	910
policy (Security IPsec)	911
port-error-disable	912
port-id	913
port-id (MACsec for MX Series)	914
prefix (Circuit ID for Option 82)	915
prefix (DHCPv6 Options)	917
prefix (Remote ID for Option 82)	918
prefix-list-name	919
pre-shared-key	920
pre-shared-key (MX Series)	921
pre-shared-key (Security)	922
priority (DDoS)	923
proposal (Security IKE)	924
proposal (Security IPsec)	925
proposals	925
protocol (Junos OS)	926
protocol (Junos-FIPS Software)	927
protocols (DDoS)	928
protocols (DDoS) (PTX Series and QFX Series)	939
recover-time (DDoS)	945
recovery-timeout	946
re-enroll-trigger-time-percentage	947
refresh-interval	948
re-generate-keypair	948
remote-id	949
remote-id (MX Series)	951
replay-protect	952
replay-protect (MX Series)	952
replay-window-size (MX Series)	953
replay-window-size	954
retry (Adaptive Services Interface)	955
retry-interval	955
revocation-check	956
router-advertisement-guard	957
routing-instance-name	959

routing-instance-name (circuit-id)	960
rpf-check	961
secret	963
secure-access-port	964
secure-channel	966
secure-channel	967
security	968
security-association	969
security-association (Junos OS)	970
security-association (Junos-FIPS Software)	971
security-mode	972
show ddos-protection protocols culprit-flows	973
show ddos-protection protocols flow-detection	980
source-mac-address-list	984
spi (Junos OS)	985
spi (Junos-FIPS Software)	985
ssh	986
ssh-known-hosts	987
start-time (Authentication Key Transmission)	989
stateful	991
stateless	992
static-ip	993
static-ip (MX Series)	994
static-ipv6	995
storm-control	996
storm-control	997
storm-control	998
storm-control-profiles	999
subscriber (DDoS Flow Detection)	1000
switch-options (VLANs)	1002
timeout	1003
timeout-active-flows (DDoS Flow Detection)	1004
tolerance	1005
traceoptions	1006
traceoptions (Access Port Security)	1008
traceoptions (DDoS)	1011
traceoptions (DHCP)	1013
traceoptions (MACsec)	1016
traceoptions (MACsec interfaces)	1018
transmit-interval (MACsec)	1020
transmit-interval (MACsec for MX Series)	1021
trusted	1022
trusted (DHCP Security)	1022
unknown-unicast-forwarding	1023
untrusted	1024
untrusted	1024
url (Security)	1025
use-interface-description	1026
use-interface-description	1028

	use-interface-index	1030
	use-interface-name	1031
	use-string	1032
	use-vlan-id	1034
	validity-period	1035
	vendor-id	1036
	violation-report-rate (DDoS Flow Detection)	1037
	vlan (Access Port Security)	1038
	vlan (DHCP Bindings on Access Ports)	1040
	vlangs (RA Guard)	1041
	vlan (Secure Access Port)	1042
	vlan (Static IP)	1043
	vlan (Unknown Unicast Forwarding)	1044
	voip-mac-exclusive	1045
	write-interval	1046
Chapter 29	Operational Commands	1047
	clear security pki certificate-request	1050
	clear access-security router-advertisement statistics	1051
	clear arp	1052
	clear arp inspection statistics	1054
	clear bridge recovery-timeout	1055
	clear ddos-protection protocols	1056
	clear dhcp snooping binding	1058
	clear dhcp snooping statistics	1059
	clear dhcp-security binding	1060
	clear dhcp-security ipv6 binding	1061
	clear dhcpv6 snooping binding	1062
	clear dhcpv6 snooping statistics	1063
	clear dot1x	1064
	clear ethernet-switching port-error	1066
	clear ethernet-switching recovery-timeout	1067
	clear ethernet-switching table	1068
	clear neighbor-discovery-inspection statistics	1070
	show security macsec connections	1071
	clear security mka statistics	1073
	clear security mka statistics (MX Series)	1074
	clear security pki ca-certificate	1075
	clear security pki crl	1076
	clear security pki key-pair	1077
	clear security pki local-certificate	1078
	clear services ipsec-vpn certificates	1079
	clear services ipsec-vpn ike security-associations	1080
	clear services ipsec-vpn ipsec security-associations	1081
	clear services ipsec-vpn ipsec statistics	1082
	request access-security router-advertisement-guard-block	1083
	request access-security router-advertisement-guard-forward	1084
	request access-security router-advertisement-guard-learn interface	1085
	request ipsec switch	1086

request security certificate enroll (Signed)	1087
request security certificate enroll (Unsigned)	1089
request security key-pair	1090
request security pki ca-certificate enroll	1091
request security pki ca-certificate load	1092
request security pki ca-certificate verify	1093
request security pki crl load	1094
request security pki generate-certificate-request	1095
request security pki generate-key-pair	1097
request security pki local-certificate enroll	1098
request security pki local-certificate generate-self-signed	1100
request security pki local-certificate load	1101
request security pki local-certificate verify	1102
request system certificate add	1103
show access-security router-advertisement state	1104
show access-security router-advertisement statistics	1106
show arp inspection statistics	1108
show ddos-protection protocols	1110
show ddos-protection protocols parameters	1131
show ddos-protection protocols statistics	1138
show ddos-protection protocols violations	1148
show ddos-protection statistics	1150
show ddos-protection version	1152
show dhcp snooping binding	1154
show dhcp snooping statistics	1156
show dhcp-security arp inspection statistics	1157
show dhcp-security binding	1159
show dhcp-security binding ip-source-guard	1162
show dhcp-security ipv6 binding	1164
show dhcp-security ipv6 statistics	1166
show dhcp-security neighbor-discovery-inspection statistics	1169
show dhcpv6 snooping binding	1171
show dhcpv6 snooping statistics	1173
show ethernet-switching table	1174
show ike security-associations	1197
show ipsec certificates	1201
show ipsec security-associations	1204
show ip-source-guard	1207
show ipv6-source-guard	1209
show neighbor-discovery-inspection statistics	1211
show security keychain	1212
show security macsec connections	1215
show security macsec connections (MX Series)	1217
show security macsec statistics	1220
include-sci (MACsec for MX Series)	1224
show security mka sessions	1225
show security mka sessions (MX Series)	1227
show security mka statistics	1230
show security mka sessions (MX Series)	1232

show security pki ca-certificate	1235
show security pki certificate-request	1239
show security pki crt	1241
show security pki local-certificate	1244
show services ipsec-vpn certificates	1247
show services ipsec-vpn ike security-associations	1250
show services ipsec-vpn ipsec security-associations	1255
show services ipsec-vpn ipsec statistics	1261
show system certificate	1265
show system statistics arp	1267

List of Figures

Part 2	Distributed Denial-of-Service (DDoS) Protection	
Chapter 2	DDoS Overview	33
	Figure 1: Policer Hierarchy for PPPoE Packets	37
	Figure 2: Policer Hierarchy for DHCPv4 Packets	37
Part 3	IPsec	
Chapter 4	Understanding How IPsec Secures Network Traffic	95
	Figure 3: AH Protocol	102
	Figure 4: ESP Protocol	103
Chapter 6	Configuring IPsec Security Associations	117
	Figure 5: AS PIC Manual SA Topology Diagram	119
	Figure 6: ES PIC Manual SA Topology Diagram	127
	Figure 7: AS PIC IKE Dynamic SA Topology Diagram	140
	Figure 8: AS PIC IKE Dynamic SA Topology Diagram	149
	Figure 9: ES PIC IKE Dynamic SA Topology Diagram	167
	Figure 10: AS PIC to ES PIC IKE Dynamic SA Topology Diagram	178
Chapter 8	Configuring Traffic Filters to Direct Traffic Through the Desired IPsec Tunnel	221
	Figure 11: Example: IPsec Tunnel Connecting Security Gateways	222
Chapter 9	Configuring IPsec Dynamic Endpoints	233
	Figure 12: IPSec Dynamic Endpoint Tunneling Topology Diagram	238
Part 5	Port Security	
Chapter 14	Port Security Overview	265
	Figure 13: DHCP Server Connected Directly to a Switching Device	277
	Figure 14: DHCP Server Connected Directly to Switching Device 2, with Switching Device 2 Connected to Switching Device 1 Through a Trusted Trunk Port . . .	277
	Figure 15: Switching Device Is the DHCP Server	278
	Figure 16: Switching Device Acting as Relay Agent Through Router to DHCP Server	279
	Figure 17: Network Topology for Basic Port Security	291
	Figure 18: Switch Relays DHCP Requests to Server	312
Chapter 15	Enabling IPv6 ND Inspection and RA Guard to Prevent IPv6 Spoofing Attacks	319
	Figure 19: Stateful RA Guard State Transitions	323
Chapter 17	Configuring Media Access Control Security (MACsec) on Routers	355

	Figure 20: MPLS Diagram Between Site A and Site B	379
Chapter 19	Configuration Examples	433
	Figure 21: Network Topology for Basic Port Security	446
	Figure 22: Network Topology for Basic Port Security	450
	Figure 23: Network Topology for Basic Port Security	453
	Figure 24: Network Topology for Basic Port Security	458
	Figure 25: Network Topology for Basic Port Security	463
	Figure 26: Network Topology for Port Security Setup with Two Switches on the Same VLAN	467
	Figure 27: Network Topology for Using CoS Forwarding Classes to Prioritize Snooped and Inspected Packets	475
	Figure 28: Network Topology for Configuring DHCP Option 82 on a Switch That Is on the Same VLAN as the DHCP Clients and the DHCP Server	502
Chapter 20	Configuring DHCP Snooping to Filter DHCP Messages from Untrusted Hosts	515
	Figure 29: DHCP Server Connected Directly to a Switch	521
	Figure 30: DHCP Server Connected Directly to Switch 2, with Switch 2 Connected to Switch 1 Through a Trusted Trunk Port	521
	Figure 31: Switch Is the DHCP Server	522
	Figure 32: Switch Acting as a Relay Agent Through a Router to the DHCP Server	523
	Figure 33: DHCP Clients, Switching Device, and the DHCP Server Are All on the Same VLAN or Bridge Domain	526
	Figure 34: Switching Device Acting as an Extended Relay Server	527
Chapter 22	Configuring Layer 2 Port Security	539
	Figure 35: Network Topology for Basic Port Security	546
	Figure 36: Switching Device Network Topology for Basic Port Security	555
Part 6	Device Security	
Chapter 23	Configuring Device Security	561
	Figure 37: Symmetrically Routed Interfaces	567
	Figure 38: Asymmetrically Routed Interfaces	568
	Figure 39: Unicast RPF Sample Topoolgy	576
Chapter 24	Storm Control	585
	Figure 40: Example Storm Control to Prevent Network Outages	604
Chapter 25	Configuring IP Source Guard to Prevent IP Spoofing Attacks	615
	Figure 41: Network Topology for Basic Port Security	623
	Figure 42: Network Topology for Basic Port Security	628

List of Tables

	About the Documentation	xxxiii
	Table 1: Notice Icons	xxxv
	Table 2: Text and Syntax Conventions	xxxv
Part 2	Distributed Denial-of-Service (DDoS) Protection	
Chapter 3	Configuring Flow Detection for DDoS Protection	73
	Table 3: Triggering Event for Flow Detection Reports	76
	Table 4: Triggering Event for Bandwidth Violation Reports	76
Part 3	IPsec	
Chapter 4	Understanding How IPsec Secures Network Traffic	95
	Table 5: Comparison of IPsec Configuration Statements and Operational Mode Commands for the AS and MultiServices PICs and ES PIC	96
	Table 6: Authentication and Encryption Key Lengths	97
	Table 7: Weak and Semiweak Keys	98
Chapter 6	Configuring IPsec Security Associations	117
	Table 8: IKE and IPsec Proposal and Policy Default Values for the AS and MultiServices PICs	137
Chapter 9	Configuring IPsec Dynamic Endpoints	233
	Table 9: Default IKE and Proposals for Dynamic SA Negotiations	234
Part 5	Port Security	
Chapter 14	Port Security Overview	265
	Table 10: DHCPv6 Messages and Equivalent DHCPv4 Messages	275
	Table 11: Components of the Port Security Topology	291
Chapter 15	Enabling IPv6 ND Inspection and RA Guard to Prevent IPv6 Spoofing Attacks	319
	Table 12: IPv6 RA guard states	323
Chapter 17	Configuring Media Access Control Security (MACsec) on Routers	355
	Table 13: Components of the MPLS Topology	357
	Table 14: MACsec Connectivity Association Summary	358
	Table 15: Bridge Domains Summary	358
	Table 16: Components of the MPLS Topology	379
	Table 17: MACsec Connectivity Association Summary	380
	Table 18: VLANs Summary	381
	Table 19: Line cards supporting MACsec on MX series and PTX series Routers	401

Chapter 18	Configuring Media Access Control Security (MACsec) on Switches	403
	Table 20: MACsec Hardware and Software Support Summary for EX Series and QFX Series Switches	410
Chapter 19	Configuration Examples	433
	Table 21: Components of the Port Security Topology	446
	Table 22: Components of the Port Security Topology	450
	Table 23: Components of the Port Security Topology	453
	Table 24: Components of the Port Security Topology	458
	Table 25: Components of the Port Security Topology	463
	Table 26: Components of Port Security Setup on Switch 1 with a DHCP Server Connected to Switch 2	467
	Table 27: Components of the Topology for Using CoS Forwarding Classes to Prioritize Snooped and Inspected Packets	475
Chapter 20	Configuring DHCP Snooping to Filter DHCP Messages from Untrusted Hosts	515
	Table 28: DHCPv6 Messages and DHCPv4 Equivalent Messages	519
Chapter 22	Configuring Layer 2 Port Security	539
	Table 29: Components of the Port Security Topology	546
	Table 30: Components of the Port Security Topology	555
Part 6	Device Security	
Chapter 25	Configuring IP Source Guard to Prevent IP Spoofing Attacks	615
	Table 31: Components of the Port Security Topology	623
	Table 32: Components of the Port Security Topology	628
Part 7	Configuration Statements and Operational Commands	
Chapter 28	Configuration Statements	649
	Table 33: Security Services Configuration Statements	658
	Table 34: Unified Forwarding Table Profiles	784
	Table 35: Packet Types Supported by DDoS Protection on QFX Switches	940
	Table 36: Protocol Groups Supported by DDoS Protection on QFX Switches	942
	Table 37: show ddos-protection protocols culprit-flows Output Fields	974
	Table 38: show ddos-protection protocols flow-detection Output Fields	981
Chapter 29	Operational Commands	1047
	Table 39: show security macsec connections Output Fields	1071
	Table 40: show access-security router-advertisement state Output Fields	1104
	Table 41: show access-security router-advertisement statistics Output Fields	1106
	Table 42: show arp inspection statistics Output Fields	1108
	Table 43: Supported Protocol Groups	1115
	Table 44: show ddos-protection protocols Output Fields	1121
	Table 45: show ddos-protection protocols parameters Output Fields	1132
	Table 46: show ddos-protection protocols statistics Output Fields	1139
	Table 47: show ddos-protection protocols violations Output Fields	1148
	Table 48: show ddos-protection statistics Output Fields	1150

Table 49: show ddos-protection version Output Fields	1152
Table 50: show dhcp snooping binding Output Fields	1154
Table 51: show dhcp snooping statistics Output Fields	1156
Table 52: show dhcp-security arp inspection statistics Output Fields	1157
Table 53: show dhcp-security binding Output Fields	1160
Table 54: show dhcp-security binding ip-source-guard Output Fields	1162
Table 55: show dhcp-security ipv6 binding Output Fields	1165
Table 56: show dhcp-security ipv6 statistics Output Fields	1167
Table 57: show dhcp-security neighbor-discovery-inspection statistics Output Fields	1169
Table 58: show dhcp snooping binding Output Fields	1171
Table 59: show dhcpv6 snooping statistics Output Fields	1173
Table 60: show ethernet-switching table Output Fields	1177
Table 61: show ethernet-switching table Output Fields	1178
Table 62: show ethernet-switching table Output fields	1178
Table 63: show ethernet-switching table Output Fields	1179
Table 64: show ike security-associations Output Fields	1197
Table 65: show ipsec certificates Output Fields	1201
Table 66: show ipsec security-associations Output Fields	1204
Table 67: show ip-source-guard Output Fields	1207
Table 68: show ipv6-source-guard Output Fields	1209
Table 69: show neighbor-discovery-inspection statistics Output Fields	1211
Table 70: show security keychain Output Fields	1212
Table 71: show security macsec connections Output Fields	1215
Table 72: show security macsec connections Output Fields	1217
Table 73: show security macsec statistics Output Fields	1220
Table 74: show security mka sessions Output Fields	1225
Table 75: show security mka sessions Output Fields	1227
Table 76: show security mka statistics Output Fields	1230
Table 77: show security mka sessions Output Fields	1232
Table 78: show security pki ca-certificate Output Fields	1235
Table 79: show security pki certificate-request Output Fields	1239
Table 80: show security pki crl Output Fields	1241
Table 81: show security pki local-certificate Output Fields	1244
Table 82: show services ipsec-vpn certificates Output Fields	1247
Table 83: show services ipsec-vpn ike security-associations Output Fields . . .	1250
Table 84: show services ipsec-vpn ipsec security-associations Output Fields . .	1255
Table 85: show services ipsec-vpn ipsec statistics Output Fields	1261
Table 86: show system certificate Output Fields	1265

About the Documentation

- Documentation and Release Notes on page xxxiii
- Using the Examples in This Manual on page xxxiii
- Documentation Conventions on page xxxv
- Documentation Feedback on page xxxvii
- Requesting Technical Support on page xxxvii

Documentation and Release Notes

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <https://www.juniper.net/documentation/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <https://www.juniper.net/books>.

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
```

```
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

Documentation Conventions

Table 1 on page xxxv defines notice icons used in this guide.

Table 1: Notice Icons







Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xxxv defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure

Table 2: Text and Syntax Conventions (continued)

Convention	Description	Examples
Fixed-width text like this	Represents output that appears on the terminal screen.	<code>user@host> show chassis alarms</code> <code>No alarms currently active</code>
<i>Italic text like this</i>	<ul style="list-style-type: none"> Introduces or emphasizes important new terms. Identifies guide names. Identifies RFC and Internet draft titles. 	<ul style="list-style-type: none"> A policy <i>term</i> is a named structure that defines match conditions and actions. <i>Junos OS CLI User Guide</i> RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level. The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	<code>stub <default-metric metric>;</code>
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<code>broadcast multicast</code> <code>(string1 string2 string3)</code>
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<code>rsvp { # Required for dynamic MPLS only</code>
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	<code>community name members [community-ids]</code>
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop address; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
GUI Conventions		
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> In the Logical Interfaces box, select All Interfaces. To cancel the configuration, click Cancel.


Table 2: Text and Syntax Conventions (continued)

Convention	Description	Examples
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback so that we can improve our documentation. You can use either of the following methods:

- Online feedback system—Click TechLibrary Feedback, on the lower right of any page on the [Juniper Networks TechLibrary](#) site, and do one of the following:



- Click the thumbs-up icon if the information on the page was helpful to you.
- Click the thumbs-down icon if the information on the page was not helpful to you or if you have suggestions for improvement, and use the pop-up form to provide feedback.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <https://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <https://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <https://www.juniper.net/customers/support/>
- Search for known bugs: <https://prsearch.juniper.net/>
- Find product documentation: <https://www.juniper.net/documentation/>
- Find solutions and answer questions using our Knowledge Base: <https://kb.juniper.net/>
- Download the latest versions of software and review release notes: <https://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum: <https://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <https://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://entitlementsearch.juniper.net/entitlementsearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <https://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <https://www.juniper.net/support/requesting-support.html>.

PART 1

SSH and SSL Digital Certificates

- [Configuring Digital Certificates on page 3](#)

CHAPTER 1

Configuring Digital Certificates

- [Digital Certificates Overview on page 3](#)
- [Configuring SSH Host Keys for Secure Copying of Data on page 4](#)
- [Importing SSL Certificates for Junos XML Protocol Support on page 7](#)
- [Configuration Statements for Setting Up Digital Certificates for an ES PIC on page 8](#)
- [Obtaining a Certificate from a Certificate Authority for an ES PIC on page 9](#)
- [Requesting a CA Digital Certificate for an ES PIC on an M Series or T Series Router on page 9](#)
- [Example: Requesting a CA Digital Certificate on page 10](#)
- [Generating a Private and Public Key Pair for Digital Certificates for an ES PIC on page 10](#)
- [Obtaining a Signed Certificate from the CA for an ES PIC on page 10](#)
- [Configuring Digital Certificates for an ES PIC on page 11](#)
- [Configuring an IKE Policy for Digital Certificates for an ES PIC on page 16](#)
- [Associating the Configured Security Association with a Logical Interface on page 18](#)
- [Configuring Digital Certificates for Adaptive Services Interfaces on page 18](#)
- [Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 27](#)

Digital Certificates Overview

A digital certificate provides a way of authenticating users through a trusted third-party called a certificate authority (CA). The CA validates the identity of a certificate holder and “signs” the certificate to attest that it has not been forged or altered.

A certificate includes the following information:

- The distinguished name (DN) of the owner. A DN is a unique identifier and consists of a fully qualified name including the common name (CN) of the owner, the owner’s organization, and other distinguishing information.
- The public key of the owner.
- The date on which the certificate was issued.
- The date on which the certificate expires.

- The distinguished name of the issuing CA.
- The digital signature of the issuing CA.

The additional information in a certificate allows recipients to decide whether to accept the certificate. The recipient can determine if the certificate is still valid based on the expiration date. The recipient can check whether the CA is trusted by the site based on the issuing CA.

With a certificate, a CA takes the owner's public key, signs that public key with its own private key, and returns this to the owner as a certificate. The recipient can extract the certificate (containing the CA's signature) with the owner's public key. By using the CA's public key and the CA's signature on the extracted certificate, the recipient can validate the CA's signature and owner of the certificate.

When you use digital certificates, your first step is to send in a request to obtain a certificate from your CA. You then configure digital certificates and a digital certificate IKE policy. Finally, you obtain a digitally signed certificate from a CA.



NOTE: Certificates without an alternate subject name are not appropriate for IPsec services.

**Related
Documentation**

- [Configuration Statements for Configuring Digital Certificates for an ES PIC on page 8](#)
- [Obtaining a Certificate from a Certificate Authority for an ES PIC on page 9](#)
- [Requesting a CA Digital Certificate for an ES PIC on an M Series or T Series Router on page 9](#)
- [Generating a Private and Public Key Pair for Digital Certificates for an ES PIC on page 10](#)
- [Configuring Digital Certificates for an ES PIC on page 11](#)
- [Configuring an IKE Policy for Digital Certificates for an ES PIC on page 16](#)
- [Associating the Configured Security Association with a Logical Interface on page 18](#)

Configuring SSH Host Keys for Secure Copying of Data

Secure Shell (SSH) uses encryption algorithms to generate a host, server, and session key system that ensures secure data transfer. You can configure SSH host keys to support secure copy (SCP) as an alternative to FTP for the background transfer of data such as configuration archives and event logs. To configure SSH support for SCP, you must complete the following tasks:

- Specify SSH known hosts by including hostnames and host key information in the Routing Engine configuration hierarchy.
- Set an SCP URL to specify the host from which to receive data. Setting this attribute automatically retrieves SSH host key information from the SCP server.

- Verify that the host key is authentic.
- Accept the secure connection. Accepting this connection automatically stores host key information in the local host key database. Storing host key information in the configuration hierarchy automates the secure handshake and allows background data transfer using SCP.

Tasks to configure SSH host keys for secure copying of data are:

1. [Configuring SSH Known Hosts on page 5](#)
2. [Configuring Support for SCP File Transfer on page 5](#)
3. [Updating SSH Host Key Information on page 6](#)

Configuring SSH Known Hosts

To configure SSH known hosts, include the **host** statement, and specify hostname and host key options for trusted servers at the **[edit security ssh-known-hosts]** hierarchy level:

```
[edit security ssh-known-hosts]
host corporate-archive-server, ip-address {
    dsa-key key;
}
host archive-server-url {
    rsa-key key;
}
host server-with-ssh-version-1, ip-address {
    rsa1-key key;
}
```

Host keys are one of the following:

- **dsa-key key**—Base64 encoded Digital Signature Algorithm (DSA) key for SSH version 2.
- **ecdsa-sha2-nistp256-key key**—Base64 encoded ECDSA-SHA2-NIST256 key.
- **ecdsa-sha2-nistp384-key key**—Base64 encoded ECDSA-SHA2-NIST384 key.
- **ecdsa-sha2-nistp521-key key**—Base64 encoded ECDSA-SHA2-NIST521 key.
- **ed25519-key key**—Base64 encoded ED25519 key.
- **rsa-key key**—Base64 encoded public key algorithm that supports encryption and digital signatures for SSH version 1 and SSH version 2.
- **rsa1-key key**—Base64 encoded RSA public key algorithm, which supports encryption and digital signatures for SSH version 1.

Starting in Junos OS Release 18.3R1, the **ssh-dss** and **ssh-dsa** hostkey algorithms are deprecated— rather than immediately removed—to provide backward compatibility and a chance to bring your configuration into compliance with the new configuration.

Configuring Support for SCP File Transfer

To configure a known host to support background SCP file transfers, include the **archive-sites** statement at the **[edit system archival configuration]** hierarchy level.

```
[edit system archival configuration]
archive-sites {
  scp://username<:password>@host<:port>/url-path;
}
```



NOTE: When specifying a URL in a Junos OS statement using an IPv6 host address, you must enclose the entire URL in quotation marks (") and enclose the IPv6 host address in brackets ([]). For example, "scp://username<:password>@[host]<:port>/url-path";

Setting the **archive-sites** statement to point to an SCP URL triggers automatic host key retrieval. At this point, Junos OS connects to the SCP host to fetch the SSH public key, displays the host key message digest or fingerprint as output to the console, and terminates the connection to the server.

```
user@host# set system archival configuration archive-sites "<scp-url-path>"
The authenticity of host <my-archive-server (<server-ip-address>)> can't be established.
RSA key fingerprint is <ascii-text key>. Are you sure you want to continue connecting
(yes/no)?
```

To verify that the host key is authentic, compare this fingerprint with a fingerprint that you obtain from the same host using a trusted source. If the fingerprints are identical, accept the host key by entering **yes** at the prompt. The host key information is then stored in the Routing Engine configuration and supports background data transfers using SCP.

Updating SSH Host Key Information

Typically, SSH host key information is automatically retrieved when you set a URL attribute for SCP using the **archival configuration archive-sites** statement at the **[edit system]** hierarchy level. However, if you need to manually update the host key database, use one of the following methods.

1. [Retrieving Host Key Information Manually on page 6](#)
2. [Importing Host Key Information from a File on page 6](#)

Retrieving Host Key Information Manually

To manually retrieve SSH public host key information, use the **fetch-from-server** option with the **set security ssh-known-hosts** command. You must include a hostname attribute with the **set security ssh-known-hosts fetch-from-server** command to specify the host from which to retrieve the SSH public key.

```
user@host# set security ssh-known-hosts fetch-from-server <hostname>
```

Importing Host Key Information from a File

To manually import SSH host key information from the known-hosts file located at **/var/tmp/known-hosts** on the server, include the **load-key-file** option with the **set security ssh-known-hosts** command. You must include the path to the **known-hosts** file with the **set security ssh-known-hosts load-key-file** command to specify the location from which to import host key information.


```
user@host# set security ssh-known-hosts load-key-file /var/tmp/known-hosts
```

See Also • [Importing SSL Certificates for Junos XML Protocol Support on page 7](#)

Importing SSL Certificates for Junos XML Protocol Support



NOTE: For FIPS mode, the digital security certificates must be compliant with the National Institute of Standards and Technology (NIST) SP 800-131A standard.

A Junos XML protocol client application can use one of four protocols to connect to the Junos XML protocol server on a router or switch: clear-text (a Junos XML protocol-specific protocol for sending unencrypted text over a TCP connection), SSH, SSL, or Telnet. For clients to use the SSL protocol, you must copy an X.509 authentication certificate onto the router or switch, as described in this topic. You must also include the **xnm-ssl** statement at the **[edit system services]** hierarchy level.



NOTE: The **xnm-ssl** statement does not apply to standard IPsec services.

After obtaining an X.509 authentication certificate and private key, copy it to the router or switch by including the **local** statement at the **[edit security certificates]** hierarchy level:

```
[edit security certificates]
local certificate-name {
  load-key-file (filename | url);
}
```

certificate-name is a name you choose to identify the certificate uniquely (for example, **Junos XML protocol-ssl-client-hostname**, where **hostname** is the computer where the client application runs).

filename is the pathname of the file on the local disk that contains the paired certificate and private key (assuming you have already used another method to copy them to the router's or switch's local disk).

url is the URL to the file that contains a paired certificate and private key (for instance, on the computer where the Junos XML protocol client application runs).



NOTE: The CLI expects the private key in the *URL-or-path* file to be unencrypted. If the key is encrypted, the CLI prompts you for the passphrase associated with it, decrypts it, and stores the unencrypted version.

The `load-key-file` statement acts as a directive that copies the contents of the certificate file into the configuration. When you view the configuration, the CLI displays the string of characters that constitute the private key and certificate, marking them as `SECRET-DATA`. The `load-key-file` keyword is not recorded in the configuration.

- Related Documentation**
- [Configuring SSH Host Keys for Secure Copying of Data on page 4](#)
 - [Configuring clear-text or SSL Service for Junos XML Protocol Client Applications](#)

Configuration Statements for Setting Up Digital Certificates for an ES PIC

To define the digital certificate configuration for an encryption service interface, include the following statements at the `[edit security certificates]` and `[edit security ike]` hierarchy levels:

```
[edit security]
certificates {
  cache-size bytes;
  cache-timeout-negative seconds;
  certification-authority ca-profile-name {
    ca-name ca-identity;
    crl filename;
    encoding (binary | pem);
    enrollment-url url-name;
    file certificate-filename;
    ldap-url url-name;
  }
  enrollment-retry attempts;
  local certificate-filename {
    certificate-key-string;
    load-key-file URL key-file-name;
  }
  maximum-certificates number;
  path-length certificate-path-length;
}
ike {
  policy ike-peer-address {
    description policy;
    encoding (binary | pem);
    identity identity-name;
    local-certificate certificate-filename;
    local-key-pair private-public-key-file;
    mode (aggressive | main);
    pre-shared-key (ascii-text key | hexadecimal key);
    proposals [ proposal-names ];
  }
}
```

```
}

```

The statements for configuring digital certificates differ for the AS and MultiServices PICs and the ES PIC.

For information about how to configure the **description** and **mode** statements, see [“Configuring the Description for an IKE Policy” on page 211](#). For information about how to configure the IKE proposal, see [“Associating Proposals with an IKE Policy” on page 212](#)



NOTE: For digital certificates, the Junos OS supports only VeriSign CAs for the ES PIC.

Related Documentation

- [Digital Certificates Overview on page 3](#)

Obtaining a Certificate from a Certificate Authority for an ES PIC

Certificate authorities (CAs) manage certificate requests and issue certificates to participating IPsec network devices. When you create a certificate request, you need to provide the information about the owner of the certificate. The required information and its format vary across certificate authorities.

Certificates use names in the X.500 format, a directory access protocol that provides both read and update access. The entire name is called a DN (distinguished name). It consists of a set of components, which often includes a CN (common name), an organization (O), an organization unit (OU), a country (C), a locality (L), and so on.



NOTE: For the dynamic registration of digital certificates, the Junos OS supports only the Simple Certificate Enrollment Protocol (SCEP).

Related Documentation

- [Digital Certificates Overview on page 3](#)

Requesting a CA Digital Certificate for an ES PIC on an M Series or T Series Router

For an encryption interface on an M Series or T Series router, issue the following command to obtain a public key certificate from a CA. The results are saved in the specified file in the `/var/etc/ikecert` directory. The CA public key verifies certificates from remote peers.

```
user@host> request security certificate enroll filename filename ca-name ca-name
parameters parameters
```

Related Documentation

- [Example: Requesting a CA Digital Certificate on page 10](#)
- [Digital Certificates Overview on page 3](#)

Example: Requesting a CA Digital Certificate

Specify a URL to the SCEP server and the name of the certification authority whose certificate you want: **mycompany.com**. **filename** 1 is name of the file that stores the result. The output, "Received CA certificate:" provides the signature for the certificate, which allows you to verify (offline) that the certificate is genuine.

```
user@host> request security certificate enroll filename ca_verisign ca-file verisign ca-name
xyzcompany url
http://hostname/path/filename
URL: http://hostname/path/filename name: example.com CA file: verisign Encoding: binary
Certificate enrollment has started. To see the certificate enrollment status, check the key
management process (kmd) log file at /var/log/kmd. <-----
```



NOTE: Each router is initially manually enrolled with a certificate authority.

Related Documentation

- [Requesting a CA Digital Certificate for an ES PIC on an M Series or T Series Router on page 9](#)

Generating a Private and Public Key Pair for Digital Certificates for an ES PIC

To generate a private and public key, issue the following command:

```
user@host> request security key-pair name size key-size type ( rsa | dsa )
```

name specifies the filename in which to store the public and private keys.

key-size can be 512, 1024, 1596, or 2048 bytes. The default key size is 1024 bytes.

type can be **rsa** or **dsa**. The default is RSA.



NOTE: When you use SCEP, the Junos OS only supports RSA.

The following example shows how to generate a private and public key pair:

```
user@host> request security key-pair batt
Generated key pair, key size 1024, file batt Algorithm RSA
```

Related Documentation

- [Digital Certificates Overview on page 3](#)

Obtaining a Signed Certificate from the CA for an ES PIC

To obtain a signed certificate from the CA, issue the following command:

```
user@host> request security certificate enroll filename filename subject c=us,o=x
alternative-subject certificate-ip-address certification-authority certificate-authority
key-file key-file-name domain-name domain-name
```

The results are saved in a specified file to the `/var/etc/ikecert` directory.

The following example shows how to obtain a CA signed certificate by referencing the configured **certification-authority** statement `local`. This statement is referenced by the **request security certificate enroll filename *filename* subject *subject* alternative-subject *alternative-subject* certification-authority *certification-authority*** command.

```
[edit]
security {
  certificates {
    certification-authority local {
      ca-name xyz.company.com;
      file l;
      enrollment-url "http://www.xyzcompany.com";
    }
  }
}
```

To obtain a signed certificate from the CA, issue the following command:

```
user@host> request security certificate enroll filename l subject c=uk,o=london
alternative-subject 10.50.1.4 certification-authority verisign key-file host-l.prv
domain-name host.xyzcompany.com
CA name: xyz.company.com CA file: ca_verisign
local pub/private key pair: host.prv
subject: c=uk,o=london domain name: host.example.com
alternative subject: 10.50.1.4
Encoding: binary
Certificate enrollment has started. To see the certificate enrollment status, check the key
management process (kmd) log file at /var/log/kmd. <-----
```

For information about how to use the operational mode commands to obtain a signed certificate, see the [CLI Explorer](#).

Another way to obtain a signed certificate from the CA is to reference the configured statements such as the URL, CA name, and CA certificate file by means of the **certification-authority** statement:

```
user@host> request security certificate enroll filename m subject c=us,o=x
alternative-subject 192.0.2.1 certification-authority local key-file y domain-name
abc.company.com
```

Related Documentation

- [Digital Certificates Overview on page 3](#)

Configuring Digital Certificates for an ES PIC

Digital certificates provide a way of authenticating users through a trusted third party called a certificate authority (CA). The CA validates the identity of a certificate holder and “signs” the certificate to attest that it has not been forged or altered.

To define the digital certificate configuration for an encryption service interface, include the following statements at the **[edit security certificates]** and **[edit security ike]** hierarchy levels:

```
[edit security]
certificates {
  cache-size bytes;
  cache-timeout-negative seconds;
  certification-authority ca-profile-name {
    ca-name ca-identity;
    crl filename;
    encoding (binary | pem);
    enrollment-url url-name;
    file certificate-filename;
    ldap-url url-name;
  }
  enrollment-retry attempts;
  local certificate-filename {
    certificate-key-string;
    load-key-file URL key-file-name;
  }
  maximum-certificates number;
  path-length certificate-path-length;
}
ike {
  policy ike-peer-address {
    description policy;
    encoding (binary | pem);
    identity identity-name;
    local-certificate certificate-filename;
    local-key-pair private-public-key-file;
    mode (aggressive | main);
    pre-shared-key (ascii-text key | hexadecimal key);
    proposals [ proposal-names ];
  }
}
```

Tasks to configure digital certificates for ES PICs are:

- [Configuring the Certificate Authority Properties for an ES PIC on page 12](#)
- [Configuring the Cache Size on page 14](#)
- [Configuring the Negative Cache on page 15](#)
- [Configuring the Number of Enrollment Retries on page 15](#)
- [Configuring the Maximum Number of Peer Certificates on page 15](#)
- [Configuring the Path Length for the Certificate Hierarchy on page 16](#)

Configuring the Certificate Authority Properties for an ES PIC

A CA is a trusted third-party organization that creates, enrolls, validates, and revokes digital certificates.

To configure a certificate authority and its properties for an ES PIC, include the following statements at the `[edit security certificates]` hierarchy level:

```
[edit security certificates]
certification-authority ca-profile-name {
  ca-name ca-identity;
  crl filename;
```

```
encoding (binary | pem);
enrollment-url url-name;
file certificate-filename;
ldap-url url-name;
}
```

ca-profile-name is the CA profile name.

Tasks for configuring the CA properties are:

1. [Specifying the Certificate Authority Name on page 13](#)
2. [Configuring the Certificate Revocation List on page 13](#)
3. [Configuring the Type of Encoding Your CA Supports on page 13](#)
4. [Specifying an Enrollment URL on page 14](#)
5. [Specifying a File to Read the Digital Certificate on page 14](#)
6. [Specifying an LDAP URL on page 14](#)

Specifying the Certificate Authority Name

If you are enrolling with a CA using simple certificate enrollment protocols (SCEP), you need to specify the CA name (CA identity) that is used in the certificate request, in addition to the URL for the SCEP server.

To specify the name of the CA identity, include the **ca-name** statement at the **[edit security certificates certification-authority ca-profile-name]** hierarchy level:

```
[edit security certificates certification-authority ca-profile-name]
ca-name ca-identity;
```

ca-identity specifies the CA identity to use in the certificate request. It is typically the CA domain name.

Configuring the Certificate Revocation List

A certificate revocation list (CRL) contains a list of digital certificates that have been canceled before their expiration date. When a participating peer uses a digital certificate, it checks the certificate signature and validity. It also acquires the most recently issued CRL and checks that the certificate serial number is not on that CRL.

To configure the CA certificate revocation list, include the **crl** statement and specify the file from which to read the CRL at the **[edit security certificates certification-authority ca-profile-name]** hierarchy level:

```
[edit security certificates certification-authority ca-profile-name]
crl filename;
```

Configuring the Type of Encoding Your CA Supports

By default, encoding is set to binary. Encoding specifies the file format used for the **local-certificate** and **local-key-pair** statements. By default, the binary (distinguished encoding rules) format is enabled. Privacy-enhanced mail (PEM) is an ASCII base 64 encoded format. Check with your CA to determine which file formats it supports.

To configure the file format that your CA supports, include the **encoding** statement and specify a binary or PEM format at the **[edit security certificates certification-authority *ca-profile-name*]** hierarchy level:

```
[edit security certificates certification-authority ca-profile-name]  
  encoding (binary | pem);
```

Specifying an Enrollment URL

You specify the CA location where your router or switch sends SCEP-based certificate enrollment requests. To specify the CA location by naming the CA URL, include the **enrollment-url** statement at the **[edit security certificates certification-authority *ca-profile-name*]** hierarchy level:

```
[edit security certificates certification-authority ca-profile-name]  
  enrollment-url url-name;
```

url-name is the CA location. The format is **http://*ca-name***, where ***ca-name*** is the CA host DNS name or IP address.

Specifying a File to Read the Digital Certificate

To specify the file from which to read the digital certificate, include the **file** statement and specify the certificate filename at the **[edit security certificates certification-authority *ca-profile-name*]** hierarchy level:

```
[edit security certificates certification-authority ca-profile-name]  
  file certificate-filename;
```

Specifying an LDAP URL

If your CA stores its current CRL at its Lightweight Directory Access Protocol (LDAP) server, you can optionally check your CA CRL list before using a digital certificate. If the digital certificate appears on the CA CRL, your router or switch cannot use it. To access your CA CRL, include the **ldap-url** statement at the **[edit security certificates certification-authority *ca-profile-name*]** hierarchy level:

```
[edit security certificates certification-authority ca-profile-name]  
  ldap-url url-name;
```

url-name is the certification authority LDAP server name. The format is **ldap://*server-name***, where ***server-name*** is the CA host DNS name or IP address.

Configuring the Cache Size

By default, the cache size is 2 megabytes (MB). To configure total cache size for digital certificates, include the **cache-size** statement at the **[edit security certificates]** hierarchy level:

```
[edit security certificates]  
  cache-size bytes;
```

bytes is the cache size for digital certificates. The range can be from 64 through 4,294,967,295 bytes.



NOTE: We recommend that you limit your cache size to 4 MB.

Configuring the Negative Cache

Negative caching stores negative results and reduces the response time for negative answers. It also reduces the number of messages that are sent to the remote server. Maintaining a negative cache state allows the system to quickly return a failure condition when a lookup attempt is retried. Without a negative cache state, a retry would require waiting for the remote server to fail to respond, even though the system already “knows” that remote server is not responding.

By default, the negative cache is 20 seconds. To configure the negative cache, include the **cache-timeout-negative** statement at the **[edit security certificates]** hierarchy level:

```
[edit security certificates]
cache-timeout-negative seconds;
```

seconds is the amount of time for which a failed CA or router certificate is present in the negative cache. While searching for certificates with a matching CA identity (domain name for certificates or CA domain name and serial for CRLs), the negative cache is searched first. If an entry is found in the negative cache, the search fails immediately.



NOTE: Configuring a large negative cache value can make you susceptible to a denial-of-service (DoS) attack.

Configuring the Number of Enrollment Retries

By default, the number of enrollment retries is set to 0, an infinite number of retries. To specify how many times a router or switch will resend a certificate request, include the **enrollment-retry** statement at the **[edit security certificates]** hierarchy level:

```
[edit security certificates]
enrollment-retry attempts;
```

attempts is the number of enrollment retries (0 through 100).

Configuring the Maximum Number of Peer Certificates

By default, the maximum number of peer certificates to be cached is 1024. To configure the maximum number of peer certificates to be cached, include the **maximum-certificates** statement at the **[edit security certificates]** hierarchy statement level:

```
[edit security certificates]
maximum-certificates number;
```

number is the maximum number of peer certificates to be cached. The range is from 64 through 4,294,967,295 peer certificates.

Configuring the Path Length for the Certificate Hierarchy

Certification authorities can issue certificates to other CAs. This creates a tree-like certification hierarchy. The highest trusted CA in the hierarchy is called the *trust anchor*. Sometimes the trust anchor is the root CA, which is usually signed by itself. In the hierarchy, every certificate is signed by the CA immediately above it. An exception is the root CA certificate, which is usually signed by the root CA itself. In general, a chain of multiple certificates may be needed, comprising a certificate of the public key owner (the end entity) signed by one CA, and zero or more additional certificates of CAs signed by other CAs. Such chains, called certification paths, are required because a public key user is only initialized with a limited number of assured CA public keys.

Path length refers to a path of certificates from one certificate to another certificate, based on the relationship of a CA and its “children.” When you configure the **path-length** statement, you specify the maximum depth of the hierarchy to validate a certificate from the trusted root CA certificate to the certificate in question. For more information about the certificate hierarchy, see RFC 3280, *Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile*.

By default, the maximum certificate path length is set to 15. The root anchor is 1.

To configure path length, include the **path-length** statement at the **[edit security certificates]** hierarchy level:

```
[edit security certificates]
  path-length certificate-path-length;
```

certificate-path-length is the maximum number certificates for the certificate path length. The range is from 2 through 15 certificates.

- See Also**
- [Configuring an IKE Policy for Digital Certificates for an ES PIC on page 16](#)
 - [Digital Certificates Overview on page 3](#)
 - [Configuring Digital Certificates for Adaptive Services Interfaces on page 18](#)

Configuring an IKE Policy for Digital Certificates for an ES PIC

An IKE policy for digital certificates defines a combination of security parameters (IKE proposals) to be used during IKE negotiation. It defines a peer address and the proposals needed for that connection. During the IKE negotiation, IKE looks for an IKE policy that is the same on both peers. The peer that initiates the negotiation sends all its policies to the remote peer, and the remote peer tries to find a match.

To configure an IKE policy for digital certificates for an ES PIC, include the following statements at the **[edit security ike policy ike-peer-address]** hierarchy level:

```
[edit security ike]
  policy ike-peer-address{
    encoding (binary | pem);
    identity identity-name;
    local-certificate certificate-filename;
```

```

    local-key-pair private-public-key-file;
}

```

Tasks for configuring an IKE policy for digital certificates are:

1. [Configuring the Type of Encoding Your CA Supports on page 17](#)
2. [Configuring the Identity to Define the Remote Certificate Name on page 17](#)
3. [Specifying the Certificate Filename on page 17](#)
4. [Specifying the Private and Public Key File on page 17](#)

Configuring the Type of Encoding Your CA Supports

By default, the encoding is set to binary. Encoding specifies the file format used for the **local-certificate** and **local-key-pair** statements. By default, the binary (distinguished encoding rules) format is enabled. PEM is an ASCII base 64 encoded format. Check with your CA to determine which file formats it supports.

To configure the file format that your CA supports, include the **encoding** statement and specify a binary or PEM format at the **[edit security ike policy ike-peer-address]** hierarchy level:

```

[edit security ike policy ike-peer-address ]
encoding (binary | pem);

```

Configuring the Identity to Define the Remote Certificate Name

To define the remote certificate name, include the **identity** statement at the **[edit security ike policy ike-peer-address]** hierarchy level:

```

[edit security ike policy ike-peer-address]
identity identity-name;

```

identity-name defines the identity of the remote certificate name if the identity cannot be learned through IKE (ID payload or IP address).

Specifying the Certificate Filename

To configure the certificate filename from which to read the local certificate, include the **local-certificate** statement at the **[edit security ike policy ike-peer-address]** hierarchy level:

```

[edit security ike policy ike-peer-address]
local-certificate certificate-filename;

```

certificate-filename specifies the file from which to read the local certificate.

Specifying the Private and Public Key File

To specify the filename from which to read the public and private key, include the **local key-pair** statement at the **[edit security ike policy ike-peer-address]** hierarchy level:

```

[edit security ike policy ike-peer-address ]
local-key-pair private-public-key-file;

```

private-public-key-file specifies the file from which to read the pair key.

See Also • [Digital Certificates Overview on page 3](#)

Associating the Configured Security Association with a Logical Interface

Configuring the ES PIC associates the configured SA with a logical interface. This configuration defines the tunnel itself (logical subunit, tunnel addresses, maximum transmission unit [MTU], optional interface addresses, and the name of the SA to apply to traffic).

The addresses configured as the tunnel source and destination are the addresses in the outer IP header of the tunnel.



NOTE: The tunnel source address must be configured locally on the router, and the tunnel destination address must be a valid address for the security gateway terminating the tunnel.

The M5, M10, M20, and M40 routers support the ES PIC.

The SA must be a valid tunnel-mode SA. The interface address and destination address listed are optional. The destination address allows the user to configure a static route to encrypt traffic. If a static route uses that destination address as the next hop, traffic is forwarded through the portion of the tunnel in which encryption occurs.

The following example shows how to configure an IPsec tunnel as a logical interface on the ES PIC. The logical interface specifies the tunnel through which the encrypted traffic travels. The `ipsec-sa` statement associates the security profile with the interface.

```
[edit interfaces]
es-0/0/0 {
  unit 0 {
    tunnel {
      source tunnel 10.5.5.5; # tunnel source address
      destination 10.6.6.6; # tunnel destination address
    }
    family inet {
      ipsec-sa ipsec-sa; # name of security association to apply to packet
      address 10.1.1.8/32 { # local interface address inside local VPN
        destination 10.2.2.254; # destination address inside remote VPN
      }
    }
  }
}
```

Related Documentation • [Configuring Security Associations for IPsec on an ES PIC on page 195](#)

Configuring Digital Certificates for Adaptive Services Interfaces

A digital certificate implementation uses the public key infrastructure (PKI), which requires that you generate a key pair consisting of a public key and a private key. The keys are

created with a random number generator and are used to encrypt and decrypt data. In networks that do not use digital certificates, an IPsec-enabled device encrypts data with the private key and IPsec peers decrypt the data with the public key.

With digital certificates, the key sharing process requires an additional level of complexity. First, you and your IPsec peers request that a certificate authority (CA) send you a CA certificate that contains the public key of the CA. Next you request the CA to assign you a local digital certificate that contains the public key and some additional information. When the CA processes your request, it signs your local certificate with the private key of the CA. Then you install the CA certificate and the local certificate in your router and load the CA in remote devices before you can establish IPsec tunnels with your peers.



NOTE: For digital certificates, the Junos OS supports VeriSign, Entrust, Cisco Systems, and Microsoft Windows CAs for the Adaptive Services (AS) and Multiservices PICs.

To define digital certificates configuration for J Series Services Routers and AS and Multiservices PICs installed on M Series and T Series routers, include the following statements at the **[edit security pki]** hierarchy level:

```
[edit security]
pki {
  ca-profile ca-profile-name {
    ca-identity ca-identity;
    enrollment {
      url-name;
      retry number-of-enrollment-attempts;
      retry-interval seconds;
    }
    revocation-check {
      disable;
      crl {
        disable on-download-failure;
        refresh-interval number-of-hours;
        url {
          url-name;
          password;
        }
      }
    }
  }
}
```

The following tasks enable you to implement digital certificates on J Series Services Routers and AS and Multiservices PICs installed on M Series and T Series routers:

1. [Configuring the Certificate Authority Properties on page 20](#)
2. [Configuring the Certificate Revocation List on page 21](#)
3. [Managing Digital Certificates on page 22](#)
4. [Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 24](#)

Configuring the Certificate Authority Properties

A CA is a trusted third-party organization that creates, enrolls, validates, and revokes digital certificates.

To configure a certificate authority and its properties for the AS and Multiservices PICs, include the following statements at the **[edit security pki]** hierarchy level:

```
[edit security pki]
ca-profile ca-profile-name {
  ca-identity ca-identity;
  enrollment {
    url url-name;
    retry number-of-attempts;
    retry-interval seconds;
  }
}
```

Tasks for configuring the Certificate Authority properties are:

1. [Specifying the CA Profile Name on page 20](#)
2. [Specifying an Enrollment URL on page 20](#)
3. [Specifying the Enrollment Properties on page 21](#)

Specifying the CA Profile Name

The CA profile contains the name and URL of the CA or RA, as well as some retry-timer settings. CA certificates issued by Entrust, VeriSign, Cisco Systems, and Microsoft are compatible with the J Series Services Routers and AS and Multiservices PICs installed in the M Series and T Series routers.

To specify the CA profile name, include the **ca-profile** statement at the **[edit security pki]** security level:

```
[edit security pki]
ca-profile ca-profile-name;
```

You also need to specify the name of the CA identity used in the certificate request. This name is typically the domain name. To specify the name of the CA identity, include the **ca-identity** statement at the **[edit security pki ca-profile ca-profile-name]** level:

```
[edit security pki ca-profile ca-profile-name]
ca-identity ca-identity;
```

Specifying an Enrollment URL

You specify the CA location where your router should send the SCEP-based certificate enrollment requests. To specify the CA location by naming the CA URL, include the **url** statement at the **[edit security pki enrollment]** hierarchy level:

```
[edit security pki ca-profile ca-profile-name enrollment]
url url-name;
```

url-name is the CA location. The format is **http://CA_name**, where **CA_name** is the CA host DNS name or IP address.

Specifying the Enrollment Properties

You can specify the number of times a router will resend a certificate request and the amount of time, in seconds, the router should wait between enrollment attempts.

By default, the number of enrollment retries is set to 0, an infinite number of retries. To specify how many times a router will resend a certificate request, include the **retry number-of-attempts** statement at the **[edit security pki ca-profile ca-profile-name enrollment]** hierarchy level:

```
[edit security pki ca-profile ca-profile-name enrollment]
  retry number-of-attempts;
```

The range for **number-of-attempts** is from 0 through 100.

To specify the amount of time, in seconds, that a router should wait between enrollment attempts, include the **retry-interval seconds** statement at the **[edit security pki ca-profile ca-profile-name enrollment]** hierarchy level:

```
[edit security pki ca-profile ca-profile-name enrollment]
  retry-interval seconds;
```

The range for **seconds** is from 0 through 3600.

Configuring the Certificate Revocation List

Tasks to configure the certificate revocation list are:

1. [Specifying an LDAP URL on page 21](#)
2. [Configuring the Interval Between CRL Updates on page 22](#)
3. [Overriding Certificate Verification if CRL Download Fails on page 22](#)

Specifying an LDAP URL

You can specify the URL for the Lightweight Directory Access Protocol (LDAP) server where your CA stores its current CRL. If the CA includes the Certificate Distribution Point (CDP) in the digital certificate, you do not need to specify a URL for the LDAP server. The CDP is a field within the certificate that contains information about how to retrieve the CRL for the certificate. The router uses this information to download the CRL automatically.

Configure an LDAP URL if you want to use a different CDP from the one specified in the certificate. Any LDAP URL you configure takes precedence over the CDP included in the certificate.

You can configure up to three URLs for each CA profile.

If the LDAP server requires a password to access the CRL, you need to include the **password** statement.

To configure the router to retrieve the CRL from the LDAP server, include the **url** statement and specify the URL name at the **[edit security pki ca-profile ca-profile-name revocation-check crl]** hierarchy level:

```
[edit security pki ca-profile ca-profile-name revocation-check crl]
url {
  url-name;
}
```

url-name is the certificate authority LDAP server name. The format is `ldap://server-name`, where **server-name** is the CA host DNS name or IP address.

To specify to use a password to access the CRL, include the **password** statement at the `[edit security pki ca-profile ca-profile-name revocation-check crl url]` hierarchy level:

```
[edit security pki ca-profile ca-profile-name revocation-check crl url]
password password;
```

password is the secret password that the LDAP server requires for access.

Configuring the Interval Between CRL Updates

By default, the time interval between CRL updates is 24 hours. To configure the amount of time between CRL updates, include the **refresh-interval** statement at the `[edit security pki ca-profile ca-profile-name revocation-check crl]` hierarchy level:

```
[edit security pki ca-profile ca-profile-name revocation-check crl]
refresh-interval number-of-hours;
```

The range for number of hours is from 0 through 8784.

Overriding Certificate Verification if CRL Download Fails

By default, if the router either cannot access the LDAP URL or retrieve a valid certificate revocation list, certificate verification fails and the IPsec tunnel is not established. To override this behavior and permit the authentication of the IPsec peer when the CRL is not downloaded, include the **disable on-download-failure** statement at the `[edit security pki ca-profile ca-profile-name revocation-check crl]` hierarchy level:

```
[edit security pki ca-profile ca-profile-name revocation-check crl]
disable on-download-failure;
```

Managing Digital Certificates

After you configure the CA profile, you can request a CA certificate from the trusted CA. Next, you must generate a public/private key pair. When the key pair is available, you can generate a local certificate either online or manually.

Tasks to manage digital certificates are:

1. [Requesting a CA Digital Certificate for AS and Multiservices PICs installed on M Series and T Series Routers on page 23](#)
2. [Generating a Public/Private Key Pair on page 23](#)
3. [Generating and Enrolling a Local Digital Certificate on page 23](#)

Requesting a CA Digital Certificate for AS and Multiservices PICs installed on M Series and T Series Routers

For J Series Services Routers and AS and Multiservices PICs installed on M Series and T Series routers, issue the following command to obtain a digital certificate from a CA. Specify a configured **ca-profile-name** to request a CA certificate from the trusted CA.

```
user@host>request security pki ca-certificate enroll ca-profile ca-profile-name
```

For information about how to configure a CA profile, see [“Configuring the Certificate Authority Properties” on page 20](#).

In this example, the certificate is enrolled online and installed into the router automatically.

```
user@host> request security pki ca-certificate enroll ca-profile entrust
```

Received following certificates:

Certificate: C=us, O=juniper

Fingerprint:00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10

Certificate: C=us, O=juniper, CN=First Officer

Fingerprint:bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17

Certificate: C=us, O=juniper, CN=First Officer

Fingerprint:46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f

Do you want to load the above CA certificate ? [yes,no] (no) yes



NOTE: If you obtain the CA certificate directly from the CA (for example, as an e-mail attachment or Web site download), you can install it with the **request security pki ca-certificate load** command. For more information, see the [CLI Explorer](#).

Generating a Public/Private Key Pair

After obtaining a certificate for an AS PIC or Multiservices PIC, you must generate a public-private key before you can generate a local certificate. The public key is included in the local digital certificate and the private key is used to decrypt data received from peers. To generate a public-private key pair, issue the **request security pki generate-key-pair certificate-id certificate-id-name** command.

The following example shows how to generate a public-private key for an AS PIC or Multiservices PIC:

```
user@host>request security pki generate-key-pair certificate-id local-entrust2
Generated key pair local-entrust2, key size 1024 bits
```

Generating and Enrolling a Local Digital Certificate

You can generate and enroll local digital certificates either online or manually. To generate and enroll a local certificate online by using the Simple Certificate Enrollment Protocol (SCEP) for an AS PIC or Multiservices PIC, issue the **request security pki local-certificate enroll** command. To generate a local certificate request manually in the PKCS-10 format, issue the **request security pki generate-certificate-request** command.

If you create the local certificate request manually, you must also load the certificate manually. To manually install a certificate in your router, issue the **request security pki local-certificate load** command.

The following example shows how to generate a local certificate request manually and send it to the CA for processing:

```
user@host> request security pki generate-certificate-request certificate-id local-entrust2
domain-name router2.example.com filename entrust-req2
subject cn=router2.example.com
```

Generated certificate request

```
-----BEGIN CERTIFICATE REQUEST-----
MIIBoTCCAQoCAQAwGjEYMBYGA1UEAxMPdHAXLmp1bm1wZXIubmV0MIGfMA0GCSqG
SIb3DQEBAQUAA4GNADCBiQKBgQCiuFk1Qws1Ud+AqN5DDxRs2kVyKEhh9qoVFnz+
Hz4c9v3B8E1wTJ1kmIt2cB3yifB6zePd+6WYpf57Crwre7YqPkixM31F6z3YjX
H+1BPNbCxNWYvyrnSyVYDbFj8o0Xyqog8ACDfVL2JBWrPNBYy7imq/K9soDBbAs6
5hZqqwIDAQABoEcwRQYJKoZIhvcNAQkOMTgwNjA0BgNVHQ8BAf8EBAMCB4AwJAYD
VR0RAQH/BBowGIIwDhAXLmVuZ2xhYi5qdW5pcGVyLm5ldDANBgkqhkiG9w0BAQQF
AA0BgQBC2rq1v5S0QXH7LCb/FdqAL8ZM6GoaNs5d6cGwq4bB6a7UQFgtoH406gQ3G
3iH0Zfz4xMIBpJYuGd1dkqgvcDoH3AgTsLkfn7Wi3x5H2qeQVs9bvL4P5nvEzLND
EIMUHwteo1ZCiZ70f09Fer9cXWHSQs1UtXtgPqQJy2xIeImLgw==
-----END CERTIFICATE REQUEST-----
Fingerprint:
0d:90:b8:d2:56:74:fc:84:59:62:b9:78:71:9c:e4:9c:54:ba:16:97 (sha1)
1b:08:d4:f7:90:f1:c4:39:08:c9:de:76:00:86:62:b8 (md5)
```

The trusted CA digitally signs the local certificate and returns it to you. Copy the certificate file into the router and load the certificate:

```
user@host> request security pki local-certificate load filename /tmp/router2-cert
certificate-id local-entrust2
Local certificate local-entrust2 loaded successfully
```



NOTE: The name of the file sent to you by the CA might not match the name of the certificate identifier. However, the certificate-id name must always match the name of the key pair you generated for the router.

After the local and CA certificates have been loaded, you can reference them in your IPsec configuration. Using default values in the AS and Multiservices PICs, you do not need to configure an IPsec proposal or an IPsec policy. However, you must configure an IKE proposal that specifies the use of digital certificates, reference the IKE proposal and locate the certificate in an IKE policy, and apply the CA profile to the service set.

Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA

Use the **auto-re-enrollment** statement to configure automatic reenrollment of a specified existing router certificate before its existing expiration date. This function automatically reenrolls the router certificate. The reenrollment process requests the certificate authority (CA) to issue a new router certificate with a new expiration date. The date of auto-reenrollment is determined by the following parameters:

- **re-enroll-trigger-time**—The percentage of the difference between the router certificate start date/time (when the certificate was generated) and the validity period; used to specify how long auto-reenrollment should be initiated before expiration.
- **validity-period**—The number of days after issuance when the router certificate will expire, as set when a certificate is generated.



NOTE: By default, this feature is not enabled unless configured explicitly. This means that a certificate that does not have auto-reenrollment configured will expire on its normal expiration date.

The **ca-profile** statement specifies which CA will be contacted to reenroll the expiring certificate. This is the CA that issued the original router certificate.

The **challenge-password** statement provides the issuing CA with the router certificate's password, as set by the administrator and normally obtained from the SCEP enrollment Web page of the CA. The password is 16 characters in length.

Optionally, the router certificate key pair can be regenerated by using the **re-generate-keypair** statement.

To configure automatic reenrollment properties, include the following statements at the **[edit security pki]** hierarchy level:

```
[edit security pki]
auto-re-enrollment {
  certificate-id {
    ca-profile ca-profile-name;
    challenge-password password;
    re-enroll-trigger-time-percentage percentage;
    re-generate-keypair;
    validity-period days;
  }
}
```

percentage is the percentage for the reenroll trigger time. The range can be from 1 through 99 percent.

days is the number of days for the validity period. The range can be from 1 through 4095.

Tasks to configure automatic reenrollment of certificates are:

1. [Specify the Certificate ID on page 26](#)
2. [Specify the CA Profile on page 26](#)
3. [Specify the Challenge Password on page 26](#)
4. [Specify the Reenroll Trigger Time on page 26](#)
5. [Specify the Regenerate Key Pair on page 26](#)
6. [Specify the Validity Period on page 27](#)

Specify the Certificate ID

Use the **certificate-id** statement to specify the name of the router certificate to configure for auto-reenrollment. To specify the certificate ID, include the statement at the **[edit security pki auto-re-enrollment]** hierarchy level:

```
[edit security pki auto-re-enrollment]
certificate-id certificate-name;
```

Specify the CA Profile

Use the **ca-profile** statement to specify the name of the CA profile from the router certificate previously specified by certificate ID. To specify the CA profile, include the statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]
ca-profile ca-profile-name;
```



NOTE: The referenced **ca-profile** must have an enrollment URL configured at the **[edit security pki ca-profile *ca-profile-name* enrollment url]** hierarchy level.

Specify the Challenge Password

The challenge password is used by the CA specified by the PKI certificate ID for reenrollment and revocation. To specify the challenge password, include the following statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]
challenge-password password;
```

Specify the Reenroll Trigger Time

Use the **re-enroll-trigger-time** statement to set the percentage of the validity period before expiration at which reenrollment occurs. To specify the reenroll trigger time, include the following statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]
re-enroll-trigger-time percentage;
```

percentage is the percentage for the reenroll trigger time. The range can be from 1 through 99 percent.

Specify the Regenerate Key Pair

When a regenerate key pair is configured, a new key pair is generated during reenrollment. On successful reenrollment, a new key pair and new certificate replace the old certificate and key pair. To generate a new key pair, include the following statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]
re-generate-keypair;
```

Specify the Validity Period

The **validity-period** statement specifies the router certificate validity period, in number of days, that the specified router certificate remains valid. To specify the validity period, include the statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]
validity-period days;
```

days is the number of days for the validity period. The range can be from 1 through 4095.

Related Documentation

- [Digital Certificates Overview on page 3](#)
- [Configuring Digital Certificates for an ES PIC on page 11](#)

Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA

Use the **auto-re-enrollment** statement to configure automatic reenrollment of a specified existing router certificate before its existing expiration date. This function automatically reenrolls the router certificate. The reenrollment process requests the certificate authority (CA) to issue a new router certificate with a new expiration date. The date of auto-reenrollment is determined by the following parameters:

- **re-enroll-trigger-time**—The percentage of the difference between the router certificate start date/time (when the certificate was generated) and the validity period; used to specify how long auto-reenrollment should be initiated before expiration.
- **validity-period**—The number of days after issuance when the router certificate will expire, as set when a certificate is generated.



NOTE: By default, this feature is not enabled unless configured explicitly. This means that a certificate that does not have auto-reenrollment configured will expire on its normal expiration date.

The **ca-profile** statement specifies which CA will be contacted to reenroll the expiring certificate. This is the CA that issued the original router certificate.

The **challenge-password** statement provides the issuing CA with the router certificate's password, as set by the administrator and normally obtained from the SCEP enrollment Web page of the CA. The password is 16 characters in length.

Optionally, the router certificate key pair can be regenerated by using the **re-generate-keypair** statement.

To configure automatic reenrollment properties, include the following statements at the **[edit security pki]** hierarchy level:

```
[edit security pki]
auto-re-enrollment {
  certificate-id {
    ca-profile ca-profile-name;
    challenge-password password;
    re-enroll-trigger-time-percentage percentage;
    re-generate-keypair;
    validity-period days;
  }
}
```

percentage is the percentage for the reenroll trigger time. The range can be from 1 through 99 percent.

days is the number of days for the validity period. The range can be from 1 through 4095.

Tasks to configure automatic reenrollment of certificates are:

1. [Specify the Certificate ID on page 28](#)
2. [Specify the CA Profile on page 28](#)
3. [Specify the Challenge Password on page 29](#)
4. [Specify the Reenroll Trigger Time on page 29](#)
5. [Specify the Regenerate Key Pair on page 29](#)
6. [Specify the Validity Period on page 29](#)

Specify the Certificate ID

Use the **certificate-id** statement to specify the name of the router certificate to configure for auto-reenrollment. To specify the certificate ID, include the statement at the **[edit security pki auto-re-enrollment]** hierarchy level:

```
[edit security pki auto-re-enrollment]
certificate-id certificate-name;
```

Specify the CA Profile

Use the **ca-profile** statement to specify the name of the CA profile from the router certificate previously specified by certificate ID. To specify the CA profile, include the statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]
ca-profile ca-profile-name;
```



NOTE: The referenced *ca-profile* must have an enrollment URL configured at the **[edit security pki ca-profile *ca-profile-name* enrollment url]** hierarchy level.

Specify the Challenge Password

The challenge password is used by the CA specified by the PKI certificate ID for reenrollment and revocation. To specify the challenge password, include the following statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]  
challenge-password password;
```

Specify the Reenroll Trigger Time

Use the **re-enroll-trigger-time** statement to set the percentage of the validity period before expiration at which reenrollment occurs. To specify the reenroll trigger time, include the following statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]  
re-enroll-trigger-time percentage;
```

percentage is the percentage for the reenroll trigger time. The range can be from 1 through 99 percent.

Specify the Regenerate Key Pair

When a regenerate key pair is configured, a new key pair is generated during reenrollment. On successful reenrollment, a new key pair and new certificate replace the old certificate and key pair. To generate a new key pair, include the following statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]  
re-generate-keypair;
```

Specify the Validity Period

The **validity-period** statement specifies the router certificate validity period, in number of days, that the specified router certificate remains valid. To specify the validity period, include the statement at the **[edit security pki auto-re-enrollment certificate-id *certificate-name*]** hierarchy level:

```
[edit security pki auto-re-enrollment certificate-id certificate-name]  
validity-period days;
```

days is the number of days for the validity period. The range can be from 1 through 4095.

PART 2

Distributed Denial-of-Service (DDoS) Protection

- [DDoS Overview on page 33](#)
- [Configuring Flow Detection for DDoS Protection on page 73](#)

CHAPTER 2

DDoS Overview

- [Distributed Denial-of-Service \(DDoS\) Protection Overview on page 33](#)
- [Example: Configuring DDoS Protection on page 40](#)
- [Understanding Distributed Denial-of-Service Protection on PTX Series and QFX Series Devices on page 50](#)
- [Example: Configuring DDoS Protection on QFX Series Switches on page 52](#)
- [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)
- [Configuring Protection Against DDoS Attacks on page 60](#)
- [Configuring DDoS Protection Policers for Individual Packet Types on page 61](#)
- [Configuring the DDoS Protection Trace Log Filename on page 65](#)
- [Configuring the Number and Size of DDoS Protection Log Files on page 65](#)
- [Configuring Access to the DDoS Protection Log File on page 66](#)
- [Configuring a Regular Expression for DDoS Protection Messages to Be Logged on page 66](#)
- [Configuring the DDoS Protection Tracing Flags on page 66](#)
- [Configuring the Severity Level to Filter Which DDoS Protection Messages Are Logged on page 67](#)
- [Disabling DDoS Protection Policers and Logging Globally on page 67](#)
- [Tracing DDoS Protection Operations on page 68](#)
- [Tracing DDoS Protection Operations on page 69](#)

Distributed Denial-of-Service (DDoS) Protection Overview

A denial-of-service (DoS) attack is any attempt to deny valid users access to network or server resources by using up all the resources of the network element or server. Distributed denial-of-service (DDoS) attacks involve an attack from multiple sources, enabling a much greater amount of traffic to attack the network. The attacks typically use network protocol control packets to trigger a large number of exceptions to the device's control plane. This results in an excessive processing load that disrupts normal network operations.

Junos OS DDoS protection enables the device to continue functioning while under an attack. It identifies and suppresses malicious control packets while enabling legitimate

control traffic to be processed. A single point of DDoS protection management enables network administrators to customize profiles for their network control traffic. For routers, protection and monitoring persists across graceful Routing Engine switchover (GRES) and unified in-service-software-upgrade (ISSU) switchovers. Protection is not diminished as the number of subscribers increases.

To protect against DDoS attacks, you can configure policers for host-bound exception traffic. The policers specify rate limits for individual types of protocol control packets or for all control packet types for a protocol. You can monitor policer actions for packet types and protocol groups at the level of the device, Routing Engine, and line cards. You can also control logging of policer events.

The first line of protection is the policer on the Packet Forwarding Engine. Control traffic is dropped when it exceeds any configured policer values or, for unconfigured policers, the default policer values. Each violation immediately generates a notification to alert operators about a possible attack. The violation is counted, the time that the violation starts is noted, and the time of the last observed violation is noted. When the traffic rate drops below the bandwidth violation threshold, a recovery timer determines when the traffic flow is considered to have returned to normal. If no further violation occurs before the timer expires, the violation state is cleared and a notification is generated.

Policer states and statistics from each line card are relayed to the Routing Engine and aggregated. The policer states are maintained during a switchover. Although line card statistics and violation counts are preserved during a switchover, Routing Engine policer statistics are not.

Platform Support

Starting in Junos OS Release 14.2, DDoS protection is supported on only specific platforms. Verify that your installation includes any of the following:

- EX9200 switches
- MX Series routers that have only MPCs installed: MX240, MX480, MX960, MX2010, and MX2020.
- MX Series routers with a built-in MPC: MX5, MX10, MX40, MX80, and MX104.



NOTE: For simplicity, where the text refers to line cards or line card policers, for these routers that means the built-in MPC.

Because these routers do not have FPC slots, information displayed in FPC fields by `show` commands actually refers to TFEB.

- T4000 routers that have only Type 5 FPCs installed.
- PTX Series routers that have only PE-based FPCs installed (PTX3000, PTX5000, PTX1000, and PTX10000) support DDoS protection starting in Junos OS Release 17.4R1.

PTX 10002 routers support DDoS protection starting in Junos OS Release 18.2R1.



NOTE: To configure DDoS protection, PTX Series routers have the same CLI configuration options as QFX Series switches rather than the options available for MX Series and T4000 routers. See [ddos-protection \(DDoS\) \(PTX Series and QFX Series\)](#) and [protocols \(DDoS\) \(PTX Series and QFX Series\)](#) for the available DDoS protection configuration options on PTX routers.



NOTE:

- If the router platforms have other line cards in addition to MPCs (MX Series), Type 5 FPCs (T4000), or PE-based FPCs (PTX3000, PTX5000, PTX1000, and PTX10000), the CLI accepts the configuration but the other line cards are not protected and so the router is not protected.
- DDoS protection support for Enhanced Subscriber Management added in Junos OS Release 17.3R1. However, DDoS protection support for Enhanced Subscriber Management added to PTX series routers in Junos OS Release 17.4R1.

Policer Types and Packet Priorities

DDoS protection includes two types of policers:

- An *aggregate policer* is applied to the complete set of packet types that belong to a protocol group. For example, you can configure an aggregate policer that applies to all PPPoE control packet types or to all DHCPv4 control packet types. You can specify bandwidth and burst limits, scale the bandwidth and burst limits, and set a traffic priority for aggregate policers. An aggregate policer is available for all protocol groups. Aggregate policers are supported by all protocol groups.
- An *individual policer*, also referred to as a *packet-type policer*, is allocated for each control packet type within a protocol group. For example, you can configure a policer for one or more types of PPPoE control packets. You can specify bandwidth and burst limits, scale the bandwidth and burst limits, and set a traffic priority for packet-type policers. Individual policers are not available for all protocol groups. See [protocols](#) for a list of protocol groups that have individual policers.

A control packet is policed first by its individual policer (if supported) and then by its aggregate policer. A packet dropped by the individual policer never reaches the aggregate policer. A packet that passes the individual policer can subsequently be dropped by the aggregate policer.

Each packet type within a protocol group has a default, configurable priority: low, medium, or high. Each control packet competes with other packets for the bandwidth within the limit imposed by its aggregate policer based on the priority configured for each packet type in the protocol group.

The priority mechanism is absolute. High-priority traffic gets bandwidth in preference to medium- and low-priority traffic. Medium-priority traffic gets bandwidth in preference to low-priority traffic. Low-priority traffic can use only the bandwidth left by high- and medium-priority traffic. If higher-priority traffic takes all of the bandwidth, then all the lower-priority traffic is dropped.

Example of Policer Priority Behavior

For example, consider how you might configure packet types within the PPPoE protocol group. Ignoring other PPPoE packet types for this example, suppose you configure individual policers for PADI and PADT packets, as well as a PPPoE aggregate policer for all those packets. PADT packets are more important than PADI packets, because PADT packets enable the PPPoE application to release resources to accept new connections. Therefore, you might assign high priority to the PADT packets and low priority to the PADI packets.

The aggregate policer imposes a total bandwidth limit for the protocol group. PADT packets passed by their individual policer have access to that bandwidth before PADI packets passed by their individual policer, because the PADT packets have a higher priority. If so many PADT packets are passed that they use all the available bandwidth, then all the PADI packets are dropped, because there is no bandwidth remaining at the aggregate policer.

Policer Hierarchy

DDoS policers are organized to match the hierarchical flow of protocol control traffic. Control traffic arriving from all ports of a line card converges on the Packet Forwarding Engine. Control traffic from all line cards on the router converges on the Routing Engine. Similarly, the DDoS policers are placed hierarchically along the control paths so that excess packets are dropped as early as possible on the path. This design preserves system resources by removing excess, malicious traffic so that the Routing Engine receives only the amount of traffic that it can process. To implement this design, typically five DDoS policers are present: One on the Packet Forwarding Engine (the chipset), two at the line card, and two at the Routing Engine. An aggregate policer is also present on the Packet Forwarding Engine for some protocol groups, for a total of six policers; for simplicity, the text follows the general case. [Figure 1 on page 37](#) shows the policer process for PPPoE traffic. [Figure 2 on page 37](#) shows the policer process for DHCPv4 traffic. (The same process applies to DHCPv6 traffic.)

Figure 1: Policer Hierarchy for PPPoE Packets


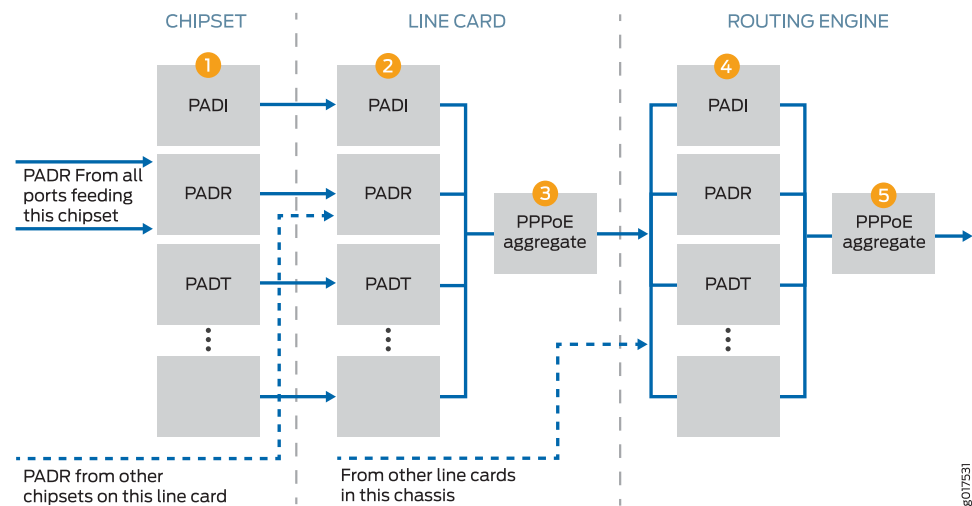


Figure 2: Policer Hierarchy for DHCPv4 Packets

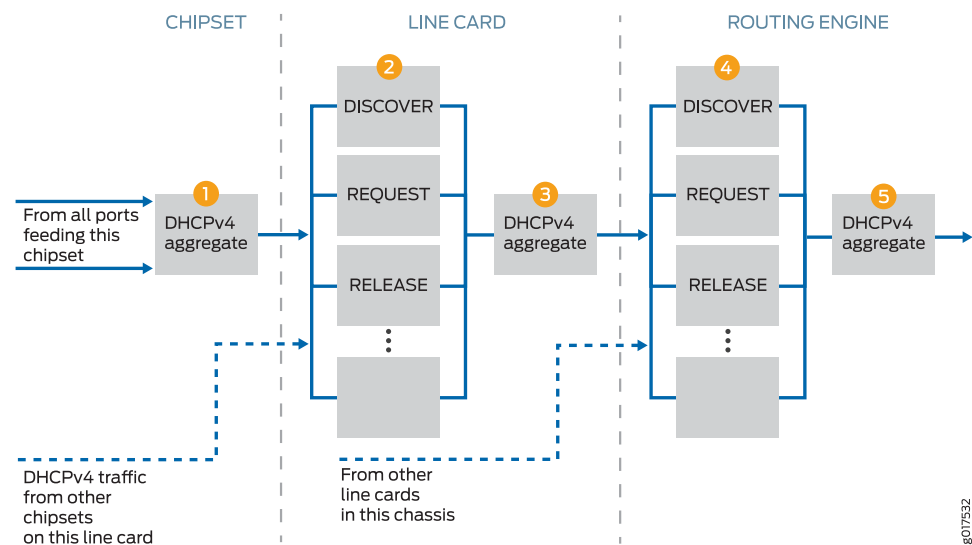

Control packets arrive at the Packet Forwarding Engine for processing and forwarding. The first policer (1) is either an individual policer (Figure 1 on page 37) or an aggregate policer (Figure 2 on page 37).

- The first policer is an individual policer for protocol groups that support individual policers, with two exceptions. For DHCPv4 and DHCPv6 traffic, the first policer is an aggregate policer.
- The first policer is an aggregate policer for protocol groups that support only aggregate policers.

Traffic that passes the first policer is monitored by one or both of the line card policers. If the card has more than one Packet Forwarding Engine, traffic from all Packet Forwarding Engines converges on the line card policers.

- When the traffic belongs to a protocol group that supports individual policers, it passes through the line card individual policer (2) and then the line card aggregate policer (3). Traffic that passes the individual policer can be dropped by the aggregate policer. Although DHCPv4 and DHCPv6 traffic was monitored by an aggregate policer at the Packet Forwarding Engine, at the line card it is handled like other protocols that support individual policers.
- When the traffic belongs to a protocol group that supports only aggregate policers, only the line card aggregate policer monitors the traffic.

Traffic that passes the line card policers is monitored by one or both of the Routing Engine policers. Traffic from all the line cards converges on the Routing Engine policers.

- When the traffic belongs to a protocol group that supports individual policers, it passes through the Routing Engine individual policer (4) and then the Routing Engine aggregate policer (5). Traffic that passes the individual policer can be dropped by the aggregate policer. As it was at the line card level, DHCPv4 and DHCPv6 traffic at the Routing Engine is handled like other protocols that support individual policers.
- When the traffic belongs to a protocol group that supports only aggregate policers, only the aggregate policer monitors the traffic.

The result of this design is that traffic for protocol groups that support only aggregate policers is evaluated by three policers. Among other groups, this includes ANCP, dynamic VLAN, FTP, and IGMP traffic. Traffic for protocol groups that support both aggregate and individual policers is evaluated by all five policers. Among other groups, this includes DHCPv4, MLP, PPP, PPPoE, and virtual chassis traffic.

[Figure 1 on page 37](#) shows how DDoS protection polices PPPoE control packets:

1. PADR packets, for example, are evaluated at the first policer on the Packet Forwarding Engine to determine whether they are within the bandwidth limits. PADR packets that exceed the limit are dropped.
2. All PADR packets that pass the policer on all Packet Forwarding Engines on the line card are next evaluated by the line card individual policer. PADR packets that exceed the limit are dropped.
3. All PADR packets that pass the line card individual policer proceed to the line card aggregate policer. PADR packets that exceed the limit are dropped.
4. All PADR packets that are passed by the line card aggregate policers on all line cards on the router proceed to the Routing Engine individual policer. PADR packets that exceed the limit are dropped.
5. Finally, all PADR packets that are passed by the Routing Engine individual policer proceed to the Routing Engine aggregate policer. PADR packets that exceed the limit are dropped. PADR packets that are not dropped here are passed along as safe, normal traffic.

By default, all three individual policers (Packet Forwarding Engine, line card, and Routing Engine) have the same bandwidth limit for a given packet type. This design enables all the control traffic from a Packet Forwarding Engine and line card to reach the Routing Engine, as long as there is no competing traffic of the same type from other Packet Forwarding Engines or line cards. When competing traffic is present, excess packets are dropped at the convergence points. That is, they are dropped at the line card for all competing Packet Forwarding Engines and at the Routing Engine for all competing line cards.

Example of Policer Bandwidth Limit Behavior

For example, suppose you set the policer bandwidth for PADI packets to 1000 packets per second. This value applies to the individual PADI policers at the Packet Forwarding Engine, the line card, and the Routing Engine. If only the card in slot 5 is receiving PADI packets, then up to 1000 PADI pps can reach the Routing Engine (if the PPPoE aggregate policer is not exceeded). However, suppose the card in slot 9 is also receiving PADI packets at 1000 pps and that its PPPoE aggregate policer is not exceeded. The traffic passes the individual and aggregate policers at both line cards and proceeds to the Routing Engine. At the Routing Engine, the combined bandwidth is 2000 pps. Because the PADI policer at the Routing Engine allows only 1000 PADI pps to pass, it drops the excess 1000 packets. It continues to drop the excess packets for as long as the bandwidth is exceeded.

You can apply a scaling factor for both the bandwidth limit and the burst limit at the line card. This enables you to fine-tune the traffic limits for each slot. For example, suppose the individual policer sets the PADI packet bandwidth to 1000 pps and the burst size to 50,000 packets. You can reduce the traffic limit for PADI packets on any line card by specifying the slot number and scaling factor. A bandwidth scaling factor of 20 for slot 5 reduces the traffic in this example to 20 percent of 1000 pps, or 200 pps for the line card in that slot. Similarly, a burst scaling factor of 50 for that slot reduces the burst size by 50 percent to 25,000 packets. By default, scaling factors are set to 100 so traffic can pass through at 100 percent of the rate limit.

DDoS Protection Compared to Subscriber Login Packet Overload Protection

In addition to the DDoS protection capability, MX Series routers also have a built-in subscriber login overload protection mechanism. The login overload protection mechanism (also called a load-throttling mechanism) monitors the incoming subscriber login packets and admits only what the system is capable of handling in accordance with the prevailing load on the system. Packets in excess of what the system can handle are discarded. By shedding this excess load, the system is able to maintain optimal performance and prevent any degradation of login-completion rate under overload conditions. This mechanism uses minimal resources and is enabled by default; no user configuration is required.

The protection provided by this mechanism is secondary to what DDoS protection provides as a first level of defense against high rates of incoming packets. DDoS protection operates on the Packet Forwarding Engine and protects against all packet types of all protocols. In contrast, the login overload protection mechanism is located on the Routing Engine and specifically operates only on incoming connection-initiation packets such as DHCPv4 DHCPDISCOVER, DHCPv6 SOLICIT, and PPPoE PADI packets.

Release History Table

Release	Description
18.2R1	PTX10002 routers support DDoS protection starting in Junos OS Release 18.2R1.
17.4R1	PTX Series routers that have only PE-based FPCs installed (PTX3000, PTX5000, PTX1000, and PTX10000) support DDoS protection starting in Junos OS Release 17.4R1.
17.3R1	DDoS protection support for Enhanced Subscriber Management added in Junos OS Release 17.3R1. However, DDoS protection support for Enhanced Subscriber Management added to PTX series routers in Junos OS Release 17.4R1.
14.2	Starting in Junos OS Release 14.2, DDoS protection is supported on only specific platforms.

Related Documentation

- [Configuring Protection Against DDoS Attacks on page 60](#)
- [Understanding Distributed Denial-of-Service Protection on PTX Series and QFX Series Devices on page 50](#)
- [DDoS Protection Flow Detection Overview on page 74](#)

Example: Configuring DDoS Protection

This example shows how to configure DDoS protection that enables the router to quickly identify an attack and prevent a flood of malicious control packets from exhausting system resources.

- [Requirements on page 40](#)
- [Overview on page 41](#)
- [Configuration on page 41](#)
- [Verification on page 43](#)

Requirements

DDoS protection requires the following hardware and software:

- MX Series routers that have only MPCs installed, T4000 Core Routers that have only FPC5s installed, EX9200 switches.



NOTE: If a router has other cards in addition to MPCs or FPC5s, the CLI accepts the configuration but the other cards are not protected and therefore the router is not protected.

- Junos OS Release 11.2 or later

No special configuration beyond device initialization is required before you can configure this feature.

Overview

Distributed denial-of-service attacks use multiple sources to flood a network or router with protocol control packets. This malicious traffic triggers a large number of exceptions in the network and attempts exhaust the system resources to deny valid users access to the network or server.

This example describes how to configure rate-limiting policers that identify excess control traffic and drop the packets before the router is adversely affected. Sample tasks include configuring policers for particular control packet types within a protocol group, configuring an aggregate policer for a protocol group and bypassing that policer for a particular control packet type, and specifying trace options for DDoS operations.

This example does not show all possible configuration choices.

Configuration

CLI Quick Configuration

To quickly configure DDoS protection for protocol groups and particular control packet types, copy the following commands, paste them in a text file, remove any line breaks, and then copy and paste the commands into the CLI.

```
[edit]
edit system
set ddos-protection protocols dhcpv4 aggregate bandwidth 669
set ddos-protection protocols dhcpv4 aggregate burst 6000
set ddos-protection protocols dhcpv4 discover bandwidth 100
set ddos-protection protocols dhcpv4 discover recover-time 200
set ddos-protection protocols dhcpv4 discover burst 300
set ddos-protection protocols dhcpv4 offer priority medium
set ddos-protection protocols dhcpv4 offer bypass-aggregate
set ddos-protection protocols dhcpv4 offer fpc 1 bandwidth-scale 80
set ddos-protection protocols dhcpv4 offer fpc 1 burst-scale 75
set ddos-protection protocols pppoe aggregate bandwidth 800
set ddos-protection traceoptions file ddos-trace size 10m
set ddos-protection traceoptions flag all
top
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode*.

To configure DDoS protection:

1. Specify a protocol group.

```
[edit system ddos-protection protocols]
user@host# edit dhcpv4
```

2. Configure the maximum traffic rate for the DHCPv4 aggregate policer; that is, for the combination of all DHCPv4 packets.

```
[edit system ddos-protection protocols dhcpv4]
user@host# set aggregate bandwidth 669
```

3. Configure the maximum burst rate for the DHCPv4 aggregate policer.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# set aggregate burst 6000
```
4. Configure the maximum traffic rate for the DHCPv4 policer for discover packets.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# set discover bandwidth 100
```
5. Decrease the recover time for violations of the DHCPv4 discover policer.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# set discover recover-time 200
```
6. Configure the maximum burst rate for the DHCPv4 discover policer.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# set discover burst 300
```
7. Increase the priority for DHCPv4 offer packets.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# set offer priority medium
```
8. Prevent offer packets from being included in the aggregate bandwidth; that is, offer packets do not contribute towards the combined DHCPv4 traffic to determine whether the aggregate bandwidth is exceeded. However, the offer packets are still included in traffic rate statistics.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# set offer bypass-aggregate
```
9. Reduce the bandwidth and burst size allowed before violation is declared for the DHCPv4 offer policer on the MPC or FPC5 in slot 1.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# set offer fpc 1 bandwidth-scale 80  
user@host# set offer fpc 1 burst-scale 75
```
10. Configure the maximum traffic rate for the PPPoE aggregate policer, that is, for the combination of all PPPoE packets.

```
[edit system ddos-protection protocols dhcpv4]  
user@host# up  
[edit system ddos-protection protocols]  
user@host# set pppoe aggregate bandwidth 800
```
11. Configure tracing for all DDoS protocol processing events.

```
[edit system ddos-protection traceoptions]  
user@host# set file ddos-log  
user@host# set file size 10m
```

```
user@host# set flag all
```

Results From configuration mode, confirm your configuration by entering the **show ddos-protection** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
[edit system]
user@host# show ddos-protection
traceoptions {
  file ddos-trace size 10m;
  flag all;
}
protocols {
  pppoe {
    aggregate {
      bandwidth 800;
    }
  }
  dhcpv4 {
    aggregate {
      bandwidth 669;
      burst 6000;
    }
    discover {
      bandwidth 100;
      burst 300;
      recover-time 200;
    }
    offer {
      priority medium;
      fpc 1 {
        bandwidth-scale 80;
        burst-scale 75;
      }
      bypass-aggregate;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

To confirm that the DDoS protection configuration is working properly, perform these tasks:

- [Verifying the DHCPv4 DDoS Protection Configuration and Operation on page 43](#)
- [Verifying the PPPoE DDoS Configuration on page 47](#)

Verifying the DHCPv4 DDoS Protection Configuration and Operation

Purpose Verify that the DHCPv4 aggregate and protocol policer values have changed from the default. With DHCPv4 and PPPoE traffic flowing, verify that the policers are working

correctly. You can enter commands to display the individual policers you are interested in, as shown here, or you can enter the **show ddos-protection protocols dhcpv4** command to display this information for all DHCPv4 packet types.

Action From operational mode, enter the **show ddos-protection protocols dhcpv4 aggregate** command.

```
user@host> show ddos-protection protocols dhcpv4 aggregate
Protocol Group: DHCPv4

Packet type: aggregate (aggregate for all DHCPv4 traffic)
Aggregate policer configuration:
  Bandwidth:      669 pps
  Burst:          6000 packets
  Priority:        medium
  Recover time:   300 seconds
  Enabled:        Yes
System-wide information:
  Aggregate bandwidth is no longer being violated
  No. of FPCs currently receiving excess traffic: 0
  No. of FPCs that have received excess traffic: 1
  Violation first detected at: 2011-03-10 06:27:47 PST
  Violation last seen at:     2011-03-10 06:28:57 PST
  Duration of violation: 00:01:10 Number of violations: 1
  Received: 71064              Arrival rate: 0 pps
  Dropped:  23115              Max arrival rate: 1000 pps
Routing Engine information:
  Bandwidth: 669 pps, Burst: 6000 packets, enabled
  Aggregate policer is never violated
  Received: 36130              Arrival rate: 0 pps
  Dropped:  0                  Max arrival rate: 671 pps
  Dropped by aggregate policer: 0
FPC slot 1 information:
  Bandwidth: 100% (669 pps), Burst: 100% (5000 packets), enabled
  Aggregate policer is no longer being violated
  Violation first detected at: 2011-03-10 06:27:48 PST
  Violation last seen at:     2011-03-10 06:28:58 PST
  Duration of violation: 00:01:10 Number of violations: 1
  Received: 71064              Arrival rate: 0 pps
  Dropped:  34934              Max arrival rate: 1000 pps
  Dropped by individual policers: 11819
  Dropped by aggregate policer: 23115
```

From operational mode, enter the **show ddos-protection protocols dhcpv4 discover** command.

```
user@host> show ddos-protection protocols dhcpv4 discover
Protocol Group: DHCPv4

Packet type: discover (DHCPv4 DHCPDISCOVER)
Individual policer configuration:
  Bandwidth:      100 pps
  Burst:          300 packets
  Priority:        low
  Recover time:   200 seconds
  Enabled:        Yes
  Bypass aggregate: No
```

```

System-wide information:
  Bandwidth is no longer being violated
  No. of FPCs currently receiving excess traffic: 0
  No. of FPCs that have received excess traffic: 1
  Violation first detected at: 2011-03-10 06:28:34 PST
  Violation last seen at: 2011-03-10 06:28:55 PST
  Duration of violation: 00:00:21 Number of violations: 1
  Received: 47949 Arrival rate: 0 pps
  Dropped: 11819 Max arrival rate: 671 pps
Routing Engine information:
  Bandwidth: 100 pps, Burst: 300 packets, enabled
  Policer is never violated
  Received: 36130 Arrival rate: 0 pps
  Dropped: 0 Max arrival rate: 0 pps
  Dropped by aggregate policer: 0
FPC slot 1 information:
  Bandwidth: 100% (100 pps), Burst: 100% (300 packets), enabled
  Policer is no longer being violated
  Violation first detected at: 2011-03-10 06:28:35 PST
  Violation last seen at: 2011-03-10 06:28:55 PST
  Duration of violation: 00:00:20 Number of violations: 1
  Received: 47949 Arrival rate: 0 pps
  Dropped: 11819 Max arrival rate: 671 pps
  Dropped by this policer: 11819
  Dropped by aggregate policer: 0

```

From operational mode, enter the `show ddos-protection protocols dhcpv4 offer` command.

```

user@host> show ddos-protection protocols dhcpv4 offer
Protocol Group: DHCPv4

Packet type: offer (DHCPv4 DHCP OFFER)
Individual policer configuration:
  Bandwidth: 1000 pps
  Burst: 1000 packets
  Priority: medium
  Recover time: 300 seconds
  Enabled: Yes
  Bypass aggregate: Yes
System-wide information:
  Bandwidth is never violated
  Received: 0 Arrival rate: 0 pps
  Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
  Policer is never violated
  Received: 0 Arrival rate: 0 pps
  Dropped: 0 Max arrival rate: 0 pps
  Dropped by aggregate policer: 0
FPC slot 1 information:
  Bandwidth: 80% (800 pps), Burst: 75% (750 packets), enabled
  Policer is never violated
  Received: 0 Arrival rate: 0 pps
  Dropped: 0 Max arrival rate: 0 pps
  Dropped by aggregate policer: 0

```

Meaning The output of these commands lists the policer configuration and traffic statistics for the DHCPv4 aggregate, discover, and offer policers respectively.

The **Aggregate policer configuration** section in the first output example and **Individual policer configuration** sections in the second and third output examples list the configured values for bandwidth, burst, priority, recover time, and bypass-aggregate.

The **System-wide information** section shows the total of all DHCPv4 traffic statistics and violations for the policer recorded across all line cards and at the Routing Engine. The **Routing engine information** section shows the traffic statistics and violations for the policer recorded at the Routing Engine. The **FPC slot 1 information** section shows the traffic statistics and violations for the policer recorded only at the line card in slot 1.

The output for the aggregate policer in this example shows the following information:

- The **System-wide information** section shows that 71,064 DHCPv4 packets of all types were received across all line cards and the Routing Engine. The section shows a single violation with a time stamp and that the aggregate policer at a line card dropped 23,115 of these packets.
- The **FPC slot 1 information** section shows that this line card received all 71,064 DHCPv4 packets, but its aggregate policer experienced a violation and dropped the 23,115 packets shown in the other section. The line card individual policers dropped an additional 11,819 packets.
- The **Routing Engine information** section shows that the remaining 36,130 packets all reached the Routing Engine and that its aggregate policer dropped no additional packets.

The difference between the number of DHCPv4 packets received and dropped at the line card $[71,064 - (23,115 + 11,819)]$ matches the number received at the Routing Engine. That might not always be the case, because packets can be received and dropped at more than one line card. In this example, only the line card in slot 1 received any DHCPv4 packets.

The output for the DHCPv4 discover packet policer in this example shows the following information:

- The **System-wide information** section shows that 47,949 DHCPv4 discover packets were received across all line cards and the Routing Engine. The section shows a single violation with a time stamp and that the aggregate policer at a line card dropped 11,819 of these packets.
- The **FPC slot 1 information** section shows that this line card received all 47,949 DHCPv4 discover packets, but its individual policer experienced a violation and dropped the 11,819 packets shown in the other section.
- The **Routing Engine information** section shows that only 36,130 DHCPv4 discover packets reached the Routing Engine and that it dropped no additional packets.

The difference between the number of DHCPv4 discover packets received and dropped at the line card $(47,949 - 11,819)$ matches the number received at the Routing Engine. That might not always be the case, because packets can be received and dropped at more than one line card. In this example, only the line card in slot 1 received any DHCPv4 discover packets.

The output for the DHCPv4 offer packet policer in this example shows the following information:

- This individual policer has never been violated at any location.
- No DHCPv4 offer packets have been received at any location.

Verifying the PPPoE DDoS Configuration

Purpose Verify that the PPPoE policer values have changed from the default.

Action From operational mode, enter the **show ddos-protection protocols pppoe parameters brief** command.

```
user@host> show ddos-protection protocols pppoe parameters brief
Number of policers modified: 1
Protocol  Packet  Bandwidth  Burst  Priority  Recover  Policer  Bypass  FPC
group     type    (pps)      (pkts)             time(sec) enabled aggr.  mod
pppoe     aggregate 800*       2000   medium   300      yes    --     no
pppoe     padi      500        500    low      300      yes    no     no
pppoe     pado      0          0      low      300      yes    no     no
pppoe     padr      500        500    medium   300      yes    no     no
pppoe     pads      0          0      low      300      yes    no     no
pppoe     padt      1000       1000   high     300      yes    no     no
pppoe     padm      0          0      low      300      yes    no     no
pppoe     padn      0          0      low      300      yes    no     no
```

From operational mode, enter the **show ddos-protection protocols pppoe padi** command, and enter the command for **padr** as well.

```
user@host> show ddos-protection protocols pppoe padi
Protocol Group: PPPoE

Packet type: padi (PPPoE PADI)
Individual policer configuration:
  Bandwidth:      500 pps
  Burst:          500 packets
  Priority:        low
  Recover time:   300 seconds
  Enabled:        Yes
  Bypass aggregate: No
System-wide information:
  Bandwidth for this packet type is being violated!
  Number of slots currently receiving excess traffic: 1
  Number of slots that have received excess traffic: 1
  Violation first detected at: 2011-03-09 11:26:33 PST
  Violation last seen at:     2011-03-10 12:03:44 PST
  Duration of violation: 1d 00:37 Number of violations: 1
  Received: 704832908          Arrival rate: 8000 pps
  Dropped: 660788548          Max arrival rate: 8008 pps
Routing Engine information:
  Bandwidth: 500 pps, Burst: 500 packets, enabled
  Policer is never violated
  Received: 39950330          Arrival rate: 298 pps
  Dropped: 0                  Max arrival rate: 503 pps
  Dropped by aggregate policer: 0
```

```
FPC slot 3 information:
Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled
Policer is currently being violated!
  Violation first detected at: 2011-03-09 11:26:35 PST
  Violation last seen at:    2011-03-10 12:03:44 PST
  Duration of violation: 1d 00:37 Number of violations: 1
Received: 704832908          Arrival rate: 8000 pps
Dropped: 664882578          Max arrival rate: 8008 pps
Dropped by this policer: 660788548
Dropped by aggregate policer: 4094030
```

```
user@host> show ddos-protection protocols pppoe padr
```

```
Protocol Group: PPPoE
```

```
Packet type: padr (PPPoE PADR)
Individual policer configuration:
  Bandwidth: 500 pps
  Burst: 500 packets
  Priority: medium
  Recover time: 300 seconds
  Enabled: Yes
  Bypass aggregate: No
System-wide information:
  Bandwidth for this packet type is being violated!
  Number of slots currently receiving excess traffic: 1
  Number of slots that have received excess traffic: 1
  Violation first detected at: 2011-03-10 06:21:17 PST
  Violation last seen at:    2011-03-10 12:04:14 PST
  Duration of violation: 05:42:57 Number of violations: 1
Received: 494663595          Arrival rate: 24038 pps
Dropped: 484375900          Max arrival rate: 24062 pps
Routing Engine information:
  Bandwidth: 500 pps, Burst: 500 packets, enabled
  Policer is never violated
Received: 10287695          Arrival rate: 500 pps
Dropped: 0                  Max arrival rate: 502 pps
Dropped by aggregate policer: 0
FPC slot 1 information:
  Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled
  Policer is currently being violated!
  Violation first detected at: 2011-03-10 06:21:18 PST
  Violation last seen at:    2011-03-10 12:04:14 PST
  Duration of violation: 05:42:56 Number of violations: 1
Received: 494663595          Arrival rate: 24038 pps
Dropped: 484375900          Max arrival rate: 24062 pps
Dropped by this policer: 484375900
Dropped by aggregate policer: 0
```

Meaning The output from the **show ddos-protection protocols pppoe parameters brief** command lists the current configuration for each of the individual PPPoE packet policers and the PPPoE aggregate policer. A change from a default value is indicated by an asterisk next to the modified value. The only change made to PPPoE policers in the configuration steps was to the aggregate policer bandwidth; this change is confirmed in the output. Besides the configuration values, the command output also reports whether a policer has been disabled, whether it bypasses the aggregate policer (meaning that the traffic for that

packet type is not included for evaluation by the aggregate policer), and whether the policer has been modified for one or more line cards.

The output of the **show ddos-protection protocols pppoe padi** command in this example shows the following information:

- The **System-wide information** section shows that 704,832,908 PPPoE PADI packets were received across all line cards and the Routing Engine. The section shows a single violation on a line card that is still in progress, and that the aggregate policer at the line card dropped 660,788,548 of the PADI packets.
- The **FPC slot 3 information** section shows that this line card received all 704,832,908 PADI packets. Its individual policer dropped 660,788,548 of those packets and its aggregate policer dropped the other 4,094,030 packets. The violation is ongoing and has lasted more than a day.
- The **Routing Engine information** section shows that only 39,950,330 PADI packets reached the Routing Engine and that it dropped no additional packets.

The difference between the number of PADI packets received and dropped at the line card $[704,832,908 - (660,788,548 + 4,094,030)]$ matches the number received at the Routing Engine. That might not always be the case, because packets can be received and dropped at more than one line card. In this example, only the line card in slot 3 received any PADI packets.

The output of the **show ddos-protection protocols pppoe padr** command in this example shows the following information:

- The **System-wide information** section shows that 494,663,595 PPPoE PADR packets were received across all line cards and the Routing Engine. The section shows a single violation on a line card that is still in progress, and that the policer at the line card dropped 484,375,900 of the PADR packets.
- The **FPC slot 1 information** section shows that this line card received all 494,663,595 PADR packets. Its individual policer dropped 484,375,900 of those packets. The violation is ongoing and has lasted more than five hours.
- The **Routing Engine information** section shows that only 10,287,695 PADR packets reached the Routing Engine and that it dropped no additional packets.

The difference between the number of PADR packets received and dropped at the line card $(494,663,595 - 484,375,900)$ matches the number received at the Routing Engine. That might not always be the case, because packets can be received and dropped at more than one line card. In this example, only the line card in slot 1 received any PADR packets.



NOTE: This scenario is unrealistic in showing all PADI packets received on one line card and all PADR packets on a different line card. The intent of the scenario is to illustrate how policer violations are reported for individual line cards.

- Related Documentation**
- [Distributed Denial-of-Service \(DDoS\) Protection Overview on page 33](#)
 - [Configuring Protection Against DDoS Attacks on page 60](#)

Understanding Distributed Denial-of-Service Protection on PTX Series and QFX Series Devices

A denial-of-service (DoS) attack is any attempt to deny valid users access to network or server resources by using up all the resources of the network element or server. Distributed denial-of-service attacks (DDoS) involve an attack from multiple sources, enabling a much greater amount of traffic to attack the network. The attacks typically use network protocol control packets to trigger a large number of exceptions to the router or switch control plane. This results in an excessive processing load that disrupts normal network operations.

Junos OS DDoS protection enables PTX routers and QFX10000, QFX5200, and QFX5100 switches to continue functioning while under attack. It identifies and suppresses malicious control packets while enabling legitimate control traffic to be processed. A single point of DDoS protection management enables network administrators to customize profiles for their network control traffic.

Host-Bound Traffic Limits

To protect against DDoS attacks, you can configure policers for host-bound traffic. Host-bound traffic is traffic destined to the Routing Engine, including protocol control packets for routing protocols, such as OSPF and BGP. Traffic destined to router IP addresses is also considered host-bound traffic.

The policers specify rate limits for all control traffic for a given protocol, or, in some cases, for specific control packet types for a protocol. Control traffic is dropped when it exceeds any configured policer values or, for unconfigured policers, the default policer values.

DDoS Violations

Each violation immediately generates a notification to alert operators about a possible attack. The violation is counted, the time that the violation starts is noted, and the time of the last observed violation is noted.

When the traffic rate drops below the bandwidth violation threshold, a recovery timer determines when the traffic flow is considered to have returned to normal. If no further violation occurs before the timer expires, the violation state is cleared and a notification is generated. On PTX routers and QFX Series switches, the timer is set to 300 seconds and cannot be modified.

In addition providing notification of violations through event logging, Junos OS DDoS protection allows you to monitor policers, obtaining information such as the policer configuration, number of violations encountered, date and time of violations, packet arrival rates, and number of packets received or dropped.

When a DDoS violation is reached, the device will not stop processing packets. It will limit their rate.

Policer Types and Packet Priorities

In addition providing notification of violations through event logging, Junos OS DDoS protection allows you to monitor policers, obtaining information such as the policer configuration, number of violations encountered, date and time of violations, packet arrival rates, and number of packets received or dropped.

DDoS protection includes two types of policers:

- An *aggregate policer* is applied to the complete set of packet types that belong to a protocol group. For example, you can configure an aggregate policer that applies to all RADIUS control packet types or to all DHCP control packet types. You can specify bandwidth and burst limits for aggregate policers. An aggregate policer is available for all protocol groups. Aggregate policers are supported by all protocol groups.
- An *individual policer*, also referred to as a *packet-type policer*, is allocated for a specific control packet type within a protocol group. For example, you can configure a policer for one or more types of RADIUS control packets. You can specify bandwidth and burst limits, prioritize one packet type over another, and enable a packet type to bypass the aggregate policer for the protocol group.

Individual policers are not available for all protocol groups. See [protocols](#) for a list of protocol groups that have individual policers.

A control packet is policed first by its individual policer (if supported) and then by its aggregate policer. A packet dropped by the individual policer never reaches the aggregate policer. A packet that passes the individual policer can subsequently be dropped by the aggregate policer.

Each packet type within a protocol group has a default, configurable priority: low, medium, or high. Each control packet competes with other packets for the bandwidth within the limit imposed by its aggregate policer based on the priority configured for each packet type in the protocol group.

The priority mechanism is absolute. High-priority traffic gets bandwidth in preference to medium-priority and low-priority traffic. Medium-priority traffic gets bandwidth in preference to low-priority traffic. Low-priority traffic can use only the bandwidth left by high-priority and medium-priority traffic. If higher-priority traffic takes all of the bandwidth, then all the lower-priority traffic is dropped.

Example of Policer Priority Behavior

For example, consider how you might configure packet types within the RADIUS protocol group. Suppose you configure individual policers for accounting and authorization packets, as well as a RADIUS aggregate policer for all RADIUS control packets. You might want to prioritize the RADIUS authorization function over the RADIUS accounting function, and therefore you would assign a high priority to the authorization control packets and a low priority to accounting control packets.

The aggregate policer imposes a total bandwidth limit for the protocol group. Authorization packets passed by their individual policer have access to that bandwidth before accounting packets passed by their individual policer, because the authorization packets have a higher priority. If enough authorization packets are passed that they use all the available bandwidth, then all the accounting packets are dropped, because there is no bandwidth remaining at the aggregate policer.

Policer Enforcement Points on QFX Series Switches

On PTX routers and QFX10000, QFX5200, and QFX5100 switches, the DDoS policers operate at the line card level. Control traffic arriving from all ports of a line card converges on the Packet Forwarding Engine, where it is subject to policing. Thus, excess packets are dropped before they reach the Routing Engine, ensuring that the Routing Engine receives only the amount of traffic it can process.

Related Documentation

- [Configuring Protection Against DDoS Attacks on page 60](#)
- [Verifying and Managing DDoS Protection on page 90](#)

Example: Configuring DDoS Protection on QFX Series Switches

This example shows how to configure DDoS protection that enables a switch to quickly identify an attack and prevent a flood of malicious control packets from exhausting system resources.

- [Requirements on page 52](#)
- [Overview on page 52](#)
- [Configuration on page 53](#)
- [Verification on page 55](#)

Requirements

DDoS protection requires the following hardware and software:

- QFX Series switch that supports DDoS protection
- Junos OS Release 15.1X53-D10 or later

No special configuration beyond device initialization is required before you can configure this feature.

Overview

Distributed denial-of-service (DDoS) attacks use multiple sources to flood a network with protocol control packets. This malicious traffic triggers a large number of exceptions in the network and attempts to exhaust the system resources to deny valid users access to the network or server.

DDoS protection is enabled by default on a supported QFX Series switch. This example describes how you can modify the default configuration for the rate-limiting policers that identify excess control traffic and drop the packets before the switch is adversely affected.

Sample tasks include configuring an aggregate policer for a protocol group, configuring policers for particular control packet types within a protocol group, and specifying trace options for DDoS operations.

This example does not show all possible configuration choices.

Configuration

CLI Quick Configuration To quickly configure DDoS protection for protocol groups and particular control packet types, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
[edit]
edit system
set ddos-protection protocols radius aggregate bandwidth 150
set ddos-protection protocols radius aggregate burst 2000
set ddos-protection protocols radius accounting bandwidth 100 burst 150
set ddos-protection protocols radius accounting priority low
set ddos-protection protocols radius server bypass-aggregate
set ddos-protection traceoptions file ddos-trace size 10m
set ddos-protection traceoptions flag all
top
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode*.

To configure DDoS protection:

1. Specify a protocol group.

```
[edit system ddos-protection protocols]
user@host# edit radius
```

2. Configure the maximum traffic rate for the RADIUS aggregate policer; that is, for the combination of all RADIUS packets.

```
[edit system ddos-protection protocols radius]
user@host# set aggregate bandwidth 150
```

3. Configure the maximum burst rate for the RADIUS aggregate policer.

```
[edit system ddos-protection protocols radius]
user@host# set aggregate burst 2000
```

4. Configure a different maximum traffic rate and burst size for RADIUS accounting packets.

```
[edit system ddos-protection protocols radius]
user@host# set accounting bandwidth 100 burst 1500
```

5. Decrease the priority for RADIUS accounting packets.

```
[edit system ddos-protection protocols radius]
user@host# set accounting priority low
```
6. Prevent RADIUS server control packets from being included in the aggregate bandwidth; that is, server packets do not contribute toward the combined RADIUS traffic to determine whether the aggregate bandwidth is exceeded. However, the server packets are still included in traffic rate statistics.

```
[edit system ddos-protection protocol radius]
user@host# set server bypass-aggregate
```
7. (On switches with multiple line cards only) Reduce the bandwidth and burst size allowed before a violation is declared for the RADIUS policer on the FPC in slot 1.

```
[edit system ddos-protection protocols radius]
user@host# set aggregate fpc 1 bandwidth-scale 80
user@host# set aggregate fpc 1 burst-scale 75
```
8. Configure tracing for all DDoS protocol processing events.

```
[edit system ddos-protection traceoptions]
user@host# set file ddos-log
user@host# set file size 10m
user@host# set flag all
```

Results From configuration mode, confirm your configuration by entering the **show ddos-protection** command at the **system** hierarchy level.

```
[edit system]

user@host# show ddos-protection

traceoptions {
  file ddos-log size 10m;
  flag all;
}
protocols {
  radius {
    aggregate {
      bandwidth 150;
      burst 2000;
    }
    server {
      bypass-aggregate;
    }
    accounting {
      bandwidth 100;
      burst 1500;
      priority low;
    }
  }
}
```


If you are done configuring the device, enter **commit** from configuration mode.

Verification

To confirm that the DDoS protection configuration is working properly, perform these tasks:

- [Verifying the DDoS Protection Configuration on page 55](#)

Verifying the DDoS Protection Configuration

Purpose Verify that the RADIUS policer values have changed from the default.

Action From operational mode, enter the **show ddos-protection protocols radius parameters** command.

```
user@host> show ddos-protection protocols radius parameters
```

```
Packet types: 5, Modified: 3
```

```
* = User configured value
```

```
Protocol Group: Radius
```

```
Packet type: aggregate (Aggregate for all Radius traffic)
```

```
Aggregate policer configuration:
```

```
Bandwidth: 150 pps*
```

```
Burst: 2000 packets*
```

```
Recover time: 300 seconds
```

```
Enabled: Yes
```

```
Routing Engine information:
```

```
Bandwidth: 150 pps, Burst: 2000 packets, enabled
```

```
FPC slot 0 information:
```

```
Bandwidth: 100% (150 pps), Burst: 100% (2000 packets), enabled
```

```
Packet type: server (Radius server traffic)
```

```
Individual policer configuration:
```

```
Bandwidth: 200 pps
```

```
Burst: 2048 packets
```

```
Priority: High
```

```
Recover time: 300 seconds
```

```
Enabled: Yes
```

```
Bypass aggregate: Yes*
```

```
Routing Engine information:
```

```
Bandwidth: 200 pps, Burst: 2048 packets, enabled
```

```
FPC slot 0 information:
```

```
Bandwidth: 100% (200 pps), Burst: 100% (2048 packets), enabled
```

```
Packet type: accounting (Radius accounting traffic)
```

```
Individual policer configuration:
```

```
Bandwidth: 100 pps*
```

```
Burst: 1500 packets*
```

```
Priority: Low*
```

```
Recover time: 300 seconds
```

```
Enabled: Yes
```

```
Bypass aggregate: No
```

```
Routing Engine information:
```

```
Bandwidth: 100 pps, Burst: 1500 packets, enabled
```

```
FPC slot 0 information:
  Bandwidth: 100% (100 pps), Burst: 100% (1500 packets), enabled
```

```
Packet type: authorization (Radius authorization traffic)
```

```
Individual policer configuration:
```

```
  Bandwidth:      200 pps
  Burst:          2048 packets
  Priority:        High
  Recover time:   300 seconds
  Enabled:        Yes
  Bypass aggregate: No
```

```
Routing Engine information:
```

```
  Bandwidth: 200 pps, Burst: 2048 packets, enabled
```

```
FPC slot 0 information:
```

```
  Bandwidth: 100% (200 pps), Burst: 100% (2048 packets), enabled
```

Meaning The command output shows the current configuration of the RADIUS aggregate policer and the RADIUS accounting, server, and authorization control packet policers. Policer values that have been modified from the default values are marked with an asterisk. The output shows that the RADIUS policer configuration has been modified correctly.

- Related Documentation**
- [Understanding Distributed Denial-of-Service Protection on PTX Series and QFX Series Devices on page 50](#)
 - [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)
 - [Configuring Protection Against DDoS Attacks on page 60](#)

Configuring DDoS Protection Policers on QFX Series Switches

You can modify the DDoS protection configuration as follows:

- Modify the aggregate policer bandwidth and burst values for a protocol group. Default values exist for all protocol groups. See [protocols](#) for the supported protocol groups and their default policer values.
- Modify the policer bandwidth and burst values for individual control packet types within a protocol group, for those groups that support policers for individual packet types. You can specify that packets of a certain type have a higher or lower priority than other types. You can also specify that a packet type bypass the aggregate policer for the protocol group. See [protocols](#) for the supported packet types and their default policer values.
- Scale the bandwidth and burst values for a policer on a line card so that the policer triggers at lower thresholds than the overall protocol thresholds.
- Disable logging for a specific policer.
- Disable a policer on all line cards or on an individual line card. On devices with a single line card, disabling policers on the line card is effectively the same as disabling the policers globally. Note that deleting the configuration for a policer does not disable it—the policer merely reverts to its default settings.



BEST PRACTICE: We recommend that you model your network to determine the best values for your situation. Before you configure policers for your network, you can quickly view the default values for all protocol groups and packet types from operational mode by issuing the `show ddos-protection protocols parameters brief` command. You can also use the command to specify a single protocol group of interest; for example, issue the `show ddos-protection protocols radius parameters brief` command.

- [Configuring the Aggregate Policer for a Protocol Group on page 57](#)
- [Configuring Packet-Type Policers for a Protocol Group on page 58](#)
- [Configuring Policers on Individual Line Cards on page 59](#)
- [Disabling Policers and Policer Logging on page 59](#)

Configuring the Aggregate Policer for a Protocol Group

An aggregate policer exists for each protocol group. The aggregate policer enforces the traffic limits on the control packets for that protocol as a combined group.

To configure the DDoS aggregate policer for a protocol group:

1. Specify the aggregate policer for the protocol group.

```
[edit system ddos-protection protocols]
user@host# edit protocol-group aggregate
```

For example, to specify the DHCPv4v6 aggregate policer:

```
[edit system ddos-protection protocols]
user@host# edit dhcpv4v6 aggregate
```

2. (Optional) Configure the maximum traffic rate the policer allows for the protocol group.

```
[edit system ddos-protection protocols protocol-group aggregate]
user@host# set bandwidth packets-per-second
```

For example, to set a bandwidth of 300 packets per second for DHCPv4 and DHCPv6 packets:

```
[edit system ddos-protection protocols dhcpv4v6 aggregate]
user@host# set bandwidth 300
```

3. (Optional) Configure the maximum number of packets that the policer allows in a burst of traffic.

```
[edit system ddos-protection protocols protocol-group aggregate]
user@host# set burst size
```

For example, to set a maximum of 1500 DHCPv4v6 packets:

```
[edit system ddos-protection protocols dhcpv4v6 aggregate]
user@host# set burst 1500
```

Configuring Packet-Type Policers for a Protocol Group

Some protocol groups allow you to configure a separate policer for each control packet type. Control traffic is subject first to the packet-type policer and then to the aggregate policer.

To configure a packet-type policer:

1. Specify the protocol group and packet type.

```
[edit system ddos-protection protocols]
user@host# edit protocol-group packet-type
```

For example, to specify the RADIUS protocol group and the authorization packet type:

```
[edit system ddos-protection protocols]
user@host# edit radius authorization
```

2. (Optional) Configure the maximum traffic rate the policer allows for the packet type.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set bandwidth packets-per-second
```

For example, to set a bandwidth of 150 packets per second for RADIUS authorization packets:

```
[edit system ddos-protection protocols radius authorization]
user@host# set bandwidth 150
```

3. (Optional) Configure the maximum number of packets of the packet type that the policer allows in a burst of traffic.

```
[edit system ddos-protection protocols protocol-group packet-type ]
user@host# set burst size
```

For example, to set a maximum of 2000 RADIUS authorization packets:

```
[edit system ddos-protection protocols radius authorization]
user@host# set burst 2000
```

4. (Optional) Set the traffic priority—either high, medium, or low.

```
[edit system ddos-protection protocols protocol-group packet-type ]
user@host# set priority level
```

For example, to specify a low priority for RADIUS accounting packets:

```
[edit system ddos-protection protocols radius accounting]
user@host# set priority low
```

5. (Optional) Allow packets of the specified type to bypass the aggregate policer.

```
[edit system ddos-protection protocols protocol-group packet-type ]
user@host# set bypass-aggregate
```

For example, to bypass the aggregate policer for RADIUS server packets:

```
[edit system ddos-protection protocols radius server]
```

```
user@host# set bypass-aggregate
```

Configuring Policers on Individual Line Cards

You can alter a policer behavior on a specific line card by scaling the policer's configured bandwidth and burst values. On switches with a single fixed line card (a single FPC), scaling the policer values affects the entire switch.

- To scale the maximum bandwidth for a policer on a line card:

```
[edit system ddos-protection protocols protocol-group (aggregate | packet-type) ]
user@host# set fpc slot-number bandwidth-scale percentage
```

For example, to scale the maximum bandwidth allowed by the DHCPv4v6 aggregate policer for the line card in slot 3 to 80 percent:

```
[edit system ddos-protection protocols dhcpv4v6 aggregate]
user@host# set fpc 3 bandwidth-scale 80
```

- To scale the maximum burst size for a policer on the line card:

```
[edit system ddos-protection protocols protocol-group (aggregate | packet-type) ]
user@host# set fpc slot-number burst-scale percentage
```

For example, to scale the maximum burst size to 75 percent for the RADIUS server packets on the line card in slot 1:

```
[edit system ddos-protection protocols radius server ]
user@host# set fpc 1 burst-scale 75
```

Disabling Policers and Policer Logging

All supported policers are enabled by default. You can disable specific policers on a line card or line cards. Similarly, event logging by policers is enabled by default. You can selectively disable logging by a policer.

- To disable a policer on a specific line card:

```
[edit system ddos-protection protocols ]
user@host# set protocol-group (aggregate | packet-type) fpc slot-number disable-fpc
```

For example, to disable the DDoS policers for the RADIUS authorization packet type on line card 3:

```
[edit system ddos-protection protocols]
user@host# set radius authorization fpc 3 disable-fpc
```

On QFX Series switches that have a single line card (a single FPC), disabling a policer on that line card effectively disables it for the switch.

- To disable a policer on all line cards:

```
[edit system ddos-protection protocols ]
user@host# set protocol-group (aggregate | packet-type) disable-fpc
```

For example, to disable the aggregate policer for the BFD protocol group on all line cards:

```
[edit system ddos-protection protocols ]
```

```
user@host# set bfd aggregate disable-fpc
```

- To disable event logging by a policer:

```
[edit system ddos-protection protocols ]
```

```
user@host# set protocol-group (aggregate | packet-type) disable-logging
```

For example, to disable logging by the aggregate BFD policer:

```
[edit system ddos-protection protocols ]
```

```
user@host# set bfd aggregate disable-logging
```

**Related
Documentation**

- [Configuring Protection Against DDoS Attacks on page 60](#)
- [Example: Configuring DDoS Protection on QFX Series Switches on page 52](#)

Configuring Protection Against DDoS Attacks

DDoS protection is enabled by default for all supported protocol groups and packet types. Default values are present for bandwidth, bandwidth scale, burst, burst scale, priority, and recover time. You can change the DDoS configuration for individual packet types within a protocol group or for the aggregate policer for the protocol group. DDoS logging is enabled by default, but you can disable it globally for all DDoS events or for individual packet types within a protocol group. You can also fine-tune monitoring of DDoS events by configuring tracing operations.

You can disable DDoS protection at the Routing Engine and for all line cards either globally or for individual packet types within a protocol group.



NOTE: DDoS protection is supported only on MX Series routers that have only MPCs installed, T4000 routers that have only FPC5s installed, EX9200 switches, and certain QFX Series switches. If the router platforms have other line cards in addition to MPCs (MX Series) or FPC5s (T4000), the CLI accepts the configuration but the other line cards are not protected and so the router is not protected. The QFX Series switches do not support policers at the Routing Engine.

To configure DDoS protection:

1. (Optional) Configure global DDoS settings.

See [“Disabling DDoS Protection Policers and Logging Globally” on page 67](#).

2. (Optional) Configure DDoS settings for individual packet types.

For MX Series routers, T4000 routers, or EX9200 switches, see [“Configuring DDoS Protection Policers for Individual Packet Types” on page 61](#). For QFX Series switches, see [“Configuring DDoS Protection Policers on QFX Series Switches” on page 56](#).

3. (Optional) Configure tracing for DDoS operations.

See [“Tracing DDoS Protection Operations”](#) on page 68.

Related Documentation

- [Distributed Denial-of-Service \(DDoS\) Protection Overview](#) on page 33
- [Understanding Distributed Denial-of-Service Protection on PTX Series and QFX Series Devices](#) on page 50
- [Example: Configuring DDoS Protection](#) on page 40
- [Example: Configuring DDoS Protection on QFX Series Switches](#) on page 52

Configuring DDoS Protection Policers for Individual Packet Types

DDoS policers are applied to control packet traffic. You configure the maximum allowed traffic rate, maximum burst size, traffic priority, and how much time must pass since the last violation before the traffic flow is considered to have recovered from the attack. You can also scale the bandwidth and burst values for individual line cards so that the policers at this level trigger at lower thresholds than the overall protocol or packet thresholds.

You can configure an aggregate policer for any protocol group. The aggregate policer applies to the combination of all types of control packet traffic for that group. When you configure an aggregate policer for certain protocol groups, you can optionally bypass that policer for one or more particular packet types in that group. For those same groups, you can configure policers for individual packet types instead of configuring an aggregate policer.

DDoS protection is enabled by default. Although all policers have default parameter values, these values might not accurately reflect the control traffic pattern of your network.



BEST PRACTICE: We recommend that you model your network to determine the best values for your situation. Before you configure policers for your network, you can quickly view the default values for all packet types from operational mode by issuing the `show ddos-protection protocols parameters brief` command. You can also use the command to specify a single protocol group of interest; for example, issue the `show ddos-protection protocols dhcpv4 parameters brief` command.

You can disable a packet type's policer at either the Routing Engine, at a specified line card, or for all line cards. You can also disable logging of all DDoS events for individual packet types within a protocol group.

To configure individual, packet-level DDoS settings:

1. Specify the protocol group.

```
[edit system ddos-protection protocols]
user@host# edit protocol-group
```

For example, to specify the DHCPv4 protocol group:

```
[edit system ddos-protection protocols]
```

```
user@host# edit dhcpv4
```

2. Specify the packet type or the combination of all packet types in the group.

```
[edit system ddos-protection protocols protocol-group]  
user@host# set packet-type
```

or

```
[edit system ddos-protection protocols protocol-group]  
user@host# set aggregate
```

For example, to specify the DHCPv4 release packets:

```
[edit system ddos-protection protocols dhcpv4]  
user@host# edit release
```

3. (Optional) Configure the maximum traffic rate the policer allows for the packet type.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set bandwidth packets-per-second
```

For example, to set a bandwidth of 600 packets per second for DHCPv4 release packets:

```
[edit system ddos-protection protocols dhcpv4 release]  
user@host# set bandwidth 600
```

4. (Optional) Configure the maximum number of packets of the packet type that the policer allows in a burst of traffic.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set burst size
```

For example, to set a maximum of 5000 DHCPv4 release packets:

```
[edit system ddos-protection protocols dhcpv4 release]  
user@host# set burst 5000
```

5. (Optional) Set the traffic priority.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set priority level
```

For example, to specify a medium priority for DHCPv4 release packets:

```
[edit system ddos-protection protocols dhcpv4 release]  
user@host# set priority medium
```

6. (Optional) Configure how much time must pass since the last violation before the traffic flow is considered to have recovered from the attack.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set recover-time seconds
```

For example, to specify that 600 seconds must have passed since the last violation of the DHCPv4 release packet policer:


```
[edit system ddos-protection protocols dhcpv4 release]
user@host# set recover-time 600
```

7. (Optional) Bypass the aggregate policer configuration. This is relevant only when an aggregate policer is configured for the protocol group.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set bypass-aggregate
```

For example, to bypass the aggregate policer for DHCPv4 renew packets:

```
[edit system ddos-protection protocols dhcpv4 renew]
user@host# set bypass-aggregate
```

8. (Optional) Disable line card policers for the packet type on all line cards.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set disable-fpc
```



NOTE: When you disable line card policers globally at the [edit system ddos-protection global] hierarchy level, the global setting overrides the per-packet type setting shown in this step. If you subsequently remove the global configuration, then the per-packet type configuration takes effect.

For example, to disable the line card policer for DHCPv4 bootp packets:

```
[edit system ddos-protection protocols dhcpv4 bootp]
user@host# set disable-fpc
```

9. (Optional) Disable DDoS event logging for only this packet type.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set disable-logging
```



NOTE: Events disabled for the packet are associated with policer violations; logging of flow detection culprit flow events is not affected by this statement.



NOTE: When you disable DDoS event logging globally at the [edit system ddos-protection global] hierarchy level, the global setting overrides the per-packet type setting shown in this step. If you subsequently remove the global configuration, then the per-packet type configuration takes effect.

For example, to disable DDoS event logging line card policer for DHCPv4 discover packets:

```
[edit system ddos-protection protocols dhcpv4 discover]
```

```
user@host# set disable-logging
```

10. (Optional) Disable the Routing Engine policer for only this packet type.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set disable-routing-engine
```



NOTE: When you disable the Routing Engine policer globally at the [edit system ddos-protection global] hierarchy level, the global setting overrides the per-packet type setting shown in this step. If you subsequently remove the global configuration, then the per-packet type configuration takes effect.

For example, to disable the Routing Engine policer for DHCPv4 discover packets:

```
[edit system ddos-protection protocols dhcpv4 discover]  
user@host# set disable-routing-engine
```

11. (Optional) Configure packet-level settings for the packet type on a single line card.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# edit fpc slot-number
```

For example, to access DHCPv4 discover packet settings on the line card in slot 3:

```
[edit system ddos-protection protocols dhcpv4 discover]  
user@host# edit fpc 3
```

12. (Optional) Scale the policer bandwidth for the packet type on the line card.

```
[edit system ddos-protection protocols protocol-group packet-type fpc slot-number]  
user@host# set bandwidth-scale percentage
```

For example, to scale the bandwidth to 80 percent of the all-line-card setting configured for DHCPv4 discover packets on the line card in slot 3:

```
[edit system ddos-protection protocols dhcpv4 discover fpc 3]  
user@host# edit bandwidth-scale 80
```

13. (Optional) Scale the policer burst size for the packet type on the line card.

```
[edit system ddos-protection protocols protocol-group packet-type fpc slot-number]  
user@host# set burst-scale percentage
```

For example, to scale the maximum bandwidth to 75 percent of the all-line-card setting configured for DHCPv4 discover packets on the line card in slot 3:

```
[edit system ddos-protection protocols dhcpv4 discover fpc 3]  
user@host# edit burst-scale 75
```

14. (Optional) Disable the line card policer for the packet type on a particular line card.

```
[edit system ddos-protection protocols protocol-group packet-type fpc slot-number]  
user@host# set disable-fpc
```

For example, to disable the line card policer for DHCPv4 discover packets on the line card in slot 3:

```
[edit system ddos-protection protocols dhcpv4 discover fpc 3]
user@host# edit disable-fpc
```

Related Documentation

- [Configuring Protection Against DDoS Attacks on page 60](#)
- For a list of supported protocol groups and packet types, see [protocols on page 928](#).
- [Example: Configuring DDoS Protection on page 40](#)

Configuring the DDoS Protection Trace Log Filename

By default, the name of the file that records trace output for DDoS protection is **jddosd**. You can specify a different name with the **file** option.

To configure the filename for subscriber management database tracing operations:

- Specify the name of the file used for the trace output.

```
[edit system ddos-protection traceoptions]
user@host# set file ddos_logfile_1
```

Related Documentation

- [Tracing DDoS Protection Operations on page 68](#)

Configuring the Number and Size of DDoS Protection Log Files

You can optionally specify the number of compressed, archived trace log files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB); the default size is 128 kilobytes (KB).

The archived files are differentiated by a suffix in the format **.number.gz**. The newest archived file is **.0.gz** and the oldest archived file is **.(maximum number)-1.gz**. When the current trace log file reaches the maximum size, it is compressed and renamed, and any existing archived files are renamed. This process repeats until the maximum number of archived files is reached, at which point the oldest file is overwritten.

For example, you can set the maximum file size to 2 MB, and the maximum number of files to 20. When the file that receives the output of the tracing operation, **filename**, reaches 2 MB, **filename** is compressed and renamed **filename.0.gz**, and a new file called **filename** is created. When the new **filename** reaches 2 MB, **filename.0.gz** is renamed **filename.1.gz** and **filename** is compressed and renamed **filename.0.gz**. This process repeats until there are 20 trace files. Then the oldest file, **filename.19.gz**, is simply overwritten when the next oldest file, **filename.18.gz** is compressed and renamed to **filename.19.gz**.

To configure the number and size of trace files:

- Specify the name, number, and size of the file used for the trace output.

```
[edit system ddos-protection traceoptions]
```

```
user@host# set file ddos_1_logfile_1 files 20 size 2097152
```

- Related Documentation**
- [Tracing DDoS Protection Operations on page 68](#)

Configuring Access to the DDoS Protection Log File

By default, only the user who configures the tracing operation can access the log files. You can enable all users to read the log file and you can explicitly set the default behavior of the log file.

To specify that all users can read the log file:

- Configure the log file to be world-readable.

```
[edit system ddos-protection traceoptions]  
user@host# set file ddos_1_logfile_1 world-readable
```

To explicitly set the default behavior, only the user who configured tracing can read the log file:

- Configure the log file to be no-world-readable.

```
[edit system ddos-protection traceoptions]  
user@host# set file ddos_1_logfile_1 no-world-readable
```

- Related Documentation**
- [Tracing DDoS Protection Operations on page 68](#)

Configuring a Regular Expression for DDoS Protection Messages to Be Logged

By default, the trace operation output includes all messages relevant to the logged events.

You can refine the output by including regular expressions to be matched.

To configure regular expressions to be matched:

- Configure the regular expression.

```
[edit system ddos-protection traceoptions]  
user@host# set file ddos_1_logfile_1 match regex
```

- Related Documentation**
- [Tracing DDoS Protection Operations on page 68](#)

Configuring the DDoS Protection Tracing Flags

By default, only important events are logged. You can specify which events and operations are logged by specifying one or more tracing flags.

To configure the flags for the events to be logged:

- Configure the flags.

```
[edit system ddos-protection traceoptions]
user@host# set flag flag
```

**Related
Documentation**

- [Tracing DDoS Protection Operations on page 68](#)

Configuring the Severity Level to Filter Which DDoS Protection Messages Are Logged

The messages associated with a logged event are categorized according to severity level. You can use the severity level to determine which messages are logged for the event type. The severity level that you configure depends on the issue that you are trying to resolve. In some cases you might be interested in seeing all messages relevant to the logged event, so you specify **all** or **verbose**. Either choice generates a large amount of output. You can specify a more restrictive severity level, such as **notice** or **info** to filter the messages. By default, the trace operation output includes only messages with a severity level of **error**.

To configure the type of messages to be logged:

- Configure the message severity level.

```
[edit system ddos-protection traceoptions]
user@host# set level severity
```

**Related
Documentation**

- [Tracing DDoS Protection Operations on page 68](#)

Disabling DDoS Protection Policers and Logging Globally

DDoS policers are enabled by default for all supported protocol groups and packet types.

On MX Series routers, T4000 routers, and EX9200 switches, policers are established at the level of the individual line card and the Routing Engine. You can disable the line card policers globally for all MPCs or FPC5s. You can also disable the Routing Engine policer. When you disable either of these policers, the policers at that level for all protocol groups and packet types are disabled.

On QFX Series switches, policers are established at the level of individual line cards only. If you disable line-card policers globally, DDoS protection is disabled on the switch.

DDoS logging is also enabled by default. You can disable all DDoS event logging (including flow detection event logging) for all protocol groups and packet types across the router or switch.



NOTE: The global configuration for disabling policers and logging overrides any local configuration for packet types.

To configure global DDoS settings:

1. (Optional) Disable line card policers.

```
[edit system ddos-protection global]
user@host# set disable-fpc
```

2. (Optional) Disable Routing Engine policers (not supported on QFX Series switches).

```
[edit system ddos-protection global]
user@host# set disable-routing-engine
```

3. (Optional) Disable event logging.

```
[edit system ddos-protection global]
user@host# set disable-logging
```

**Related
Documentation**

- [Configuring Protection Against DDoS Attacks on page 60](#)
- [Configuring DDoS Protection Policers for Individual Packet Types on page 61](#) (MX Series routers, T4000 routers, or EX9200 switches)
- [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)

Tracing DDoS Protection Operations

The Junos OS trace feature tracks DDoS protection operations and records events in a log file. The error descriptions captured in the log file provide detailed information to help you solve problems.

By default, nothing is traced. When you enable the tracing operation, the default tracing behavior is as follows:

1. Important events are logged in a file located in the **/var/log** directory. By default, the router uses the filename **jddosd**. You can specify a different filename, but you cannot change the directory in which trace files are located.
2. When the trace log file **filename** reaches 128 kilobytes (KB), it is compressed and renamed **filename.0.gz**. Subsequent events are logged in a new file called **filename**, until it reaches capacity again. At this point, **filename.0.gz** is renamed **filename.1.gz** and **filename** is compressed and renamed **filename.0.gz**. This process repeats until the number of archived files reaches the maximum file number. Then the oldest trace file—the one with the highest number—is overwritten.

You can optionally specify the number of trace files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB). (For more information about how log files are created, see the [System Log Explorer](#).)

By default, only the user who configures the tracing operation can access log files. You can optionally configure read-only access for all users.

To configure all aspects of DDoS tracing operations:

1. (Optional) Configure a trace log filename.
See [“Configuring the DDoS Protection Trace Log Filename” on page 65.](#)
2. (Optional) Configure the number and size of trace logs.
See [“Configuring the Number and Size of DDoS Protection Log Files” on page 65.](#)
3. (Optional) Configure user access to trace logs.
See [“Configuring Access to the DDoS Protection Log File” on page 66.](#)
4. (Optional) Configure a regular expression to filter the information to be included in the trace log.
See [“Configuring a Regular Expression for DDoS Protection Messages to Be Logged” on page 66.](#)
5. (Optional) Configure flags to specify which events are logged.
See [“Configuring the DDoS Protection Tracing Flags” on page 66.](#)
6. (Optional) Configure a severity level for messages to specify which event messages are logged.
See [“Configuring the Severity Level to Filter Which DDoS Protection Messages Are Logged” on page 67.](#)

Related Documentation

- [Example: Configuring DDoS Protection on page 40](#)

Tracing DDoS Protection Operations

The Junos OS trace feature tracks DDoS protection operations and records events in a log file. The error descriptions captured in the log file provide detailed information to help you solve problems.

By default, nothing is traced. When you enable the tracing operation, the default tracing behavior is as follows:

1. Important events are logged in a file located in the **/var/log** directory. By default, the router uses the filename **jddosd**. You can specify a different filename, but you cannot change the directory in which trace files are located.
2. When the trace log file **filename** reaches 128 kilobytes (KB), it is compressed and renamed **filename.0.gz**. Subsequent events are logged in a new file called **filename**, until it reaches capacity again. At this point, **filename.0.gz** is renamed **filename.1.gz** and **filename** is compressed and renamed **filename.0.gz**. This process repeats until

the number of archived files reaches the maximum file number. Then the oldest trace file—the one with the highest number—is overwritten.

You can optionally specify the number of trace files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB). (For more information about how log files are created, see the [System Log Explorer](#).)

By default, only the user who configures the tracing operation can access log files. You can optionally configure read-only access for all users.

This topic describes how you can configure all aspects of DDoS tracing operations.

- [Configuring the DDoS Protection Trace Log Filename on page 70](#)
- [Configuring the Number and Size of DDoS Protection Log Files on page 70](#)
- [Configuring Access to the DDoS Protection Log File on page 71](#)
- [Configuring a Regular Expression for DDoS Protection Messages to Be Logged on page 71](#)
- [Configuring the DDoS Protection Tracing Flags on page 72](#)
- [Configuring the Severity Level to Filter Which DDoS Protection Messages Are Logged on page 72](#)

Configuring the DDoS Protection Trace Log Filename

By default, the name of the file that records trace output for DDoS protection is **jddosd**. You can specify a different name with the **file** option.

To configure the filename for subscriber management database tracing operations:

- Specify the name of the file used for the trace output.

```
[edit system ddos-protection traceoptions]  
user@host# set file ddos_logfile_1
```

See Also • [Tracing DDoS Protection Operations on page 68](#)

Configuring the Number and Size of DDoS Protection Log Files

You can optionally specify the number of compressed, archived trace log files to be from 2 through 1000. You can also configure the maximum file size to be from 10 KB through 1 gigabyte (GB); the default size is 128 kilobytes (KB).

The archived files are differentiated by a suffix in the format **.number.gz**. The newest archived file is **.0.gz** and the oldest archived file is **.(maximum number)-1.gz**. When the current trace log file reaches the maximum size, it is compressed and renamed, and any existing archived files are renamed. This process repeats until the maximum number of archived files is reached, at which point the oldest file is overwritten.

For example, you can set the maximum file size to 2 MB, and the maximum number of files to 20. When the file that receives the output of the tracing operation, **filename**, reaches 2 MB, **filename** is compressed and renamed **filename.0.gz**, and a new file called

filename is created. When the new *filename* reaches 2 MB, *filename.0.gz* is renamed *filename.1.gz* and *filename* is compressed and renamed *filename.0.gz*. This process repeats until there are 20 trace files. Then the oldest file, *filename.19.gz*, is simply overwritten when the next oldest file, *filename.18.gz* is compressed and renamed to *filename.19.gz*.

To configure the number and size of trace files:

- Specify the name, number, and size of the file used for the trace output.

```
[edit system ddos-protection traceoptions]
user@host# set file ddos_1_logfile_1 files 20 size 2097152
```

See Also • [Tracing DDoS Protection Operations on page 68](#)

Configuring Access to the DDoS Protection Log File

By default, only the user who configures the tracing operation can access the log files. You can enable all users to read the log file and you can explicitly set the default behavior of the log file.

To specify that all users can read the log file:

- Configure the log file to be world-readable.

```
[edit system ddos-protection traceoptions]
user@host# set file ddos_1_logfile_1 world-readable
```

To explicitly set the default behavior, only the user who configured tracing can read the log file:

- Configure the log file to be no-world-readable.

```
[edit system ddos-protection traceoptions]
user@host# set file ddos_1_logfile_1 no-world-readable
```

See Also • [Tracing DDoS Protection Operations on page 68](#)

Configuring a Regular Expression for DDoS Protection Messages to Be Logged

By default, the trace operation output includes all messages relevant to the logged events.

You can refine the output by including regular expressions to be matched.

To configure regular expressions to be matched:

- Configure the regular expression.

```
[edit system ddos-protection traceoptions]
user@host# set file ddos_1_logfile_1 match regex
```

See Also • [Tracing DDoS Protection Operations on page 68](#)

Configuring the DDoS Protection Tracing Flags

By default, only important events are logged. You can specify which events and operations are logged by specifying one or more tracing flags.

To configure the flags for the events to be logged:

- Configure the flags.

```
[edit system ddos-protection traceoptions]  
user@host# set flag flag
```

See Also • [Tracing DDoS Protection Operations on page 68](#)

Configuring the Severity Level to Filter Which DDoS Protection Messages Are Logged

The messages associated with a logged event are categorized according to severity level. You can use the severity level to determine which messages are logged for the event type. The severity level that you configure depends on the issue that you are trying to resolve. In some cases you might be interested in seeing all messages relevant to the logged event, so you specify **all** or **verbose**. Either choice generates a large amount of output. You can specify a more restrictive severity level, such as **notice** or **info** to filter the messages. By default, the trace operation output includes only messages with a severity level of **error**.

To configure the type of messages to be logged:

- Configure the message severity level.

```
[edit system ddos-protection traceoptions]  
user@host# set level severity
```

See Also • [Tracing DDoS Protection Operations on page 68](#)

Related Documentation • [Configuring Protection Against DDoS Attacks on page 60](#)

CHAPTER 3

Configuring Flow Detection for DDoS Protection

- [DDoS Protection Flow Detection Overview on page 74](#)
- [Configuring Flow Detection for DDoS Protection on page 77](#)
- [Enabling Flow Detection for All Protocol Groups and Packet Types on page 79](#)
- [Configuring the Culprit Flow Reporting Rate for All Protocol Groups and Packet Types on page 79](#)
- [Configuring the Violation Reporting Rate for All Protocol Groups and Packet Types on page 80](#)
- [Configuring the Detection Period for Suspicious Flows on page 80](#)
- [Configuring the Recovery Period for a Culprit Flow on page 81](#)
- [Configuring the Timeout Period for a Culprit Flow on page 81](#)
- [Configuring How Flow Detection Operates Globally on page 82](#)
- [Configuring How Flow Detection Operates for Individual Protocol Groups or Packets on page 83](#)
- [Configuring How Flow Detection Operates at Each Flow Aggregation Level on page 84](#)
- [Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level on page 85](#)
- [Configuring How Traffic in a Culprit Flow Is Controlled Globally on page 86](#)
- [Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level on page 87](#)
- [Disabling Automatic Logging of Culprit Flow Events for a Packet Type on page 88](#)
- [Disabling DDoS Protection Policers and Logging Globally on page 89](#)
- [Verifying and Managing Flow Detection on page 90](#)
- [Verifying and Managing DDoS Protection on page 90](#)

DDoS Protection Flow Detection Overview

Flow detection is an enhancement to DDoS protection that supplements the DDoS policer hierarchies; it is part of a complete DDoS protection solution. Flow detection uses a limited amount of hardware resources to monitor the arrival rate of host-bound flows of control traffic. Flow detection is much more scalable than a solution based on filter policers. Filter policers track all flows, which consumes a considerable amount of resources. In contrast, flow detection only tracks flows it identifies as suspicious, using far fewer resources to do so.

The flow detection application has two interrelated components, detection and tracking. Detection is the process where flows suspected of being improper are identified and subsequently controlled. Tracking is the process where flows are tracked to determine whether they are truly hostile and when these flows recover to within acceptable limits.

- [Flow Detection and Control on page 74](#)
- [Flow Tracking on page 75](#)
- [Notifications on page 75](#)

Flow Detection and Control

Flow detection is disabled by default. When you enable it at the **[edit system ddos-protection global]** hierarchy level, the application begins monitoring control traffic flows when a DDoS protection policer is violated for almost all protocol groups and packet types. In addition to enabling flow detection globally, you can configure its operation mode—that is, whether it is automatically triggered by the violation of a DDoS protection policer (the default) or is always on—for almost all protocol groups and packet types. You can override the global configuration settings for individual protocol groups and packet types. Other than event report rates, all other characteristics of flow detection are configurable only at the level of individual packet types.

Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.



NOTE: You cannot enable flow detection globally for the following groups and packet type because they do not have typical Ethernet, IP, or IPv6 headers:

- Protocol groups: **fab-probe**, **frame-relay**, **inline-ka**, **isis**, **jfm**, **mlp**, **pfe-alive**, **pos**, and **services**.
 - Packet type: **unclassified** in the **ip-options** protocol group.
-

Control flows are aggregated at three levels. The *subscriber level* is the finest grained of the three and consists of flows for individual subscriber sessions. The *logical interface level* aggregates multiple subscriber flows, so it is coarser grained and does not provide discrimination into individual subscriber flows. The *physical interface level* aggregates multiple logical interface flows, so it provides the coarsest view of traffic flows.

You can turn flow detection off or on at any of these levels. You can also configure whether it is automatically triggered by the violation of a DDoS protection policer or is always on. Flow detection begins at the finest-grained level that has detection configured to **on** or **automatic**.

When a flow arrives, flow detection checks whether the flow is already listed in a table of *suspicious* flows. A suspicious flow is one that exceeds the bandwidth allowed by default or configuration. If the flow is not in the table and the aggregation level flow detection mode is **on**, then flow detection lists the flow in the table. If the flow is not in the table and the flow detection mode is **automatic**, flow detection checks whether this flow is suspicious.

If the flow is suspicious, then it goes in the flow table. If the flow is not suspicious, then it is processed the same way at the next coarser aggregation level that has flow detection set to **on**. If none of the higher levels have detection on, then the flow continues to the DDoS protection packet policer for action, where it can be passed or dropped.

When the initial check finds the flow in the table, then the flow is dropped, policed, or kept, depending on the control mode setting for that aggregation level. All packets in dropped flows are dropped. In policed flows, packets are dropped until the flow is within the acceptable bandwidth for the aggregation level. Kept flows are passed along to the next aggregation level for processing.

Flow Tracking

The flow detection application tracks flows that have been listed in the suspicious flow table. It periodically checks each entry in the table to determine whether the listed flow is still suspicious (violating the bandwidth). If a suspicious flow has continuously violated the bandwidth since it was inserted in the table for a period greater than the configurable flow detection period, then it is considered to be a *culprit* flow rather than merely suspicious. However, if the bandwidth has been violated for less than the detection period, the violation is treated as a false positive. Flow detection considers the flow to be safe and stops tracking it (deletes it from the table).

You can enable a timeout feature that suppresses culprit flows for a configurable timeout period, during which the flow is kept in the flow table. (Suppression is the default behavior, but the flow detection action can be changed by the flow level control configuration.) If the check of listed flows finds one for which the timeout is enabled and the timeout period has expired, then the flow has timed out and it is removed from the flow table.

If the timeout has not yet expired or if the timeout feature is not enabled, then the application performs a recovery check. If the time since the flow last violated the bandwidth is longer than the configurable recovery period, the flow has recovered and is removed from the flow table. If the time since last violation is less than the recovery period, the flow is kept in the flow table.

Notifications

By default, flow detection automatically generates system logs for a variety of events that occur during flow detection. The logs are referred to as *reports* in the flow detection CLI. All protocol groups and packet types are covered by default, but you can disable

automatic logging for individual packet types. You can also configure the rate at which reports are sent, but this applies globally to all packet types.

Each report belongs to one of the following two types:

- Flow reports—These reports are generated by events associated with the identification and tracking of culprit flows. Each report includes identifying information for the flow that experienced the event. This information is used to accurately maintain the flow table; flows are deleted or retained in the table based on the information in the report. [Table 3 on page 76](#) describes the event that triggers each flow report.

Table 3: Triggering Event for Flow Detection Reports

Name	Description
DDOS_SCFD_FLOW_FOUND	A suspicious flow is detected.
DDOS_SCFD_FLOW_TIMEOUT	The timeout period expires for a culprit flow. Flow detection stops suppressing (or monitoring) the flow.
DDOS_SCFD_FLOW_RETURN_NORMAL	A culprit flow returns to within the bandwidth limit.
DDOS_SCFD_FLOW_CLEARED	A culprit flow is cleared manually with a clear command or automatically as the result of suspicious flow monitoring shifting to a different aggregation level.
DDOS_SCFD_FLOW_AGGREGATED	Control flows are aggregated to a coarser level. This event happens when the flow table nears capacity or when the flow cannot be found at a particular flow level and the next coarser level has to be searched.
DDOS_SCFD_FLOW_DEAGGREGATED	Control flows are deaggregated to a finer level. This event happens when the flow table is not very full or when flow control is effective and the total arrival rate for the flow at the policer for the packet type is below its bandwidth for a fixed, internal period.

- Bandwidth violation reports—These reports are generated by events associated with the discovery of suspicious flows. Each report includes identifying information for the flow that experienced the event. This information is used to track the suspicious flow and identify flows that are placed in the flow table. [Table 4 on page 76](#) describes the event that triggers each violation report.

Table 4: Triggering Event for Bandwidth Violation Reports

Name	Description
DDOS_PROTOCOL_VIOLATION_SET	The incoming traffic for a control protocol exceeded the configured bandwidth.
DDOS_PROTOCOL_VIOLATION_CLEAR	The incoming traffic for a violated control protocol returned to normal.

A report is sent only when triggered by an event; that is, there are no null or empty reports. Because the reports are made periodically, the only events of interest are ones that occur during the interval since the last report.

Release History Table

Release	Description
17.3R1	Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)

Configuring Flow Detection for DDoS Protection

Flow detection monitors the flows of control traffic for violation of the bandwidth allowed for each flow and manages traffic identified as a culprit flow. Suppression of the traffic is the default management option. Flow detection is typically implemented as part of an overall DDoS protection strategy, but it is also useful for troubleshooting and understanding traffic flow in new configurations. Flow detection is disabled by default.

Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.

Before you begin, ensure you have configured DDoS protection appropriately for your network. See [“Configuring Protection Against DDoS Attacks” on page 60](#) for detailed information about DDoS protection.

To configure flow detection:

1. Enable flow detection globally for all protocol groups and packet types.
See [“Enabling Flow Detection for All Protocol Groups and Packet Types” on page 79](#).
2. (Optional) Set the rate at which culprit flow events are reported for all line cards, protocol groups, and packet types.
See [“Configuring the Culprit Flow Reporting Rate for All Protocol Groups and Packet Types” on page 79](#).
3. Set the rate at which bandwidth violations are reported for all line cards, protocol groups, and packet types.
See [“Configuring the Violation Reporting Rate for All Protocol Groups and Packet Types” on page 80](#).
4. (Optional) Configure how long a suspicious flow must be in violation of flow bandwidth before being declared a culprit flow.
See [“Configuring the Detection Period for Suspicious Flows” on page 80](#).
5. (Optional) Configure how long a culprit flow must drop to within its allowed bandwidth before being declared normal.
See [“Configuring the Recovery Period for a Culprit Flow” on page 81](#).

6. (Optional) Enable and configure how long a culprit flow is suppressed or monitored.
See [“Configuring the Timeout Period for a Culprit Flow” on page 81.](#)
7. (Optional) Configure the global flow detection operation mode for all protocol groups and packet types.
See [“Configuring How Flow Detection Operates Globally” on page 82.](#)
8. (Optional) Override the global flow detection operation mode for protocol groups or packet types.
See [“Configuring How Flow Detection Operates for Individual Protocol Groups or Packets” on page 83.](#)
9. (Optional) Override the global, protocol group, or packet type flow detection operation mode for one or more flow aggregation levels (subscriber, logical interface, and physical interface).
See [“Configuring How Flow Detection Operates at Each Flow Aggregation Level” on page 84.](#)
10. Configure the maximum bandwidth for packet flows at each flow aggregation level (subscriber, logical interface, and physical interface).
See [“Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level” on page 85.](#)
11. (Optional) Configure how traffic for flows that violate their bandwidth is controlled at all flow aggregation levels (subscriber, logical interface, and physical interface) for all protocol groups and packet types.
See [“Configuring How Traffic in a Culprit Flow Is Controlled Globally” on page 86.](#)
12. (Optional) Configure how traffic for flows that violate their bandwidth is controlled at each flow aggregation level (subscriber, logical interface, and physical interface) for specific protocol groups and packet types.
See [“Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level” on page 87.](#)
13. (Optional) Disable automatic logging of suspicious flows.
See [“Disabling Automatic Logging of Culprit Flow Events for a Packet Type” on page 88.](#)

Release History Table

Release	Description
17.3R1	Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.

Related Documentation

- [Distributed Denial-of-Service \(DDoS\) Protection Overview on page 33](#)
- [DDoS Protection Flow Detection Overview on page 74](#)

Enabling Flow Detection for All Protocol Groups and Packet Types

By default, flow detection is disabled for all protocol groups and packet types. You must enable flow detection globally by including the **flow-detection** statement. If you subsequently disable flow detection for individual packet types, you cannot use this global statement to override all such individual configurations; you must re-enable detection at the packet configuration level.

To enable flow detection globally:

- Set flow detection.

```
[edit system ddos-protection global]
user@host# set flow-detection
```



NOTE: You cannot enable flow detection globally for the following groups and packet type because they do not have typical Ethernet, IP, or IPv6 headers:

- Protocol groups: fab-probe, frame-relay, inline-ka, isis, jfm, mlp, pfe-alive, pos, and services.
- Packet type: unclassified in the ip-options protocol group.

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)
- [Configuring Protection Against DDoS Attacks on page 60](#)

Configuring the Culprit Flow Reporting Rate for All Protocol Groups and Packet Types

When flow detection confirms that a suspicious flow it is tracking on a line card is indeed a culprit flow, it sends a report to the Routing Engine. Flow detection also reports each culprit flow that subsequently recovers to within the allowed bandwidth or is cleared. You can include the **flow-report-rate** statement to limit how many flows per second on each line card can be reported. Culprit flow events are reported for all protocol groups and packet types by default. When too many flows are reported, congestion can occur on the host path to the Routing Engine flow.

To globally configure the maximum report rate for culprit flows:

- Set the reporting rate.

```
[edit system ddos-protection global]  
user@host# set flow-report-rate rate
```

**Related
Documentation**

- [Configuring Flow Detection for DDoS Protection on page 77](#)
- [Disabling Automatic Logging of Culprit Flow Events for a Packet Type on page 88](#)

Configuring the Violation Reporting Rate for All Protocol Groups and Packet Types

By default, flow detection reports to the Routing Engine all violations of bandwidth at the FPC for all protocol groups and packet types. You can include the **violation-report-rate** statement to limit how many violations per second flow detection reports from the line cards, thus reducing the load on the router. We recommend that you configure a report rate that is suitable for your network rather than rely on the default value.

To globally configure the maximum bandwidth violation reporting rate:

- Set the reporting rate.

```
[edit system ddos-protection global]  
user@host# set violation-report-rate rate
```

**Related
Documentation**

- [Configuring Flow Detection for DDoS Protection on page 77](#)

Configuring the Detection Period for Suspicious Flows

DDoS protection flow detection considers a monitored flow to be a suspicious flow whenever the flow exceeds its allowed bandwidth, based on a crude test that eliminates obviously good flows from consideration. A closer examination of a suspicious flow requires the flow to remain in violation of the bandwidth for a period of time before flow detection considers it to be a culprit flow against which it must take action. You can include the **flow-detect-time** statement to configure the duration of this detection period or you can rely on the default period of three seconds.

Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.



BEST PRACTICE: We recommend that you use the default value for the detection period.

To specify how long a flow must be in violation before flow detection declares it to be a culprit flow:

- Set the detection period.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set flow-detect-time seconds
```

For example, include the following statement to require the DHCPv4 discover packet flow to be in violation of its allowed bandwidth for 30 seconds before it is considered to be a culprit flow:

```
[edit system ddos-protection protocols dhcpv4 discover]
user@host# set flow-detect-time 30
```

Release History Table

Release	Description
17.3R1	Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)

Configuring the Recovery Period for a Culprit Flow

After DDoS protection flow detection has identified a suspicious flow as a culprit flow, it has to determine when that flow no longer represents a threat to the router. When the traffic flow rate drops back to within the allowed bandwidth, the rate must remain within the bandwidth for a recovery period. Only then does flow detection consider the flow to be normal and stop the traffic handling action enacted against the culprit flow. You can include the **flow-recover-time** statement to configure the duration of this recovery period or you can rely on the default period of 60 seconds.

To specify how long a flow must be within its allowed bandwidth after a violation before flow detection declares it to be a normal flow:

- Set the recovery period.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set flow-recover-time seconds
```

For example, include the following statement to require the DHCPv4 discover packet flow to be in recovery for five minutes (300 seconds):

```
[edit system ddos-protection protocols dhcpv4 discover]
user@host# set flow-recover-time 300
```

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)

Configuring the Timeout Period for a Culprit Flow

When DDoS protection flow detection identifies a suspicious flow as a culprit flow, by default it suppresses traffic for that flow for as long as the traffic flow exceeds the bandwidth limit. Suppression stops and the flow is removed from the flow table when the time since the last violation by the flow is greater than the recovery period.

Alternatively, you can include the **timeout-active-flows** statement to enable flow detection to suppress a culprit flow for a configurable timeout period. When the timeout period expires, suppression stops and the flow is removed from the flow table. You can either include the **flow-timeout-time** statement to configure the duration of the timeout period or rely on the default timeout of 300 seconds.

To enable flow detection to suppress a culprit flow for a timeout period:

1. Enable the timeout.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set timeout-active-flows
```

2. Specify the timeout period.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set flow-timeout-time seconds
```

For example, include the following statements to suppress the DHCPv4 discover packet flow for 10 minutes (600 seconds):

```
[edit system ddos-protection protocols dhcpv4 discover]  
user@host# set timeout-active-flows  
user@host# set flow-timeout-time 600
```

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)

Configuring How Flow Detection Operates Globally

Flow detection is disabled globally for all protocol groups and packet types by default. After you have turned on flow detection globally with the **flow-detection** statement at the **[edit system ddos-protection global]** hierarchy level, you can include the **flow-detection-mode** statement to configure *how* flow detection operates globally for all protocol groups and packet types. By default, flow detection operates in automatic mode for all packet types, meaning that it monitors control traffic for suspicious flows only after a DDoS policer has been violated. You can also configure flow detection either to never monitor flows or to always monitor flows.

When flow detection is turned on, traffic flows are monitored by default for all protocol groups and packet types. You can override the global configuration by including the **flow-detection-mode** statement at the **[edit system ddos-protection protocols *protocol-group packet-type*]** hierarchy level to configure how flow detection works for a protocol group or a packet type. You can use the **flow-level-detection** statement to specify the behavior for one or more traffic flow aggregation levels (subscriber, logical interface, or physical interface).

Flow detection supports the following three modes:

- **automatic**—When a DDoS protection policer is violated, traffic flows where the violation occurred are monitored for suspicious behavior. Each suspicious flow is examined to determine whether it is the culprit flow that caused the violation.
- **off**—Traffic flows are never monitored for any protocol group or packet type.
- **on**—Traffic flows for all protocol groups and packet types are monitored for suspicious flows even when no DDoS protection policer is currently being violated.

To configure how flow detection operates at each flow aggregation level:

- Specify the detection mode.

```
[edit system ddos-protection protocols global]
user@host# set flow-detection-mode flow-detection-mode
```

For example, to configure flow detection to always monitor and detect flows for all protocol groups and packet types at all flow aggregation levels:

```
[edit system ddos-protection global]
user@host# set flow-detection-mode on
```

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)
- [Configuring How Flow Detection Operates for Individual Protocol Groups or Packets on page 83](#)
- [Configuring How Flow Detection Operates at Each Flow Aggregation Level on page 84](#)

Configuring How Flow Detection Operates for Individual Protocol Groups or Packets

By default, flow detection is disabled for all protocol groups and packet types. After you have turned on flow detection globally and configured the global operation mode, you can include the **flow-detection-mode** statement to configure flow detection to override the global setting for individual protocol groups and packet types. By default, flow detection operates in automatic mode for all packet types, meaning that it monitors control traffic for suspicious flows only after a DDoS policer has been violated. You can also configure flow detection either to never monitor flows or to always monitor flows.



NOTE: The flow detection mode at the packet level must be either **automatic** or **on** for flow detection to operate at individual flow aggregation levels.

To configure how flow detection operates:

- Disable suspicious flow detection for a packet type.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set flow-detection-mode off
```

- Set flow detection to operate automatically when a policer is violated.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set flow-detection-mode automatic
```

- Specify that flow detection is always on for a packet type.

```
[edit system ddos-protection protocols protocol-group packet-type]  
user@host# set flow-detection-mode on
```

**Related
Documentation**

- [Configuring Flow Detection for DDoS Protection on page 77](#)
- [Configuring How Flow Detection Operates Globally on page 82](#)
- [Configuring How Flow Detection Operates at Each Flow Aggregation Level on page 84](#)

Configuring How Flow Detection Operates at Each Flow Aggregation Level

When flow detection is turned on, traffic flows are monitored by default for all protocol groups and packet types. When a policer violation occurs, each suspicious flow is examined to determine whether it is the culprit flow that caused the violation. You can include the **flow-level-detection** statement to configure how flow detection works at each flow aggregation level for a packet type: subscriber, logical interface, or physical interface.



NOTE: The flow detection mode at the packet level must be either **automatic** or **on** for flow detection to operate at individual flow aggregation levels.

Like flow detection at the protocol group and packet level, flow detection at the flow aggregation level supports three modes:

- **automatic**—When a DDoS protection policer is violated, traffic flows at this flow aggregation level are monitored for suspicious behavior only until flow detection determines that the suspect flow is not at this aggregation level and instead must be at a coarser level of aggregation. Flows at this level are subsequently not searched again until the policer is no longer violated at the coarser level.
- **off**—Traffic flows are never monitored at this flow aggregation level.
- **on**—Traffic flows at this flow aggregation level are monitored for suspicious flows even when no DDoS protection policer is currently being violated, if flow detection at the packet level is configured to **on**. Monitoring continues at this level regardless of whether a suspect flow is identified at this level. However, if the packet level mode is **automatic**, then the policer must be in violation for traffic flows to be checked at this level.

Flows are examined first at the finest-grained (lowest bandwidth) flow aggregation level, subscriber. If the suspect flow is not found at the subscriber level, then flows are checked at the logical interface level. Finally, if the suspect is not found there, then flows are checked at the physical interface level; barring some misconfiguration, the culprit flow must be found at this level.

To configure how flow detection operates at each flow aggregation level:

1. (Optional) Specify the detection mode at the subscriber level.

```
[edit system ddos-protection protocols protocol-group packet-type flow-level-detection]
user@host# set subscriber flow-detection-mode
```

2. (Optional) Specify the detection mode at the logical interface level.

```
[edit system ddos-protection protocols protocol-group packet-type flow-level-detection]
user@host# set logical-interface flow-detection-mode
```

3. (Optional) Specify the detection mode at the physical interface level.

```
[edit system ddos-protection protocols protocol-group packet-type flow-level-detection]
user@host# set physical-interface flow-detection-mode
```

For example, include the following statements to configure flow detection to check for suspicious flows at the subscriber level only when the policer is being violated, to never check at the logical interface level, and to always check at the physical interface level:

```
[edit system ddos-protection protocols dhcpv4 discover]
user@host# edit flow-level-detection
user@host# set subscriber automatic
user@host# set logical-interface off
user@host# set physical-interface on
```

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)
- [Configuring How Flow Detection Operates Globally on page 82](#)
- [Configuring How Flow Detection Operates for Individual Protocol Groups or Packets on page 83](#)

Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level

You can include the **flow-level-bandwidth** statement to configure the maximum acceptable bandwidth for traffic flows for individual packet types. You have to specify the bandwidth behavior at a particular flow aggregation level: subscriber, logical interface, or physical interface. We recommend that you tune the bandwidth values for your network rather than rely on the defaults.

To configure the maximum bandwidth for traffic flows each flow aggregation level:

1. (Optional) Configure the bandwidth for flows at the subscriber level.

```
[edit system ddos-protection protocols protocol-group packet-type
flow-level-bandwidth]
user@host# set subscriber flow-bandwidth
```

2. (Optional) Configure the bandwidth for flows at the logical interface level.

```
[edit system ddos-protection protocols protocol-group packet-type
  flow-level-bandwidth]
user@host# set logical-interface flow-bandwidth
```

3. (Optional) Configure the bandwidth for flows at the physical interface level.

```
[edit system ddos-protection protocols protocol-group packet-type
  flow-level-bandwidth]
user@host# set physical-interface flow-bandwidth
```

For example, to configure the flow bandwidth to 1000 pps at the subscriber level, 5000 pps at the logical interface level, and 30,000 at the physical interface level:

```
[edit system ddos-protection protocols dhcpv4 discover]
user@host# edit flow-level-bandwidth
user@host# set subscriber 1000
user@host# set logical-interface 5000
user@host# set physical-interface 30000
```

**Related
Documentation**

- [Configuring Flow Detection for DDoS Protection on page 77](#)

Configuring How Traffic in a Culprit Flow Is Controlled Globally

When flow detection is enabled, all traffic in a culprit flow is dropped by default for all protocol groups and packet types and at all flow aggregation levels. You can include the **flow-level-control** statement to configure how flow detection controls traffic for all traffic flow aggregation levels globally for all protocol groups and packet types. You cannot specify the control behavior globally for a particular flow aggregation level: subscriber, logical interface, or physical interface. To do that, you must override the global configuration with the **flow-level-control** statement at the **[edit system ddos-protection protocols *protocol-group packet-type*]** hierarchy level.

You can configure flow detection flow control to employ one of the following modes:

- Drop all traffic—Configure flow control to drop all traffic when you think the flow that is violating a bandwidth limit is malicious. This behavior is the default at all flow aggregation levels for all protocol groups and packet types.
- Police traffic—Configure flow control to police a flow that is violating bandwidth, forcing the rate below the bandwidth limit. Flow control acts as a simple policer in this case.
- Keep all traffic—Configure flow control to keep all traffic whether the flow is in violation or below the bandwidth limit. This mode is helpful when you need to debug traffic flow for your network.

To configure how flow detection controls traffic in a culprit flow for all flow aggregation levels for all protocol groups and packet types:

- Specify the control mode.

```
[edit system ddos-protection global]
user@host# set flow-level-control flow-control-mode
```


Flow control mode enables great flexibility in how you manage control traffic in your network. For example, if you only want to ensure that control flows for all packet types at all aggregation levels are within their limits, you can configure flow control globally to police the traffic.

```
[edit system ddos-protection global]
user@host# set flow-level-control police
```

Or, suppose you want to detect culprit flows and suppress them for DHCP discover packets at the physical interface flow aggregation level, but only restrain all traffic to the allowed bandwidth at the other levels. You can configure the police action globally, then override it for the packet type and physical level by configuring that level to drop all traffic.

```
[edit system ddos-protection global]
user@host# set flow-level-control police
[edit system ddos-protection protocols dhcpv4 discover ]
user@host# set flow-level-control physical-interface drop
```

Related Documentation

- [Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level on page 87](#)
- [Configuring Flow Detection for DDoS Protection on page 77](#)

Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level

When flow detection is enabled, all traffic in a culprit flow is dropped by default for all protocol groups and packet types and at all flow aggregation levels. You can include the **flow-level-control** statement to configure flow detection to control traffic differently for individual packet types. You have to specify the control behavior at a particular flow aggregation level: subscriber, logical interface, or physical interface.

You can configure flow detection flow control to employ one of the following modes for a packet type:

- Drop all traffic—Configure flow control to drop all traffic when you think the flow that is violating a bandwidth limit is malicious. This behavior is the default at all flow aggregation levels.
- Police traffic—Configure flow control to police a flow that is violating bandwidth, forcing the rate below the bandwidth limit. Flow control acts as a simple policer in this case.
- Keep all traffic—Configure flow control to keep all traffic whether the flow is in violation or below the bandwidth limit. This mode is helpful when you need to debug traffic flow for your network.

Flow control mode enables great flexibility in how you manage control traffic in your network. For example, if you only want to ensure that control flows for a packet type at all aggregation levels are within their limits, you can configure flow control to police the traffic at each level. Or if you want to detect culprit flows and suppress them at one level but only restrain traffic to the allowed bandwidth at another level, you can configure one level to drop all traffic and the other to police traffic.

To configure how flow detection controls traffic in a culprit flow:

1. (Optional) Specify the control mode at the subscriber level.

```
[edit system ddos-protection protocols protocol-group packet-type flow-level-control]
user@host# set subscriber flow-control-mode
```

2. (Optional) Specify the control mode at the logical interface level.

```
[edit system ddos-protection protocols protocol-group packet-type flow-level-control]
user@host# set logical-interface flow-control-mode
```

3. (Optional) Specify the control mode at the physical interface level.

```
[edit system ddos-protection protocols protocol-group packet-type flow-level-control]
user@host# set physical-interface flow-control-mode
```

For example, to configure flow detection to keep all traffic for a physical interface under the configured bandwidth, but detect and suppress culprit flows at the subscriber level:

```
[edit system ddos-protection protocols dhcpv4 discover]
user@host# edit flow-level-control
user@host# set subscriber drop
user@host# set physical-interface police
user@host# edit flow-level-detection
user@host# set logical-interface off
```

In this example, you do not care about the logical interface, so flow detection is turned off for that level. Because flow detection is disabled, the state of flow control for that level does not matter.

Related Documentation

- [Configuring How Traffic in a Culprit Flow Is Controlled Globally on page 86](#)
- [Configuring Flow Detection for DDoS Protection on page 77](#)

Disabling Automatic Logging of Culprit Flow Events for a Packet Type

By default, flow detection automatically logs policer violation events associated with suspicious flows (violation reports) and culprit flow events (flow reports) for all protocol groups and packet types. You can include the **no-flow-logging** statement to prevent automatic logging of culprit flow events for individual packet types. Automatic logging of suspicious flow violation events is disabled with the **disable-logging** statement at the **[edit system ddos-protection global]** hierarchy level.

To disable automatic culprit flow event logging for a packet type:

- Disable logging.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set no-flow-logging
```

To disable automatic suspicious flow violation event logging for a packet type:

- Disable logging.

```
[edit system ddos-protection protocols protocol-group packet-type]
user@host# set disable-logging
```

For example, include the following statement to disable automatic logging for DHCPv4 DISCOVER packet flows:

```
[edit system ddos-protection protocols dhcpv4 discover]
user@host# set no-flow-logging
```

Related Documentation

- [Configuring Flow Detection for DDoS Protection on page 77](#)
- [Configuring DDoS Protection Policers for Individual Packet Types on page 61](#)

Disabling DDoS Protection Policers and Logging Globally

DDoS policers are enabled by default for all supported protocol groups and packet types.

On MX Series routers, T4000 routers, and EX9200 switches, policers are established at the level of the individual line card and the Routing Engine. You can disable the line card policers globally for all MPCs or FPC5s. You can also disable the Routing Engine policer. When you disable either of these policers, the policers at that level for all protocol groups and packet types are disabled.

On QFX Series switches, policers are established at the level of individual line cards only. If you disable line-card policers globally, DDoS protection is disabled on the switch.

DDoS logging is also enabled by default. You can disable all DDoS event logging (including flow detection event logging) for all protocol groups and packet types across the router or switch.



NOTE: The global configuration for disabling policers and logging overrides any local configuration for packet types.

To configure global DDoS settings:

1. (Optional) Disable line card policers.

```
[edit system ddos-protection global]
user@host# set disable-fpc
```

2. (Optional) Disable Routing Engine policers (not supported on QFX Series switches).

```
[edit system ddos-protection global]
user@host# set disable-routing-engine
```

3. (Optional) Disable event logging.

```
[edit system ddos-protection global]
user@host# set disable-logging
```

- Related Documentation**
- [Configuring Protection Against DDoS Attacks on page 60](#)
 - [Configuring DDoS Protection Policers for Individual Packet Types on page 61](#) (MX Series routers, T4000 routers, or EX9200 switches)
 - [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)

Verifying and Managing Flow Detection

Purpose View or clear information about flow detection as part of a DDoS protection configuration.

Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.

- Action**
- To display configuration information for flow detection:

```
user@host> show ddos-protection protocols flow-detection
```
 - To display information about culprit flows identified by flow detection, including number of flows detected and tracked, source address of the flow, arriving interface, and rates:

```
user@host> show ddos-protection protocols culprit-flows
```
 - To clear culprit flows for all packet types in all protocol groups:

```
user@host> clear ddos-protection protocols culprit-flows
```
 - To clear culprit flows for all packet types in a particular protocol group:

```
user@host> clear ddos-protection protocols protocol-group culprit-flows
```

Release History Table

Release	Description
17.3R1	Enhanced Subscriber Management supports flow detection for DDoS protection as of Junos OS Release 17.3R1.

- Related Documentation**
- [Verifying and Managing DDoS Protection on page 90](#)

Verifying and Managing DDoS Protection

Purpose View or clear information about DDoS configurations, states, and statistics.

- Action**
- To display the DDoS policer configuration, violation state, and statistics for all packet types in all protocol groups:

```
user@host> show ddos-protection protocols
```

If you issue the command before you make any configuration changes, the default policer values are displayed.

- To display the DDoS policer configuration, violation state, and statistics for a particular packet type in a particular protocol group:

```
user@host> show ddos-protection protocols protocol-group packet-type
```

- To display only the number of DDoS policer violations for all protocol groups:

```
user@host> show ddos-protection protocols violations
```

- To display a table of the DDoS configuration for all packet types in all protocol groups:

```
user@host> show ddos-protection protocols parameters brief
```

- To display a complete list of packet statistics and DDoS violation statistics for all packet types in all protocol groups:

```
user@host> show ddos-protection protocols statistics detail
```

- To display global DDoS violation statistics:

```
user@host> show ddos-protection statistics
```

- To display the DDoS version number:

```
user@host> show ddos-protection version
```

- To clear DDoS statistics for all packet types in all protocol groups:

```
user@host> clear ddos-protection protocols statistics
```

- To clear DDoS statistics for all packet types in a particular protocol group:

```
user@host> clear ddos-protection protocols protocol-group statistics
```

- To clear DDoS statistics for a particular packet type in a particular protocol group:

```
user@host> clear ddos-protection protocols protocol-group statistics packet-type
```

- To clear DDoS violation states for all packet types in all protocol groups:

```
user@host> clear ddos-protection protocols states
```

- To clear DDoS violation states for all packet types in a particular protocol group:

```
user@host> clear ddos-protection protocols protocol-group states
```

- To clear DDoS violation states for a particular packet type in a particular protocol group:

```
user@host> clear ddos-protection protocols protocol-group states packet-type
```

Related Documentation

- [Verifying and Managing Flow Detection on page 90](#)

PART 3

IPsec

- [Understanding How IPsec Secures Network Traffic on page 95](#)
- [IPsec System Requirements on page 113](#)
- [Configuring IPsec Security Associations on page 117](#)
- [Configuring IPsec on an ES PIC on page 193](#)
- [Configuring Traffic Filters to Direct Traffic Through the Desired IPsec Tunnel on page 221](#)
- [Configuring IPsec Dynamic Endpoints on page 233](#)
- [Configuring Digital Certificates for IPsec on page 241](#)
- [Using Security and Encryption on EX Series Switches on page 247](#)
- [Using IPsec with a Layer 3 VPN on page 253](#)

CHAPTER 4

Understanding How IPsec Secures Network Traffic

- [Considering General IPsec Issues on page 95](#)
- [Overview of IPsec on page 99](#)
- [Authentication Algorithms on page 100](#)
- [Encryption Algorithms on page 100](#)
- [IPsec Protocols on page 102](#)
- [IPsec Security Associations Overview on page 104](#)
- [Security Associations Overview on page 104](#)
- [IPsec Modes on page 105](#)
- [IKE Key Management Protocol Overview on page 106](#)
- [Digital Certificates on page 107](#)
- [Service Sets on page 109](#)
- [IPsec Terms and Acronyms on page 110](#)

Considering General IPsec Issues

Before you configure IPsec, it is helpful to understand some general guidelines.

- **IPv4 and IPv6 traffic and tunnels**—You can configure IPsec tunnels to carry traffic in the following ways: IPv4 traffic traveling over IPv4 IPsec tunnels, IPv6 traffic traveling over IPv4 IPsec tunnels, IPv4 traffic traveling over IPv6 IPsec tunnels, and IPv6 traffic traveling over IPv6 IPsec tunnels.
- **Configuration syntax differences between the AS and MultiServices PICs and the ES PIC**—There are slight differences in the configuration statements and operational mode commands that are used with the PICs that support IPsec. As a result, the syntax for the AS and MultiServices PICs cannot be used interchangeably with the syntax for the ES PIC. However, the syntax for one type of PIC can be converted to its equivalent syntax on the other PIC for interoperability. The syntax differences are highlighted in [Table 5 on page 96](#).

- Configuring keys for authentication and encryption—When preshared keys are required for authentication or encryption, you must use the guidelines shown in [Table 6 on page 97](#) to implement the correct key size.
- Rejection of weak and semiweak keys—The DES and 3DES encryption algorithms will reject weak and semiweak keys. As a result, do not create and use keys that contain the patterns listed in [Table 7 on page 98](#).

Table 5: Comparison of IPsec Configuration Statements and Operational Mode Commands for the AS and MultiServices PICs and ES PIC

AS and MultiServices PICs Statements and Commands	ES PIC Statements and Commands
Configuration Mode Statements	
[edit service-set <i>name</i>]	—
[edit services ipsec-vpn ike]	[edit security ike]
<ul style="list-style-type: none"> • policy {...} • proposal {...} 	<ul style="list-style-type: none"> • policy {...} • proposal {...}
[edit services ipsec-vpn ipsec]	[edit security ipsec]
<ul style="list-style-type: none"> • policy {...} • proposal {...} 	<ul style="list-style-type: none"> • policy {...} • proposal {...}
[edit services ipsec-vpn rule <i>rule-name</i>]	[edit interface es- <i>fpc</i> / <i>pic</i> / <i>port</i>]
<ul style="list-style-type: none"> • remote-gateway <i>address</i> 	<ul style="list-style-type: none"> • tunnel destination <i>address</i>
[edit services ipsec-vpn rule <i>rule-name</i> term <i>term-name</i>]	[edit security ipsec]
<ul style="list-style-type: none"> • from <i>match-conditions</i> {...} then dynamic {...} • from <i>match-conditions</i> {...} then manual {...} 	<ul style="list-style-type: none"> • security-association <i>name</i> dynamic {...} • security-association <i>name</i> manual {...}
[edit services ipsec-vpn rule-set]	—
[edit services service-set ipsec-vpn]	[edit interface es- <i>fpc</i> / <i>pic</i> / <i>port</i>]
<ul style="list-style-type: none"> • local-gateway <i>address</i> 	<ul style="list-style-type: none"> • tunnel source <i>address</i>
Operational Mode Commands	
clear security pki ca-certificate	—
clear security pki certificate-request	—
clear security pki local-certificate	—
clear services ipsec-vpn certificates	—

Table 5: Comparison of IPsec Configuration Statements and Operational Mode Commands for the AS and MultiServices PICs and ES PIC (continued)

AS and MultiServices PICs Statements and Commands	ES PIC Statements and Commands
request security pki ca-certificate enroll	request security certificate (unsigned)
request security pki ca-certificate load	request system certificate add
request security pki generate-certificate-request	—
request security pki generate-key-pair	request security key-pair
request security pki local-certificate enroll	request security certificate (signed)
request security pki local-certificate load	request system certificate add
show security pki ca-certificate	show system certificate
show security pki certificate-request	—
show security pki crt	—
show security pki local-certificate	show system certificate
show services ipsec-vpn certificates	show ipsec certificates
show services ipsec-vpn ike security-associations	show ike security-associations
show services ipsec-vpn ipsec security-associations	show ipsec security-associations

Table 6: Authentication and Encryption Key Lengths

	Number of Hexadecimal Characters	Number of ASCII Characters
Authentication		
HMAC-MD5-96	32	16
HMAC-SHA1-96	40	20
Encryption		
AES-128-CBC	16	32
AES-192-CBC	24	48
AES-256-CBC	32	64

Table 6: Authentication and Encryption Key Lengths (continued)

	Number of Hexadecimal Characters	Number of ASCII Characters
Authentication		
DES-CBC	16	8
3DES-CBC	48	24

Table 7: Weak and Semiweak Keys

Weak Keys			
0101	0101	0101	0101
1F1F	1F1F	1F1F	1F1F
E0E0	E0E0	E0E0	E0E0
FEFE	FEFE	FEFE	FEFE
Semiweak Keys			
01FE	01FE	01FE	01FE
1FE0	1FE0	0EF1	0EF1
01E0	01E0	01F1	01F1
1FFE	1FFE	0EFE	0EFE
011F	011F	010E	010E
E0FE	E0FE	F1FE	F1FE
FE01	FE01	FE01	FE01
E01F	E01F	F10E	F10E
E001	E001	F101	F101
FEF1	FEF1	FE0E	FE0E
1F01	1F01	0E01	0E01
FEE0	FEE0	FEF1	FEF1

Keep in mind the following limitations of IPsec services on the AS PIC:

- The AS PIC does not transport packets containing IPv4 options across IPsec tunnels. If you try to send packets containing IP options across an IPsec tunnel, the packets are dropped. Also, if you issue a **ping** command with the **record-route** option across an IPsec tunnel, the **ping** command fails.
- The AS PIC does not transport packets containing the following IPv6 options across IPsec tunnels: hop-by-hop, destination (Type 1 and 2), and routing. If you try to send packets containing these IPv6 options across an IPsec tunnel, the packets are dropped.
- Destination class usage is not supported with IPsec services on the AS PIC.

Overview of IPsec

IP Security (IPsec) provides a secure way to authenticate senders and encrypt IP version 4 (IPv4) and version 6 (IPv6) traffic between network devices, such as routers and hosts. IPsec offers network administrators and their users the benefits of data confidentiality, data integrity, sender authentication, and anti-replay services. IPsec is increasingly becoming a critical component in today's contemporary IP networks.

IPsec is a framework for ensuring secure private communication over IP networks and is based on standards developed by the International Engineering Task Force (IETF). IPsec provides security services at the network layer of the Open Systems Interconnection (OSI) model by enabling a system to select required security protocols, determine the algorithms to use for the security services, and implement any cryptographic keys required to provide the requested services. You can use IPsec to protect one or more paths between a pair of hosts, between a pair of security gateways (such as routers), or between a security gateway and a host.

The terminology and components of IPsec can be intimidating to first-time users. However, if you learn a few key concepts, you can quickly master and deploy IPsec in your network. The main concepts you need to understand are as follows:

- [IPsec-Enabled Line Cards on page 114](#)
- [Authentication Algorithms on page 100](#)
- [Encryption Algorithms on page 100](#)
- [IPsec Protocols on page 102](#)
- [IPsec Security Associations Overview on page 104](#)
- [IPsec Modes on page 105](#)
- [Digital Certificates on page 107](#)
- [Service Sets on page 109](#)

Authentication Algorithms

Authentication is the process of verifying the identity of the sender. Authentication algorithms use a shared key to verify the authenticity of the IPsec devices. The Junos OS uses the following authentication algorithms:

- Message Digest 5 (MD5) uses a one-way hash function to convert a message of arbitrary length to a fixed-length message digest of 128 bits. Because of the conversion process, it is mathematically infeasible to calculate the original message by computing it backwards from the resulting message digest. Likewise, a change to a single character in the message will cause it to generate a very different message digest number.

To verify that the message has not been tampered with, the Junos OS compares the calculated message digest against a message digest that is decrypted with a shared key. The Junos OS uses the MD5 hashed message authentication code (HMAC) variant that provides an additional level of hashing. MD5 can be used with authentication header (AH), Encapsulating Security Payload (ESP), and Internet Key Exchange (IKE).

- Secure Hash Algorithm 1 (SHA-1) uses a stronger algorithm than MD5. SHA-1 takes a message of less than 264 bits in length and produces a 160-bit message digest. The large message digest ensures that the data has not been changed and that it originates from the correct source. The Junos OS uses the SHA-1 HMAC variant that provides an additional level of hashing. SHA-1 can be used with AH, ESP, and IKE.
- SHA-256, SHA-384, and SHA-512 (sometimes grouped under the name SHA-2) are variants of SHA-1 and use longer message digests. The Junos OS supports the SHA-256 version of SHA-2, which can process all versions of Advanced Encryption Standard (AES), Data Encryption Standard (DES), and Triple DES (3DES) encryption.

- Related Documentation**
- *Understanding Junos VPN Site Secure*
 - [Encryption Algorithms on page 100](#)

Encryption Algorithms

Encryption encodes data into a secure format so that it cannot be deciphered by unauthorized users. Like authentication algorithms, a shared key is used with encryption algorithms to verify the authenticity of the IPsec devices. The Junos OS uses the following encryption algorithms:

- Data Encryption Standard cipher-block chaining (DES-CBC) is a symmetric secret-key block algorithm. DES uses a key size of 64 bits, where 8 bits are used for error detection and the remaining 56 bits provide encryption. DES performs a series of simple logical operations on the shared key, including permutations and substitutions. CBC takes the first block of 64 bits of output from DES, combines this block with the second block, feeds this back into the DES algorithm, and repeats this process for all subsequent blocks.
- Triple DES-CBC (3DES-CBC) is an encryption algorithm that is similar to DES-CBC, but provides a much stronger encryption result because it uses three keys for 168-bit

(3 x 56-bit) encryption. 3DES works by using the first key to encrypt the blocks, the second key to decrypt the blocks, and the third key to re-encrypt the blocks.

- Advanced Encryption Standard (AES) is a next-generation encryption method based on the Rijndael algorithm developed by Belgian cryptographers Dr. Joan Daemen and Dr. Vincent Rijmen. It uses a 128-bit block and three different key sizes (128, 192, and 256 bits). Depending on the key size, the algorithm performs a series of computations (10, 12, or 14 rounds) that include byte substitution, column mixing, row shifting, and key addition. The use of AES in conjunction with IPsec is defined in RFC 3602, *The AES-CBC Cipher Algorithm and Its Use with IPsec*.
- Starting In Junos OS Release 17.3R1, Advanced Encryption Standard in Galois/Counter Mode (AES-GCM) is supported for MS-MPCs and MS-MICs. However, in Junos FIPS mode, AES-GCM is not supported in Junos OS Release 17.3R1. Starting in Junos OS Release 17.4R1, AES-GCM is supported in Junos FIPS mode. AES-GCM is an authenticated encryption algorithm designed to provide both authentication and privacy. AES-GCM uses universal hashing over a binary Galois field to provide authenticated encryption and allows authenticated encryption at data rates of tens of Gbps.

Release History Table

Release	Description
17.4R1	Starting in Junos OS Release 17.4R1, AES-GCM is supported in Junos FIPS mode.
17.3R1	Starting In Junos OS Release 17.3R1, Advanced Encryption Standard in Galois/Counter Mode (AES-GCM) is supported for MS-MPCs and MS-MICs.

Related Documentation

- *Understanding Junos VPN Site Secure*
- *Configuring IKE Proposals*
- *Configuring IPsec Proposals*

IPsec Protocols

IPsec protocols determine the type of authentication and encryption applied to packets that are secured by the router. The Junos OS supports the following IPsec protocols:

- **AH**—Defined in RFC 2402, AH provides connectionless integrity and data origin authentication for IPv4 and IPv6 packets. It also provides protection against replays. AH authenticates as much of the IP header as possible, as well as the upper-level protocol data. However, some IP header fields might change in transit. Because the value of these fields might not be predictable by the sender, they cannot be protected by AH. In an IP header, AH can be identified with a value of **51** in the **Protocol** field of an IPv4 packet and the **Next Header** field of an IPv6 packet. An example of the IPsec protection offered by AH is shown in [Figure 3 on page 102](#).



NOTE: AH is not supported on the T Series, M120, and M320 routers.

Figure 3: AH Protocol

Header format

Byte 0	Byte 1	Byte 2	Byte 3
Next header	Payload length	Reserved	
Security Parameters Index (SPI)			
Sequence number			
Authentication data (variable)			

Original IPv4 packet before AH is applied

Original IP header	TCP header	Data
--------------------	------------	------

IPv4 packet after AH transport mode is applied

Original IP header	AH header	TCP header	Data
Authenticating			

IPv4 packet after AH tunnel mode is applied


New IP header	AH header	Original IP header	TCP header	Data
Authenticating				

g015522

- **ESP**—Defined in RFC 2406, ESP can provide encryption and limited traffic flow confidentiality, or connectionless integrity, data origin authentication, and an anti-replay service. In an IP header, ESP can be identified a value of **50** in the **Protocol** field of an IPv4 packet and the **Next Header** field of an IPv6 packet. An example of the IPsec protection offered by ESP is shown in [Figure 4 on page 103](#).

Figure 4: ESP Protocol


Header format

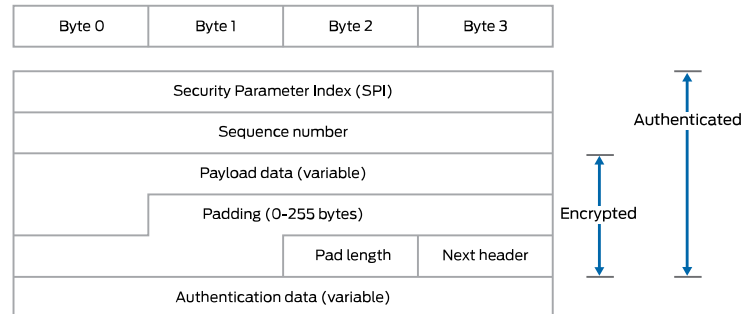


Original IPv4 packet before ESP is applied



IPv4 packet after ESP transport mode is applied



IPv4 packet after ESP tunnel mode is applied



8015521

- **Bundle**—When you compare AH with ESP, there are some benefits and shortcomings in both protocols. ESP provides a decent level of authentication and encryption, but does so only for part of the IP packet. Conversely, although AH does not provide encryption, it does provide authentication for the entire IP packet. Because of this, the Junos OS offers a third form of IPsec protocol called a protocol bundle. The bundle option offers a hybrid combination of AH authentication with ESP encryption.

Related Documentation

- [Understanding Junos VPN Site Secure](#)
- [Configuring IPsec Proposals](#)
- [Configuring Security Associations](#)
- [protocol \(IPsec\)](#)

IPsec Security Associations Overview

Another IPsec consideration is the type of security association (SA) that you wish to implement. An SA is a set of IPsec specifications that are negotiated between devices that are establishing an IPsec relationship. These specifications include preferences for the type of authentication, encryption, and IPsec protocol that should be used when establishing the IPsec connection. An SA can be either unidirectional or bidirectional, depending on the choices made by the network administrator. An SA is uniquely identified by a Security Parameter Index (SPI), an IPv4 or IPv6 destination address, and a security protocol (AH or ESP) identifier.

You can configure IPsec with a preset, preshared manual SA or use IKE to establish a dynamic SA. Manual SAs require you to specify all the IPsec requirements up front. Conversely, IKE dynamic SAs typically contain configuration defaults for the highest levels of authentication and encryption.

Security Associations Overview

To use IPsec security services, you create SAs between hosts. An SA is a simplex connection that allows two hosts to communicate with each other securely by means of IPsec. There are two types of SAs: manual and dynamic.

- Manual SAs require no negotiation; all values, including the keys, are static and specified in the configuration. Manual SAs statically define the Security Parameter Index (SPI) values, algorithms, and keys to be used, and require matching configurations on both ends of the tunnel. Each peer must have the same configured options for communication to take place.
- Dynamic SAs require additional configuration. With dynamic SAs, you configure IKE first and then the SA. IKE creates dynamic security associations; it negotiates SAs for IPsec. The IKE configuration defines the algorithms and keys used to establish the secure IKE connection with the peer security gateway. This connection is then used to dynamically agree upon keys and other data used by the dynamic IPsec SA. The IKE SA is negotiated first and then used to protect the negotiations that determine the dynamic IPsec SAs.
- Set up user-level tunnels or SAs, including tunnel attribute negotiations and key management. These tunnels can also be refreshed and terminated on top of the same secure channel.

The Junos OS implementation of IPsec supports two modes of security (transport mode and tunnel mode).

Related Documentation

- [IKE Key Management Protocol Overview on page 106](#)
- [IPsec Requirements for Junos-FIPS on page 114](#)
- [\[edit security\] Hierarchy Level](#)

IPsec Modes

When configuring IPsec, the last major consideration is the type of IPsec mode you wish to implement in your network. The Junos OS supports the following IPsec modes:

- Tunnel mode is supported for both AH and ESP in the Junos OS and is the usual choice for a router. In tunnel mode, the SA and associated protocols are applied to tunneled IPv4 or IPv6 packets. For a tunnel mode SA, an outer IP header specifies the IPsec processing destination, and an inner IP header specifies the ultimate destination for the packet. The security protocol header appears after the outer IP header, and before the inner IP header. In addition, there are slight differences for tunnel mode when you implement it with AH and ESP:
 - For AH, portions of the outer IP header are protected, as well as the entire tunneled IP packet.
 - For ESP, only the tunneled packet is protected, not the outer header.

When one side of a security association is a security gateway (such as a router), the SA must use tunnel mode. However, when traffic (for example, SNMP commands or BGP sessions) is destined for a router, the system acts as a host. Transport mode is allowed in this case because the system does not act as a security gateway and does not send or receive transit traffic.

- Transport mode provides a security association between two hosts. In transport mode, the protocols provide protection primarily for upper layer protocols. For IPv4 and IPv6 packets, a transport mode security protocol header appears immediately after the IP header and any options, and before any higher layer protocols (for example, TCP or UDP). There are slight differences for transport mode when you implement it with AH and ESP:
 - For AH, selected portions of the IP header are protected, as well as selected portions of the extension headers and selected options within the IPv4 header.
 - For ESP, only the higher layer protocols are protected, not the IP header or any extension headers preceding the ESP header.



NOTE: Support for IPsec transport mode is primarily limited to routing authentication and to certain configurations only application when Junos FIPs code is used.

Related Documentation

- [Overview of IPsec on page 99](#)
- [Configuring Security Associations on page 117](#)
- [Understanding OSPFv3 Authentication](#)
- [Example: Configuring IPsec Authentication for an OSPF Interface](#)

IKE Key Management Protocol Overview

IKE is a key management protocol that creates dynamic SAs; it negotiates SAs for IPsec. An IKE configuration defines the algorithms and keys used to establish a secure connection with a peer security gateway.

IKE does the following:

- Negotiates and manages IKE and IPsec parameters
- Authenticates secure key exchange
- Provides mutual peer authentication by means of shared secrets (not passwords) and public keys
- Provides identity protection (in main mode)

IKE occurs over two phases. In the first phase, it negotiates security attributes and establishes shared secrets to form the bidirectional IKE SA. In the second phase, inbound and outbound IPsec SAs are established. The IKE SA secures the exchanges in the second phase. IKE also generates keying material, provides Perfect Forward Secrecy, and exchanges identities.



NOTE: Starting in Junos OS Release 14.2, when you perform an SNMP walk of the `jnxIkeTunnelEntry` object in the `jnxIkeTunnelTable` table, the **Request failed: OID not increasing** error message might be generated. This problem occurs only when simultaneous Internet Key Exchange security associations (IKE SAs) are created, which occurs when both ends of the SA initiate IKE SA negotiations at the same time. When an SNMP MIB walk is performed to display IKE SAs, the `snmpwalk` tool expects the object identifiers (OIDs) to be in increasing order. However, in the case of simultaneous IKE SAs, the OIDs in the SNMP table might not be in increasing order. This behavior occurs because the tunnel IDs, which are part of the OIDs, are allocated based on the initiator of the IKE SA, which can be on either side of the IKE tunnel.

The following is an example of an SNMP MIB walk that is performed on IKE simultaneous SAs:

```
jnxIkeTunLocalRole."ipsec_ss_cust554".ipv4."192.0.2.41".47885 = INTEGER:
responder(2)    >>> This is Initiator SA
jnxIkeTunLocalRole."ipsec_ss_cust554".ipv4."192.0.2.41".47392 = INTEGER:
initiator(1)    >>> This is Responder's SA
```

The OID comparison fails when the SNMP walk is tunnel ID (47885 and 47392). It cannot be ensured when an SNMP walk is performed that the tunnel IDs are in increasing order because tunnels might be initiated from either side.

To work around this problem, the SNMP MIB walk contains an option, `-Cc`, to disable check for increasing OIDs. The following is an example of the MIB walk performed on the `jnxIkeTunnelEntry` table with the `-Cc` option:

```
snmpwalk -Os -Cc -c public -v 1 vira jnxIkeTunnelEntry
```

Release History Table

Release	Description
14.2	Starting in Junos OS Release 14.2, when you perform an SNMP walk of the <code>jnxIkeTunnelEntry</code> object in the <code>jnxIkeTunnelTable</code> table, the Request failed: OID not increasing error message might be generated.

Related Documentation

- [Security Associations Overview on page 104](#)
- [IPsec Requirements for Junos-FIPS on page 114](#)
- [\[edit security\] Hierarchy Level](#)

Digital Certificates

For small networks, the use of preshared keys in an IPsec configuration is often sufficient. However, as a network grows, it can become a challenge to add new preshared keys on

the local router and all new and existing IPSec peers. One solution for scaling an IPSec network is to use digital certificates.

A digital certificate implementation uses the public key infrastructure (PKI), which requires you to generate a key pair consisting of a public key and a private key. The keys are created with a random number generator and are used to encrypt and decrypt data. In networks that do not use digital certificates, an IPSec-enabled device encrypts data with the private key and IPSec peers decrypt the data with the public key.

With digital certificates, the key sharing process requires an additional level of complexity. First, you and your IPSec peers request a certificate authority (CA) to send you a CA certificate that contains the public key of the CA. Next, you request the CA to enroll a local digital certificate that contains your public key and some additional information. When the CA processes your request, it signs your local certificate with the private key of the CA. Then you install the CA certificate and the local certificate in your local router and load the CA certificate in the remote devices before you can establish IPSec tunnels with your peers.

When you request a peering relationship with an IPSec peer, the peer receives a copy of your local certificate. Because the peer already has the CA certificate loaded, it can use the CA's public key contained in the CA certificate to decrypt your local certificate that has been signed by the CA's private key. As a result, the peer now has a copy of your public key. The peer encrypts data with your public key before sending it to you. When your local router receives the data, it decrypts the data with your private key.

In the Junos OS, you must implement the following steps to be able to initially use digital certificates:

- Configure a CA profile to request CA and local digital certificates—The profile contains the name and URL of the CA or registration authority (RA), as well as some retry timer settings.
- Configure certificate revocation list support—A certificate revocation list (CRL) contains a list of certificates canceled before their expiration date. When a participating peer uses a CRL, the CA acquires the most recently issued CRL and checks the signature and validity of a peer's digital certificate. You can request and load CRLs manually, configure an LDAP server to handle CRL processing automatically, or disable CRL processing that is enabled by default.
- Request a digital certificate from the CA—The request can be made either online or manually. Online CA digital certificate requests use the Simple Certificate Enrollment Protocol (SCEP) format. If you request the CA certificate manually, you must also load the certificate manually.
- Generate a private/public key pair—The public key is included in the local digital certificate and the private key is used to decrypt data received from peers.
- Generate and enroll a local digital certificate—The local certificate can be processed online using SCEP or generated manually in the Public-Key Cryptography Standards

#10 (PKCS-10) format. If you create the local certificate request manually, you must also load the certificate manually.

- Apply the digital certificate to an IPsec configuration—To activate a local digital certificate, you configure the IKE proposal to use digital certificates instead of preshared keys, reference the local certificate in the IKE policy, and identify the CA in the service set.

Optionally, you can do the following:

- Configure the digital certificate to automatically reenroll—Starting in Junos OS Release 8.5, you can configure automatic reenrollment for digital certificates.
- Monitor digital certificate events and delete certificates and requests—You can issue operational mode commands to monitor IPsec tunnels established using digital certificates and delete certificates or requests.

For more details on managing digital certificates, configuring them in an IPsec service set, and monitoring and clearing them, see [“Using Digital Certificates for IPsec” on page 241](#) and [“Example: AS PIC IKE Dynamic SA with Digital Certificates Configuration” on page 149](#).

Service Sets

The Adaptive Services PIC supports two types of service sets when you configure IPsec tunnels. Because they are used for different purposes, it is important to know the differences between these service set types.

- Next-hop service set—Supports multicast and multicast-style dynamic routing protocols (such as OSPF) over IPsec. Next-hop service sets allow you to use *inside* and *outside* logical interfaces on the Adaptive Services PIC to connect with multiple routing instances. They also allow the use of Network Address Translation (NAT) and stateful firewall capabilities. However, next-hop service sets do not monitor Routing Engine traffic by default and require configuration of multiple service sets to support traffic from multiple interfaces.
- Interface service set—Applied to a physical interface and similar to a stateless firewall filter. They are easy to configure, can support traffic from multiple interfaces, and can monitor Routing Engine traffic by default. However, they cannot support dynamic routing protocols or multicast traffic over the IPsec tunnel.

In general, we recommend that you use next-hop service sets because they support routing protocols and multicast over the IPsec tunnel, they are easier to understand, and the routing table makes forwarding decisions without administrative intervention.

Related Documentation

- *Understanding Junos VPN Site Secure*
- *Configuring Junos VPN Site Secure or IPsec VPN*

IPSec Terms and Acronyms

A

Adaptive Services PIC	A next-generation Physical Interface Card (PIC) that provides IPsec services and other services, such as Network Address Translation (NAT) and stateful firewall, on M Series and T Series platforms.
Advanced Encryption Standard (AES)	A next-generation encryption method that is based on the Rijndael algorithm and uses a 128-bit block, three different key sizes (128, 192, and 256 bits), and multiple rounds of processing to encrypt data.
authentication header (AH)	A component of the IPsec protocol used to verify that the contents of a packet have not changed (data integrity), and to validate the identity of the sender (data source authentication). For more information about AH, see RFC 2402.

C

certificate authority (CA)	A trusted third-party organization that generates, enrolls, validates, and revokes digital certificates. The CA guarantees the identity of a user and issues public and private keys for message encryption and decryption.
certificate revocation list (CRL)	A list of digital certificates that have been invalidated before their expiration date, including the reasons for their revocation and the names of the entities that have issued them. A CRL prevents usage of digital certificates and signatures that have been compromised.
cipher block chaining (CBC)	A cryptographic method that encrypts blocks of ciphertext by using the encryption result of one block to encrypt the next block. Upon decryption, the validity of each block of ciphertext depends on the validity of all the preceding ciphertext blocks. For more information on how to use CBC with DES and ESP to provide confidentiality, see RFC 2405.

D

Data Encryption Standard (DES)	An encryption algorithm that encrypts and decrypts packet data by processing the data with a single shared key. DES operates in increments of 64-bit blocks and provides 56-bit encryption.
digital certificate	Electronic file that uses private and public key technology to verify the identity of a certificate creator and distribute keys to peers.

E

Encapsulating Security Payload (ESP)	A component of the IPsec protocol used to encrypt data in an IPv4 or IPv6 packet, provide data integrity, and ensure data source authentication. For more information about ESP, see RFC 2406.
ES PIC	A PIC that provides first-generation encryption services and software support for IPsec on M Series and T Series platforms.

H

Hashed Message Authentication Code (HMAC)	A mechanism for message authentication using cryptographic hash functions. HMAC can be used with any iterative cryptographic hash function, such as MD5 or SHA-1, in combination with a secret shared key. For more information on HMAC, see RFC 2104.
--	--

I

Internet Key Exchange (IKE)	Establishes shared security parameters for any hosts or routers using IPsec. IKE establishes the SAs for IPsec. For more information about IKE, see RFC 2407.
------------------------------------	---

M

Message Digest 5 (MD5)	An authentication algorithm that takes a data message of arbitrary length and produces a 128-bit message digest. For more information, see RFC 1321.
-------------------------------	--

P

Perfect Forward Secrecy (PFS)	Provides additional security by means of a Diffie-Hellman shared secret value. With PFS, if one key is compromised, previous and subsequent keys are secure because they are not derived from previous keys.
--------------------------------------	--

public key infrastructure (PKI)	A trust hierarchy that enables users of a public network to securely and privately exchange data through the use of public and private cryptographic key pairs that are obtained and shared with peers through a trusted authority.
--	---

R

registration authority (RA)	A trusted third-party organization that acts on behalf of a CA to guarantee the identity of a user.
------------------------------------	---

Routing Engine	A PCI-based architectural portion of a Junos OS-based router that handles the routing protocol process, the interface process, some of the chassis components, system management, and user access.
-----------------------	--

S

Secure Hash Algorithm 1 (SHA-1)	An authentication algorithm that takes a data message of less than 264 bits in length and produces a 160-bit message digest. For more information on SHA-1, see RFC 3174.
--	---

Secure Hash Algorithm 2 (SHA-2)	A successor to the SHA-1 authentication algorithm that includes a group of SHA-1 variants (SHA-224, SHA-256, SHA-384, and SHA-512). SHA-2 algorithms use larger hash sizes and are designed to work with enhanced encryption algorithms such as AES.
--	--

security association (SA)	Specifications that must be agreed upon between two network devices before IKE or IPsec are allowed to function. SAs primarily specify protocol, authentication, and encryption options.
----------------------------------	--

Security Association Database (SADB)	A database where all SAs are stored, monitored, and processed by IPsec.
---	---

Security Parameter Index (SPI)	An identifier that is used to uniquely identify an SA at a network host or router.
---------------------------------------	--

**Security Policy
Database (SPD)**

A database that works with the SADB to ensure maximum packet security. For inbound packets, IPsec checks the SPD to verify if the incoming packet matches the security configured for a particular policy. For outbound packets, IPsec checks the SPD to see if the packet needs to be secured.

**Simple Certificate
Enrollment Protocol
(SCEP)**

A protocol that supports CA and registration authority (RA) public key distribution, certificate enrollment, certificate revocation, certificate queries, and certificate revocation list (CRL) queries.

T**Triple Data Encryption
Standard (3DES)**

An enhanced DES algorithm that provides 168-bit encryption by processing data three times with three different keys.

CHAPTER 5

IPsec System Requirements

- [IPsec System Requirements on page 113](#)
- [IPsec Requirements for Junos-FIPS on page 114](#)
- [IPsec-Enabled Line Cards on page 114](#)

IPsec System Requirements

To implement IPsec, your system must meet these minimum requirements:

- Junos OS Release 8.5 or later for automatic reenrollment of digital certificates.
- Junos OS Release 8.3 or later for IPsec support on OSPF version 2
- Junos OS Release 8.2 or later for support on M120 routers
- Junos OS Release 8.1 or later for IPsec IKE support in routing instances, and certificate revocation list support on AS and MultiServices PICs installed on M Series and T Series routers
- Junos OS Release 7.6 or later for AES encryption and SHA-256 authentication support on AS PICs installed in M Series routers, and IPv6-based IPsec for AS PICs installed in M Series and T Series routers
- Junos OS Release 7.5 or later for digital certificate support on AS PICs installed in M Series and T Series routers, and support of the IPsec Monitoring Management Information Base (MIB)
- Junos OS Release 7.4 or later for dynamic endpoint tunneling support and configuring multiple routed tunnels in a single next-hop service set
- Junos OS Release 7.2 or later for transport mode IPsec on Routing Engines running OSPF version 3 and support for the AS II FIPS PIC
- Junos OS Release 7.1 or later for IPsec on the ES PIC for T Series and M320 routers
- Junos OS Release 6.4 or later for IPsec on the AS PIC for T Series and M320 routers
- Junos OS Release 6.2 or later for IPsec on the AS PIC for M Series routers
- Junos OS Release 5.7 or later for multicast over IPsec tunnels on M Series routers
- Junos OS Release 5.2 or later for IPsec on the ES PIC for M Series routers

- Two Juniper Networks M Series or T Series routers
- Two ES PICs or AS PICs for M Series and T Series routers

IPsec Requirements for Junos-FIPS

In a Junos-FIPS environment, hardware configurations with two Routing Engines must be configured to use IPsec and a private routing instance for all communications between the Routing Engines. IPsec communication between the Routing Engines and AS II FIPS PICs is also required.

- Related Documentation**
- [Security Associations Overview on page 104](#)
 - [IKE Key Management Protocol Overview on page 106](#)
 - [\[edit security\] Hierarchy Level](#)

IPsec-Enabled Line Cards

The first choice you need to make when implementing IPsec on a Junos OS-based router is the type of line card you wish to use. The term line card includes Physical Interface Cards (PICs), Modular Interface Cards (MICs), Dense Port Concentrators (DPCs), and Modular Port Concentrators (MPCs). The following line cards support IPsec implementation.



NOTE: See the specific hardware documentation for your router to determine if the line cards on that router support IPsec.

The following line cards support IPsec:

- The Encryption Services (ES) PIC provides encryption services and software support for IPsec.
- The Adaptive Services (AS) PIC and the Adaptive Services (AS) II PIC provide IPsec services and other services, such as Network Address Translation (NAT) and stateful firewall.
- The AS II Federal Information Processing Standards (FIPS) PIC is a special version of the AS PIC that communicates securely with the Routing Engine by using internal IPsec. You must configure IPsec on the AS II FIPS PIC when you enable FIPS mode on the router. For more information about implementing IPsec on an AS II FIPS PIC installed in a router configured in FIPS mode, see the *Secure Configuration Guide for Common Criteria and Junos-FIPS*.
- The Multiservices PICs supply hardware acceleration for an array of packet processing-intensive services. These services include IPsec services and other services, such as stateful firewall, NAT, IPsec, anomaly detection, and tunnel services.
- The Multiservices Dense Port Concentrators (DPCs) provide IPsec services.

- The Multiservices Modular Port Concentrators (MS-MPCs) support IPsec services.
- The Multiservices Modular Interface Cards (MS-MICs) support IPsec services.



NOTE: Junos OS extension-provider packages, including the IPsec service package, come preinstalled and preconfigured on MS-MPCs and MS-MICs.

**Related
Documentation**

- [Overview of IPSec on page 99](#)
- [Considering General IPsec Issues on page 95](#)
- *Understanding Services PICs*
- *Enabling Service Packages*
- *Multiservices MIC and Multiservices MPC (MS-MIC and MS-MPC) Overview*

CHAPTER 6

Configuring IPsec Security Associations

- [Configuring Security Associations on page 117](#)
- [Configuring Manual SAs on page 117](#)
- [Example: AS PIC Manual SA Configuration on page 119](#)
- [Example: ES PIC Manual SA Configuration on page 127](#)
- [Configuring IKE Dynamic SAs on page 135](#)
- [Example: AS PIC IKE Dynamic SA Configuration on page 140](#)
- [Example: AS PIC IKE Dynamic SA with Digital Certificates Configuration on page 149](#)
- [Example: ES PIC IKE Dynamic SA Configuration on page 167](#)
- [Example: IKE Dynamic SA Between an AS PIC and an ES PIC Configuration on page 178](#)
- [Option: Configuring Multiple Routed Tunnels in a Single Next-Hop Service Set on page 190](#)

Configuring Security Associations

The first IPsec configuration step is to select a type of security association (SA) for your IPsec connection. You must statically configure all specifications for manual SAs, but you can rely on some defaults when you configure an IKE dynamic SA. To configure a security association, see the following sections.

Configuring Manual SAs

On the ES PIC, you configure a manual security association at the **[edit security ipsec security-association *name*]** hierarchy level. Include your choices for authentication, encryption, direction, mode, protocol, and SPI. Be sure that these choices are configured exactly the same way on the remote IPsec gateway.

```
[edit security]
ipsec {
  security-association sa-name {
    description description;
    manual {
      direction (inbound | outbound | bidirectional) {
        authentication {
          algorithm (hmac-md5-96 | hmac-sha1-96);
          key (ascii-text key | hexadecimal key);
```

```
    }
    auxiliary-spi auxiliary-spi;
    encryption {
        algorithm (des-cbc | 3des-cbc);
        key (ascii-text key | hexadecimal key);
    }
    protocol (ah | esp | bundle);
    spi spi-value;
}
}
mode (tunnel | transport);
}
```

On the AS and MultiServices PICs, you configure a manual security association at the **[edit services ipsec-vpn rule *rule-name*]** hierarchy level. Include your choices for authentication, encryption, direction, protocol, and SPI. Be sure that these choices are configured exactly the same way on the remote IPsec gateway.

```
[edit services ipsec-vpn]
rule rule-name {
    match-direction (input | output);
    term term-name {
        from {
            destination-address address;
            source-address address;
        }
        then {
            backup-remote-gateway address;
            clear-dont-fragment-bit;
            manual {
                direction (inbound | outbound | bidirectional) {
                    authentication {
                        algorithm (hmac-md5-96 | hmac-sha1-96);
                        key (ascii-text key | hexadecimal key);
                    }
                    auxiliary-spi spi-value;
                    encryption {
                        algorithm algorithm; # This can be aes-128-cbc, aes-192-cbc,
                        # aes-256-cbc, des-cbc, or 3des-cbc.
                        key (ascii-text key | hexadecimal key);
                    }
                    protocol (ah | bundle | esp);
                    spi spi-value;
                }
            }
            no-anti-replay;
            remote-gateway address;
            syslog;
        }
    }
}
rule-set rule-set-name {
    [ rule rule-names ];
}
```


Example: AS PIC Manual SA Configuration

Figure 5: AS PIC Manual SA Topology Diagram

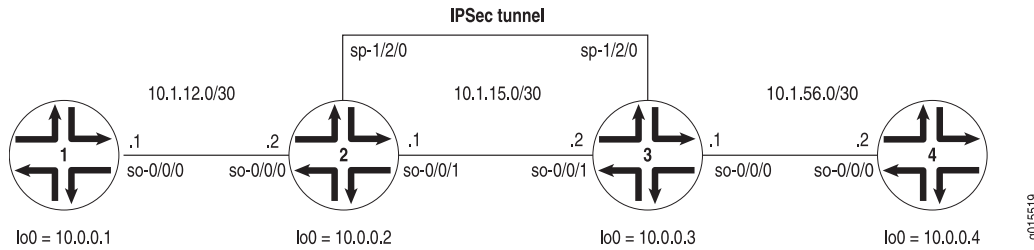


Figure 5 on page 119 shows a similar IPsec topology to the one used in the ES PIC manual SA example. The difference is that Routers 2 and 3 establish an IPsec tunnel using an AS PIC and use slightly modified manual SA settings. Routers 1 and 4 again provide basic connectivity and are used to verify that the IPsec tunnel is operational.

On Router 1, provide basic OSPF connectivity to Router 2.

```
Router 1 [edit]
interfaces {
  so-0/0/0 {
    description "To R2 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.1/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.1;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}
```

On Router 2, enable OSPF as the underlying routing protocol to connect to Routers 1 and 3. Configure a bidirectional manual SA in a rule called rule-manual-SA-BiEspshades at the **[edit ipsec-vpn rule]** hierarchy level. Reference this rule in a service set called service-set-manual-BiEspshades at the **[edit services service-set]** hierarchy level.

Configure all specifications for your manual SA. Use ESP for the protocol, **261** for the SPI, HMAC-SHA1-96 for authentication, DES-CBC for encryption, a 20-bit ASCII authentication key for the SHA-1 authentication key, and an 8-bit ASCII encryption key for the DES-CBC authentication key. (For more information about key lengths, see [Table 6 on page 97](#).)

To direct traffic into the AS PIC and the IPSec tunnel, configure a next-hop style service set and add the adaptive services logical interface used as the IPSec inside interface into the OSPF configuration.

```
Router 2 [edit]
interfaces {
  so-0/0/0 {
    description "To R1 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R3 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.1/30;
      }
    }
  }
  sp-1/2/0 {
    services-options {
      syslog {
        host local {
          services info;
        }
      }
    }
    unit 0 {
      family inet {
      }
    }
    unit 1 { # sp-1/2/0.1 is the IPSec inside interface.
      family inet;
      service-domain inside;
    }
    unit 2 { # sp-1/2/0.2 is the IPSec outside interface.
      family inet;
      service-domain outside;
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.2/32;
      }
    }
  }
}
```

```

routing-options {
  router-id 10.0.0.2;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
      interface sp-1/2/0.1; # This sends OSPF traffic over the IPsec tunnel.
    }
  }
}
services {
  service-set service-set-manual-BiEspshades { # Define your service set here.
    next-hop-service { # Required for dynamic routing protocols such as OSPF.
      inside-service-interface sp-1/2/0.1;
      outside-service-interface sp-1/2/0.2;
    }
    ipsec-vpn-options {
      local-gateway 10.1.15.1; # Specify the local IP address of the IPsec tunnel.
    }
    ipsec-vpn-rules rule-manual-SA-BiEspshades; # Reference the IPsec rule here.
  }
  ipsec-vpn {
    rule rule-manual-SA-BiEspshades { # Define your IPsec VPN rule here.
      term term-manual-SA-BiEspshades {
        then {
          remote-gateway 10.1.15.2; # The remote IP address of the IPsec tunnel.
          manual { # Define the manual SA specifications here.
            direction bidirectional {
              protocol esp;
              spi 261;
              authentication {
                algorithm hmac-sha1-96;
                key ascii-text "$ABC123";
                ## The unencrypted key is juniperjuniperjuniper (20 characters for
                HMAC-SHA-1-96).
              }
              encryption {
                algorithm des-cbc;
                key ascii-text "$ABC123";
                ## The unencrypted key is juniperj (8 characters for DES-CBC).
              }
            }
          }
        }
      }
      match-direction input; # Correct match direction for next-hop service sets.
    }
  }
}
security {
  pki {
    auto-re-enrollment {
      certificate-id certificate-name {

```

```

ca-profile ca-profile-name;
challenge-password password;
re-enroll-trigger-time-percentage percentage; #Percentage of validity-period
# (specified in certificate) when automatic
# reenrollment should be initiated.
re-generate-keypair;
validity-period number-of-days;
}
}
}

```

On Router 3, enable OSPF as the underlying routing protocol to connect to Routers 2 and 4. Configure a bidirectional manual SA in a rule called rule-manual-SA-BiEspshades at the **[edit ipsec-vpn rule]** hierarchy level. Reference this rule in a service set called service-set-manual-BiEspshades at the **[edit services service-set]** hierarchy level.

Configure the same specifications for your manual SA that you specified on Router 2. Use ESP for the protocol, 261 for the SPI, HMAC-SHA1-96 for authentication, DES-CBC for encryption, a 20-bit ASCII authentication key for the SHA-1 authentication key, and an 8-bit ASCII encryption key for the DES-CBC authentication key. (For more information about key lengths, see [Table 6 on page 97](#).)

To direct traffic into the AS PIC and the IPsec tunnel, configure a next-hop style service set and add the adaptive services logical interface used as the IPsec inside interface into the OSPF configuration.

```

Router 3 [edit]
interfaces {
  so-0/0/0 {
    description "To R4 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.56.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R2 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.2/30;
      }
    }
  }
}
sp-1/2/0 {
  services-options {
    syslog {
      host local {
        services info;
      }
    }
  }
  unit 0 {
    family inet {

```

```

unit 1 { # sp-1/2/0.1 is the IPsec inside interface.
    family inet;
    service-domain inside;
}
unit 2 { # sp-1/2/0.2 is the IPsec outside interface.
    family inet;
    service-domain outside;
}
}
lo0 {
    unit 0 {
        family inet {
            address 10.0.0.3/32;
        }
    }
}
}
routing-options {
    router-id 10.0.0.3;
}
protocols {
    ospf {
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface lo0.0;
            interface sp-1/2/0.1; # This sends OSPF traffic over the IPsec tunnel.
        }
    }
}
}
services {
    service-set service-set-manual-BiEspshades { # Define your service set here.
        next-hop-service { # Required for dynamic routing protocols such as OSPF.
            inside-service-interface sp-1/2/0.1;
            outside-service-interface sp-1/2/0.2;
        }
        ipsec-vpn-options {
            local-gateway 10.1.15.2; # Specify the local IP address of the IPsec tunnel.
        }
        ipsec-vpn-rules rule-manual-SA-BiEspshades; # Reference the IPsec rule here.
    }
    ipsec-vpn {
        rule rule-manual-SA-BiEspshades { # Define your IPsec VPN rule here.
            term term-manual-SA-BiEspshades {
                then {
                    remote-gateway 10.1.15.1; # The remote IP address of the IPsec tunnel.
                    manual { # Define the manual SA specifications here.
                        direction bidirectional {
                            protocol esp;
                            spi 261;
                            authentication {
                                algorithm hmac-sha1-96;
                                key ascii-text "$ABC123";
                                ## The unencrypted key is juniperjuniperjunipe (20 characters for
                                HMAC-SHA-1-96).
                            }
                        }
                        encryption {

```

```
        algorithm des-cbc;
        key ascii-text "$ABC123";
        ## The unencrypted key is juniperj (8 characters for DES-CBC).
    }
}
}
}
}
match-direction input; # Specify in which direction the rule should match.
}
}
}
```

On Router 4, provide basic OSPF connectivity to Router 3.

```
Router 4 [edit]
interfaces {
  so-0/0/0 {
    description "To R3 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.56.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.4/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.4;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}
```

Verifying Your Work

To verify proper operation of a manual IPsec SA on the AS PIC, use the following commands:

- `ping`
- `show services ipsec-vpn ipsec security-associations (detail)`
- `show services ipsec-vpn ipsec statistics`

The following sections show the output of these commands used with the configuration example:

- [Router 1 on page 125](#)
- [Router 2 on page 125](#)
- [Router 3 on page 126](#)

Router 1

On Router 1, issue a **ping** command to the **lo0** interface on Router 4 to send traffic across the IPsec tunnel.

```
user@R1> ping 10.0.0.4
PING 10.0.0.4 (10.0.0.4): 56 data bytes
64 bytes from 10.0.0.4: icmp_seq=0 ttl=254 time=1.375 ms
64 bytes from 10.0.0.4: icmp_seq=1 ttl=254 time=18.375 ms
64 bytes from 10.0.0.4: icmp_seq=2 ttl=254 time=1.120 ms
^C
--- 10.0.0.4 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.120/6.957/18.375/8.075 ms
```

Router 2

To verify that the IPsec security association is active, issue the **show services ipsec-vpn ipsec security-associations detail** command. Notice that the SA contains the settings you specified, such as ESP for the protocol and HMAC-SHA1-96 for the authentication algorithm.

```
user@R2> show services ipsec-vpn ipsec security-associations detail
Service set: service-set-manual-BiEspshades
Rule: rule-manual-SA-BiEspshades, Term: term-manual-SA-BiEspshades,
Tunnel index: 1
Local gateway: 10.1.15.1, Remote gateway: 10.1.15.2
Local identity: ipv4_subnet(any:0,[0..7]=10.0.0.0/8)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)

Direction: inbound, SPI: 261, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: des-cbc
Anti-replay service: Disabled

Direction: outbound, SPI: 261, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: des-cbc
Anti-replay service: Disabled
```

To verify that traffic is traveling over the bidirectional IPsec tunnel, issue the **show services ipsec-vpn statistics** command:

```
user@R2> show services ipsec-vpn ipsec statistics

PIC: sp-1/2/0, Service set: service-set-manual-BiEspshades

ESP Statistics:
  Encrypted bytes:          1616
```

```
Decrypted bytes:          1560
Encrypted packets:       20
Decrypted packets:       19
AH Statistics:
  Input bytes:           0
  Output bytes:          0
  Input packets:         0
  Output packets:        0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0
```

Router 3

To verify that the IPsec security association is active, issue the **show services ipsec-vpn ipsec security-associations detail** command. To be successful, the SA on Router 3 must contain the same settings you specified on Router 2.

```
user@R3> show services ipsec-vpn ipsec security-associations detail
Service set: service-set-manual-BiEspshades
Rule: rule-manual-SA-BiEspshades, Term: term-manual-SA-BiEspshades,
Tunnel index: 1
Local gateway: 10.1.15.2, Remote gateway: 10.1.15.1
Local identity: ipv4_subnet(any:0,[0..7]=10.0.0.0/8)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)

Direction: inbound, SPI: 261, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: des-cbc
Anti-replay service: Disabled

Direction: outbound, SPI: 261, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: des-cbc
Anti-replay service: Disabled
```

To verify that traffic is traveling over the bidirectional IPsec tunnel, issue the **show services ipsec-vpn statistics** command:

```
user@R3> show services ipsec-vpn ipsec statistics
PIC: sp-1/2/0, Service set: service-set-manual-BiEspshades
ESP Statistics:
  Encrypted bytes:       1560
  Decrypted bytes:      1616
  Encrypted packets:     19
  Decrypted packets:     20
AH Statistics:
  Input bytes:           0
  Output bytes:          0
  Input packets:         0
  Output packets:        0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0
```


Example: ES PIC Manual SA Configuration

Figure 6: ES PIC Manual SA Topology Diagram

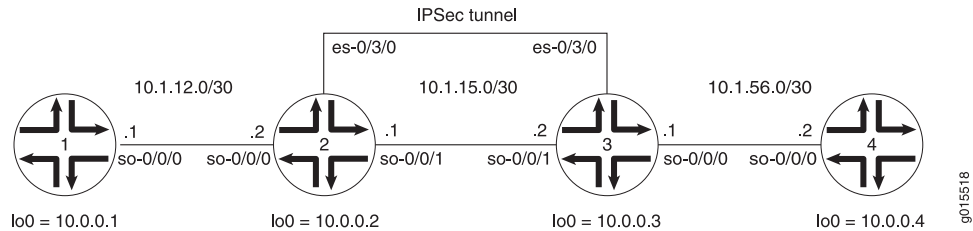


Figure 6 on page 127 shows an IPsec topology containing a group of four routers. Routers 2 and 3 establish an IPsec tunnel using an ES PIC and manual SA settings. Routers 1 and 4 provide basic connectivity and are used to verify that the IPsec tunnel is operational.

On Router 1, provide basic OSPF connectivity to Router 2.

```
Router 1 [edit]
interfaces {
  so-0/0/0 {
    description "To R2 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.1/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.1;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}
```

On Router 2, enable OSPF as the underlying routing protocol to connect to Routers 1 and 3. Configure a bidirectional manual SA called **sa-manual** at the **[edit security ipsec security-association]** hierarchy level. Use AH for the protocol, 400 for the SPI, HMAC-MD5-96 for authentication, and a 32-bit hexadecimal authentication key for the

MD5 authentication key. (For more information about key length, see [Table 6 on page 97](#).) Because you are using AH, there is no need to configure encryption.

To direct traffic into the ES PIC and the IPSec tunnel, create two firewall filters. The **es-traffic** filter matches inbound traffic from Router 1 destined for Router 4, whereas the **es-return** filter matches the return path from Router 4 to Router 1. Apply the **es-traffic** filter to the **so-0/0/0** interface; then apply both the **es-return** filter and the **sa-manual** SA to the **es-0/3/0** interface.

```
Router 2 [edit]
interfaces {
  so-0/0/0 {
    description "To R1 so-0/0/0";
    unit 0 {
      family inet {
        filter {
          input es-traffic; # Apply a filter that sends traffic to the IPSec tunnel here.
        }
        address 10.1.12.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R3 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.1/30;
      }
    }
  }
  es-0/3/0 {
    unit 0 {
      tunnel { # Specify the IPSec tunnel endpoints here.
        source 10.1.15.1;
        destination 10.1.15.2;
      }
      family inet {
        ipsec-sa sa-manual; # Apply the manual SA here.
        filter {
          input es-return; # Apply the filter that matches return IPSec traffic here.
        }
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.2/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.2;
}
```

```

protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface so-0/0/1.0;
      interface lo0.0;
    }
  }
}
security {
  ipsec {
    security-association sa-manual { # Define the manual SA specifications here.
      mode tunnel;
      manual {
        direction bidirectional {
          protocol ah;
          spi 400;
          authentication {
            algorithm hmac-md5-96;
            key hexadecimal "$ABC123";
          }
        }
      }
    }
  }
}

# The 32-bit unencrypted hexadecimal key is abcdef01abcdef01abcdef01abcdef01.
firewall {
  filter es-traffic { # Define a filter that sends traffic to the IPSec tunnel here.
    term to-es {
      from {
        source-address {
          10.1.12.0/24;
        }
        destination-address {
          10.1.56.0/24;
        }
      }
      then {
        count ipsec-tunnel;
        ipsec-sa sa-manual;
      }
    }
    term other {
      then accept;
    }
  }
  filter es-return { # Define a filter that matches return IPSec traffic here.
    term return {
      from {
        source-address {
          10.1.56.0/24;
        }
        destination-address {
          10.1.12.0/24;
        }
      }
    }
  }
}

```

```

    }
  }
  then accept;
}
}
}

```

On Router 3, enable OSPF as the underlying routing protocol to connect to Routers 2 and 4. Configure a bidirectional manual SA called **sa-manual** at the **[edit security ipsec security-association]** hierarchy level. Use the exact same specifications that you used for the SA on Router 2: AH for the protocol, **400** for the SPI, HMAC-MD5-96 for authentication, and a 32-bit hexadecimal authentication key of **abcdef01abcdef01abcdef01abcdef01** for the MD5 authentication key. (For more information about authentication key length, see [Table 6 on page 97](#).) Because you are using AH, there is no need to configure an encryption algorithm.

To direct traffic into the ES PIC and the IPsec tunnel, create two firewall filters. The **es-traffic** filter matches inbound traffic from Router 4 destined for Router 1, whereas the **es-return** filter matches the return path from Router 1 to Router 4. Apply the **es-traffic** filter to the **so-0/0/0** interface; then apply both the **es-return** filter and the **sa-manual** SA to the **es-0/3/0** interface.

```

Router 3 [edit]
interfaces {
  so-0/0/0 {
    description "To R4 so-0/0/0";
    unit 0 {
      family inet {
        filter {
          input es-traffic; # Apply a filter that sends traffic to the IPsec tunnel here.
        }
        address 10.1.56.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R2 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.2/30;
      }
    }
  }
  es-0/3/0 {
    unit 0 {
      tunnel { # Specify the IPsec tunnel endpoints here.
        source 10.1.15.2;
        destination 10.1.15.1;
      }
      family inet {
        ipsec-sa sa-manual; # Apply the manual SA here.
        filter {
          input es-return; # Apply the filter that matches return IPsec traffic here.
        }
      }
    }
  }
}

```

```

    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.0.0.3/32;
    }
  }
}
}
routing-options {
  router-id 10.0.0.3;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface so-0/0/1.0;
      interface lo0.0;
    }
  }
}
}
security {
  ipsec {
    security-association sa-manual { # Define the manual SA specifications here.
      mode tunnel;
      manual {
        direction bidirectional {
          protocol ah;
          spi 400;
          authentication {
            algorithm hmac-md5-96;
            key hexadecimal "$ABC123";
          }
        }
      }
    }
  }
}
}

## The 32-bit unencrypted hexadecimal key is abcdef01abcdef01abcdef01abcdef01.
firewall {
  filter es-traffic { # Define a filter that sends traffic to the IPSec tunnel here.
    term to-es {
      from {
        source-address {
          10.1.56.0/24;
        }
        destination-address {
          10.1.12.0/24;
        }
      }
      then {

```

```
        count ipsec-tunnel;
        ipsec-sa sa-manual;
    }
}
term other {
    then accept;
}
}
filter es-return { # Define a filter that matches return IPSec traffic here.
    term return {
        from {
            source-address {
                10.1.12.0/24;
            }
            destination-address {
                10.1.56.0/24;
            }
        }
        then accept;
    }
}
}
```

On Router 4, provide basic OSPF connectivity to Router 3.

```
Router 4 [edit]
interfaces {
    so-0/0/0 {
        description "To R3 so-0/0/0";
        unit 0 {
            family inet {
                address 10.1.56.2/30;
            }
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.4/32;
            }
        }
    }
}
routing-options {
    router-id 10.0.0.4;
}
protocols {
    ospf {
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface lo0.ping
        }
    }
}
```

Verifying Your Work

To verify proper operation of a manual IPsec SA on the ES PIC, use the following commands:

- **ping**
- **show ipsec security-associations (detail)**
- **traceroute**

The following sections show the output of these commands used with the configuration example:

- [Router 1 on page 133](#)
- [Router 2 on page 133](#)
- [Router 3 on page 134](#)
- [Router 4 on page 135](#)

Router 1

On Router 1, issue a **ping** command to the **so-0/0/0** interface of Router 4 to send traffic across the IPsec tunnel.

```
user@R1> ping 10.1.56.2
PING 10.1.56.2 (10.1.56.2): 56 data bytes
64 bytes from 10.1.56.2: icmp_seq=0 ttl=253 time=0.939 ms
64 bytes from 10.1.56.2: icmp_seq=1 ttl=253 time=0.886 ms
64 bytes from 10.1.56.2: icmp_seq=2 ttl=253 time=0.826 ms
^C
--- 10.1.56.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.826/0.884/0.939/0.046 ms
```

You can also issue the **traceroute** command to verify that traffic to **10.1.56.2** travels over the IPsec tunnel between Router 2 and Router 3. Notice that the second hop does not reference **10.1.15.2**—the physical interface on Router 3. Instead, the loopback address of **10.0.0.3** on Router 3 appears as the second hop. This indicates that the IPsec tunnel is operating correctly.

```
user@R1> traceroute 10.1.56.2
traceroute to 10.1.56.2 (10.1.56.2), 30 hops max, 40 byte packets
 1  10.1.12.1 (10.1.12.1)  0.655 ms  0.549 ms  0.508 ms
 2  10.0.0.3 (10.0.0.3)  0.833 ms  0.786 ms  0.757 ms
 3  10.1.56.2 (10.1.56.2)  0.808 ms  0.741 ms  0.716 ms
```

Router 2

Another way to verify that matched traffic is being diverted to the bidirectional IPsec tunnel is to view the firewall filter counter. After you issue the **ping** command from Router 1 (three packets), the **es-traffic** firewall filter counter looks like this:

```
user@R2> show firewall filter es-traffic
```

```
Filter: es-traffic
Counters:
Name                                     Bytes      Packets
ipsec-tunnel                             252         3
```

After you issue the **ping** command from both Router 1 (three packets) and Router 4 (two packets), the **es-traffic** firewall filter counter looks like this:

```
user@R2> show firewall filter es-traffic
Filter: es-traffic
Counters:
Name                                     Bytes      Packets
ipsec-tunnel                             420         5
```

To verify that the IPsec security association is active, issue the **show ipsec security-associations detail** command. Notice that the SA contains the settings you specified, such as AH for the protocol and HMAC-MD5-96 for the authentication algorithm.

```
user@R2> show ipsec security-associations detail
Security association: sa-manual, Interface family: Up

Local gateway: 10.1.15.1, Remote gateway: 10.1.15.2
Local identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)

Direction: inbound, SPI: 400, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: AH, Authentication: hmac-md5-96, Encryption: None
Anti-replay service: Disabled

Direction: outbound, SPI: 400, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: AH, Authentication: hmac-md5-96, Encryption: None
Anti-replay service: Disabled
```

Router 3

View the firewall filter counter to continue verifying that matched traffic is being diverted to the bidirectional IPsec tunnel. After you issue the **ping** command from Router 1 (three packets), the **es-traffic** firewall filter counter looks like this:

```
user@R3> show firewall filter es-traffic
Filter: es-traffic
Counters:
Name                                     Bytes      Packets
ipsec-tunnel                             252         3
```

After you issue the **ping** command from both Router 1 (three packets) and Router 4 (two packets), the **es-traffic** firewall filter counter looks like this:

```
user@R3> show firewall filter es-traffic
Filter: es-traffic
Counters:
Name                                     Bytes      Packets
ipsec-tunnel                             420         5
```


To verify that the IPsec security association is active, issue the **show ipsec security-associations detail** command. Notice that the SA on Router 3 contains the same settings you specified on Router 2.

```
user@R3> show ipsec security-associations detail
Security association: sa-manual, Interface family: Up

Local gateway: 10.1.15.2, Remote gateway: 10.1.15.1
Local identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)

Direction: inbound, SPI: 400, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: AH, Authentication: hmac-md5-96, Encryption: None
Anti-replay service: Disabled

Direction: outbound, SPI: 400, AUX-SPI: 0
Mode: tunnel, Type: manual, State: Installed
Protocol: AH, Authentication: hmac-md5-96, Encryption: None
Anti-replay service: Disabled
```

Router 4

On Router 4, issue a **ping** command to the **so-0/0/0** interface of Router 1 to send traffic across the IPsec tunnel.

```
user@R4> ping 10.1.12.2
PING 10.1.12.2 (10.1.12.2): 56 data bytes
64 bytes from 10.1.12.2: icmp_seq=0 ttl=253 time=0.937 ms
64 bytes from 10.1.12.2: icmp_seq=1 ttl=253 time=0.872 ms
^C
--- 10.1.12.2 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.872/0.905/0.937/0.032 ms
```

You can also issue the **traceroute** command to verify that traffic to **10.1.12.2** travels over the IPsec tunnel between Router 3 and Router 2. Notice that the second hop does not reference **10.1.15.1**—the physical interface on Router 2. Instead, the loopback address of **10.0.0.2** on Router 2 appears as the second hop. This indicates that the IPsec tunnel is operating correctly.

```
user@R4> traceroute 10.1.12.2
traceroute to 10.1.12.2 (10.1.12.2), 30 hops max, 40 byte packets
 1 10.1.56.1 (10.1.56.1) 0.670 ms 0.589 ms 0.548 ms
 2 10.0.0.2 (10.0.0.2) 0.815 ms 0.791 ms 0.763 ms
 3 10.1.12.2 (10.1.12.2) 0.798 ms 0.741 ms 0.714 ms
```

Configuring IKE Dynamic SAs

On the ES PIC, you configure an IKE dynamic SA at the **[edit security ike]** and **[edit security ipsec]** hierarchy levels. Include your choices for IKE policies and proposals, which include options for authentication algorithms, authentication methods, Diffie-Hellman groups, encryption, IKE modes, and preshared keys. The IKE policy must use the IP address of

the remote end of the IPsec tunnel as the policy name. Also, include your choices for IPsec policies and proposals, which include options for authentication, encryption, protocols, Perfect Forward Secrecy (PFS), and IPsec modes. Be sure that these choices are configured exactly the same way on the remote IPsec gateway.

```
[edit security]
ike {
  proposal ike-proposal-name {
    authentication-algorithm (md5 | sha1 | sha-256 | sha-384);
    authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);
    description description;
    dh-group (group1 | group2);
    encryption-algorithm (3des-cbc | aes-128-cbc | aes-192-cbc | aes-256-cbc | des-cbc);
    lifetime-seconds seconds;
  }
  policy ike-peer-address {
    description description;
    encoding (binary | pem);
    identity identity-name;
    local-certificate certificate-filename;
    local-key-pair private-public-key-file;
    mode (aggressive | main);
    pre-shared-key (ascii-text key | hexadecimal key);
    proposals [ proposal-names ];
  }
}
ipsec {
  proposal ipsec-proposal-name {
    authentication-algorithm (hmac-md5-96 | hmac-sha1-96 | hmac-sha-256-128);
    description description;
    encryption-algorithm (3des-cbc | aes-128-cbc | aes-192-cbc | aes-256-cbc | des-cbc);
    lifetime-seconds seconds;
    protocol (ah | esp | bundle);
  }
  policy ipsec-policy-name {
    description description;
    perfect-forward-secrecy {
      keys (group1 | group2);
    }
    proposals [ proposal-names ];
  }
  security-association sa-name {
    description description;
    dynamic {
      ipsec-policy policy-name;
      replay-window-size (32 | 64);
    }
    mode (tunnel | transport);
  }
}
```

On the AS and MultiServices PICs, you configure an IKE dynamic security association at the `[edit services ipsec-vpn ike]`, `[edit services ipsec-vpn ipsec]`, and `[edit services ipsec-vpn rule rule-name]` hierarchy levels. Include your choices for IKE policies and proposals, which include options for authentication algorithms, authentication methods, Diffie-Hellman

groups, encryption, IKE modes, and preshared keys. Also, include your choices for IPsec policies and proposals, which include options for authentication, encryption, protocols, PFS, and IPsec modes. Be sure that these choices are configured exactly the same way on the remote IPsec gateway.

If you choose not to explicitly configure IKE and IPsec policies and proposals on the AS and MultiServices PICs, your configuration can default to some preset values. These default values are shown in [Table 8 on page 137](#).

Table 8: IKE and IPsec Proposal and Policy Default Values for the AS and MultiServices PICs

IKE Policy Statement	Default Value
mode	main
proposals	default
IKE Proposal Statement	Default Value
authentication-algorithm	sha1
authentication-method	pre-shared-keys
dh-group	group2
encryption-algorithm	3des-cbc
lifetime-seconds	3600 (seconds)
IPsec Policy Statement	Default Value
perfect-forward-secrecy keys	group2
proposals	default
IPsec Proposal Statement	Default Value
authentication-algorithm	hmac-sha1-96
encryption-algorithm	3des-cbc
lifetime-seconds	28800 (seconds)
protocol	esp



NOTE: If you use the default IKE and IPsec policy and proposal values preset within the AS and MultiServices PICs, you must explicitly configure an IKE policy and include a preshared key. This is because the pre-shared-keys authentication method is one of the preset values in the default IKE proposal.



NOTE: Starting in Junos OS release 14.2, in an environment in which Juniper Networks MX Series routers interoperate with Cisco ASA devices, IKE security associations (SAs) and IPsec SAs are deleted immediately on the Cisco ASA devices, but they are retained on the MX Series routers. As a result, 100 percent traffic loss occurs on the MX routers when traffic is initiated from either the MX Series routers or Cisco ASA devices. This problem of excessive traffic loss occurs when a service PIC is restarted on MX Series routers, a line card is restarted on MX series routers, or when a shutdown/no shutdown command sequence or a change in speed setting is performed on the Cisco ASA devices. To prevent this problem of the preservation of IKE and IPsec SAs in such a deployment, you must manually delete the IPsec and IKE SAs by entering the clear ipsec security-associations and clear ike security-associations commands respectively.

If you decide to configure values manually, the following information shows the complete statement hierarchy and options for dynamic IKE SAs on the AS and MultiServices PICs:

```
[edit services ipsec-vpn]
ike {
  proposal proposal-name {
    authentication-algorithm (md5 | sha1 | sha256);
    authentication-method (pre-shared-keys | rsa-signatures);
    description description;
    dh-group (group1 | group2);
    encryption-algorithm algorithm; # This can be aes-128-cbc, aes-192-cbc,
    # aes-256-cbc, des-cbc, or 3des-cbc.
    lifetime-seconds seconds;
  }
  policy policy-name {
    description description;
    local-id {
      ipv4_addr [ values ];
      key_id [ values ];
    }
    local-certificate certificate-id-name;
    mode (aggressive | main);
    pre-shared-key (ascii-text key | hexadecimal key);
    proposals [ proposal-names ];
    remote-id {
      ipv4_addr [ values ];
      key_id [ values ];
    }
  }
}
```

```

ipsec {
  proposal proposal-name {
    authentication-algorithm (hmac-md5-96 | hmac-sha1-96);
    description description;
    encryption-algorithm algorithm; # This can be aes-128-cbc, aes-192-cbc,
    # aes-256-cbc, des-cbc, or 3des-cbc.
    lifetime-seconds seconds;
    protocol (ah | esp | bundle);
  }
  policy policy-name {
    description description;
    perfect-forward-secrecy {
      keys (group1 | group2);
    }
    proposals [ proposal-names ];
  }
}
rule rule-name {
  match-direction (input | output);
  term term-name {
    from {
      destination-address address;
      source-address address;
    }
    then {
      backup-remote-gateway address;
      clear-dont-fragment-bit;
      dynamic {
        ike-policy policy-name;
        ipsec-policy policy-name;
      }
      no-anti-replay;
      remote-gateway address;
      syslog;
    }
  }
}
rule-set rule-set-name {
  [ rule rule-names ];
}

```

Release History Table

Release	Description
14.2	Starting in Junos OS release 14.2, in an environment in which Juniper Networks MX Series routers interoperate with Cisco ASA devices, IKE security associations (SAs) and IPsec SAs are deleted immediately on the Cisco ASA devices, but they are retained on the MX Series routers.

Example: AS PIC IKE Dynamic SA Configuration

Figure 7: AS PIC IKE Dynamic SA Topology Diagram

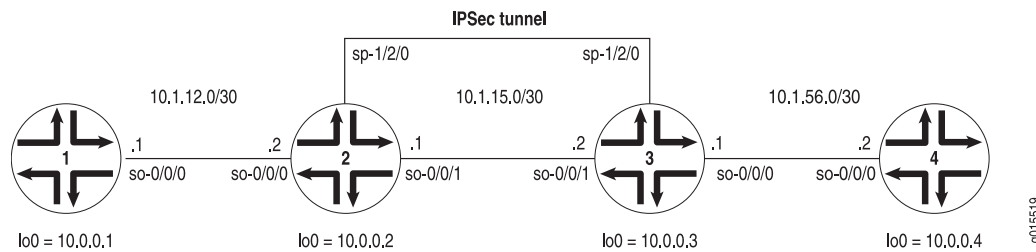


Figure 7 on page 140 shows the same IPSec topology as seen in the AS PIC manual SA example. However, this configuration requires Routers 2 and 3 to establish an IPSec tunnel using an IKE dynamic SA, enhanced authentication, and stronger encryption. Routers 1 and 4 continue to provide basic connectivity and are used to verify that the IPSec tunnel is operational.



NOTE: When you do not specify an IKE proposal, an IPSec proposal, and an IPSec policy on an AS PIC, the Junos OS defaults to the highest level of encryption and authentication. As a result, the default authentication protocol is ESP, the default authentication mode is HMAC-SHA1-96, and the default encryption mode is 3DES-CBC. For more information about default IKE and IPSec policies and proposals on the AS PIC, see [Table 8 on page 137](#).

On Router 1, provide basic OSPF connectivity to Router 2.

```
Router 1 [edit]
interfaces {
  so-0/0/0 {
    description "To R2 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.1/32;
      }
    }
  }
}
```

```

    }
  }
  routing-options {
    router-id 10.0.0.1;
  }
  protocols {
    ospf {
      area 0.0.0.0 {
        interface so-0/0/0.0;
        interface lo0.0;
      }
    }
  }
}

```

On Router 2, enable OSPF as the underlying routing protocol to connect to Routers 1 and 3. Configure a bidirectional IKE dynamic SA in a rule called **rule-ike** at the **[edit ipsec-vpn rule]** hierarchy level. Reference this rule in a service set called **service-set-dynamic-BiEspsha3des** at the **[edit services service-set]** hierarchy level.

Using default values in the AS PIC, you do not need to specify an IPsec proposal, IPsec policy, or IKE proposal. However, you do need to configure a preshared key in an IKE policy with the **pre-shared-key** statement at the **[edit services ipsec-vpn ike policy *policy-name*]** hierarchy level. (For more information about default IKE and IPsec policies and proposals on the AS PIC, see [Table 8 on page 137](#).)

To direct traffic into the AS PIC and the IPsec tunnel, configure a next-hop style service set and add the adaptive services logical interface used as the IPsec inside interface into the OSPF configuration.

```

Router 2 [edit]
interfaces {
  so-0/0/0 {
    description "To R1 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R3 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.1/30;
      }
    }
  }
  sp-1/2/0 {
    services-options {
      syslog {
        host local {
          services info;
        }
      }
    }
  }
}

```

```
unit 0 {
    family inet {
    }
    unit 1 { # sp-1/2/0.1 is the IPSec inside interface.
        family inet;
        service-domain inside;
    }
    unit 2 { # sp-1/2/0.2 is the IPSec outside interface.
        family inet;
        service-domain outside;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.0.0.2/32;
        }
    }
}
}
routing-options {
    router-id 10.0.0.2;
}
protocols {
    ospf {
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface lo0.0;
            interface sp-1/2/0.1; # This sends OSPF traffic over the IPSec tunnel.
        }
    }
}
services {
    service-set service-set-dynamic-BiEspsha3des { # Define your service set here.
        next-hop-service { # Required for dynamic routing protocols such as OSPF.
            inside-service-interface sp-1/2/0.1;
            outside-service-interface sp-1/2/0.2;
        }
        ipsec-vpn-options {
            local-gateway 10.1.15.1; # Specify the local IP address of the IPSec tunnel.
        }
        ipsec-vpn-rules rule-ike; # Reference your IPSec VPN rule here.
    }
    ipsec-vpn {
        rule rule-ike { # Define your IPSec VPN rule here.
            term term-ike {
                then {
                    remote-gateway 10.1.15.2; # The remote IP address of the IPSec tunnel.
                    dynamic { # This creates a dynamic SA.
                        ike-policy ike-policy-preshaed; # Reference your IKE policy here.
                    }
                }
            }
            match-direction input; # Specify in which direction the rule should match.
        }
    }
    ike {
```



```

    policy ike-policy-preshared { # Define your IKE policy specifications here.
      pre-shared-key ascii-text "$ABC123";
      ## The unencrypted preshared key for this example is juniper.
    }
  }
}
}
}
}

```

On Router 3, enable OSPF as the underlying routing protocol to connect to Routers 2 and 4. Configure a bidirectional IKE dynamic SA in a rule called **rule-ike** at the **[edit ipsec-vpn rule]** hierarchy level. Reference this rule in a service set called **service-set-dynamic-BiEspsha3des** at the **[edit services service-set]** hierarchy level.

Again, use the same default policies and proposals that you used on Router 2. However, remember to configure a preshared key in an IKE policy with the **pre-shared-key** statement at the **[edit services ipsec-vpn ike policy *policy-name*]** hierarchy level. The key must match the one you specified on Router 2. (For more information about default IKE and IPSec policies and proposals on the AS PIC, see [Table 8 on page 137](#).)

To direct traffic into the AS PIC and the IPSec tunnel, configure a next-hop style service set and add the adaptive services logical interface used as the IPSec inside interface into the OSPF configuration.

```

Router 3 [edit]
interfaces {
  so-0/0/0 {
    description "To R4 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.56.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R2 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.2/30;
      }
    }
  }
  sp-1/2/0 {
    services-options {
      syslog {
        host local {
          services info;
        }
      }
    }
    unit 0 {
      family inet {
      }
    }
    unit 1 { # sp-1/2/0.1 is the IPSec inside interface.
      family inet;
    }
  }
}

```

```

        service-domain inside;
    }
    unit 2 { # sp-1/2/0.2 is the IPsec outside interface.
        family inet;
        service-domain outside;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.0.0.3/32;
        }
    }
}
routing-options {
    router-id 10.0.0.3;
}
protocols {
    ospf {
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface lo0.0;
            interface sp-1/2/0.1; # This sends OSPF traffic over the IPsec tunnel.
        }
    }
}
services {
    service-set service-set-dynamic-BiEspsha3des { # Define your service set here.
        next-hop-service { # Required for dynamic routing protocols such as OSPF.
            inside-service-interface sp-1/2/0.1;
            outside-service-interface sp-1/2/0.2;
        }
        ipsec-vpn-options {
            local-gateway 10.1.15.2; # Specify the local IP address of the IPsec tunnel.
        }
        ipsec-vpn-rules rule-ike; # Reference your IPsec VPN rule here.
    }
    ipsec-vpn {
        rule rule-ike { # Define your IPsec VPN rule here.
            term term-ike {
                then {
                    remote-gateway 10.1.15.1; # The remote IP address of the IPsec tunnel.
                    dynamic { # This creates a dynamic SA.
                        ike-policy ike-policy-preshared; # Reference your IKE policy here.
                    }
                }
            }
            match-direction input; # Specify in which direction the rule should match.
        }
        ike {
            policy ike-policy-preshared { # Define your IKE policy specifications here.
                pre-shared-key ascii-text "$ABC123";
                ## The unencrypted preshared key for this example is juniper.
            }
        }
    }
}

```

```

    }
  }
}

```

On Router 4, provide basic OSPF connectivity to Router 3.

```

Router 4 [edit]
interfaces {
  so-0/0/0 {
    description "To R3 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.56.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.4/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.4;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}

```

Verifying Your Work

To verify proper operation of an IKE-based dynamic SA on the AS PIC, use the following commands:

- **ping**
- **show services ipsec-vpn ike security-associations (detail)**
- **show services ipsec-vpn ipsec security-associations (detail)**
- **show services ipsec-vpn ipsec statistics**
- **traceroute**

The following sections show the output of these commands used with the configuration example:

- [Router 1 on page 146](#)
- [Router 2 on page 146](#)

- [Router 3 on page 147](#)
- [Router 4 on page 148](#)

Router 1

On Router 1, issue a **ping** command to the **so-0/0/0** interface on Router 4 to send traffic across the IPsec tunnel.

```
user@R1> ping 10.1.56.2
PING 10.1.56.2 (10.1.56.2): 56 data bytes
64 bytes from 10.1.56.2: icmp_seq=0 ttl=254 time=1.351 ms
64 bytes from 10.1.56.2: icmp_seq=1 ttl=254 time=1.187 ms
64 bytes from 10.1.56.2: icmp_seq=2 ttl=254 time=1.172 ms
64 bytes from 10.1.56.2: icmp_seq=3 ttl=254 time=1.154 ms
64 bytes from 10.1.56.2: icmp_seq=4 ttl=254 time=1.156 ms
^C
--- 10.1.56.2 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.154/1.204/1.351/0.074 ms
```

Router 2

To verify that the IKE SA negotiation is successful, issue the **show services ipsec-vpn ike security-associations** command.

```
user@R2> show services ipsec-vpn ike security-associations
Remote Address  State      Initiator cookie  Responder cookie  Exchange type
10.1.15.2       Matured           03075bd3a0000003  4bff26a5c7000003  Main
```

To verify that the IPsec security association is active, issue the **show services ipsec-vpn ipsec security-associations detail** command. Notice that the SA contains the default settings inherent in the AS PIC, such as ESP for the protocol and HMAC-SHA1-96 for the authentication algorithm.

```
user@R2> show services ipsec-vpn ipsec security-associations detail
Service set: service-set-dynamic-BiEspsha3des
Rule: rule-ike, Term: term-ike, Tunnel index: 1
Local gateway: 10.1.15.1, Remote gateway: 10.1.15.2
Local identity: ipv4_subnet(any:0,[0..7]=10.1.12.0/24)
Remote identity: ipv4_subnet(any:0,[0..7]=10.1.56.0/24)
Direction: inbound, SPI: 2666326758, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 26863 seconds
Hard lifetime: Expires in 26998 seconds
Anti-replay service: Enabled, Replay window size: 64
Direction: outbound, SPI: 684772754, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 26863 seconds
Hard lifetime: Expires in 26998 seconds
Anti-replay service: Enabled, Replay window size: 64
```

To verify that traffic is traveling over the bidirectional IPsec tunnel, issue the **show services ipsec-vpn statistics** command:

```
user@R2> show services ipsec-vpn ipsec statistics
PIC: sp-1/2/0, Service set: service-set-dynamic-BiEspsha3des
ESP Statistics:
  Encrypted bytes:      2248
  Decrypted bytes:     2120
  Encrypted packets:    27
  Decrypted packets:    25
AH Statistics:
  Input bytes:          0
  Output bytes:         0
  Input packets:        0
  Output packets:       0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
```

Bad headers: 0, Bad trailers: 0

Router 3

To verify that the IKE SA negotiation is successful, issue the **show services ipsec-vpn ike security-associations** command. To be successful, the SA on Router 3 must contain the same settings you specified on Router 2.

```
user@R3> show services ipsec-vpn ike security-associations
Remote Address  State      Initiator cookie  Responder cookie  Exchange type
10.1.15.1       Matured    03075bd3a0000003  4bff26a5c7000003  Main
```

To verify that the IPsec SA is active, issue the **show services ipsec-vpn ipsec security-associations detail** command. To be successful, the SA on Router 3 must contain the same settings you specified on Router 2.

```
user@R3> show services ipsec-vpn ipsec security-associations detail
Service set: service-set-dynamic-BiEspsha3des
Rule: rule-ike, Term: term-ike, Tunnel index: 1
Local gateway: 10.1.15.2, Remote gateway: 10.1.15.1
Local identity: ipv4_subnet(any:0,[0..7]=10.1.56.0/24)
Remote identity: ipv4_subnet(any:0,[0..7]=10.1.12.0/24)
Direction: inbound, SPI: 684772754, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 26598 seconds
Hard lifetime: Expires in 26688 seconds
Anti-replay service: Enabled, Replay window size: 64
Direction: outbound, SPI: 2666326758, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 26598 seconds
Hard lifetime: Expires in 26688 seconds
Anti-replay service: Enabled, Replay window size: 64
```

To verify that traffic is traveling over the bidirectional IPsec tunnel, issue the **show services ipsec-vpn statistics** command:

```
user@R3> show services ipsec-vpn ipsec statistics
PIC: sp-1/2/0, Service set: service-set-dynamic-BiEspsha3des
ESP Statistics:
  Encrypted bytes:      2120
  Decrypted bytes:      2248
  Encrypted packets:    25
  Decrypted packets:    27
AH Statistics:
  Input bytes:          0
  Output bytes:         0
  Input packets:        0
  Output packets:       0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
```

Bad headers: 0, Bad trailers: 0

Router 4

On Router 4, issue a **ping** command to the **so-0/0/0** interface on Router 1 to send traffic across the IPsec tunnel.

```
user@R4> ping 10.1.12.2
PING 10.1.12.2 (10.1.12.2): 56 data bytes
64 bytes from 10.1.12.2: icmp_seq=0 ttl=254 time=1.350 ms
64 bytes from 10.1.12.2: icmp_seq=1 ttl=254 time=1.161 ms
64 bytes from 10.1.12.2: icmp_seq=2 ttl=254 time=1.124 ms
64 bytes from 10.1.12.2: icmp_seq=3 ttl=254 time=1.142 ms
64 bytes from 10.1.12.2: icmp_seq=4 ttl=254 time=1.139 ms
64 bytes from 10.1.12.2: icmp_seq=5 ttl=254 time=1.116 ms
^C
--- 10.1.12.2 ping statistics ---
6 packets transmitted, 6 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.116/1.172/1.350/0.081 ms
```

The final way you can confirm that traffic travels over the IPsec tunnel is by issuing the **traceroute** command to the **so-0/0/0** interface on Router 1. Notice that the physical interface between Routers 2 and 3 is not referenced in the path; traffic enters the IPsec tunnel through the adaptive services IPsec inside interface on Router 3, passes through the loopback interface on Router 2, and ends at the **so-0/0/0** interface on Router 1.

```
user@R4> traceroute 10.1.12.2
traceroute to 10.1.12.2 (10.1.12.2), 30 hops max, 40 byte packets
 1  10.1.15.2 (10.1.15.2)  0.987 ms  0.630 ms  0.563 ms
 2  10.0.0.2 (10.0.0.2)  1.194 ms  1.058 ms  1.033 ms
 3  10.1.12.2 (10.1.12.2)  1.073 ms  0.949 ms  0.932 ms
```

Example: AS PIC IKE Dynamic SA with Digital Certificates Configuration

Figure 8: AS PIC IKE Dynamic SA Topology Diagram

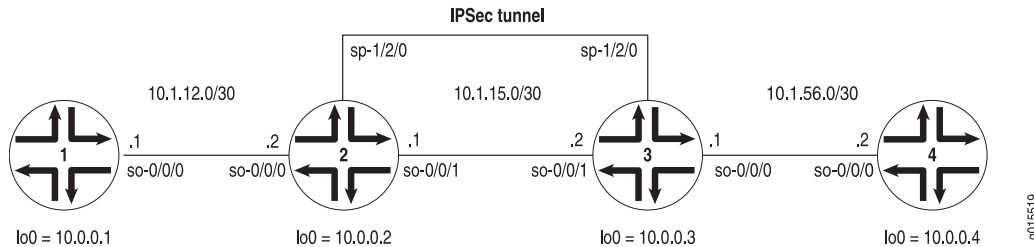


Figure 8 on page 149 shows the same IPsec topology as the AS PIC dynamic SA example on “Example: AS PIC IKE Dynamic SA Configuration” on page 140. However, this configuration requires Routers 2 and 3 to establish an IKE-based IPsec tunnel by using digital certificates in place of preshared keys. Routers 1 and 4 continue to provide basic connectivity and are used to verify that the IPsec tunnel is operational.

On Router 1, provide basic OSPF connectivity to Router 2.

```
Router 1 [edit]
interfaces {
  so-0/0/0 {
    description "To R2 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.1/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.1;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}
```

On Router 2, you must request a CA certificate, create a local certificate, and load these digital certificates into the router before you can reference them in your IPsec

configuration. To begin, configure an IPSec profile by specifying the trusted CA and URL of the CA server that handles CA certificate processing:

```
[edit]
security {
  pki {
    ca-profile entrust {
      ca-identity entrust;
      enrollment {
        url http://ca-1.example.com/cgi-bin/pkiclient.exe;
      }
    }
  }
}
```

Certificate revocation list (CRL) verification is enabled by default. You can optionally specify the Lightweight Access Directory (LDAP) server where the CA stores the CRL. The certificate typically includes a certificate distribution point (CDP), which contains information about how to retrieve the CRL for the certificate. The router uses this information to download the CRL automatically. In this example, the LDAP URL is specified, which overrides the location provided in the certificate:

```
[edit]
security pki ca-profile entrust {
  revocation-check {
    crl {
      url ldap://10.157.90.185/o=juniper,c=uscertificateRevocationListbase;
    }
  }
}
```

After you configure the CA profile, you can request a CA certificate from the trusted CA. In this example, the certificate is enrolled online and installed into the router automatically.

```
user@R2> request security pki ca-certificate enroll ca-profile entrust
Received following certificates:
Certificate: C=us, O=juniper
Fingerprint: 00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10
Certificate: C=us, O=juniper, CN=First Officer
Fingerprint: bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17
Certificate: C=us, O=juniper, CN=First Officer
Fingerprint: 46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f
Do you want to load the above CA certificate ? [yes,no] (no) yes
```



NOTE: If you obtain the CA certificate directly from the CA (for example, as an e-mail attachment or website download), you can install it with the `request security pki ca-certificate load` command.

Next, you must generate a private/public key pair before you can create a local certificate.

```
user@R2> request security pki generate-key-pair certificate-id local-entrust2
Generated key pair local-entrust2, key size 1024 bits
```


When the key pair is available, generate a local certificate request and send it to the CA for processing.

```
user@R2> request security pki generate-certificate-request
certificate-id local-entrust2 domain-name router2.example.com
filename entrust-req2 subject cn=router2.example.com
Generated certificate request
-----BEGIN CERTIFICATE REQUEST-----
MIIBoTCCAQoCAQAwGjEYMBYGA1UEAxMPdHxLmp1bm1wZXIubmV0MIGfMA0GCSqG
SIb3DQEBAQUAA4GNADCBiQKBgQCiuFklQws1Ud+AqN5DDxRs2kVyKEhh9qoVFnz+
Hz4c9vsy3B8E1wTJlkmIt2cB3yifB6zePd+6WYpf57Crwre7YqPkixM31F6z3YjX
H+1BPNbCxNwYvyrnSyVYDbFj8o0Xyqog8ACDfVL2JBWrPNBYy7imq/K9soDBbAs6
5hZqqwIDAQABoECwRQYJKoZIhvcNAQkOMTgwNjA0BgNVHQ8BAf8EBAMCB4AwJAYD
VR0RAQH/BBowGIIWdHxLmVuZ2xhYi5qdW5pcGVyLm5ldANBgkqhkiG9w0BAQQF
AA0BgQBc2rq1v5S0QXH7LCb/FdqAL8ZM6GoaNs5d6cGwq4bB6a7UQFgtH406gQ3G
3iH0Zfz4xMIBpJYuGd1dkqgvcDoH3AgTsLkfn7Wi3x5H2qeQVs9bvL4P5nvEZLND
EIMUHwteolZCiZ70f09Fer9cXWHSQs1UtXtgPqQJy2xIeImLgw==
-----END CERTIFICATE REQUEST-----
Fingerprint:
0d:90:b8:d2:56:74:fc:84:59:62:b9:78:71:9c:e4:9c:54:ba:16:97 (sha1)
1b:08:d4:f7:90:f1:c4:39:08:c9:de:76:00:86:62:b8 (md5)
```



NOTE: You can request the creation and installation of a local certificate online with the `request security pki local-certificate enroll` command. For more information, see [“Generating and Enrolling a Local Digital Certificate” on page 244](#) or the *Junos System Basics and Services Command Reference*.

The trusted CA digitally signs the local certificate and returns it to you. Copy the certificate file into the router and load the certificate.

```
user@R2> request security pki local-certificate load filename /tmp/router2-cert certificate-id
local-entrust2
Local certificate local-entrust2 loaded successfully
```



NOTE: The name of the file sent to you by the CA might not match the name of the certificate identifier. However, the `certificate-id` name must always match the name of the key pair you generated for the router.

After the local and CA certificates have been loaded, you can reference them in your IPsec configuration.

Using default values in the AS PIC, you do not need to configure an IPsec proposal or IPsec policy. However, you must configure an IKE proposal that specifies the use of digital certificates, reference the IKE proposal and local certificate in an IKE policy, and apply the CA profile to the service set. To enable an IKE proposal for digital certificates, include the `rsa-signatures` statement at the `[edit services ipsec-vpn ike proposal proposal-name authentication-method]` hierarchy level. To reference the local certificate in the IKE policy, include the `local-certificate` statement at the `[edit services ipsec-vpn ike policy policy-name]`

hierarchy level. To identify the CA or RA in the service set, include the **trusted-ca** statement at the **[edit services service-set service-set-name ipsec-vpn-options]** hierarchy level.



NOTE: For more information about default IKE and IPsec policies and proposals on the AS PIC, see [Table 8 on page 137](#).

Optionally, you can configure automatic reenrollment of the certificate with the **auto-re-enrollment** statement at the **[edit security pki]** hierarchy level.

The remaining configuration components of your IKE-based IPsec tunnel are the same as when you use preshared keys. Enable OSPF as the underlying routing protocol to connect to Routers 1 and 3. Configure a bidirectional IKE dynamic SA in a rule called **rule-ike** at the **[edit ipsec-vpn rule]** hierarchy level. Reference this rule in a service set called **service-set-dynamic-BiEspsha3des** at the **[edit services service-set]** hierarchy level.

To direct traffic into the AS PIC and the IPsec tunnel, configure a next-hop style service set and add the adaptive services logical interface used as the IPsec inside interface into the OSPF configuration.

```
Router 2 [edit]
interfaces {
  so-0/0/0 {
    description "To R1 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R3 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.1/30;
      }
    }
  }
  sp-1/2/0 {
    unit 0 {
      family inet;
    }
    unit 1 { # sp-1/2/0.1 is the IPsec inside interface.
      family inet;
      service-domain inside;
    }
    unit 2 { # sp-1/2/0.2 is the IPsec outside interface.
      family inet;
      service-domain outside;
    }
  }
  lo0 {
    unit 0 {
```

```

        family inet {
            address 10.0.0.2/32;
        }
    }
}
routing-options {
    router-id 10.0.0.2;
}
protocols {
    ospf {
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface sp-1/2/0.1; # This sends OSPF traffic over the IPsec tunnel.
            interface lo0.0;
        }
    }
}
security { # Configure CA profiles here, including the URLs used to reach the CAs.
    pki {
        ca-profile entrust {
            ca-identity entrust;
            enrollment {
                url http://ca-1.example.com/cgi-bin/pkiclient.exe;
            }
            revocation-check {
                crl {
                    url ldap://10.157.90.185/o=juniper,c=uscertificateRevocationListbase;
                    # Specify the URL of the LDAP server where the CA stores the CRL.
                }
            }
        }
        ca-profile microsoft {
            ca-identity microsoft;
            enrollment {
                url http://192.168.11.78:80/certsrv/mscep/mscep.dll;
            }
        }
        ca-profile verisign {
            ca-identity verisign;
            enrollment {
                url http://pilotonsiteipsec.verisign.com/cgi-bin/pkiclient.exe;
            }
        }
    }
}
services {
    service-set service-set-dynamic-BiEspsha3des { # Define your service set here.
        next-hop-service { # Required for dynamic routing protocols such as OSPF.
            inside-service-interface sp-1/2/0.1;
            outside-service-interface sp-1/2/0.2;
        }
        ipsec-vpn-options {
            trusted-ca entrust; # Reference the CA profile here.
            local-gateway 10.1.15.1; # Specify the local IP address of the IPsec tunnel.
        }
    }
}

```

```

    ipsec-vpn-rules rule-ike; # Reference your IPSec VPN rule here.
  }
  ipsec-vpn {
    rule rule-ike { # Define your IPSec VPN rule here.
      term term-ike {
        then {
          remote-gateway 10.1.15.2; # The remote IP address of the IPSec tunnel.
          dynamic { # This creates a dynamic SA.
            ike-policy ike-digital-certificates; # Reference your IKE policy here.
          }
        }
      }
    }
    match-direction input; # Specify in which direction the rule should match.
  }
  ike {
    proposal ike-proposal {
      authentication-method rsa-signatures; # Uses digital certificates
    }
    policy ike-digital-certificates {
      proposals ike-proposal; # Apply the IKE proposal here.
      local-id fqdn router2.example.com; # Provide an identifier for the local router.
      local-certificate local-entrust2; # Reference the local certificate here.
      remote-id fqdn router3.example.com; # Provide an ID for the remote router.
    }
  }
  establish-tunnels immediately;
}

```

On Router 3, you must repeat the digital certificate procedures you performed on Router 2. If the IPSec peers do not have a symmetrical configuration containing all the necessary components, they cannot establish a peering relationship.

You need to request a CA certificate, create a local certificate, load these digital certificates into the router, and reference them in your IPSec configuration. Begin by configuring an IPSec CA profile. Include the **ca-profile** statement at the **[edit security pki]** hierarchy level and specify the trusted CA and URL of the CA server that handles CA certificate processing. Include the CRL statements found on Router 2 to complete your CA profile on Router 3.

After you configure the CA profile, request a CA certificate from the trusted CA. In this example, the certificate is enrolled online and installed into the router automatically.

```

user@R3> request security pki ca-certificate enroll ca-profile entrust
Received following certificates:
Certificate: C=us, O=juniper
Fingerprint: 00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10
Certificate: C=us, O=juniper, CN=First Officer
Fingerprint: bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17
Certificate: C=us, O=juniper, CN=First Officer
Fingerprint: 46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f
Do you want to load the above CA certificate ? [yes,no] (no) yes

```



NOTE: If you obtain the CA certificate directly from the CA (for example, as an e-mail attachment or website download), you can install it with the `request security pki ca-certificate load` command.

Next, generate a private/public key pair.

```
user@R3> request security pki generate-key-pair certificate-id local-entrust3
Generated key pair local-entrust3, key size 1024 bits
```

When the key pair is available, you can generate a local certificate request and send it to the CA for processing.

```
user@R3> request security pki generate-certificate-request
certificate-id local-entrust3 domain-name router3.example.com
filename entrust-req3 subject cn=router3.example.com
Generated certificate request
-----BEGIN CERTIFICATE REQUEST-----
MIIB8jCCAVsCAQAwZTEYMBYGA1UEAxMPdHA1Lmp1bm1wZXIubmVOMRQwEgYDVQQL
EwtFbmdpbmVlcm1uZzEQMA4GA1UEChMHSnVuaXB1cjETMBEGA1UECBMKQ2FsaWZv
cm5pYTEMMAoGA1UEBhMDVVBmMIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQCg
Wjo50w8jrnphs0sRFvqQMwC6P1Ya65thrJ8nHZ2qgYgRbSr08hd0DhvU6/5VuD2/
zBtgV5ZSA01yV6DXq1bVj/2Xi rQAJMRCr1eYu6DhYRBMNq/UaQv4Z8Sse1EJv+uR
HTNbD7x1wpw2zwz1tRuGFtFr/FrGB0hF7IE+Xm5e2wIDAQABoE0wSwYJKoZIhvcN
AQKOMT4wPDAOBgNVHQ8BAf8EBAMCB4AwKgYDVR0RAQH/BCAwHocEwKhGk4IwDHA1
LmVuZ2xhYi5qdW5pcGVyLm51dDANBgkqhkiG9w0BAQQFAA0BgQBbiJ+ZCeQ59/eY
4Rd6awIpJFTz0svRZLxxjFWogusVTmaD2dsqFBqftS1eJBdeieRcYMF9vOn0GKm
FNfouegwei5+vzdNmNo55eIb3rs4pP62q0W5CUgmbHrjtp31yJsvu0xTTcPNY8zw
b6GyM2Hdkk3Vh2ReX11tQUSqYujTjw==
-----END CERTIFICATE REQUEST-----
Fingerprint:
7c:e8:f9:45:93:8d:a3:92:7f:18:29:02:f1:c8:e2:85:3d:ad:df:1f (sha1)
00:4e:df:a0:6b:ad:8c:50:da:7c:a1:cf:5d:37:b0:ea (md5)
```

The trusted CA digitally signs the local certificate and returns it to you. Copy the certificate file into the router and load the certificate.

```
user@R3> request security pki local-certificate load filename /tmp/router3-cert certificate-id
local-entrust3
Local certificate local-entrust3 loaded successfully
```

After the local and CA certificates have been loaded, you can reference them in your IPsec configuration. Using default values in the AS PIC, you do not need to configure an IPsec proposal or IPsec policy. However, you must configure an IKE proposal that uses digital certificates, reference the IKE proposal and local certificate in an IKE policy, and apply the CA profile to the service set. To enable the IKE proposal for digital certificates, include the `rsa-signatures` statement at the `[edit services ipsec-vpn ike proposal proposal-name authentication-method]` hierarchy level. To reference the local certificate in the IKE policy, include the `local-certificate` statement at the `[edit services ipsec-vpn ike policy policy-name]` hierarchy level. To identify the CA or RA in the service set, include the `trusted-ca` statement at the `[edit services service-set service-set-name ipsec-vpn-options]` hierarchy level.

The remaining configuration components of your IKE-based IPsec tunnel are the same as when you use preshared keys. Enable OSPF as the underlying routing protocol to connect to Routers 2 and 4. Configure a bidirectional IKE dynamic SA in a rule called **rule-ike** at the **[edit ipsec-vpn rule]** hierarchy level. Reference this rule in a service set called **service-set-dynamic-BiEspsha3des** at the **[edit services service-set]** hierarchy level.

To direct traffic into the AS PIC and the IPsec tunnel, configure a next-hop style service set and add the adaptive services logical interface used as the IPsec inside interface into the OSPF configuration.

```
Router 3 [edit]
interfaces {
  so-0/0/0 {
    description "To R4 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.56.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R2 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.2/30;
      }
    }
  }
  sp-1/2/0 {
    unit 0 {
      family inet;
    }
    unit 1 { # sp-1/2/0.1 is the IPSec inside interface.
      family inet;
      service-domain inside;
    }
    unit 2 { # sp-1/2/0.2 is the IPSec outside interface.
      family inet;
      service-domain outside;
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.3/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.3;
}
protocols {
  ospf {
    area 0.0.0.0 {
```

```

    interface so-0/0/0.0;
    interface sp-1/2/0.1; # This sends OSPF traffic over the IPsec tunnel.
    interface lo0.0;
  }
}
security { # Configure CA profiles here, including the URLs used to reach the CAs.
  pki {
    ca-profile entrust {
      ca-identity entrust;
      enrollment {
        url http://ca-1.example.com/cgi-bin/pkiclient.exe;
      }
      revocation-check {
        crl {
          url ldap://10.157.90.185/o=juniper,c=uscertificateRevocationListbase;
          # Specify the URL of the LDAP server where the CA stores the CRL.
        }
      }
    }
    ca-profile microsoft {
      ca-identity microsoft;
      enrollment {
        url http://192.168.11.78:80/certsrv/mscep/mscep.dll;
      }
    }
    ca-profile verisign {
      ca-identity verisign;
      enrollment {
        url http://pilotonsiteipsec.verisign.com/cgi-bin/pkiclient.exe;
      }
    }
  }
}
services {
  service-set service-set-dynamic-BiEspsha3des { # Define your service set here.
    next-hop-service { # Required for dynamic routing protocols such as OSPF.
      inside-service-interface sp-1/2/0.1;
      outside-service-interface sp-1/2/0.2;
    }
    ipsec-vpn-options {
      trusted-ca entrust; # Reference the CA profile here.
      local-gateway 10.1.15.2; # Specify the local IP address of the IPsec tunnel.
    }
    ipsec-vpn-rules rule-ike; # Reference your IPsec VPN rule here.
  }
  ipsec-vpn {
    rule rule-ike { # Define your IPsec VPN rule here.
      term term-ike {
        then {
          remote-gateway 10.1.15.1; # The remote IP address of the IPsec tunnel.
          dynamic { # This creates a dynamic SA.
            ike-policy ike-digital-certificates; # Reference your IKE policy here.
          }
        }
      }
    }
  }
}

```

```
        match-direction input; # Specify in which direction the rule should match.
    }
    ike {
        proposal ike-proposal {
            authentication-method rsa-signatures; # Uses digital certificates
        }
        policy ike-digital-certificates {
            proposals ike-proposal; # Apply the IKE proposal here.
            local-id fqdn router3.example.com; # Provide an identifier for the local router.
            local-certificate local-entrust3; # Reference the local certificate here.
            remote-id fqdn router2.example.com; # Provide an ID for the remote router.
        }
    }
    establish-tunnels immediately;
}
}
```

On Router 4, provide basic OSPF connectivity to Router 3.

```
Router 4 [edit]
interfaces {
    so-0/0/0 {
        description "To R3 so-0/0/0";
        unit 0 {
            family inet {
                address 10.1.56.2/30;
            }
        }
    }
    lo0 {
        unit 0 {
            family inet {
                address 10.0.0.4/32;
            }
        }
    }
}
routing-options {
    router-id 10.0.0.4;
}
protocols {
    ospf {
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface lo0.0;
        }
    }
}
```


Verifying Your Work

To verify proper operation of an IKE-based dynamic SA on the AS PIC, use the following commands:

- **ping**
- **show services ipsec-vpn certificates (detail)**
- **show services ipsec-vpn ike security-associations (detail)**
- **show services ipsec-vpn ipsec security-associations (detail)**
- **show services ipsec-vpn ipsec statistics**
- **traceroute**

To verify and manage digital certificates in your router, use the following commands:

- **show security pki ca-certificate (detail)**
- **show security pki certificate-request (detail)**
- **show security pki local-certificate (detail)**

The following sections show the output of these commands used with the configuration example:

- [Router 1 on page 159](#)
- [Router 2 on page 160](#)
- [Router 3 on page 163](#)
- [Router 4 on page 166](#)

Router 1

On Router 1, issue a **ping** command to the **so-0/0/0** interface on Router 4 to send traffic across the IPsec tunnel.

```
user@R1> ping 10.1.56.2
PING 10.1.56.2 (10.1.56.2): 56 data bytes
64 bytes from 10.1.56.2: icmp_seq=0 ttl=254 time=1.351 ms
64 bytes from 10.1.56.2: icmp_seq=1 ttl=254 time=1.187 ms
64 bytes from 10.1.56.2: icmp_seq=2 ttl=254 time=1.172 ms
64 bytes from 10.1.56.2: icmp_seq=3 ttl=254 time=1.154 ms
64 bytes from 10.1.56.2: icmp_seq=4 ttl=254 time=1.156 ms
^C
--- 10.1.56.2 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.154/1.204/1.351/0.074 ms
```

If you ping the loopback address of Router 4, the operation succeeds because the address is part of the OSPF network configured on Router 4.

```
user@R1> ping 10.0.0.4
PING 10.0.0.4 (10.0.0.4): 56 data bytes
64 bytes from 10.0.0.4: icmp_seq=0 ttl=62 time=1.318 ms
```

```
64 bytes from 10.0.0.4: icmp_seq=1 ttl=62 time=1.084 ms
64 bytes from 10.0.0.4: icmp_seq=2 ttl=62 time=3.260 ms
^C
--- 10.0.0.4 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.084/1.887/3.260/0.975 ms
```

Router 2

To verify that matched traffic is being diverted to the bidirectional IPsec tunnel, view the IPsec statistics:

```
user@R2> show services ipsec-vpn ipsec statistics
```

```
PIC: sp-1/2/0, Service set: service-set-dynamic-BiEspsha3des
```

```
ESP Statistics:
  Encrypted bytes:      162056
  Decrypted bytes:      161896
  Encrypted packets:    2215
  Decrypted packets:    2216
AH Statistics:
  Input bytes:          0
  Output bytes:         0
  Input packets:        0
  Output packets:       0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0
```

To verify that the IKE SA negotiation is successful, issue the **show services ipsec-vpn ike security-associations** command:

```
user@R2> show services ipsec-vpn ike security-associations
Remote Address  State      Initiator cookie  Responder cookie  Exchange type
10.1.15.2       Matured    d82610c59114fd37 ec4391f76783ef28  Main
```

To verify that the IPsec security association is active, issue the **show services ipsec-vpn ipsec security-associations detail** command. Notice that the SA contains the default settings inherent in the AS PIC, such as ESP for the protocol and HMAC-SHA1-96 for the authentication algorithm.

```
user@R2> show services ipsec-vpn ipsec security-associations detail
Service set: service-set-dynamic-BiEspsha3des
```

```
Rule: rule-ike, Term: term-ike, Tunnel index: 1
Local gateway: 10.1.15.1, Remote gateway: 10.1.15.2
IPsec inside interface: sp-1/2/0.1
Local identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)

Direction: inbound, SPI: 857451461, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 9052 seconds
Hard lifetime: Expires in 9187 seconds
```

```

Anti-replay service: Enabled, Replay window size: 64

Direction: outbound, SPI: 1272330309, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 9052 seconds
Hard lifetime: Expires in 9187 seconds
Anti-replay service: Enabled, Replay window size: 64

```

To display the digital certificates that are used to establish the IPsec tunnel, issue the **show services ipsec-vpn certificates** command:

```

user@R2> show services ipsec-vpn certificates
Service set: service-set-dynamic-BiEspsha3des, Total entries: 3
Certificate cache entry: 3
  Flags: Non-root Trusted
  Issued to: router3.example.com, Issued by: juniper
  Alternate subject: router3.example.com
  Validity:
    Not before: 2005 Nov 21st, 23:33:58 GMT
    Not after: 2008 Nov 22nd, 00:03:58 GMT

Certificate cache entry: 2
  Flags: Non-root Trusted
  Issued to: router2.example.com, Issued by: juniper
  Alternate subject: router2.example.com
  Validity:
    Not before: 2005 Nov 21st, 23:28:22 GMT
    Not after: 2008 Nov 21st, 23:58:22 GMT

Certificate cache entry: 1
  Flags: Root Trusted
  Issued to: juniper, Issued by: juniper
  Validity:
    Not before: 2005 Oct 18th, 23:54:22 GMT
    Not after: 2025 Oct 19th, 00:24:22 GMT

```

To display the CA certificate, issue the **show security pki ca-certificate detail** command. Notice that there are three separate certificates: one for certificate signing, one for key encipherment, and one for the CA's digital signature.

```

user@R2> show security pki ca-certificate detail
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 9235
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us
Validity:
  Not before: 2005 Oct 18th, 23:54:22 GMT
  Not after: 2025 Oct 19th, 00:24:22 GMT
Public key algorithm: rsaEncryption(1024 bits)
cb:9e:2d:c0:70:f8:ea:3c:f2:b5:f0:02:48:87:dc:68:99:a3:57:4f
0e:b9:98:0b:95:47:0d:1f:97:7c:53:17:dd:1a:f8:da:e5:08:d1:1c
78:68:1f:2f:72:9f:a2:cf:81:e3:ce:c5:56:89:ce:f0:97:93:fa:36
19:3e:18:7d:8c:9d:21:fe:1f:c3:87:8d:b3:5d:f3:03:66:9d:16:a7
bf:18:3f:f0:7a:80:f0:62:50:43:83:4f:0e:d7:c6:42:48:c0:8a:b2

```

```
c7:46:30:38:df:9b:dc:bc:b5:08:7a:f3:cd:64:db:2b:71:67:fe:d8
04:47:08:07:de:17:23:13
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10 (sha1)
  71:6f:6a:76:17:9b:d6:2a:e7:5a:72:97:82:6d:26:86 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: CRL signing, Certificate signing

Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 925c
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us, Common name: First Officer
Validity:
  Not before: 2005 Oct 18th, 23:55:59 GMT
  Not after: 2008 Oct 19th, 00:25:59 GMT
Public key algorithm: rsaEncryption(1024 bits)
c0:a4:21:32:95:0a:cd:ec:12:03:d1:a2:89:71:8e:ce:4e:a6:f9:2f
1a:9a:13:8c:f6:a0:3d:c9:bd:9d:c2:a0:41:77:99:1b:1e:ed:5b:80
34:46:f8:5b:28:34:38:2e:91:7d:4e:ad:14:86:78:67:e7:02:1d:2e
19:11:b7:fa:0d:ba:64:20:e1:28:4e:3e:bb:6e:64:dc:cd:b1:b4:7a
ca:8f:47:dd:40:69:c2:35:95:ce:b8:85:56:d7:0f:2d:04:4d:5d:d8
42:e1:4f:6b:bf:38:c0:45:1e:9e:f0:b4:7f:74:6f:e9:70:fd:4a:78
da:eb:10:27:bd:46:34:33
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17 (sha1)
  23:79:40:c9:6d:a6:f0:ca:e0:13:30:d4:29:6f:86:79 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Key encipherment
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 925b
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us, Common name: First Officer
Validity:
  Not before: 2005 Oct 18th, 23:55:59 GMT
  Not after: 2008 Oct 19th, 00:25:59 GMT
Public key algorithm: rsaEncryption(1024 bits)
ea:75:c4:f3:58:08:ea:65:5c:7e:b3:de:63:0a:cf:cf:ec:9a:82:e2
d7:e8:b9:2f:bd:4b:cd:86:2f:f1:dd:d8:a2:95:af:ab:51:a5:49:4e
00:10:c6:25:ff:b5:49:6a:99:64:74:69:e5:8c:23:5b:b4:70:62:8e
e4:f9:a2:28:d4:54:e2:0b:1f:50:a2:92:cf:6c:8f:ae:10:d4:69:3c
90:e2:1f:04:ea:ac:05:9b:3a:93:74:d0:59:24:e9:d2:9d:c2:ef:22
b9:32:c7:2c:29:4f:91:cb:5a:26:fe:1d:c0:36:dc:f4:9c:8b:f5:26
af:44:bf:53:aa:d4:5f:67
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f (sha1)
  ee:cc:c7:f4:5d:ac:65:33:0a:55:db:59:72:2c:dd:16 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
```

```

    http://CA-1/CRL/juniper_us_crlfile.crl
    Use for key: Digital signature

```

To display the local certificate request, issue the **show security pki certificate-request** command:

```

user@R2> show security pki certificate-request
Certificate identifier: local-entrust2
  Issued to: router2.example.com
  Public key algorithm: rsaEncryption(1024 bits)
  Public key verification status: Passed

```

To display the local certificate, issue the **show security pki local-certificate** command:

```

user@R2> show security pki local-certificate
Certificate identifier: local-entrust2
  Issued to: router2.example.com, Issued by: juniper
  Validity:
    Not before: 2005 Nov 21st, 23:28:22 GMT
    Not after: 2008 Nov 21st, 23:58:22 GMT
  Public key algorithm: rsaEncryption(1024 bits)
  Public key verification status: Passed

```

Router 3

To verify that matched traffic is being diverted to the bidirectional IPsec tunnel, view the IPsec statistics:

```

user@R3> show services ipsec-vpn ipsec statistics

PIC: sp-1/2/0, Service set: service-set-dynamic-BiEspsha3des

ESP Statistics:
  Encrypted bytes:      161896
  Decrypted bytes:      162056
  Encrypted packets:    2216
  Decrypted packets:    2215
AH Statistics:
  Input bytes:          0
  Output bytes:         0
  Input packets:        0
  Output packets:       0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0

```

To verify that the IKE SA negotiation is successful, issue the **show services ipsec-vpn ike security-associations** command. To be successful, the SA on Router 3 must contain the same settings you specified on Router 2.

```

user@R3> show services ipsec-vpn ike security-associations
Remote Address  State      Initiator cookie  Responder cookie  Exchange type
10.1.15.1       Matured    d82610c59114fd37  ec4391f76783ef28  Main

```

To verify that the IPsec SA is active, issue the **show services ipsec-vpn ipsec security-associations detail** command. To be successful, the SA on Router 3 must contain the same settings you specified on Router 2.

```
user@R3> show services ipsec-vpn ipsec security-associations detail
Service set: service-set-dynamic-BiEspsha3des
```

```
Rule: rule-ike, Term: term-ike, Tunnel index: 1
Local gateway: 10.1.15.2, Remote gateway: 10.1.15.1
IPsec inside interface: sp-1/2/0.1
Local identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)

Direction: inbound, SPI: 1272330309, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 7219 seconds
Hard lifetime: Expires in 7309 seconds
Anti-replay service: Enabled, Replay window size: 64

Direction: outbound, SPI: 857451461, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 7219 seconds
Hard lifetime: Expires in 7309 seconds
Anti-replay service: Enabled, Replay window size: 64
```

To display the digital certificates that are used to establish the IPsec tunnel, issue the **show services ipsec-vpn certificates** command:

```
user@R3> show services ipsec-vpn certificates
Service set: service-set-dynamic-BiEspsha3des, Total entries: 3
Certificate cache entry: 3
  Flags: Non-root Trusted
  Issued to: router3.example.com, Issued by: juniper
  Alternate subject: router3.example.com
  Validity:
    Not before: 2005 Nov 21st, 23:33:58 GMT
    Not after: 2008 Nov 22nd, 00:03:58 GMT

Certificate cache entry: 2
  Flags: Non-root Trusted
  Issued to: router2.example.com, Issued by: juniper
  Alternate subject: router2.example.com
  Validity:
    Not before: 2005 Nov 21st, 23:28:22 GMT
    Not after: 2008 Nov 21st, 23:58:22 GMT

Certificate cache entry: 1
  Flags: Root Trusted
  Issued to: juniper, Issued by: juniper
  Validity:
    Not before: 2005 Oct 18th, 23:54:22 GMT
    Not after: 2025 Oct 19th, 00:24:22 GMT
```

To display the CA certificate, issue the **show security pki ca-certificate detail** command. Notice that there are three separate certificates: one for certificate signing, one for key encipherment, and one for the CA's digital signature.

```

user@R3> show security pki ca-certificate detail
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 9235
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us
Validity:
  Not before: 2005 Oct 18th, 23:54:22 GMT
  Not after: 2025 Oct 19th, 00:24:22 GMT
Public key algorithm: rsaEncryption(1024 bits)
cb:9e:2d:c0:70:f8:ea:3c:f2:b5:f0:02:48:87:dc:68:99:a3:57:4f
0e:b9:98:0b:95:47:0d:1f:97:7c:53:17:dd:1a:f8:da:e5:08:d1:1c
78:68:1f:2f:72:9f:a2:cf:81:e3:ce:c5:56:89:ce:f0:97:93:fa:36
19:3e:18:7d:8c:9d:21:fe:1f:c3:87:8d:b3:5d:f3:03:66:9d:16:a7
bf:18:3f:f0:7a:80:f0:62:50:43:83:4f:0e:d7:c6:42:48:c0:8a:b2
c7:46:30:38:df:9b:dc:bc:b5:08:7a:f3:cd:64:db:2b:71:67:fe:d8
04:47:08:07:de:17:23:13
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10 (sha1)
  71:6f:6a:76:17:9b:d6:2a:e7:5a:72:97:82:6d:26:86 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: CRL signing, Certificate signing
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 925c
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us, Common name: First Officer
Validity:
  Not before: 2005 Oct 18th, 23:55:59 GMT
  Not after: 2008 Oct 19th, 00:25:59 GMT
Public key algorithm: rsaEncryption(1024 bits)
c0:a4:21:32:95:0a:cd:ec:12:03:d1:a2:89:71:8e:ce:4e:a6:f9:2f
1a:9a:13:8c:f6:a0:3d:c9:bd:9d:c2:a0:41:77:99:1b:1e:ed:5b:80
34:46:f8:5b:28:34:38:2e:91:7d:4e:ad:14:86:78:67:e7:02:1d:2e
19:11:b7:fa:0d:ba:64:20:e1:28:4e:3e:bb:6e:64:dc:cd:b1:b4:7a
ca:8f:47:dd:40:69:c2:35:95:ce:b8:85:56:d7:0f:2d:04:4d:5d:d8
42:e1:4f:6b:bf:38:c0:45:1e:9e:f0:b4:7f:74:6f:e9:70:fd:4a:78
da:eb:10:27:bd:46:34:33
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17 (sha1)
  23:79:40:c9:6d:a6:f0:ca:e0:13:30:d4:29:6f:86:79 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Key encipherment
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 925b

```

```
Issuer:
  Organization: juniper, Country: us
Subject:
  Organization: juniper, Country: us, Common name: First Officer
Validity:
  Not before: 2005 Oct 18th, 23:55:59 GMT
  Not after: 2008 Oct 19th, 00:25:59 GMT
Public key algorithm: rsaEncryption(1024 bits)
  ea:75:c4:f3:58:08:ea:65:5c:7e:b3:de:63:0a:cf:cf:ec:9a:82:e2
  d7:e8:b9:2f:bd:4b:cd:86:2f:f1:dd:d8:a2:95:af:ab:51:a5:49:4e
  00:10:c6:25:ff:b5:49:6a:99:64:74:69:e5:8c:23:5b:b4:70:62:8e
  e4:f9:a2:28:d4:54:e2:0b:1f:50:a2:92:cf:6c:8f:ae:10:d4:69:3c
  90:e2:1f:04:ea:ac:05:9b:3a:93:74:d0:59:24:e9:d2:9d:c2:ef:22
  b9:32:c7:2c:29:4f:91:cb:5a:26:fe:1d:c0:36:dc:f4:9c:8b:f5:26
  af:44:bf:53:aa:d4:5f:67
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
  46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f (sha1)
  ee:cc:c7:f4:5d:ac:65:33:0a:55:db:59:72:2c:dd:16 (md5)
Distribution CRL:
  C=us, O=juniper, CN=CRL1
  http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Digital signature
```

To display the local certificate request, issue the **show security pki certificate-request** command:

```
user@R3> show security pki certificate-request
Certificate identifier: local-entrust3
  Issued to: router3.example.com
  Public key algorithm: rsaEncryption(1024 bits)
  Public key verification status: Passed
```

To display the local certificate, issue the **show security pki local-certificate** command:

```
user@R3> show security pki local-certificate
Certificate identifier: local-entrust3
  Issued to: router3.example.com, Issued by: juniper
  Validity:
    Not before: 2005 Nov 21st, 23:33:58 GMT
    Not after: 2008 Nov 22nd, 00:03:58 GMT
  Public key algorithm: rsaEncryption(1024 bits)
  Public key verification status: Passed
```

Router 4

On Router 4, issue a **ping** command to the **so-0/0/0** interface on Router 1 to send traffic across the IPsec tunnel.

```
user@R4> ping 10.1.12.2
PING 10.1.12.2 (10.1.12.2): 56 data bytes
64 bytes from 10.1.12.2: icmp_seq=0 ttl=254 time=1.350 ms
64 bytes from 10.1.12.2: icmp_seq=1 ttl=254 time=1.161 ms
64 bytes from 10.1.12.2: icmp_seq=2 ttl=254 time=1.124 ms
64 bytes from 10.1.12.2: icmp_seq=5 ttl=254 time=1.116 ms
^C
--- 10.1.12.2 ping statistics ---
```


4 packets transmitted, 4 packets received, 0% packet loss
 round-trip min/avg/max/stddev = 1.116/1.172/1.350/0.081 ms

The final way you can confirm that traffic travels over the IPsec tunnel is by issuing the **traceroute** command to the **so-0/0/0** interface on Router 1. Notice that the physical interface between Routers 2 and 3 is not referenced in the path; traffic enters the IPsec tunnel through the adaptive services IPsec inside interface on Router 3, passes through the loopback interface on Router 2, and ends at the **so-0/0/0** interface on Router 1.

```
user@R4> traceroute 10.1.12.2
traceroute to 10.1.12.2 (10.1.12.2), 30 hops max, 40 byte packets
 1  10.1.15.2 (10.1.15.2)  0.987 ms  0.630 ms  0.563 ms
 2  10.0.0.2 (10.0.0.2)  1.194 ms  1.058 ms  1.033 ms
 3  10.1.12.2 (10.1.12.2)  1.073 ms  0.949 ms  0.932 ms
```

For additional information on using digital certificates, see the *Junos Services Interfaces Configuration Guide* and the *Junos System Basics and Services Command Reference*.

Example: ES PIC IKE Dynamic SA Configuration

Figure 9: ES PIC IKE Dynamic SA Topology Diagram

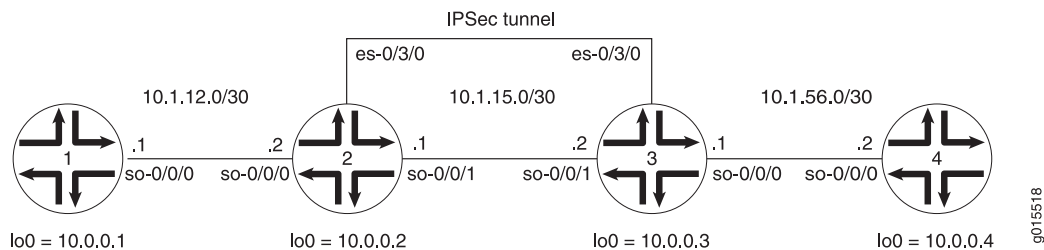


Figure 9 on page 167 shows the same IPsec topology as seen in the ES PIC manual SA example. However, this time the configuration requires Routers 2 and 3 to establish an IPsec tunnel using an IKE dynamic SA, enhanced authentication, and stronger encryption. Routers 1 and 4 continue to provide basic connectivity and are used to verify that the IPsec tunnel is operational.

On Router 1, provide basic OSPF connectivity to Router 2.

```
Router 1 [edit]
interfaces {
  so-0/0/0 {
    description "To R2 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.1/32;
      }
    }
  }
}
```

```

    }
  }
}
routing-options {
  router-id 10.0.0.1;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}
}

```

On Router 2, enable OSPF as the underlying routing protocol to connect to Routers 1 and 3. Configure a bidirectional IKE dynamic SA called **sa-dynamic** at the **[edit security ipsec security-association]** hierarchy level. For your IKE policy and proposal, use preshared keys for the authentication method, SHA-1 for the authentication algorithm, 3DES-CBC for encryption, group 2 for the Diffie-Hellman group, main mode, 3600 seconds for the lifetime, and a preshared key of **juniper** for the initial IKE negotiation. For your IPSec policy and proposal, use ESP for the protocol, HMAC-SHA1-96 for authentication, 3DES-CBC for encryption, 28800 seconds for the lifetime, and group 2 for the PFS group.

To direct traffic into the ES PIC and the IPSec tunnel, create two firewall filters. The **es-traffic** filter matches inbound traffic from Router 1 destined for Router 4, whereas the **es-return** filter matches the return path from Router 4 to Router 1. Apply the **es-traffic** filter to the **so-0/0/0** interface, and then apply both the **es-return** filter and the **sa-dynamic** SA to the **es-0/3/0** interface.

```

Router 2 [edit]
interfaces {
  so-0/0/0 {
    description "To R1 so-0/0/0";
    unit 0 {
      family inet {
        filter {
          input es-traffic; # Apply a filter that sends traffic to the IPSec tunnel here.
        }
        address 10.1.12.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R3 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.1/30;
      }
    }
  }
  es-0/3/0 {
    unit 0 {
      tunnel { # Specify the IPSec tunnel endpoints here.

```

```

        source 10.1.15.1;
        destination 10.1.15.2;
    }
    family inet {
        ipsec-sa sa-dynamic; # Apply the dynamic SA here.
        filter {
            input es-return; # Apply the filter that matches return IPSec traffic here.
        }
    }
}
}
lo0 {
    unit 0 {
        family inet {
            address 10.0.0.2/32;
        }
    }
}
}
routing-options {
    router-id 10.0.0.2;
}
protocols {
    ospf {
        area 0.0.0.0 {
            interface so-0/0/0.0;
            interface so-0/0/1.0;
            interface lo0.0;
        }
    }
}
}
security {
    ipsec {
        proposal es-ipsec-proposal { # Define your IPSec proposal specifications here.
            protocol esp;
            authentication-algorithm hmac-sha1-96;
            encryption-algorithm 3des-cbc;
            lifetime-seconds 28800;
        }
        policy es-ipsec-policy { # Define your IPSec policy specifications here.
            perfect-forward-secrecy {
                keys group2;
            }
            proposals es-ipsec-proposal; # Reference the IPSec proposal here.
        }
        security-association sa-dynamic { # Define your dynamic SA here.
            mode tunnel;
            dynamic {
                ipsec-policy es-ipsec-policy; # Reference the IPSec policy here.
            }
        }
    }
}
ike {
    proposal es-ike-proposal { # Define your IKE proposal specifications here.
        authentication-method pre-shared-keys;
        dh-group group2;
    }
}

```

```
    authentication-algorithm sha1;
    encryption-algorithm 3des-cbc;
    lifetime-seconds 3600;
  }
  policy 10.1.15.2 { # Define your IKE policy specifications here.
    mode main;
    proposals es-ike-proposal; # Reference the IKE proposal here.
    pre-shared-key ascii-text "$ABC123";
    ## The unencrypted preshared key for this example is juniper.
  }
}
firewall {
  filter es-traffic { # Define a filter that sends traffic to the IPSec tunnel here.
    term to-es {
      from {
        source-address {
          10.1.12.0/24;
        }
        destination-address {
          10.1.56.0/24;
        }
      }
      then {
        count ipsec-tunnel;
        ipsec-sa sa-dynamic;
      }
    }
    term other {
      then accept;
    }
  }
  filter es-return { # Define a filter that matches return IPSec traffic here.
    term return {
      from {
        source-address {
          10.1.56.0/24;
        }
        destination-address {
          10.1.12.0/24;
        }
      }
      then accept;
    }
  }
}
```

On Router 3, enable OSPF as the underlying routing protocol to connect to Routers 2 and 4. Configure a bidirectional IKE dynamic SA called **sa-dynamic** at the **[edit security ipsec security-association]** hierarchy level. Use the same policies and proposals that you used on Router 2.

For your IKE policy and proposal, use preshared keys for the authentication method, SHA-1 for the authentication algorithm, 3DES-CBC for encryption, group 2 for the Diffie-Hellman group, main mode, 3600 seconds for the lifetime, and a preshared key

of **juniper** for the initial IKE negotiation. For your IPsec policy and proposal, use ESP for the protocol, HMAC-SHA1-96 for authentication, 3DES-CBC for encryption, 28800 seconds for the lifetime, and group 2 for the PFS group.

To direct traffic into the ES PIC and the IPsec tunnel, create two firewall filters. The **es-traffic** filter matches inbound traffic from Router 4 destined for Router 1, whereas the **es-return** filter matches the return path from Router 1 to Router 4. Apply the **es-traffic** filter to the **so-0/0/0** interface; then apply both the **es-return** filter and the **sa-dynamic** SA to the **es-0/3/0** interface.

```
Router 3 [edit]
interfaces {
  so-0/0/0 {
    description "To R4 so-0/0/0";
    unit 0 {
      family inet {
        filter {
          input es-traffic; # Apply a filter that sends traffic to the IPsec tunnel here.
        }
        address 10.1.56.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R2 so-0/0/1";
    unit 0 {
      family inet {
        address 10.1.15.2/30;
      }
    }
  }
  es-0/3/0 {
    unit 0 {
      tunnel { # Specify the IPsec tunnel endpoints here.
        source 10.1.15.2;
        destination 10.1.15.1;
      }
      family inet {
        ipsec-sa sa-dynamic; # Apply the dynamic SA here.
        filter {
          input es-return; # Apply the filter that matches return IPsec traffic here.
        }
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.3/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.3;
```

```
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface so-0/0/1.0;
      interface lo0.0;
    }
  }
}
security {
  ipsec {
    proposal es-ipsec-proposal { # Define your IPSec proposal specifications here.
      protocol esp;
      authentication-algorithm hmac-sha1-96;
      encryption-algorithm 3des-cbc;
      lifetime-seconds 28800;
    }
    policy es-ipsec-policy { # Define your IPSec policy specifications here.
      perfect-forward-secrecy {
        keys group2;
      }
      proposals es-ipsec-proposal; # Reference the IPSec proposal here.
    }
    security-association sa-dynamic { # Define your dynamic SA here.
      mode tunnel;
      dynamic {
        ipsec-policy es-ipsec-policy; # Reference the IPSec policy here.
      }
    }
  }
}
ike {
  proposal es-ike-proposal { # Define your IKE proposal specifications here.
    authentication-method pre-shared-keys;
    dh-group group2;
    authentication-algorithm sha1;
    encryption-algorithm 3des-cbc;
    lifetime-seconds 3600;
  }
  policy 10.1.15.1 { # Define your IKE policy specifications here.
    mode main;
    proposals es-ike-proposal; # Reference the IKE proposal here.
    pre-shared-key ascii-text "$ABC123";
    ## The unencrypted preshared key for this example is juniper.
  }
}
firewall {
  filter es-traffic { # Define a filter that sends traffic to the IPSec tunnel here.
    term to-es {
      from {
        source-address {
          10.1.56.0/24;
        }
      }
      destination-address {
        10.1.12.0/24;
      }
    }
  }
}
```

```

    }
  }
  then {
    count ipsec-tunnel;
    ipsec-sa sa-dynamic;
  }
}
term other {
  then accept;
}
}
filter es-return { # Define a filter that matches return IPsec traffic here.
  term return {
    from {
      source-address {
        10.1.12.0/24;
      }
      destination-address {
        10.1.56.0/24;
      }
    }
    then accept;
  }
}
}

```

On Router 4, provide basic OSPF connectivity to Router 3.

```

Router 4 [edit]
interfaces {
  so-0/0/0 {
    description "To R3 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.56.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.4/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.4;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}

```

```
}
```

Verifying Your Work

To verify proper operation of an IKE-based dynamic SA on the ES PIC, use the following commands:

- **ping**
- **show ike security-associations (detail)**
- **show ipsec security-associations (detail)**
- **traceroute**

The following sections show the output of these commands used with the configuration example:

- [Router 1 on page 174](#)
- [Router 2 on page 175](#)
- [Router 3 on page 176](#)
- [Router 4 on page 177](#)

Router 1

On Router 1, issue a **ping** command to the **so-0/0/0** interface of Router 4 to send traffic across the IPsec tunnel.

```
user@R1> ping 10.1.56.2
PING 10.1.56.2 (10.1.56.2): 56 data bytes
64 bytes from 10.1.56.2: icmp_seq=0 ttl=253 time=0.917 ms
64 bytes from 10.1.56.2: icmp_seq=1 ttl=253 time=0.881 ms
64 bytes from 10.1.56.2: icmp_seq=2 ttl=253 time=0.897 ms
64 bytes from 10.1.56.2: icmp_seq=3 ttl=253 time=0.871 ms
64 bytes from 10.1.56.2: icmp_seq=4 ttl=253 time=0.890 ms
64 bytes from 10.1.56.2: icmp_seq=5 ttl=253 time=0.858 ms
64 bytes from 10.1.56.2: icmp_seq=6 ttl=253 time=0.904 ms
^C
--- 10.1.56.2 ping statistics ---
7 packets transmitted, 7 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.858/0.888/0.917/0.019 ms
```

You can also issue the **traceroute** command to verify that traffic to **10.1.56.2** travels over the IPsec tunnel between Router 2 and Router 3. Notice that the second hop does not reference **10.1.15.2**—the physical interface on Router 3. Instead, the loopback address of **10.0.0.3** on Router 3 appears as the second hop. This indicates that the IPSec tunnel is operating correctly.

```
user@R1> traceroute 10.1.56.2
traceroute to 10.1.56.2 (10.1.56.2), 30 hops max, 40 byte packets
 1  10.1.12.1 (10.1.12.1)  0.655 ms  0.549 ms  0.508 ms
 2  10.0.0.3 (10.0.0.3)  0.833 ms  0.786 ms  0.757 ms
```

```
3 10.1.56.2 (10.1.56.2) 0.808 ms 0.741 ms 0.716 ms
```


Router 2

Another way to verify that matched traffic is being diverted to the bidirectional IPsec tunnel is to view the firewall filter counter. After you issue the **ping** command from Router 1 (seven packets), the **es-traffic** firewall filter counter looks like this:

```
user@R2> show firewall filter es-traffic
Filter: es-traffic
Counters:
Name                               Bytes      Packets
ipsec-tunnel                       588        7
```

After you issue the **ping** command from both Router 1 (seven packets) and Router 4 (five packets), the **es-traffic** firewall filter counter looks like this:

```
user@R2> show firewall filter es-traffic
Filter: es-traffic
Counters:
Name                               Bytes      Packets
ipsec-tunnel                       1008       12
```

To verify that the IKE SA negotiation between Routers 2 and 3 is successful, issue the **show ike security-associations detail** command. Notice that the SA contains the settings you specified, such as SHA-1 for the authentication algorithm and 3DES-CBC for the encryption algorithm.

```
user@R2> show ike security-associations detail
IKE peer 10.1.15.2
  Role: Initiator, State: Matured
  Initiator cookie: b5dbdfe2f9000000, Responder cookie: a24c868410000041
  Exchange type: Main, Authentication method: Pre-shared-keys
  Local: 10.1.15.1:500, Remote: 10.1.15.2:500
  Lifetime: Expires in 401 seconds
  Algorithms:
    Authentication      : sha1
    Encryption          : 3des-cbc
    Pseudo random function: hmac-sha1
  Traffic statistics:
    Input bytes  :      1736
    Output bytes :      2652
    Input packets:         9
    Output packets:        15
  Flags: Caller notification sent
  IPsec security associations: 3 created, 0 deleted
  Phase 2 negotiations in progress: 0
```

To verify that the IPsec security association is active, issue the **show ipsec security-associations detail** command. Notice that the SA contains the settings you specified, such as ESP for the protocol, HMAC-SHA1-96 for the authentication algorithm, and 3DES-CBC for the encryption algorithm.

```
user@R2> show ipsec security-associations detail
Security association: sa-dynamic, Interface family: Up
  Local gateway: 10.1.15.1, Remote gateway: 10.1.15.2
```

```

Local identity: ipv4_subnet(any:0,[0..7]=10.1.12.0/24)
Remote identity: ipv4_subnet(any:0,[0..7]=10.1.56.0/24)
Direction: inbound, SPI: 2133029543, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 26212 seconds
Hard lifetime: Expires in 26347 seconds
Anti-replay service: Disabled
Direction: outbound, SPI: 1759450863, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 26212 seconds
Hard lifetime: Expires in 26347 seconds
Anti-replay service: Disabled

```

Router 3

View the firewall filter counter to continue verifying that matched traffic is being diverted to the bidirectional IPsec tunnel. After you issue the **ping** command from Router 1 (seven packets), the **es-traffic** firewall filter counter looks like this:

```

user@R3> show firewall filter es-traffic
Filter: es-traffic
Counters:

```

Name	Bytes	Packets
ipsec-tunnel	588	7

After you issue the **ping** command from both Router 1 (seven packets) and Router 4 (five packets), the **es-traffic** firewall filter counter looks like this:

```

user@R3> show firewall filter es-traffic
Filter: es-traffic
Counters:

```

Name	Bytes	Packets
ipsec-tunnel	1008	12

To verify the success of the IKE security association, issue the **show ike security-associations detail** command. Notice that the SA on Router 3 contains the same settings you specified on Router 2.

```

user@R3> show ike security-associations detail
IKE peer 10.1.15.1
Role: Responder, State: Matured
Initiator cookie: b5dbdfe2f9000000, Responder cookie: a24c868410000041
Exchange type: Main, Authentication method: Pre-shared-keys
Local: 10.1.15.2:500, Remote: 10.1.15.1:500
Lifetime: Expires in 564 seconds
Algorithms:
Authentication      : sha1
Encryption          : 3des-cbc
Pseudo random function: hmac-sha1
Traffic statistics:
Input bytes  :          2652
Output bytes :          1856
Input packets:           15
Output packets:          10
Flags: Caller notification sent

```

```
IPsec security associations: 3 created, 4 deleted
Phase 2 negotiations in progress: 0
```

To verify that the IPsec security association is active, issue the **show ipsec security-associations detail** command. Notice that the SA on Router 3 contains the same settings you specified on Router 2.

```
user@R3> show ipsec security-associations detail
Security association: sa-dynamic, Interface family: Up
  Local gateway: 10.1.15.2, Remote gateway: 10.1.15.1
  Local identity: ipv4_subnet(any:0,[0..7]=10.1.56.0/24)
  Remote identity: ipv4_subnet(any:0,[0..7]=10.1.12.0/24)
  Direction: inbound, SPI: 1759450863, AUX-SPI: 0
  Mode: tunnel, Type: dynamic, State: Installed
  Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
  Soft lifetime: Expires in 26427 seconds
  Hard lifetime: Expires in 26517 seconds
  Anti-replay service: Disabled
  Direction: outbound, SPI: 2133029543, AUX-SPI: 0
  Mode: tunnel, Type: dynamic, State: Installed
  Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
  Soft lifetime: Expires in 26427 seconds
  Hard lifetime: Expires in 26517 seconds
  Anti-replay service: Disabled
```

Router 4

On Router 4, issue a **ping** command to the **so-0/0/0** interface of Router 1 to send traffic across the IPsec tunnel.

```
user@R4> ping 10.1.12.2
user@R4> ping 10.1.12.2
PING 10.1.12.2 (10.1.12.2): 56 data bytes
64 bytes from 10.1.12.2: icmp_seq=0 ttl=253 time=13.528 ms
64 bytes from 10.1.12.2: icmp_seq=1 ttl=253 time=0.873 ms
64 bytes from 10.1.12.2: icmp_seq=2 ttl=253 time=32.145 ms
64 bytes from 10.1.12.2: icmp_seq=3 ttl=253 time=0.921 ms
64 bytes from 10.1.12.2: icmp_seq=4 ttl=253 time=0.899 ms
^C
--- 10.1.12.2 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.873/9.673/32.145/12.255 ms
```

You can also issue the **traceroute** command to verify that traffic to **10.1.12.2** travels over the IPsec tunnel between Router 3 and Router 2. Notice that the second hop does not reference **10.1.15.1**—the physical interface on Router 2. Instead, the loopback address of **10.0.0.2** on Router 2 appears as the second hop. This indicates that the IPsec tunnel is operating correctly.

```
user@R4> traceroute 10.1.12.2
traceroute to 10.1.12.2 (10.1.12.2), 30 hops max, 40 byte packets
 1 10.1.56.1 (10.1.56.1) 0.681 ms 0.624 ms 0.547 ms
 2 10.0.0.2 (10.0.0.2) 0.800 ms 0.770 ms 0.737 ms
 3 10.1.12.2 (10.1.12.2) 0.793 ms 0.742 ms 0.716 ms
```

Example: IKE Dynamic SA Between an AS PIC and an ES PIC Configuration

Figure 10: AS PIC to ES PIC IKE Dynamic SA Topology Diagram

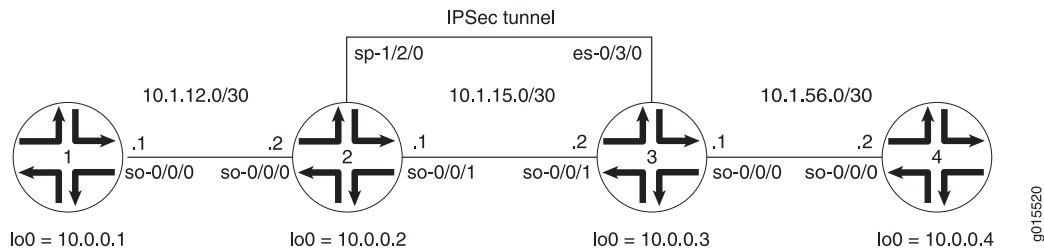


Figure 10 on page 178 shows a hybrid configuration that allows you to create an IPsec tunnel between the AS PIC and the ES PIC. Router 2 contains an AS PIC at **sp-1/2/0** and Router 3 has an ES PIC at **es-0/3/0**. To establish an IPsec tunnel using an IKE dynamic SA, the key is to learn the default IKE SA and IPsec SA settings built into the AS PIC and configure them explicitly on the ES PIC. Routers 1 and 4 again provide basic connectivity and are used to verify that the IPsec tunnel is operational.

On Router 1, provide basic OSPF connectivity to Router 2.

```
Router 1 [edit]
interfaces {
  so-0/0/0 {
    description "To R2 so-0/0/0.0";
    unit 0 {
      family inet {
        address 10.1.12.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.0.0.1/32;
      }
    }
  }
}
routing-options {
  router-id 10.0.0.1;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}
```

On Router 2, enable OSPF as the underlying routing protocol to connect to Routers 1 and 3. Configure a bidirectional IKE dynamic SA in a rule called **rule-ike** at the **[edit ipsec-vpn**

rule] hierarchy level. Reference this rule in a service set called **service-set-dynamic-BiEspsha3des** at the **[edit services service-set]** hierarchy level.

Using default values in the AS PIC, you do not need to specify an IPsec proposal, IPsec policy, or IKE proposal. However, you do need to configure a preshared key in an IKE policy with the **pre-shared-key** statement at the **[edit services ipsec-vpn ike policy *policy-name*]** hierarchy level. (For more information about default IKE and IPsec policies and proposals on the AS PIC, see [Table 8 on page 137](#).)

To direct traffic into the AS PIC and the IPsec tunnel, include match conditions in the **rule-ike** IPsec VPN rule to match inbound traffic from Router 1 that is destined for Router 4. Because the rule is already referenced by the service set, apply the service set to the **so-0/0/1** interface. To count the amount of traffic that enters the IPsec tunnel, configure a firewall filter called **ipsec-tunnel** and apply it to the **sp-1/2/0** interface.

```
Router 2 [edit]
interfaces {
  so-0/0/0 {
    description "To R1 so-0/0/0";
    unit 0 {
      family inet {
        address 10.1.12.1/30;
      }
    }
  }
  so-0/0/1 {
    description "To R3 so-0/0/1";
    unit 0 {
      family inet {
        service { # Apply the service set here.
          input {
            service-set service-set-dynamic-BiEspsha3des;
          }
          output {
            service-set service-set-dynamic-BiEspsha3des;
          }
        }
        address 10.1.15.1/30;
      }
    }
  }
  sp-1/2/0 {
    services-options {
      syslog {
        host local {
          services info;
        }
      }
    }
    unit 0 {
      family inet {
        filter {
          input ipsec-tunnel; # Apply the firewall filter with the counter here.
        }
      }
    }
  }
}
```

```
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.0.0.2/32;
    }
  }
}
}
routing-options {
  router-id 10.0.0.2;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface so-0/0/1.0;
      interface lo0.0;
    }
  }
}
}
firewall {
  filter ipsec-tunnel { # Configure a firewall filter to count IPsec traffic here.
    term 1 {
      then {
        count ipsec-tunnel;
        accept;
      }
    }
  }
}
services {
  service-set service-set-dynamic-BiEspsha3des { # Define your service set here.
    interface-service {
      service-interface sp-1/2/0; # Specify an interface to process IPsec.
    }
    ipsec-vpn-options {
      local-gateway 10.1.15.1; # Specify the local IP address of the IPsec tunnel.
    }
    ipsec-vpn-rules rule-ike; # Reference your IPsec VPN rule here.
  }
  ipsec-vpn {
    rule rule-ike { # Define your IPsec VPN rule here.
      term term-ike {
        from {
          source-address {
            10.1.12.0/24;
          }
          destination-address {
            10.1.56.0/24;
          }
        }
        then {
          remote-gateway 10.1.15.2; # The remote IP address of the IPsec tunnel.
        }
      }
    }
  }
}
```

```

        dynamic { # This creates a dynamic SA.
            ike-policy ike-policy-preshared; # Reference your IKE proposal here.
        }
    }
    match-direction output; # Specify in which direction the rule should match.
}
ike {
    policy ike-policy-preshared { # Define your IKE policy specifications here.
        pre-shared-key ascii-text "$ABC123";
        ## The unencrypted preshared key for this example is juniper.
    }
}
}
}

```

Router 2

```

[edit]
interfaces {
    so-0/0/0 {
        description "To R1 so-0/0/0";
        unit 0 {
            family inet {
                address 10.1.12.1/30;
            }
        }
    }
    so-0/0/1 {
        description "To R3 so-0/0/1";
        unit 0 {
            family inet {
                service { # Apply the service set here.
                    input {
                        service-set service-set-dynamic-BiEspsha3des;
                    }
                    output {
                        service-set service-set-dynamic-BiEspsha3des;
                    }
                }
                address 10.1.15.1/30;
            }
        }
    }
    sp-1/2/0 {
        services-options {
            syslog {
                host local {
                    services info;
                }
            }
        }
        unit 0 {
            family inet {
                filter {
                    input ipsec-tunnel; # Apply the firewall filter with the counter here.
                }
            }
        }
    }
}

```

```
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.0.0.2/32;
    }
  }
}
}
routing-options {
  router-id 10.0.0.2;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface so-0/0/1.0;
      interface lo0.0;
    }
  }
}
firewall {
  filter ipsec-tunnel { # Configure a firewall filter to count IPSec traffic here.
    term 1 {
      then {
        count ipsec-tunnel;
        accept;
      }
    }
  }
}
services {
  service-set service-set-dynamic-BiEspsha3des { # Define your service set here.
    interface-service {
      service-interface sp-1/2/0; # Specify an interface to process IPSec.
    }
    ipsec-vpn-options {
      local-gateway 10.1.15.1; # Specify the local IP address of the IPSec tunnel.
    }
    ipsec-vpn-rules rule-ike; # Reference your IPSec VPN rule here.
  }
  ipsec-vpn {
    rule rule-ike { # Define your IPSec VPN rule here.
      term term-ike {
        from {
          source-address {
            10.1.12.0/24;
          }
          destination-address {
            10.1.56.0/24;
          }
        }
        then {
          remote-gateway 10.1.15.2; # The remote IP address of the IPSec tunnel.
        }
      }
    }
  }
}
```



```

        dynamic { # This creates a dynamic SA.
            ike-policy ike-policy-preshared; # Reference your IKE proposal here.
        }
    }
    match-direction output; # Specify in which direction the rule should match.
}
ike {
    policy ike-policy-preshared { # Define your IKE policy specifications here.
        pre-shared-key ascii-text "$ABC123";
        ## The unencrypted preshared key for this example is juniper.
    }
}
}
}

```

On Router 3, enable OSPF as the underlying routing protocol to connect to Routers 2 and 4. Configure a bidirectional IKE dynamic SA called **sa-dynamic** at the **[edit security ipsec security-association]** hierarchy level. To allow the ES PIC to communicate with the IKE dynamic SA established on Router 2, you must explicitly configure the same policies and proposals on the ES PIC that are available by default on the AS PIC. (For more information about default IKE and IPSec policies and proposals on the AS PIC, see [Table 8 on page 137](#).)

For your IKE policy and proposal, use preshared keys for the authentication method, SHA-1 for the authentication algorithm, 3DES-CBC for encryption, group 2 for the Diffie-Hellman group, main mode, 3600 seconds for the lifetime, and a preshared key of **juniper** for the initial IKE negotiation. For your IPSec policy and proposal, use ESP for the protocol, HMAC-SHA1-96 for authentication, 3DES-CBC for encryption, 28800 seconds for the lifetime, and group 2 for the PFS group.

To direct traffic into the ES PIC and the IPSec tunnel, create two firewall filters. The **es-traffic** filter matches inbound traffic from Router 4 destined for Router 1, whereas the **es-return** filter matches the return path from Router 1 to Router 4. Apply the **es-traffic** filter to the **so-0/0/0** interface; then apply both the **es-return** filter and the **sa-dynamic SA** to the **es-0/3/0** interface.

```

Router 3 [edit]
interfaces {
    so-0/0/0 {
        description "To R4 so-0/0/0";
        unit 0 {
            family inet {
                filter {
                    input es-traffic; # Apply a filter that sends traffic to the IPSec tunnel here.
                }
                address 10.1.56.1/30;
            }
        }
    }
    so-0/0/1 {
        description "To R2 so-0/0/1";
        unit 0 {
            family inet {
                address 10.1.15.2/30;
            }
        }
    }
}

```

```
}
es-0/3/0 {
  unit 0 {
    tunnel { # Specify the IPSec tunnel endpoints here.
      source 10.1.15.2;
      destination 10.1.15.1;
    }
    family inet {
      ipsec-sa sa-dynamic; # Apply the dynamic SA here.
      filter {
        input es-return; # Apply the filter that matches return IPSec traffic here.
      }
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.0.0.3/32;
    }
  }
}
}
routing-options {
  router-id 10.0.0.3;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface so-0/0/1.0;
      interface lo0.0;
    }
  }
}
}
security {
  ipsec {
    proposal es-ipsec-proposal { # Define your IPSec proposal specifications here.
      protocol esp;
      authentication-algorithm hmac-sha1-96;
      encryption-algorithm 3des-cbc;
      lifetime-seconds 28800;
    }
    policy es-ipsec-policy { # Define your IPSec policy specifications here.
      perfect-forward-secrecy {
        keys group2;
      }
      proposals es-ipsec-proposal; # Reference the IPSec proposal here.
    }
    security-association sa-dynamic { # Define your dynamic SA here.
      mode tunnel;
      dynamic {
        ipsec-policy es-ipsec-policy; # Reference the IPSec policy here.
      }
    }
  }
}
```

```

ike {
  proposal es-ike-proposal { # Define your IKE proposal specifications here.
    authentication-method pre-shared-keys;
    dh-group group2;
    authentication-algorithm sha1;
    encryption-algorithm 3des-cbc;
    lifetime-seconds 3600;
  }
  policy 10.1.15.1 { # Define your IKE policy specifications here.
    mode main;
    proposals es-ike-proposal; # Reference the IKE proposal here.
    pre-shared-key ascii-text "$ABC123";
    ## The unencrypted preshared key for this example is juniper.
  }
}
}
firewall {
  filter es-traffic { # Define a filter that sends traffic to the IPsec tunnel here.
    term to-es {
      from {
        source-address {
          10.1.56.0/24;
        }
        destination-address {
          10.1.12.0/24;
        }
      }
      then {
        count ipsec-tunnel;
        ipsec-sa sa-dynamic;
      }
    }
    term other {
      then accept;
    }
  }
  filter es-return { # Define a filter that matches return IPsec traffic here.
    term return {
      from {
        source-address {
          10.1.12.0/24;
        }
        destination-address {
          10.1.56.0/24;
        }
      }
      then accept;
    }
  }
}
}

```

On Router 4, provide basic OSPF connectivity to Router 3.

Router 4 [edit]
 interfaces {

```
so-0/0/0 {
  description "To R3 so-0/0/0";
  unit 0 {
    family inet {
      address 10.156.2/30;
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.0.0.4/32;
    }
  }
}
}
routing-options {
  router-id 10.0.0.4;
}
protocols {
  ospf {
    area 0.0.0.0 {
      interface so-0/0/0.0;
      interface lo0.0;
    }
  }
}
}
```

Verifying Your Work

To verify proper operation of an IKE-based dynamic SA on the AS PIC, use the following commands:

- **ping**
- **show services ipsec-vpn ike security-associations (detail)**
- **show services ipsec-vpn ipsec security-associations (detail)**
- **traceroute**

To verify proper operation of an IKE-based dynamic SA on the ES PIC, use the following commands:

- **ping**
- **show ike security-associations (detail)**
- **show ipsec security-associations (detail)**
- **traceroute**

The following sections show the output of these commands used with the configuration example:

- [Router 1 on page 187](#)
- [Router 2 on page 187](#)
- [Router 3 on page 189](#)
- [Router 4 on page 190](#)

Router 1

On Router 1, issue a **ping** command to the **so-0/0/0** interface of Router 4 to send traffic across the IPsec tunnel.

```
user@R1> ping 10.1.56.2
PING 10.1.56.2 (10.1.56.2): 56 data bytes
64 bytes from 10.1.56.2: icmp_seq=0 ttl=253 time=1.172 ms
64 bytes from 10.1.56.2: icmp_seq=1 ttl=253 time=1.020 ms
64 bytes from 10.1.56.2: icmp_seq=2 ttl=253 time=0.998 ms
64 bytes from 10.1.56.2: icmp_seq=3 ttl=253 time=1.037 ms
^C
--- 10.1.56.2 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.998/1.057/1.172/0.068 ms
```

You can also issue the **traceroute** command to verify that traffic to **10.1.56.2** travels over the IPsec tunnel between Router 2 and Router 3. Notice that the traced path does not reference **10.1.15.2**—the physical interface on Router 3. Instead, traffic arriving at Router 2 is immediately filtered into the IPsec tunnel and the path is listed as unknown with the ******* notation. This indicates that the IPsec tunnel is operating correctly.

```
user@R1> traceroute 10.1.56.2
traceroute to 10.1.56.2 (10.1.56.2), 30 hops max, 40 byte packets
 1 * * *
 2 10.1.56.2 (10.1.56.2) 1.045 ms 0.915 ms 0.850 ms
```

Router 2

One way to verify that matched traffic is being diverted to the bidirectional IPsec tunnel is to view the firewall filter counter. Before any traffic flows, the **ipsec-tunnel** firewall filter counter looks like this:

```
user@R2> show firewall filter ipsec-tunnel
Filter: ipsec-tunnel
Counters:

```

Name	Bytes	Packets
ipsec-tunnel	0	0

After you issue the **ping** command from Router 1 (four packets) to **10.1.56.2**, the **ipsec-tunnel** firewall filter counter looks like this:

```
user@R2> show firewall filter ipsec-tunnel
Filter: ipsec-tunnel
Counters:
```

Name	Bytes	Packets
ipsec-tunnel	336	4

After you issue the **ping** command from both Router 1 to 10.1.56.2 (four packets) and from Router 4 to 10.1.12.2 (six packets), the **ipsec-tunnel** firewall filter counter looks like this:

```
user@R2> show firewall filter ipsec-tunnel
Filter: es-traffic
Counters:
Name          Bytes      Packets
ipsec-tunnel  840        10
```

To verify that the IKE SA negotiation is successful, issue the **show services ipsec-vpn ike security-associations detail** command. Notice that the SA contains the default IKE settings inherent in the AS PIC, such as SHA-1 for the authentication algorithm and 3DES-CBC for the encryption algorithm.

```
user@R2> show services ipsec-vpn ike security-associations detail
IKE peer 10.1.15.2
  Role: Responder, State: Matured
  Initiator cookie: c8e1e4c0da000040, Responder cookie: 4fbaa5184e000044
  Exchange type: Main, Authentication method: Pre-shared-keys
  Local: 10.1.15.1:500, Remote: 10.1.15.2:500
  Lifetime: Expires in 3535 seconds
  Algorithms:
    Authentication      : sha1
    Encryption          : 3des-cbc
    Pseudo random function: hmac-sha1
  Traffic statistics:
    Input bytes   :      840
    Output bytes  :      756
    Input packets :        5
    Output packets:        4
  Flags: Caller notification sent
  IPsec security associations: 1 created, 0 deleted
  Phase 2 negotiations in progress: 0
```

To verify that the IPsec security association is active, issue the **show services ipsec-vpn ipsec security-associations detail** command. Notice that the SA contains the default settings inherent in the AS PIC, such as ESP for the protocol and HMAC-SHA1-96 for the authentication algorithm.

```
user@R2> show services ipsec-vpn ipsec security-associations detail
Service set: service-set-dynamic-BiEspsha3des
  Rule: rule-ike, Term: term-ike, Tunnel index: 1
  Local gateway: 10.1.15.1, Remote gateway: 10.1.15.2
  Local identity: ipv4_subnet(any:0,[0..7]=10.1.12.0/24)
  Remote identity: ipv4_subnet(any:0,[0..7]=10.1.56.0/24)
  Direction: inbound, SPI: 407204513, AUX-SPI: 0
  Mode: tunnel, Type: dynamic, State: Installed
  Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
  Soft lifetime: Expires in 24546 seconds
  Hard lifetime: Expires in 24636 seconds
  Anti-replay service: Disabled
  Direction: outbound, SPI: 2957235894, AUX-SPI: 0
```

```

Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 24546 seconds
Hard lifetime: Expires in 24636 seconds
Anti-replay service: Disabled

```

Router 3

View the firewall filter counter to continue verifying that matched traffic is being diverted to the bidirectional IPsec tunnel. After you issue the **ping** command from Router 1 (four packets), the **es-traffic** firewall filter counter looks like this:

```

user@R3> show firewall filter es-traffic
Filter: es-traffic
Counters:

```

Name	Bytes	Packets
ipsec-tunnel	336	4

After you issue the **ping** command from both Router 1 (four packets) and Router 4 (six packets), the **es-traffic** firewall filter counter looks like this:

```

user@R3> show firewall filter es-traffic
Filter: es-traffic
Counters:

```

Name	Bytes	Packets
ipsec-tunnel	840	10

To verify the success of the IKE security association on the ES PIC, issue the **show ike security-associations detail** command. Notice that the IKE SA on Router 3 contains the same settings you specified on Router 2.

```

user@R3> show ike security-associations detail
IKE peer 10.1.15.1
  Role: Initiator, State: Matured
  Initiator cookie: c8e1e4c0da000040, Responder cookie: 4fbaa5184e000044
  Exchange type: Main, Authentication method: Pre-shared-keys
  Local: 10.1.15.2:500, Remote: 10.1.15.1:500
  Lifetime: Expires in 3441 seconds
  Algorithms:
    Authentication      : sha1
    Encryption          : 3des-cbc
    Pseudo random function: hmac-sha1
  Traffic statistics:
    Input bytes  : 756
    Output bytes : 840
    Input packets: 4
    Output packets: 5
  Flags: Caller notification sent
  IPSec security associations: 1 created, 0 deleted
  Phase 2 negotiations in progress: 0

```

To verify that the IPsec security association is active, issue the **show ipsec security-associations detail** command. Notice that the IPsec SA on Router 3 contains the same settings you specified on Router 2.

```
user@R3> show ipsec security-associations detail
Security association: sa-dynamic, Interface family: Up
Local gateway: 10.1.15.2, Remote gateway: 10.1.15.1
Local identity: ipv4_subnet(any:0,[0..7]=10.1.56.0/24)
Remote identity: ipv4_subnet(any:0,[0..7]=10.1.12.0/24)
Direction: inbound, SPI: 2957235894, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 28555 seconds
Hard lifetime: Expires in 28690 seconds
Anti-replay service: Disabled
Direction: outbound, SPI: 407204513, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 28555 seconds
Hard lifetime: Expires in 28690 seconds
Anti-replay service: Disabled
```

Router 4

On Router 4, issue a **ping** command to the **so-0/0/0** interface on Router 1 to send traffic across the IPsec tunnel.

```
user@R4> ping 10.1.12.2
PING 10.1.12.2 (10.1.12.2): 56 data bytes
64 bytes from 10.1.12.2: icmp_seq=0 ttl=254 time=1.350 ms
64 bytes from 10.1.12.2: icmp_seq=1 ttl=254 time=1.161 ms
64 bytes from 10.1.12.2: icmp_seq=2 ttl=254 time=1.124 ms
64 bytes from 10.1.12.2: icmp_seq=3 ttl=254 time=1.142 ms
64 bytes from 10.1.12.2: icmp_seq=4 ttl=254 time=1.139 ms
64 bytes from 10.1.12.2: icmp_seq=5 ttl=254 time=1.116 ms
^C
--- 10.1.12.2 ping statistics ---
6 packets transmitted, 6 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.116/1.172/1.350/0.081 ms
```

Again, the **traceroute** command verifies that traffic to **10.1.12.2** travels over the IPsec tunnel between Router 3 and Router 2. Notice that the second hop does not reference **10.1.15.1**—the physical interface on Router 2. Instead, the second hop is listed as unknown with the ******* notation. This indicates that the IPsec tunnel is operating correctly.

```
user@R4> traceroute 10.1.12.2
traceroute to 10.1.12.2 (10.1.12.2), 30 hops max, 40 byte packets
 1  10.1.56.1 (10.1.56.1)  3.561 ms  0.613 ms  0.558 ms
 2  * * *
 3  10.1.12.2 (10.1.12.2)  1.073 ms  0.862 ms  0.818 ms
```

Option: Configuring Multiple Routed Tunnels in a Single Next-Hop Service Set

You can configure several routed IPsec tunnels within a single next-hop service set. To configure, establish multiple services interfaces as inside interfaces by including the

`service-domain inside` statement at the `[edit interfaces sp-fpc/pic/port unit logical-unit-number]` hierarchy level. Then, include the `ipsec-inside-interface` statement at the `[edit services ipsec-vpn rule rule-name term term-name from]` hierarchy level.



NOTE: The full IPsec and IKE proposals and policies are not shown in the following example for the sake of brevity.

```
[edit]
interfaces {
  sp-3/3/0 {
    unit 3 {
      family inet;
      service-domain inside;
    }
    unit 4 {
      family inet;
      service-domain outside;
    }
    unit 5 {
      family inet;
      service-domain inside;
    }
  }
}
services {
  service-set link_type_ss_1 {
    next-hop-service {
      inside-service-interface sp-3/3/0.3;
      outside-service-interface sp-3/3/0.4;
    }
    ipsec-vpn-options {
      local-gateway 10.8.7.2;
    }
    ipsec-vpn-rules link_rule_1;
  }
  ipsec-vpn {
    rule link_rule_1 {
      term 1 {
        from {
          ipsec-inside-interface sp-3/3/0.3;
        }
        then {
          remote-gateway 10.10.7.3;
          backup-remote-gateway 10.8.7.1;
          dynamic {
            ike-policy main_mode_ike_policy;
            ipsec-policy dynamic_ipsec_policy;
          }
        }
      }
      term 2 {
        from {
          ipsec-inside-interface sp-3/3/0.5;
```

```

    }
    then {
        remote-gateway 10.12.7.5;
        dynamic {
            ike-policy main_mode_ike_policy;
            ipsec-policy dynamic_ipsec_policy;
        }
    }
}
match-direction input;
}
}
}

```

To confirm that your configuration is working, issue the **show services ipsec-vpn ipsec security-associations** command. Notice that each IPsec inside interface that you assigned to each IPsec tunnel is included in the output of this command.

```

user@router> show services ipsec-vpn ipsec security-associations
Service set: link_type_ss_1

```

```

Rule: link_rule_1, Term: 1, Tunnel index: 1
Local gateway: 10.8.7.2, Remote gateway: 10.8.7.1
IPSec inside interface: sp-3/3/0.3

```

Direction	SPI	AUX-SPI	Mode	Type	Protocol
inbound	3216392497	0	tunnel	dynamic	ESP
outbound	398917249	0	tunnel	dynamic	ESP

```

Rule: link_rule_1, Term: 2, Tunnel index: 2
Local gateway: 10.8.7.2, Remote gateway: 10.12.7.5
IPSec inside interface: sp-3/3/0.5

```

Direction	SPI	AUX-SPI	Mode	Type	Protocol
inbound	762146783	0	tunnel	dynamic	ESP
outbound	319191515	0	tunnel	dynamic	ESP

Related Documentation

- [Configuring IKE Dynamic SAs on page 135](#)

CHAPTER 7

Configuring IPsec on an ES PIC

- [IPsec Configuration for an ES PIC Overview on page 193](#)
- [Configuring Minimum Manual Security Associations for IPsec on an ES PIC on page 194](#)
- [Configuring Minimum IKE Requirements for IPsec on an ES PIC on page 194](#)
- [Configuring Minimum Digital Certificate Requirements for IKE on an ES PIC on page 195](#)
- [Configuring Security Associations for IPsec on an ES PIC on page 195](#)
- [Configuring Manual IPsec Security Associations for an ES PIC on page 203](#)
- [Configuring Dynamic IPsec Security Associations on page 207](#)
- [Configuring an IKE Proposal for Dynamic SAs on page 207](#)
- [Example: Configuring an IKE Proposal on page 210](#)
- [Configuring an IKE Policy for Preshared Keys on page 210](#)
- [Example: Configuring an IKE Policy on page 212](#)
- [Configuring an IPsec Proposal for an ES PIC on page 213](#)
- [Configuring the IPsec Policy for an ES PIC on page 215](#)
- [Example: Configuring an IPsec Policy on page 216](#)
- [Configuring IPsec for Enabling Internal Communications Between Routing Engines for Junos OS in FIPS Mode on page 217](#)
- [Example: Configuring Internal IPsec on page 220](#)

IPsec Configuration for an ES PIC Overview

IP Security (IPsec) provides a secure way to authenticate senders and encrypt IPv4 and IPv6 traffic between network devices, such as routers and hosts. The following sections show how to configure IPsec for an ES PIC.

The key management process (**kmd**) provides IPsec authentication services for ES PICs. The key management process starts only when IPsec is configured on the router.

Related Documentation

- [Configuring Minimum Manual Security Associations for IPsec on an ES PIC on page 194](#)
- [Configuring Minimum Digital Certificate Requirements for IKE on an ES PIC on page 195](#)
- [Configuring Security Associations for IPsec on an ES PIC on page 195](#)
- [Configuring an IKE Proposal for Dynamic SAs on page 207](#)

- [Example: Configuring an IKE Proposal on page 210](#)

Configuring Minimum Manual Security Associations for IPsec on an ES PIC

To define a manual security association (SA) configuration for an ES PIC, include at least the following statements at the **[edit security ipsec]** hierarchy level:

```
[edit security ipsec]
security-association sa-name {
  manual {
    direction (inbound | outbound | bidirectional) {
      authentication {
        algorithm (hmac-md5-96 | hmac-sha1-96);
        key (ascii-text key | hexadecimal key);
      }
      encryption {
        algorithm (des-cbc | 3des-cbc);
        key (ascii-text key | hexadecimal key);
      }
      protocol (ah | esp | bundle);
      spi spi-value;
    }
  }
}
```

Related Documentation • [IPsec Configuration for an ES PIC Overview on page 193](#)

Configuring Minimum IKE Requirements for IPsec on an ES PIC

To define an IKE configuration for an ES PIC, include at least the following statements at the **[edit security]** hierarchy level:

```
[edit security ike]
proposal ike-proposal-name {
  authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);
  dh-group (group1 | group2);
  encryption-algorithm (3des-cbd | des-cbc | aes-128-cbc | aes-192-cbc | aes-256-cbc);
}
policy ike-peer-address {
  proposals [ ike-proposal-names ];
  pre-shared-key (ascii-text key | hexadecimal key);
}
```

Related Documentation • [IPsec Configuration for an ES PIC Overview on page 193](#)

Configuring Minimum Digital Certificate Requirements for IKE on an ES PIC

To define a digital certificate configuration for IKE for an encryption interface on M Series and T Series routers, include at least the following statements at the **[edit security certificates]** and **[edit security ike]** hierarchy levels:

```
[edit security]
certificates {
  certification-authority ca-profile-name {
    ca-name ca-identity;
    crl filename;
    enrollment-url url-name;
    file certificate-filename;
    ldap-url url-name;
  }
}
ike {
  policy ike-peer-address {
    local-certificate certificate-filename;
    local-key-pair private-public-key-file;
    proposal [ ike-proposal-names ];
  }
  proposal ike-proposal-name {
    authentication-method rsa-signatures;
  }
}
```

Related Documentation

- [IPsec Configuration for an ES PIC Overview on page 193](#)

Configuring Security Associations for IPsec on an ES PIC

To use IPsec security services, you create an SA between hosts. An SA is a simplex connection that allows two hosts to communicate with each other securely by means of IPsec. You can configure two types of SAs:

- **Manual**—Requires no negotiation; all values, including the keys, are static and specified in the configuration. As a result, each peer must have the same configured options for communication to take place. For information about how to configure a manual SA, see [“Configuring Manual IPsec Security Associations for an ES PIC” on page 198](#).
- **Dynamic**—Specify proposals to be negotiated with the tunnel peer. The keys are generated as part of the negotiation and therefore do not need to be specified in the configuration. The dynamic SA includes one or more **proposal** statements, which allow you to prioritize a list of protocols and algorithms to be negotiated with the peer. For information about how to configure a dynamic SA, see [“Associating the Configured Security Association with a Logical Interface” on page 18](#).



NOTE: The Junos OS does not perform a commit check when an SA name referenced in the Border Gateway Protocol (BGP) protocol section is not configured at the `[edit security ipsec]` hierarchy level.

We recommend that you configure no more than 512 dynamic security associations per ES Physical Interface Card (PIC).

To configure an SA for IPsec for an ES PIC, include the **security-association** statement at the `[edit security ipsec]` hierarchy level:

```
[edit security ipsec]
security-associationsa-name;
```



NOTE: You configure a dynamic SA for the AS and MultiServices PICs at the `[edit services ipsec-vpn rule rule-name term term-name then dynamic]`, `[edit services ipsec-vpn ike]`, and `[edit services ipsec-vpn ipsec]` hierarchy levels.

For more information, see the “IPsec Services Configuration Guidelines” chapter of the *Junos OS Services Interfaces Library for Routing Devices*.

Tasks to configure SAs for IPsec for an ES PIC are:

1. [Configuring the Description for an SA on page 196](#)
2. [Configuring IPsec Transport Mode on page 196](#)
3. [Configuring IPsec Tunnel Mode on page 197](#)
4. [Configuring Manual IPsec Security Associations for an ES PIC on page 198](#)
5. [Configuring Dynamic IPsec Security Associations on page 202](#)
6. [Enabling Dynamic IPsec Security Associations on page 202](#)

Configuring the Description for an SA

To specify a description for an IPsec SA, include the **description** statement at the **edit security ipsec security-association sa-name** hierarchy level:

```
[edit security ipsec security-association sa-name]
descriptiondescription;
```

Configuring IPsec Transport Mode

In transport mode, the data portion of the IP packet is encrypted, but the IP header is not. Transport mode can be used only when the communication endpoint and cryptographic endpoint are the same. Virtual private network (VPN) gateways that provide encryption and decryption services for protected hosts cannot use transport mode for protected VPN communications. You configure manual SAs, and you must configure static values on both ends of the SA.



NOTE: When you use transport mode, the Junos OS supports both BGP and OSPFv3 for manual SAs.

To configure IPsec security for transport mode, include the **mode** statement with the **transport** option at the **edit security ipsec security-association sa-name** hierarchy level:

```
[edit security ipsec security-association sa-name]
mode transport;
```

To apply tunnel mode, you configure manual SAs in transport mode and then reference the SA by name at the **[edit protocols bgp]** hierarchy level to protect a session with a given peer.



NOTE: You can configure BGP to establish a peer relationship over encrypted tunnels.

Configuring IPsec Tunnel Mode

You use tunnel mode when you use preshared keys with IKE to authenticate peers, or digital certificates with IKE to authenticate peers.

When you use preshared keys, you manually configure a preshared key, which must match that of its peer. With digital certificates, each router is dynamically or manually enrolled with a certificate authority (CA). When a tunnel is established, the public keys used for IPsec are dynamically obtained through IKE and validated against the CA certificate. This avoids the manual configuration of keys on routers within the topology. Adding a new router to the topology does not require any security configuration changes to existing routers.

To configure the IPsec in tunnel mode, include the **mode** statement with the **tunnel** option at the **edit security ipsec security-association sa-name** hierarchy level:

```
[edit security ipsec security-association sa-name]
mode tunnel;
```



NOTE: The Junos OS supports both BGP and OSPFv3 in transport mode.

To enable tunnel mode, follow the steps in these sections:

- [Configuring Security Associations for IPsec on an ES PIC on page 195](#)
- [Configuring an IKE Proposal for Dynamic SAs on page 207](#)
- [Associating the Configured Security Association with a Logical Interface on page 18](#)
- [IPsec Tunnel Traffic Configuration Overview on page 221](#)

Configuring Manual IPsec Security Associations for an ES PIC

To use IPsec security services, you create security associations (SAs) between hosts. An SA is a simplex connection that allows two hosts to communicate with each other securely by means of IPsec. There are two types of SAs: manual and dynamic.

Manual SAs require no negotiation; all values, including the keys, are static and specified in the configuration. As a result, peers can communicate only when they all share the same configured options.

To configure the manual IPsec SA for an ES PIC, include the **manual** statement at the **[edit security ipsec security-association sa-name]** hierarchy level:

```
[edit security ipsec security-association sa-name]
manual {
  direction (inbound | outbound | bi-directional) {
    authentication {
      algorithm (hmac-md5-96 | hmac-sha1-96);
      key (ascii-text key | hexadecimal key);
    }
    auxiliary-spi auxiliary-spi-value;
    encryption {
      algorithm (des-cbc | 3des-cbc);
      key (ascii-text key | hexadecimal key);
    }
    protocol (ah | esp | bundle);
    spi spi-value;
  }
}
```

Tasks to configure a manual SA are:

1. [Configuring the Processing Direction on page 198](#)
2. [Configuring the Protocol for a Manual SA on page 199](#)
3. [Configuring the Security Parameter Index on page 200](#)
4. [Configuring the Auxiliary Security Parameter Index on page 200](#)
5. [Configuring the Authentication Algorithm and Key on page 200](#)
6. [Configuring the Encryption Algorithm and Key on page 201](#)

Configuring the Processing Direction

The **direction** statement sets inbound and outbound IPsec processing. If you want to define different algorithms, keys, or security parameter index (SPI) values for each direction, you configure the **inbound** and **outbound** options. If you want the same attributes in both directions, use the **bidirectional** option.

To configure the direction of IPsec processing, include the **direction** statement and specify the direction at the **[edit security ipsec security-association sa-name manual]** hierarchy level:

```
[edit security ipsec security-association sa-name manual]
direction (inbound | outbound | bidirectional);
```


The following example shows how to define different algorithms, keys, and security parameter index values for inbound and outbound processing directions:

```
[edit security ipsec security-association sa-name]
manual {
  direction inbound {
    encryption {
      algorithm 3des-cbc;
      key ascii-text 23456789012345678901234;
    }
    protocol esp;
    spi 16384;
  }
  direction outbound {
    encryption {
      algorithm 3des-cbc;
      key ascii-text 12345678901234567890abcd;
    }
    protocol esp;
    spi 24576;
  }
}
```

The following example shows how to define the same algorithms, keys, and security parameter index values for bidirectional processing:

```
[edit security ipsec security-association sa-name manual]
direction bidirectional {
  authentication {
    algorithm hmac-md5-96;
    key ascii-text 123456789012abcd;
  }
  protocol ah;
  spi 20001;
}
```

Configuring the Protocol for a Manual SA

IPsec uses two protocols to protect IP traffic: Encapsulating Security Payload (ESP) and authentication header (AH). For transport mode SAs, both ESP and AH are supported. The AH protocol is used for strong authentication. The **bundle** option uses AH authentication and ESP encryption; it does not use ESP authentication because AH provides stronger authentication of IP packets.



NOTE: The AH protocol is supported only on M Series routers.

To configure the IPsec protocol on an ES PIC, include the **protocol** statement at the **edit security ipsec security-association *sa-name* manual direction (inbound | outbound | bidirectional)** hierarchy level and specify the **ah**, **bundle**, or **esp** option:

```
[edit security ipsec security-association sa-name manual direction (inbound |
outbound | bi-directional)]
protocol (ah | bundle | esp);
```

Configuring the Security Parameter Index

An SPI is an arbitrary value that uniquely identifies which SA to use at the receiving host. The sending host uses the SPI to identify and select which SA to use to secure every packet. The receiving host uses the SPI to identify and select the encryption algorithm and key used to decrypt packets.



NOTE: Each manual SA must have a unique SPI and protocol combination.

Use the auxiliary SPI when you configure the protocol statement to use the **bundle** option.

To configure the SPI on an ES PIC, include the **spi** statement and specify a value (256 through 16,639) at the **[edit security ipsec security-association sa-name manual direction (inbound | outbound | bi-directional)]** hierarchy level:

```
[edit security ipsec security-association sa-name manual direction (inbound |
outbound | bidirectional)]
spi spi-value;
```

Configuring the Auxiliary Security Parameter Index

When you configure the **protocol statement to use the bundle** option, the Junos OS uses the auxiliary SPI for the ESP and the SPI for the AH.



NOTE: Each manual SA must have a unique SPI and protocol combination.

To configure the auxiliary SPI, include the **auxiliary-spi** statement at the **[edit security ipsec security-association sa-name manual direction (inbound | outbound | bi-directional)]** hierarchy level and set the value to an integer between 256 and 16,639:

```
[edit security ipsec security-association sa-name manual direction (inbound |
outbound | bidirectional)]
auxiliary-spi auxiliary-spi-value;
```

Configuring the Authentication Algorithm and Key

To configure an authentication algorithm and key, include the **authentication** statement at the **[edit security ipsec security-association sa-name manual direction (inbound | outbound | bi-directional)]** hierarchy level:

```
[edit security ipsec security-association sa-name manual direction (inbound | outbound |
bidirectional)]
authentication {
  algorithm (hmac-md5-96 | hmac-sha1-96);
  key (ascii-text key | hexadecimal key);
}
```

The algorithm can be one of the following:

- **hmac-md5-96**—Hash algorithm that authenticates packet data. It produces a 128-bit authenticator value and 96-bit digest.
- **hmac-sha1-96**—Hash algorithm that authenticates packet data. It produces a 160-bit authenticator value and a 96-bit digest.

The key can be one of the following:

- **ascii-text key**—ASCII text key. With the **hmac-md5-96** option, the key contains 16 ASCII characters. With the **hmac-sha1-96** option, the key contains 20 ASCII characters.
- **hexadecimal key**—Hexadecimal key. With the **hmac-md5-96** option, the key contains 32 hexadecimal characters. With the **hmac-sha1-96** option, the key contains 40 hexadecimal characters.

Configuring the Encryption Algorithm and Key

To configure IPsec encryption, include the **encryption** statement and specify an algorithm and key at the **[edit security ipsec security-association *sa-name* manual direction (inbound | outbound | bi-directional)]** hierarchy level:

```
[edit security ipsec security-association sa-name manual direction (inbound | outbound |
  bi-directional)]
encryption {
  algorithm (des-cbc | 3des-cbc);
  key (ascii-text key | hexadecimal key);
}
```

The algorithm can be one of the following:

- **des-cbc**—Encryption algorithm that has a block size of 8 bytes; its key size is 64 bits long.
- **3des-cbc**—Encryption algorithm that has a block size of 24 bytes; its key size is 192 bits long.



NOTE: For a list of Data Encryption Standard (DES) encryption algorithm weak and semiweak keys, see RFC 2409. For **3des-cbc**, we recommend that the first 8 bytes not be the same as the second 8 bytes, and that the second 8 bytes be the same as the third 8 bytes.

The key can be one of the following:

- **ascii-text**—ASCII text key. With the **des-cbc** option, the key contains 8 ASCII characters. With the **3des-cbc** option, the key contains 24 ASCII characters.
- **hexadecimal**—Hexadecimal key. With the **des-cbc** option, the key contains 16 hexadecimal characters. With the **3des-cbc** option, the key contains 48 hexadecimal characters.



NOTE: You cannot configure encryption when you use the AH protocol.

See Also • [Configuring Dynamic IPsec Security Associations on page 202](#)

Configuring Dynamic IPsec Security Associations

You configure dynamic SAs with a set of proposals that are negotiated by the security gateways. The keys are generated as part of the negotiation and do not need to be specified in the configuration. The dynamic SA includes one or more proposals, which allow you to prioritize a list of protocols and algorithms to be negotiated with the peer.

To configure a dynamic SA, include the **dynamic** statement at the **[edit security ipsec security-association sa-name]** hierarchy level. Specify an IPsec policy name, and optionally, a 32-packet or 64-packet replay window size.

```
[edit security ipsec security-association sa-name]
dynamic {
  ipsec-policy policy-name;
  replay-window-size (32 | 64);
}
```

See Also • [Configuring Manual IPsec Security Associations for an ES PIC on page 198](#)

Enabling Dynamic IPsec Security Associations

To enable a dynamic SA, follow these steps:

1. Configure IKE proposals and IKE policies associated with these proposals.
2. Configure IPsec proposals and an IPsec policy associated with these proposals.
3. Associate an SA with an IPsec policy.



NOTE: Dynamic tunnel SAs require an ES PIC. If you want to establish a dynamic SA, the attributes in at least one configured IPsec and IKE proposal must match those of its peer.

The replay window is not used with manual SAs.

See Also • [IPsec Configuration for an ES PIC Overview on page 193](#)
• [Configuring an IKE Proposal for Dynamic SAs on page 207](#)

Configuring Manual IPsec Security Associations for an ES PIC

To use IPsec security services, you create security associations (SAs) between hosts. An SA is a simplex connection that allows two hosts to communicate with each other securely by means of IPsec. There are two types of SAs: manual and dynamic.

Manual SAs require no negotiation; all values, including the keys, are static and specified in the configuration. As a result, peers can communicate only when they all share the same configured options.

To configure the manual IPsec SA for an ES PIC, include the **manual** statement at the **edit security ipsec security-association sa-name** hierarchy level:

```
[edit security ipsec security-association sa-name]
manual {
  direction (inbound | outbound | bi-directional) {
    authentication {
      algorithm (hmac-md5-96 | hmac-sha1-96);
      key (ascii-text key | hexadecimal key);
    }
    auxiliary-spi auxiliary-spi-value;
    encryption {
      algorithm (des-cbc | 3des-cbc);
      key (ascii-text key | hexadecimal key);
    }
    protocol (ah | esp | bundle);
    spi spi-value;
  }
}
```

Tasks to configure a manual SA are:

1. [Configuring the Processing Direction on page 203](#)
2. [Configuring the Protocol for a Manual SA on page 204](#)
3. [Configuring the Security Parameter Index on page 205](#)
4. [Configuring the Auxiliary Security Parameter Index on page 205](#)
5. [Configuring the Authentication Algorithm and Key on page 205](#)
6. [Configuring the Encryption Algorithm and Key on page 206](#)

Configuring the Processing Direction

The **direction** statement sets inbound and outbound IPsec processing. If you want to define different algorithms, keys, or security parameter index (SPI) values for each direction, you configure the **inbound** and **outbound** options. If you want the same attributes in both directions, use the **bidirectional** option.

To configure the direction of IPsec processing, include the **direction** statement and specify the direction at the **[edit security ipsec security-association sa-name manual]** hierarchy level:

```
[edit security ipsec security-association sa-name manual]
```

```
direction (inbound | outbound | bidirectional);
```

The following example shows how to define different algorithms, keys, and security parameter index values for inbound and outbound processing directions:

```
[edit security ipsec security-association sa-name]
manual {
  direction inbound {
    encryption {
      algorithm 3des-cbc;
      key ascii-text 23456789012345678901234;
    }
    protocol esp;
    spi 16384;
  }
  direction outbound {
    encryption {
      algorithm 3des-cbc;
      key ascii-text 12345678901234567890abcd;
    }
    protocol esp;
    spi 24576;
  }
}
```

The following example shows how to define the same algorithms, keys, and security parameter index values for bidirectional processing:

```
[edit security ipsec security-association sa-name manual]
direction bidirectional {
  authentication {
    algorithm hmac-md5-96;
    key ascii-text 123456789012abcd;
  }
  protocol ah;
  spi 20001;
}
```

Configuring the Protocol for a Manual SA

IPsec uses two protocols to protect IP traffic: Encapsulating Security Payload (ESP) and authentication header (AH). For transport mode SAs, both ESP and AH are supported. The AH protocol is used for strong authentication. The **bundle** option uses AH authentication and ESP encryption; it does not use ESP authentication because AH provides stronger authentication of IP packets.



NOTE: The AH protocol is supported only on M Series routers.

To configure the IPsec protocol on an ES PIC, include the **protocol** statement at the **edit security ipsec security-association sa-name manual direction (inbound | outbound | bidirectional)]** hierarchy level and specify the **ah**, **bundle**, or **esp** option:

```
[edit security ipsec security-association sa-name manual direction (inbound |
outbound | bi-directional)]
```

```
protocol (ah | bundle | esp);
```

Configuring the Security Parameter Index

An SPI is an arbitrary value that uniquely identifies which SA to use at the receiving host. The sending host uses the SPI to identify and select which SA to use to secure every packet. The receiving host uses the SPI to identify and select the encryption algorithm and key used to decrypt packets.



NOTE: Each manual SA must have a unique SPI and protocol combination.

Use the auxiliary SPI when you configure the protocol statement to use the **bundle** option.

To configure the SPI on an ES PIC, include the **spi** statement and specify a value (256 through 16,639) at the **[edit security ipsec security-association sa-name manual direction (inbound | outbound | bi-directional)]** hierarchy level:

```
[edit security ipsec security-association sa-name manual direction (inbound |
outbound | bidirectional)]
spi spi-value;
```

Configuring the Auxiliary Security Parameter Index

When you configure the **protocol statement to use the bundle** option, the Junos OS uses the auxiliary SPI for the ESP and the SPI for the AH.



NOTE: Each manual SA must have a unique SPI and protocol combination.

To configure the auxiliary SPI, include the **auxiliary-spi** statement at the **[edit security ipsec security-association sa-name manual direction (inbound | outbound | bi-directional)]** hierarchy level and set the value to an integer between 256 and 16,639:

```
[edit security ipsec security-association sa-name manual direction (inbound |
outbound | bidirectional)]
auxiliary-spi auxiliary-spi-value;
```

Configuring the Authentication Algorithm and Key

To configure an authentication algorithm and key, include the **authentication** statement at the **[edit security ipsec security-association sa-name manual direction (inbound | outbound | bi-directional)]** hierarchy level:

```
[edit security ipsec security-association sa-name manual direction (inbound | outbound |
bidirectional)]
authentication {
  algorithm (hmac-md5-96 | hmac-sha1-96);
  key (ascii-text key | hexadecimal key);
}
```

The algorithm can be one of the following:

- **hmac-md5-96**—Hash algorithm that authenticates packet data. It produces a 128-bit authenticator value and 96-bit digest.
- **hmac-sha1-96**—Hash algorithm that authenticates packet data. It produces a 160-bit authenticator value and a 96-bit digest.

The key can be one of the following:

- **ascii-text key**—ASCII text key. With the **hmac-md5-96** option, the key contains 16 ASCII characters. With the **hmac-sha1-96** option, the key contains 20 ASCII characters.
- **hexadecimal key**—Hexadecimal key. With the **hmac-md5-96** option, the key contains 32 hexadecimal characters. With the **hmac-sha1-96** option, the key contains 40 hexadecimal characters.

Configuring the Encryption Algorithm and Key

To configure IPsec encryption, include the **encryption** statement and specify an algorithm and key at the **[edit security ipsec security-association *sa-name* manual direction (inbound | outbound | bi-directional)]** hierarchy level:

```
[edit security ipsec security-association sa-name manual direction (inbound | outbound |
  bi-directional)]
encryption {
  algorithm (des-cbc | 3des-cbc);
  key (ascii-text key | hexadecimal key);
}
```

The algorithm can be one of the following:

- **des-cbc**—Encryption algorithm that has a block size of 8 bytes; its key size is 64 bits long.
- **3des-cbc**—Encryption algorithm that has a block size of 24 bytes; its key size is 192 bits long.



NOTE: For a list of Data Encryption Standard (DES) encryption algorithm weak and semiweak keys, see RFC 2409. For **3des-cbc**, we recommend that the first 8 bytes not be the same as the second 8 bytes, and that the second 8 bytes be the same as the third 8 bytes.

The key can be one of the following:

- **ascii-text**—ASCII text key. With the **des-cbc** option, the key contains 8 ASCII characters. With the **3des-cbc** option, the key contains 24 ASCII characters.
- **hexadecimal**—Hexadecimal key. With the **des-cbc** option, the key contains 16 hexadecimal characters. With the **3des-cbc** option, the key contains 48 hexadecimal characters.



NOTE: You cannot configure encryption when you use the AH protocol.

See Also • [Configuring Dynamic IPsec Security Associations on page 202](#)

Configuring Dynamic IPsec Security Associations

You configure dynamic SAs with a set of proposals that are negotiated by the security gateways. The keys are generated as part of the negotiation and do not need to be specified in the configuration. The dynamic SA includes one or more proposals, which allow you to prioritize a list of protocols and algorithms to be negotiated with the peer.

To configure a dynamic SA, include the **dynamic** statement at the **[edit security ipsec security-association sa-name]** hierarchy level. Specify an IPsec policy name, and optionally, a 32-packet or 64-packet replay window size.

```
[edit security ipsec security-association sa-name]
dynamic {
  ipsec-policy policy-name;
  replay-window-size (32 | 64);
}
```

Related Documentation • [Configuring Manual IPsec Security Associations for an ES PIC on page 198](#)

Configuring an IKE Proposal for Dynamic SAs

Dynamic Security Associations (SAs) require IKE configuration. The IKE configuration defines the algorithms and keys used to establish the secure IKE connection with the peer security gateway.

You can configure one or more IKE proposals. Each proposal is a list of IKE attributes to protect the IKE connection between the IKE host and its peer.

To configure an IKE proposal and define its properties, include the following statements at the **[edit security ike]** hierarchy level:

```
[edit security ike]
proposal ike-proposal-name {
  authentication-algorithm (md5 | sha1);
  authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);
  description description;
  dh-group (group1 | group2);
  encryption-algorithm (3des-cbc | des-cbc | ase-128-cbc | ase-192-cbc | ase-256-cbc);
  lifetime-seconds seconds;
}
```

For information about associating an IKE proposal with an IKE policy, see [“Configuring an IKE Policy for Preshared Keys” on page 210](#).

Tasks for configuring the IKE proposal are:

1. [Configuring the Authentication Algorithm for an IKE Proposal on page 208](#)
2. [Configuring the Authentication Method for an IKE Proposal on page 208](#)
3. [Configuring the Description for an IKE Proposal on page 208](#)
4. [Configuring the Diffie-Hellman Group for an IKE Proposal on page 209](#)
5. [Configuring the Encryption Algorithm for an IKE Proposal on page 209](#)
6. [Configuring the Lifetime for an IKE SA on page 209](#)

Configuring the Authentication Algorithm for an IKE Proposal

To configure an IKE authentication algorithm, include the **authentication-algorithm** statement at the **[edit security ike proposal *ike-proposal-name*]** hierarchy level:

```
[edit security ike proposal ike-proposal-name]  
authentication-algorithm (md5 | sha1);
```

The authentication algorithm can be one of the following:

- **md5**—Produces a 128-bit digest.
- **sha1**—Produces a 160-bit digest.

Configuring the Authentication Method for an IKE Proposal

To configure an IKE authentication method, include the **authentication-method** statement at the **[edit security ike proposal *ike-proposal-name*]** hierarchy level:

```
[edit security ike proposal ike-proposal-name]  
authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);
```

The authentication method can be one of the following:

- **dsa-signatures**—Digital Signature Algorithm (DSA)
- **pre-shared-keys**—Preshared keys; a key derived from an out-of-band mechanism is used to authenticate an exchange
- **rsa-signatures**—Public key algorithm that supports encryption and digital signatures

Configuring the Description for an IKE Proposal

To specify a description for an IKE proposal, include the **description** statement at the **[edit security ike proposal *ike-proposal-name*]** hierarchy level:

```
[edit security ike proposal ike-proposal-name]  
description description;
```

Configuring the Diffie-Hellman Group for an IKE Proposal

The Diffie-Hellman key exchange is a public-key cryptography scheme that allows two parties to establish a shared secret over an insecure communications channel. It is also used within IKE to establish session keys.

To configure an IKE Diffie-Hellman group, include the **dh-group** statement at the **[edit security ike proposal *ike-proposal-name*]** hierarchy level:

```
[edit security ike proposal ike-proposal-name ]
  dh-group (group1 | group2);
```

The group can be one of the following:

- **group1**—Specify that IKE use the 768-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group2**—Specify that IKE use the 1024-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.

group2 provides more security but requires more processing time.

Configuring the Encryption Algorithm for an IKE Proposal

To configure an IKE encryption algorithm, include the **encryption-algorithm** statement at the **[edit security ike proposal *ike-proposal-name*]** hierarchy level:

```
[edit security ike proposal ike-proposal-name ]
  encryption-algorithm (3des-cbc | des-cbc);
```

The encryption algorithm can be one of the following:

- **3des-cbc**—Encryption algorithm that has a key size of 24 bytes; its key size is 192 bits long.
- **des-cbc**—Encryption algorithm that has a key size of 8 bytes; its key size is 56 bits long.
- **aes-128-cbc**—Advanced encryption algorithm that has a key size of 16 bytes; its key size is 128 bits long.
- **aes-192-cbc**—Advanced encryption algorithm that has a key size of 24 bytes; its key size is 192 bits long.
- **aes-256-cbc**—Advanced encryption algorithm that has a key size of 32 bytes; its key size is 256 bits long.

Configuring the Lifetime for an IKE SA

The IKE lifetime sets the lifetime of an IKE SA. When the IKE SA expires, it is replaced by a new SA (and SPI) or is terminated. The default value IKE lifetime is 3600 seconds.

To configure the IKE lifetime, include the **lifetime-seconds** statement and specify the number of seconds (180 through 86,400) at the **[edit security ike proposal *ike-proposal-name*]** hierarchy level:

```
[edit security ike proposal ike-proposal-name ]
lifetime-seconds seconds;
```

- See Also**
- [Example: Configuring an IKE Proposal on page 210](#)
 - [IPsec Configuration for an ES PIC Overview on page 193](#)

Example: Configuring an IKE Proposal

The following example shows how to configure an IKE proposal:

```
[edit security ike]
proposal ike-proposal {
  authentication-method pre-shared-keys;
  dh-group group1;
  authentication-algorithm sha1;
  encryption-algorithm 3des-cbc;
}
```

- Related Documentation**
- [Configuring an IKE Proposal for Dynamic SAs on page 207](#)

Configuring an IKE Policy for Preshared Keys

An IKE policy defines a combination of security parameters (IKE proposals) to be used during IKE negotiation. It defines a peer address, the preshared key for the given peer, and the proposals needed for that connection. During the IKE negotiation, IKE looks for an IKE policy that is the same on both peers. The peer that initiates the negotiation sends all its policies to the remote peer, and the remote peer tries to find a match.

A match is made when both policies from the two peers have a proposal that contains the same configured attributes. If the lifetimes are not identical, the shorter lifetime between the two policies (from the host and peer) is used. The configured preshared key must also match its peer.

You can create multiple, prioritized proposals at each peer to ensure that at least one proposal will match a remote peer's proposal.

First, you configure one or more IKE proposals; then you associate these proposals with an IKE policy. You can also prioritize a list of proposals used by IKE in the **policy** statement by listing the proposals you want to use, from first to last.

To configure an IKE policy, include the **policy** statement at the **[edit security ike]** hierarchy level and specify a peer address:

```
[edit security ike]
policy ike-peer-address;
```



NOTE: The IKE policy peer address must be an IPsec tunnel destination address.

Tasks for configuring an IKE policy are:

1. [Configuring the Description for an IKE Policy on page 211](#)
2. [Configuring the Mode for an IKE Policy on page 211](#)
3. [Configuring the Preshared Key for an IKE Policy on page 211](#)
4. [Associating Proposals with an IKE Policy on page 112](#)

Configuring the Description for an IKE Policy

To specify a description for an IKE policy, include the **description** statement at the **[edit security ike policy ike-peer-address]** hierarchy level:

```
[edit security ike policy ike-peer-address]
  description description;
```

Configuring the Mode for an IKE Policy

IKE policy has two modes: aggressive and main. By default, main mode is enabled. Main mode uses six messages, in three exchanges, to establish the IKE SA. (These three steps are IKE SA negotiation, a Diffie-Hellman key exchange, and authentication of the peer.) Main mode also allows a peer to hide its identity.

Aggressive mode also establishes an authenticated IKE SA and keys. However, aggressive mode uses half the number of messages, has less negotiation power, and does not provide identity protection. The peer can use the aggressive or main mode to start IKE negotiation; the remote peer accepts the mode sent by the peer.

To configure IKE policy mode, include the **mode** statement and specify **aggressive** or **main** at the **[edit security ike policy ike-peer-address]** hierarchy level:

```
[edit security ike policy ike-peer-address ]
  mode (aggressive | main);
```

For Junos OS in FIPS mode, the aggressive option for IKEv1 is not supported with the mode statement at the **[edit services ipsec-vpn ike policy policy-name]** hierarchy level.

Configuring the Preshared Key for an IKE Policy

IKE policy preshared keys authenticate peers. You must manually configure a preshared key, which must match that of its peer. The preshared key can be an ASCII text (alphanumeric) key or a hexadecimal key.

A local certificate is an alternative to the preshared key. A commit operation fails if either a preshared key or a local certificate is not configured.

To configure an IKE policy preshared key, include the **pre-shared-key** statement at the **[edit security ike policy ike-peer-address]** hierarchy level:

```
[edit security ike policy ike-peer-address]  
pre-shared-key (ascii-text key | hexadecimal key);
```

Associating Proposals with an IKE Policy

The IKE policy proposal is a list of one or more proposals associated with an IKE policy.

To configure an IKE policy proposal, include the **proposals** statement at the **[edit security ike policy *ike-peer-address*]** hierarchy level and specify one or more proposal names:

```
[edit security ike policy ike-peer-address]  
proposals [ proposal-names ];
```

Related Documentation

- [Example: Configuring an IKE Policy on page 212](#)

Example: Configuring an IKE Policy

Define two IKE policies: policy 10.1.1.2 and policy 10.1.1.1. Each policy is associated with **proposal-1** and **proposal-2**.

```
[edit security]  
ike {  
  proposal proposal-1 {  
    authentication-method pre-shared-keys;  
    dh-group group1;  
    authentication-algorithm sha1;  
    encryption-algorithm 3des-cbc;  
    lifetime-seconds 1000;  
  }  
  proposal proposal-2 {  
    authentication-method pre-shared-keys;  
    dh-group group2;  
    authentication-algorithm md5;  
    encryption-algorithm des-cbc;  
    lifetime-seconds 10000;  
  }  
  proposal proposal-3 {  
    authentication-method rsa-signatures;  
    dh-group group2;  
    authentication-algorithm md5;  
    encryption-algorithm des-cbc;  
    lifetime-seconds 10000;  
  }  
  policy 10.1.1.2 {  
    mode main;  
    proposals [ proposal-1 proposal-2 ];  
    pre-shared-key ascii-text example-pre-shared-key;  
  }  
  policy 10.1.1.1 {  
    local-certificate certificate-filename;  
    local-key-pair private-public-key-file;  
    mode aggressive;  
    proposals [ proposal-2 proposal-3 ]  
    pre-shared-key hexadecimal 0102030abbcdd;
```

```
}
}
```



NOTE: Updates to the current IKE proposal and policy configuration are not applied to the current IKE SA; updates are applied to new IKE SAs.

If you want the new updates to take immediate effect, you must clear the existing IKE security associations so that they will be reestablished with the changed configuration. For information about how to clear the current IKE security association, see the [CLI Explorer](#).

Related Documentation

- [Configuring an IKE Policy for Preshared Keys on page 210](#)

Configuring an IPsec Proposal for an ES PIC

An IPsec proposal lists protocols and algorithms (security services) to be negotiated with the remote IPsec peer.

To configure an IPsec proposal and define its properties, include the following statements at the **[edit security ipsec]** hierarchy level:

```
[edit security ipsec]
proposal ipsec-proposal-name {
  authentication-algorithm (hmac-md5-96 | hmac-sha1-96);
  description description ;
  encryption-algorithm (3des-cbc | des-cbc);
  lifetime-seconds seconds;
  protocol (ah | esp | bundle);
}
```

Tasks to configure an IPsec proposal for an ES PIC include:

- [Configuring the Authentication Algorithm for an IPsec Proposal on page 213](#)
- [Configuring the Description for an IPsec Proposal on page 214](#)
- [Configuring the Encryption Algorithm for an IPsec Proposal on page 214](#)
- [Configuring the Lifetime for an IPsec SA on page 214](#)
- [Configuring the Protocol for a Dynamic IPsec SA on page 215](#)

Configuring the Authentication Algorithm for an IPsec Proposal

To configure an IPsec authentication algorithm, include the **authentication-algorithm** statement at the **[edit security ipsec proposal ipsec-proposal-name]** hierarchy level:

```
[edit security ipsec proposal ipsec-proposal-name]
authentication-algorithm (hmac-md5-96 | hmac-sha1-96);
```

The authentication algorithm can be one of the following:

- **hmac-md5-96**—Hash algorithm that authenticates packet data. It produces a 128-bit digest. Only 96 bits are used for authentication.

- **hmac-sha1-96**—Hash algorithm that authenticates packet data. It produces a 160-bit digest. Only 96 bits are used for authentication.

Configuring the Description for an IPsec Proposal

To specify a description for an IPsec proposal, include the **description** statement at the **[edit security ipsec proposal *ipsec-proposal-name*]** hierarchy level:

```
[edit security ike policy ipsec-proposal-name]  
description description;
```

Configuring the Encryption Algorithm for an IPsec Proposal

To configure the IPsec encryption algorithm, include the **encryption-algorithm** statement at the **[edit security ipsec proposal *ipsec-proposal-name*]** hierarchy level:

```
[edit security ipsec proposal ipsec-proposal-name ]  
encryption-algorithm (3des-cbc | des-cbc);
```

The encryption algorithm can be one of the following:

- **3des-cbc**—Encryption algorithm that has a block size of 24 bytes; its key size is 192 bits long.
- **des-cbc**—Encryption algorithm that has a block size of 8 bytes; its key size is
- 48 bits long.



NOTE: We recommend that you use the triple DES cipher block chaining (3DES-CBC) encryption algorithm.

Configuring the Lifetime for an IPsec SA

The IPsec lifetime option sets the lifetime of an IPsec SA. When the IPsec SA expires, it is replaced by a new SA (and SPI) or is terminated. A new SA has new authentication and encryption keys, and SPI; however, the algorithms may remain the same if the proposal is not changed. If you do not configure a lifetime and a lifetime is not sent by a responder, the lifetime is 28,800 seconds.

To configure the IPsec lifetime, include the **lifetime-seconds** statement and specify the number of seconds (180 through 86,400) at the **[edit security ipsec proposal *ipsec-proposal-name*]** hierarchy level:

```
[edit security ipsec proposal ipsec-proposal-name]  
lifetime-seconds seconds;
```




NOTE: When a dynamic SA is created, two types of lifetimes are used: hard and soft. The hard lifetime specifies the lifetime of the SA. The soft lifetime, which is derived from the hard lifetime, informs the IPsec key management system that the SA is about to expire. This allows the key management system to negotiate a new SA before the hard lifetime expires. When you specify the lifetime, you specify a hard lifetime.

Configuring the Protocol for a Dynamic IPsec SA

The **protocol** statement sets the protocol for a dynamic SA. The ESP protocol can support authentication, encryption, or both. The AH protocol is used for strong authentication. AH also authenticates the IP packet. The **bundle** option uses AH authentication and ESP encryption; it does not use ESP authentication because AH provides stronger authentication of IP packets.

To configure the protocol for a dynamic SA, include the **protocol** statement at the **[edit security ipsec proposal *ipsec-proposal-name*]** hierarchy level:

```
[edit security ipsec proposal ipsec-proposal-name ] protocol (ah | esp | bundle);
```

See Also • [IPsec Configuration for an ES PIC Overview on page 193](#)

Configuring the IPsec Policy for an ES PIC

An IPsec policy defines a combination of security parameters (IPsec proposals) used during IPsec negotiation. It defines Perfect Forward Secrecy (PFS) and the proposals needed for the connection. During the IPsec negotiation, IPsec looks for an IPsec proposal that is the same on both peers. The peer that initiates the negotiation sends all its policies to the remote peer, and the remote peer tries to find a match.

A match is made when both policies from the two peers have a proposal that contains the same configured attributes. If the lifetimes are not identical, the shorter lifetime between the two policies (from the host and peer) is used.

You can create multiple, prioritized IPsec proposals at each peer to ensure that at least one proposal will match a remote peer's proposal.

First, you configure one or more IPsec proposals; then you associate these proposals with an IPsec policy. You can prioritize the proposals in the list by listing them in the order in which the IPsec policy uses them (first to last).

To configure an IPsec policy, include the **policy** statement at the **[edit security ipsec]** hierarchy level, specifying the policy name and one or more proposals you want to associate with this policy:

```
[edit security ipsec]
policy ipsec-policy-name {
  proposals [ proposal-names ];
```

```
}
```

Configuring Perfect Forward Secrecy

PFS provides additional security by means of a Diffie-Hellman key exchange shared secret value. With PFS, if one key is compromised, previous and subsequent keys are secure because they are not derived from previous keys. This statement is optional.

To configure PFS, include the **perfect-forward-secrecy** statement and specify a Diffie-Hellman group at the **[edit security ipsec policy *ipsec-policy-name*]** hierarchy level:

```
[edit security ipsec policy ipsec-policy-name]  
perfect-forward-secrecy {  
    keys (group1 | group2);  
}
```

The key can be one of the following:

- **group1**—Specify that IKE use the 768-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.
- **group2**—Specify that IKE use the 1024-bit Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange.

group2 provides more security than **group1**, but requires more processing time.

Related Documentation

- [Example: Configuring an IPsec Policy on page 216](#)
- [IPsec Configuration for an ES PIC Overview on page 193](#)

Example: Configuring an IPsec Policy

The following example shows how to configure an IPsec policy:

```
[edit security ipsec]  
proposal dynamic-1 {  
    protocol esp;  
    authentication-algorithm hmac-md5-96;  
    encryption-algorithm 3des-cbc;  
    lifetime-seconds 6000;  
}  
proposal dynamic-2 {  
    protocol esp;  
    authentication-algorithm hmac-sha1-96;  
    encryption-algorithm 3des-cbc;  
    lifetime-seconds 6000;  
}  
policy dynamic-policy-1 {  
    perfect-forward-secrecy {  
        keys group1;  
    }  
    proposals [ dynamic-1 dynamic-2 ];  
}  
security-association dynamic-sa1 {  
    dynamic {
```

```

    replay-window-size 64;
    ipsec-policy dynamic-policy-1;
  }
}

```



NOTE: Updates to the current IPsec proposal and policy configuration are not applied to the current IPsec SA; updates are applied to new IPsec SAs.

If you want the new updates to take immediate effect, you must clear the existing IPsec security associations so that they will be reestablished with the changed configuration. For information about how to clear the current IPsec security association, see the [CLI Explorer](#).

Related Documentation

- [Configuring the IPsec Policy for an ES PIC on page 215](#)
- [IPsec Configuration for an ES PIC Overview on page 193](#)

Configuring IPsec for Enabling Internal Communications Between Routing Engines for Junos OS in FIPS Mode

In a Junos OS in FIPS mode environment, routers with two Routing Engines must use IPsec for internal communication between the Routing Engines. You configure internal IPsec after you install the Junos OS in FIPS mode. You must be a Crypto Officer to configure internal IPsec.



NOTE: You cannot configure DES-based IPsec SAs in Junos OS in FIPS mode. The internal IPsec SAs use HMAC-SHA1-96 authentication and 3DES-CBC encryption.

Manual SAs require no negotiation. All values, including the keys, are static and specified in the configuration. Manual SAs statically define the SPI values, algorithms, and keys to be used, and require matching configurations on both ends of the tunnel. Each peer must have the same configured options for communication to take place.



NOTE: When the switch is in FIPS mode, you cannot use the **commit synchronize** command until you have established an IPsec SA on each Routing Engine.

As Crypto Officer, you configure an internal IPsec SA for communication between Routing Engines by creating an SA on each Routing Engine with the following statements at the **[edit security]** hierarchy level:

To configure internal IPsec, include the **security-association** statement at the **[edit security]** hierarchy level. You can configure parameters, such as the direction in which the manual IPsec SAs must be applied, the SPI value that uniquely identifies the SA to use at the

receiving Routing Engine, and the IPsec key that defines the authentication and encryption keys for the manual IPsec SA.

```
[edit security]
ipsec {
  internal {
    security-association {
      manual {
        direction (bidirectional | inbound | outbound) {
          protocol esp;
          spi spi-value;
          encryption {
            algorithm (hmac-sha1-96 | hmac-sha2-256);
            key (ascii-text ascii-text-string | hexadecimal hexadecimal-number);
          }
        }
      }
    }
  }
}
```

Tasks for configuring internal IPsec for Junos-FIPS are the following. You can configure the direction in which the manual IPsec SAs must be applied, the SPI value that uniquely identifies the SA to use at the receiving Routing Engine, and the IPsec key that defines the authentication and encryption keys for the manual IPsec SA.

1. [Configuring the SA Direction on page 218](#)
2. [Configuring the IPsec SPI on page 219](#)
3. [Configuring the IPsec Key on page 219](#)

Configuring the SA Direction

To configure the IPsec SA direction in which manual SAs of the IPsec tunnels must be applied, include the **direction** statement at the **[edit security ipsec internal security-association manual]** hierarchy level:

```
direction (bidirectional | inbound | outbound);
```

The value can be one of the following:

- **bidirectional**—Apply the same SA values in both directions between Routing Engines.
- **inbound**—Apply these SA properties only to the inbound IPsec tunnel.
- **outbound**—Apply these SA properties only to the outbound IPsec tunnel.

If you do not configure the SA to be bidirectional, you must configure SA parameters for IPsec tunnels in both the inbound and outbound directions. The following example uses an inbound and outbound IPsec tunnel:



NOTE: We recommend that you do not use the IPsec keys as ASCII keys for Junos OS in FIPS mode. Instead, you must use the IPsec keys as hexadecimal keys for maximum key strength.

```
[edit security]
ipsec {
  internal {
    security-association {
      manual {
        direction inbound {
          protocol esp;
          spi 512;
          encryption {
            algorithm 3des-cbc;
            key hexadecimal 309fc4be20f04e53e011b00744642d3fe66c2c7c;
          }
        }
        direction outbound {
          protocol esp;
          spi 513;
          encryption {
            algorithm 3des-cbc;
            key hexadecimal b0344c61d8db38535ca8afceaf0bf12b881dc200c9833da7;
          }
        }
      }
    }
  }
}
```

Configuring the IPsec SPI

A security parameter index (SPI) is a 32-bit index that identifies a security context between a pair of Routing Engines. To configure the IPsec SPI value, include the **spi** statement at the **[edit security ipsec internal security-association manual direction]** hierarchy level:

spi *value*;

The value must be from 256 through 16,639.

Configuring the IPsec Key



NOTE: We recommend that you do not use the IPsec keys as ASCII keys for Junos OS in FIPS mode. Instead, you must use the IPsec keys as hexadecimal keys for maximum key strength.

The distribution and management of keys are critical to using VPNs successfully. You must configure the ASCII text key values for authentication and encryption. To configure the ASCII text key, include the **key** statement at the **[edit security ipsec internal security-association manual direction encryption]** hierarchy level:

key (*ascii-text ascii-text-string* | *hexadecimal hexadecimal-string*);

For this type of SA, both keys must be preshared hexadecimal values, and each requires a specific cryptographic algorithm:

- Authentication algorithm

- HMAC-SHA1-96 (40 characters)
- HMAC-SHA2-256 (64 characters)
- Encryption algorithm
 - 3DES-CBC (48 characters)

You must enter the key hexadecimal value twice and the strings entered must match, or the key will not be set. The hexadecimal key is never displayed in plain text. We recommend that you use the IPsec keys as hexadecimal keys for maximum key strength and not as ASCII keys for Junos OS in FIPS mode.

Related Documentation • [Example: Configuring Internal IPsec on page 220](#)

Example: Configuring Internal IPsec

Configure a bidirectional IPsec SA with an SPI value of 512 and a key value conforming to the FIPS 140-2 rules:

```
[edit security]
ipsec {
  internal {
    security-association {
      manual {
        direction bidirectional {
          protocol esp;
          spi 512;
          encryption {
            algorithm 3des-cbc;
            key ascii-text "$ABC123";
          }
        }
      }
    }
  }
}
```

Related Documentation • [Configuring IPsec for Enabling Internal Communications Between Routing Engines for Junos OS in FIPS Mode on page 217](#)

CHAPTER 8

Configuring Traffic Filters to Direct Traffic Through the Desired IPsec Tunnel

- [IPsec Tunnel Traffic Configuration Overview on page 221](#)
- [Using a Filter to Select Traffic to Be Secured on page 223](#)
- [Applying the Filter or Service Set to the Interface Receiving Traffic to Be Secured on page 225](#)
- [Using Filter-Based Forwarding to Select Traffic to Be Secured on page 225](#)
- [Example: Configuring an Outbound Traffic Filter on page 226](#)
- [Example: Applying an Outbound Traffic Filter on page 227](#)
- [Example: Configuring an Inbound Traffic Filter for a Policy Check on page 228](#)
- [Example: Applying an Inbound Traffic Filter to an ES PIC for a Policy Check on page 230](#)

IPsec Tunnel Traffic Configuration Overview


Traffic configuration defines the traffic that must flow through the IPsec tunnel. You configure outbound and inbound firewall filters, which identify and direct traffic to be encrypted and confirm that decrypted traffic parameters match those defined for the given tunnel. The outbound filter is applied to the LAN or WAN interface for the incoming traffic you want to encrypt off of that LAN or WAN. The inbound filter is applied to the ES PIC to check the policy for traffic coming in from the remote host. Because of the complexity of configuring a router to forward packets, no automatic checking is done to ensure that the configuration is correct. Make sure that you configure the router very carefully.



NOTE: The valid firewall filters statements for IPsec are **destination-port**, **source-port**, **protocol**, **destination-address**, and **source-address**.

In [Figure 11 on page 222](#), Gateway A protects the network 10.1.1.0/24, and Gateway B protects the network 10.2.2.0/24. The gateways are connected by an IPsec tunnel.

Figure 11: Example: IPsec Tunnel Connecting Security Gateways

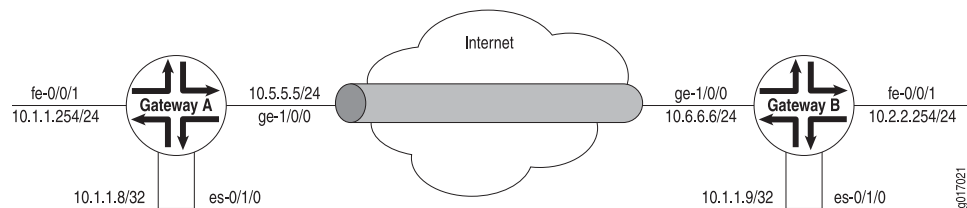

The SA and ES interfaces for Gateway A are configured as follows:

```
[edit security ipsec]
security-association manual-sa1 {
  manual {
    direction bidirectional {
      protocol esp;
      spi 2312;
      authentication {
        algorithm hmac-md5-96;
        key ascii-text 1234123412341234;
      }
      encryption {
        algorithm 3des-cbc;
        key ascii-text 123456789009876543211234;
      }
    }
  }
}
[edit interfaces es-0/1/0]
unit 0 {
  tunnel {
    source 10.5.5.5;
    destination 10.6.6.6;
  }
  family inet {
    ipsec-sa manual-sa1;
    address 10.1.1.8/32 {
      destination 10.1.1.9;
    }
  }
}
```

The SA and ES interfaces for Gateway B are configured as follows:

```
[edit security ipsec]
security-association manual-sa1 {
  manual {
    direction bidirectional {
      protocol esp;
      spi 2312;
      authentication {
        algorithm hmac-md5-96;
        key ascii-text 1234123412341234;
      }
      encryption {
        algorithm 3des-cbc;
      }
    }
  }
}
```



```

        key ascii-text 123456789009876543211234;
    }
}
}
[edit interfaces es-0/1/0]
unit 0 {
    tunnel {
        source 10.6.6.6;
        destination 10.5.5.5;
    }
    family inet {
        ipsec-sa manual-sa1;
        address 10.1.1.9/32; {
            destination 10.1.1.8;
        }
    }
}
}

```

Related Documentation

- [Example: Configuring an Outbound Traffic Filter on page 226](#)
- [Example: Applying an Outbound Traffic Filter on page 227](#)
- [Example: Configuring an Inbound Traffic Filter for a Policy Check on page 228](#)
- [ES Tunnel Interface Configuration for a Layer 3 VPN on page 255](#)

Using a Filter to Select Traffic to Be Secured

For the ES PIC, you need to configure a firewall filter to direct traffic into the IPsec tunnel. To apply a security association to traffic that matches a firewall filter, include the **ipsec-sa sa-name** statement at the **[edit firewall filter *filter-name* term *term-name* then]** hierarchy level.

```

[edit firewall filter filter-name]
term term-name {
    from {
        source-address {
            ip-address;
        }
        destination-address {
            ip-address;
        }
    }
    then {
        count counter-name;
        ipsec-sa sa-name;
    }
}
term other {
    then accept;
}

```

For the AS and MultiServices PICs, you do not need to configure a separate firewall filter. A filter is already built into the IPsec VPN **rule** statement at the **[edit services ipsec-vpn]**

hierarchy level. To apply a security association to traffic that matches the IPsec VPN rule, include the **dynamic** or **manual** statement at the **[edit services rule *rule-name* term *term-name* then]** hierarchy level. To specify whether the rule should match input or output traffic, include the **match-direction** statement at the **[edit services rule *rule-name*]** hierarchy level.

After defining the rules for your IPsec VPNs, you must apply the rules to a service set. To do this, include the **ipsec-vpn-rules *rule-name*** statement at the **[edit services service-set *service-set-name*]** hierarchy level. Include an IPv4 or IPv6 IPsec gateway with the **local-gateway *local-ip-address*** statement at the **[edit services service-set *service-set-name*]** hierarchy level.

Also, you must select either a single interface or a pair of interfaces that participate in IPsec. To select a single interface, include the interface-service ***interface-name*** statement at the **[edit services service-set *service-set-name*]** hierarchy level. To select a pair of interfaces and a next hop, include the **next-hop-service** statement at the **[edit services service-set *service-set-name*]** hierarchy level and specify an inside interface and an outside interface. Only next-hop service sets support IPsec within Layer 3 VPNs and use of routing protocols over the IPsec tunnel.

```
[edit services]
service-set service-set-name {
  interface-service {
    service-interface interface-name;
  }
  next-hop-service {
    inside-service-interface interface-name;
    outside-service-interface interface-name;
  }
  ipsec-vpn-options {
    local-gateway local-ip-address <routing-instance instance-name>;
    trusted-ca ca-profile-name;
  }
  ipsec-vpn-rules rule-name;
}
ipsec-vpn {
  rule rule-name {
    term term-name {
      from {
        source-address {
          ip-address;
        }
        destination-address {
          ip-address;
        }
      }
      then {
        remote-gateway remote-ip-address;
        (dynamic | manual);
      }
    }
  }
  match-direction output;
}
```

Applying the Filter or Service Set to the Interface Receiving Traffic to Be Secured

For the ES PIC, apply your firewall filter on the input interface receiving the traffic that you wish to send to the IPsec tunnel. To do this, include the **filter** statement at the **[edit interfaces *interface-name* unit *unit-number* family inet]** hierarchy level.

```
[edit interfaces interface-name unit unit-number family inet]
filter {
  input filter-name;
}
```

For the AS and MultiServices PICs, apply your IPsec-based interface service set to the input interface receiving the traffic that you wish to send to the IPsec tunnel. To do this, include the **service-set *service-set-name*** statement at the **[edit interfaces *interface-name* unit *unit-number* family inet service (input | output)]** hierarchy level.

```
[edit interfaces interface-name unit unit-number family inet]
service {
  input {
    service-set service-set-name;
  }
  output {
    service-set service-set-name;
  }
}
```

To configure a next-hop-based service set on the AS and MultiServices PICs, include the **service-domain** statement at the **[edit interfaces *interface-name* unit *unit-number*]** hierarchy level and specify one logical interface on the AS PIC as an inside interface and a second logical interface on the AS PIC as an outside interface.

```
[edit interfaces sp-fpc/pic/port]
unit 0 {
  family inet {
    address ip-address;
  }
}
unit 1 {
  family inet;
  service-domain inside;
}
unit 2 {
  family inet;
  service-domain outside;
}
```

Using Filter-Based Forwarding to Select Traffic to Be Secured

Instead of using a firewall filter, you can also forward traffic into an IPsec security association by using a filter-based forwarding instance. First, configure the filter-based forwarding instance. Then, configure a routing table group to advertise the routes from the filter-based forwarding instance. Next, create a firewall filter for the ES PIC and

reference the filter-based forwarding instance. Lastly, apply the filter and IPsec security association to the ES PIC.

```
[edit]
routing-instances {
  forwarding {
    instance-type forwarding;
    routing-options {
      static {
        route 10.10.10.0/24 next-hop 192.168.0.5;
      }
    }
  }
}
routing-options {
  rib-groups {
    group-name {
      import-rib [ inet.0 forwarding.inet.0 ];
    }
  }
}
firewall {
  family inet {
    filter filter-name {
      term term-name {
        then routing-instance instance-name;
      }
    }
  }
}
[edit]
interfaces {
  es-0/0/0 {
    unit 0 {
      tunnel {
        source source-ip-address;
        destination destination-ip-address;
      }
      family inet {
        ipsec-sa sa-name;
        filter {
          input filter-name;
        }
        address ip-address;
      }
    }
  }
}
```

Example: Configuring an Outbound Traffic Filter

Firewall filters for outbound traffic direct the traffic through the desired IPsec tunnel and ensure that the tunneled traffic goes out the appropriate interface (see [Figure 11 on page 222](#)). Here, an outbound firewall filter is created on security Gateway A; it identifies

the traffic to be encrypted and adds it to the input side of the interface that carries the internal VPN traffic:

```
[edit firewall]
filter ipsec-encrypt-policy-filter {
  term term1 {
    from {
      source-address { # local network
        10.1.1.0/24;
      }
      destination-address { # remote network
        10.2.2.0/24;
      }
    }
  }
  then ipsec-sa manual-sa1; # apply SA name to packet
  term default {
    then accept;
  }
}
```



NOTE: The source address, port, and protocol on the outbound traffic filter must match the destination address, port, and protocol on the inbound traffic filter. The destination address, port, and protocol on the outbound traffic filter must match the source address, port, and protocol on the inbound traffic filter.

**Related
Documentation**

- [Example: Applying an Outbound Traffic Filter on page 227](#)
- [IPsec Tunnel Traffic Configuration Overview on page 221](#)

Example: Applying an Outbound Traffic Filter

After you have configured the outbound firewall filter, you apply it:

```
[edit interfaces]
fe-0/0/1 {
  unit 0 {
    family inet {
      filter {
        input ipsec-encrypt-policy-filter;
      }
      address 10.1.1.254/24;
    }
  }
}
```

The outbound filter is applied on the Fast Ethernet interface at the **[edit interfaces fe-0/0/1 unit 0 family inet]** hierarchy level. Any packet matching the IPsec action term (**term 1**) on the input filter (**ipsec-encrypt-policy-filter**), configured on the Fast Ethernet interface, is directed to the ES PIC interface at the **[edit interfaces es-0/1/0 unit 0 family inet]** hierarchy level. If a packet arrives from the source address 10.1.1.0/24 and goes to the destination address 10.2.2.0/24, the Packet Forwarding Engine directs the packet to the ES PIC

interface, which is configured with the **manual-sa1** SA. The ES PIC receives the packet, applies the **manual-sa1** SA, and sends the packet through the tunnel.

The router must have a route to the tunnel endpoint; add a static route if necessary.

- Related Documentation**
- [IPsec Tunnel Traffic Configuration Overview on page 221](#)

Example: Configuring an Inbound Traffic Filter for a Policy Check

- [Requirements on page 228](#)
- [Overview on page 228](#)
- [Configuration on page 228](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

Here, an inbound firewall filter, which performs the final IPsec policy check, is created on security Gateway A. This check ensures that only packets that match the traffic configured for this tunnel are accepted. This filter is configured via the CLI interface at the **[edit firewall family inet]** hierarchy level.

Configuration

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure this example, perform the following tasks:

- [Configuring the firewall filter on page 229](#)

- CLI Quick Configuration**
- To quickly configure this example, copy the following configuration commands into a text file, remove any line breaks, and then paste the commands into the CLI at the **[edit]** hierarchy level.

```
[edit]
set firewall family inet filter ipsec-decrypt-policy-filter term term1 from source-address
  10.2.2.0/24
set firewall family inet filter ipsec-decrypt-policy-filter term term1 from destination-address
  10.1.1.0/24
set firewall family inet filter ipsec-decrypt-policy-filter term term1 then accept
commit
```

Configuring the firewall filter

Step-by-Step Procedure To configure the firewall filter, **ipsec-decrypt-policy-filter** that catches traffic from the remote **10.2.2.0/24** network that is destined for the local **10.1.1.0/24** network:

1. Create the firewall filter:

```
[edit]
user@host# edit firewall family inet filter ipsec-decrypt-policy-filter
```

2. Configure matching for source and destination addresses:

```
[edit firewall family inet filter ipsec-decrypt-policy-filter]
user@host# set term term1 from source-address 10.2.2.0/24
user@host# set term term1 from destination-address 10.1.1.0/24
```

3. Configure the filter to accept the matched traffic:

```
[edit firewall family inet filter ipsec-decrypt-policy-filter]
user@host# set term term1 then accept
```



NOTE: The accept statement within the term *term1* is for this filter only. Traffic that does not match this filter term will be dropped by the default firewall action.

4. Confirm your candidate firewall configuration by issuing the **show** configuration command at the **[edit firewall family inet]** hierarchy level

```
[edit firewall family inet]
user@host# show
filter ipsec-decrypt-policy-filter {
  term term1 { # perform policy check
    from {
      source-address { # remote network
        10.2.2.0/24;
      }
      destination-address { # local network
        10.1.1.0/24;
      }
    }
    then accept;
  }
}
```

If the command output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

5. If you are done configuring the device, commit your candidate configuration.

```
[edit]
```

```
user@host# commit
```

To implement this filter, you apply it as an input filter to the **es-0/1/0** logical interface of Gateway A. See [Example: Applying an Inbound Traffic Filter to an ES PIC for a Policy Check](#) for details.

- Related Documentation**
- [IPsec Tunnel Traffic Configuration Overview on page 221](#)
 - [Example: Applying an Inbound Traffic Filter to an ES PIC for a Policy Check on page 230](#)

Example: Applying an Inbound Traffic Filter to an ES PIC for a Policy Check

After you create the inbound firewall filter, apply it to the ES PIC. Here, the inbound firewall filter (**ipsec-decrypt-policy-filter**) is applied on the decrypted packet to perform the final policy check. The IPsec **manual-sa1** SA is referenced at the **[edit interfaces es-1/2/0 unit 0 family inet]** hierarchy level and decrypts the incoming packet.

```
[edit interfaces]
es-1/2/0 {
  unit 0 {
    tunnel {
      source 10.5.5.5; # tunnel source address
      destination 10.6.6.6; # tunnel destination address
    }
    family inet {
      filter {
        input ipsec-decrypt-policy-filter;
      }
      ipsec-sa manual-sa1; # SA name applied to packet
      address 10.1.1.8/32 { # local interface address inside local VPN
        destination 10.2.2.254; # destination address inside remote VPN
      }
    }
  }
}
```

The Packet Forwarding Engine directs IPsec packets to the ES PIC. It uses the packet's SPI, protocol, and destination address to look up the SA configured on one of the ES interfaces. The IPsec **manual-sa1** SA is referenced at the **[edit interfaces es-1/2/0 unit 0 family inet]** hierarchy level and is used to decrypt the incoming packet. When the packets are processed (decrypted, authenticated, or both), the input firewall filter (**ipsec-decrypt-policy-filter**) is applied on the decrypted packet to perform the final policy check. Term1 defines the decrypted (and verified) traffic and performs the required policy check.



NOTE: The inbound traffic filter is applied after the ES PIC has processed the packet, so the decrypted traffic is defined as any traffic that the remote gateway is encrypting and sending to this router. IKE uses this filter to determine the policy required for a tunnel. This policy is used during the negotiation with the remote gateway to find the matching SA configuration.

Related Documentation

- [IPsec Tunnel Traffic Configuration Overview on page 221](#)

CHAPTER 9

Configuring IPsec Dynamic Endpoints

- [Option: Configuring IPsec Dynamic Endpoints on page 233](#)
- [IPsec Dynamic Endpoint Tunnel Architecture on page 234](#)
- [Authentication Process on page 234](#)
- [Dynamic Implicit Rules on page 235](#)
- [Reverse Route Insertion on page 235](#)
- [Configuring an IKE Access Profile for IPsec Dynamic Endpoint Tunnels on page 236](#)
- [Configuring the Service Set for IPsec Dynamic Endpoint Tunnels on page 237](#)
- [Configuring the Interface Identifier for IPsec Dynamic Endpoint Tunnels on page 237](#)
- [Example: Dynamic Endpoint Tunneling Configuration on page 238](#)

Option: Configuring IPsec Dynamic Endpoints

IPsec tunnels can also be established using *dynamic peer* security gateways, in which the remote end of the tunnels do not have a statically assigned IPv4 or IPv6 address. Since the remote address is not known and is assigned from an address pool each time the remote host reboots, establishment of the tunnel relies on using IKE main mode with preshared global keys. Both policy-based and link-type tunnels are supported as follows:

- Policy-based tunnels used shared mode.
- Link-type or routed tunnels use dedicated mode. Each tunnel allocates a service interface from a pool of interfaces configured for the dynamic peers. Routing protocols can be configured to run on these service interfaces to learn routes over the IPsec tunnel that is used as a link.

This section includes the following topics:

- [IPsec Dynamic Endpoint Tunnel Architecture on page 234](#)
- [Configuring an IKE Access Profile for IPsec Dynamic Endpoint Tunnels on page 236](#)
- [Configuring the Service Set for IPsec Dynamic Endpoint Tunnels on page 237](#)
- [Configuring the Interface Identifier for IPsec Dynamic Endpoint Tunnels on page 237](#)

IPsec Dynamic Endpoint Tunnel Architecture

When you configure dynamic endpoint tunnels, the following components are used:

- [Authentication Process on page 234](#)
- [Dynamic Implicit Rules on page 235](#)
- [Reverse Route Insertion on page 235](#)

Authentication Process

The remote dynamic peer initiates IKE and negotiations with the local (Juniper Networks) router. The local router uses a default set of authentication and encryption values to match the and IKE proposals sent by the remote peer to establish the SA. If any of the values match, the tunnel establishment process continues. The default values are shown in [Table 9 on page 234](#).

Table 9: Default IKE and Proposals for Dynamic SA Negotiations

Statement Name	Values
Implicit IKE Proposal	
authentication-method	preshared keys
dh-group	group1, group2
authentication-algorithm	sha1, md5
encryption-algorithm	3des-cbc, des-cbc
lifetime-seconds	3600 seconds
Implicit Proposal	
protocol	esp, ah, bundle
authentication-algorithm	hmac-sha1-96, hmac-md5-96
encryption-algorithm	3des-cbc, des-cbc
lifetime-seconds	28,800 seconds (8 hours)

Phase 2 of the authentication process matches the *proxy identities* of the protected hosts and networks sent by the peer against a list of configured proxy identities. The accepted proxy identity is used to create the dynamic rules for encrypting the traffic. You can configure proxy identities by including the **allowed-proxy-pair** statement in an IKE access profile at the **[edit access profile *profile-name* client * ike]** hierarchy level. If no configured entry matches, the negotiation is rejected.

However, if you do not configure the **allowed-proxy-pair** statement, the default value **ANY(0.0.0.0/0)-ANY** is applied, and the local router accepts any proxy identities sent by the peer.

Once the phase 2 negotiation has been successfully completed, the router builds dynamic rules and inserts the reverse route into the routing table using the accepted proxy identity.

Dynamic Implicit Rules

After successful negotiation with the dynamic peer, the key management process (kmd) creates a dynamic rule for the accepted phase 2 proxy and applies it on the local AS or MultiServices PIC. The source and destination addresses are specified by the accepted proxy. This rule is used to encrypt traffic directed to one of the end hosts in the phase 2 proxy identity.



NOTE: You do not configure this rule; it is created by the key management process (kmd).

The **ipsec-inside-interface** value is the interface name assigned to the dynamic tunnel. The **source-address** and **destination-address** values are accepted from the proxy ID. The **match-direction** value is **input** for next-hop-style service sets.

Rule lookup for static tunnels is unaffected by the presence of a dynamic rule; it is performed in the order configured. When a packet is received for a service-set, static rules are always matched first. Dynamic rules are matched only after the rule match for static rules has failed.

Reverse Route Insertion

Static routes are automatically inserted into the route table for those networks and hosts protected by a remote tunnel endpoint. These protected hosts and networks are known as remote proxy identities.

Each route is created based on the remote proxy network and prefix length sent by the peer and is inserted in the relevant route table after successful phase 1 and phase 2 negotiations.

The route preference for each of these static reverse routes is 1. This value is necessary to avoid conflict with similar routes that might be added by the routing protocol process (rpd).

No routes are added if the accepted remote proxy address is the default (**0.0.0.0/0**). In this case, you can run routing protocols over the tunnel to learn routes and add static routes for the traffic you want to be protected over this tunnel.

For next-hop style service sets, the reverse routes include next hops pointing to the locations specified by the **inside-service-interface** statements.

The selection of the routing table in which these routes are inserted depends on where you configure the **inside-service-interface** statement. If these interfaces are present in a

VRF routing instance, then routes are added to the corresponding VRF routing table; otherwise, the routes are added to **inet.0**.



NOTE: Reverse route insertion takes place only for tunnels to dynamic peers. These routes are added only for next-hop style service sets.

Configuring an IKE Access Profile for IPsec Dynamic Endpoint Tunnels

You can configure only one tunnel profile per service set for all dynamic peers. The configured preshared key in the profile is used for IKE authentication of all dynamic peers terminating in that service set.

The IKE tunnel profile specifies all the information needed to complete the IKE negotiation. For more information on access profiles, see the *Junos System Basics Configuration Guide*.

```
[edit access]
profile profile-name {
  client * {
    ike {
      allowed-proxy-pair {
        remote remote-proxy-address local local-proxy-address;
      }
      pre-shared-key ([ ascii-text key-string ] | [ hexadecimal key-string ]);
      interface-id string-value;
      ipsec-policy ipsec-policy;
    }
  }
}
```



NOTE: For dynamic peers, the Junos OS supports only IKE main mode with the preshared key method of authentication. In this mode, an IPv4 or IPv6 address is used to identify a tunnel peer to get the preshared key information. The client value * (wildcard) means that the configuration within this profile is valid for all dynamic peers terminating within the service set accessing this profile.

The following statements are the parts of the IKE profile:

- **allowed-proxy-pair**—During phase 2 IKE negotiation, the remote peer supplies its network address (**remote**) and its peer's network address (**local**). Since multiple dynamic tunnels are authenticated through the same mechanism, this statement must include the list of possible combinations. If the dynamic peer does not present a valid combination, the phase 2 IKE negotiation fails.

By default, remote 0.0.0.0/0 local 0.0.0.0/0 is used if no values are configured.

- **pre-shared-key**—Mandatory key used to authenticate the dynamic peer during IKE phase 1 negotiation. This key must be configured on both ends of the tunnel and

distributed through an out-of-band secure mechanism. You can configure the key value either in **hexadecimal** or **ascii-text** format.

- **interface-id**—Interface identifier, a mandatory attribute used to derive the logical service interface information for the session.
- **ipsec-policy**—Name of the IPsec policy that defines the IPsec policy information for the session. You define the IPsec policy at the **[edit services ipsec-vpn ipsec policy policy-name]** hierarchy level. If no policy is set, any policy proposed by the dynamic peer is accepted.

Configuring the Service Set for IPsec Dynamic Endpoint Tunnels

To complete a dynamic endpoint tunnel configuration, you need to reference the IKE access profile configured at the **[edit access]** hierarchy level in the service set. To do this, include the **ike-access-profile** statement at the **[edit services service-set name ipsec-vpn-options]** hierarchy level:

```
[edit services]
service-set name {
  next-hop-service {
    inside-service-interface interface-name;
    outside-service-interface interface-name;
  }
  ipsec-vpn-options {
    local-gateway address;
    ike-access-profile profile-name;
  }
}
```

You can reference only one access profile in each service set. This profile is used to negotiate IKE and IPsec security associations with dynamic peers only.



NOTE: If you configure an IKE access profile in a service set, no other service set can share the same **local-gateway** address.

Configuring the Interface Identifier for IPsec Dynamic Endpoint Tunnels

You can configure an interface identifier for a group of dynamic peers, which specifies which adaptive services logical interface(s) take part in the dynamic IPsec negotiation. By assigning the same interface identifier to multiple logical interfaces, you can create a pool of interfaces for this purpose. To configure, include the **ipsec-interface-id** statement at the **[edit interfaces interface-name]** hierarchy level:

```
[edit interfaces sp-fpc/pic/port]
unit logical-unit-number {
  dial-options {
    ipsec-interface-id identifier;
    (shared | dedicated);
  }
}
```

Specifying the interface identifier in the **dial-options** statement makes this logical interface part of the pool identified by the IPsec interface identifier.



NOTE: Only one interface identifier can be specified at a time. You can include the **ipsec-interface-id** statement or the **l2tp-interface-id** statement, but not both simultaneously.

The **shared** statement enables one logical interface to be shared across multiple tunnels. The **dedicated** statement specifies that the logical interface is associated with a single tunnel, which is necessary when you are configuring an IPsec link-type tunnel. You must include the **dedicated** statement when you specify an **ipsec-interface-id** value.

Example: Dynamic Endpoint Tunneling Configuration

Figure 12: IPsec Dynamic Endpoint Tunneling Topology Diagram

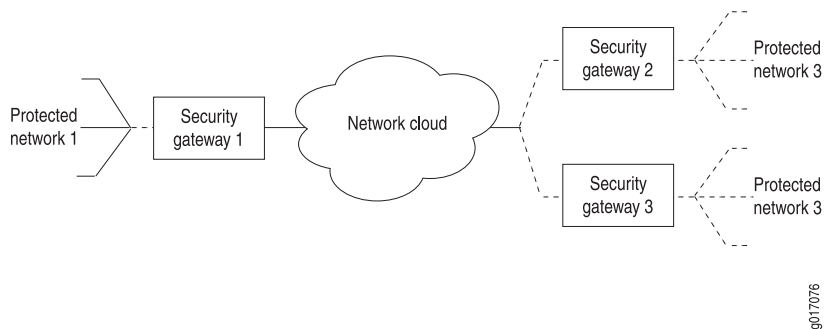


Figure 12 on page 238 shows a local network N-1 located behind security gateway SG-1. SG-1 is a Juniper Networks router terminating dynamic peer endpoints. The tunnel termination address on SG-1 is 10.7.7.2 and the local network address is 172.16.1.0/24.

A remote peer router obtains addresses from an ISP pool and runs RFC-compliant IKE. Remote network N-2 has address 172.16.2.0/24 and is located behind security gateway SG-2 with tunnel termination address 10.7.7.1.

On Router SG-1, configure an IKE access profile to accept proposals from SG-2. Apply the interface identifier from the access profile to the inside services interface and apply the IKE access profile itself to the IPsec next-hop style service set.

```
Router SG-1 [edit]
access {
  profile ike_access {
    client * { # Accepts proposals from specified peers that use the preshared key.
      ike {
        allowed-proxy-pair local 10.255.14.63/32 remote 10.255.14.64/32;
        pre-shared-key ascii-text "$ABC123"; # SECRET-DATA
        interface-id test_id; # Apply this ID to the inside services interfaces.
      }
    }
  }
}
```



```

interfaces {
  fe-0/0/0 {
    description "Connection to the local network";
    unit 0 {
      family inet {
        address 172.16.1.1/24;
      }
    }
  }
  so-1/0/0 {
    description "Connection to SG-2";
    no-keepalives;
    encapsulation cisco-hdlc;
    unit 0 {
      family inet {
        address 10.7.7.2/30;
      }
    }
  }
  sp-3/3/0 {
    unit 0 {
      family inet;
    }
    unit 3 {
      dial-options {
        ipsec-interface-id test_id; # Accepts dynamic endpoint tunnels.
        shared;
      }
      service-domain inside;
    }
    unit 4 {
      family inet;
      service-domain outside;
    }
  }
}
services {
  service-set dynamic_nh_ss { # Create a next-hop service set
    next-hop-service { # for the dynamic endpoint tunnels.
      inside-service-interface sp-3/3/0.3;
      outside-service-interface sp-3/3/0.4;
    }
    ipsec-vpn-options {
      local-gateway 10.7.7.2;
      ike-access-profile ike_access; # Apply the IKE access profile here.
    }
  }
}

```

Verifying Your Work

To verify proper operation of a dynamic endpoint tunnel configured on the AS PIC, use the following command:

```
show services ipsec-vpn ipsec security-associations (detail)
```

The following section shows output from this command used with the configuration example. The dynamically created rule `_junos_` appears in the output, as well as the establishment of the inbound and outbound dynamically created tunnels.

```
user@router> show services ipsec-vpn ipsec security-associations detail
Service set: dynamic_nh_ss
```

```
Rule: _junos_ , Term: tunnel4, Tunnel index: 4
Local gateway: 10.7.7.2, Remote gateway: 10.7.7.1
Local identity: ipv4(any:0,[0..3]=10.255.14.63)
Remote identity: ipv4(any:0,[0..3]=10.255.14.64)
```

```
Direction: inbound , SPI: 428111023, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 27660 seconds
Hard lifetime: Expires in 27750 seconds
Anti-replay service: Enabled, Replay window size: 64
```

```
Direction: outbound , SPI: 4035429231, AUX-SPI: 0
Mode: tunnel, Type: dynamic, State: Installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Soft lifetime: Expires in 27660 seconds
Hard lifetime: Expires in 27750 seconds
Anti-replay service: Enabled, Replay window size: 64
```

CHAPTER 10

Configuring Digital Certificates for IPsec

- [Using Digital Certificates for IPsec on page 241](#)
- [Configuring a CA Profile on page 242](#)
- [Configuring a Certificate Revocation List on page 242](#)
- [Requesting a CA Digital Certificate on page 243](#)
- [Generating a Private/Public Key Pair on page 243](#)
- [Generating and Enrolling a Local Digital Certificate on page 244](#)
- [Applying the Local Digital Certificate to an IPsec Configuration on page 244](#)
- [Configuring Automatic Reenrollment of Digital Certificates on page 244](#)
- [Monitoring Digital Certificates on page 245](#)
- [Clearing Digital Certificates on page 245](#)
- [Securing BGP Sessions with IPsec Transport Mode on page 246](#)

Using Digital Certificates for IPsec

A popular way for network administrators to scale an IPsec network is to use digital certificates instead of preshared keys. To enable digital certificates in your network, you need to use a combination of operational mode commands and configuration statements. The following tasks enable you to implement digital certificates on AS and MultiServices PICs installed in M Series and T Series routers:

- [Configuring a CA Profile on page 242](#)
- [Configuring a Certificate Revocation List on page 242](#)
- [Requesting a CA Digital Certificate on page 243](#)
- [Generating a Private/Public Key Pair on page 243](#)
- [Generating and Enrolling a Local Digital Certificate on page 244](#)
- [Applying the Local Digital Certificate to an IPsec Configuration on page 244](#)
- [Configuring Automatic Reenrollment of Digital Certificates on page 244](#)
- [Monitoring Digital Certificates on page 245](#)
- [Clearing Digital Certificates on page 245](#)

Related • [Digital Certificates on page 107](#)
Documentation

Configuring a CA Profile

The CA profile contains the name and URL of the CA or RA, as well as some retry timer settings. CA certificates issued by Entrust, VeriSign, and Microsoft are all compatible with M Series, and T Series routers. To configure the domain name of the CA or RA, include the **ca-identity** statement at the **[edit security pki ca-profile *ca-profile-name*]** hierarchy level. To configure the URL of the CA, include the **url** statement at the **[edit security pki ca-profile *ca-profile-name* enrollment]** hierarchy level. To configure the number of enrollment attempts the router should perform, include the **retry** statement at the **[edit security pki ca-profile *ca-profile-name* enrollment]** hierarchy level. To configure the amount of time the router should wait between enrollment attempts, include the **retry-interval** statement at the **[edit security pki ca-profile *ca-profile-name* enrollment]** hierarchy level.

```
[edit security pki]
ca-profile ca-profile-name {
  ca-identity ca-identity;
  enrollment {
    url url-name;
    retry number-of-enrollment-attempts; # The range is 0 though 100 attempts.
    retry-interval seconds; # The range is 0 though 3600 seconds.
  }
}
```



NOTE: When you delete the entire public key infrastructure (PKI) configuration, all the CA certificates in the device are not deleted as expected. These CA certificates are accessible after you create the CA profiles again.

Configuring a Certificate Revocation List

A certificate revocation list (CRL) contains a list of digital certificates that have been canceled before their expiration date. When a participating peer uses a digital certificate, it checks the certificate signature and validity. It also acquires the most recently issued CRL and checks that the certificate serial number is not on that CRL. By default, CRL verification is enabled on any CA profile running on Junos OS Release 8.1 or later. To disable CRL verification, include the **disable** statement at the **[edit security pki ca-profile *ca-profile-name* revocation-check]** hierarchy level.

To specify the URL for the Lightweight Directory Access Protocol (LDAP) server where your CA stores its current CRL, include the **url** statement at the **[edit security pki ca-profile *ca-profile-name* revocation-check *crl*]** hierarchy level. If the LDAP server requires a password to access the CRL, include the **password** statement at the **[edit security pki ca-profile *ca-profile-name* revocation-check *crl* url]** hierarchy level.



NOTE: You do not need to specify a URL for the LDAP server if the certificate includes a certificate distribution point (CDP). The CDP is a field within the certificate that contains information about how to retrieve the CRL for the certificate. The router uses this information to download the CRL automatically. Any LDAP URL you configure takes precedence over the CDP included in the certificate.

If you manually downloaded the CRL, you must manually install it on the router. To manually install the CRL, issue the `request security pki crl load ca-profile ca-profile-name filename path/filename` command.

To configure the time interval between CRL updates, include the `refresh-interval` statement at the `[edit security ca-profile ca-profile-name revocation-check crl]` hierarchy level.

To override the default behavior and permit IPsec peer authentication to continue when the CRL fails to download, include the `disable on-download-failure` statement at the `[edit security ca-profile ca-profile-name revocation-check crl]` hierarchy level.

```
[edit security pki ca-profile ca-profile-name]
revocation-check {
  disable;
  crl {
    disable on-download-failure;
    refresh-interval number-of-hours { # The range is 0 through 8784 hours.
      url {
        url-name;
        password;
      }
    }
  }
}
```

Requesting a CA Digital Certificate

You can request a CA digital certificate either online or manually. To request a digital certificate from a CA or RA online by using SCEP, issue the `request security pki ca-certificate enroll ca-profile ca-profile-name` command.

If you obtained the CA digital certificate manually through e-mail or other out-of-band mechanism, you must load it manually. To manually install a certificate in your router, issue the `request security pki ca-certificate load ca-profile profile_name filename /path/filename.cert` command.

Generating a Private/Public Key Pair

A key pair is a critical element of a digital certificate implementation. The public key is included in the local digital certificate and the private key is used to decrypt data received from peers. To generate a private/public key pair, issue the `request security pki generate-key-pair certificate-id certificate-id-name` command.

Generating and Enrolling a Local Digital Certificate

You can generate and enroll a local digital certificate either online or manually. To generate and enroll a local certificate online by using SCEP, issue the **request security pki local-certificate enroll** command. To generate a local certificate request manually in the PKCS-10 format, issue the **request security pki generate-certificate-request** command.

If you create the local certificate request manually, you must also load the certificate manually. To manually install a certificate in your router, issue the **request security pki local-certificate load** command.

Applying the Local Digital Certificate to an IPsec Configuration

To activate a local digital certificate, you configure the IKE proposal to use digital certificates instead of preshared keys, reference the local certificate in the IKE policy, and identify the CA or RA in the service set. To enable the IKE proposal for digital certificates, include the **rsa-signatures** statement at the **[edit services ipsec-vpn ike proposal *proposal-name* authentication-method]** hierarchy level. To reference the local certificate in the IKE policy, include the **local-certificate** statement at the **[edit services ipsec-vpn ike policy *policy-name*]** hierarchy level. To identify the CA or RA in the service set, include the **trusted-ca** statement at the **[edit services service-set *service-set-name* ipsec-vpn-options]** hierarchy level.

```
[edit services]
service-set service-set-name {
  .....
  ipsec-vpn-options {
    trusted-ca ca-profile-name;
  }
}
ipsec-vpn {
  ike {
    proposal proposal-name {
      .....
      authentication-method [pre-shared-keys | rsa-signatures];
    }
    policy policy-name {
      .....
      local-certificate certificate-id-name;
    }
  }
}
```

Configuring Automatic Reenrollment of Digital Certificates

You can configure automatic reenrollment for digital certificates. This feature is by default not enabled. To configure automatic reenrollment for digital certificates, include the **auto-re-enrollment** statement at the **[edit security pki]** hierarchy level:

```
[edit]
security {
```

```

pki {
  auto-re-enrollment {
    certificate-id certificate-name {
      ca-profile ca-profile-name;
      challenge-password password;
      re-enroll-trigger-time-percentage percentage; # Percentage of validity-period
        # (specified in certificate) when automatic
        # reenrollment should be initiated.
      re-generate-keypair;
      validity-period number-of-days;
    }
  }
}

```

Monitoring Digital Certificates

Purpose You can issue various forms of the **show security pki** command to view digital certificates and certificate requests and certificate revocation lists:

- Action**
- To display the CA digital certificate, issue the **show security pki ca-certificate ca-profile *ca-profile-name*** command.
 - To display the local digital certificate and the public key used to enroll the certificate, issue the **show security pki local-certificate certificate-id *certificate-id-name*** command.
 - To display the local certificate request in PKCS-10 format, issue the **show security pki certificate-request certificate-id *certificate-id-name*** command.
 - You can also view which digital certificates are used in IKE negotiations to establish tunnels by issuing the **show services ipsec-vpn certificates** command.
 - To display the certificate revocation list, issue the **show security pki crl ca-profile *ca-profile-name*** command.
 - To determine if a certificate is enabled for automatic-reenrollment, issue the **show security pki** command.

Clearing Digital Certificates

Purpose Variations of the **clear security pki** command enable you to delete certificates or requests and certificate revocation lists:

- Action**
- To delete the CA digital certificate, issue the **clear security pki ca-certificate ca-profile *ca-profile-name*** command.
 - To delete the local digital certificate and the associated private/public key pair, issue the **clear security pki local-certificate certificate-id *certificate-id-name*** command.
 - To delete the local certificate request, issue the **clear security pki certificate-request certificate-id *certificate-id-name*** command.

- To clear the digital certificates that were used in IKE negotiations to establish tunnels, issue the **clear services ipsec-vpn certificates** command.
- To delete the certificate revocation list, issue the **clear security pki crl ca-profile *ca-profile-name*** command.

**Related
Documentation**

- [Example: AS PIC IKE Dynamic SA with Digital Certificates Configuration on page 149](#)
- *Security Services Administration Guide*
- *Understanding Junos VPN Site Secure*

Securing BGP Sessions with IPsec Transport Mode

For the ES PIC, you can use IPsec to secure BGP sessions between Routing Engines in M Series and T Series platforms. To configure, create a transport mode security association and apply the SA to the BGP configuration by including the **ipsec-sa** statement at the **[edit protocols bgp group *group-name*]** hierarchy level.

```
[edit]
protocols {
  bgp {
    group group-name {
      local-address ip-address;
      export export-policy;
      peer-as as-number;
      ipsec-sa sa-name;
      neighbor peer-ip-address;
    }
  }
}
```

**Related
Documentation**

- [IPSec Modes on page 105](#)

CHAPTER 11

Using Security and Encryption on EX Series Switches

- [Understanding Public Key Cryptography on Switches on page 248](#)
- [Understanding Self-Signed Certificates on EX Series Switches on page 249](#)
- [Manually Generating Self-Signed Certificates on Switches \(CLI Procedure\) on page 250](#)
- [Deleting Self-Signed Certificates \(CLI Procedure\) on page 251](#)
- [Enabling HTTPS and XNM-SSL Services on Switches Using Self-Signed Certificates \(CLI Procedure\) on page 252](#)

Understanding Public Key Cryptography on Switches

Cryptography describes the techniques related to the following aspects of information security:

- Privacy or confidentiality
- Integrity of data
- Authentication
- Nonrepudiation or nonrepudiation of origin—Nonrepudiation of origin means that signers cannot claim that they did not sign a message while claiming that their private key remains secret. In some nonrepudiation schemes used in digital signatures, a timestamp is attached to the digital signature, so that even if the private key is exposed, the signature remains valid. Public and private keys are described in the following text.

In practice, cryptographic methods protect the data transferred from one system to another over public networks by encrypting the data using an encryption key. Public key cryptography (PKC), which is used on Juniper Networks EX Series Ethernet Switches, uses a pair of encryption keys: a public key and a private key. The public and private keys are created simultaneously using the same encryption algorithm. The private key is held by a user secretly and the public key is published. Data encrypted with a public key can be decrypted only with the corresponding private key and vice versa. When you generate a public/private key pair, the switch automatically saves the key pair in a file in the certificate store, from which it is subsequently used in certificate request commands. The generated key pair is saved as *certificate-id.priv*.



NOTE: The default RSA and DSA key size is 1024 bits. If you are using the Simple Certificate Enrollment Protocol (SCEP), Juniper Networks Junos operating system (Junos OS) supports RSA only.

- [Public Key Infrastructure \(PKI\) and Digital Certificates on page 248](#)

Public Key Infrastructure (PKI) and Digital Certificates

Public key infrastructure (PKI) allows the distribution and use of the public keys in public key cryptography with security and integrity. PKI manages the public keys by using digital certificates. A digital certificate provides an electronic means of verifying the identity of an individual, an organization, or a directory service that can store digital certificates.

A PKI typically consists of a Registration Authority (RA) that verifies the identities of entities, authorizes their certificate requests, and generates unique asymmetric key pairs (unless the users' certificate requests already contain public keys); and a Certificate Authority (CA) that issues corresponding digital certificates for the requesting entities. Optionally, you can use a Certificate Repository that stores and distributes certificates and a certificate revocation list (CRL) identifying the certificates that are no longer valid. Each entity possessing the authentic public key of a CA can verify the certificates issued by that CA.

Digital signatures exploit the public key cryptographic system as follows:

1. A sender digitally signs data by applying a cryptographic operation, involving its private key, on a digest of the data.
2. The resulting signature is attached to the data and sent to the receiver.
3. The receiver obtains the digital certificate of the sender, which provides the sender's public key and confirmation of the link between its identity and the public key. The sender's certificate is often attached to the signed data.
4. The receiver either trusts this certificate or attempts to verify it. The receiver verifies the signature on the data by using the public key contained in the certificate. This verification ensures the authenticity and integrity of the received data.

As an alternative to using a PKI, an entity can distribute its public key directly to all potential signature verifiers, so long as the key's integrity is protected. The switch does it by using a self-signed certificate as a container for the public key and the corresponding entity's identity.

Related Documentation • [Understanding Self-Signed Certificates on EX Series Switches on page 249](#)

Understanding Self-Signed Certificates on EX Series Switches

When you initialize a Juniper Networks EX Series Ethernet Switch with the factory default configuration, the switch generates a self-signed certificate, allowing secure access to the switch through the Secure Sockets Layer (SSL) protocol. Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS) and XML Network Management over Secure Sockets Layer (XNM-SSL) are the two services that can make use of the self-signed certificates.



NOTE: Self-signed certificates do not provide additional security as do those generated by Certificate Authorities (CAs). This is because a client cannot verify that the server he or she has connected to is the one advertised in the certificate.

The switches provide two methods for generating a self-signed certificate:

- Automatic generation

In this case, the creator of the certificate is the switch. An automatically generated (also called “system-generated”) self-signed certificate is configured on the switch by default.

After the switch is initialized, it checks for the presence of an automatically generated self-signed certificate. If it does not find one, the switch generates one and saves it in the file system.

A self-signed certificate that is automatically generated by the switch is similar to an SSH host key. It is stored in the file system, not as part of the configuration. It persists

when the switch is rebooted, and it is preserved when a **request system snapshot** command is issued.

The switch uses the following distinguished name for the automatically generated certificate:

"CN=<device serial number>, CN=system generated, CN=self-signed"

If you delete the system-generated self-signed certificate on the switch, the switch generates a self-signed certificate automatically.

- Manual generation

In this case, you create the self-signed certificate for the switch. At any time, you can use the CLI to generate a self-signed certificate. Manually generated self-signed certificates are stored in the file system, not as part of the configuration.

Self-signed certificates are valid for five years from the time they are generated. When the validity of an automatically generated self-signed certificate expires, you can delete it from the switch so that the switch generates a new self-signed certificate.

System-generated self-signed certificates and manually generated self-signed certificates can coexist on the switch.

**Related
Documentation**

- [Understanding Public Key Cryptography on Switches on page 248](#)
- [Manually Generating Self-Signed Certificates on Switches \(CLI Procedure\) on page 250](#)

Manually Generating Self-Signed Certificates on Switches (CLI Procedure)

EX Series switches allow you to generate custom self-signed certificates and store them in the file system. The certificate you generate manually can coexist with the automatically generated self-signed certificate on the switch. To enable secure access to the switch over SSL, you can use either the system-generated self-signed certificate or a certificate you have generated manually.

To generate self-signed certificates manually, you must complete the following tasks:

- [Generating a Public-Private Key Pair on Switches on page 250](#)
- [Generating Self-Signed Certificates on Switches on page 251](#)

Generating a Public-Private Key Pair on Switches

A digital certificate has an associated cryptographic key pair that is used to sign the certificate digitally. The cryptographic key pair comprises a public key and a private key. When you generate a self-signed certificate, you must provide a public-private key pair that can be used to sign the self-signed certificate. Therefore, you must generate a public-private key pair before you can generate a self-signed certificate.

To generate a public-private key pair:

```
user@switch> request security pki generate-key-pair certificate-id certificate-id-name
```



NOTE: Optionally, you can specify the encryption algorithm and the size of the encryption key. If you do not specify the encryption algorithm and encryption key size, default values are used. The default encryption algorithm is RSA, and the default encryption key size is 1024 bits.

After the public-private key pair is generated, the switch displays the following:

generated key pair *certificate-id-name*, key size 1024 bits

Generating Self-Signed Certificates on Switches

To generate the self-signed certificate manually, include the certificate ID name, the subject of the distinguished name (DN), the domain name, the IP address of the switch, and the e-mail address of the certificate holder:

```
user@switch> request security pki local-certificate generate-self-signed certificate-id
certificate-id-name domain-name domain-name email email-address ip-address switch-ip-address
subject subject-of-distinguished-name
```

The certificate you have generated is stored in the switch's file system. The certificate ID you have specified while generating the certificate is a unique identifier that you can use to enable the HTTPS or XNM-SSL services.

To verify that the certificate was generated and loaded properly, enter the **show security pki local-certificate** operational command.

Related Documentation

- [Enabling HTTPS and XNM-SSL Services on Switches Using Self-Signed Certificates \(CLI Procedure\) on page 252](#)
- [Understanding Self-Signed Certificates on EX Series Switches on page 249](#)

Deleting Self-Signed Certificates (CLI Procedure)

You can delete a self-signed certificate that is automatically or manually generated from the EX Series switch. When you delete the automatically generated self-signed certificate, the switch generates a new self-signed certificate and stores it in the file system.

- To delete the automatically generated certificate and its associated key pair from the switch:

```
user@switch> clear security pki local-certificate system-generated
```

- To delete a manually generated certificate and its associated key pair from the switch:

```
user@switch> clear security pki local-certificate certificate-id certificate-id-name
```

- To delete all manually generated certificates and their associated key pairs from the switch:

```
user@switch> clear security pki local-certificate all
```

- Related Documentation**
- [Manually Generating Self-Signed Certificates on Switches \(CLI Procedure\) on page 250](#)
 - [Understanding Self-Signed Certificates on EX Series Switches on page 249](#)

Enabling HTTPS and XNM-SSL Services on Switches Using Self-Signed Certificates (CLI Procedure)

You can use the system-generated self-signed certificate or a manually generated self-signed certificate to enable Web management HTTPS and XNM-SSL services.

- To enable HTTPS services using the automatically generated self-signed certificate:

```
[edit]
user@switch# set system services web-management https system-generated-certificate
```

- To enable HTTPS services using a manually generated self-signed certificate:

```
[edit]
user@switch# set system services web-management https pki-local-certificate
certificate-id-name
```



NOTE: The value of the *certificate-id-name* must match the name you specified when you generated the self-signed certificate manually.

- To enable XNM-SSL services using a manually generated self-signed certificate:

```
[edit]
user@switch# set system services xnm-ssl local-certificate certificate-id-name
```



NOTE: The value of the *certificate-id-name* must match the name you specified when you generated the self-signed certificate manually.

- Related Documentation**
- [Manually Generating Self-Signed Certificates on Switches \(CLI Procedure\) on page 250](#)
 - [Understanding Self-Signed Certificates on EX Series Switches on page 249](#)

Using IPsec with a Layer 3 VPN

- [Using IPsec with a Layer 3 VPN on page 253](#)
- [ES Tunnel Interface Configuration for a Layer 3 VPN on page 255](#)

Using IPsec with a Layer 3 VPN

Some key concepts to keep in mind when configuring IPsec within a VPN include the following:

- Add the inside services interface for a next-hop style service set into the routing instance by including the **interface *sp-fpc/pic/port*** statement at the **[edit routing-instances *instance-name*]** hierarchy level.
- For interface style service sets, add the interface on which you apply the service set and the services interface by including both interfaces at the **[edit routing-instances *instance-name*]** hierarchy level.
- To define a routing instance for the local gateway within the service set, include the **routing-instance *instance-name*** option at the **[edit services service-set *service-set-name* ipsec-vpn-options local-gateway *address*]** hierarchy level.

The following configuration for an AS PIC on a provider edge (PE) router demonstrates the use of next-hop service sets with an IKE dynamic SA in a VPN routing and forwarding (VRF) routing instance.

```
[edit]
interfaces {
  so-0/0/0 {
    description "Interface connected to the customer edge (CE) router";
    unit 0 {
      family inet {
        address 10.6.6.6/32;
      }
    }
  }
  so-2/2/0 {
    description "Source IPsec tunnel interface to the network core";
    unit 0 {
      family inet {
        address 10.10.1.1/30;
      }
    }
  }
}
```

```
    }
  }
  sp-3/1/0 {
    description "AS PIC interface";
    unit 0 {
      family inet {
        address 10.7.7.7/32;
      }
    }
    unit 1 {
      family inet;
      service-domain inside;
    }
    unit 2 {
      family inet;
      service-domain outside;
    }
  }
}
policy-options {
  policy-statement vpn-export-policy {
    then {
      community add community-name;
      accept;
    }
  }
  policy-statement vpn-import-policy {
    term term-name {
      from community community-name;
      then accept;
    }
  }
  community community-name members target:100:20;
}
routing-instances {
  vrf {
    instance-type vrf;
    interface sp-3/1/0.1; # Inside sp interface.
    interface so-0/0/0.0; # Interface that connects to the CE router.
    route-distinguisher route-distinguisher;
    vrf-import vpn-import-policy;
    vrf-export vpn-export-policy;
    routing-options {
      static {
        route ip-address/prefix next-hop so-0/0/0.0; # Routes for the CE router.
        route ip-address/prefix next-hop sp-3/1/0.1; # Routes for IPsec.
      }
    }
  }
}
services {
  service-set service-set-name {
    next-hop-service {
      inside-service-interface sp-3/1/0.1;
      outside-service-interface sp-3/1/0.2;
    }
  }
}
```



```

    ipsec-vpn-options {
        local-gateway 10.10.1.1;
    }
    ipsec-vpn-rules rule-name;
}
ipsec-vpn {
    rule rule-name {
        term term-name {
            from {
                source-address {
                    source-ip-address;
                }
            }
            then {
                remote-gateway 10.10.1.2;
                dynamic {
                    ike-policy ike-policy-name;
                }
            }
        }
        match-direction direction;
    }
    ike {
        policy ike-policy-name {
            pre-shared-key ascii-text preshared-key;
        }
    }
}
}

```

For more information on VRF routing instances, see the *Junos VPNs Configuration Guide*.
 For more information on next-hop service sets, see the *Junos Services Interfaces Configuration Guide*.

ES Tunnel Interface Configuration for a Layer 3 VPN

To configure an ES tunnel interface for a Layer 3 VPN, you need to configure an ES tunnel interface on the provider edge (PE) router and on the customer edge (CE) router. You also need to configure IPsec on the PE and CE routers.

- Related Documentation**
- [IPsec Tunnel Traffic Configuration Overview on page 221](#)

PART 4

Monitoring and Troubleshooting Information

- [Tracing Security Services Operations for Troubleshooting Purposes on page 259](#)

Tracing Security Services Operations for Troubleshooting Purposes

- [Configuring Tracing Operations for Security Services on page 259](#)
- [Configuring Tracing Operations for IPsec Events for Adaptive Services PICs on page 260](#)
- [Monitoring IPsec by Using SNMP on page 260](#)

Configuring Tracing Operations for Security Services

To configure trace options for security services, specify flags using the **traceoptions** statement:

```
[edit security]
traceoptions {
  file filename <files number> <size size>;
  flag all;
  flag database;
  flag general;
  flag ike;
  flag parse;
  flag policy-manager;
  flag routing-socket;
  flag timer;
}
```

You can include these statements at the following hierarchy levels:

- **[edit security]**
- **[edit services ipsec-vpn]**

You can specify one or more of the following security tracing flags:

- **all**—Trace all security events
- **database**—Trace database events
- **general**—Trace general events
- **ike**—Trace IKE module processing
- **parse**—Trace configuration processing

- **policy-manager**—Trace policy manager processing
- **routing-socket**—Trace routing socket messages
- **timer**—Trace internal timer events

**Related
Documentation**

- [Configuring Tracing Operations for IPsec Events for Adaptive Services PICs on page 260](#)
- [Security Associations Overview on page 104](#)

Configuring Tracing Operations for IPsec Events for Adaptive Services PICs

To configure trace options to trace IPsec events for Adaptive Services PICs, include the following statements at the **[edit services ipsec-vpn]** hierarchy level:

```
[edit services ipsec-vpn]
traceoptions {
  file filename <files number> <size size>;
  flag all;
  flag database;
  flag general;
  flag ike;
  flag parse;
  flag policy-manager;
  flag routing-socket;
  flag timer;
}
```

Trace option output is recorded in the `/var/log/kmd` file.

You can specify one or more of the following security tracing flags:

- **all**—Trace all security events
- **database**—Trace database events
- **general**—Trace general events
- **ike**—Trace IKE module processing
- **parse**—Trace configuration processing
- **policy-manager**—Trace policy manager processing
- **routing-socket**—Trace routing socket messages
- **timer**—Trace internal timer events

**Related
Documentation**

- [Configuring Tracing Operations for Security Services on page 259](#)

Monitoring IPsec by Using SNMP

In Junos OS Release 7.5 and later, the IPsec Monitoring MIB provides a way to monitor IPsec information on AS PICs installed in M Series and T Series routers by using the Simple

Network Management Protocol (SNMP). The MIB provides an IKE tunnel table to monitor IKE security associations and view related statistics, an IPsec tunnel table to view IPsec tunnel statistics, and an IPsec security associations table to view all IPsec SAs. For more information, see the *Junos Network Management Configuration Guide*.

PART 5

Port Security

- [Port Security Overview on page 265](#)
- [Enabling IPv6 ND Inspection and RA Guard to Prevent IPv6 Spoofing Attacks on page 319](#)
- [Configuring MAC Limiting, MAC Move Limiting and Persistent MAC Learning to Prevent DHCP Starvation Attacks on page 343](#)
- [Configuring Media Access Control Security \(MACsec\) on Routers on page 355](#)
- [Configuring Media Access Control Security \(MACsec\) on Switches on page 403](#)
- [Configuration Examples on page 433](#)
- [Configuring DHCP Snooping to Filter DHCP Messages from Untrusted Hosts on page 515](#)
- [Enabling Trusted DHCP Servers to Protect Against Rogue DHCP Servers on page 537](#)
- [Configuring Layer 2 Port Security on page 539](#)

CHAPTER 14

Port Security Overview

- [Understanding Access Control on Switches on page 266](#)
- [Understanding How to Protect Access Ports on EX Series Switches from Common Attacks on page 268](#)
- [Overview of Access Port Protection on page 270](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
- [Monitoring Port Security on page 280](#)
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Configuring Port Security \(CLI Procedure\) on page 284](#)
- [Configuring Port Security Features on page 287](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Verifying That DHCP Snooping Is Working Correctly on page 297](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299](#)
- [Verifying That MAC Limiting Is Working Correctly on page 300](#)
- [Verifying That MAC Move Limiting Is Working Correctly on page 306](#)
- [Understanding Trusted and Untrusted Ports on page 307](#)
- [Verifying That a Trusted DHCP Server Is Working Correctly on page 307](#)
- [Verifying That the Port Error Disable Setting Is Working Correctly on page 308](#)
- [Verifying That the Port Error Disable Setting Is Working Correctly on page 309](#)
- [Understanding DHCP Option 82 for Port Security on page 310](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)
- [Enabling DHCPv6 Rapid Commit Support on page 315](#)
- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 316](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 318](#)

Understanding Access Control on Switches

Juniper Networks Junos operating system (Junos OS) is a network operating system that has been hardened through the separation of control forwarding and services planes, with each function running in protected memory. The control-plane CPU is protected by rate limiting, routing policy, and firewall filters to ensure switch uptime even under severe attack. Access port security features such as dynamic Address Resolution Protocol (ARP) inspection, DHCP snooping, and MAC limiting are controlled through a single Junos OS CLI command.

Juniper Networks EX Series Ethernet Switches provide the following hardware and software security features:

Console Port—Allows use of the console port to connect to the Routing Engine through an RJ-45 cable. You then use the command-line interface (CLI) to configure the switch.

Out-of-Band Management—A dedicated management Ethernet port on the rear panel allows out-of-band management.

Software Images—All Junos OS images are signed by Juniper Networks certificate authority (CA) with public key infrastructure (PKI).

User Authentication, Authorization, and Accounting (AAA)—Features include:

- User and group accounts with password encryption and authentication.
- Access privilege levels configurable for login classes and user templates.
- RADIUS authentication, TACACS+ authentication, or both, for authenticating users who attempt to access the switch.
- Auditing of configuration changes through system logging or RADIUS/TACACS+.

802.1X Authentication—Provides network access control. Supplicants (hosts) are authenticated when they initially connect to a LAN. Authenticating supplicants before they receive an IP address from a DHCP server prevents unauthorized supplicants from gaining access to the LAN. EX Series switches support Extensible Authentication Protocol (EAP) methods, including EAP-MD5, EAP-TLS, EAP-TTLS, and EAP-PEAP.

Port Security—Access port security features include:

- DHCP snooping—Filters and blocks ingress DHCP server messages on untrusted ports; builds and maintains an IP-address/MAC-address binding database (called the DHCP snooping database).
- Dynamic ARP inspection (DAI)—Prevents ARP spoofing attacks. ARP requests and replies are compared against entries in the DHCP snooping database, and filtering decisions are made based on the results of those comparisons.
- MAC limiting—Protects against flooding of the Ethernet switching table.
- MAC move limiting—Detects MAC movement and MAC spoofing on access ports.

- **Trusted DHCP server**—With a DHCP server on a trusted port, protects against rogue DHCP servers sending leases.
- **IP source guard**—Mitigates the effects of IP address spoofing attacks on the Ethernet LAN. The source IP address in the packet sent from an untrusted access interface is validated against the source MAC address in the DHCP snooping database. The packet is allowed for further processing if the source IP address to source MAC address binding is valid; if the binding is not valid, the packet is discarded.
- **DHCP option 82**—Also known as the DHCP relay agent information option. Helps protect the EX Series switch against attacks such as spoofing (forging) of IP addresses and MAC addresses and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.
- **Unrestricted proxy ARP**—The switch responds to all ARP messages with its own MAC address. Hosts that are connected to the switch's interfaces cannot communicate directly with other hosts. Instead, all communications between hosts go through the switch.
- **Restricted proxy ARP**—The switch does not respond to an ARP request if the physical networks of the source and target of the ARP request are the same. It does not matter whether the destination host has the same IP address as the incoming interface or a different (remote) IP address. An ARP request for a broadcast address elicits no reply.

Device Security—Storm control permits the switch to monitor unknown unicast and broadcast traffic and drop packets, or shut down, or temporarily disable the interface when a specified traffic level is exceeded, thus preventing packets from proliferating and degrading the LAN. You can enable storm control on access interfaces or trunk interfaces.

Firewall Filters—Allow auditing of various types of security violations, including attempts to access the switch from unauthorized locations. Firewall filters can detect such attempts and create audit log entries when they occur. The filters can also restrict access by limiting traffic to source and destination MAC addresses, specific protocols, or, in combination with policers, to specified data rates to prevent denial of service (DoS) attacks.

Policers—Provide rate-limiting capability to control the amount of traffic that enters an interface, which acts to counter DoS attacks.

Encryption Standards—Supported standards include:

- 128-, 192-, and 256-bit Advanced Encryption Standard (AES)
- 56-bit Data Encryption Standard (DES) and 168-bit 3DES

Related Documentation

- [802.1X for Switches Overview](#)
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Understanding Proxy ARP](#)
- [Understanding Storm Control on EX Series Switches on page 597](#)

Understanding How to Protect Access Ports on EX Series Switches from Common Attacks

Port security features can protect the Juniper Networks EX Series Ethernet Switch against various types of attacks. Protection methods against some common attacks are:

- [Mitigation of Ethernet Switching Table Overflow Attacks on page 268](#)
- [Mitigation of Rogue DHCP Server Attacks on page 268](#)
- [Protection Against ARP Spoofing Attacks on page 269](#)
- [Protection Against DHCP Snooping Database Alteration Attacks on page 269](#)
- [Protection Against DHCP Starvation Attacks on page 270](#)

Mitigation of Ethernet Switching Table Overflow Attacks

In an overflow attack on the Ethernet switching table, an intruder sends so many requests from new MAC addresses that the table cannot learn all the addresses. When the switch can no longer use information in the table to forward traffic, it is forced to broadcast messages. Traffic flow on the switch is disrupted, and packets are sent to all hosts on the network. In addition to overloading the network with traffic, the attacker might also be able to sniff that broadcast traffic.

To mitigate such attacks, configure both a MAC limit for learned MAC addresses and some specific allowed MAC addresses. Use the MAC limiting feature to control the total number of MAC addresses that can be added to the Ethernet switching table for the specified interface or interfaces. By setting the MAC addresses that are explicitly allowed, you ensure that the addresses of network devices whose network access is critical are guaranteed to be included in the Ethernet switching table. See [“Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks” on page 445](#).



.....

NOTE: You can also configure learned MAC addresses to persist on each interface. Used in combination with a configured MAC limit, this persistent MAC learning helps prevent traffic loss after a restart or an interface-down event and also increases port security by limiting the MAC addresses allowed on the interface.

.....

Mitigation of Rogue DHCP Server Attacks

If an attacker sets up a rogue DHCP server to impersonate a legitimate DHCP server on the LAN, the rogue server can start issuing leases to the network's DHCP clients. The information provided to the clients by this rogue server can disrupt their network access, causing DoS. The rogue server might also assign itself as the default gateway device for the network. The attacker can then sniff the network traffic and perpetrate a man-in-the-middle attack—that is, it misdirects traffic intended for a legitimate network device to a device of its choice.

To mitigate a rogue DHCP server attack, set the interface to which that rogue server is connected as untrusted. That action will block all ingress DHCP server messages from that interface. See [“Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks”](#) on page 449.



NOTE: The switch logs all DHCP server packets that are received on untrusted ports—for example:

```
5 untrusted DHCPOFFER received, interface ge-0/0/0.0[65], vlan v1[10] server
ip/mac 12.12.12.1/00:00:00:00:01:12 offer ip/client mac
12.12.12.253/00:AA:BB:CC:DD:01
```

You can use these messages to detect malicious DHCP servers on the network.

Protection Against ARP Spoofing Attacks

In ARP spoofing, an attacker sends faked ARP messages on the network. The attacker associates its own MAC address with the IP address of a network device connected to the switch. Any traffic sent to that IP address is instead sent to the attacker. Now the attacker can create various types of mischief, including sniffing the packets that were meant for another host and perpetrating man-in-the middle attacks. (In a man-in-the-middle attack, the attacker intercepts messages between two hosts, reads them, and perhaps alters them, all without the original hosts knowing that their communications have been compromised.)

To protect against ARP spoofing on your switch, enable both DHCP snooping and dynamic ARP inspection (DAI). DHCP snooping builds and maintains the DHCP snooping table. That table contains the MAC addresses, IP addresses, lease times, binding types, VLAN information, and interface information for the untrusted interfaces on the switch. DAI uses the information in the DHCP snooping table to validate ARP packets. Invalid ARP packets are blocked and, when they are blocked, a system log message is recorded that includes the type of ARP packet and the sender's IP address and MAC address.

See [“Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks”](#) on page 456.

Protection Against DHCP Snooping Database Alteration Attacks

In an attack designed to alter the DHCP snooping database, an intruder introduces a DHCP client on one of the switch's untrusted access interfaces that has a MAC address identical to that of a client on another untrusted port. The intruder acquires the DHCP lease, which results in changes to the entries in the DHCP snooping table. Subsequently, what would have been valid ARP requests from the legitimate client are blocked.

To protect against this type of alteration of the DHCP snooping database, configure MAC addresses that are explicitly allowed on the interface. See [“Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks”](#) on page 462.

Protection Against DHCP Starvation Attacks

In a DHCP starvation attack, an attacker floods an Ethernet LAN with DHCP requests from spoofed (counterfeit) MAC addresses so that the switch's trusted DHCP servers cannot keep up with requests from legitimate DHCP clients on the switch. The address space of those servers is completely used up, so they can no longer assign IP addresses and lease times to clients. DHCP requests from those clients are either dropped—that is, the result is a denial of service (DoS)—or directed to a rogue DHCP server set up by the attacker to impersonate a legitimate DHCP server on the LAN.

To protect the switch from DHCP starvation attacks, use the MAC limiting feature. Specify the maximum number of MAC addresses that the switch can learn on the access interfaces to which those clients connect. The switch's DHCP server or servers will then be able to supply the specified number of IP addresses and leases to those clients and no more. If a DHCP starvation attack occurs after the maximum number of IP addresses has been assigned, the attack will fail. See [“Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks”](#) on page 452.



NOTE: For additional protection, you can configure learned MAC addresses on each interface to persist across restarts of the switch by enabling persistent MAC learning. This persistent MAC learning both helps to prevent traffic loss after a restart and ensures that even after a restart or an interface-down event, the persistent MAC addresses are re-entered into the forwarding database rather than the switch learning new MAC addresses.

Related Documentation

- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
- [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches on page 343](#)
- [Understanding Trusted DHCP Servers for Port Security on page 537](#)
- [Configuring Port Security \(CLI Procedure\) on page 284](#)
- [Configuring Port Security \(J-Web Procedure\)](#)

Overview of Access Port Protection

Port security features can protect a switch against various types of attacks. Protection methods against some common attacks are:

- [Mitigation of Ethernet Switching Table Overflow Attacks on page 271](#)
- [Mitigation of Rogue DHCP Server Attacks on page 271](#)
- [Protection Against ARP Spoofing Attacks on page 272](#)

- [Protection Against DHCP Snooping Database Alteration Attacks on page 272](#)
- [Protection Against DHCP Starvation Attacks on page 272](#)

Mitigation of Ethernet Switching Table Overflow Attacks

In an overflow attack on an Ethernet switching table, an intruder sends so many requests from new MAC addresses that the table cannot learn all the addresses. The attack forces the switch to send broadcast messages when it needs to send traffic to addresses for which it lacks MAC addresses. In addition to generating unnecessary traffic, the attacker might be able to sniff the broadcast packets.

To mitigate such attacks, you can configure a limit for learned MAC addresses or allow only specific MAC addresses. Use the MAC limit feature to control the total number of MAC addresses that can be added to the Ethernet switching table for the specified interface or interfaces. By setting the MAC addresses that are explicitly allowed, you ensure that the addresses of network devices whose network access is critical are guaranteed to be included in the Ethernet switching table.

Mitigation of Rogue DHCP Server Attacks

By default, all access ports are untrusted, and all trunk ports are trusted with regard to DHCP. Trusted ports allow DHCP servers to provide IP addresses and other information to requesting devices. If someone connects an unauthorized DHCP server to a trusted port, the unauthorized server can start issuing IP addresses and configuration information to the network's DHCP clients. The information provided to the clients by this server can disrupt their network access. The unauthorized server might also assign itself as the default gateway device for the network. An attacker can then sniff the network traffic and perpetrate a man-in-the-middle attack—that is, it misdirects traffic intended for a legitimate network device to a device of its choice.

To mitigate this problem, set the interface to which the unauthorized server is connected as untrusted. That action blocks all ingress DHCP server messages from that interface.



NOTE: The switch logs all DHCP server packets that are received on untrusted ports. For example:

```
5 untrusted DHCPOFFER received, interface xe-0/0/2.0[65], vlan v1[10] server
ip/mac 12.12.12.1/00:00:00:00:01:12 offer ip/client mac
12.12.12.253/00:AA:BB:CC:DD:01
```

You can use these messages to detect unauthorized DHCP servers on the network.



NOTE: If you attach a DHCP server to an access port, you must configure the port as trusted.

Protection Against ARP Spoofing Attacks

In ARP spoofing, an attacker sends faked ARP messages on the network. The attacker associates its own MAC address with the IP address of a network device connected to the switch. Any traffic sent to that IP address is instead sent to the attacker. Now the attacker can create various types of problems, including sniffing the packets that were meant for another host and perpetrating man-in-the middle attacks. (In a man-in-the-middle attack, the attacker intercepts messages between two hosts, reads them, and perhaps alters them, all without the original hosts knowing that their communications have been compromised.)

To protect against ARP spoofing on your switch, enable both DHCP snooping and dynamic ARP inspection (DAI). DHCP snooping builds and maintains the DHCP snooping table. That table contains the MAC addresses, IP addresses, lease times, binding types, VLAN information, and interface information for the untrusted interfaces on the switch. DAI uses the information in the DHCP snooping table to validate ARP packets. Invalid ARP packets are blocked, and when they are blocked, a system log message is recorded that includes the type of ARP packet and the sender's IP address and MAC address.

See [“Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks”](#) on page 456.

Protection Against DHCP Snooping Database Alteration Attacks

In an attack designed to alter the DHCP snooping database, an intruder introduces a DHCP client on one of the switch's untrusted access interfaces that has a MAC address identical to that of a client on another untrusted port. The intruder acquires the DHCP lease, which results in changes to the entries in the DHCP snooping table. Subsequently, what would have been valid ARP requests from the legitimate client are blocked.

To protect against this type of alteration of the DHCP snooping database, configure MAC addresses that are explicitly allowed on the interface. See [“Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks”](#) on page 462.

Protection Against DHCP Starvation Attacks

In a DHCP starvation attack, an attacker floods an Ethernet LAN with DHCP requests from spoofed (counterfeit) MAC addresses so that trusted DHCP servers cannot keep up with requests from legitimate DHCP clients. The address space of those servers is completely used up, so they can no longer assign IP addresses and lease times to clients. DHCP requests from those clients are either dropped—that is, the result is a denial of service (DoS)—or directed to a rogue DHCP server set up by the attacker to imitate a legitimate DHCP server.

To protect the switch from DHCP starvation attacks, use the MAC limiting feature. Specify the maximum number of MAC addresses that the switch can learn on the access interfaces to which DHCP clients connect. The DHCP server or servers can then supply only the specified number of IP addresses over each of those interfaces. If a DHCP starvation attack occurs after the maximum number of IP addresses has been assigned, the attack fails.

- Related Documentation**
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299](#)
 - [Configuring MAC Limiting on page 434](#)
 - [Verifying That MAC Limiting Is Working Correctly on page 442](#)
 - [Understanding DHCP Option 82 for Port Security on page 310](#)
 - [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)

Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices

DHCP snooping enables the switching device, which can be either a switch or a router, to monitor DHCP messages received from untrusted devices connected to the switching device. When DHCP snooping is enabled on a VLAN, the system examines DHCP messages sent from untrusted hosts associated with the VLAN and extracts their IP addresses and lease information. This information is used to build and maintain the DHCP snooping database. Only hosts that can be verified using this database are allowed access to the network.

- [DHCP Snooping Basics on page 273](#)
- [DHCP Snooping Process on page 274](#)
- [DHCPv6 Snooping on page 275](#)
- [Rapid Commit for DHCPv6 on page 276](#)
- [DHCP Server Access on page 276](#)
- [Static IP Address Additions to the DHCP Snooping Database on page 279](#)
- [Snooping DHCP Packets That Have Invalid IP Addresses on page 279](#)
- [Prioritizing Snooped Packets on page 280](#)

DHCP Snooping Basics

The Dynamic Host Configuration Protocol (DHCP) allocates IP addresses dynamically, *leasing* addresses to devices so that the addresses can be reused when no longer needed. Hosts and end devices that require IP addresses obtained through DHCP must communicate with a DHCP server across the LAN.

DHCP snooping acts as a guardian of network security by keeping track of valid IP addresses assigned to downstream network devices by a trusted DHCP server (the server is connected to a trusted network port).

By default, all trunk ports on the switch are trusted and all access ports are untrusted for DHCP snooping.

When DHCP snooping is enabled, the lease information from the switching device is used to create the DHCP snooping table, also known as the binding table. The table shows the IP-MAC binding, as well as the lease time for the IP address, type of binding, VLAN name, and interface for each host.



NOTE: DHCP snooping is disabled in the default configuration of the switching device. You must explicitly enable DHCP snooping by setting `examine-dhcp` at the `[edit ethernet-switching-options secure-access-port]` hierarchy level.

Entries in the DHCP snooping database are updated in these events:

- When a DHCP client releases an IP address (sends a DHCPRELEASE message). In this event, the associated mapping entry is deleted from the database.
- If you move a network device from one VLAN to another. In this event, typically the device needs to acquire a new IP address. Therefore, its entry in the database, including its VLAN ID, is updated.
- When the lease time (timeout value) assigned by the DHCP server expires. In this event, the associated entry is deleted from the database.



TIP: By default, the IP-MAC bindings are lost when the switching device is rebooted and DHCP clients (the network devices, or hosts) must reacquire bindings. However, you can configure the bindings to persist by setting the `dhcp-snooping-file` statement to store the database file either locally or remotely.

You can configure the switching device to snoop DHCP server responses from particular VLANs only. This prevents spoofing of DHCP server messages.

You configure DHCP snooping per VLAN, not per interface (port). DHCP snooping is disabled by default on switching devices.

DHCP Snooping Process

The basic process of DHCP snooping consists of the following steps:



NOTE: When DHCP snooping is enabled for a VLAN, all DHCP packets sent from the network devices in that VLAN are subjected to DHCP snooping. The final IP-MAC binding occurs when the DHCP server sends DHCPACK to the DHCP client.

1. The network device sends a DHCPDISCOVER packet to request an IP address.
2. The switching device forwards the packet to the DHCP server.
3. The server sends a DHCPOFFER packet to offer an address. If the DHCPOFFER packet is from a trusted interface, the switching device forwards the packet to the DHCP client.

4. The network device sends a DHCPREQUEST packet to accept the IP address. The switching device adds an IP-MAC placeholder binding to the database. The entry is considered a placeholder until a DHCPACK packet is received from the server. Until then, the IP address could still be assigned to some other host.
5. The server sends a DHCPACK packet to assign the IP address or a DHCPNAK packet to deny the address request.
6. The switching device updates the DHCP snooping database according to the type of packet received:
 - If the switching device receives a DHCPACK packet, it updates lease information for the IP-MAC bindings in its database.
 - If the switching device receives a DHCPNACK packet, it deletes the placeholder.



NOTE: The DHCP snooping database is updated only after the DHCPREQUEST packet has been sent.

For general information about the messages that the DHCP client and DHCP server exchange during the assignment of an IP address for the client, see the *Junos OS Administration Library*.

DHCPv6 Snooping

DHCPv6 snooping is the equivalent of DHCP snooping for IPv6. The process for DHCPv6 snooping is similar to that for DHCP snooping, but uses different names for the messages exchanged between the client and server to assign IPv6 addresses. [Table 10 on page 275](#) shows DHCPv6 messages and their DHCP equivalents.

Table 10: DHCPv6 Messages and Equivalent DHCPv4 Messages

Sent by	DHCPv6 Messages	Equivalent DHCP Messages
Client	SOLICIT	DHCPDISCOVER
Server	ADVERTISE	DHCPOFFER
Client	REQUEST, RENEW, REBIND	DHCPREQUEST
Server	REPLY	DHCPACK/DHCPNAK
Client	RELEASE	DHCPRELEASE
Client	INFORMATION-REQUEST	DHCPINFORM
Client	DECLINE	DHCPDECLINE
Client	CONFIRM	none

Table 10: DHCPv6 Messages and Equivalent DHCPv4 Messages (continued)

Sent by	DHCPv6 Messages	Equivalent DHCP Messages
Server	RECONFIGURE	DHCPFORCERENEW
Client	RELAY-FORW, RELAY-REPLY	none

Rapid Commit for DHCPv6

DHCPv6 provides for a Rapid Commit option (DHCPv6 option 14), which, when supported by the server and set by the client, shortens the exchange from a four-way relay to a two-message handshake. For more information about enabling the Rapid Commit option, see [“Enabling DHCPv6 Rapid Commit Support” on page 315](#).

In the rapid commit process:

1. The DHCPv6 client sends out a SOLICIT message that contains a request that rapid assignment of address, prefix, and other configuration parameters be preferred.
2. If the DHCPv6 server supports rapid assignment, it responds with a REPLY message, which contains the assigned IPv6 address and prefix and other configuration parameters.

DHCP Server Access

You can configure a switching device’s access to the DHCP server in three ways:

- [Switching Device, DHCP Clients, and DHCP Server Are All on the Same VLAN on page 276](#)
- [Switching Device Acts as DHCP Server on page 277](#)
- [Switching Device Acts as Relay Agent on page 278](#)

Switching Device, DHCP Clients, and DHCP Server Are All on the Same VLAN

When the switching device, DHCP clients, and DHCP server are *all members of the same VLAN*, the DHCP server can be connected to the switching device in one of two ways:

- The server is directly connected to the same switching device as the one connected to the DHCP clients (the hosts, or network devices, that are requesting IP addresses from the server). The VLAN is enabled for DHCP snooping to protect the untrusted access ports. The trunk port is configured by default as a trusted port. See [Figure 13 on page 277](#).
- The server is connected to an intermediary switching device (Switching Device 2). The DHCP clients are connected to Switching Device 1, which is connected through a trunk port to Switching Device 2. Switching Device 2 is being used as a transit device. The VLAN is enabled for DHCP snooping to protect the untrusted access ports. The trunk port is configured by default as a trusted port. As shown in [Figure 14 on page 277](#), ge-0/0/11 is a trusted trunk port.

Figure 13: DHCP Server Connected Directly to a Switching Device


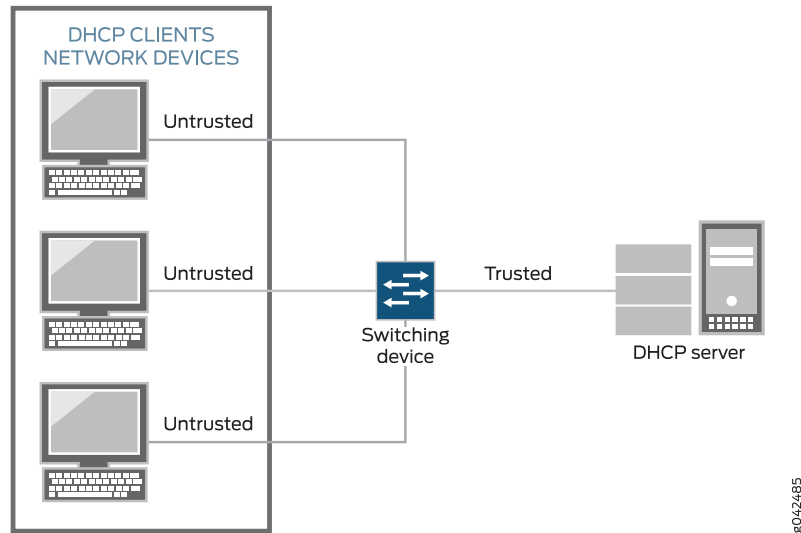


Figure 14: DHCP Server Connected Directly to Switching Device 2, with Switching Device 2 Connected to Switching Device 1 Through a Trusted Trunk Port




Switching Device Acts as DHCP Server

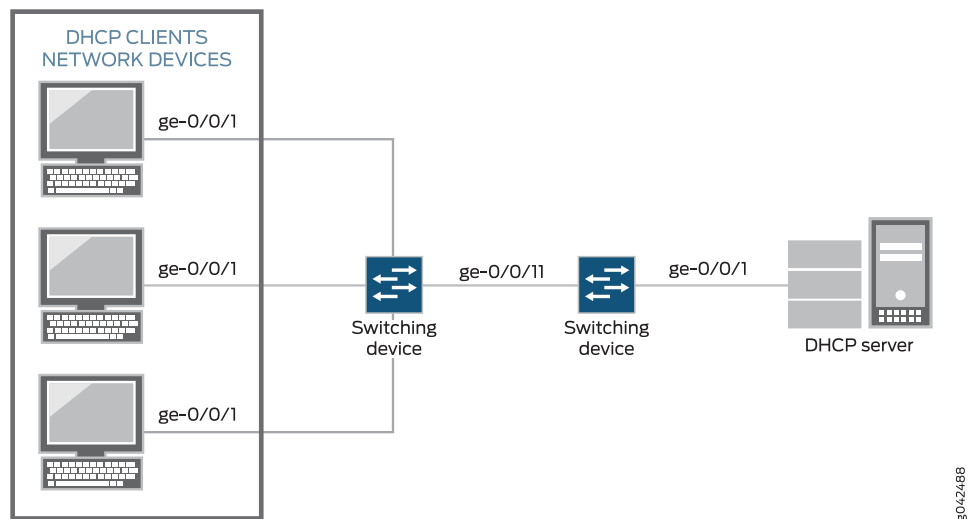

NOTE: The switching device acting as a DHCP server is not supported on the QFX Series.

The switching device itself is configured as a DHCP server; this is known as a *local configuration*. See [Figure 15 on page 278](#).

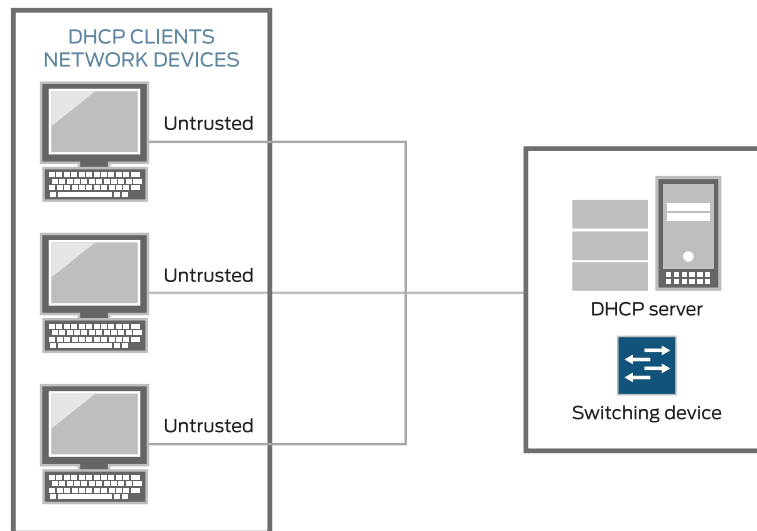Figure 15: Switching Device Is the DHCP Server


Switching Device Acts as Relay Agent

The switching device functions as a relay agent when the DHCP clients or the DHCP server is connected to the device through a Layer 3 interface. The Layer 3 interfaces on the switching device are configured as routed VLAN interfaces (RVIs), which are also known as integrated routing and bridging (IRB) interfaces. The trunk interfaces are trusted by default.

These two scenarios illustrate the switching device acting as a relay agent:

- The DHCP server and clients are in different VLANs.
- The switching device is connected to a router that is in turn connected to the DHCP server. See [Figure 16 on page 279](#).

Figure 16: Switching Device Acting as Relay Agent Through Router to DHCP Server

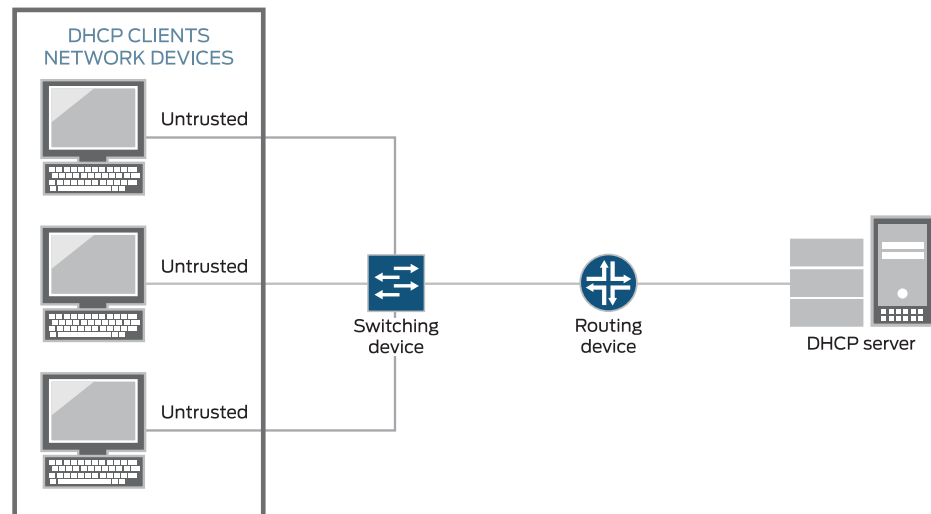

8042487

Static IP Address Additions to the DHCP Snooping Database

You can add specific static IP addresses to the database as well as have the addresses dynamically assigned through DHCP snooping. To add static IP addresses, you supply the IP address, the MAC address of the device, the interface on which the device is connected, and the VLAN with which the interface is associated. No lease time is assigned to the entry. The statically configured entry never expires.

Snooping DHCP Packets That Have Invalid IP Addresses

If you enable DHCP snooping on a VLAN and then devices on that VLAN send DHCP packets that request invalid IP addresses, these invalid IP addresses are stored in the DHCP snooping database until they are deleted when their default timeout is reached. To eliminate this unnecessary consumption of space in the DHCP snooping database, the switching device drops the DHCP packets that request invalid IP addresses, preventing the snooping of these packets. The invalid IP addresses are:

- 0.0.0.0
- 128.0.x.x
- 191.255.x.x
- 192.0.0.x
- 223.255.255.x
- 224.x.x.x
- 240.x.x.x to 255.255.255.255

Prioritizing Snooped Packets



NOTE: Prioritizing snooped packets is not supported on the QFX Series and the EX4600 switch.

You can use class-of-service (CoS) forwarding classes and queues to prioritize DHCP snooped packets for a specified VLAN. This type of configuration places the DHCP snooped packets for that VLAN in a specified egress queue, so that the security procedure does not interfere with the transmission of high-priority traffic.

Related Documentation

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Understanding Trusted DHCP Servers for Port Security on page 537](#)
- [Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases \(CLI Procedure\) on page 550](#)
- [Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers \(CLI Procedure\) on page 549](#)

Monitoring Port Security

Purpose



NOTE: This topic applies only to the J-Web Application package.

Use the monitoring functionality to view these port security details:

- DHCP snooping database for a VLAN or all VLANs
- ARP inspection details for all interfaces

Action To monitor port security in the J-Web interface, select **Monitor > Security > Port Security**.

To monitor and manipulate the DHCP snooping database and ARP inspection statistics in the CLI, enter the following commands:

- **show dhcp snooping binding**
- **clear dhcp snooping binding**—In addition to clearing the whole database, you can clear database entries for specified VLANs or MAC addresses.
- **show arp inspection statistics**
- **clear arp inspection statistics**



NOTE: On EX4300 switches, to monitor and manipulate the DHCP snooping database and ARP inspection statistics in the CLI, enter the following commands:

- **show dhcp-security binding**
- **clear dhcp-security binding**—In addition to clearing the whole database, you can clear database entries for specified VLANs or IP Address.
- **show dhcp-security arp inspection statistics**
- **clear arp inspection statistics**

Meaning The J-Web Port Security Monitoring page comprises two sections:

- **DHCP Snooping Details**—Displays the DHCP snooping database for all the VLANs for which DHCP snooping is enabled. To view the DHCP snooping database for a specific VLAN, select the specific VLAN from the list.
- **ARP Inspection Details**—Displays the ARP inspection details for all interfaces. The information includes details of the number of packets that passed ARP inspection and the number of packets that failed the inspection. The pie chart graphically represents these statistics when you select an interface. To view ARP inspection statistics for a specific interface, select the interface from the list.

You can use the following options on the page to clear DHCP snooping and ARP inspection details:

- **Clear All**—Clears the DHCP snooping database, either for all VLANs if the option **ALL** has been selected in the Select VLANs list or for the specific VLAN that has been selected in that list.
- **Clear**—Deletes a specific IP address from the DHCP snooping database.

To clear ARP inspection details on the page, click **Clear All** in the ARP inspection details section.



NOTE: Clear All button in the ARP inspection details section is not supported on EX4300 switches.

Use the CLI commands to show and clear DHCP snooping database and ARP inspection statistics details.

Related Documentation

- [Configuring Port Security \(CLI Procedure\) on page 284](#)
- [Configuring Port Security \(J-Web Procedure\)](#)

- [Example: Configuring Basic Port Security Features on page 289](#)

Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity

Ethernet LANs are vulnerable to attacks such as address spoofing (forging) and Layer 2 denial of service (DoS) on network devices. Port security features help protect the access ports on your device against the loss of information and productivity that such attacks can cause.

The Juniper Networks Junos operating system (Junos OS) provides features to help secure ports on a device. Ports can be categorized as either trusted or untrusted. You apply policies appropriate to each category to protect ports against various types of attacks.

Basic port security features are enabled in the device's default configuration. You can configure additional features with minimal configuration steps.

Depending on the particular feature, you can configure the feature either on VLANs or bridge domain interfaces.

Port security features supported on switching devices are:

- DHCP snooping—Filters and blocks ingress Dynamic Host Configuration Protocol (DHCP) server messages on untrusted ports, and builds and maintains a database of DHCP lease information, which is called the DHCP snooping database.



NOTE: DHCP snooping is not enabled in the default configuration of the switching device. DHCP snooping is enabled on a VLAN or bridge domain. The details of enabling DHCP snooping depend on the particular device.

- DHCPv6 snooping—DHCP snooping for IPv6.
- DHCP option 82—Also known as the DHCP Relay Agent Information option. This DHCPv4 feature helps protect the switching device against attacks such as spoofing of IP addresses and MAC addresses and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.
- DHCPv6 option 37—Option 37 is the remote ID option for DHCPv6 and is used to insert information about the network location of the remote host into DHCPv6 packets. You enable option 37 on a VLAN.



NOTE: DHCPv6 snooping with option 37 is not supported on the MX Series.

- DHCPv6 option 18—Option 18 is the circuit ID option for DHCPv6 and is used to insert information about the client port into DHCPv6 packets. This option includes other details that can be optionally configured, such as the prefix and the interface description.

- DHCPv6 option 16—Option 16 is the vendor ID option for DHCPv6 and is used to insert information about the vendor of the client hardware into DHCPv6 packets.
- Dynamic ARP inspection (DAI)—Prevents Address Resolution Protocol (ARP) spoofing attacks. ARP requests and replies are compared against entries in the DHCP snooping database, and filtering decisions are made on the basis of the results of those comparisons. You enable DAI on a VLAN.
- IPv6 neighbor discovery inspection—Prevents IPv6 address spoofing attacks. Neighbor discovery requests and replies are compared against entries in the DHCPv6 snooping database, and filtering decisions are made on the basis of the results of those comparisons. You enable neighbor discovery inspection on a VLAN.
- IP source guard—Mitigates the effects of IP address spoofing attacks on the Ethernet LAN. With IP source guard enabled, the source IP address in the packet sent from an untrusted access interface is validated against the DHCP snooping database. If the packet cannot be validated, it is discarded. You enable IP source guard on a VLAN or bridge domain.
- IPv6 source guard—IP source guard for IPv6.
- MAC limiting—Protects against flooding of the Ethernet switching table (also known as the MAC forwarding table or Layer 2 forwarding table). You can enable MAC limiting on an interface.
- MAC move limiting—Tracks MAC movement and detects MAC spoofing on access ports. You enable this feature on a VLAN or bridge domain.
- Persistent MAC learning—Also known as sticky MAC. Persistent MAC learning enables interfaces to retain dynamically learned MAC addresses across switch reboots. You enable this feature on an interface.
- Trusted DHCP server—Configuring the DHCP server on a trusted port protects against rogue DHCP servers sending leases. You enable this feature on an interface (port). By default, access ports are untrusted, and trunk ports are trusted. (Access ports are the switch ports that connect to Ethernet endpoints such as user PCs and laptops, servers, and printers. Trunk ports are the switch ports that connect an Ethernet switch to other switches or to routers.)

**Related
Documentation**

- [Understanding Access Control on Switches on page 266](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
- [Understanding DHCP Snooping for Port Security on page 516](#)
- [Understanding IPv6 Neighbor Discovery Inspection on page 319](#)
- [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)
- [Understanding IP Source Guard for Port Security on Switches on page 615](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches on page 343](#)

- [Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524](#)

Configuring Port Security (CLI Procedure)

Ethernet LANs are vulnerable to attacks such as address spoofing and Layer 2 denial of service (DoS) on network devices. Port security features such as DHCP snooping, DAI (dynamic ARP inspection), MAC limiting, MAC move limiting, and persistent MAC learning, as well as trusted DHCP server, help protect the access ports on the switch against the loss of information and productivity that such attacks can cause.

Depending on the particular feature, you can configure the port security feature either on:

- VLANs—A specific VLAN or all VLANs
- Interfaces—A specific interface or all interfaces



NOTE: If you configure one of the port security features on all VLANs or all interfaces, the switch software enables that port security feature on all VLANs and all interfaces that are not explicitly configured with other port security features.

However, if you do explicitly configure one of the port security features on a specific VLAN or on a specific interface, you must explicitly configure any additional port security features that you want to apply to that VLAN or interface. Otherwise, the switch software automatically applies the default values for the feature.

For example, if you disable DHCP snooping on all VLANs and decide to explicitly enable IP source guard only on a specific VLAN, you must also explicitly enable DHCP snooping on that specific VLAN. Otherwise, the default value of no DHCP snooping applies to that VLAN.

To configure port security features by using the CLI:

- [Enabling DHCP Snooping on page 285](#)
- [Enabling Dynamic ARP Inspection \(DAI\) on page 285](#)
- [Enabling IPv6 Neighbor Discovery Inspection on page 285](#)
- [Limiting Dynamic MAC Addresses on an Interface on page 286](#)
- [Enabling Persistent MAC Learning on an Interface on page 286](#)
- [Limiting MAC Address Movement on page 286](#)
- [Restricting a VoIP Client MAC Address in a VoIP VLAN on page 286](#)
- [Configuring Trusted DHCP Servers on an Interface on page 287](#)

Enabling DHCP Snooping

You can configure DHCP snooping to enable the device to monitor DHCP messages received, ensure that hosts use only the IP addresses that are assigned to them, and allow access only to authorized DHCP servers.

To enable DHCP snooping:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name examine-dhcp
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all examine-dhcp
```

To enable DHCPv6 snooping:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name examine-dhcpv6
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all examine-dhcpv6
```

Enabling Dynamic ARP Inspection (DAI)

You can enable DAI to protect against ARP snooping. To enable DAI:

- On a single VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name arp-inspection
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all arp-inspection
```

Enabling IPv6 Neighbor Discovery Inspection

You can enable neighbor discovery inspection to protect against IPv6 address spoofing.

- To enable neighbor discovery on a single VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name neighbor-discovery-inspection
```

- To enable neighbor discovery on all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all neighbor-discovery-inspection
```

Limiting Dynamic MAC Addresses on an Interface

Limit the number of dynamic MAC addresses allowed on an interface and specify the action to take if the limit is exceeded:

- On a single interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name mac-limit limit action action
```

- On all interfaces:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all mac-limit limit action action
```

Enabling Persistent MAC Learning on an Interface

You can configure learned MAC addresses to persist on an interface across restarts of the switch:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name persistent-learning
```

Limiting MAC Address Movement

You can limit the number of times a MAC address can move from its original interface in 1 second:

- On a single VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name mac-move-limit limit action action
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all mac-move-limit limit action action
```

Restricting a VoIP Client MAC Address in a VoIP VLAN

To restrict a VoIP client MAC address from being learned in a configured VoIP VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name voip-mac-exclusive
```

Any MAC address learned on that interface for the VoIP VLAN is not learned on a data VLAN with that same interface. If a MAC address has been learned on a data VLAN

interface and then the MAC address is learned on a VoIP VLAN with that same interface, the MAC address is removed from the data VLAN interface.

Configuring Trusted DHCP Servers on an Interface

Configure a trusted DHCP server on an interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name dhcp-trusted
```

Related Documentation

- [Configuring Port Security \(J-Web Procedure\)](#)
- [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Monitoring Port Security on page 280](#)
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [secure-access-port on page 964](#)

Configuring Port Security Features



NOTE: The features described are supported on EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Configuring Port Security \(CLI Procedure\)” on page 284](#). For ELS details, see [Using the Enhanced Layer 2 Software CLI](#).

Ethernet LANs are vulnerable to attacks such as address spoofing and Layer 2 denial of service (DoS) on network devices. DHCP port security features help protect the access ports on the switch against the losses of information and productivity that can result from such attacks.

The following port security features are supported for DHCPv4:

- DHCP snooping
- Dynamic ARP inspection (DAI)
- IP source guard
- DHCP option 82

The following port security features are supported for DHCPv6:

- DHCPv6 snooping
- IPv6 Neighbor discovery inspection
- IPv6 source guard
- DHCPv6 option 37, option 18 and option 16

DHCP snooping and DHCPv6 snooping are disabled by default on any VLAN. No explicit CLI configuration is used to enable DHCP snooping or DHCPv6 snooping. When you configure any of the port security features for a VLAN at the **[edit vlans *vlan-name* forwarding-options dhcp-security]** hierarchy level, DHCP snooping and DHCPv6 snooping are automatically enabled on that VLAN.



NOTE: Starting in Junos OS Release 14.1X53-D47 and 15.1R6, you can enable DHCP snooping or DHCPv6 snooping on a VLAN without configuring other port security features by configuring the `dhcp-security` CLI statement at the **[edit vlans *vlan-name* forwarding-options]** hierarchy level.

DAI, IPv6 neighbor discovery inspection, IP source guard, IPv6 source guard, DHCP option 82 and DHCPv6 options are configured per VLAN. You must configure a VLAN before configuring these DHCP port security features. See *Configuring VLANs for EX Series Switches with ELS Support (CLI Procedure)*.

The DHCP port security features that you specify for the VLAN apply to all the interfaces included within that VLAN. However, you can assign different attributes to an access interface or a group of access interfaces within the VLAN. The access interface or interfaces must first be configured as a group using the `group` statement at the **[edit vlans *vlan-name* forwarding-options dhcp-security]** hierarchy level. A group must have at least one interface.



NOTE: Configuring a group of access interfaces on a VLAN at the **[edit vlans *vlan-name* forwarding-options dhcp-security]** hierarchy level automatically enables DHCP snooping for all interfaces in the VLAN.

Attributes that can be specified for access interfaces using the `group` statement are:

- Specifying that the interface have a static IP-MAC address (`static-ip` or `static-ipv6`)
- Specifying an access interface to act as a trusted interface to a DHCP server (`trusted`)
- Specifying an interface not to transmit DHCP option 82 (`no-option82`) or DHCPv6 options (`no-option37`)



NOTE: Trunk interfaces are trusted by default. However, on an EX9200 switch, you can override this default behavior and set a trunk interface as `untrusted`.

For additional details, see:

- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 638](#)
- [Enabling IPv6 Neighbor Discovery Inspection on page 321](#)
- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)

You can override the general port security settings for the VLAN by configuring a group of access interfaces within that VLAN. For details, see:

- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 316](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 318](#)

**Related
Documentation**

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

Example: Configuring Basic Port Security Features

You can configure DHCP snooping, dynamic ARP inspection (DAI), MAC limiting, persistent MAC learning, and MAC move limiting on the access ports of switches to protect the switches and the Ethernet LAN against address spoofing and Layer 2 denial-of-service (DoS) attacks. You can also configure a trusted DHCP server and specific (allowed) MAC addresses for the switch interfaces.

This example describes how to configure basic port security features on a switch:

- [Requirements on page 289](#)
- [Overview and Topology on page 290](#)
- [Configuration on page 292](#)
- [Verification on page 293](#)

Requirements

This example uses the following hardware and software components:

- One EX Series or QFX Series.
- Junos OS Release 11.4 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure basic port security features, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:
 - *Configuring VLANs for EX Series Switches (CLI Procedure)*
 - *Configuring VLANs on Switches with Enhanced Layer 2 Support* for the QFX Series



NOTE: In this example, the DHCP server and its clients are all members of a single VLAN on the switch.

Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. To protect the devices from such attacks, you can configure:


- DHCP snooping to validate DHCP server messages
- DAI to protect against MAC spoofing
- MAC limiting to constrain the number of MAC addresses the switch adds to its MAC address cache
- MAC move limiting to help prevent MAC spoofing
- Persistent MAC learning (sticky MAC) to constrain the MAC addresses that can be learned on an interface to the first ones learned, even after a reboot of the switch
- Trusted DHCP server configured on a trusted port to protect against rogue DHCP servers sending leases

This example shows how to configure these security features on a switch connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch.

[Figure 17 on page 291](#) illustrates the topology for this example.

Figure 17: Network Topology for Basic Port Security

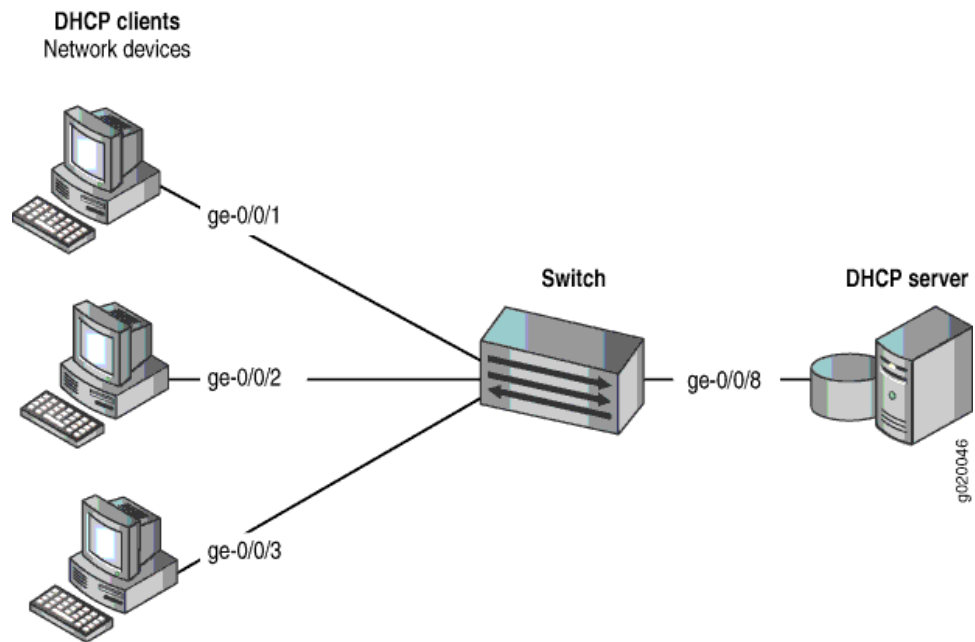

The components of the topology for this example are shown in [Table 11 on page 291](#).

Table 11: Components of the Port Security Topology

Properties	Settings
Switch hardware	One EX Series or QFX series switch
VLAN name and ID	employee-vlan , tag 20
VLAN subnets	192.0.2.16/28 192.0.2.17 through 192.0.2.30 192.0.2.31 is subnet's broadcast address
Interfaces in employee-vlan	ge-0/0/1 , ge-0/0/2 , ge-0/0/3 , ge-0/0/8
Interface for DHCP server	ge-0/0/8

In this example, the switch is initially configured with the default port security setup. In the default switch configuration:

- Secure port access is activated on the switch.
- DHCP snooping and DAI are disabled on all VLANs.
- All access ports are untrusted, and all trunk ports are trusted for DHCP snooping.

In the configuration tasks for this example, you set the DHCP server as trusted; you enable DHCP snooping, DAI, and MAC move limiting on a VLAN; you set a value for a MAC limit on some interfaces; you configure some specific (allowed) MAC addresses on an interface; and you configure persistent MAC learning on an interface.

Configuration

To configure basic port security on a switch whose DHCP server and client ports are in a single VLAN:

CLI Quick Configuration

To quickly configure basic port security on the switch, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/1 mac-limit 4
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
set interface ge-0/0/2 mac-limit 4
set interface ge-0/0/1 persistent-learning
set interface ge-0/0/8 dhcp-trusted
set vlan employee-vlan arp-inspection
set vlan employee-vlan examine-dhcp
set vlan employee-vlan mac-move-limit 5
```

Step-by-Step Procedure

Configure basic port security on the switch:

1. Enable DHCP snooping on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan examine-dhcp
```

2. Specify the interface (port) from which DHCP responses are allowed:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 dhcp-trusted
```

3. Enable dynamic ARP inspection (DAI) on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan arp-inspection
```

4. Configure a MAC limit of 4 and use the default action, **drop**. (Packets are dropped, and the MAC address is not added to the Ethernet switching table if the MAC limit is exceeded on the interfaces):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit 4
user@switch# set interface ge-0/0/2 mac-limit 4
```

5. Allow learned MAC addresses for a particular interface to persist across restarts of the switch and interface-down events by enabling persistent MAC learning:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 persistent-learning
```

6. Configure a MAC move limit of **5** and use the default action, **drop**. (Packets are dropped, and the MAC address is not added to the Ethernet switching table if a MAC address has exceeded the MAC move limit):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan mac-move-limit 5
```

7. Configure allowed MAC addresses:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
```

Results

Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/1.0 {
  mac-limit 4;
  persistent-learning;
}
interface ge-0/0/2.0 {
  allowed-mac [ 00:05:85:3a:82:80 00:05:85:3a:82:81 00:05:85:3a:82:83
    00:05:85:3a:82:85 00:05:85:3a:82:88 ];
  mac-limit 4;
}
interface ge-0/0/8.0 {
  dhcp-trusted;
}
vlan employee-vlan {
  arp-inspection
  examine-dhcp;
  mac-move-limit 5;
}
```

Verification

To confirm that the configuration is working properly:

- [Verifying That DHCP Snooping Is Working Correctly on the Switch on page 294](#)
- [Verifying That DAI Is Working Correctly on the Switch on page 294](#)
- [Verifying That MAC Limiting, MAC Move Limiting, and Persistent MAC Learning Are Working Correctly on the Switch on page 295](#)
- [Verifying That Allowed MAC Addresses Are Working Correctly on the Switch on page 296](#)

Verifying That DHCP Snooping Is Working Correctly on the Switch

Purpose Verify that DHCP snooping is working on the switch.

Action Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

MAC Address	IP Address	Lease	Type	VLAN	Interface
00:05:85:3A:82:77	192.0.2.17	600	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:79	192.0.2.18	653	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:80	192.0.2.19	720	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:81	192.0.2.20	932	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:83	192.0.2.21	1230	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:27:32:88	192.0.2.22	3200	dynamic	employee-vlan	ge-0/0/2.0

Meaning When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

If the DHCP server had been configured as untrusted, no entries would be added to the DHCP snooping database, and nothing would be shown in the output of the **show dhcp snooping binding** command.

Verifying That DAI Is Working Correctly on the Switch

Purpose Verify that DAI is working on the switch.

Action Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch> show arp inspection statistics
```

ARP inspection statistics:

Interface	Packets received	ARP inspection pass	ARP inspection failed
ge-0/0/1.0	7	5	2
ge-0/0/2.0	10	10	0
ge-0/0/3.0	12	12	0

Meaning The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

Verifying That MAC Limiting, MAC Move Limiting, and Persistent MAC Learning Are Working Correctly on the Switch

Purpose Verify that MAC limiting, MAC move limiting, and persistent MAC learning are working on the switch.

Action Suppose that two packets have been sent from hosts on **ge-0/0/1** and five packets from hosts on **ge-0/0/2**, with both interfaces set to a MAC limit of 4 with the default action **drop** and **ge-0/0/1** enabled for persistent MAC learning.

Display the MAC addresses learned:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 4 learned, 2 persistent entries
  VLAN          MAC address          Type          Age    Interfaces
  ---          -
employee-vlan   *                     Flood         -      All-members
employee-vlan   00:05:85:3A:82:77    Persistent    0      ge-0/0/1.0
employee-vlan   00:05:85:3A:82:79    Persistent    0      ge-0/0/1.0
employee-vlan   00:05:85:3A:82:80    Learn        0      ge-0/0/2.0
employee-vlan   00:05:85:3A:82:81    Learn        0      ge-0/0/2.0
employee-vlan   00:05:85:3A:82:83    Learn        0      ge-0/0/2.0
employee-vlan   00:05:85:3A:82:85    Learn        0      ge-0/0/2.0
```

Now suppose packets have been sent from two of the hosts on **ge-0/0/2** after they have been moved to other interfaces more than five times in 1 second, with **employee-vlan** set to a MAC move limit of 5 with the default action **drop**.

Display the MAC addresses in the table:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 2 learned, 2 persistent entries
  VLAN          MAC address          Type          Age    Interfaces
  ---          -
employee-vlan   *                     Flood         -      All-members
employee-vlan   00:05:85:3A:82:77    Persistent    0      ge-0/0/1.0
employee-vlan   00:05:85:3A:82:79    Persistent    0      ge-0/0/1.0
employee-vlan   00:05:85:3A:82:80    Learn        0      ge-0/0/2.0
employee-vlan   00:05:85:3A:82:81    Learn        0      ge-0/0/2.0
employee-vlan   *                     Flood         -      ge-0/0/2.0
employee-vlan   *                     Flood         -      ge-0/0/2.0
```

Meaning The first sample output shows that with a MAC limit of 4 for each interface, the fifth MAC address on **ge-0/0/2** was not learned because it exceeded the MAC limit. The second sample output shows that MAC addresses for three of the hosts on **ge-0/0/2** were not learned, because the hosts had been moved back more than five times in 1 second.

Interface **ge-0/0/1.0** was enabled for persistent MAC learning, so the MAC addresses associated with this interface are of the type **persistent**.

Verifying That Allowed MAC Addresses Are Working Correctly on the Switch

Purpose Verify that allowed MAC addresses are working on the switch.

Action Display the MAC cache information after five allowed MAC addresses have been configured on interface **ge-0/0/2**:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 5 entries, 4 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0

Meaning Because the MAC limit value for this interface has been set to 4, only four of the five configured allowed addresses are learned.

- Related Documentation**
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
 - [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 449](#)
 - [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 462](#)
 - [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
 - [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445](#)
 - [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452](#)
 - [Configuring Port Security \(CLI Procedure\) on page 284](#)
 - [secure-access-port on page 964](#)
 - [show arp inspection statistics on page 1108](#)
 - [show dhcp snooping binding on page 1154](#)
 - [show ethernet-switching table on page 1174](#)

Verifying That DHCP Snooping Is Working Correctly

Purpose Verify that DHCP snooping is working on the switch and that the DHCP snooping database is correctly populated with both dynamic and static bindings.

Action Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

MAC address	IP address	Lease (seconds)	Type	VLAN	Interface
00:05:85:3A:82:77	192.0.2.17	600	dynamic	employee	ge-0/0/1.0
00:05:85:3A:82:79	192.0.2.18	653	dynamic	employee	ge-0/0/1.0
00:05:85:3A:82:80	192.0.2.19	720	dynamic	employee	ge-0/0/2.0
00:05:85:3A:82:81	192.0.2.20	932	dynamic	employee	ge-0/0/2.0
00:05:85:3A:82:83	192.0.2.21	1230	dynamic	employee	ge-0/0/2.0
00:05:85:27:32:88	192.0.2.22	–	static	data	ge-0/0/4.0

Meaning When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires. Static IP addresses have no assigned lease time. The statically configured entry never expires.

If the DHCP server had been configured as untrusted, no entries would be added to the DHCP snooping database and nothing would be shown in the output of the **show dhcp snooping binding** command.

Related Documentation

- [Enabling DHCP Snooping \(CLI Procedure\) on page 504](#)
- [Enabling DHCP Snooping \(J-Web Procedure\)](#)
- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 533](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
- [Monitoring Port Security on page 280](#)
- [Troubleshooting Port Security](#)

Understanding MAC Limiting and MAC Move Limiting for Port Security

MAC limiting protects against flooding of the Ethernet switching table (also known as the MAC forwarding table or Layer 2 forwarding table). You enable this feature on Layer 2 interfaces (ports). MAC move limiting detects MAC movement and MAC spoofing on access interfaces. You enable this feature on VLANs.

- [MAC Limiting on page 299](#)
- [MAC Move Limiting on page 299](#)
- [Actions for MAC Limiting on page 300](#)
- [MAC Addresses That Exceed the MAC Limit or MAC Move Limit on page 300](#)

MAC Limiting

MAC limiting sets a limit on the number of MAC addresses that can be learned on a single Layer 2 access interface or on all the Layer 2 access interfaces on the switch. Junos OS provides two MAC limiting methods:

- Maximum number of MAC addresses—You configure the maximum number of dynamic MAC addresses allowed per interface. When the limit is exceeded, incoming packets with new MAC addresses can be ignored, dropped, or logged. You can also specify that the interface be shut down or temporarily disabled.
- Allowed MAC addresses—You configure specific “allowed” MAC addresses for the access interface. Any MAC address that is not in the list of configured addresses is not learned, and the switch logs an appropriate message. Allowed MAC binds MAC addresses to a VLAN so that the address does not get registered outside the VLAN. If an allowed MAC setting conflicts with a dynamic MAC setting, the allowed MAC setting takes precedence.



NOTE: If you do not want the system to log messages about invalid MAC addresses received by an interface that has been configured for allowed MAC addresses, disable the logging by configuring the `no-allowed-mac-log` statement.

You configure MAC limiting per interface, not per VLAN. You can specify the maximum number of dynamic MAC addresses that can be learned on a single Layer 2 access interface (including tagged-access interfaces) or on all Layer 2 access interfaces.

MAC Move Limiting

MAC move limiting causes the switch to track the number of times a MAC address can move to a new interface (port). It can help to prevent MAC spoofing, and it can also detect and prevent loops.

If a MAC address moves more than the configured number of times within 1 second, the switch performs the configured action. You can configure MAC move limiting to apply to all VLANs or to a specific VLAN.



CAUTION: Mac move limiting does not work properly on a QFX5100 switch used as a Node device in a QFabric system. Do not use this feature on a QFX5100 switch in a QFabric system.

Actions for MAC Limiting

You can choose to have one of the following actions performed when the limit of MAC addresses or the limit of MAC moves is exceeded:

- **drop**—Drop the packet and generate a system log entry. This is the default.
- **log**—Do not drop the packet but generate a system log entry.
- **none**—Take no action.
- **shutdown**—Disable the interface and generate an alarm. If you configure the switch with the **port-error-disable** statement, the disabled interface recovers automatically upon expiration of the specified timeout. If this is not configured, you can bring up the disabled interfaces by running the **clear ethernet-switching port-error** command.

See descriptions of results of these various action settings in [“Verifying That MAC Limiting Is Working Correctly” on page 442](#).

If you set a MAC limit to apply to all interfaces on the switch, you can override that setting for a particular interface by specifying action **none**. See [mac-limit](#) for more information.

MAC Addresses That Exceed the MAC Limit or MAC Move Limit

If you have configured the **port-error-disable** statement, you can view which interfaces are temporarily disabled because the MAC limit or MAC move limit was exceeded. Use the **show ethernet-switching interfaces** command.

The log messages that indicate the MAC limit or MAC move limit has been exceeded include the offending MAC addresses.

Related Documentation

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Configuring MAC Limiting on page 434](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 350](#)
- [Verifying That MAC Limiting Is Working Correctly on page 442](#)
- [Verifying That MAC Move Limiting Is Working Correctly on page 306](#)
- [Example: Configuring Basic Port Security Features on page 289](#)

Verifying That MAC Limiting Is Working Correctly

MAC limiting protects against flooding of the Ethernet switching table.

Junos OS provides two methods for MAC limiting for port security:

- Maximum number of dynamic MAC addresses allowed—When the limit is exceeded, incoming packets with new MAC addresses are dropped.
- Specific allowed MAC addresses for the access interface—Any MAC address that is not in the list of configured addresses is not learned.

Junos OS also allows you to set a MAC limit on VLANs. However, setting a MAC limit on VLANs is not considered a port security feature, because the switch does not prevent incoming packets that cause the MAC limit to be exceeded from being forwarded; it only logs the MAC addresses of these packets..

To verify MAC limiting configurations:

1. [Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly on page 301](#)
2. [Verifying That MAC Limiting for a Specific Interface Within a Specific VLAN Is Working Correctly on page 302](#)
3. [Verifying That Allowed MAC Addresses Are Working Correctly on page 302](#)
4. [Verifying Results of Various Action Settings When the MAC Limit Is Exceeded on page 303](#)
5. [Customizing the Ethernet Switching Table Display to View Information for a Specific Interface on page 305](#)

Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly

Purpose Verify that MAC limiting for dynamic MAC addresses is working on the switch.

Action Display the MAC addresses that have been learned. The following sample output shows the results when two packets were sent from hosts on ge-0/0/1 and five packets requests were sent from hosts on ge-0/0/2, with both interfaces set to a MAC limit of 4 with the default action **drop**:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 6 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	*	Flood	-	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:77	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:79	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0

Meaning The sample output shows that with a MAC limit of 4 for each interface, the packet for a fifth MAC address on ge-0/0/2 was dropped because it exceeded the MAC limit. The

address was not learned, and thus an asterisk (*) rather than an address appears in the **MAC address** column in the first line of the sample output.

Verifying That MAC Limiting for a Specific Interface Within a Specific VLAN Is Working Correctly

Purpose Verify that MAC limiting for a specific interface based on its membership within a specific VLAN is working on the switch.

Action Display the detailed statistics for MAC addresses that have been learned:

```
user@switch> show ethernet-switching statistics mac-learning interface ge-0/0/28 detail
```

```
Interface: ge-0/0/28.0
Learning message from local packets: 0
Learning message from transit packets: 5
Learning message with error: 0
  Invalid VLAN: 0      Invalid MAC: 0
  Security violation: 0    Interface down: 0
  Incorrect membership: 0  Interface limit: 0
  MAC move limit: 0      VLAN limit: 0
                          VLAN membership limit: 20
  Invalid VLAN index: 0    Interface not learning: 0
  No nexthop: 0          MAC learning disabled: 0
  Others: 0
```

Meaning The **VLAN membership limit** shows the number of packets that were dropped because of the VLAN membership MAC limit for interface ge-0/0/28.0 was exceeded. In this case, 20 packets were dropped.

Verifying That Allowed MAC Addresses Are Working Correctly

Purpose Verify that allowed MAC addresses are working on the switch.

Action Display the MAC address cache information after allowed MAC addresses have been configured on an interface. The following sample shows the MAC address cache after 5 allowed MAC addresses were on interface ge-0/0/2. In this instance, the interface was also set to a dynamic MAC limit of 4 with the default action **drop**.

```
user@switch> show ethernet-switching table
Ethernet-switching table: 5 entries, 4 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0

Meaning Because the MAC limit value for this interface was set to 4, only four of the five configured allowed addresses were learned and thus added to the MAC address cache. Because the fifth address was not learned, an asterisk (*) rather than an address appears in the **MAC address** column in the last line of the sample output.

Verifying Results of Various Action Settings When the MAC Limit Is Exceeded

Purpose Verify the results provided by the various action settings for MAC limits—**drop**, **log**, **shutdown** and **none**—when the limits are exceeded.

Action Display the results of the various action settings.



NOTE: You can view log messages by using the **show log messages** command. You can also have the log messages displayed by configuring the monitor start messages with the **monitor start messages** command.

- **drop** action—For MAC limiting configured with a **drop** action and with the MAC limit set to 5:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 6 entries, 5 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	*	Flood	-	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:88	Learn	0	ge-0/0/2.0

- **log** action—For MAC limiting configured with a **log** action and with MAC limit set to 5:

```
user@switch> show ethernet-switching table
```

Ethernet-switching table: 74 entries, 73 learned

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	*	Flood	-	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:82	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:83	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:84	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:85	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:87	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:88	Learn	0	ge-0/0/2.0
. . .				

- **shutdown** action—For MAC limiting configured with a **shutdown** action and with MAC limit set to 3:

```
user@switch> show ethernet-switching table
```

Ethernet-switching table: 4 entries, 3 learned

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	*	Flood	-	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:82	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:84	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:87	Learn	0	ge-0/0/2.0

- **none** action—If you set a MAC limit to apply to all interfaces on the switch, you can override that setting for a particular interface by specifying this action for that interface. See [“Setting the none Action on an Interface to Override a MAC Limit Applied to All Interfaces \(CLI Procedure\)” on page 507](#).

Meaning For the **drop** action results—The sixth MAC address exceeded the MAC limit. The request packet for that address was dropped. Only five MAC addresses have been learned on ge-0/0/2.

For the **log** action results—The sixth MAC address exceeded the MAC limit. No MAC addresses were blocked.

For the **shutdown** action results—The fourth MAC address exceeded the MAC limit. Only three MAC addresses have been learned on ge-0/0/2. The interface ge-0/0/1 is shut down.

For more information about interfaces that have been shut down, use the **show ethernet-switching interfaces** command.

```
user@switch> show ethernet-switching interfaces
```

Interface	State	VLAN members	Tag	Tagging	Blocking
bme0.32770	down	mgmt		untagged	unblocked
ge-1/0/0.0	down	v1		untagged	MAC limit exceeded
ge-1/0/1.0	up	v1		untagged	unblocked

ge-1/0/2.0	up	v1	untagged unblocked
me0.0	up	mgmt	untagged unblocked



NOTE: You can configure the switch to recover automatically from this type of error condition by specifying the `port-error-disable` statement with a `disable timeout` value. The switch automatically restores the disabled interface to service when the disable timeout expires. The `port-error-disable` configuration does not apply to already existing error conditions. It impacts only error conditions that are detected after `port-error-disable` has been enabled and committed. To clear an already existing error condition and restore the interface to service, use the `clear ethernet-switching port-error` command.

Customizing the Ethernet Switching Table Display to View Information for a Specific Interface

Purpose You can use the `show ethernet-switching table` command to view information about the MAC addresses learned on a specific interface.

Action For example, to display the MAC addresses learned on ge-0/0/2 interface, type:

```
user@switch> show ethernet-switching table interface ge-0/0/2.0
Ethernet-switching table: 1 unicast entries
```

VLAN	MAC address	Type	Age	Interfaces
v1	*	Flood	-	All-members
v1	00:00:06:00:00:00	Learn	0	ge-2/0/0.0

Meaning The MAC limit value for ge-0/0/2 was set to 1, and the output shows that only one MAC address was learned and thus added to the MAC address cache. An asterisk (*) rather than an address appears in the **MAC address** column in the first line of the sample output.

- Related Documentation**
- [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
 - [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
 - [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 462](#)
 - [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445](#)
 - [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452](#)

- [Monitoring Port Security on page 280](#)

Verifying That MAC Move Limiting Is Working Correctly

Purpose Verify that MAC move limiting is working on the switch.

Action Display the MAC addresses in the Ethernet switching table when MAC move limiting has been configured for a VLAN. The following sample shows the results after two of the hosts on **ge-0/0/2** sent packets after the MAC addresses for those hosts had moved to other interfaces more than five times in 1 second. The VLAN, **employee-vlan**, was set to a MAC move limit of **5** with the action **drop**:

user@switch> [show ethernet-switching table](#)

```
Ethernet-switching table: 7 entries, 4 learned
```

VLAN	MAC address	Type	Age	Interfaces
employee-vlan	00:05:85:3A:82:77	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:79	Learn	0	ge-0/0/1.0
employee-vlan	00:05:85:3A:82:80	Learn	0	ge-0/0/2.0
employee-vlan	00:05:85:3A:82:81	Learn	0	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0
employee-vlan	*	Flood	-	ge-0/0/2.0

Meaning The last two lines of the sample output show that MAC addresses for two hosts on **ge-0/0/2** were not learned, because the hosts had been moved back and forth from the original interfaces more than five times in 1 second.

- Related Documentation**
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 350](#)
 - [Configuring MAC Move Limiting \(J-Web Procedure\)](#)
 - [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
 - [Example: Configuring Basic Port Security Features on page 289](#)
 - [Monitoring Port Security on page 280](#)

Understanding Trusted and Untrusted Ports

By default, all access ports are untrusted and all trunk ports are trusted in regard to DHCP. Trusted ports allow DHCP servers to provide IP addresses and other information to requesting devices. Untrusted ports drop traffic from DHCP servers to prevent unauthorized servers from providing any configuration information to clients.

If you attach a DHCP server to an access port, you must configure the port as trusted. Before you do so, ensure that the server is physically secure—that is, that access to the server is monitored and controlled.

- Related Documentation**
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
 - [Example: Configuring Basic Port Security Features on page 289](#)

Verifying That a Trusted DHCP Server Is Working Correctly

Purpose Verify that a DHCP trusted server is working on the switch. See what happens when the DHCP server is trusted and then untrusted.

Action Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

MAC Address	IP Address	Lease	Type	VLAN	Interface
00:05:85:3A:82:77	192.0.2.17	600	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:79	192.0.2.18	653	dynamic	employee-vlan	ge-0/0/1.0
00:05:85:3A:82:80	192.0.2.19	720	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:81	192.0.2.20	932	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:3A:82:83	192.0.2.21	1230	dynamic	employee-vlan	ge-0/0/2.0
00:05:85:27:32:88	192.0.2.22	3200	dynamic	employee-vlan	ge-0/0/2.0

Meaning When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

If the DHCP server had been configured as untrusted, no entries would be added to the DHCP snooping database and nothing would be shown in the output of the **show dhcp snooping binding** command.

- Related Documentation**
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 538](#)
 - [Enabling a Trusted Port for DHCP on page 456](#)
 - [Example: Configuring Basic Port Security Features on page 289](#)
 - [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 449](#)
 - [Monitoring Port Security on page 280](#)
 - [Troubleshooting Port Security](#)

Verifying That the Port Error Disable Setting Is Working Correctly

Purpose Verify that the port error disable setting is working as expected on MAC limited, MAC move limited, and rate-limited interfaces on an EX Series switch.

Action Display information about interfaces:

```
user@switch> show ethernet-switching interfaces
Interface  State  VLAN members  Blocking
ge-0/0/0.0  up    T1122         unblocked
ge-0/0/1.0  down  default       MAC limit exceeded
ge-0/0/2.0  down  default       MAC move limit exceeded
ge-0/0/3.0  down  default       Storm control in effect
ge-0/0/4.0  down  default       unblocked
ge-0/0/5.0  down  default       unblocked
ge-0/0/6.0  down  default       unblocked
ge-0/0/7.0  down  default       unblocked
ge-0/0/8.0  down  default       unblocked
ge-0/0/9.0  up    T111         unblocked
ge-0/0/10.0 down  default       unblocked
ge-0/0/11.0 down  default       unblocked
ge-0/0/12.0 down  default       unblocked
ge-0/0/13.0 down  default       unblocked
ge-0/0/14.0 down  default       unblocked
ge-0/0/15.0 down  default       unblocked
ge-0/0/16.0 down  default       unblocked
ge-0/0/17.0 down  default       unblocked
ge-0/0/18.0 down  default       unblocked
ge-0/0/19.0 up    T111         unblocked
ge-0/1/0.0  down  default       unblocked
ge-0/1/1.0  down  default       unblocked
ge-0/1/2.0  down  default       unblocked
ge-0/1/3.0  down  default       unblocked
```

Meaning The sample output from the **show ethernet-switching interfaces** command shows that three of the down interfaces specify the reason that the interface is disabled:

- **MAC limit exceeded**—The interface is temporarily disabled because of a MAC limit error. The disabled interface is automatically restored to service when the [disable-timeout](#) expires.

- **MAC move limit exceeded**—The interface is temporarily disabled because of a MAC move limit error. The disabled interface is automatically restored to service when the [disable-timeout](#) expires.
- **Storm control in effect**—The interface is temporarily disabled because of a storm control error. The disabled interface is automatically restored to service when the [disable-timeout](#) expires.

Related Documentation • [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)

Verifying That the Port Error Disable Setting Is Working Correctly

Purpose Verify that the port error disable setting is working as expected for MAC limited and storm control interfaces.

Action Display information about interfaces:

```
user@switch> show ethernet-switching interfaces
Interface      State    VLAN members    Blocking
xe-2:0/0/0.0   up       T1122           unblocked
xe-2:0/0/1.0   down     default         MAC limit exceeded
xe-2:0/0/2.0   down     default         Storm control in effect
xe-2:0/0/3.0   down     default         unblocked
xe-2:0/0/4.0   down     default         unblocked
xe-2:0/0/5.0   down     default         unblocked
xe-2:0/0/6.0   down     default         unblocked
```

Meaning For interfaces disabled by port security features, the sample output from the **show ethernet-switching interfaces** command specifies the reasons that the interfaces are disabled:

- **MAC limit exceeded**—The interface is temporarily disabled because of a [mac-limit](#) error. The disabled interface is automatically restored to service when the disable-timeout expires.
- **MAC move limit exceeded**—The interface is temporarily disabled because of a [mac-move-limit](#) error. The disabled interface is automatically restored to service when the disable-timeout expires.
- **Storm control in effect**—The interface is temporarily disabled because of a storm control error. The disabled interface is automatically restored to service when the disable-timeout expires.

Related Documentation • [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299](#)

Understanding DHCP Option 82 for Port Security

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Hosts on untrusted access interfaces on Ethernet LAN switches send requests for IP addresses in order to access the Internet. The switch forwards or relays these requests to DHCP servers, and the servers send offers for IP address leases in response. Attackers can use these messages to perpetrate address spoofing and starvation.

Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client. The Juniper Networks Junos operating system (Junos OS) implementation of DHCP option 82 supports RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

- [DHCP Option 82 Processing on page 310](#)
- [Suboption Components of Option 82 on page 311](#)
- [Configurations That Support Option 82 on page 311](#)

DHCP Option 82 Processing

If DHCP option 82 is enabled on the switch, then when a DHCP client that is connected to the switch on an untrusted interface sends a DHCP request, the switch inserts information about the client's network location into the packet header of that request. The switch then sends the request to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or another parameter for the client. See “[Suboption Components of Option 82](#)” on page 311 for details about option 82 information.

You can enable DHCP option 82 on a single VLAN or on all VLANs on the switch. You can also configure it on Layer 3 interfaces (in routed VLAN interfaces, or RVIs) when the switch is functioning as a relay agent.

When option 82 is enabled on the switch, then this sequence of events occurs when a DHCP client sends a DHCP request:

1. The switch receives the request and inserts the option 82 information in the packet header.
2. The switch forwards or relays the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response back to the switch. It does not alter the option 82 information.
4. The switch strips the option 82 information from the response packet.
5. The switch forwards the response packet to the client.



NOTE: To use the DHCP option 82 feature, you must ensure that the DHCP server is configured to accept option 82. If it is not configured to accept option 82, then when it receives requests containing option 82 information, it does not use the information in setting parameters and it does not echo the information in its response message.

Suboption Components of Option 82

When configuring DHCP option 82, you can use the following suboptions:

- **circuit ID**—Identifies the circuit (interface and/or VLAN) on the switch on which the request was received. The circuit ID contains the interface name and/or VLAN name, with the two elements separated by a colon—for example, `xe-0/0/10:vlan1`. If the request packet is received on a Layer 3 interface, the circuit ID is just the interface name—for example, `xe-0/0/10`.

Use the **prefix** option to add an optional prefix to the circuit ID. If you enable the **prefix** option, the hostname for the switch is used as the prefix; for example, `switch1:xe-0/0/10:vlan1`.

You can also specify that the interface description be used rather than the interface name and that the VLAN ID be used rather than the VLAN name.


- **remote ID**—Identifies the host. By default, the remote ID is the MAC address of the switch. You can specify that the remote ID be the hostname of the switch, the interface description, or a character string of your choice. You can also add an optional prefix to the remote ID.
- **vendor ID**—Identifies the vendor of the host. If you specify the **vendor-id** option but do not enter a value, the default value **Juniper** is used. To specify a value, you type a character string.

Configurations That Support Option 82

You can use option 82 with the following configurations:

- The DHCP client and the DHCP server are on the same VLAN. In this case the switch forwards the requests from the clients on untrusted access interfaces to the server on a trusted interface. For this configuration, you set DHCP option 82 at the **[edit ethernet-switching-options secure-access-port vlan]** hierarchy level.
- The DHCP client or the DHCP server is connected to the switch through a Layer 3 interface and the switch is configured to relay DHCP requests. [Figure 18 on page 312](#) illustrates a scenario for the switch-as-relay-agent; in this instance, the switch relays requests through a router to the server.

Figure 18: Switch Relays DHCP Requests to Server

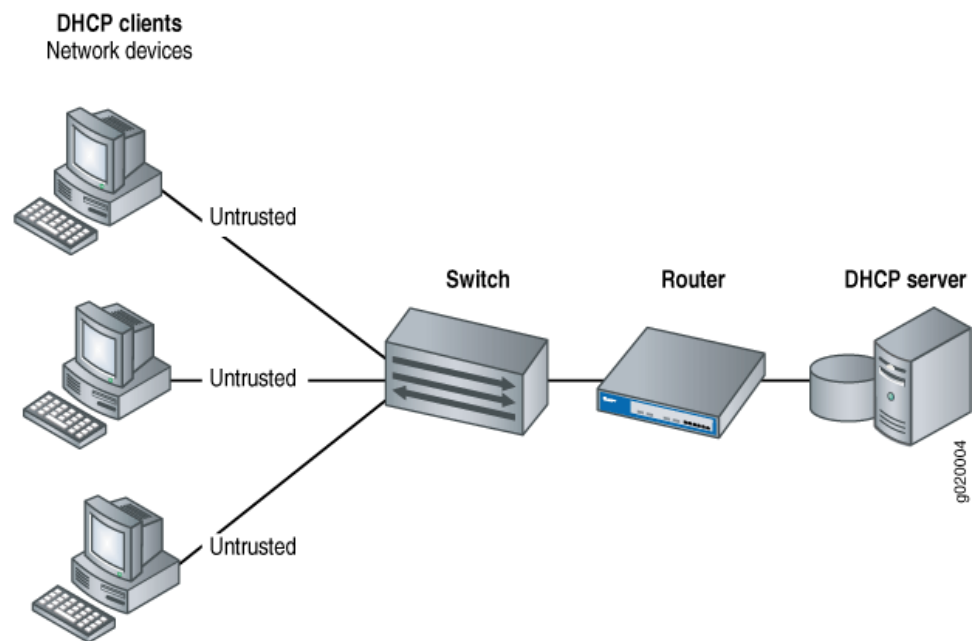

For the configuration shown in [Figure 18 on page 312](#), you set DHCP option 82 at the `[edit forwarding-options helpers bootp]` hierarchy level.

**Related
Documentation**

- [Overview of Access Port Protection on page 270](#)
- [DHCP and BOOTP Relay Overview](#)
- [dhcp-option82 on page 713](#)
- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500](#)
- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 528](#)
- [Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 508](#)

Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)



NOTE: This task uses Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\)” on page 528](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.



NOTE: DHCP option 82 is not supported on the QFX10000 switches.

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

You can configure the DHCP option 82 feature in two topologies:

- The switch, DHCP clients, and DHCP server are all on the same VLAN. The switch forwards the clients' requests to the server and forwards the server's responses to the clients. This topic describes this configuration.
- The switch functions as a relay agent when the DHCP clients or the DHCP server is connected to the switch through a Layer 3 interface. On the switch, these interfaces are configured as integrated routing and bridging (IRB) interfaces. The switch relays the clients' requests to the server and then forwards the server's responses to the clients. This configuration is described in [“Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\)” on page 508](#).

Before you configure DHCP option 82 on the switch, perform these tasks:

- Connect and configure the DHCP server.



NOTE: Your DHCP server must be configured to accept DHCP option 82. If the server is not configured for DHCP option 82, the server does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configure a VLAN on the switch and associate the interfaces on which the clients and the server connect to the switch with that VLAN. See [Configuring VLANs for EX Series Switches with ELS Support \(CLI Procedure\)](#)

To configure DHCP option 82:

1. Specify DHCP option 82 for the VLAN that you configured.

```
[edit vlans vlan-name forwarding-options dhcp-security]  
user@switch# set option-82
```



NOTE: If you want to enable DHCP option 82 on all VLANs, you must configure it separately for each specific VLAN.

The remaining steps are optional.

2. Configure the prefix for the circuit ID suboption to include the switch's hostname or the routing instance name for the VLAN:

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]  
user@switch# set circuit-id prefix (host-name | routing-instance-name)
```

3. Specify that the circuit ID suboption value contains the interface description rather than the interface name (the default):

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]  
user@switch# set circuit-id use-interface-description
```



NOTE: Starting in Junos OS Release 14.1X53-D25, when you use the interface description rather than the interface name, the interface description has to be specified under interface unit. When you use the interface description rather than the interface name, the interface description has to be specified under interface unit ("set interfaces ge-0/0/0 unit 0 description "client"). If you do not do this, then the interface name is used.

4. Specify that the circuit ID suboption value contains the VLAN ID rather than the VLAN name (the default):

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]  
user@switch# set circuit-id use-vlan-id
```

5. Specify that the remote ID suboption is included in the DHCP option 82 information:

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]  
user@switch# set remote-id
```



NOTE: If you do not specify a keyword after `remote-id`, the default value for the `remote-id` suboption is the interface name.

6. Specify that the remote ID suboption is the hostname of the switch:

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]
user@switch# set remote-id host-name
```

7. Specify that the remote ID suboption value contains the interface description:

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]
user@switch# set remote-id use-interface-description
```

8. Specify that the remote ID suboption value contains a character string:

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]
user@switch# set remote-id use-string mystring
```

9. Configure a vendor ID suboption:

- To use the default value (the default value is **Juniper**), do not type a character string after the **vendor-id** option keyword:

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]
user@switch# set vendor-id
```

- To configure that the vendor ID suboption value contains a character string value that you specify rather than **Juniper** (the default):

```
[edit vlans vlan-name forwarding-options dhcp-security option-82]
user@switch# set vendor-id use-string mystring
```

Release History Table

Release	Description
14.1X53-D25	Starting in Junos OS Release 14.1X53-D25, when you use the interface description rather than the interface name, the interface description has to be specified under interface unit.

Related Documentation

- Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on [page 524](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

Enabling DHCPv6 Rapid Commit Support

You can configure the DHCPv6 local server to support the DHCPv6 Rapid Commit option (DHCPv6 option 14). When rapid commit is enabled, the server recognizes the Rapid Commit option in Solicit messages sent from the DHCPv6 client. (DHCPv6 clients are configured separately to include the DHCPv6 Rapid Commit option in the Solicit messages.) The server and client then use a two-message exchange (Solicit and Reply) to configure clients, rather than the default four-message exchange (Solicit, Advertise, Request, and Reply). The two-message exchange provides faster client configuration, and is beneficial in environments in which networks are under a heavy load.

You can configure the DHCPv6 local server to support the Rapid Commit option globally, for a specific group, or for a specific interface. By default, rapid commit support is disabled on the DHCPv6 local server.

To configure the DHCPv6 local server to support the DHCPv6 Rapid Commit option:

1. Specify that you want to configure the **overrides** options:

```
[edit system services dhcp-local-server dhcpv6]
user@host# edit overrides
```

2. Enable rapid commit support:

```
[edit system services dhcp-local-server dhcpv6 overrides]
user@host# set rapid-commit
```

**Related
Documentation**

- *Overriding Default DHCP Local Server Configuration Settings*
- *Deleting DHCP Local Server and DHCP Relay Override Settings*
- *Extended DHCP Local Server Overview*

Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure)



NOTE: This task uses Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\)”](#) on page 533. For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

You can add static (fixed) IP addresses and bind them to fixed MAC addresses in the DHCP snooping database. These bindings are labeled *static* in the database, while those bindings that have been added through the process of DHCP snooping are labeled *dynamic*. Static IPv6 address assignment is also available for DHCPv6.

Before you can perform this procedure, you must configure the VLAN. See *Configuring VLANs for EX Series Switches with ELS Support (CLI Procedure)*.

To configure a static IP address to MAC address (IP-MAC) binding in the DHCP snooping database, you must first create a group of access interfaces under the **[edit vlans *vlan-name* forwarding-options dhcp-security]** hierarchy. Creating this group automatically enables DHCP snooping, which is a prerequisite for creating the DHCP snooping database. You can then configure a specific interface within the group to have a static IP address that is bound to a fixed MAC address. If you want to have multiple static IP addresses, configure additional interfaces within the same group.



NOTE: On switches that support DHCPv6, creating the group of interfaces will automatically enable both DHCP and DHCPv6 snooping.

To configure a static IP-MAC address binding in the DHCP snooping database:

- [edit vlans *vlan-name* forwarding-options dhcp-security]
user@switch# set group *group-name* interface *interface-name* static-ip *ip-address* mac *mac-address*

To configure a static IPv6-MAC address binding in the DHCPv6 snooping database:

- [edit vlans *vlan-name* forwarding-options dhcp-security]
user@switch# set group *group-name* interface *interface-name* static-ipv6 *ip-address* mac *mac-address*

In the following example, a device with static IP allocation is connected to the ge-0/0/1 interface, which belongs to vlan-A. To configure this device to connect to the external network:

```
[edit]
user@switch# set vlans vlan-A forwarding-options dhcp-security group static-group interface
ge-0/0/1 static-ip 10.1.1.6 mac 00:00:00:44:44:06
```

To verify that the configuration is configured on the device:

```
user@switch> show configuration vlans vlan-A
vlan-id 100;
forwarding-options {
  dhcp-security {
    ip-source-guard;
    group static-group {
      interface ge-0/0/1 {
        static-ip 10.1.1.6 mac 00:00:00:44:44:06
      }
    }
  }
}
```

To verify that a binding entry is created for the static client:

```
user@switch> show dhcp-security binding
IP address      MAC address      Vlan    Expires  State  Interface
10.1.1.6        00:00:00:44:44:06  vlan-A  0        STATIC ge-0/0/1
```

Related Documentation

- [show dhcp-security binding on page 1159](#)
- [Verifying That DHCP Snooping Is Working Correctly on page 297](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

Enabling a Trusted DHCP Server (CLI Procedure)



NOTE: This example uses Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Enabling a Trusted DHCP Server \(CLI Procedure\)”](#) on page 538.

You can configure any interface on a switch that connects to a DHCP server as a trusted interface (port). Configuring a DHCP server on a trusted interface protects against rogue DHCP servers sending leases.

By default, all access interfaces are untrusted, and all trunk interfaces are trusted. However, you can override the default setting for access interfaces by configuring a group of access interfaces within a VLAN, specifying an interface to belong to that group, and then configuring the group as trusted.

Before you can configure a trusted DHCP server, you must configure a VLAN. See *Configuring VLANs for EX Series Switches with ELS Support (CLI Procedure)*.

To configure an untrusted access interface as a trusted interface for a DHCP server by using the CLI :

1. Configure a group within a VLAN with a specific access interface:

```
[edit vlans vlan-name forwarding-options dhcp-security ]  
user@switch# set group group-name interface interface-name
```

2. Configure that group as **trusted** to make the specified interface contained within the group a trusted interface:

```
[edit vlans vlan-name forwarding-options dhcp-security group group-name]  
user@switch# set overrides trusted
```

Related Documentation

- [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)
- [Understanding Trusted DHCP Servers for Port Security on page 537](#)

CHAPTER 15

Enabling IPv6 ND Inspection and RA Guard to Prevent IPv6 Spoofing Attacks

- [Understanding IPv6 Neighbor Discovery Inspection on page 319](#)
- [Enabling IPv6 Neighbor Discovery Inspection on page 321](#)
- [Understanding IPv6 Router Advertisement Guard on page 321](#)
- [Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324](#)
- [Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330](#)
- [Configuring a Discard Policy for RA Guard on page 338](#)
- [Configuring an Accept Policy for RA Guard on page 339](#)
- [Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard on page 341](#)

Understanding IPv6 Neighbor Discovery Inspection

IPv6 nodes (hosts and routers) use Neighbor Discovery Protocol (NDP) to discover the presence and link-layer addresses of other nodes residing on the same link. Hosts use NDP to find neighboring routers that are willing to forward packets on their behalf, while routers use it to advertise their presence. Nodes also use NDP to maintain reachability information about the paths to active neighbors. When a router or the path to a router fails, a host can search for alternate paths.

The NDP process is based on the exchange of neighbor solicitation and advertisement messages. NDP messages are unsecured, which makes NDP susceptible to attacks that involve the spoofing (or forging) of link-layer addresses. An attacking node can cause packets for legitimate nodes to be sent to some other link-layer address by either sending a neighbor solicitation message with a spoofed source MAC address, or by sending a neighbor advertisement address with a spoofed target MAC address. The spoofed MAC address is then associated with a legitimate network IPv6 address by the other nodes.

IPv6 neighbor discovery inspection is based on DHCPv6 snooping; it mitigates NDP security vulnerabilities by inspecting neighbor discovery messages and verifying them against the DHCPv6 snooping table. The DHCPv6 snooping table, which is built by snooping DHCPv6 message exchanges, includes the IPv6 address, MAC address, VLAN and interface for each host associated with the VLAN. When a neighbor discovery message is received on an untrusted interface, neighbor discovery inspection discards the packet

unless the source IPv6 and MAC addresses, VLAN, and interface can be matched to an entry in the DHCPv6 snooping table. Entries can be added to the DHCPv6 snooping table by configuring the [static-ipv6](#) CLI statement.



NOTE: Neighbor discovery messages are always allowed on trusted interfaces.

Neighbor discovery inspection verifies five different ICMPv6 message types: Router Solicitation, Router Advertisement, Neighbor Solicitation, Neighbor Advertisement, and Redirect. By discarding message packets that can not be verified against the DHCPv6 snooping table, neighbor discovery inspection can prevent the following types of attacks:

- Cache poisoning attacks—Neighbor discovery cache poisoning is the IPv6 equivalent of ARP spoofing, in which an attacker uses a forged address to send an unsolicited advertisement to other hosts on the network, for associating its own MAC address with a legitimate network IP address. These bindings between IPv6 addresses and MAC addresses are stored by each node in its neighbor cache. Once the caches are updated with the malicious bindings, the attacker can initiate a man-in-the-middle attack, intercepting traffic that was intended for a legitimate host.
- Routing denial-of-service (DoS) attacks—An attacker could cause a host to disable its first-hop router by spoofing the address of a router and sending a neighbor advertisement message with the *router* flag cleared. The victim host assumes that the device that used to be its first-hop router is no longer a router.
- Redirect attacks—Routers use ICMPv6 redirect requests to inform a host of a more efficient route to a destination. Hosts can be redirected to a better first-hop router, but can also be informed by a Router Redirect message that the destination is in fact a neighbor. An attacker using this provision can achieve an effect similar to cache poisoning and intercept all traffic from the victim host. Neighbor discovery inspection checks that Router Redirect messages are sent only by trusted routers.

**Related
Documentation**

- [IPv6 Neighbor Discovery Protocol Overview](#)
- [Enabling IPv6 Neighbor Discovery Inspection on page 321](#)
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Understanding DHCP Snooping for Port Security on page 516](#)

Enabling IPv6 Neighbor Discovery Inspection



NOTE: This procedure uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch uses software that does not support ELS, see [“Configuring Port Security \(CLI Procedure\)” on page 284](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

IPv6 neighbor discovery inspection protects switches against IPv6 address spoofing. Neighbor discovery inspection validates IPv6 packets carrying neighbor discovery messages against the DHCPv6 binding table. The source IP address, source MAC address, VLAN and interface ID of each packet are checked against the table, and if a valid match is not found, the packet is dropped.

Before you can enable neighbor discovery inspection on a VLAN, you must configure the VLAN. See the documentation that describes setting up basic bridging and a VLAN for your switch.

To enable neighbor discovery inspection on a VLAN:

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set neighbor-discovery-inspection
```



NOTE: DHCPv6 snooping is enabled automatically when neighbor discovery inspection is configured. There is no explicit configuration required for DHCPv6 snooping.

Related Documentation

- [Understanding IPv6 Neighbor Discovery Inspection on page 319](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621](#)
- [Understanding DHCP Snooping for Port Security on page 516](#)

Understanding IPv6 Router Advertisement Guard

In an IPv6 deployment, routers periodically multicast Router Advertisement (RA) messages to announce their availability and convey information to neighboring nodes that enable them to be automatically configured on the network. RA messages are used by Neighbor Discovery Protocol (NDP) to detect neighbors, advertise IPv6 prefixes, assist in address provisioning, and share link parameters such as maximum transmission unit (MTU), hop limit, advertisement intervals, and lifetime. Hosts listen for RA messages for IPv6 address autoconfiguration and discovery of link-local addresses of the neighboring routers, and can also send a Router Solicitation (RS) message to request immediate advertisements.

RA messages are unsecured, which makes them susceptible to attacks on the network that involve the spoofing (or forging) of link-layer addresses. Also, unintended misconfiguration by users or administrators might lead to the presence of unwanted, or rogue, RA messages, which can cause operational problems for neighboring hosts. You can configure IPv6 Router Advertisement (RA) guard to protect your network against rogue RA messages generated by unauthorized or improperly configured routers connecting to the network segment.

RA guard works by validating RA messages on the basis of whether they meet certain criteria, configured on the switch using policies. RA guard inspects RA messages and compares the information contained in the message attributes to the configured policy. Depending on the policy, RA guard either drops or forwards the RA messages that match the conditions.

The following information contained in RA message attributes can be used by RA guard to validate the source of the RA message:

- Source MAC address
- Source IPv6 address
- Source IPv6 address prefix
- Hop-count limit
- Router preference priority
- *Managed* configuration flag
- *Other* configuration flag

You can configure RA guard to operate in either stateless or stateful mode. In stateless mode, in the default state, an RA message that is received on an interface is examined and filtered on the basis of whether it matches the conditions configured in the policy attached to that interface. If the content of the RA message is validated, it forwards the RA message to its destination; otherwise, the RA message is dropped. The state of an interface operating in stateless mode can be changed by configuration. If the interface is configured as *trusted*, all RA messages are forwarded without being validated against the policy. If the interface is configured as *blocked*, all RA messages are dropped without being validated against the policy.


In stateful mode, an interface can dynamically transition from one state to another based on information gathered during a learning period. During this period, known as the *learning* state, ingress RA messages are validated against a policy to determine which interfaces are attached to links with valid IPv6 routers. At the end of the learning period, interfaces attached to legitimate senders of RA messages transition dynamically to the *forwarding* state, in which RA messages are forwarded if they can be validated against a policy. Interfaces that do not receive valid RA messages during the learning period transition dynamically to the *blocked* state, in which all ingress RA messages are dropped.

[Table 12 on page 323](#) summarizes the states of IPv6 RA guard for both stateless and stateful mode.

Table 12: IPv6 RA guard states

State	Description	Mode
Off	The interface operates as if RA guard is not available.	Stateless/stateful
Untrusted	The interface forwards ingress RA messages if received RA messages are validated against the configured policy rules; otherwise, it drops the RA message. Untrusted state is the default state of an interface enabled for RA guard.	Stateless/stateful
Blocked	The interface blocks ingress RA messages.	Stateless/stateful
Forwarding	The interface forwards ingress RA messages if received RA messages are validated against the configured policy rules; otherwise, it drops the RA messages.	Stateful
Learning	The switch actively acquires information about the IPv6 routing device connected to the interface. The learning process takes place over a predefined period of time.	Stateful
Trusted	The interface forwards all RA messages directly, without validating them against the policy.	Stateless/stateful

Figure 19 on page 323 illustrates the transition of states when stateful RA guard is enabled. The numbers shown on the illustrations are described in the text that follows; these are not sequential steps.

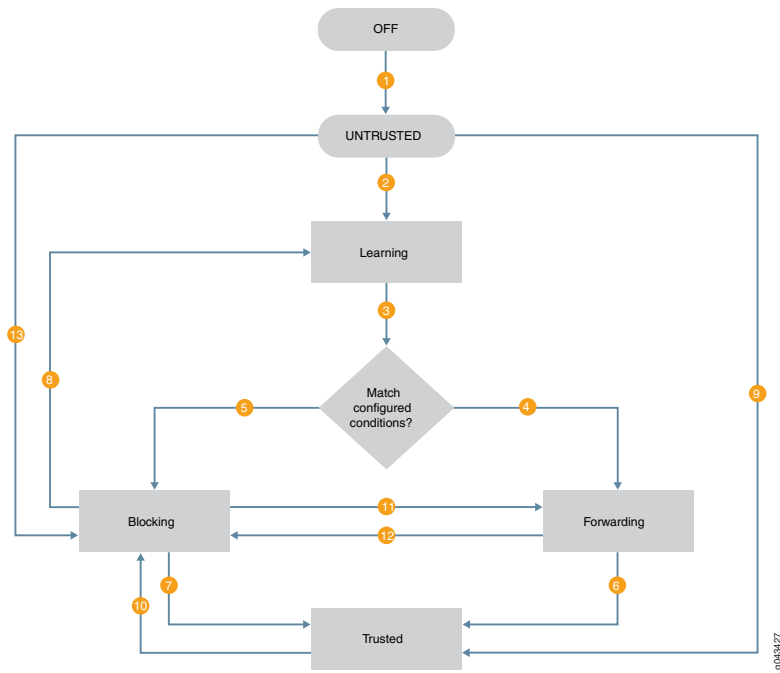Figure 19: Stateful RA Guard State Transitions

1. When RA guard is enabled on an interface it moves to the *untrusted* state from the *off* state. The *untrusted* state is the default state of an interface that is enabled for RA guard.
2. When the command requesting the learning state is issued, the interface is moved from the *off* state to the *learning* state.
3. RA messages received during the learning state are compared to the configured policy.
4. If RA messages are validated against the configured policy, the interface moves to *forwarding* state.
5. If RA messages are not validated against the configured policy, the interface moves to *blocked* state.
6. If **mark-interface trust** is configured on the validated interface, then it moves from *forwarding* state to *trusted* state.
7. If **mark-interface trust** is configured on the blocked interface, then it moves from *blocked* state to *trusted* state.
8. If learning is requested on a blocked interface, then the interface moves from the *blocked* state to the *learning* state.
9. If an interface in the default *untrusted* state is configured as **mark-interface trust**, it moves directly to the *trusted* state. In this case a policy can not be applied on that interface.
10. If the **mark-interface trust** configuration is deleted, and no valid RAs are received on the interface, then the interface moves to the *blocked* state.
11. If the command requesting the forwarding state is issued, then the interface moves directly from *blocked* to *forwarding* state.
12. If the command requesting the blocking state is issued, then the interface moves directly from *forwarding* to *blocked*.
13. If an interface in the default *untrusted* state is configured as **mark-interface block**, it moves directly to the *blocked* state. In this case a policy can not be applied on that interface.

**Related
Documentation**

- [IPv6 Neighbor Discovery Protocol Overview](#)
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Configuring Port Security \(CLI Procedure\) on page 284](#)

Configuring Stateless IPv6 Router Advertisement Guard on Switches

Stateless IPv6 Router Advertisement (RA) guard enables the switch to examine incoming RA messages and filter them based on a predefined set of criteria. If the switch validates the content of the RA message, it forwards the RA message to its destination; otherwise, the RA message is dropped.

Before you can enable IPv6 RA guard, you must configure a policy with the criteria to be used for validating RA messages received on an interface. You can configure the policy to either accept or discard RA messages on the basis of whether they meet the criteria. The criteria are compared to information included in the RA messages. If the criteria for the policy includes source addresses or address prefixes, you must configure a list of the addresses before configuring the policy.

- [Configuring a Discard Policy for RA Guard on page 325](#)
- [Configuring an Accept Policy for RA Guard on page 326](#)
- [Enabling Stateless RA Guard on an Interface on page 328](#)
- [Enabling Stateless RA Guard on a VLAN on page 329](#)
- [Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard on page 330](#)

Configuring a Discard Policy for RA Guard

You can configure a discard policy to drop RA messages from predefined sources. You must first configure a list or lists of the source addresses or address prefixes, and then associate them with a policy. The following lists can be associated with discard policy:

- **source-ip-address-list**
- **source-mac-address-list**
- **prefix-list-name**



.....

NOTE: You can include more than one type of list in a discard policy. If the information contained in a received RA message matches any one of the list parameters, then that RA message is discarded.

.....

To configure a discard policy for RA guard:

1. Define one or more lists of disallowed source addresses or address prefixes that RA guard will use to filter incoming RA messages. Add one address or address prefix per line in the configuration.

- To define a list of IPv6 source addresses:

```
[edit]
user@switch# set policy-options prefix-list address-list-name ipv6-address
```

- To define a list of IPv6 address prefixes:

```
[edit]
user@switch# set policy-options prefix-list prefix-list-name ipv6-prefix
```

- To define a list of MAC source addresses:

```
[edit]
user@switch# set policy-options mac-list address-list-name mac-address
```

2. Configure the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

3. Specify the discard action:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name]
user@switch# set discard
```

4. Associate the policy with the list or lists defined in Step 1. For example, to discard RA messages that match a source MAC address in the list:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name discard]
user@switch# set source-mac-address-list address-list-name
```

Configuring an Accept Policy for RA Guard

You can configure an accept policy to forward RA messages on the basis of certain criteria. You can configure either match lists of source address or address prefixes as the criteria, or you can configure other match conditions, such as hop limit, configuration flags, or router preference as the criteria.

The following lists can be associated with an accept policy by using the **match-list** option:

- **source-ip-address-list**
- **source-mac-address-list**
- **prefix-list-name**



NOTE: You can associate more than one type of match list with an accept policy. If the **match-all** suboption is configured, then a received RA message must match all configured match lists in order to be forwarded; otherwise, it is discarded. If the **match-any** option is configured, then a received RA message must match any one of the configured match lists in order to be forwarded; if it does not match any of the configured lists, then it is discarded.

The following match conditions can be configured using the **match-option** option:

- **hop-limit**—Configure the RA guard policy to verify the minimum or maximum hop count for an incoming RA message.
- **managed-config-flag**—Configure the RA guard policy to verify that the managed address configuration flag of an incoming RA message is set.
- **other-config-flag**—Configure the RA guard policy to verify that the other configuration flag of an incoming RA message is set.
- **router-preference-maximum**—Configure the RA guard policy to verify that the default router preference parameter value of an incoming RA message is lower than or equal to a specified limit.



NOTE: The **match-list** and **match-option** options are used only in accept policies, not in discard policies.

To configure an accept policy for RA guard by using the **match-list** option:

1. Define one or more lists of authorized source addresses or address prefixes that RA guard will use to filter incoming RA messages. Add one address or address prefix per line in the configuration.

- To define a list of IPv6 source addresses:

```
[edit]
user@switch# set policy-options prefix-list address-list-name ipv6-address
```

- To define a list of IPv6 address prefixes:

```
[edit]
user@switch# set policy-options prefix-list prefix-list-name ipv6-prefix
```

- To define a list of MAC source addresses:

```
[edit]
user@switch# set policy-options mac-list address-list-name mac-address
```

2. Specify the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

3. Specify the accept action:

```
[edit forwarding-options access-security router-advertisement-guard policy  
policy-name]  
user@switch# set accept
```

4. Specify whether RA guard must meet the criteria in all lists or in any of the lists configured in 1:

- To match on all lists:

```
[edit forwarding-options access-security router-advertisement-guard policy  
policy-name accept]  
user@switch# set match-list match-criteria match-all
```

- To match on any of the lists:

```
[edit forwarding-options access-security router-advertisement-guard policy  
policy-name accept]  
user@switch# set match-list match criteria match-any
```

5. Associate the accept policy with the list or lists configured in Step 1. For example:

```
[edit forwarding-options access-security router-advertisement-guard policy  
policy-name accept]  
user@switch# set match-list source-mac-address-list address-list-name
```

To configure an accept policy for RA guard using the **match-option** option:

1. Specify the policy name:

```
[edit]  
user@switch# set forwarding-options access-security router-advertisement-guard policy  
policy-name
```

2. Specify the accept action:

```
[edit forwarding-options access-security router-advertisement-guard policy  
policy-name]  
user@switch# set accept
```

3. Specify the match conditions by using the **match-option** option. For example, to specify a match on the maximum number of hops:

```
[edit forwarding-options access-security router-advertisement-guard policy  
policy-name accept]  
user@switch# set match-option hop-limit maximum value
```

Enabling Stateless RA Guard on an Interface

You can enable stateless RA guard on an interface. You must first configure a policy, which is applied to incoming RA messages on the interface or interfaces. To configure an accept policy, see [“Configuring an Accept Policy for RA Guard” on page 326](#). To configure a discard policy, see [“Configuring a Discard Policy for RA Guard” on page 325](#). After you apply a policy to an interface, you must also enable RA guard on the corresponding VLAN;

otherwise, the policy applied to the interface does not have any impact on received RA packets.

To enable stateless RA guard on an interface:

1. Apply a policy to an interface:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard interface
interface-name policy policy-name
```

2. Configure the **stateless** option on the interface:

```
[edit forwarding-options access-security router-advertisement-guard interface
interface-name policy policy-name]
user@switch# set stateless
```

3. Enable stateless RA guard on the corresponding VLAN:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard vlans
vlan-name policy policy-name stateless
```

Enabling Stateless RA Guard on a VLAN

You can enable stateless RA guard on a per-VLAN basis or for all VLANs. You must first configure a policy, which is used to validate incoming RA messages in the learning state. To configure an accept policy, see [“Configuring an Accept Policy for RA Guard” on page 326](#). To configure a discard policy, see [“Configuring a Discard Policy for RA Guard” on page 325](#).

To enable stateless RA guard on a specific VLAN:

1. Apply a policy to a VLAN.

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard vlans
vlan-name policy policy-name
```

2. Configure the **stateless** option on the VLAN:

```
[edit forwarding-options access-security router-advertisement-guard vlans
vlan-name policy policy-name]
user@switch# set stateless
```

To enable stateless RA guard on all VLANs:

1. Apply a policy to all VLANs.

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard vlans all
policy policy-name
```



NOTE: If a policy has been configured for a specific VLAN using the command `set forwarding-options access-security router-advertisement-guard vlans vlan-name policy policy-name`, that policy takes priority over the policy applied globally to all VLANs.

2. Configure the **stateful** option on all VLANs:

```
[edit forwarding-options access-security router-advertisement-guard vlans all  
policy policy-name]  
user@switch# set stateful
```

Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard

You can configure an interface as trusted or blocked to bypass inspection of RA messages by RA guard. When an RA message is received on a trusted or blocked interface, it is not subject to validation against the configured policy. A trusted interface forwards all RA messages. A blocked interface discards all RA messages.

- To configure an interface as trusted:

```
[edit]  
user@switch# set forwarding-options access-security router-advertisement-guard interface  
interface-name mark-interface trusted
```

- To configure an interface as blocked:

```
[edit]  
user@switch# set forwarding-options access-security router-advertisement-guard interface  
interface-name mark-interface block
```

Related Documentation

- [Understanding IPv6 Router Advertisement Guard on page 321](#)
- [Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330](#)

Configuring Stateful IPv6 Router Advertisement Guard on Switches

Stateful IPv6 Router Advertisement (RA) guard enables a switch to learn about the sources of RA messages for a certain period of time. During this period, during which the switch is known to be in the learning state, the information contained in received RA message attributes is stored and compared to the policy. At the end of the learning period, the switch has a record of which interfaces are attached to links with valid IPv6 routers. If there is no valid IPv6 router attached to an interface, the switch dynamically transitions the interface from the learning state into the blocking state. Subsequent RA messages received after the transition to blocking state are dropped. If there is a valid IPv6 router attached to the interface, the interface transitions to the forwarding state. In the forwarding state, RA messages that can be validated against the configured policy are forwarded.

You can override the dynamic state transitions by statically configuring the forwarding or blocking states on an interface. When you statically configure the state on an interface, the state can be changed only through configuration. For example, if you configure the forwarding state on an interface, the interface remains in the forwarding state until you configure a different state on that interface.

Before you can enable IPv6 RA guard on an interface or a VLAN, you must configure a policy. Stateful RA guard uses the policy to determine whether the RA messages received on an interface are from valid senders. You can configure the policy to either accept or discard RA messages that meet the predefined criteria. If the criteria for the policy includes source addresses or address prefixes, you must configure a list of the addresses before configuring the policy.

- [Configuring a Discard Policy for RA Guard on page 331](#)
- [Configuring an Accept Policy for RA Guard on page 332](#)
- [Enabling Stateful RA Guard on an Interface on page 334](#)
- [Enabling Stateful RA Guard on a VLAN on page 335](#)
- [Configuring the Learning State on an Interface on page 336](#)
- [Configuring the Forwarding State on an Interface on page 337](#)
- [Configuring the Blocking State on an Interface on page 337](#)
- [Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard on page 337](#)

Configuring a Discard Policy for RA Guard

You can configure a discard policy to drop RA messages from predefined sources. You must first configure a list or lists of the source addresses or address prefixes, and then associate them with a policy. The following lists can be associated with discard policy:

- **source-ip-address-list**
- **source-mac-address-list**
- **prefix-list-name**



.....
NOTE: You can include more than one type of list in a discard policy. If the information contained in a received RA message matches any one of the list parameters, then that RA message is discarded.
.....

To configure a discard policy for RA guard:

1. Define one or more lists of disallowed source addresses or address prefixes that RA guard will use to filter incoming RA messages. Add one address or address prefix per line in the configuration.

- To define a list of IPv6 source addresses:

```
[edit]
user@switch# set policy-options prefix-list address-list-name ipv6-address
```

- To define a list of IPv6 address prefixes:

```
[edit]
user@switch# set policy-options prefix-list prefix-list-name ipv6-prefix
```

- To define a list of MAC source addresses:

```
[edit]
user@switch# set policy-options mac-list address-list-name mac-address
```

2. Configure the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

3. Specify the discard action:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name]
user@switch# set discard
```

4. Associate the policy with the list or lists defined in Step 1. For example, to discard RA messages that match a source MAC address in the list:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name discard]
user@switch# set source-mac-address-list address-list-name
```

Configuring an Accept Policy for RA Guard

You can configure an accept policy to forward RA messages on the basis of certain criteria. You can configure either match lists of source address or address prefixes as the criteria, or you can configure other match conditions, such as hop limit, configuration flags, or router preference as the criteria.

The following lists can be associated with an accept policy by using the **match-list** option:

- **source-ip-address-list**
- **source-mac-address-list**
- **prefix-list-name**



NOTE: You can associate more than one type of match list with an accept policy. If the **match-all** suboption is configured, then a received RA message must match all configured match lists in order to be forwarded; otherwise, it is discarded. If the **match-any** option is configured, then a received RA message must match any one of the configured match lists in order to be forwarded; if it does not match any of the configured lists, then it is discarded.

The following match conditions can be configured using the **match-option** option:

- **hop-limit**—Configure the RA guard policy to verify the minimum or maximum hop count for an incoming RA message.
- **managed-config-flag**—Configure the RA guard policy to verify that the managed address configuration flag of an incoming RA message is set.
- **other-config-flag**—Configure the RA guard policy to verify that the other configuration flag of an incoming RA message is set.
- **router-preference-maximum**—Configure the RA guard policy to verify that the default router preference parameter value of an incoming RA message is lower than or equal to a specified limit.



NOTE: The **match-list** and **match-option** options are used only in accept policies, not in discard policies.

To configure an accept policy for RA guard by using the **match-list** option:

1. Define one or more lists of authorized source addresses or address prefixes that RA guard will use to filter incoming RA messages. Add one address or address prefix per line in the configuration.

- To define a list of IPv6 source addresses:

```
[edit]
user@switch# set policy-options prefix-list address-list-name ipv6-address
```

- To define a list of IPv6 address prefixes:

```
[edit]
user@switch# set policy-options prefix-list prefix-list-name ipv6-prefix
```

- To define a list of MAC source addresses:

```
[edit]
user@switch# set policy-options mac-list address-list-name mac-address
```

2. Specify the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

3. Specify the accept action:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name]
user@switch# set accept
```

4. Specify whether RA guard must meet the criteria in all lists or in any of the lists configured in 1:

- To match on all lists:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-list match-criteria match-all
```

- To match on any of the lists:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-list match criteria match-any
```

5. Associate the accept policy with the list or lists configured in Step 1. For example:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-list source-mac-address-list address-list-name
```

To configure an accept policy for RA guard using the **match-option** option:

1. Specify the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

2. Specify the accept action:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name]
user@switch# set accept
```

3. Specify the match conditions by using the **match-option** option. For example, to specify a match on the maximum number of hops:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-option hop-limit maximum value
```

Enabling Stateful RA Guard on an Interface

You can enable stateful RA guard on an interface. You must first configure a policy, which is used to validate incoming RA messages during the learning period. To configure an accept policy, see [“Configuring an Accept Policy for RA Guard” on page 326](#). To configure a discard policy, see [“Configuring a Discard Policy for RA Guard” on page 325](#). After you

apply an RA guard policy to an interface, you must enable RA guard on the corresponding VLAN.

To enable stateful RA guard on an interface:

1. Apply a policy to an interface.

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard interface
interface-name policy policy-name
```

2. Configure the **stateful** option on the interface:

```
[edit forwarding-options access-security router-advertisement-guard interface
interface-name policy policy-name]
user@switch# set stateful
```

3. Enable stateful RA guard on the corresponding VLAN:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard vlans
vlan-name policy policy-name stateful
```

Enabling Stateful RA Guard on a VLAN

You can enable stateful RA guard on a per-VLAN basis or for all VLANs. You must first configure a policy, which used to validate incoming RA messages during the learning state. To configure an accept policy, see [“Configuring an Accept Policy for RA Guard” on page 326](#) To configure a discard policy, see [“Configuring a Discard Policy for RA Guard” on page 325](#)

To enable stateful RA guard on a specific VLAN:

1. Apply a policy to a VLAN.

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard vlans
vlan-name policy policy-name
```

2. Configure the **stateful** option on the VLAN:

```
[edit forwarding-options access-security router-advertisement-guard vlans
vlan-name policy policy-name]
user@switch# set stateful
```

To enable stateful RA guard on all VLANs:

1. Apply a policy to all VLANs.

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard vlans all
policy policy-name
```



NOTE: If a policy has been configured for a specific VLAN using the command `set forwarding-options access-security router-advertisement-guard vlans vlan-name policy policy-name`, that policy takes priority over the policy applied globally to all VLANs.

2. Configure the **stateful** option on all VLANs:

```
[edit forwarding-options access-security router-advertisement-guard vlans all  
policy policy-name]  
user@switch# set stateful
```

Configuring the Learning State on an Interface

When stateful RA guard is first enabled, the default state is *off*. An interface in the off state operates as if RA guard is not available. To transition an interface to the learning state, you must request learning on the interface. An interface in the learning state actively acquires information from the RA messages that it receives.

To configure stateful RA guard learning on an interface:

1. Request learning on the interface.

```
[edit]  
user@switch# request access-security router-advertisement-guard-learn interface  
interface-name
```

2. Configure the learning period in seconds.

```
[edit]  
user@switch# request access-security router-advertisement-guard-learn interface  
interface-name duration seconds
```

3. Configure the action to take on ingress RA messages received during the learning period. To forward RA messages received during the learning period, configure forwarding on the interface.

- To forward RA messages during the learning period:

```
[edit]  
user@switch# request access-security router-advertisement-guard-learn interface  
interface-name duration seconds forward
```

- To block RA messages during the learning period:

```
[edit]  
user@switch# request access-security router-advertisement-guard-learn interface  
interface-name duration seconds block
```

Configuring the Forwarding State on an Interface

An interface in the forwarding state accepts ingress RA messages that can be validated against the configured policy and forwards them to their destination. An interface can dynamically transition to the forwarding state directly from the learning state, or the forwarding state can be statically configured on the interface.

- To configure the forwarding state on an interface:

```
[edit]
user@switch# request access-security router-advertisement-guard-forward interface
interface-name
```

Configuring the Blocking State on an Interface

An interface in the blocking state blocks ingress RA messages. An interface can dynamically transition to the blocking state directly from the learning state, or the blocking state can be statically configured on the interface. An interface that has been statically configured to be in the blocking state will remain in the blocking state until another state is configured on that interface.

- To configure the blocking state on an interface:

```
[edit]
user@switch# request access-security router-advertisement-guard-block interface
interface-name
```

Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard

You can configure an interface as trusted or blocked to bypass inspection of RA messages by RA guard. When an RA message is received on a trusted or blocked interface, it is not subject to validation against the configured policy. A trusted interface forwards all RA messages. A blocked interface discards all RA messages.

- To configure an interface as trusted:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard interface
interface-name mark-interface trusted
```

- To configure an interface as blocked:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard interface
interface-name mark-interface block
```

Related Documentation

- [Understanding IPv6 Router Advertisement Guard on page 321](#)
- [Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324](#)

Configuring a Discard Policy for RA Guard

You can configure a discard policy to drop RA messages from predefined sources. You must first configure a list or lists of the source addresses or address prefixes, and then associate them with a policy. The following lists can be associated with discard policy:

- **source-ip-address-list**
- **source-mac-address-list**
- **prefix-list-name**



NOTE: You can include more than one type of list in a discard policy. If the information contained in a received RA message matches any one of the list parameters, then that RA message is discarded.

To configure a discard policy for RA guard:

1. Define one or more lists of disallowed source addresses or address prefixes that RA guard will use to filter incoming RA messages. Add one address or address prefix per line in the configuration.

- To define a list of IPv6 source addresses:

```
[edit]
user@switch# set policy-options prefix-list address-list-name ipv6-address
```

- To define a list of IPv6 address prefixes:

```
[edit]
user@switch# set policy-options prefix-list prefix-list-name ipv6-prefix
```

- To define a list of MAC source addresses:

```
[edit]
user@switch# set policy-options mac-list address-list-name mac-address
```

2. Configure the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

3. Specify the discard action:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name]
user@switch# set discard
```

4. Associate the policy with the list or lists defined in Step 1. For example, to discard RA messages that match a source MAC address in the list:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name discard]
user@switch# set source-mac-address-list address-list-name
```

Configuring an Accept Policy for RA Guard

You can configure an accept policy to forward RA messages on the basis of certain criteria. You can configure either match lists of source address or address prefixes as the criteria, or you can configure other match conditions, such as hop limit, configuration flags, or router preference as the criteria.

The following lists can be associated with an accept policy by using the **match-list** option:

- **source-ip-address-list**
- **source-mac-address-list**
- **prefix-list-name**



NOTE: You can associate more than one type of match list with an accept policy. If the **match-all** suboption is configured, then a received RA message must match all configured match lists in order to be forwarded; otherwise, it is discarded. If the **match-any** option is configured, then a received RA message must match any one of the configured match lists in order to be forwarded; if it does not match any of the configured lists, then it is discarded.

The following match conditions can be configured using the **match-option** option:

- **hop-limit**—Configure the RA guard policy to verify the minimum or maximum hop count for an incoming RA message.
- **managed-config-flag**—Configure the RA guard policy to verify that the managed address configuration flag of an incoming RA message is set.
- **other-config-flag**—Configure the RA guard policy to verify that the other configuration flag of an incoming RA message is set.
- **router-preference-maximum**—Configure the RA guard policy to verify that the default router preference parameter value of an incoming RA message is lower than or equal to a specified limit.



NOTE: The **match-list** and **match-option** options are used only in accept policies, not in discard policies.

To configure an accept policy for RA guard by using the **match-list** option:

1. Define one or more lists of authorized source addresses or address prefixes that RA guard will use to filter incoming RA messages. Add one address or address prefix per line in the configuration.

- To define a list of IPv6 source addresses:

```
[edit]
user@switch# set policy-options prefix-list address-list-name ipv6-address
```

- To define a list of IPv6 address prefixes:

```
[edit]
user@switch# set policy-options prefix-list prefix-list-name ipv6-prefix
```

- To define a list of MAC source addresses:

```
[edit]
user@switch# set policy-options mac-list address-list-name mac-address
```

2. Specify the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

3. Specify the accept action:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name]
user@switch# set accept
```

4. Specify whether RA guard must meet the criteria in all lists or in any of the lists configured in 1:

- To match on all lists:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-list match-criteria match-all
```

- To match on any of the lists:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-list match-criteria match-any
```

5. Associate the accept policy with the list or lists configured in Step 1. For example:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-list source-mac-address-list address-list-name
```

To configure an accept policy for RA guard using the **match-option** option:

1. Specify the policy name:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard policy
policy-name
```

2. Specify the accept action:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name]
user@switch# set accept
```

3. Specify the match conditions by using the **match-option** option. For example, to specify a match on the maximum number of hops:

```
[edit forwarding-options access-security router-advertisement-guard policy
policy-name accept]
user@switch# set match-option hop-limit maximum value
```

Configuring an Interface as Trusted or Blocked to Bypass Inspection by RA Guard

You can configure an interface as trusted or blocked to bypass inspection of RA messages by RA guard. When an RA message is received on a trusted or blocked interface, it is not subject to validation against the configured policy. A trusted interface forwards all RA messages. A blocked interface discards all RA messages.

- To configure an interface as trusted:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard interface
interface-name mark-interface trusted
```

- To configure an interface as blocked:

```
[edit]
user@switch# set forwarding-options access-security router-advertisement-guard interface
interface-name mark-interface block
```


CHAPTER 16

Configuring MAC Limiting, MAC Move Limiting and Persistent MAC Learning to Prevent DHCP Starvation Attacks

- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches on page 343](#)
- [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 350](#)
- [Understanding Persistent MAC Learning \(Sticky MAC\) on page 352](#)
- [Configuring Persistent MAC Learning \(CLI Procedure\) on page 353](#)

Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches

MAC limiting enhances port security by limiting the number of MAC addresses that can be learned within a VLAN. Limiting the number of MAC addresses protects the switch from flooding of the Ethernet switching table (also known as the MAC forwarding table or Layer 2 forwarding table). Flooding occurs when the number of new MAC addresses that are learned causes the Ethernet switching table to overflow, and previously learned MAC addresses are flushed from the table. The switch then reverts to flooding the previously-learned MAC addresses, which can impact performance and introduce security vulnerabilities.

MAC move limiting provides additional security by controlling the number of MAC address moves that are allowed in a VLAN within one second. A MAC address move occurs when the switch receives a packet with a source MAC address that has already been learned by the switch, but on a different interface. The Ethernet switching table is then updated to reflect the association of the MAC address with the new interface. Because the Ethernet switching table must be updated for each MAC address move, frequent move events can lead to exhaustion of the switch's processing resources. This might occur as the result of a MAC spoofing attack or a loop in the network.

- [MAC Limiting on page 344](#)
- [MAC Move Limiting on page 344](#)
- [Actions for MAC Limiting and MAC Move Limiting on page 345](#)

MAC Limiting

With MAC limiting, you limit the MAC addresses that can be learned on Layer 2 access interfaces by either limiting the number of MAC addresses or by specifying allowed MAC addresses:

- Limiting the number of MAC addresses—You configure the maximum number of MAC addresses that can be dynamically learned (added to the Ethernet switching table) per interface. You can specify that incoming packets with new MAC addresses be ignored, dropped, or logged when the limit is exceeded. You can also specify that the interface be shut down or temporarily disabled.



NOTE: Static MAC addresses do not count toward the limit you specify for dynamic MAC addresses.

- Specifying allowed MAC addresses—You configure the allowed MAC addresses for an interface. Any MAC address that is not in the list of configured addresses is not learned, and the switch logs an appropriate message. An allowed MAC address is bound to a VLAN so that the address is not registered outside the VLAN. If an allowed MAC setting conflicts with a dynamic MAC setting, the allowed MAC setting takes precedence.

MAC limiting is configured on Layer 2 interfaces. You can specify the maximum number of dynamic MAC addresses that can be learned on a single interface, all interfaces, or a specific interface on the basis of its membership within a VLAN (VLAN membership MAC limit).

When you are configuring the maximum MAC limit for an interface, you can choose the action that occurs on incoming packets when the MAC limit is exceeded. You can specify that incoming packets be ignored, dropped, or logged when the limit is exceeded. You can also specify that the interface be shut down or temporarily disabled.

MAC limiting is not enabled by default. For additional information about configuring MAC limit for an interface on a device that supports ELS, see [“Configuring MAC Limiting \(CLI Procedure\)” on page 436](#). For additional information about configuring MAC limit for an interface on a device that does not support Enhanced Layer 2 Software (ELS), see [“Configuring MAC Limiting \(CLI Procedure\)” on page 346](#).

See *Using the Enhanced Layer 2 Software CLI* for additional information on ELS.

MAC Move Limiting

With MAC move limiting, you limit the number of times a MAC address can move to a new interface within one second. When MAC move limiting is configured, MAC address movements are tracked by the switch. The first time a MAC address moves is always considered a good move and will not count toward the configured MAC move limit. Monitoring of MAC address moves comes into effect after the first move, even if the MAC move limit is configured as 1.

You configure MAC move limiting on a per-VLAN basis. Although you enable this feature on VLANs, the MAC move limit applies to the number of movements for each individual

MAC address rather than the total number of MAC address moves in the VLAN. For example, if the MAC move limit is set to 1, the switch allows an unlimited number of MAC address movements within the VLAN as long as the same MAC address does not move more than once within a second.

You can configure an action to be taken if the MAC address move limit is exceeded. You can specify that incoming packets be ignored, dropped, or logged when the limit is exceeded. You can also specify that the interface be shut down or temporarily disabled.

MAC move limiting is not enabled by default. For additional information about configuring MAC move limiting on a device that does not support ELS, see [“Configuring MAC Move Limiting \(CLI Procedure\)” on page 350](#). For additional information about configuring MAC move limiting on a device that supports ELS, see [“Configuring MAC Move Limiting \(CLI Procedure\)” on page 440](#).

Actions for MAC Limiting and MAC Move Limiting

You can choose to have one of the following actions performed when the MAC limit or the MAC move limit is exceeded:



NOTE: There is no default action.

- **drop**—Drop the packet, but do not generate an alarm.
- **drop-and-log**—Drop the packet and generate an alarm, an SNMP trap, or system log entry.
- **log**—Do not drop the packet but generate an alarm, an SNMP trap, or a system log entry.
- **none**—Forward packets with new source MAC addresses, and learn the new source MAC address.
- **shutdown**—Disable the interface in the VLAN and generate an alarm, an SNMP trap, or a system log entry.
- **vlan-member-shutdown**—(EX9200 only) Starting in Junos OS Release 15.1 for MAC Limiting and MAC Move Limiting on EX9200 Switches, the **vlan-member-shutdown** statement is supported to block an interface on the basis of its membership in a specific VLAN and generate an alarm, an SNMP trap, or a system log entry.

In the event of shutdown, you can configure the switch to automatically restore the disabled interfaces to service after a specified period of time. To configure autorecovery on a device that supports ELS, see [“Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\)” on page 596](#). To configure autorecovery on a device that does not support ELS, see [“Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\)” on page 613](#).



NOTE: If you do not configure the switch for autorecovery from the disabled condition, you can bring up the disabled interfaces by running one of the following commands:

- (For devices that support ELS)—[clear ethernet-switching recovery-timeout](#)
- (For devices that do not support ELS)—[clear ethernet-switching port-error](#)

Release History Table

Release	Description
15.1	Starting in Junos OS Release 15.1 for MAC Limiting and MAC Move Limiting on EX9200 Switches, the vlan-member-shutdown statement is supported to block an interface on the basis of its membership in a specific VLAN and generate an alarm, an SNMP trap, or a system log entry.

Related Documentation

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Configuring MAC Limiting \(CLI Procedure\) on page 436](#)
- [Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 596](#)
- [Adding a Static MAC Address Entry to the Ethernet Switching Table on a Switch with ELS Support \(CLI Procedure\)](#)

Configuring MAC Limiting (CLI Procedure)

This task uses Junos OS for EX Series switches and QFX3500 and QFX3600 switches that does not support the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that supports ELS, see “[Configuring MAC Limiting \(CLI Procedure\)](#)” on page 436. For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

This topic describes various ways of configuring a limitation on MAC addresses in packets that are received and forwarded by the switch.

Before you can change a MAC limit that was previously set for an interface or a VLAN, you must first clear existing entries in the MAC address forwarding table that correspond to the change you want to make. Thus, to change the limit on an interface, first clear the MAC address forwarding table entries for that interface. To change the limit on all interfaces and VLANs, clear all MAC address forwarding table entries. To change the limit on a VLAN, clear the MAC address forwarding table entries for that VLAN.

To clear MAC addresses from the forwarding table:

- Clear MAC address entries from a specific interface (here, the interface is **ge-0/0/1**) in the forwarding table:

```
user@switch> clear ethernet-switching-table interface ge-0/0/1
```

- Clear all MAC address entries in the forwarding table:

```
user@switch>clear ethernet-switching-table
```

- Clear MAC address entries from a specific VLAN (here, the VLAN is vlan-abc):

```
user@switch> clear ethernet-switching-table vlan vlan-abc
```

The different ways of setting a MAC limit are described in the following sections:

- [Configuring MAC Limiting for Port Security by Limiting the Number of MAC Addresses That Can be Learned on Interfaces on page 347](#)
- [Configuring MAC Limiting for Port Security by Specifying MAC Addresses That Are Allowed on page 347](#)
- [Configuring MAC Limiting for VLANs on page 348](#)

Configuring MAC Limiting for Port Security by Limiting the Number of MAC Addresses That Can be Learned on Interfaces

To configure MAC limiting for port security by setting a maximum number of MAC addresses that can be learned on interfaces.

- Apply the MAC limit on a single interface (here, the interface is ge-0/0/1):

```
[edit ethernet-switching-options secure-access-port]  
user@switch# set interface ge-0/0/1 mac-limit 10
```

When no action is specified for configuring the MAC limit on an interface, the switch performs the default action **drop** if the limit is exceeded.

- Apply the MAC limit on a single access interface, on the basis of its membership within a specific VLAN (here, the interface is ge-0/0/1 and the VLAN is v1).

```
[edit ethernet-switching-options secure-access-port]  
user@switch# set interface ge-0/0/1 vlan v1 mac-limit 5
```

With this type of configuration, the switch drops any additional packets if the limit is exceeded, and also logs a message.

- Apply the limit to all access interfaces:

```
[edit ethernet-switching-options secure-access-port]  
user@switch# set interface all mac-limit 10
```

When no action is specified for configuring the MAC limit on all interfaces, the switch performs the default action **drop** if the limit is exceeded:

Configuring MAC Limiting for Port Security by Specifying MAC Addresses That Are Allowed

You must clear existing entries in the MAC address forwarding table prior to changing the MAC address limit.

To configure MAC limiting for port security by specifying allowed MAC addresses:

- On a single interface (here, the interface is ge-0/0/2):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
```

- On all interfaces:

```
[edit ethernet-switching-options secure-access-port]
user@switch#set interface all allowed-mac 00:05:85:3A:82:80
user@switch#set interface all allowed-mac 00:05:85:3A:82:81
user@switch#set interface all allowed-mac 00:05:85:3A:82:83
```

Configuring MAC Limiting for VLANs

You must clear existing entries in the MAC address forwarding table before you can change the MAC address limit.

MAC limiting for a VLAN restricts the MAC addresses that can be learned for that VLAN, but does *not* drop the packet. Therefore, setting the MAC limit on a VLAN is not considered a port-security feature.



.....

NOTE: The configuration of specific allowed MAC addresses does not apply to VLANs.

.....

To configure MAC limiting for a VLAN using the CLI:

- Limit the number of dynamic MAC addresses on a VLAN:

If the MAC limit on a specific VLAN is exceeded, the switch logs the MAC addresses of packets that cause the limit to be exceeded. No other action is possible.

```
[edit vlans]
user@switch# set vlan-abc mac-limit 20
```



NOTE: When you are applying a MAC limit on a VLAN, do not set `mac-limit` to 1 for a VLAN composed of Routed VLAN Interfaces (RVIs) or a VLAN composed of aggregated Ethernet bundles using LACP. In these cases, setting the `mac-limit` to 1 prevents the switch from learning MAC addresses other than the automatic addresses:

- For RVIs, the first MAC address inserted into the forwarding database is the MAC address of the RVI.
- For aggregated Ethernet bundles using LACP, the first MAC address inserted into the forwarding database in the forwarding table is the source address of the protocol packet.

If the VLAN is composed of regular access or trunk interfaces, you can set the `mac-limit` to 1 if you choose to do so.

Related Documentation

- [Configuring MAC Limiting \(J-Web Procedure\)](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445](#)
- [Verifying That MAC Limiting Is Working Correctly on page 300](#)
- [Setting the none Action on an Interface to Override a MAC Limit Applied to All Interfaces \(CLI Procedure\) on page 507](#)
- [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches on page 343](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299](#)
- [Understanding Bridging and VLANs on Switches](#)
- [no-allowed-mac-log on page 865](#)
- [show vlans](#)

Configuring MAC Move Limiting (CLI Procedure)

When MAC move limiting is configured, MAC address movements are tracked by the switch and, if a MAC address changes more than the configured number of times within 1 second, the changes to MAC addresses are dropped, logged, ignored, or the interface is shut down.



NOTE: Although you enable this feature on VLANs, the MAC move limitation pertains to the number of movements for each individual MAC address rather than the total number of MAC address moves in the VLAN. For example, if the MAC move limit is set to 1, the switch allows an unlimited number of MAC address movements within the VLAN as long as the same MAC address does not change more than once.

You configure MAC move limiting per VLAN, not per interface (port). In the default configuration, the number of MAC moves permitted is unlimited.

You can choose to have one of the following actions performed when the MAC move limit is exceeded:

- **drop**—Drop the packet and generate a system log entry. This is the default.
- **log**—Do not drop the packet but generate a system log entry.
- **none**—Take no action.
- **shutdown**—Disable the interfaces in the VLAN and generate a system log entry. If you have configured the switch with the **port-error-disable** statement, the disabled interfaces recover automatically upon expiration of the specified disable timeout. If you have not configured the switch for autorecovery from port error disabled conditions, you can bring up the disabled interfaces by running the **clear ethernet-switching port-error** command.

To configure a MAC move limit for MAC addresses within a specific VLAN or for MAC addresses within all VLANs, using the CLI:

- On a single VLAN: To limit the number of MAC address movements that can be made by an individual MAC address within the VLAN **employee-vlan**, set a MAC move limit of 5:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan mac-move-limit 5
```

The action is not specified, so the switch performs the default action **drop** if it tracks that an individual MAC address within the **employee-vlan** has moved more than 5 times within one second.

- On all VLANs: To limit the number of MAC movements that can be made by individual MAC addresses within all VLANs, set a MAC move limit of 5:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all mac-move-limit 5
```

The action is not specified, so the switch performs the default action **drop** if it tracks that an individual MAC address within any of the VLANs has moved more than 5 times within 1 second.

Related Documentation

- [Configuring MAC Move Limiting \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Verifying That MAC Move Limiting Is Working Correctly on page 306](#)
- [Monitoring Port Security on page 280](#)
- [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches on page 343](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299](#)
- [clear ethernet-switching port-error on page 1066](#)
- [secure-access-port on page 964](#)

Understanding Persistent MAC Learning (Sticky MAC)

Persistent MAC learning, also known as sticky MAC, is a port security feature that enables an interface to retain dynamically learned MAC addresses when the switch is restarted or if the interface goes down and is brought back online.

Persistent MAC address learning is disabled by default. You can enable persistent MAC address learning in conjunction with MAC limiting to restrict the number of persistent MAC addresses. You enable this feature on interfaces.

Configure persistent MAC learning on an interface to:

- Prevent traffic losses for trusted workstations and servers because the interface does not have to relearn the addresses from ingress traffic after a restart.
- Protect the switch against security attacks. Use persistent MAC learning in combination with MAC limiting to protect against attacks, such as Layer 2 denial-of-service (DoS) attacks, overflow attacks on the Ethernet switching table, and DHCP starvation attacks, by limiting the MAC addresses allowed while still allowing the interface to dynamically learn a specified number of MAC addresses. The interface is secured because after the limit has been reached, additional devices cannot connect to the port.

By configuring persistent MAC learning along with MAC limiting, you enable interfaces to learn MAC addresses of trusted workstations and servers from the time when you connect the interface to your network until the limit for MAC addresses is reached, and ensure that after this limit is reached, new devices will not be allowed to connect to the interface even if the switch restarts. As an alternative to using persistent MAC learning with MAC limiting, you can statically configure each MAC address on each port or allow the port to continuously learn new MAC addresses after restarts or interface-down events. Allowing the port to continuously learn MAC addresses represents a security risk.



NOTE: While a switch is restarting or an interface is coming back up, there might be a short delay before the interface can learn more MAC addresses. This delay occurs while the system re-enters previously learned persistent MAC addresses into the forwarding database for the interface.



TIP: If you move a device within your network that has a persistent MAC address entry on the switch, use the `clear ethernet-switching table` command to clear the persistent MAC address entry from the interface. If you move the device and do not clear the persistent MAC address from the original port it was learned on, then the new port will not learn the MAC address of the device and the device will not be able to connect.

If the original port is down when you move the device, then the new port will learn the MAC address and the device can connect. However, if you do not clear the persistent MAC address on the original port, then when the port restarts, the system reinstalls the persistent MAC address in the forwarding

table for that port. If this occurs, the persistent MAC address is removed from the new port and the device loses connectivity.

.....
Consider the following configuration guidelines when configuring persistent MAC learning:

- Interfaces must be configured in access mode (use the **port-mode** configuration statement or, for switches operating on the Enhanced Layer 2 Software (ELS) configuration style, the **interface-mode** configuration statement).
- You cannot enable persistent MAC learning on an interface on which 802.1x authentication is configured.
- You cannot enable persistent MAC learning on an interface that is part of a redundant trunk group.
- You cannot enable persistent MAC learning on an interface on which **no-mac-learning** is enabled.

**Related
Documentation**

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Configuring Persistent MAC Learning \(CLI Procedure\) on page 353](#)
- [Configuring Persistent MAC Learning \(CLI Procedure\) on page 438 \(ELS\)](#)

Configuring Persistent MAC Learning (CLI Procedure)

You can configure persistent MAC learning, also known as sticky MAC, to allow dynamically learned MAC addresses to be retained on an interface across restarts of the switch.

Persistent MAC address learning is disabled by default. You can enable it to:

- Help prevent traffic losses for trusted workstations and servers because the interface does not have to relearn the addresses from ingress traffic after a restart.
- Protect the switch against security attacks—use persistent MAC learning in combination with MAC limiting to protect against attacks while still avoiding the need to statically configure MAC addresses. When the initial learning of MAC addresses up to the number specified by the MAC limit is done, new addresses will not be allowed even after a reboot. The port is secured because after the limit has been reached, additional devices cannot connect to the interface.

The first devices that send traffic after you connect are learned during the initial connection period. You can monitor the MAC addresses and provide the same level of security as if you statically configured each MAC address on each interface, except with less manual effort. Persistent MAC learning also helps prevent traffic loss for trusted workstations and servers because the interface does not have to relearn the addresses from ingress traffic.



NOTE: Interfaces configured for 802.1X authentication cannot be configured for persistent MAC learning.

**Related
Documentation**

- [Example: Configuring Basic Port Security Features on page 289](#)
- [Understanding Persistent MAC Learning \(Sticky MAC\) on page 352](#)
- [Understanding How to Protect Access Ports on EX Series Switches from Common Attacks on page 268](#)

Configuring Media Access Control Security (MACsec) on Routers

- [Example: Configuring MACsec over an MPLS CCC on MX Series Routers on page 355](#)
- [Example: Configuring MACsec over an MPLS CCC on page 377](#)
- [Understanding MACSec on PTX10K-LC1105 line card on page 400](#)
- [MACsec Supported Line Cards on page 400](#)

Example: Configuring MACsec over an MPLS CCC on MX Series Routers

This example shows how to enable MACsec to secure sensitive traffic traveling from a user at one site to a user at another site over a basic MPLS CCC.

- [Requirements on page 355](#)
- [Overview and Topology on page 356](#)
- [Configuring MPLS on page 358](#)
- [Configuring MACsec on page 365](#)
- [Configuring VLANs to Direct Traffic onto the MACsec-Secured CCC on page 369](#)
- [Verification on page 372](#)

Requirements

This example uses the following hardware and software components:

- Three MX Series routers used as the PE and provider routers in the MPLS network
- One MX Series router used as the CE router connecting site A to the MPLS network
- One MX240, MX480, or MX960 router with the enhanced 20-port Gigabit Ethernet MIC (model number MIC-3D-20GE-SFP-E) used as the CE router connecting site B to the MPLS network
- Junos OS Release 15.1R1 or later running on all MX Series routers in the MPLS network (PE1, PE2, or the provider router)
- Junos OS Release 15.1R1 or later running on the CE router at site A and the CE router at site B

Overview and Topology

In this example, financially-sensitive company data is often sent between a user at site A and a user at site B. The company wants to ensure that all network traffic traveling from the user at site A to the user at site B is highly secure and cannot be viewed or corrupted by an attacker. The company is using the industry-standard Layer 2 security provided by MACsec, which provides encryption to ensure data cannot be viewed by attackers and integrity checks to ensure transmitted data is not corrupted, to secure all traffic traveling on the CCC through the MPLS cloud connecting the sites. VLANs are configured at both sites to ensure traffic traveling between the two users traverses the sites over the MACsec-secured CCC.

The MPLS network in this example includes two provider edge (PE) routers—PE1 and PE2—and one provider (transit) router. PE1 connects the customer edge (CE) router at site A to the MPLS network and PE2 connects the CE router at site B to the MPLS network. MACsec is enabled on the CCC connecting the CE routers at site A and site B to secure traffic traveling between the sites over the CCC. A VLAN that includes the interfaces that connect the users to the CE routers, interface ge-0/0/0 on the CE router at site A and interface ge-0/0/2 on the CE router at site B, and the interfaces that connect the CE routers to the MPLS cloud (ge-0/0/0 on the site A CE router and xe-0/1/0 on the site B CE router), is used to direct all traffic between the users onto the MACsec-secured CCC.

[Table 13 on page 357](#) provides a summary of the MPLS network components in this topology.

[Table 14 on page 358](#) provides a summary of the MACsec connectivity association used in this topology. MACsec is enabled by creating a connectivity association on the interfaces at each end of a link. MACsec is enabled when the interfaces at each end of the link exchange pre-shared keys—the pre-shared keys are defined in the connectivity association—to secure the link for MACsec.

[Table 15 on page 358](#) provides a summary of the bridge domain and VLAN IDs used in this topology. The VLAN is used in this topology to direct all communication from the user at site A to the user at site B onto the MACsec-secured CCC.

Table 13: Components of the MPLS Topology

Component	Description
PE1	<p>PE router.</p> <p>lo0:</p> <ul style="list-style-type: none"> IP address: 130.1.1.1/32 Participates in OSPF and RSVP. <p>ge-0/0/0:</p> <ul style="list-style-type: none"> Customer edge interface connecting site A to the MPLS network. CCC connecting to xe-0/1/1 on PE2. <p>ge-0/0/1:</p> <ul style="list-style-type: none"> Core interface connecting PE1 to the provider router. IP address: 10.1.5.2/24 Participates in OSPF, RSVP, and MPLS.
Provider	<p>Provider router.</p> <p>lo0:</p> <ul style="list-style-type: none"> IP address: 130.1.1.2/32 Participates in OSPF and RSVP. <p>ge-0/0/10:</p> <ul style="list-style-type: none"> Core interface connecting the provider router to PE1. IP address: 10.1.5.1/24 Participates in OSPF, RSVP, and MPLS. <p>xe-0/0/0:</p> <ul style="list-style-type: none"> Core interface connecting the provider router to PE2. IP address: 10.1.9.1/24 Participates in OSPF, RSVP, and MPLS.
PE2	<p>PE router.</p> <p>lo0:</p> <ul style="list-style-type: none"> IP address: 130.1.1.3/32 Participates in OSPF and RSVP. <p>xe-0/1/0</p> <ul style="list-style-type: none"> Core interface connecting PE2 to the provider router. IP address: 10.1.9.2/24 Participates in OSPF, RSVP, and MPLS. <p>xe-0/1/1</p> <ul style="list-style-type: none"> Customer edge interface connecting site B to the MPLS network. CCC connecting to ge-0/0/0 on PE1.

Table 13: Components of the MPLS Topology (continued)

Component	Description
<code>lsp_to_pe2_xe1</code> label-switched path	Label-switched path from PE1 to PE2.
<code>lsp_to_pe1_ge0</code> label-switched path	Label-switched path from PE2 to PE1.

Table 14: MACsec Connectivity Association Summary

Connectivity Association	Description
<code>ccc-macsec</code>	<p>Connectivity association enabling MACsec on CCC connecting site A to site B.</p> <p>The connectivity association is enabled on the following interfaces:</p> <ul style="list-style-type: none"> Site A CE router: <code>ge-0/0/0</code> Site B CE router: <code>xe-0/1/0</code>

Table 15: Bridge Domains Summary

Bridge Domain	Description
<code>macsec</code>	<p>VLAN directing traffic between the user at site A and the user at site B onto the MACsec-secured CCC.</p> <p>The bridge domain includes the following interfaces:</p> <ul style="list-style-type: none"> Site A CE router: <code>ge-0/0/0</code> Site A CE router: <code>ge-0/0/1</code> Site B CE router: <code>xe-0/1/0</code> Site B CE router: <code>ge-0/0/2</code>

Configuring MPLS

This section explains how to configure MPLS on each router in the MPLS network.

It includes the following sections:

- [Configuring MPLS on PE1 on page 358](#)
- [Configuring MPLS on the Provider Router on page 361](#)
- [Configuring MPLS on PE2 on page 363](#)
- [Results on page 364](#)

Configuring MPLS on PE1

CLI Quick Configuration

To quickly configure the MPLS configuration on the PE1 router, use the following commands:

```
[edit]
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface ge-0/0/1.0
```



```

set protocols mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3
set protocols mpls interface ge-0/0/1.0
set protocols rsvp interface lo0.0
set protocols rsvp interface ge-0/0/1.0
set interfaces lo0 unit 0 family inet address 130.1.1.1/32
set interfaces ge-0/0/1 unit 0 family inet address 10.1.5.2/24
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/0 unit 0 family ccc
set protocols connections remote-interface-switch ge-1-to-pe2 interface ge-0/0/0.0
set protocols connections remote-interface-switch ge-1-to-pe2 transmit-lsp lsp_to_pe2_xe1
set protocols connections remote-interface-switch ge-1-to-pe2 receive-lsp lsp_to_pe1_ge0

```

Step-by-Step Procedure

To configure MPLS on router PE1:

1. Configure OSPF with traffic engineering enabled:

```

[edit protocols]
user@router-PE1# set ospf traffic-engineering

```

2. Configure OSPF on the loopback address and the core interfaces:

```

[edit protocols]
user@router-PE1# set ospf area 0.0.0.0 interface lo0.0
user@router-PE1# set ospf area 0.0.0.0 interface ge-0/0/1.0

```

3. Configure MPLS on this router, PE1, with an LSP to the PE2 router:

```

[edit protocols]
user@router-PE1# set mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3

```

4. Configure MPLS on the core interfaces:

```

[edit protocols]
user@router-PE1# set mpls interface ge-0/0/1.0

```

5. Configure RSVP on the loopback interface and the core interfaces:

```

[edit protocols]
user@router-PE1# set rsvp interface lo0.0
user@router-PE1# set rsvp interface ge-0/0/1.0

```

6. Configure IP addresses for the loopback interface and the core interfaces:

```

[edit]
user@router-PE1# set interfaces lo0 unit 0 family inet address 130.1.1.1/32
user@router-PE1# set interfaces ge-0/0/1 unit 0 family inet address 10.1.5.2/24

```

7. Configure **family mpls** on the logical unit of the core interface addresses:

```

[edit]
user@router-PE1# set interfaces ge-0/0/1 unit 0 family mpls

```

8. Configure the logical unit of the customer edge interface as a CCC:

```

[edit interfaces ge-0/0/0 unit 0]
user@PE-1# set family ccc

```

9. Configure the interface-based CCC from PE1 to PE2:

```
[edit protocols]
user@PE-1# set connections remote-interface-switch ge-1-to-pe2 interface ge-0/0/0.0
user@PE-1# set connections remote-interface-switch ge-1-to-pe2 transmit-lsp
lsp_to_pe2_xe1
user@PE-1# set connections remote-interface-switch ge-1-to-pe2 receive-lsp lsp_to_pe1_ge0
```

Results Display the results of the configuration:

```
user@PE-1> show configuration

interfaces {
  ge-0/0/0 {
    unit 0 {
      family ccc;
    }
  }
  ge-0/0/1 {
    unit 0 {
      family inet {
        address 130.1.5.2/24;
      }
      family mpls;
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 130.1.1.1/32;
      }
    }
  }
}
protocols {
  rsvp {
    interface lo0.0;
    interface ge-0/0/1.0;
  }
  mpls {
    label-switched-path lsp_to_pe2_xe1 {
      to 130.1.1.3;
    }
    interface ge-0/0/1.0;
  }
  ospf {
    traffic-engineering;
    area 0.0.0.0 {
      interface lo0.0;
      interface ge-0/0/1.0;
    }
  }
}
connections {
  remote-interface-switch ge-1-to-pe2 {
```

```

        interface ge-0/0/0.0;
        transmit-lsp lsp_to_pe2_xe1;
        receive-lsp lsp_to_pe1_ge0;
    }
}

```

Configuring MPLS on the Provider Router

CLI Quick Configuration To quickly configure the MPLS configuration on the provider router, use the following commands:

```

[edit]
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface ge-0/0/10.0
set protocols ospf area 0.0.0.0 interface xe-0/0/0.0
set protocols mpls interface ge-0/0/10.0
set protocols mpls interface xe-0/0/0.0
set protocols mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3
set protocols rsvp interface lo0.0
set protocols rsvp interface ge-0/0/10.0
set protocols rsvp interface xe-0/0/0.0
set interfaces lo0 unit 0 family inet address 130.1.1.2/32
set interfaces ge-0/0/10 unit 0 family inet address 10.1.5.1/24
set interfaces ge-0/0/10 unit 0 family mpls
set interfaces xe-0/0/0 unit 0 family inet address 10.1.9.1/24
set interfaces xe-0/0/0 unit 0 family mpls

```

Step-by-Step Procedure To configure the provider router:

1. Configure OSPF with traffic engineering enabled:

```

[edit protocols]
user@router-P# set ospf traffic-engineering

```

2. Configure OSPF on the loopback interface and the core interfaces:

```

[edit protocols]
user@router-P# set ospf area 0.0.0.0 interface lo0.0
user@router-P# set ospf area 0.0.0.0 interface ge-0/0/10.0
user@router-P# set ospf area 0.0.0.0 interface xe-0/0/0.0

```

3. Configure MPLS on the core interfaces on the router:

```

[edit protocols]
user@router-P# set mpls interface ge-0/0/10.0
user@router-P# set mpls interface xe-0/0/0.0

```

4. Configure RSVP on the loopback interface and the core interfaces:

```

[edit protocols]
user@router-P# set rsvp interface lo0.0
user@router-P# set rsvp interface ge-0/0/10.0
user@router-P# set rsvp interface xe-0/0/0.0

```

5. Configure IP addresses for the loopback interface and the core interfaces:

```
[edit]
user@router-P# set interfaces lo0 unit 0 family inet address 130.1.1.2/32
user@router-P# set interfaces ge-0/0/10 unit 0 family inet address 10.1.5.1/24
user@router-P# set interfaces xe-0/0/0 unit 0 family inet address 10.1.9.1/24
```

6. Configure **family mpls** on the logical unit of the core interface addresses:

```
[edit]
user@router-P# set interfaces ge-0/0/10 unit 0 family mpls
user@router-P# set interfaces xe-0/0/0 unit 0 family mpls
```

7. Configure the LSP to the PE2 router:

```
[edit]
user@router-P# set protocols mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3
```

Results Display the results of the configuration:

```
user@router-P> show configuration
```

```
interfaces {
  ge-0/0/10 {
    unit 0 {
      family inet {
        address 10.1.5.1/24;
      }
      family mpls;
    }
  }
  xe-0/0/0 {
    unit 0 {
      family inet {
        address 10.1.9.1/24;
      }
      family mpls;
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 130.1.1.2/32;
      }
    }
  }
}
protocols {
  rsvp {
    interface lo0.0;
    interface ge-0/0/10.0;
    interface xe-0/0/0.0;
  }
  mpls {
```

```

label-switched-path lsp_to_pe2_xe1 {
  to 130.1.1.3;
}
interface ge-0/0/10.0;
interface xe-0/0/0.0;
}
ospf {
  traffic-engineering;
  area 0.0.0.0 {
    interface lo0.0;
    interface ge-0/0/10.0;
    interface xe-0/0/0.0;
  }
}
}

```

Configuring MPLS on PE2

CLI Quick Configuration

To quickly configure the MPLS configuration on router PE2, use the following commands:

```

[edit]
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface xe-0/1/0.0
set protocols mpls label-switched-path lsp_to_pe1_ge0 to 130.1.1.1
set protocols mpls interface xe-0/1/0.0
set protocols rsvp interface lo0.0
set protocols rsvp interface xe-0/1/0.0
set interfaces lo0 unit 0 family inet address 130.1.1.3/32
set interfaces xe-0/1/0 unit 0 family inet address 10.1.9.2/24
set interfaces xe-0/1/0 unit 0 family mpls
set interfaces xe-0/1/1 unit 0 family ccc
set protocols connections remote-interface-switch xe-1-to-pe1 interface xe-0/1/1.0
set protocols connections remote-interface-switch xe-1-to-pe1 transmit-lsp lsp_to_pe1_ge0
set protocols connections remote-interface-switch xe-1-to-pe1 receive-lsp lsp_to_pe2_xe1

```

Step-by-Step Procedure

To configure router PE2:

1. Configure OSPF with traffic engineering enabled:

```

[edit protocols]
user@router-PE2# set ospf traffic-engineering

```

2. Configure OSPF on the loopback interface and the core interface:

```

[edit protocols]
user@router-PE2# set ospf area 0.0.0.0 interface lo0.0
user@router-PE2# set ospf area 0.0.0.0 interface xe-0/1/0.0

```

3. Configure MPLS on this router (PE2) with a label-switched path (LSP) to the other PE router (PE1):

```

[edit protocols]
user@router-PE2# set mpls label-switched-path lsp_to_pe1_ge0 to 130.1.1.1

```

4. Configure MPLS on the core interface:

```
[edit protocols]
user@router-PE2# set mpls interface xe-0/1/0.0
```

5. Configure RSVP on the loopback interface and the core interface:

```
[edit protocols]
user@router-PE2# set rsvp interface lo0.0
user@router-PE2# set rsvp interface xe-0/1/0.0
```

6. Configure IP addresses for the loopback interface and the core interface:

```
[edit]
user@router-PE2# set interfaces lo0 unit 0 family inet address 130.1.1.3/32
user@router-PE2# set interfaces xe-0/1/0 unit 0 family inet address 10.1.9.2/24
```

7. Configure **family mpls** on the logical unit of the core interface:

```
[edit]
user@router-PE2# set interfaces xe-0/1/0 unit 0 family mpls
```

8. Configure the logical unit of the customer edge interface as a CCC:

```
[edit interfaces xe-0/1/1 unit 0]
user@router-PE2# set family ccc
```

9. Configure the interface-based CCC between the primary edge routers:

```
[edit protocols]
user@router-PE2# set connections remote-interface-switch xe-1-to-pe1 interface xe-0/1/1.0
user@router-PE2# set connections remote-interface-switch xe-1-to-pe1 transmit-lsp
lsp_to_pe1_ge0
user@router-PE2# set connections remote-interface-switch xe-1-to-pe1 receive-lsp
lsp_to_pe2_xe1
```

Results

Display the results of the configuration:

```
user@router-PE2> show configuration
```

```
interfaces {
  xe-0/1/0 {
    unit 0 {
      family inet {
        address 10.1.9.2/24;
      }
      family mpls;
    }
  }
  xe-0/1/1 {
    unit 0 {
      family ccc;
    }
  }
}
```

```

    }
    lo0 {
        unit 0 {
            family inet {
                address 130.1.1.3/32;
            }
        }
    }
}
protocols {
    rsvp {
        interface lo0.0;
        interface xe-0/1/0.0;
    }
    mpls {
        label-switched-path lsp_to_pe1_ge0 {
            to 130.1.1.1;
        }
        interface xe-0/1/0.0;
    }
    ospf {
        traffic-engineering;
        area 0.0.0.0 {
            interface lo0.0;
            interface xe-0/1/0.0;
        }
    }
    connections {
        remote-interface-switch xe-1-to-pe1 {
            interface xe-0/1/1.0;
            transmit-lsp lsp_to_pe1_ge0;
            receive-lsp lsp_to_pe2_xe1;
        }
    }
}

```

Configuring MACsec

This section explains how to configure MACsec on each router in the topology.

It includes the following sections:

- [Configuring MACsec on the Site A CE Router to Secure Traffic to Site B on page 366](#)
- [Configuring MACsec on the Site B CE Router to Secure Traffic to Site A on page 367](#)

Configuring MACsec on the Site A CE Router to Secure Traffic to Site B

CLI Quick Configuration

```
[edit]
set security macsec connectivity-association ccc-macsec security-mode static-cak
set security macsec connectivity-association ccc-macsec pre-shared-key ckn
37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
set security macsec connectivity-association ccc-macsec pre-shared-key cak
228ef255aa23ff6729ee664acb66e91f
set security macsec interfaces ge-0/0/0 connectivity-association ccc-macsec
```

Step-by-Step Procedure

In this example, the traffic between the users that often exchange financially-sensitive data is sent between the sites on a CCC through the MPLS cloud. MACsec is enabled on the CCC by configuring a MACsec connectivity association on the interfaces on the site A and site B CE routers that connect to the MPLS PE routers. The connectivity associations must have matching connectivity-association names (in this example, **ccc-macsec**), matching CKNs (in this example, **37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311**), and CAKs (in this example, **228ef255aa23ff6729ee664acb66e91f**) in order to establish a MACsec-secure connection.

To enable MACsec on the CCC connecting site A to site B, perform the following procedure on the site A CE router:

1. Create the connectivity association named **ccc-macsec**, and configure the MACsec security mode as **static-cak**:

```
[edit security macsec]
user@router-CE-A# set connectivity-association ccc-macsec security-mode static-cak
```

2. Create the pre-shared key by configuring the CKN and CAK:

```
[edit security macsec]
user@router-CE-A# set connectivity-association ccc-macsec pre-shared-key ckn
37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
user@router-CE-A# set connectivity-association ccc-macsec pre-shared-key cak
228ef255aa23ff6729ee664acb66e91f
```

3. Assign the connectivity association to the interface connecting to the PE1 router:

```
[edit security macsec]
user@router-CE-A# set interfaces ge-0/0/0 connectivity-association ccc-macsec
```

This completes the steps for configuring the connectivity association on one end of the CCC. MACsec is not enabled until a connectivity association with matching pre-shared keys is enabled on the opposite end of a link, which in this case is the interface on the site B CE router, of the CCC. The process for configuring the connectivity association on the site B CE router is described in the following section.

Results Display the results of the configuration:

```
user@router-CE-A> show configuration

security {
  macsec {
    connectivity-association {
      ccc-macsec {
        pre-shared-key {
          cak "$9$rJ-lWLxNdw24Xxik.PQzreK"; ## SECRET-DATA
          ckn 37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311;
        }
        security-mode {
          static-cak;
        }
      }
    }
  }
  interfaces {
    ge-0/0/0 {
      connectivity-association {
        ccc-macsec;
      }
    }
  }
}
```

Configuring MACsec on the Site B CE Router to Secure Traffic to Site A

CLI Quick Configuration [edit]
 set security macsec connectivity-association ccc-macsec security-mode static-cak
 set security macsec connectivity-association ccc-macsec pre-shared-key ckn
 37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
 set security macsec connectivity-association ccc-macsec pre-shared-key cak
 228ef255aa23ff6729ee664acb66e91f
 set security macsec interfaces xe-0/1/0 connectivity-association ccc-macsec

Step-by-Step Procedure Traffic travels from site B to site A over the MPLS network using a CCC. MACsec is enabled on the CCC by configuring a MACsec connectivity association on the interfaces on the site A and site B CE routers that connect to the MPLS PE routers. The connectivity associations must have matching connectivity-association names (in this example, **ccc-macsec**), matching CKNs (**37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311**), and matching CAKs (**228ef255aa23ff6729ee664acb66e91f**) in order to establish a MACsec-secure connection.

To enable MACsec on the CCC connecting site B to site A, perform the following procedure on the site B CE router:

1. Create the connectivity association named **ccc-macsec**, and configure the MACsec security mode as **static-cak**:

```
[edit security macsec]
```

```
user@router-CE-B# set connectivity-association ccc-macsec security-mode static-cak
```

2. Create the pre-shared key by configuring the CKN and CAK:

```
[edit security macsec]
user@router-CE-B# set connectivity-association ccc-macsec pre-shared-key ckn
37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
user@router-CE-B# set connectivity-association ccc-macsec pre-shared-key cak
228ef255aa23ff6729ee664acb66e91f
```

3. Assign the connectivity association to the interface connecting to router PE2:

```
[edit security macsec]
user@router-CE-B# set interfaces xe-0/1/0 connectivity-association ccc-macsec
```

MACsec is enabled for the CCC after the pre-shared keys are exchanged, which is shortly after this procedure is completed.

Results Display the results of the configuration:

```
user@router-CE-B> show configuration
```

```
security {
  macsec {
    connectivity-association {
      ccc-macsec {
        security-mode {
          static-cak;
        }
        pre-shared-key {
          cak "$9$rJ-lWLxNdw24Xxik.PQzreK"; ## SECRET-DATA
          ckn 37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311;
        }
      }
    }
  }
  interfaces {
    xe-0/1/0 {
      connectivity-association {
        ccc-macsec;
      }
    }
  }
}
```

Configuring VLANs to Direct Traffic onto the MACsec-Secured CCC

This section explains how to configure VLANs on the site A and site B CE routers. The purpose of the VLANs is to direct traffic that you want to be MACsec-secured onto the MACsec-secured CCC.

- [Configuring the Bridge Domain to Direct Traffic to the MACsec CCC on the Site A CE Router on page 369](#)
- [Configuring the Bridge Domain to Direct Traffic to the MACsec CCC on the Site B CE Router on page 371](#)

Configuring the Bridge Domain to Direct Traffic to the MACsec CCC on the Site A CE Router

CLI Quick Configuration

```
[edit]
set interfaces ge-0/0/0 unit 0 encapsulation vlan-bridge
set interfaces ge-0/0/0 unit 0 family bridge
set interfaces ge-0/0/2 unit 0 encapsulation vlan-bridge
set interfaces ge-0/0/2 unit 0 family bridge
set bridge-domains macsec vlan-id 50
set bridge-domains macsec domain-type bridge
set bridge-domains macsec vlan-id all
set bridge-domains macsec interface ge-0/0/0
set bridge-domains macsec interface ge-0/0/2
set interfaces irb vlan-id 50 family inet address 5.5.5.1/24
```

Step-by-Step Procedure

To create a bridge domain (VLAN ID 50) that directs traffic from the user at site A onto the MACsec-secured CCC:

1. Configure the ge-0/0/0 interface with VLAN encapsulation and the bridge family.

```
user@router-CE-A# set interfaces ge-0/0/0 unit 0 encapsulation vlan-bridge
user@router-CE-A# set interfaces ge-0/0/0 unit 0 family bridge vlan-id 50
```

2. Configure the ge-0/0/2 interface with VLAN encapsulation and the bridge family.

```
[edit]
user@router-CE-A# set interfaces ge-0/0/2 unit 0 encapsulation vlan-bridge
user@router-CE-A# set interfaces ge-0/0/2 unit 0 family bridge vlan-id 50
```

3. Define the macsec bridge domain and associate the interfaces, ge-0/0/0 and ge-0/0/2, with the bridge domain.

```
[edit]
user@router-CE-A# set bridge-domains macsec vlan-id 50
user@router-CE-A# set bridge-domains macsec domain-type bridge
user@router-CE-A# set bridge-domains macsec interface ge-0/0/0
user@router-CE-A# set bridge-domains macsec interface ge-0/0/2
```

4. Create the IP address for the macsec bridge domain:

```
[edit]
user@router-CE-A# set interfaces irb vlan-id 50 family inet address 5.5.5.1/24
```

Results Display the results of the configuration:

```
user@router-CE-A> show configuration
interfaces {
  ge-0/0/0 {
    unit 0 {
      encapsulation vlan-bridge;
      family bridge {
        vlan-id 50;
      }
    }
  }
  ge-0/0/2 {
    unit 0 {
      encapsulation vlan-bridge;
      family bridge {
        vlan-id 50;
      }
    }
  }
  irb {
    vlan-id 50 {
      family inet address 5.5.5.1/24;
    }
  }
}
bridge-domains {
  macsec {
    domain-type bridge;
    vlan-id 50;
    interface ge-0/0/0;
    interface ge-0/0/2;
  }
}
```

Configuring the Bridge Domain to Direct Traffic to the MACsec CCC on the Site B CE Router

CLI Quick Configuration

```
[edit]
set interfaces xe-0/1/0 unit 0 encapsulation vlan-bridge
set interfaces xe-0/1/0 unit 0 family bridge
set interfaces ge-0/0/2 unit 0 encapsulation vlan-bridge
set interfaces ge-0/0/2 unit 0 family bridge
set bridge-domains macsec vlan-id 50
set bridge-domains macsec domain-type bridge
set bridge-domains macsec vlan-id all
set bridge-domains macsec interface ge-0/0/2
set bridge-domains macsec interface xe-0/1/0
set interfaces irb vlan-id 50 family inet address 5.5.5.2/24
```

Step-by-Step Procedure

To create a bridge domain (VLAN ID 50) to direct traffic for the user at site B onto the MACsec-secured CCC:

1. Configure the xe-0/1/0 interface with VLAN encapsulation and the bridge family.

```
user@router-CE-A# set interfaces xe-0/1/0 unit 0 encapsulation vlan-bridge
user@router-CE-A# set interfaces xe-0/1/0 unit 0 family bridge vlan-id 50
```

2. Configure the ge-0/0/2 interface with VLAN encapsulation and the bridge family.

```
[edit]
user@router-CE-A#set interfaces ge-0/0/2 unit 0 encapsulation vlan-bridge
user@router-CE-A#set interfaces ge-0/0/2 unit 0 family bridge vlan-id 50
```

3. Define the macsec bridge domain and associate the interfaces, xe-0/1/0 and ge-0/0/2, with the bridge domain.

```
[edit]
user@router-CE-A# set bridge-domains macsec vlan-id 50
user@router-CE-A# set bridge-domains macsec domain-type bridge
user@router-CE-A# set bridge-domains macsec interface xe-0/1/0
user@router-CE-A# set bridge-domains macsec interface ge-0/0/2
```

4. Create the IP address for the macsec bridge domain:

```
[edit]
user@router-CE-A# set interfaces irb vlan-id 50 family inet address 5.5.5.2/24
```

Results Display the results of the configuration:

```
user@router-CE-B> show configuration
interfaces {
  ge-0/0/2 {
    unit 0 {
      encapsulation vlan-bridge;
      family bridge {
        vlan-id 50;
```

```
    }  
  }  
}  
xe-0/1/0 {  
  unit 0 {  
    encapsulation vlan-bridge;  
    family bridge {  
      vlan-id 50;  
    }  
  }  
}  
irb {  
  vlan-id 50 {  
    family inet address 5.5.5.2/24;  
  }  
}  
}  
bridge-domains {  
  macsec {  
    domain-type bridge;  
    vlan-id 50;  
    interface xe-0/1/0;  
    interface ge-0/0/2;  
  }  
}
```

Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying the MACsec Connection on page 372](#)
- [Verifying That MACsec-Secured Traffic Is Traversing the CCCs on page 373](#)
- [Verifying That the MPLS and CCC Protocols Are Enabled on the Provider Edge and Provider Switch Interfaces on page 374](#)
- [Verifying MPLS Label Operations on page 375](#)
- [Verifying the Status of the MPLS CCCs on page 375](#)
- [Verifying OSPF Operation on page 376](#)
- [Verifying the Status of the RSVP Sessions on page 376](#)

Verifying the MACsec Connection

Purpose Verify that MACsec is operational on the CCC.

Action Enter the `show security macsec connections` command on one or both of the customer edge (CE) switches.

```
user@router-CE-A> show security macsec connections  
Interface name: ge-0/0/0  
  CA name: ccc-macsec  
  Cipher suite: GCM-AES-128  Encryption: on  
  Key server offset: 0       Include SCI: no
```

```

Replay protect: off           Replay window: 0
Outbound secure channels
  SC Id: 00:19:E2:53:CD:F3/1
  Outgoing packet number: 9785
  Secure associations
    AN: 0 Status: inuse Create time: 2d 20:47:54
Inbound secure channels
  SC Id: 00:23:9C:0A:53:33/1
  Secure associations
    AN: 0 Status: inuse Create time: 2d 20:47:54

```

Meaning The **Interface name:** and **CA name:** outputs shows that the ccc-macsec connectivity association is operational on interface ge-0/0/0. The output does not appear when the connectivity association is not operational on the interface.

For additional verification that MACsec is operational on the CCC, you can also enter the **show security macsec connections** command on the other CE switch.

Verifying That MACsec-Secured Traffic Is Traversing the CCCs

Purpose Verify that traffic traversing the CCC is MACsec-secured.

Action Enter the **show security macsec statistics** command on one or both of the CE switches.

```

user@router-CE-A> show security macsec statistics
Interface name: ge-0/0/0
  Secure Channel transmitted
    Encrypted packets: 9784
    Encrypted bytes:   2821527
    Protected packets: 0
    Protected bytes:   0
  Secure Association transmitted
    Encrypted packets: 9784
    Protected packets: 0
  Secure Channel received
    Accepted packets: 9791
    Validated bytes:   0
    Decrypted bytes:   2823555
  Secure Association received
    Accepted packets: 9791
    Validated bytes:   0
    Decrypted bytes:   2823555

```

Meaning The **Encrypted packets** line under the **Secure Channel transmitted** output is incremented each time a packet is sent from the interface that is secured and encrypted by MACsec. The **Encrypted packets** output shows that 9784 encrypted and secured packets have been transmitted from interface ge-0/0/0. MACsec-secured traffic is, therefore, being sent on interface ge-0/0/0.

The **Accepted packets** line under the **Secure Association received** output is incremented each time a packet that has passed the MACsec integrity check is received on the interface. The **Decrypted bytes** line under the **Secure Association received** output is incremented

each time an encrypted packet is received and decrypted. The output shows that 9791 MACsec-secured packets have been received on interface ge-0/0/0, and that 2823555 bytes from those packets have been successfully decrypted. MACsec-secured traffic is, therefore, being received on interface ge-0/0/0.

For additional verification, you can also enter the **show security macsec statistics** command on the other CE switch.

Verifying That the MPLS and CCC Protocols Are Enabled on the Provider Edge and Provider Switch Interfaces

Purpose Verify that MPLS is enabled on the correct interfaces for the PE and provider switches.

Action Enter the **show interfaces terse** command on both of the PE routers and the provider switch:

```
user@router-PE1> show interfaces terse
Interface      Admin Link Proto  Local          Remote
ge-0/0/0       up    up
ge-0/0/0.0     up    up    ccc
ge-0/0/1       up    up
ge-0/0/1.0     up    up    inet    10.1.5.2/24
               up    up    mpls
```

<some output removed for brevity>

```
user@router-P> show interfaces terse
Interface      Admin Link Proto  Local          Remote
xe-0/0/0       up    up
xe-0/0/0.0     up    up    inet    10.1.9.1/24
               up    up    mpls
ge-0/0/10      up    up
ge-0/0/10.0    up    up    inet    10.1.5.1/24
               up    up    mpls
```

<some output removed for brevity>

```
user@router-PE2> show interfaces terse
Interface      Admin Link Proto  Local          Remote
xe-0/1/0       up    up
xe-0/1/0.0     up    up    inet    10.1.9.2/24
               up    up    mpls
xe-0/1/1       up    up
xe-0/1/1.0     up    up    ccc
```

<some output removed for brevity>

Meaning The output confirms that the MPLS protocol is up for the provider switch interfaces passing MPLS traffic—xe-0/0/0 and ge-0/0/10—and on the PE router interfaces passing MPLS traffic, which is interface ge-0/0/1 on the PE1 switch and interface xe-0/1/0 on the PE2 router.

The output also confirms that CCC is enabled on the PE router interfaces facing the CE switches, which are interface ge-0/0/0 on the PE1 switch and interface xe-0/1/1 on the PE2 router.

Verifying MPLS Label Operations

Purpose Verify which interface is being used as the beginning of the CCC and which interface is being used to push the MPLS packet to the next hop.

Action Enter the **show route forwarding-table family mpls** on one or both of the PE routers.

```
user@router-PE1> show route forwarding-table family mpls
```

```
Routing table: default.mpls
```

```
MPLS:
```

Destination	Type	RtRef	Next hop	Type	Index	NhRef	Netif
default	perm	0		dscd	50	1	
0	user	0		recv	49	4	
1	user	0		recv	49	4	
2	user	0		recv	49	4	
13	user	0		recv	49	4	
299856	user	0		Pop	1327	2	ge-0/0/0.0
ge-0/0/0.0 (CCC)	user	0	10.1.5.1	Push	299952	1328	2 ge-0/0/1.0

Meaning This output confirms that the CCC is configured on interface ge-0/0/0.0. The switch receives ingress traffic on ge-0/0/1.0 and pushes label 299952 onto the packet, which exits the switch through interface ge-0/0/1.0. The output also shows that when the switch receives an MPLS packet with label 299856, it pops the label and sends the packet out through interface ge-0/0/0.0

For further verification of MPLS label operations, enter the **show route forwarding-table family mpls** on the other PE router.

Verifying the Status of the MPLS CCCs

Purpose Verify that the MPLS CCCs are operating.

Action Enter the **show connections** command on the PE routers.

```
user@router-PE1> show connections
```

```
CCC and TCC connections [Link Monitoring On]
```

```
Legend for status (St):
```

```
UN -- uninitialized
```

```
NP -- not present
```

```
WE -- wrong encapsulation
```

```
DS -- disabled
```

```
Dn -- down
```

```
-> -- only outbound conn is up
```

```
<- -- only inbound conn is up
```

```
Up -- operational
```

```
RmtDn -- remote CCC down
```

```
Restart -- restarting
```

```
Legend for connection types:
```

```
if-sw: interface switching
```

```
rmt-if: remote interface switching
```

```
lsp-sw: LSP switching
```

```
tx-p2mp-sw: transmit P2MP switching
```

```
rx-p2mp-sw: receive P2MP switching
```

```
Legend for circuit types:
```

```
intf -- interface
```

```
oif -- outgoing interface
```

```
tlsp -- transmit LSP
```

```
rlsp -- receive LSP
```

Connection/Circuit	Type	St	Time last up	# Up trans
ge-1-to-pe2	rmt-if	Up	May 30 19:01:45	1

```

ge-0/0/0.0          intf    Up
lsp_to_pe2_xe1      tlsp    Up
lsp_to_pe1_ge0      rlsp    Up

```

```
user@router-PE2> show connections
```

```
CCC and TCC connections [Link Monitoring On]
```

```
Legend for status (St):
```

```

UN -- uninitialized
NP -- not present
WE -- wrong encapsulation
DS -- disabled
Dn -- down
-> -- only outbound conn is up
<- -- only inbound conn is up
Up -- operational
RmtDn -- remote CCC down
Restart -- restarting

```

```
Legend for connection types:
```

```

if-sw: interface switching
rmt-if: remote interface switching
lsp-sw: LSP switching
tx-p2mp-sw: transmit P2MP switching
rx-p2mp-sw: receive P2MP switching

```

```
Legend for circuit types:
```

```

intf -- interface
oif -- outgoing interface
tlsp -- transmit LSP
rlsp -- receive LSP

```

Connection/Circuit	Type	St	Time last up	# Up trans
xe-1-to-pe1	rmt-if	Up	May 30 09:39:15	1
xe-0/1/1.0	intf	Up		
lsp_to_pe1_ge0	tlsp	Up		
lsp_to_pe2_xe1	rlsp	Up		

The **show connections** command displays the status of the CCC connections. This output verifies that the CCC interfaces and their associated transmit and receive LSPs are **Up** on both PE routers.

Verifying OSPF Operation

Purpose Verify that OSPF is running.

Action Enter the **show ospf neighbor** command the provider or the PE routers, and check the **State** output.

```
user@router-P> show ospf neighbor
```

Address	Interface	State	ID	Pri	Dead
10.1.5.2	ge-0/0/10.0	Full	130.1.1.1	128	33
10.1.9.2	xe-0/0/0.0	Full	130.1.1.3	128	38

Meaning The **State** output is **Full** on all interfaces using OSPF, so OSPF is operating.

For further verification on OSPF, enter the **show ospf neighbor** command on the PE routers in addition to the provider switch.

Verifying the Status of the RSVP Sessions

Purpose Verify the status of the RSVP sessions.

Action Enter the **show rsvp session** command, and verify that the state is up for each RSVP session.

```
user@router-P> show rsvp session
```

```
Ingress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0
```

```
Egress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0
```

```
Transit RSVP: 2 sessions
To          From          State  Rt  Style Labelin Labelout LSPname
130.1.1.1   130.1.1.3   Up     0   1 FF  299936  299856 lsp_to_pe1_ge0
130.1.1.3   130.1.1.1   Up     0   1 FF  299952  299840 lsp_to_pe2_xe1
Total 2 displayed, Up 2, Down 0
```

Meaning The **State** is **Up** for all connections, so RSVP is operating normally.

For further verification, enter the **show rsvp session** on the PE routers in addition to the provider router.

Example: Configuring MACsec over an MPLS CCC

This example shows how to enable MACsec to secure sensitive traffic traveling from a user at one site to a user at another site over a basic MPLS CCC.

- [Requirements on page 377](#)
- [Overview and Topology on page 378](#)
- [Configuring MPLS on page 381](#)
- [Configuring MACsec on page 388](#)
- [Configuring VLANs to Direct Traffic onto the MACsec-Secured CCC on page 392](#)
- [Verification on page 394](#)

Requirements

This example uses the following hardware and software components:

- Three EX4550 switches used as the PE and provider switches in the MPLS network
- One EX4550 switch used as the CE switch connecting site A to the MPLS network
- One EX4200 switch that has installed an SFP+ MACsec uplink module used as the CE switch connecting site B to the MPLS network
- Junos OS Release 12.2R1 or later running on all EX4550 switches in the MPLS network (PE1, PE2, or the provider switch)
- Junos OS Release 13.2X50-D15 (controlled version) or later running on the CE switch at site A and the CE switch at site B



NOTE: The controlled version of Juniper Networks Junos operating system (Junos OS) software must be downloaded to enable MACsec. MACsec software support is not available in the domestic version of Junos OS software, which is installed on the switch by default. The controlled version of Junos OS software includes all features and functionality available in the domestic version of Junos OS, while also supporting MACsec. See “[Understanding Media Access Control Security \(MACsec\)](#)” on page 403 for additional information about MACsec software requirements.

- A MACsec feature license installed on the CE switch at site A and the CE switch at site B



NOTE: To purchase a software license for MACsec, contact your Juniper Networks sales representative (<https://www.juniper.net/us/en/contact-us/sales-offices>). The Juniper Networks sales representative will provide you with a feature license file and a license key. You will be asked to supply the chassis serial number of your switch; you can obtain the serial number by running the `show virtual-chassis` or `show chassis hardware` command.

Overview and Topology

In this example, financially-sensitive company data is often sent between a user at site A and a user at site B. The company wants to ensure that all network traffic traveling from the user at site A to the user at site B is highly secure and cannot be viewed or corrupted by an attacker. The company is using the industry-standard Layer 2 security provided by MACsec, which provides encryption to ensure data cannot be viewed by attackers and integrity checks to ensure transmitted data is not corrupted, to secure all traffic traveling on the CCC through the MPLS cloud connecting the sites. VLANs are configured at both sites to ensure traffic traveling between the two users traverses the sites over the MACsec-secured CCC.

The MPLS network in this example includes two provider edge (PE) switches— PE1 and PE2— and one provider (transit) switch. PE1 connects the customer edge (CE) switch at site A to the MPLS network and PE2 connects the CE switch at site B to the MPLS network. MACsec is enabled on the CCC connecting the CE switches at site A and site B to secure traffic traveling between the sites over the CCC. A VLAN that includes the interfaces that connect the users to the CE switches, interface `ge-0/0/0` on the CE switch at site A and interface `ge-0/0/2` on the CE switch at site B, and the interfaces that connect the CE switches to the MPLS cloud (`ge-0/0/0` on the site A CE switch and `xe-0/1/0` on the site B CE switch), is used to direct all traffic between the users onto the MACsec-secured CCC.

[Figure 20 on page 379](#) shows the topology used in this example. The MACsec-secured CCC traffic is labeled **MACsec CCC** in the figure.

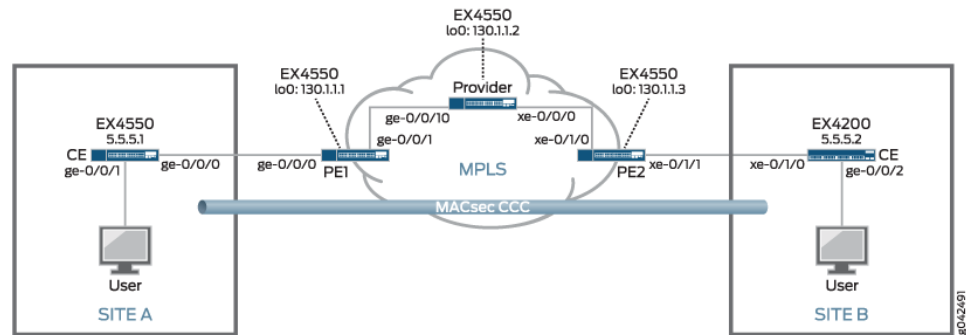


Table 13 on page 357 provides a summary of the MPLS network components in this topology.

Table 14 on page 358 provides a summary of the MACsec connectivity association used in this topology. MACsec is enabled by creating a connectivity association on the interfaces at each end of a link. MACsec is enabled when the interfaces at each end of the link exchange pre-shared keys—the pre-shared keys are defined in the connectivity association—to secure the link for MACsec.

Table 15 on page 358 provides a summary of the VLAN used in this topology. The VLAN is used in this topology to direct all communication from the user at site A to the user at site B onto the MACsec-secured CCC.

Table 16: Components of the MPLS Topology

Component	Description
PE1	<p>PE switch.</p> <p>lo0:</p> <ul style="list-style-type: none"> IP address: 130.1.1.1/32 Participates in OSPF and RSVP. <p>ge-0/0/0:</p> <ul style="list-style-type: none"> Customer edge interface connecting site A to the MPLS network. CCC connecting to xe-0/1/1 on PE2. <p>ge-0/0/1:</p> <ul style="list-style-type: none"> Core interface connecting PE1 to the provider switch. IP address: 10.1.5.2/24 Participates in OSPF, RSVP, and MPLS.

Table 16: Components of the MPLS Topology (continued)

Component	Description
Provider	<p>Provider switch.</p> <p>lo0:</p> <ul style="list-style-type: none"> IP address: 130.1.1.2/32 Participates in OSPF and RSVP. <p>ge-0/0/10:</p> <ul style="list-style-type: none"> Core interface connecting the provider switch to PE1. IP address: 10.1.5.1/24 Participates in OSPF, RSVP, and MPLS. <p>xe-0/0/0:</p> <ul style="list-style-type: none"> Core interface connecting the provider switch to PE2. IP address: 10.1.9.1/24 Participates in OSPF, RSVP, and MPLS.
PE2	<p>PE switch.</p> <p>lo0:</p> <ul style="list-style-type: none"> IP address: 130.1.1.3/32 Participates in OSPF and RSVP. <p>xe-0/1/0</p> <ul style="list-style-type: none"> Core interface connecting PE2 to the provider switch. IP address: 10.1.9.2/24 Participates in OSPF, RSVP, and MPLS. <p>xe-0/1/1</p> <ul style="list-style-type: none"> Customer edge interface connecting site B to the MPLS network. CCC connecting to ge-0/0/0 on PE1.
lsp_to_pe2_xe1 label-switched path	Label-switched path from PE1 to PE2.
lsp_to_pe1_ge0 label-switched path	Label-switched path from PE2 to PE1.

Table 17: MACsec Connectivity Association Summary

Connectivity Association	Description
ccc-macsec	<p>Connectivity association enabling MACsec on CCC connecting site A to site B.</p> <p>The connectivity association is enabled on the following interfaces:</p> <ul style="list-style-type: none"> Site A CE switch: ge-0/0/0 Site B CE switch: xe-0/1/0

Table 18: VLANs Summary

VLAN	Description
macsec	<p>VLAN directing traffic between the user at site A and the user at site B onto the MACsec-secured CCC.</p> <p>The VLAN includes the following interfaces:</p> <ul style="list-style-type: none"> • Site A CE switch: ge-0/0/0 • Site A CE switch: ge-0/0/1 • Site B CE switch: xe-0/1/0 • Site B CE switch: ge-0/0/2

Configuring MPLS

This section explains how to configure MPLS on each switch in the MPLS network.

It includes the following sections:

- [Configuring MPLS on Switch PE1 on page 381](#)
- [Configuring MPLS on the Provider Switch on page 383](#)
- [Configuring MPLS on Switch PE2 on page 386](#)
- [Results on page 387](#)

Configuring MPLS on Switch PE1

CLI Quick Configuration

To quickly configure the MPLS configuration on the PE1 switch, use the following commands:

```
[edit]
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface ge-0/0/1.0
set protocols mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3
set protocols mpls interface ge-0/0/1.0
set protocols rsvp interface lo0.0
set protocols rsvp interface ge-0/0/1.0
set interfaces lo0 unit 0 family inet address 130.1.1/32
set interfaces ge-0/0/1 unit 0 family inet address 10.1.5.2/24
set interfaces ge-0/0/1 unit 0 family mpls
set interfaces ge-0/0/0 unit 0 family ccc
set protocols connections remote-interface-switch ge-1-to-pe2 interface ge-0/0/0.0
set protocols connections remote-interface-switch ge-1-to-pe2 transmit-lsp lsp_to_pe2_xe1
set protocols connections remote-interface-switch ge-1-to-pe2 receive-lsp lsp_to_pe1_ge0
```

Step-by-Step Procedure

To configure MPLS on Switch PE1:

1. Configure OSPF with traffic engineering enabled:

```
[edit protocols]
user@switch-PE1# set ospf traffic-engineering
```

2. Configure OSPF on the loopback address and the core interfaces:

- ```
[edit protocols]
user@switch-PE1# set ospf area 0.0.0.0 interface lo0.0
user@switch-PE1# set ospf area 0.0.0.0 interface ge-0/0/1.0
```
3. Configure MPLS on this switch, PE1, with an LSP to the PE2 switch:
 

```
[edit protocols]
user@switch-PE1# set mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3
```
  4. Configure MPLS on the core interfaces:
 

```
[edit protocols]
user@switch-PE1# set mpls interface ge-0/0/1.0
```
  5. Configure RSVP on the loopback interface and the core interfaces:
 

```
[edit protocols]
user@switch-PE1# set rsvp interface lo0.0
user@switch-PE1# set rsvp interface ge-0/0/1.0
```
  6. Configure IP addresses for the loopback interface and the core interfaces:
 

```
[edit]
user@switch-PE1# set interfaces lo0 unit 0 family inet address 130.1.1/32
user@switch-PE1# set interfaces ge-0/0/1 unit 0 family inet address 10.1.5.2/24
```
  7. Configure **family mpls** on the logical unit of the core interface addresses:
 

```
[edit]
user@switch-PE1# set interfaces ge-0/0/1 unit 0 family mpls
```
  8. Configure the logical unit of the customer edge interface as a CCC:
 

```
[edit interfaces ge-0/0/0 unit 0]
user@PE-1# set family ccc
```
  9. Configure the interface-based CCC from PE1 to PE2:
 

```
[edit protocols]
user@PE-1# set connections remote-interface-switch ge-1-to-pe2 interface ge-0/0/0.0
user@PE-1# set connections remote-interface-switch ge-1-to-pe2 transmit-lsp
lsp_to_pe2_xe1
user@PE-1# set connections remote-interface-switch ge-1-to-pe2 receive-lsp lsp_to_pe1_ge0
```

**Results** Display the results of the configuration:

```
user@PE-1> show configuration
```

```
interfaces {
 ge-0/0/0 {
 unit 0 {
 family ccc;
 }
 }
 ge-0/0/1{
```



```

 unit 0 {
 family inet {
 address 130.1.5.2/24;
 }
 family mpls;
 }
 }
 lo0 {
 unit 0 {
 family inet {
 address 130.1.1.1/32;
 }
 }
 }
}
protocols {
 rsvp {
 interface lo0.0;
 interface ge-0/0/1.0;
 }
 mpls {
 label-switched-path lsp_to_pe2_xe1 {
 to 130.1.1.3;
 }
 interface ge-0/0/1.0;
 }
 ospf {
 traffic-engineering;
 area 0.0.0.0 {
 interface lo0.0;
 interface ge-0/0/1.0;
 }
 }
 connections {
 remote-interface-switch ge-1-to-pe2 {
 interface ge-0/0/0.0;
 transmit-lsp lsp_to_pe2_xe1;
 receive-lsp lsp_to_pe1_ge0;
 }
 }
}

```

### Configuring MPLS on the Provider Switch

#### CLI Quick Configuration

To quickly configure the MPLS configuration on the provider switch, use the following commands:

```

[edit]
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface ge-0/0/10.0
set protocols ospf area 0.0.0.0 interface xe-0/0/0.0
set protocols mpls interface ge-0/0/10.0
set protocols mpls interface xe-0/0/0.0
set protocols mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3

```

```
set protocols rsvp interface lo0.0
set protocols rsvp interface ge-0/0/10.0
set protocols rsvp interface xe-0/0/0.0
set interfaces lo0 unit 0 family inet address 130.1.1.2/32
set interfaces ge-0/0/10 unit 0 family inet address 10.1.5.1/24
set interfaces ge-0/0/10 unit 0 family mpls
set interfaces xe-0/0/0 unit 0 family inet address 10.1.9.1/24
set interfaces xe-0/0/0 unit 0 family mpls
```

### Step-by-Step Procedure

To configure the provider switch:

1. Configure OSPF with traffic engineering enabled:

```
[edit protocols]
user@switch-P# set ospf traffic-engineering
```

2. Configure OSPF on the loopback interface and the core interfaces:

```
[edit protocols]
user@switch-P# set ospf area 0.0.0.0 interface lo0.0
user@switch-P# set ospf area 0.0.0.0 interface ge-0/0/10.0
user@switch-P# set ospf area 0.0.0.0 interface xe-0/0/0.0
```

3. Configure MPLS on the core interfaces on the switch:

```
[edit protocols]
user@switch-P# set mpls interface ge-0/0/10.0
user@switch-P# set mpls interface xe-0/0/0.0
```

4. Configure RSVP on the loopback interface and the core interfaces:

```
[edit protocols]
user@switch-P# set rsvp interface lo0.0
user@switch-P# set rsvp interface ge-0/0/10.0
user@switch-P# set rsvp interface xe-0/0/0.0
```

5. Configure IP addresses for the loopback interface and the core interfaces:

```
[edit]
user@switch-P# set interfaces lo0 unit 0 family inet address 130.1.1.2/32
user@switch-P# set interfaces ge-0/0/10 unit 0 family inet address 10.1.5.1/24
user@switch-P# set interfaces xe-0/0/0 unit 0 family inet address 10.1.9.1/24
```

6. Configure **family mpls** on the logical unit of the core interface addresses:

```
[edit]
user@switch-P# set interfaces ge-0/0/10 unit 0 family mpls
user@switch-P# set interfaces xe-0/0/0 unit 0 family mpls
```

7. Configure the LSP to the PE2 switch:

```
[edit]
user@switch-P# set protocols mpls label-switched-path lsp_to_pe2_xe1 to 130.1.1.3
```

**Results** Display the results of the configuration:

```
user@switch-P> show configuration

interfaces {
 ge-0/0/10 {
 unit 0 {
 family inet {
 address 10.1.5.1/24;
 }
 family mpls;
 }
 }
 xe-0/0/0 {
 unit 0 {
 family inet {
 address 10.1.9.1/24;
 }
 family mpls;
 }
 }
 lo0 {
 unit 0 {
 family inet {
 address 130.1.1.2/32;
 }
 }
 }
}
protocols {
 rsvp {
 interface lo0.0;
 interface ge-0/0/10.0;
 interface xe-0/0/0.0;
 }
 mpls {
 label-switched-path lsp_to_pe2_xe1 {
 to 130.1.1.3;
 }
 interface ge-0/0/10.0;
 interface xe-0/0/0.0;
 }
 ospf {
 traffic-engineering;
 area 0.0.0.0 {
 interface lo0.0;
 interface ge-0/0/10.0;
 interface xe-0/0/0.0;
 }
 }
}
```

## Configuring MPLS on Switch PE2

### CLI Quick Configuration

To quickly configure the MPLS configuration on Switch PE2, use the following commands:

```
[edit]
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface lo0.0
set protocols ospf area 0.0.0.0 interface xe-0/1/0.0
set protocols mpls label-switched-path lsp_to_pe1_ge0 to 130.1.1.1
set protocols mpls interface xe-0/1/0.0
set protocols rsvp interface lo0.0
set protocols rsvp interface xe-0/1/0.0
set interfaces lo0 unit 0 family inet address 130.1.1.3/32
set interfaces xe-0/1/0 unit 0 family inet address 10.1.9.2/24
set interfaces xe-0/1/0 unit 0 family mpls
set interfaces xe-0/1/1 unit 0 family ccc
set protocols connections remote-interface-switch xe-1-to-pe1 interface xe-0/1/1.0
set protocols connections remote-interface-switch xe-1-to-pe1 transmit-lsp lsp_to_pe1_ge0
set protocols connections remote-interface-switch xe-1-to-pe1 receive-lsp lsp_to_pe2_xe1
```

### Step-by-Step Procedure

To configure Switch PE2:

1. Configure OSPF with traffic engineering enabled:

```
[edit protocols]
user@switch-PE2# set ospf traffic-engineering
```

2. Configure OSPF on the loopback interface and the core interface:

```
[edit protocols]
user@switch-PE2# set ospf area 0.0.0.0 interface lo0.0
user@switch-PE2# set ospf area 0.0.0.0 interface xe-0/1/0.0
```

3. Configure MPLS on this switch (PE2) with a label-switched path (LSP) to the other PE switch (PE1):

```
[edit protocols]
user@switch-PE2# set mpls label-switched-path lsp_to_pe1_ge0 to 130.1.1.1
```

4. Configure MPLS on the core interface:

```
[edit protocols]
user@switch-PE2# set mpls interface xe-0/1/0.0
```

5. Configure RSVP on the loopback interface and the core interface:

```
[edit protocols]
user@switch-PE2# set rsvp interface lo0.0
user@switch-PE2# set rsvp interface xe-0/1/0.0
```

6. Configure IP addresses for the loopback interface and the core interface:

```
[edit]
user@switch-PE2# set interfaces lo0 unit 0 family inet address 130.1.1.3/32
user@switch-PE2# set interfaces xe-0/1/0 unit 0 family inet address 10.1.9.2/24
```

- Configure **family mpls** on the logical unit of the core interface:

```
[edit]
user@switch-PE2# set interfaces xe-0/1/0 unit 0 family mpls
```

- Configure the logical unit of the customer edge interface as a CCC:

```
[edit interfaces xe-0/1/1 unit 0]
user@switch-PE2# set family ccc
```

- Configure the interface-based CCC between the primary edge switches:

```
[edit protocols]
user@switch-PE2# set connections remote-interface-switch xe-1-to-pe1 interface xe-0/1/1.0
user@switch-PE2# set connections remote-interface-switch xe-1-to-pe1 transmit-lsp
lsp_to_pe1_ge0
user@switch-PE2# set connections remote-interface-switch xe-1-to-pe1 receive-lsp
lsp_to_pe2_xe1
```

## Results

Display the results of the configuration:

```
user@switch-PE2> show configuration

interfaces {
 xe-0/1/0 {
 unit 0 {
 family inet {
 address 10.1.9.2/24;
 }
 family mpls;
 }
 }
 xe-0/1/1 {
 unit 0 {
 family ccc;
 }
 }
 lo0 {
 unit 0 {
 family inet {
 address 130.1.1.3/32;
 }
 }
 }
}
protocols {
 rsvp {
 interface lo0.0;
 interface xe-0/1/0.0;
 }
 mpls {
 label-switched-path lsp_to_pe1_ge0 {
```

```
 to 130.1.1.1;
 }
 interface xe-0/1/0.0;
}
ospf {
 traffic-engineering;
 area 0.0.0.0 {
 interface lo0.0;
 interface xe-0/1/0.0;
 }
}
connections {
 remote-interface-switch xe-1-to-pe1 {
 interface xe-0/1/1.0;
 transmit-lsp lsp_to_pe1_ge0;
 receive-lsp lsp_to_pe2_xe1;
 }
}
}
```

## Configuring MACsec

This section explains how to configure MACsec on each switch in the topology.

It includes the following sections:

- [Configuring MACsec on the Site A CE Switch to Secure Traffic to Site B on page 389](#)
- [Configuring MACsec on the Site B CE Switch to Secure Traffic to Site A on page 390](#)

## Configuring MACsec on the Site A CE Switch to Secure Traffic to Site B

**CLI Quick Configuration**

```
[edit]
set security macsec connectivity-association ccc-macsec security-mode static-cak
set security macsec connectivity-association ccc-macsec pre-shared-key ckn
37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
set security macsec connectivity-association ccc-macsec pre-shared-key cak
228ef255aa23ff6729ee664acb66e91f
set security macsec interfaces ge-0/0/0 connectivity-association ccc-macsec
```

**Step-by-Step Procedure**

In this example, the traffic between the users that often exchange financially-sensitive data is sent between the sites on a CCC through the MPLS cloud. MACsec is enabled on the CCC by configuring a MACsec connectivity association on the interfaces on the site A and site B CE switches that connect to the MPLS PE switches. The connectivity associations must have matching connectivity-association names (in this example, **ccc-macsec**), matching CKNs (in this example, **37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311**), and CAKs (in this example, **228ef255aa23ff6729ee664acb66e91f**) in order to establish a MACsec-secure connection.

To enable MACsec on the CCC connecting site A to site B, perform the following procedure on the site A CE switch:

1. Create the connectivity association named **ccc-macsec**, and configure the MACsec security mode as **static-cak**:

```
[edit security macsec]
user@switch-CE-A# set connectivity-association ccc-macsec security-mode static-cak
```

2. Create the pre-shared key by configuring the CKN and CAK:

```
[edit security macsec]
user@switch-CE-A# set connectivity-association ccc-macsec pre-shared-key ckn
37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
user@switch-CE-A# set connectivity-association ccc-macsec pre-shared-key cak
228ef255aa23ff6729ee664acb66e91f
```

3. Assign the connectivity association to the interface connecting to the PE1 switch:

```
[edit security macsec]
user@switch-CE-A# set interfaces ge-0/0/0 connectivity-association ccc-macsec
```

This completes the steps for configuring the connectivity association on one end of the CCC. MACsec is not enabled until a connectivity association with matching pre-shared keys is enabled on the opposite end of a link, which in this case is the interface on the site B CE switch, of the CCC. The process for configuring the connectivity association on the site B CE switch is described in the following section.

**Results** Display the results of the configuration:

```
user@switch-CE-A> show configuration

security {
 macsec {
 connectivity-association {
 ccc-macsec {
 pre-shared-key {
 cak "9rJ-lWLxNdW24Xxik.PQzreK"; ## SECRET-DATA
 ckn 37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311;
 }
 security-mode {
 static-cak;
 }
 }
 }
 }
 interfaces {
 ge-0/0/0 {
 connectivity-association {
 ccc-macsec;
 }
 }
 }
}
```

### Configuring MACsec on the Site B CE Switch to Secure Traffic to Site A

**CLI Quick Configuration** [edit]  
 set security macsec connectivity-association ccc-macsec security-mode static-cak  
 set security macsec connectivity-association ccc-macsec pre-shared-key ckn  
 37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311  
 set security macsec connectivity-association ccc-macsec pre-shared-key cak  
 228ef255aa23ff6729ee664acb66e91f  
 set security macsec interfaces xe-0/1/0 connectivity-association ccc-macsec

**Step-by-Step Procedure** Traffic travels from site B to site A over the MPLS network using a CCC. MACsec is enabled on the CCC by configuring a MACsec connectivity association on the interfaces on the site A and site B CE switches that connect to the MPLS PE switches. The connectivity associations must have matching connectivity-association names (in this example, **ccc-macsec**), matching CKNs (**37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311**), and matching CAKs (**228ef255aa23ff6729ee664acb66e91f**) in order to establish a MACsec-secure connection.

To enable MACsec on the CCC connecting site B to site A, perform the following procedure on the site B CE switch:

1. Create the connectivity association named **ccc-macsec**, and configure the MACsec security mode as **static-cak**:

```
[edit security macsec]
```



```
user@switch-CE-B# set connectivity-association ccc-macsec security-mode static-cak
```

2. Create the pre-shared key by configuring the CKN and CAK:

```
[edit security macsec]
user@switch-CE-B# set connectivity-association ccc-macsec pre-shared-key ckn
37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
user@switch-CE-B# set connectivity-association ccc-macsec pre-shared-key cak
228ef255aa23ff6729ee664acb66e91f
```

3. Assign the connectivity association to the interface connecting to Switch PE2:

```
[edit security macsec]
user@switch-CE-B# set interfaces xe-0/1/0 connectivity-association ccc-macsec
```

MACsec is enabled for the CCC after the pre-shared keys are exchanged, which is shortly after this procedure is completed.

**Results** Display the results of the configuration:

```
user@switch-CE-B> show configuration

security {
 macsec {
 connectivity-association {
 ccc-macsec {
 security-mode {
 static-cak;
 }
 pre-shared-key {
 cak "9rJ-lWLxNdw24Xxik.PQzreK"; ## SECRET-DATA
 ckn 37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311;
 }
 }
 }
 }
 interfaces {
 xe-0/1/0 {
 connectivity-association {
 ccc-macsec;
 }
 }
 }
}
```

## Configuring VLANs to Direct Traffic onto the MACsec-Secured CCC

This section explains how to configure VLANs on the site A and site B CE switches. The purpose of the VLANs is to direct traffic that you want to be MACsec-secured onto the MACsec-secured CCC.

- [Configuring the VLAN to Direct Traffic to the MACsec CCC on the Site A CE Switch on page 392](#)
- [Configuring the VLAN to Direct Traffic to the MACsec CCC on the Site B CE Switch on page 393](#)

### Configuring the VLAN to Direct Traffic to the MACsec CCC on the Site A CE Switch

#### CLI Quick Configuration

```
[edit]
set interfaces ge-0/0/0 unit 0 family ethernet-switching vlan members macsec
set interfaces ge-0/0/2 unit 0 family ethernet-switching vlan members macsec
set interfaces vlan unit 50 family inet address 5.5.5.1/24
set vlans macsec vlan-id 50
set vlans macsec l3-interface vlan.50
```

#### Step-by-Step Procedure

To create a VLAN (VLAN ID 50) that directs traffic from the user at site A onto the MACsec-secured CCC:

1. Configure the ge-0/0/0 interface into the macsec VLAN:

```
[edit interfaces ge-0/0/0 unit 0]
user@switch-CE-A# set family ethernet-switching vlan members macsec
```

2. Configure the ge-0/0/2 interface into the macsec VLAN:

```
[edit interfaces ge-0/0/2 unit 0]
user@switch-CE-A# set family ethernet-switching vlan members macsec
```

3. Create the IP address for the macsec VLAN broadcast domain:

```
[edit interfaces]
user@switch-CE-A# set vlan unit 50 family inet address 5.5.5.1/24
```

4. Configure the VLAN tag ID to 50 for the macsec VLAN:

```
[edit vlans]
user@switch-CE-A# set macsec vlan-id 50
```

5. Associate a Layer 3 interface with the macsec VLAN:

```
[edit vlans]
user@switch-CE-A# set macsec l3-interface vlan.50
```

#### Results

Display the results of the configuration:

```
user@switch-CE-A> show configuration
```

```

interfaces {
 ge-0/0/0 {
 unit 0 {
 family ethernet-switching {
 vlan members macsec;
 }
 }
 }
 ge-0/0/2 {
 unit 0 {
 family ethernet-switching {
 vlan members macsec;
 }
 }
 }
 vlan {
 unit 50 {
 family inet address 5.5.5.1/24;
 }
 }
}
vpls {
 macsec {
 l3-interface vlan.50;
 vlan-id 50;
 }
}

```

### Configuring the VLAN to Direct Traffic to the MACsec CCC on the Site B CE Switch

#### CLI Quick Configuration

```

[edit]
set interfaces ge-0/0/2 unit 0 family ethernet-switching vlan members macsec
set interfaces xe-0/1/0 unit 0 family ethernet-switching vlan members macsec
set interfaces vlan unit 50 family inet address 5.5.5.2/24
set vpls macsec vlan-id 50
set vpls macsec l3-interface vlan.50

```

#### Step-by-Step Procedure

To create a VLAN (VLAN ID 50) to direct traffic for the user at site B onto the MACsec-secured CCC:

1. Configure the ge-0/0/2 interface into the macsec VLAN:

```

[edit interfaces ge-0/0/2 unit 0]
user@switch-CE-B# set family ethernet-switching vlan members macsec

```

2. Configure the xe-0/1/0 interface into the macsec VLAN:

```

[edit interfaces xe-0/1/0 unit 0]
user@switch-CE-B# set family ethernet-switching vlan members macsec

```

3. Create the IP address for the macsec VLAN broadcast domain:

```

[edit interfaces]
user@switch-CE-B# set vlan unit 50 family inet address 5.5.5.2/24

```

4. Configure the VLAN tag ID to 50 for the macsec VLAN:

```
[edit vlans]
user@switch-CE-B# set macsec vlan-id 50
```

5. Associate a Layer 3 interface with the macsec VLAN:

```
[edit vlans]
user@switch-CE-B# set macsec l3-interface vlan.50
```

**Results** Display the results of the configuration:

```
user@switch-CE-B> show configuration
interfaces {
 ge-0/0/2 {
 unit 0 {
 family ethernet-switching {
 vlan members macsec;
 }
 }
 }
 xe-0/1/0 {
 unit 0 {
 family ethernet-switching {
 vlan members macsec;
 }
 }
 }
 vlan {
 unit 50 {
 family inet address 5.5.5.2/24;
 }
 }
}
vlans {
 macsec {
 l3-interface vlan.50;
 vlan-id 50;
 }
}
```

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying the MACsec Connection on page 395](#)
- [Verifying That MACsec-Secured Traffic Is Traversing the CCCs on page 395](#)
- [Verifying That the MPLS and CCC Protocols Are Enabled on the Provider Edge and Provider Switch Interfaces on page 396](#)
- [Verifying MPLS Label Operations on page 397](#)
- [Verifying the Status of the MPLS CCCs on page 398](#)

- [Verifying OSPF Operation on page 399](#)
- [Verifying the Status of the RSVP Sessions on page 400](#)

### Verifying the MACsec Connection

**Purpose** Verify that MACsec is operational on the CCC.

**Action** Enter the `show security macsec connections` command on one or both of the customer edge (CE) switches.

```
user@switch-CE-A> show security macsec connections
Interface name: ge-0/0/0
CA name: ccc-macsec
Cipher suite: GCM-AES-128 Encryption: on
Key server offset: 0 Include SCI: no
Replay protect: off Replay window: 0
Outbound secure channels
SC Id: 00:19:E2:53:CD:F3/1
Outgoing packet number: 9785
Secure associations
AN: 0 Status: inuse Create time: 2d 20:47:54
Inbound secure channels
SC Id: 00:23:9C:0A:53:33/1
Secure associations
AN: 0 Status: inuse Create time: 2d 20:47:54
```

**Meaning** The `Interface name:` and `CA name:` outputs shows that the ccc-macsec connectivity association is operational on interface ge-0/0/0. The output does not appear when the connectivity association is not operational on the interface.

For additional verification that MACsec is operational on the CCC, you can also enter the `show security macsec connections` command on the other CE switch.

### Verifying That MACsec-Secured Traffic Is Traversing the CCCs

**Purpose** Verify that traffic traversing the CCC is MACsec-secured.

**Action** Enter the `show security macsec statistics` command on one or both of the CE switches.

```
user@switch-CE-A> show security macsec statistics
Interface name: ge-0/0/0
Secure Channel transmitted
Encrypted packets: 9784
Encrypted bytes: 2821527
Protected packets: 0
Protected bytes: 0
Secure Association transmitted
Encrypted packets: 9784
Protected packets: 0
Secure Channel received
Accepted packets: 9791
Validated bytes: 0
```

```

Decrypted bytes: 2823555
Secure Association received
Accepted packets: 9791
Validated bytes: 0
Decrypted bytes: 2823555

```

**Meaning** The **Encrypted packets** line under the **Secure Channel transmitted** output is incremented each time a packet is sent from the interface that is secured and encrypted by MACsec. The **Encrypted packets** output shows that 9784 encrypted and secured packets have been transmitted from interface ge-0/0/0. MACsec-secured traffic is, therefore, being sent on interface ge-0/0/0.

The **Accepted packets** line under the **Secure Association received** output is incremented each time a packet that has passed the MACsec integrity check is received on the interface. The **Decrypted bytes** line under the **Secure Association received** output is incremented each time an encrypted packet is received and decrypted. The output shows that 9791 MACsec-secured packets have been received on interface ge-0/0/0, and that 2823555 bytes from those packets have been successfully decrypted. MACsec-secured traffic is, therefore, being received on interface ge-0/0/0.

For additional verification, you can also enter the **show security macsec statistics** command on the other CE switch.

### Verifying That the MPLS and CCC Protocols Are Enabled on the Provider Edge and Provider Switch Interfaces

**Purpose** Verify that MPLS is enabled on the correct interfaces for the PE and provider switches.

**Action** Enter the **show interfaces terse** command on both of the PE switches and the provider switch:

```

user@switch-PE1> show interfaces terse
Interface Admin Link Proto Local Remote
 ge-0/0/0 up up
 ge-0/0/0.0 up up ccc
 ge-0/0/1 up up
 ge-0/0/1.0 up up inet 10.1.5.2/24

 mpls
<
 some output removed for brevity>

```

```

user@switch-P> show interfaces terse
Interface Admin Link Proto Local Remote
 xe-0/0/0 up up
 xe-0/0/0.0 up up inet 10.1.9.1/24

 mpls
 ge-0/0/10 up up
 ge-0/0/10.0 up up inet 10.1.5.1/24

 mpls

```

<  
some output removed for brevity>

```
user@switch-PE2> show interfaces terse
Interface Admin Link Proto Local Remote
xe-0/1/0 up up
xe-0/1/0.0 up up inet 10.1.9.2/24

mpls
xe-0/1/1 up up
xe-0/1/1.0 up up ccc
<
some output removed for brevity>
```

**Meaning** The output confirms that the MPLS protocol is up for the provider switch interfaces passing MPLS traffic— xe-0/0/0 and ge-0/0/10— and on the PE switch interfaces passing MPLS traffic, which is interface ge-0/0/1 on the PE1 switch and interface xe-0/1/0 on the PE2 switch.

The output also confirms that CCC is enabled on the PE switch interfaces facing the CE switches, which are interface ge-0/0/0 on the PE1 switch and interface xe-0/1/1 on the PE2 switch.

### Verifying MPLS Label Operations

**Purpose** Verify which interface is being used as the beginning of the CCC and which interface is being used to push the MPLS packet to the next hop.

**Action** Enter the **show route forwarding-table family mpls** on one or both of the PE switches.

```
user@switch-PE1> show route forwarding-table family mpls

Routing table: default.mpls
MPLS:
Index NhRef Netif Destination Type RtRef Next hop Type
50 1 default perm 0 dscd
49 4 0 user 0 recv
49 4 1 user 0 recv
49 4 2 user 0 recv
49 4 13 user 0 recv
49 4 299856 user 0 Pop
1327 2 ge-0/0/0.0 ge-0/0/0.0 (CCC) user 0 10.1.5.1 Push
299952 1328 2 ge-0/0/1.0
```

**Meaning** This output confirms that the CCC is configured on interface ge-0/0/0.0. The switch receives ingress traffic on ge-0/0/1.0 and pushes label 299952 onto the packet, which exits the switch through interface ge-0/0/1.0. The output also shows that when the switch receives an MPLS packet with label 299856, it pops the label and sends the packet out through interface ge-0/0/0.0

For further verification of MPLS label operations, enter the **show route forwarding-table family mpls** on the other PE switch.

### Verifying the Status of the MPLS CCCs

**Purpose** Verify that the MPLS CCCs are operating.

**Action** Enter the **show connections** command on the PE switches.

```

user@switch-PE1> show connections
CCC and TCC connections [Link Monitoring On]
Legend for status (St):
connection types:
 interface switching UN -- uninitialized
 remote interface switching NP -- not present
 LSP switching WE -- wrong encapsulation
 tx-p2mp-sw: transmit P2MP switching DS -- disabled
 rx-p2mp-sw: receive P2MP switching Dn -- down
 for circuit types: -> -- only outbound conn is up
 interface <
 -- outgoing interface - -- only inbound conn is up
 -- transmit LSP Up -- operational
 -- receive LSP RmtDn -- remote CCC down
 Restart -- restarting
 Connection/Circuit
 Type
 St Time last up # Up trans
 ge-1-to-pe2 rmt-if
 Up May 30 19:01:45 1
 ge-0/0/0.0 intf
 Up
 lsp_to_pe2_xe1 tlsp
 Up
 lsp_to_pe1_ge0 rlsp
 Up

user@switch-PE2> show connections

 CCC and TCC connections [Link Monitoring
 On]
 Legend for status (St):
 Legend

```



```

for connection types:
 interface switching UN -- uninitialized if-sw:
 remote interface switching NP -- not present rmt-if:
 LSP switching WE -- wrong encapsulation lsp-sw:
 tx-p2mp-sw: transmit P2MP switching DS -- disabled
 rx-p2mp-sw: receive P2MP switching Dn -- down
 -> -- only outbound conn is up Legend
 for circuit types:
 interface <
 -- outgoing interface - -- only inbound conn is up intf --
 -- transmit LSP Up -- operational oif
 -- receive LSP RmtDn -- remote CCC down tlsp
 Connection/Circuit Restart -- restarting rlsp
 St Time last up # Up trans Type
 Up May 30 09:39:15 1 xe-1-to-pe1 rmt-if
 Up xe-0/1/1.0 intf
 Up lsp_to_pe1_ge0 tlsp
 Up lsp_to_pe2_xe1 rlsp
 Up

```

The **show connections** command displays the status of the CCC connections. This output verifies that the CCC interfaces and their associated transmit and receive LSPs are **Up** on both PE switches.

### Verifying OSPF Operation

**Purpose** Verify that OSPF is running.

**Action** Enter the **show ospf neighbor** command the provider or the PE switches, and check the **State** output.

```

user@switch-P> show ospf neighbor
Address Interface State ID Pri Dead
Full 130.1.1.1 128 33 10.1.5.2 ge-0/0/10.0
Full 130.1.1.3 128 38 10.1.9.2 xe-0/0/0.0

```

**Meaning** The **State** output is **Full** on all interfaces using OSPF, so OSPF is operating.

For further verification on OSPF, enter the **show ospf neighbor** command on the PE switches in addition to the provider switch.

### Verifying the Status of the RSVP Sessions

---

**Purpose** Verify the status of the RSVP sessions.

**Action** Enter the **show rsvp session** command, and verify that the state is up for each RSVP session.

user@switch-P> **show rsvp session**

```
Ingress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0
Egress RSVP: 0 sessions
Total 0 displayed, Up 0, Down 0
Transit RSVP: 2 sessions
To From State Rt
Style Labelin Labelout LSPname
1 FF 299936 299856 lsp_to_pe1_ge0 130.1.1.1 130.1.1.3 Up 0
1 FF 299952 299840 lsp_to_pe2_xe1 130.1.1.3 130.1.1.1 Up 0
Total 2 displayed, Up 2, Down 0
```

**Meaning** The **State** is **Up** for all connections, so RSVP is operating normally.

For further verification, enter the **show rsvp session** on the PE switches in addition to the provider switch.

**Related Documentation**

- [Configuring Media Access Control Security \(MACsec\) on page 413](#)
- [Understanding Media Access Control Security \(MACsec\) on page 403](#)

## Understanding MACSec on PTX10K-LC1105 line card

---

The PTX10K-LC1105 line card is designed to provide secure Ethernet communication across high-speed links. The card consists of 30 QSFP+ or QSFP28 ports that are Media Access Control Security (MACsec) capable. The ports support speeds of 100 Gbps or 40 Gbps, which can be configured using the CLI.

### MACsec Supported Line Cards

---

Table 19 on page 401 lists the line cards which support MACsec.

*Table 19: Line cards supporting MACsec on MX series and PTX series Routers*

| Line Card         | Router                                  | Version       |
|-------------------|-----------------------------------------|---------------|
| MIC-3D-20GE-SFP-E | MX240, MX480, and MX960                 | 14.2 and 15.1 |
| MPC7E-10G         | MX240, MX480, MX960, MX2010, and MX2020 | 16.1          |
| JNP-MIC1-MACSEC   | MX10003                                 | 17.3R2        |
| PTX10K-LC1105     | PTX10008                                | 18.2R1        |
| PTX10K-LC1105     | PTX10008 and PTX10016                   | 18.3R1        |

**Related Documentation**

- *Understanding Media Access Control Security (MACsec) on MX Series Routers*



# Configuring Media Access Control Security (MACsec) on Switches

- [Understanding Media Access Control Security \(MACsec\) on page 403](#)
- [Configuring Media Access Control Security \(MACsec\) on page 413](#)

## Understanding Media Access Control Security (MACsec)

---

Media Access Control Security (MACsec) is an 802.1AE IEEE industry-standard security technology that provides secure communication for all traffic on Ethernet links. MACsec provides point-to-point security on Ethernet links between directly connected nodes and is capable of identifying and preventing most security threats, including denial of service, intrusion, man-in-the-middle, masquerading, passive wiretapping, and playback attacks.

MACsec allows you to secure an Ethernet link for almost all traffic, including frames from the Link Layer Discovery Protocol (LLDP), Link Aggregation Control Protocol (LACP), Dynamic Host Configuration Protocol (DHCP), Address Resolution Protocol (ARP), and other protocols that are not typically secured on an Ethernet link because of limitations with other security solutions. MACsec can be used in combination with other security protocols such as IP Security (IPsec) and Secure Sockets Layer (SSL) to provide end-to-end network security.

MACsec is standardized in IEEE 802.1AE. The IEEE 802.1AE standard can be seen on the IEEE organization website at [IEEE 802.1: BRIDGING & MANAGEMENT](#).

- [How MACsec Works on page 404](#)
- [Understanding Connectivity Associations and Secure Channels on page 404](#)
- [Understanding Static Connectivity Association Key Security Mode \(Security Mode for Router-to-Router Links\) on page 405](#)
- [Understanding MACsec Hardware Requirements for MX Series Routers on page 405](#)
- [Understanding MACsec Software Requirements for MX Series Routers on page 406](#)
- [Understanding MACsec Security Modes on page 406](#)
- [Understanding the Requirements to Enable MACsec on a Switch-to-Host Link on page 409](#)
- [MACsec Software Image Requirements for EX Series and QFX Series Switches on page 409](#)

- [MACsec Hardware and Software Support Summary on page 410](#)
- [Understanding MACsec in a Virtual Chassis on page 412](#)
- [Understanding the MACsec Feature License Requirement on page 412](#)
- [MACsec Limitations on page 413](#)

## How MACsec Works

MACsec provides industry-standard security through the use of secured point-to-point Ethernet links. The point-to-point links are secured after matching security keys— a user-configured pre-shared key when you enable MACsec using static connectivity association key (CAK) security mode, a user-configured static secure association key when you enable MACsec using static secure association key (SAK) security mode, or a dynamic key included as part of the AAA handshake with the RADIUS server when you enable MACsec using dynamic security mode— are exchanged and verified between the interfaces at each end of the point-to-point Ethernet link. Other user-configurable parameters, such as MAC address or port, must also match on the interfaces on each side of the link to enable MACsec. See [“Configuring Media Access Control Security \(MACsec\)” on page 413](#).

Once MACsec is enabled on a point-to-point Ethernet link, all traffic traversing the link is MACsec-secured through the use of data integrity checks and, if configured, encryption.

The data integrity checks verify the integrity of the data. MACsec appends an 8-byte header and a 16-byte tail to all Ethernet frames traversing the MACsec-secured point-to-point Ethernet link, and the header and tail are checked by the receiving interface to ensure that the data was not compromised while traversing the link. If the data integrity check detects anything irregular about the traffic, the traffic is dropped.

MACsec can also be used to encrypt all traffic on the Ethernet link. The encryption used by MACsec ensures that the data in the Ethernet frame cannot be viewed by anybody monitoring traffic on the link. MACsec encryption is optional and user-configurable; you can enable MACsec to ensure the data integrity checks are performed while still sending unencrypted data “in the clear” over the MACsec-secured link, if desired.

MACsec is configured on point-to-point Ethernet links between MACsec-capable interfaces. If you want to enable MACsec on multiple Ethernet links, you must configure MACsec individually on each point-to-point Ethernet link.

## Understanding Connectivity Associations and Secure Channels

MACsec is configured in connectivity associations. MACsec is enabled when a connectivity association is assigned to an interface.

When you are configuring MACsec using static secure association key (SAK) security mode, you must configure secure channels within a connectivity association. The secure channels are responsible for transmitting and receiving data on the MACsec-enabled link, and also responsible for transmitting SAKs across the link to enable and maintain MACsec. A single secure channel is unidirectional— it can be used to apply MACsec only to either inbound or outbound traffic. A typical connectivity association when MACsec is enabled using SAK security mode contains two secure channels— one secure channel for inbound traffic and another secure channel for outbound traffic.

When you enable MACsec using static CAK or dynamic security mode, you have to create and configure a connectivity association. Two secure channels— one secure channel for inbound traffic and another secure channel for outbound traffic— are automatically created. The automatically-created secure channels do not have any user-configurable parameters; all configuration is done in the connectivity association outside of the secure channels.

### Understanding Static Connectivity Association Key Security Mode (Security Mode for Router-to-Router Links)

When you enable MACsec using static connectivity association key (CAK) security mode, two security keys—a connectivity association key (CAK) that secures control plane traffic and a randomly-generated secure association key (SAK) that secures data plane traffic—are used to secure the point-to-point Ethernet link.

You initially establish a MACsec-secured link using a preshared key when you are using static CAK security mode to enable MACsec. A preshared key includes a connectivity association name (CKN) and a connectivity association key (CAK). The CKN and CAK are configured by the user in the connectivity association and must match on both ends of the link to initially enable MACsec.

The preshared keys must be configured on the endpoints of the link and the keys must in agreement with each other. The MACsec Key Agreement (MKA) protocol is responsible for maintaining MACsec on the link, and decides which router on the point-to-point link becomes the key server. The key server then creates an SAK that is shared with the router at the other end of the point-to-point link only, and that SAK is used to secure all data traffic traversing the link. The key server continues to periodically create and share a randomly-created SAK over the point-to-point link for as long as MACsec is enabled.

See *Configuring Media Access Control Security (MACsec) on MX Series Routers* for step-by-step instructions on enabling MACsec by using static CAK security mode.

### Understanding MACsec Hardware Requirements for MX Series Routers

You can configure Media Access Control Security (MACsec) on MX Series routers with the enhanced 20-port Gigabit Ethernet MIC (model number MIC-3D-20GE-SFP-E). Starting with Junos OS Release 16.1, you can configure MACsec on MX Series routers with the 40-port 10-Gigabit Ethernet MPC (MPC7E-10G).

Starting with Junos OS Release 17.3R2, you can configure MACsec on MX 10003 routers with the modular MIC (JNP-MIC1-MACSEC).

MACsec can also be configured on supported MX Series router interfaces when those routers are configured in a Virtual Chassis configuration. Encryption and decryption are implemented in the hardware in line-rate mode. An additional overhead of 24 through 32 bytes is required for MACsec if Secure Channel Identifier (SCI) tag is included. On 20-port Gigabit Ethernet MICs, the SCI tag is always included.

For more information regarding MACsec, refer the following IEEE specifications:

- IEEE 802.1AE-2006. Media Access Control (MAC) Security

- IEEE 802.1X-2010. Port-Based Network Access Control. Defines MACSec Key Agreement Protocol

## Understanding MACsec Software Requirements for MX Series Routers

Following are some of the key software requirements for MACsec on MX Series Routers:



**NOTE:** A feature license is not required to configure MACsec on MX Series routers with the enhanced 20-port Gigabit Ethernet MIC (model number MIC-3D-20GE-SFP-E).

MACsec is supported on MX Series routers with MACsec-capable interfaces. The SCI tag is always included on MX Series routers.

MACsec supports 128 and 256-bit cipher-suite with and without extended packet numbering (XPN).

MACsec supports MACsec Key Agreement (MKA) protocol with Static-CAK mode using preshared keys.

MACsec supports a single connectivity-association (CA) per physical port or physical interface.

Starting with Junos OS Release 15.1, MACsec is supported on member links of an aggregated Ethernet (**ae-**) interface bundle, and also regular interfaces that are not part of an interface bundle.

Starting with Junos OS Release 17.3R2, MACsec supports 256-bit cipher-suite GCM-AES-256 and GCM-AES-XPN-256 on MX10003 routers with the modular MIC (model number-JNP-MIC1-MACSEC).

Starting in Junos OS Release 18.3R1, the MIC-MACSEC-20GE MIC provides 256-bit cipher-suite GCM-AES-256 and GCM-AES-XPN-256. The MIC-MACSEC-20GE MIC supports MACsec on both twenty 1-Gigabit Ethernet SFP ports and on two 10-Gigabit Ethernet SFP+ ports in the following hardware configurations:

- Installed directly on the MX80 and MX104 routers
- Installed on MPC1, MPC2, MPC3, MPC2E, MPC3E, MPC2E-NG, and MPC3E-NG line cards on the MX240, MX480, and MX960 routers

Refer *Understanding Interface Naming Conventions for MIC-MACSEC-20GE* and *Understanding Rate Selectability* for more information.

## Understanding MACsec Security Modes

### Understanding Static Connectivity Association Key Security Mode (Recommended Security Mode for Switch-to-Switch Links)

---

When you enable MACsec using static connectivity association key (CAK) security mode, two security keys— a connectivity association key (CAK) that secures control plane traffic



and a randomly-generated secure association key (SAK) that secures data plane traffic—are used to secure the point-to-point Ethernet link. Both keys are regularly exchanged between both devices on each end of the point-to-point Ethernet link to ensure link security.

You initially establish a MACsec-secured link using a pre-shared key when you are using static CAK security mode to enable MACsec. A pre-shared key includes a connectivity association name (CKN) and its own connectivity association key (CAK). The CKN and CAK are configured by the user in the connectivity association and must match on both ends of the link to initially enable MACsec.

Once matching pre-shared keys are successfully exchanged, the MACsec Key Agreement (MKA) protocol is enabled. The MKA protocol is responsible for maintaining MACsec on the link, and decides which switch on the point-to-point link becomes the key server. The key server then creates an SAK that is shared with the switch at the other end of the point-to-point link only, and that SAK is used to secure all data traffic traversing the link. The key server will continue to periodically create and share a randomly-created SAK over the point-to-point link for as long as MACsec is enabled.



**NOTE:** If the MACsec session is terminated due to a link failure, when the link is restored, the MKA key server elects a key server and generates a new SAK.

You enable MACsec using static CAK security mode by configuring a connectivity association on both ends of the link. All configuration is done within the connectivity association but outside of the secure channel. Two secure channels— one for inbound traffic and one for outbound traffic— are automatically created when using static CAK security mode. The automatically-created secure channels do not have any user-configurable parameters that cannot already be configured in the connectivity association.

We recommend enabling MACsec on switch-to-switch links using static CAK security mode. Static CAK security mode ensures security by frequently refreshing to a new random security key and by sharing only the security key between the two devices on the MACsec-secured point-to-point link. Additionally, some optional MACsec features— replay protection, SCI tagging, and the ability to exclude traffic from MACsec— are available only when you enable MACsec using static CAK security mode.



**NOTE:** The switches on each end of a MACsec-secured switch-to-switch link must either both be using Junos OS Release 14.1X53-D10 or later, or must both be using an earlier version of Junos, in order to establish a MACsec-secured connection when using static CAK security mode.

See [“Configuring Media Access Control Security \(MACsec\)” on page 413](#) for step-by-step instructions on enabling MACsec using static CAK security mode.

### Understanding Dynamic Secure Association Key Security Mode (Switch-to-Host Links)

---

Dynamic secure association key (SAK) security mode is used to enable MACsec on a switch-to-host link.

To enable MACsec on a link connecting an endpoint device— such as a server, phone, or personal computer— to a switch, the endpoint device must support MACsec and must be running software that allows it to enable a MACsec-secured connection. When configuring MACsec on a switch-to-host link, the MACsec Key Agreement (MKA) keys, which are included as part of 802.1X authentication, are retrieved from a RADIUS server as part of the AAA handshake. A master key is passed from the RADIUS server to the switch and from the RADIUS server to the host in independent authentication transactions. The master key is then passed between the switch and the host to create a MACsec-secured connection.

A secure association using dynamic secure association security mode must be configured on the switch's Ethernet interface that connects to the host in order for the switch to create a MACsec-secured connection after receiving the MKA keys from the RADIUS server.

The RADIUS server must be using Extensible Authentication Protocol-Transport Layer Security (EAP-TLS) in order to support MACsec. The RADIUS servers that support other widely-used authentication frameworks, such as password-only or md5, cannot be used to support MACsec. In order to enable MACsec on a switch to secure a connection to a host, you must be using 802.1X authentication on the RADIUS server. MACsec must be configured into dynamic mode. MACsec is still enabled using connectivity associations when enabled on a switch-to-host link, as it is on a switch-to-switch link.

### Understanding Static Secure Association Key Security Mode (Supported for Switch-to-Switch Links)

---

When you enable MACsec using static secure association key (SAK) security mode, one of up to two manually configured SAKs is used to secure data traffic on the point-to-point Ethernet link. All SAK names and values are configured by the user; there is no key server or other tool that creates SAKs. Security is maintained on the point-to-point Ethernet link by periodically rotating between the two security keys. Each security key name and value must have a corresponding matching value on the interface at the other end of the point-to-point Ethernet link to maintain MACsec on the link.

You configure SAKs within secure channels when you enable MACsec using static SAK security mode. You configure secure channels within connectivity associations. A typical connectivity association for MACsec using static SAK security mode contains two secure channels— one for inbound traffic and one for outbound traffic— that have each been configured with two manually-configured SAKs. You must attach the connectivity association with the secure channel configurations to an interface to enable MACsec using static SAK security mode.

We recommend enabling MACsec using static CAK security mode. Use static SAK security mode only if you have a compelling reason to use it instead of static CAK security mode.

See [“Configuring Media Access Control Security \(MACsec\)” on page 413](#) for step-by-step instructions on enabling MACsec using SAKs.

## Understanding the Requirements to Enable MACsec on a Switch-to-Host Link

When configuring MACsec on a switch-to-host link, the MACsec Key Agreement (MKA) keys, which are included as part of 802.1X authentication, are retrieved from a RADIUS server as part of the AAA handshake. A master key is passed from the RADIUS server to the switch and from the RADIUS server to the host in independent authentication transactions. The master key is then passed between the switch and the host to create a MACsec-secured connection.

The following requirements must be met in order to enable MACsec on a link connecting a host device to a switch.

The host device:

- must support MACsec and must be running software that allows it to enable a MACsec-secured connection with the switch.

The switch:

- must support MACsec (see [Table 20 on page 410](#)).
- must be configured into dynamic secure association key security mode.
- must be using 802.1X authentication to communicate with the RADIUS server.

The RADIUS server:

- must be using the Extensible Authentication Protocol-Transport Layer Security (EAP-TLS) authentication framework.



**NOTE:** RADIUS servers that support other widely-used authentication frameworks, such as password-only or md5, cannot be used to support MACsec.

- must be using 802.1X authentication.
- can be multiple hops from the switch and the host device.

## MACsec Software Image Requirements for EX Series and QFX Series Switches

### Junos OS Release 16.1 and Later

For Junos OS Release 16.1 and later, you must download the standard Junos image to enable MACsec. MACsec is not supported in the limited image. See the [“MACsec Hardware and Software Support Summary” on page 410](#) to determine the correct release for your device.

The standard version of Junos OS software contains encryption and is, therefore, not available to customers in all geographies. The export and re-export of this Junos OS software is strictly controlled under United States export laws. The export, import, and

use of this Junos OS software is also subject to controls imposed under the laws of other countries. If you have questions about acquiring this version of your Junos OS software, contact Juniper Networks Trade Compliance group at [compliance\\_helpdesk@juniper.net](mailto:compliance_helpdesk@juniper.net).

### Junos OS Releases Prior to 16.1

For releases prior to Junos OS Release 16.1, you must download the controlled version of your Junos OS software to enable MACsec. MACsec support is not available in the domestic version of Junos OS software in releases prior to Junos OS Release 16.1. See the “[MACsec Hardware and Software Support Summary](#)” on [page 410](#) to determine the correct release for your device.

The controlled version of Junos OS software includes all features and functionality available in the domestic version of Junos OS, while also supporting MACsec. The domestic version of Junos OS software is shipped on all switches that support MACsec, so you must download and install a controlled version of Junos OS software for your switch before you can enable MACsec.

The controlled version of Junos OS software contains encryption and is, therefore, not available to customers in all geographies. The export and re-export of the controlled version of Junos OS software is strictly controlled under United States export laws. The export, import, and use of the controlled version of Junos OS software is also subject to controls imposed under the laws of other countries. If you have questions about acquiring the controlled version of your Junos OS software, contact Juniper Networks Trade Compliance group at [compliance\\_helpdesk@juniper.net](mailto:compliance_helpdesk@juniper.net).

## MACsec Hardware and Software Support Summary

[Table 20 on page 410](#) summarizes MACsec hardware and software support for EX Series and QFX Series switches.

See [Feature Explorer](#) for a full listing of Junos OS releases and platforms that support MACsec.

**Table 20: MACsec Hardware and Software Support Summary for EX Series and QFX Series Switches**

| Switch | MACsec-capable Interfaces                                     | Switch-to-Switch Support Introduction | Switch-to-Host Support Introduction | Encryption                                                                                         |
|--------|---------------------------------------------------------------|---------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------|
| EX3400 | 10GbE fiber interfaces and 1GbE copper interfaces.            | 15.1X53-D50                           | 15.1X53-D50                         | AES-128<br><br><small>NOTE: MACsec is not available on the limited Junos OS image package.</small> |
| EX4200 | All uplink port connections on the SFP+ MACsec uplink module. | 13.2X50-D15                           | 14.1X53-D10                         | AES-128                                                                                            |

**Table 20: MACsec Hardware and Software Support Summary for EX Series and QFX Series Switches (continued)**

| Switch  | MACsec-capable Interfaces                                                                                                                                                                                                                                                                                                                                | Switch-to-Switch Support Introduction                                                                     | Switch-to-Host Support Introduction | Encryption                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| EX4300  | All access and uplink ports.                                                                                                                                                                                                                                                                                                                             | 13.2X50-D15                                                                                               | 14.1X53-D10                         | AES-128                                                                                                             |
| EX4550  | All EX4550 optical interfaces that use the LC connection type. See <i>Pluggable Transceivers Supported on EX4550 Switches</i> .                                                                                                                                                                                                                          | 13.2X50-D15                                                                                               | 14.1X53-D10                         | AES-128                                                                                                             |
| EX4600  | All twenty-four fixed 1GbE SFP/10GbE SFP+ interfaces and all interfaces that support the copper Gigabit Interface Converter (GBIC).<br><br>All eight SFP+ interfaces on the EX4600-EM-8F expansion module.                                                                                                                                               | 14.1X53-D15<br><br><i>NOTE:</i> MACsec is not supported on EX4600 in Junos OS Release 15.1.               | Not supported                       | AES-128                                                                                                             |
| EX9200  | All forty SFP interfaces on the EX9200-40F-M line card.<br><br>All twenty SFP interfaces on the EX9200-20F-MIC installed in an EX9200-MPC line card.<br><br><i>NOTE:</i> You can install up to two EX9200-20F-MIC MICs in an EX9200-MPC line card for a maximum of forty MACsec-capable interfaces.<br><br>All forty SFP+ interfaces on the EX9200-40XS. | 15.1R1                                                                                                    | 15.1R1                              | AES-128<br><br><i>NOTE:</i> Starting in Junos OS Release 18.2R1, AES-256 is supported on the EX9200-40XS line card. |
| QFX5100 | All eight SFP+ interfaces on the EX4600-EM-8F expansion module installed in a QFX5100-24Q switch.                                                                                                                                                                                                                                                        | 14.1X53-D15<br><br><i>NOTE:</i> MACsec is not supported on QFX5100-24Q switches in Junos OS Release 15.1. | Not supported                       | AES-128                                                                                                             |

**Table 20: MACsec Hardware and Software Support Summary for EX Series and QFX Series Switches (continued)**

| Switch                | MACsec-capable Interfaces                             | Switch-to-Switch Support Introduction            | Switch-to-Host Support Introduction | Encryption                                                                                                                                                                                                                                   |
|-----------------------|-------------------------------------------------------|--------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| QFX10008 and QFX10016 | All six interfaces on the QFX10000-6C-DWDM line card. | 17.2R1<br><br><b>NOTE:</b> Static CAK mode only. | Not supported                       | AES-128 and AES-256<br><br><b>NOTE:</b> When enabling MACsec on the QFX10000-6C-DWDM line card, we recommend using a cipher suite with extended packet numbering (XPN). Supported XPN cipher suites are GCM-AES-XPN-128 and GCM-AES-XPN-256. |
|                       | All 30 interfaces on the QFX10000-30C-M line card.    | 17.4R1<br><br><b>NOTE:</b> Static CAK mode only. | Not supported                       | AES-128 and AES-256<br><br><b>NOTE:</b> When enabling MACsec on the QFX10000-30C-M line card, we recommend using a cipher suite with extended packet numbering (XPN). Supported XPN cipher suites are GCM-AES-XPN-128 and GCM-AES-XPN-256.   |

## Understanding MACsec in a Virtual Chassis

MACsec can be configured on supported switch interfaces when those switches are configured in a Virtual Chassis or Virtual Chassis Fabric (VCF), including when MACsec-supported interfaces are on member switches in a mixed Virtual Chassis or VCF that includes switch interfaces that do not support MACsec. MACsec, however, cannot be enabled on Virtual Chassis ports (VCPs) to secure traffic travelling between member switches in a Virtual Chassis or VCF.

## Understanding the MACsec Feature License Requirement

A feature license is required to configure MACsec on EX Series and QFX series switches, with the exception of the QFX10000-6C-DWDM and QFX10000-30C-M line cards. If the MACsec licence is not installed, MACsec functionality cannot be activated.

To purchase a feature license for MACsec, contact your Juniper Networks sales representative (<https://www.juniper.net/us/en/contact-us/sales-offices>). The Juniper sales representative will provide you with a feature license file and a license key. You will

be asked to supply the chassis serial number of your switch; you can obtain the serial number by running the **show chassis hardware** command.

The MACsec feature license is an independent feature license; the feature licenses that must be purchased to enable other groups of features on your switches cannot be purchased to enable MACsec.

## MACsec Limitations

- All types of Spanning Tree Protocol frames cannot currently be encrypted using MACsec.
- MACsec traffic drops are expected during GRES switchover.

Release History Table

| Release | Description                                                                                                                                                                                               |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18.3R1  | Starting in Junos OS Release 18.3R1, the MIC-MACSEC-20GE MIC provides 256-bit cipher-suite GCM-AES-256 and GCM-AES-XPB-256.                                                                               |
| 18.2R1  | Starting in Junos OS Release 18.2R1, AES-256 is supported on the EX9200-40XS line card.                                                                                                                   |
| 17.3    | Starting with Junos OS Release 17.3R2, you can configure MACsec on MX 10003 routers with the modular MIC (JNP-MIC1-MACSEC).                                                                               |
| 16.1    | Starting with Junos OS Release 16.1, you can configure MACsec on MX Series routers with the 40-port 10-Gigabit Ethernet MPC (MPC7E-10G).                                                                  |
| 15.1    | Starting with Junos OS Release 15.1, MACsec is supported on member links of an aggregated Ethernet ( <b>ae-</b> ) interface bundle, and also regular interfaces that are not part of an interface bundle. |

### Related Documentation

- [Configuring Media Access Control Security \(MACsec\) on page 413](#)

## Configuring Media Access Control Security (MACsec)

Media Access Control Security (MACsec) is an industry-standard security technology that provides secure communication for almost all types of traffic on Ethernet links. MACsec provides point-to-point security on Ethernet links between directly-connected nodes and is capable of identifying and preventing most security threats, including denial of service, intrusion, man-in-the-middle, masquerading, passive wiretapping, and playback attacks. MACsec is standardized in IEEE 802.1AE.

You can configure MACsec to secure point-to-point Ethernet links connecting EX Series or QFX Series switches, or on Ethernet links connecting a switch to a host device such as a PC, phone, or server. Each point-to-point Ethernet link that you want to secure using MACsec must be configured independently. You can enable MACsec on switch-to-switch links using static secure association key (SAK) security mode or static connectivity association key (CAK) security mode. Both processes are provided in this document.



**BEST PRACTICE:** We recommend enabling MACsec using static CAK security mode on switch-to-switch links. Static CAK security mode ensures security by frequently refreshing to a new random secure association key (SAK) and by only sharing the SAK between the two devices on the MACsec-secured point-to-point link. Additionally, some optional MACsec features—replay protection, SCI tagging, and the ability to exclude traffic from MACsec—are only available for MACsec-secured switch-to-switch connections that are enabled using static CAK security mode.

The configuration steps for both processes are provided in this document.



**BEST PRACTICE:** When enabling MACsec, we recommend that when you examine your interface MTU, adjusting it for MACsec overhead, which is 32 bytes.



**NOTE:** This topic pertains to switches that support MACsec. Any specifics about a particular switch are identified as such.

- [Acquiring and Downloading the Junos OS Software on page 414](#)
- [Acquiring and Downloading the MACsec Feature License on page 415](#)
- [Configuring the PIC Mode of the MACsec-capable Interfaces \(EX4200 switches only\) on page 416](#)
- [Configuring MACsec Using Static Connectivity Association Key Security Mode \(Recommended for Enabling MACsec on Switch-to-Switch Links\) on page 418](#)
- [Configuring MACsec on the Switch Using Dynamic Secure Association Key Security Mode to Secure a Switch-to-Host Link on page 423](#)
- [Configuring MACsec Using Static Secure Association Key Security Mode to Secure a Switch-to-Switch Link on page 428](#)

## Acquiring and Downloading the Junos OS Software

For Junos OS Release 16.1 and later, you must download the standard Junos image to enable MACsec. MACsec is not supported in the limited image.

For releases prior to Junos OS Release 16.1, you must download the controlled version of your Junos OS software to enable MACsec. MACsec support is not available in the domestic version of Junos OS software in releases prior to Junos OS Release 15.1.

You can identify whether a software package is the standard or controlled version of Junos OS by viewing the package name. A software package for a controlled version of Junos OS is named using the following format:

***package-name-m.nZx.y-controlled-signed.tgz***



A software package for a standard version of Junos OS is named using the following format:

*package-name-m.nZx.y-.tgz*

If you are unsure which version of Junos OS is running on your switch, enter the **show version** command. If the **JUNOS Crypto Software Suite** description appears in the output, you are running the controlled version of Junos OS. If you are running a controlled version of Junos OS, enter the **show system software** command to display the version. The output also shows the version of all loaded software packages.

The controlled version of Junos OS software for EX Series or QFX Series switches contains encryption and is, therefore, not available to customers in all geographies. The export and re-export of the controlled version of Junos OS software is strictly controlled under United States export laws. The export, import, and use of the controlled version of Junos OS software is also subject to controls imposed under the laws of other countries. If you have questions about acquiring the controlled version of your Junos OS software, contact Juniper Networks Trade Compliance group at [compliance\\_helpdesk@juniper.net](mailto:compliance_helpdesk@juniper.net).

The standard version of Junos OS software for EX Series and QFX Series switches contains encryption and is, therefore, not available to customers in all geographies. The export and re-export of this Junos OS software is strictly controlled under United States export laws. The export, import, and use of this Junos OS software is also subject to controls imposed under the laws of other countries. If you have questions about acquiring this version of your Junos OS software, contact Juniper Networks Trade Compliance group at [compliance\\_helpdesk@juniper.net](mailto:compliance_helpdesk@juniper.net).

The process for installing the controlled or standard version of Junos OS software onto your switch is identical to installing any other version of Junos OS software. You must enter the **request system software add** statement to download the Junos OS image, and the **request system reboot** statement to reboot the switch to complete the upgrade procedure.

See “[Understanding Media Access Control Security \(MACsec\)](#)” on page 403 for additional information on the versions of Junos OS software that are required for MACsec.

## Acquiring and Downloading the MACsec Feature License

A feature license is required to configure MACsec on an EX Series or a QFX Series switch, with the exception of the QFX10000-6C-DWDM and QFX10000-30C-M line cards. If the MACsec licence is not installed, MACsec functionality cannot be activated.

The MACsec feature license is an independent feature license; the enhanced feature licenses (EFLs) or advanced feature licenses (AFLs) that must be purchased to enable some features on EX Series or QFX Series switches cannot be purchased to enable MACsec.

To purchase a software license for MACsec, contact your Juniper Networks sales representative (<https://www.juniper.net/us/en/contact-us/sales-offices>). The Juniper sales representative will provide you with a feature license file and a license key. You will

be asked to supply the chassis serial number of your switch; you can obtain the serial number by running the **show chassis hardware** command.

For a Virtual Chassis deployment, two MACsec license keys are recommended for redundancy—one for the device in the master role and the other for the device in the backup role

To add one or more new MACsec license keys on the switch, follow this procedure:

1. Add the license key or keys:

- To add one or more license keys from a file or URL, specify the filename of the file or the URL where the key is located:

```
user@switch> request system license add filename |url
```

- To add a license key from the terminal:

```
user@switch> request system license add terminal
```

2. When prompted, enter the license key, separating multiple license keys with a blank line.

If the license key you enter is invalid, an error appears in the CLI output when you press Ctrl+d to exit the license entry mode.

A MACsec feature license is installed and maintained like any other switch license. See *Managing Licenses for the EX Series Switch (CLI Procedure)* or *Adding New Licenses (CLI Procedure)* for more detailed information on configuring and managing your MACsec software license.

## Configuring the PIC Mode of the MACsec-capable Interfaces (EX4200 switches only)

To configure MACsec on an EX4200 switch, you must install the SFP+ MACsec uplink module. The interfaces on the SFP+ MACsec uplink module are the only MACsec-capable interfaces available for EX4200 switches. All four ports on the uplink module are MACsec-capable.

The SFP+ MACsec uplink module provides two ports for 10-gigabit small form-factor pluggable (SFP+) transceivers when configured to operate in 10-gigabit mode or four ports for 1-gigabit small form-factor pluggable (SFP) transceivers when configured to operate in 1-gigabit mode.

The PIC mode is set to **10g**, by default. You only need to perform this procedure if you want to operate your uplink in 1-gigabit mode, or if you previously set the uplink module to 1-gigabit mode and would like to return it to 10-gigabit mode.

To configure the PIC mode:

```
[edit chassis]
user@switch# set fpc fpc-slot-number pic 1 sfplus pic-mode (1g | 10g)
```

where *fpc-slot-number* is the FPC slot number, *pic-slot-number* is the PIC slot number, and the **[1g | 10g]** option configures the MACsec capability of the four SFP+ ports on the MACsec uplink module.

The *fpc-slot-number* is always 0 on standalone EX4200 switches, and is the member ID of the member switch in an EX4200 Virtual Chassis.

The PIC slot number is always 1 for the uplink module port slot on an EX4200 switch, so **pic 1** is always the specified PIC slot number.

The PIC mode is set to **10g** by default. When the PIC mode is set to **10g**, uplink ports 0 and 2 on the MACsec uplink module support MACsec at 10-Gbps speeds. Ports 1 and 3 cannot be used to send any traffic.

When the PIC mode is set to **1g**, all four SFP+ ports on the MACsec uplink module support MACsec at 1-Gbps speeds.

## Configuring MACsec Using Static Connectivity Association Key Security Mode (Recommended for Enabling MACsec on Switch-to-Switch Links)

You can enable MACsec using static connectivity association key (CAK) security mode or static secure association keys (SAK) security mode on a point-to-point Ethernet link connecting switches. This procedure shows you how to configure MACsec using static CAK security mode.



**BEST PRACTICE:** We recommend enabling MACsec using static CAK security mode on switch-to-switch links. Static CAK security mode ensures security by frequently refreshing to a new random secure association key (SAK) and by only sharing the SAK between the two devices on the MACsec-secured point-to-point link. Additionally, some optional MACsec features—replay protection, SCI tagging, and the ability to exclude traffic from MACsec—are only available for MACsec-secured switch-to-switch connections that are enabled using static CAK security mode.

When you enable MACsec using static CAK security mode, a pre-shared key is exchanged between the switches on each end of the point-to-point Ethernet link. The pre-shared key includes a connectivity association name (CKN) and a connectivity association key (CAK). The CKN and CAK are configured by the user in the connectivity association and must match on both ends of the link to initially enable MACsec.

After the pre-shared keys are exchanged and verified, the MACsec Key Agreement (MKA) protocol, which enables and maintains MACsec on the link, is enabled. The MKA is responsible for selecting one of the two switches on the point-to-point link as the key server. The key server then creates a randomized security key that is shared only with the other device over the MACsec-secured link. The randomized security key enables and maintains MACsec on the point-to-point link. The key server will continue to periodically create and share a randomly-created security key over the point-to-point link for as long as MACsec is enabled.



**NOTE:** If the MACsec session is terminated due to a link failure, when the link is restored, the MKA key server elects a key server and generates a new SAK.

You enable MACsec using static CAK security mode by configuring a connectivity association on both ends of the link. All configuration is done within the connectivity association but outside of the secure channel. Two secure channels—one for inbound traffic and one for outbound traffic—are automatically created when using static CAK security mode. The automatically-created secure channels do not have any user-configurable parameters that cannot already be configured in the connectivity association.

To configure MACsec using static CAK security mode to secure a switch-to-switch Ethernet link:

1. Create a connectivity association. You can skip this step if you are configuring an existing connectivity association.

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name
```

For instance, to create a connectivity association named **ca1**, enter:

```
[edit security macsec]
user@switch# set connectivity-association ca1
```

2. Configure the MACsec security mode as **static-cak** for the connectivity association:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name security-mode
static-cak
```

For instance, to configure the MACsec security mode to **static-cak** on connectivity association **ca1**:

```
[edit security macsec]
user@switch# set connectivity-association ca1 security-mode static-cak
```

3. Create the pre-shared key by configuring the connectivity association key name (CKN) and connectivity association key (CAK):

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name pre-shared-key
ckn hexadecimal-number
user@switch# set connectivity-association connectivity-association-name pre-shared-key
cak hexadecimal-number
```

A pre-shared key is exchanged between directly-connected links to establish a MACsec-secure link. The pre-shared-key includes the CKN and the CAK. The CKN is a 64-digit hexadecimal number and the CAK is a 32-digit hexadecimal number. The CKN and the CAK must match on both ends of a link to create a MACsec-secured link.



**NOTE:** To maximize security, we recommend configuring all 64 digits of a CKN and all 32 digits of a CAK.

If you do not configure all 64 digits of a CKN or all 32 digits of a CAK, all remaining digits will be auto-configured to 0. However, you will receive a warning message when you commit the configuration.

After the pre-shared keys are successfully exchanged and verified by both ends of the link, the MACsec Key Agreement (MKA) protocol is enabled and manages the secure link. The MKA protocol then elects one of the two directly-connected switches as the key server. The key server then shares a random security with the other device over the MACsec-secure point-to-point link. The key server will continue to periodically create and share a random security key with the other device over the MACsec-secured point-to-point link as long as MACsec is enabled.

To configure a CKN of

37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311 and CAK of 228ef255aa23ff6729ee664acb66e91f on connectivity association ca1:

```
[edit security macsec]
user@switch# set connectivity-association ca1 pre-shared-key ckn
37c9c2c45ddd012aa5bc8ef284aa23ff6729ee2e4acb66e91fe34ba2cd9fe311
user@switch# set connectivity-association ca1 pre-shared-key cak
228ef255aa23ff6729ee664acb66e91f
```



**NOTE:** MACsec is not enabled until a connectivity association is attached to an interface. See the final step of this procedure to attach a connectivity association to an interface.

4. (Required on non-EX4300 switches when connecting to EX4300 switches only)  
Enable SCI tagging:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set include-sci
```

You must enable SCI tagging on a switch that is enabling MACsec on an Ethernet link connecting to an EX4300 switch.

SCI tags are automatically appended to packets leaving a MACsec-enabled interface on an EX4300 switch. This option is, therefore, not available on EX4300 switches.

You should only use this option when enabling MACsec on a link to an EX4300 switch. SCI tags are eight octets long, so appending an SCI tag to all traffic on the link adds a significant amount of unneeded overhead.

5. (Optional) Set the MKA key server priority:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set mka key-server-priority priority-number
```

Specifies the key server priority used by the MKA protocol to select the key server. The switch with the lower *priority-number* is selected as the key server.

The default *priority-number* is 16.

If the **key-server-priority** is identical on both sides of the point-to-point link, the MKA protocol selects the interface with the lower MAC address as the key server. Therefore, if this statement is not configured in the connectivity associations at each end of a MACsec-secured point-to-point link, the interface with the lower MAC address becomes the key server.

To change the key server priority to 0 to increase the likelihood that the current device is selected as the key server when MACsec is enabled on the interface using connectivity association **ca1**:

```
[edit security macsec connectivity-association ca1]
```

```
user@switch# set mka key-server-priority 0
```

To change the key server priority to 255 to decrease the likelihood that the current device is selected as the key server in connectivity association `ca1`:

```
[edit security macsec connectivity-association ca1]
user@switch# set mka key-server-priority 255
```

6. (Optional) Set the MKA transmit interval:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set mka transmit-interval interval
```

The MKA transmit interval setting sets the frequency for how often the MKA protocol data unit (PDU) is sent to the directly connected device to maintain MACsec connectivity on the link. A lower *interval* increases bandwidth overhead on the link; a higher *interval* optimizes MKA protocol communication.

The default *interval* is 2000ms. We recommend increasing the interval to 6000 ms in high-traffic load environments. The transmit interval settings must be identical on both ends of the link when MACsec using static CAK security mode is enabled.

For instance, if you wanted to increase the MKA transmit interval to 6000 milliseconds when connectivity association `ca1` is attached to an interface:

```
[edit security macsec connectivity-association ca1]
user@switch# set mka transmit-interval 6000
```

7. (Optional) Disable MACsec encryption:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set no-encryption
```

Encryption is enabled for all traffic entering or leaving the interface when MACsec is enabled using static CAK security mode, by default.

When encryption is disabled, traffic is forwarded across the Ethernet link in clear text. You are able to view unencrypted data in the Ethernet frame traversing the link when you are monitoring it. The MACsec header is still applied to the frame, however, and all MACsec data integrity checks are run on both ends of the link to ensure the traffic sent or received on the link has not been tampered with and does not represent a security threat.

8. (Optional) Set an offset for all packets traversing the link:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set offset (0 | 30 | 50)
```

For instance, if you wanted to set the offset to 30 in the connectivity association named `ca1`:

```
[edit security macsec connectivity-association ca1]
user@switch# set offset 30
```

The default offset is 0. All traffic in the connectivity association is encrypted when encryption is enabled and an **offset** is not set.

When the offset is set to 30, the IPv4 header and the TCP/UDP header are unencrypted while encrypting the rest of the traffic. When the offset is set to 50, the IPv6 header and the TCP/UDP header are unencrypted while encrypting the rest of the traffic.

You would typically forward traffic with the first 30 or 50 octets unencrypted if a feature needed to see the data in the octets to perform a function, but you otherwise prefer to encrypt the remaining data in the frames traversing the link. Load balancing features, in particular, typically need to see the IP and TCP/UDP headers in the first 30 or 50 octets to properly load balance traffic.

9. (Optional) Enable replay protection.

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set replay-protect replay-window-size number-of-packets
```

When MACsec is enabled on a link, an ID number is assigned to each packet on the MACsec-secured link.

When replay protection is enabled, the receiving interface checks the ID number of all packets that have traversed the MACsec-secured link. If a packet arrives out of sequence and the difference between the packet numbers exceeds the replay protection window size, the packet is dropped by the receiving interface. For instance, if the replay protection window size is set to five and a packet assigned the ID of 1006 arrives on the receiving link immediately after the packet assigned the ID of 1000, the packet that is assigned the ID of 1006 is dropped because it falls outside the parameters of the replay protection window.

Replay protection is especially useful for fighting man-in-the-middle attacks. A packet that is replayed by a man-in-the-middle attacker on the Ethernet link will arrive on the receiving link out of sequence, so replay protection helps ensure the replayed packet is dropped instead of forwarded through the network.

Replay protection should not be enabled in cases where packets are expected to arrive out of order.

You can require that all packets arrive in order by setting the replay window size to 0.

To enable replay protection with a window size of five on connectivity association **ca1**:

```
[edit security macsec connectivity-association ca1]
user@switch# set replay-protect replay-window-size 5
```

10. (Optional) Exclude a protocol from MACsec:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set exclude-protocol protocol-name
```

For instance, if you did not want Link Level Discovery Protocol (LLDP) to be secured using MACsec:

```
[edit security macsec connectivity-association connectivity-association-name]
```



```
user@switch# set exclude-protocol lldp
```

When this option is enabled, MACsec is disabled for all packets of the specified protocol—in this case, LLDP—that are sent or received on the link.

11. Assign the connectivity association to an interface:

```
[edit security macsec]
user@switch# set interfaces interface-names connectivity-association
connectivity-association-name
```

Assigning the connectivity association to an interface is the final configuration step to enabling MACsec on an interface.

For instance, to assign connectivity association ca1 to interface xe-0/0/1:

```
[edit security macsec]
user@switch# set interfaces xe-0/1/0 connectivity-association ca1
```



**NOTE:** On an EX4300 uplink module, the first transceiver plugged into the uplink module determines the PIC mode, as the PIC recognizes the SFP type and programs all of the ports to be either ge- or xe-. Make sure the MACsec configuration on the interface matches the link speed for the uplink module ports.

MACsec using static CAK security mode is not enabled until a connectivity association on the opposite end of the link is also configured, and contains pre-shared keys that match on both ends of the link.

**See Also** • [Understanding Media Access Control Security \(MACsec\) on page 403](#)

## Configuring MACsec on the Switch Using Dynamic Secure Association Key Security Mode to Secure a Switch-to-Host Link

Before you begin to enable MACsec on a switch-to-host link:

- Confirm that MACsec on switch-to-host links is supported on your switch. See [“Understanding Media Access Control Security \(MACsec\)” on page 403](#).
- Configure a RADIUS server. The RADIUS server:
  - must be configured as the user database for 802.1X authentication.
  - Starting in Junos OS Release 15.1, the Extensible Authentication Protocol-Transport Layer Security (EAP-TLS) authentication framework is required for MACsec on a switch-to-host link.
  - must have connectivity to the switch and to the host. The RADIUS server can be multiple hops from the switch or the host.

See *Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch*.

- Enable MACsec on the host device.

The procedures for enabling MACsec on the host device varies by host device, and is beyond the scope of this document.

To configure MACsec using dynamic security mode to secure a switch-to-host Ethernet link:

1. Create a connectivity association. You can skip this step if you are configuring an existing connectivity association.

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name
```

For instance, to create a connectivity association named `ca-dynamic1`, enter:

```
[edit security macsec]
user@switch# set connectivity-association ca-dynamic1
```

2. Configure the MACsec security mode as dynamic for the connectivity association:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name security-mode
dynamic
```

For instance, to configure the MACsec security mode to dynamic on connectivity association `ca-dynamic1`:

```
[edit security macsec]
user@switch# set connectivity-association ca-dynamic1 security-mode dynamic
```

3. (Optional) Configure the **must-secure** option:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name mka must-secure
```

When the **must-secure** option is enabled, all traffic that is not MACsec-secured that is received on the interface is dropped.

When the **must-secure** option is disabled, all traffic from devices that support MACsec is MACsec-secured while traffic received from devices that do not support MACsec is forwarded through the network.

The **must-secure** option is particularly useful in scenarios where multiple devices, such as a phone and a PC, are accessing the network through the same Ethernet interface. If one of the devices supports MACsec while the other device does not support MACsec, the device that doesn't support MACsec can continue to send and receive traffic over the network—provided the **must-secure** option is disabled—while traffic to and from the device that supports MACsec is MACsec-secured. In this scenario, traffic to the device that is not MACsec-secured must be VLAN-tagged.

The **must-secure** option is disabled, by default.

4. (Required only if the host device requires SCI tagging) Enable SCI tagging:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set include-sci
```

You should only use this option when connecting a switch to a host that requires SCI tags. SCI tags are eight octets long, so appending an SCI tag to all traffic on the link adds a significant amount of unneeded overhead.

5. (Optional) Set the MKA key server priority:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set mka key-server-priority priority-number
```

Specifies the key server priority used by the MKA protocol to select the key server. The switch with the lower *priority-number* is selected as the key server.

The default *priority-number* is 16. If the **key-server-priority** is identical on both sides of the point-to-point link, the MKA protocol selects the interface with the lower MAC address as the key server. Therefore, if this statement is not configured in the connectivity associations at each end of a MACsec-secured point-to-point link, the interface with the lower MAC address becomes the key server.

To change the key server priority to 0 to increase the likelihood that the current device is selected as the key server when MACsec is enabled on the interface using connectivity association ca1:

```
[edit security macsec connectivity-association ca-dynamic1]
user@switch# set mka key-server-priority 0
```

To change the key server priority to 255 to decrease the likelihood that the current device is selected as the key server in connectivity association ca-dynamic1:

```
[edit security macsec connectivity-association ca-dynamic1]
user@switch# set mka key-server-priority 255
```

6. (Optional) Set the MKA transmit interval:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set mka transmit-interval interval
```

The MKA transmit interval setting sets the frequency for how often the MKA protocol data unit (PDU) is sent to the directly connected device to maintain MACsec connectivity on the link. A lower interval increases bandwidth overhead on the link; a higher interval optimizes MKA protocol communication.

The default interval is 2000ms. We recommend increasing the interval to 6000 ms in high-traffic load environments. The transmit interval settings must be identical on both ends of the link.

For instance, if you wanted to increase the MKA transmit interval to 6000 milliseconds when connectivity association ca-dynamic1 is attached to an interface:

```
[edit security macsec connectivity-association ca-dynamic1]
user@switch# set mka transmit-interval 6000
```

7. (Optional) Disable MACsec encryption:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set no-encryption
```

Encryption is enabled for all traffic entering or leaving the interface when MACsec is enabled using dynamic security mode, by default. When encryption is disabled, traffic is forwarded across the Ethernet link in clear text. You are able to view unencrypted data in the Ethernet frame traversing the link when you are monitoring it. The MACsec header is still applied to the frame, however, and all MACsec data integrity checks are run on both ends of the link to ensure the traffic sent or received on the link has not been tampered with and does not represent a security threat.

8. (Optional) Set an offset for all packets traversing the link:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set offset (0 | 30 | 50)
```

For instance, if you wanted to set the offset to 30 in the connectivity association named ca-dynamic1:

```
[edit security macsec connectivity-association ca-dynamic1]
user@switch# set offset 30
```

The default offset is 0. All traffic in the connectivity association is encrypted when encryption is enabled and an offset is not set.

When the offset is set to 30, the IPv4 header and the TCP/UDP header are unencrypted while encrypting the rest of the traffic. When the offset is set to 50, the IPv6 header and the TCP/UDP header are unencrypted while encrypting the rest of the traffic.

You would typically forward traffic with the first 30 or 50 octets unencrypted if a feature needed to see the data in the octets to perform a function, but you otherwise prefer to encrypt the remaining data in the frames traversing the link. Load balancing features, in particular, typically need to see the IP and TCP/UDP headers in the first 30 or 50 octets to properly load balance traffic.

9. (Optional) Enable replay protection.

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set replay-protect replay-window-size number-of-packets
```

When MACsec is enabled on a link, an ID number is assigned to each packet on the MACsec-secured link. When replay protection is enabled, the receiving interface checks the ID number of all packets that have traversed the MACsec-secured link. If a packet arrives out of sequence and the difference between the packet numbers exceeds the replay protection window size, the packet is dropped by the receiving interface. For instance, if the replay protection window size is set to five and a packet assigned the ID of 1006 arrives on the receiving link immediately after the packet assigned the ID of 1000, the packet that is assigned the ID of 1006 is dropped because it falls outside the parameters of the replay protection window.

Replay protection is especially useful for fighting man-in-the-middle attacks. A packet that is replayed by a man-in-the-middle attacker on the Ethernet link will arrive on the receiving link out of sequence, so replay protection helps ensure the replayed packet is dropped instead of forwarded through the network.

Replay protection should not be enabled in cases where packets are expected to arrive out of order.

You can require that all packets arrive in order by setting the replay window size to 0.

To enable replay protection with a window size of five on connectivity association `ca-dynamic1`:

```
[edit security macsec connectivity-association ca-dynamic1]
user@switch# set replay-protect replay-window-size 5
```

#### 10. (Optional) Exclude a protocol from MACsec:

```
[edit security macsec connectivity-association connectivity-association-name]
user@switch# set exclude-protocol protocol-name
```

For instance, if you did not want Link Level Discovery Protocol (LLDP) to be secured using MACsec:

```
[edit security macsec connectivity-association ca-dynamic1]
user@switch# set exclude-protocol lldp
```

When this option is enabled, MACsec is disabled for all packets of the specified protocol—in this case, LLDP—that are sent or received on the link.



**BEST PRACTICE:** We recommend that any protocol other than MACsec being used on the MACsec connection, such as LLDP, LACP, STP, or layer 3 routing protocols, should be excluded and moved outside of the MACsec tunnel.

#### 11. Assign the connectivity association to an interface:

```
[edit security macsec]
user@switch# set interfaces interface-names connectivity-association
connectivity-association-name
```

Assigning the connectivity association to an interface is the final configuration step to enabling MACsec on an interface. For instance, to assign connectivity association `ca-dynamic1` to interface `xe-0/0/1`:

```
[edit security macsec]
user@switch# set interfaces xe-0/1/0 connectivity-association ca-dynamic1
```



**NOTE:** On an EX4300 uplink module, the first transceiver plugged into the uplink module determines the PIC mode, as the PIC recognizes the SFP type and programs all of the ports to be either ge- or xe-. Make sure the MACsec configuration on the interface matches the link speed for the uplink module ports.

## Configuring MACsec Using Static Secure Association Key Security Mode to Secure a Switch-to-Switch Link

When you enable MACsec using static secure association key (SAK) security mode, one of up to two manually configured security keys is used to secure the point-to-point Ethernet link between the switches. All security key names and values are configured by the user; there is no key server or other tool that creates security keys. Security is maintained on the point-to-point Ethernet link by periodically rotating the security keys. Each security key name and value must have a corresponding matching value on the interface at the other end of the point-to-point Ethernet link to maintain MACsec on the link.

You configure static SAKs within secure channels when you are enabling MACsec using static SAK security mode. You configure secure channels within connectivity associations. A typical connectivity association for MACsec using static SAK security mode contains two secure channels—one for inbound traffic and one for outbound traffic—that have each been configured with two static SAKs. You must attach the connectivity association with the secure channel configurations to an interface to enable MACsec using static SAK security mode.

To configure MACsec on a switch-to-switch Ethernet link using static SAK security mode:

1. Create a connectivity association. You can skip this step if you are configuring an existing connectivity association.

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name
```

For instance, to create a connectivity association named **ca1**, enter:

```
[edit security macsec]
user@switch# set connectivity-association ca1
```

2. Configure the MACsec security mode as **static-sak** for the connectivity association:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name security-mode
static-sak
```

For instance, to configure the MACsec security mode to **static-sak** on connectivity association **ca1**:

```
[edit security macsec]
user@switch# set connectivity-association ca1 security-mode static-sak
```

3. Create a secure channel within the connectivity association. You can skip this step if you are configuring an existing secure channel.

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name secure-channel
secure-channel-name
```

For instance, to create secure channel **sc1** in connectivity association **ca1**, enter:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc1
```

4. Define the security associations and the static SAKs for the secure channel:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name secure-channel
secure-channel-name security-association number key key-string
```

where the **security-association** *number* is a number between 0 and 3, and the *key-string* is a 32-digit key defined statically by the network administrator.

The key string is a 32-digit hexadecimal number. The key string and the security association must match on both sides of an Ethernet connection to secure traffic using MACsec.

A secure channel must have at least two security associations with unique key strings. MACsec uses a security associations to establish a secure communications link, and periodically rotates to a new security association to keep the link secure. MACsec, therefore, must have at least one backup security association and key at all times.

To create one secure channel with two security associations and keys, for example:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc1 security-association 0 key
d183c4002fa6fe3d2d9a852c20ab8412
user@switch# set connectivity-association ca1 secure-channel sc1 security-association 1 key
b976c7494ab6fe2f2d4c432a90fd90a8
```

5. Specify whether the secure channel should be applied to traffic entering or leaving the switch:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name secure-channel
secure-channel-name direction [inbound | outbound]
```

where **inbound** applies the secure channel to traffic entering the switch, and **outbound** applies the secure channel to traffic leaving the switch.



**NOTE:** A secure channel can only be applied to traffic entering (inbound) or leaving (outbound) an interface on the switch.

If you need to configure MACsec using SAKs on inbound and outbound traffic on the same interface, you must configure a connectivity association with one secure channel for inbound traffic and a second secure channel for outbound traffic. The connectivity association is assigned to an interface later in this process.

For instance, to configure secure channel **sc1** to apply MACsec to incoming traffic:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc1 direction inbound
```

To configure secure channel **sc2** to apply MACsec to outgoing traffic:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc2 direction outbound
```

6. Specify a MAC address:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name secure-channel
secure-channel-name id mac-address mac-address
```

If you are configuring a MAC address on a secure channel in the outbound direction, you should specify the MAC address of the interface as the **mac-address**.

If you are configuring a MAC address on a secure channel in the inbound direction, you should specify the MAC address of the interface at the other end of the link as the **mac-address**.

The **mac-address** variables must match on the sending and receiving secure channel on each side of a link to enable MACsec using static SAK security mode.



**NOTE:** You can see the MAC address of an interface in the **show interfaces** output.

To configure MACsec to accept frames from MAC address **12:34:56:ab:cd:ef** on secure channel **sc1**:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc1 id mac-address
12:34:56:ab:cd:ef
```

7. Specify a port:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name secure-channel
secure-channel-name id port-id port-id-number
```



The **port-id-number** variables must match on a sending and receiving secure channel on each side of a link to enable MACsec.



**NOTE:** The only requirement for port numbers in this implementation of MACsec is that they match on the sending and receiving ends of an Ethernet link. When the port numbers match, MACsec is enabled for all traffic on the connection.

To specify port ID 4 on secure channel **sc1**:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc1 id port-id 4
```

8. (Optional) Enable encryption:

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name secure-channel
secure-channel-name encryption
```

You can enable MACsec without enabling encryption. If a secure channel is configured on an interface without encryption, traffic is forwarded across the Ethernet link in clear text, and you will be able to view unencrypted data in the Ethernet frame traversing the link when you are monitoring it. The MACsec header is still applied to the frame, however, and all MACsec data integrity checks are run on both ends of the link to ensure the traffic on the link does not represent a security threat.

Encryption is disabled by default when you are enabling MACsec using static SAK security mode. To ensure all traffic traversing secure-channel **sc1** is encrypted:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc1 encryption
```

9. (Optional) Set an offset to send the first 30 or 50 octets in unencrypted plain text when encryption is enabled.

```
[edit security macsec]
user@switch# set connectivity-association connectivity-association-name secure-channel
secure-channel-name offset [0 | 30 | 50]
```

When the offset is set to 30, the IPv4 header and the TCP/UDP header are unencrypted while encrypting the rest of the traffic. When the offset is set to 50, the IPv6 header and the TCP/UDP header are unencrypted while encrypting the rest of the traffic.

You would typically forward traffic with the first 30 or 50 octets unencrypted if a feature needed to see the data in the octets to perform a function, but you otherwise prefer to encrypt the remaining data in the frames traversing the link. Load balancing features, in particular, typically need to see the IP and TCP/UDP headers in the first 30 or 50 octets to properly load balance traffic.

The default offset is 0, so all traffic on the link is encrypted when the **encryption** option is enabled and an **offset** is not set.

To change the offset to 30 for secure channel **sc1**:

```
[edit security macsec]
user@switch# set connectivity-association ca1 secure-channel sc1 offset 30
```

10. Assign the connectivity association to an interface:

```
[edit security macsec]
user@switch# set interfaces interface-names connectivity-association
connectivity-association-name
```

Assigning the connectivity association to an interface is the final configuration step to enabling MACsec on an interface.

For instance, to assign connectivity association ca1 to interface xe-0/0/1:

```
[edit security macsec]
user@switch# set interfaces xe-0/1/0 connectivity-association ca1
```



**NOTE:** On an EX4300 uplink module, the first transceiver plugged into the uplink module determines the PIC mode, as the PIC recognizes the SFP type and programs all of the ports to be either ge- or xe-. Make sure the MACsec configuration on the interface matches the link speed for the uplink module ports.

MACsec using static SAK security mode is not enabled until a connectivity association on the opposite end of the link is also configured, and the configuration match on both ends of the link.

#### Release History Table

| Release | Description                                                                                                                                                                            |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.1    | Starting in Junos OS Release 15.1, the Extensible Authentication Protocol-Transport Layer Security (EAP-TLS) authentication framework is required for MACsec on a switch-to-host link. |

#### Related Documentation

- [Understanding Media Access Control Security \(MACsec\) on page 403](#)

## Configuration Examples

- [Configuring MAC Limiting on page 434](#)
- [Configuring Autorecovery for MAC Limited or Storm Control Interfaces \(CLI Procedure\) on page 435](#)
- [Configuring the none Action to Override a MAC Limit Applied to All Interfaces \(CLI Procedure\) on page 436](#)
- [Configuring MAC Limiting \(CLI Procedure\) on page 436](#)
- [Configuring Persistent MAC Learning \(CLI Procedure\) on page 438](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 440](#)
- [Verifying That MAC Limiting Is Working Correctly on page 442](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 449](#)
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452](#)
- [Enabling a Trusted Port for DHCP on page 456](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
- [Verifying That DAI Is Working Correctly on page 461](#)
- [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 462](#)
- [Example: Configuring DHCP Snooping, DAI , and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473](#)
- [Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces on page 478](#)
- [Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN on page 488](#)
- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497](#)

- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500](#)
- [Enabling DHCP Snooping \(CLI Procedure\) on page 504](#)
- [Setting the none Action on an Interface to Override a MAC Limit Applied to All Interfaces \(CLI Procedure\) on page 507](#)
- [Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 508](#)
- [Making IP-MAC Bindings in the DHCP Snooping Database Persistent \(CLI Procedure\) on page 511](#)
- [Verifying That IP Source Guard Is Working Correctly on page 512](#)
- [Verifying That Persistent MAC Learning Is Working Correctly on page 513](#)

## Configuring MAC Limiting

---

To configure MAC limiting on a specific interface or on all interfaces:

1. To limit the number of dynamic MAC addresses, set a MAC limit of 5.

The action is not specified, so the switch performs the default action **drop** if the limit is exceeded:

- On a single interface (here, the interface is **xe-0/0/1**):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface xe-0/0/1 mac-limit (Access Port Security) 5
```

- On all interfaces:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all mac-limit 5
```



**CAUTION:** Do not set the MAC limit to 1. The first learned MAC address is often inserted into the forwarding database automatically. (For instance, the first MAC address inserted into the forwarding database for routed VLAN interfaces is the MAC address of the RVI. For Aggregated Ethernet bundles using LACP, the first MAC address inserted into the forwarding database in the forwarding table is the source address of the protocol packet.) The switch therefore fails to learn MAC addresses other than the automatic addresses when the MAC limit is set to 1, and this causes problems with MAC learning and forwarding.

2. To specify allowed MAC addresses:

- On a single interface (here, the interface is **xe-0/0/2**):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface xe-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface xe-0/0/2 allowed-mac 00:05:85:3A:82:81
```

```
user@switch# set interface xe-0/0/2 allowed-mac 00:05:85:3A:82:83
```

- On all interfaces:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all allowed-mac 00:05:85:3A:82:80
user@switch# set interface all allowed-mac 00:05:85:3A:82:81
user@switch# set interface all allowed-mac 00:05:85:3A:82:83
```

#### Related Documentation

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299](#)
- [Overview of Access Port Protection on page 270](#)
- [Verifying That MAC Limiting Is Working Correctly on page 442](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445](#)
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks](#)
- [no-allowed-mac-log](#)

## Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI Procedure)

An Ethernet access interface might shut down or be disabled as a result of one of the following configurations:

- MAC limiting—**mac-limit** statement is configured with action **shutdown**.
- MAC move limiting—**mac-move-limit** statement is configured with action **shutdown**.
- Storm control—**storm-control** statement is configured with the action **shutdown**.

You can configure a device to automatically restore the disabled interfaces to service after a specified period of time. Autorecovery applies to all the interfaces that have been disabled due to MAC limiting, MAC move limiting, or storm control errors.

To configure autorecovery from the disabled state due to MAC limiting, MAC move limiting, or storm control shutdown actions:

```
[edit ethernet-switching-options]
user@switch# set port-error-disable disable-timeout seconds
```



**NOTE:** You must specify the disable timeout value—there is no default disable timeout period. If you do not specify a timeout value, you must use the **clear ethernet-switching port-error** command to clear the errors and restore the interfaces to service.

**Related  
Documentation**

- [Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299](#)
- [Configuring MAC Limiting on page 434](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 350](#)
- [Understanding Storm Control on page 561](#)

## Configuring the none Action to Override a MAC Limit Applied to All Interfaces (CLI Procedure)

---

If you set a MAC limit in your port security settings to apply to all interfaces, you can override that setting for a particular interface by specifying the action **none**.

To use the **none** action to override a MAC limit setting:

1. Set the MAC limit for all interfaces—for example, a limit of **5** with action **drop**:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all mac-limit (Access Port Security) 5 action drop
```

2. Change the action for one interface with this command.

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface xe-0/0/2 mac-limit action none
```

**Related  
Documentation**

- [Configuring MAC Limiting on page 434](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Verifying That MAC Limiting Is Working Correctly on page 442](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445](#)
- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452](#)

## Configuring MAC Limiting (CLI Procedure)

---



**NOTE:** This task uses Junos OS for EX Series switches and QFX3500 and QFX3600 switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Configuring MAC Limiting \(CLI Procedure\)” on page 346](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

This topic describes various ways of configuring a limitation on MAC addresses in packets that are received and forwarded by the switch.

For information on configuring an interface to automatically recover from a shutdown caused by MAC limiting, see [“Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\)” on page 596](#). If you do not configure the switch for autorecovery from the disabled condition, you can bring up the disabled interfaces by running the `clear ethernet-switching recovery-timeout` command.

The different ways of setting a MAC limit are described in the following sections:

- [Limiting the Number of MAC Addresses Learned by an Interface on page 437](#)
- [Limiting the Number of MAC Addresses Learned by a VLAN on page 437](#)

## Limiting the Number of MAC Addresses Learned by an Interface

To secure a port, you can set the maximum number of MAC addresses that can be learned by an interface:

- Set the MAC limit on an interface, and specify an action that the switch takes after the specified limit is exceeded:

```
[edit switch-options]
user@switch# set interface interface-name interface-mac-limit limit packet-action
action
```

After you set a new MAC limit for the interface, the system clears existing entries in the MAC address forwarding table associated with the interface.

## Limiting the Number of MAC Addresses Learned by a VLAN

To limit the number of MAC addresses learned by a VLAN, perform both of the following steps:

1. Set the maximum number of MAC addresses that can be learned by a VLAN, and specify an action that the switch takes after the specified limit is exceeded:

```
[edit vlans]
user@switch# set vlan-name switch-options mac-table-size limit packet-action
action
```

2. Set the maximum number of MAC addresses that can be learned by one or all interfaces in the VLAN, and specify an action that the switch takes after the specified limit is exceeded:



**NOTE:** If you specify a MAC limit and packet action for all interfaces in the VLAN *and* a specific interface in the VLAN, the MAC limit and packet action specified at the specific interface level takes precedence. Also, at the VLAN interface level, only the drop and drop-and-log options are supported.

```
[edit vlans]
user@switch# set vlan-name switch-options interface interface-name
interface-mac-limit limit packet-action action
```

```
[edit vlans]
user@switch# set vlan-name switch-options interface-mac-limit limit packet-action
action
```

After you set new MAC limits for a VLAN by using the **mac-table-size** statement or for interfaces associated with a VLAN by using the **interface-mac-limit** statement, the system clears the corresponding existing entries in the MAC address forwarding table.



**NOTE:** On a QFX Series Virtual Chassis, if you include the **shutdown** option at the `[edit vlans vlan-name switch-options interface interface-name interface-mac-limit packet-action]` hierarchy level and issue the **commit** operation, the system generates a commit error. The system does not generate an error if you include the **shutdown** option at the `[edit switch-options interface interface-name interface-mac-limit packet-action]` hierarchy level.

#### Related Documentation

- [Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 596](#)
- [Configuring Persistent MAC Learning \(CLI Procedure\) on page 438](#)

## Configuring Persistent MAC Learning (CLI Procedure)



**NOTE:** This topic uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

Persistent MAC address learning is disabled by default. You can enable it to:

- Help prevent traffic losses for trusted workstations and servers because, if persistent MAC address learning is enabled on an interface, the interface does not have to relearn the addresses from ingress traffic after a restart.
- Protect the switch against security attacks—Use persistent MAC learning in combination with MAC limiting to protect against attacks while still obviating the need to statically configure MAC addresses. When the initial learning of MAC addresses up to the number specified by the MAC limit is done, new addresses are not allowed even after a restart. The port is secured because after the limit has been reached, additional devices cannot connect to the interface.

To configure persistent MAC learning on an interface and limit the number of allowed MAC addresses:

1. Enable persistent MAC learning on an interface:

```
[edit switch-options]
user@switch# set interface interface-name persistent-learning
```



2. Configure the MAC limit on an interface, and specify the action that the switch takes after the specified limit is exceeded:

```
[edit switch-options]
user@switch# set interface interface-name interface-mac-limit limit packet-action action
```

After you set a new MAC limit for the interface, the system clears existing entries in the MAC address forwarding table associated with the interface.

Values for *action* are:

**drop**—Drop packets with new source MAC addresses, and do not learn the new source MAC addresses.

**drop-and-log**—(EX Series switches only) Drop packets with new source MAC addresses, and generate an alarm, an SNMP trap, or a system log entry.

**log**—(EX Series switches only) Hold packets with new source MAC addresses, and generate an alarm, an SNMP trap, or a system log entry.

**none**—(EX Series switches only) Forward packets with new source MAC addresses, and learn the new source MAC address.

**shutdown**—(EX Series switches only) Disable the specified interface, and generate an alarm, an SNMP trap, or a system log entry.



**TIP:** If you move a device within your network that has a persistent MAC address entry on the switch, use the `clear ethernet-switching table` command to clear the persistent MAC address entry from the interface. If you move the device and do not clear the persistent MAC address from the original port it was learned on, then the new port will not learn the MAC address of the device and the device will not be able to connect.

If the original port is down when you move the device, then the new port will learn the MAC address and the device can connect. However, if you do not clear the persistent MAC address on the original port, then when the port restarts, the system reinstalls the persistent MAC address in the forwarding table for that port. If this occurs, the persistent MAC address is removed from the new port and the device loses connectivity.

#### Related Documentation

- [Configuring Persistent MAC Learning \(CLI Procedure\) on page 353](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 440](#)
- [Understanding Persistent MAC Learning \(Sticky MAC\) on page 352](#)

## Configuring MAC Move Limiting (CLI Procedure)

---

When MAC move limiting is configured, the switch tracks MAC address movements on access and trunk interfaces. A MAC address move occurs when the switch receives a packet with a source MAC address that has already been learned by the switch, but on a different interface. If a MAC address changes more than the configured number of times within one second, the changes to MAC addresses are dropped, logged or ignored, or the interface is shut down, as specified in the configuration.

MAC move limiting is not configured by default.

You can choose to have one of the following actions performed when the MAC move limit is exceeded:



**NOTE:** There is no default action.

- **drop**—(EX2300, EX3400 and EX4300) Drop the packet, but do not generate an alarm.
- **drop-and-log**—(EX2300, EX3400 and EX4300 only) Drop the packet and generate an alarm, an SNMP trap, or system log entry.
- **log**—(EX4300 and EX9200) Do not drop the packet but generate an alarm, an SNMP trap, or a system log entry.
- **none**—(EX4300 and EX9200) Forward packets with new source MAC addresses, and learn the new source MAC address.
- **shutdown**—Disable the interface in the VLAN and generate an alarm, an SNMP trap, or a system log entry. If you configure an interface with the [recovery-timeout](#) statement, the disabled interfaces recover automatically upon expiration of the specified disable timeout. If you do not configure the switch for autorecovery from the disabled condition, you can bring up the disabled interfaces by running the [clear ethernet-switching recovery-timeout](#) command.
- **vlan-member-shutdown**—(EX9200 only) Block an interface on the basis of its membership in a specific VLAN and generate an alarm, an SNMP trap, or a system log entry. If you configure an interface with the [recovery-timeout](#) statement, the disabled interfaces recover automatically upon expiration of the specified disable timeout. If you do not configure [recovery-timeout](#), then the interface remains blocked for 180 seconds, after which it is automatically restored. You can recover all of the blocked interfaces by running the [clear ethernet-switching recovery-timeout](#) command, or recover a specific interface by using the **set ethernet-switching recovery-timeout interface interface-name vlan vlan-name** command.

To configure a MAC move limit for MAC addresses within a specific VLAN:

- To limit the number of MAC address movements that can be made by an individual MAC address within the specified VLAN:

```
[edit edit vlans vlan-name switch-options]
user@switch# set mac-move-limit limit
```

- To limit the number of MAC address movements that can be made by an individual MAC address and to specify the action to be taken when the limit is reached:

```
[edit edit vlans vlan-name switch-options]
user@switch# set mac-move-limit limit packet-action action
```

The switch performs the specified action if it tracks that an individual MAC address within the specified VLAN has moved more than the specified number of times within one second.

- Starting in Junos OS Release 15.1 for EX9200 Switches with configured actions for MAC Move Limiting, you can determine the priority for an interface involved in the MAC move to be selected for the action. To determine the priority for an interface involved in the MAC move:

```
[edit edit vlans vlan-name switch-options]
user@switch# set mac-move-limit interface interface-name action-priority value
```

The interface with the lowest value configured for **action-priority** has the highest priority.



**NOTE:** You can use the action priority to decrease the likelihood of blocking a trusted interface. The trusted interface should have the lowest priority if the configured action is **shutdown** or **vlan-member-shutdown**. To assign a low priority, configure a high value for **action-priority**.

Release History Table

| Release | Description                                                                                                                                                                                                  |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.1    | Starting in Junos OS Release 15.1 for EX9200 Switches with configured actions for MAC Move Limiting, you can determine the priority for an interface involved in the MAC move to be selected for the action. |

Related Documentation

- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches on page 343](#)
- [Configuring MAC Limiting \(CLI Procedure\) on page 436](#)
- [Configuring Persistent MAC Learning \(CLI Procedure\) on page 438](#)

## Verifying That MAC Limiting Is Working Correctly

---

MAC limiting protects against flooding of the Ethernet switching table by setting a limit on the number of MAC addresses that can be learned on a single Layer 2 access interface (port).

Junos OS provides two MAC limiting methods:

- **Maximum number of MAC addresses**—You configure the maximum number of dynamic MAC addresses allowed per interface. When the limit is exceeded, incoming packets with new MAC addresses can be ignored, dropped, or logged. You can also specify that the interface be shut down or temporarily disabled.
- **Allowed MAC addresses**—You configure specific “allowed” MAC addresses for the access interface. Any MAC address that is not in the list of configured addresses is not learned, and the switch logs an appropriate message. The allowed MAC method binds MAC addresses to a VLAN so that the address is not registered outside the VLAN. If an allowed MAC setting conflicts with a dynamic MAC setting, the allowed MAC setting takes precedence.

This topic includes the following tasks:

1. [Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly on page 442](#)
2. [Verifying That Allowed MAC Addresses Are Working Correctly on page 443](#)
3. [Verifying That Interfaces Are Shut Down on page 443](#)
4. [Customizing the Ethernet Switching Table Display to View Information for a Specific Interface on page 444](#)

## Verifying That MAC Limiting for Dynamic MAC Addresses Is Working Correctly

**Purpose** Verify that MAC limiting for dynamic MAC addresses is working.

**Action** Display the MAC addresses that have been learned. The following sample output shows the results of sending two packets from hosts connected to **xe-1:0/0/1** and five packets from hosts connected to **xe-1:0/0/2**, with both interfaces configured with a MAC limit of **4** and the action **drop**:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 7 entries, 6 learned
```

| VLAN          | MAC address       | Type  | Age | Interfaces   |
|---------------|-------------------|-------|-----|--------------|
| employee-vlan | *                 | Flood | -   | xe-1:0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:77 | Learn | 0   | xe-1:0/0/1.0 |
| employee-vlan | 00:05:85:3A:82:79 | Learn | 0   | xe-1:0/0/1.0 |
| employee-vlan | 00:05:85:3A:82:80 | Learn | 0   | xe-1:0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:81 | Learn | 0   | xe-1:0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:83 | Learn | 0   | xe-1:0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:85 | Learn | 0   | xe-1:0/0/2.0 |

**Meaning** The output shows that the fifth packet received on the **xe-1:0/0/2** interface was dropped because it exceeded the MAC limit for that interface. The address was not learned, and thus an asterisk (\*) rather than an address appears in the MAC address column in the first line of the sample output.

## Verifying That Allowed MAC Addresses Are Working Correctly

**Purpose** Verify that allowed MAC addresses are working.

**Action** Display the MAC cache information after allowed MAC addresses have been configured on an interface. The following sample shows the MAC cache after four allowed MAC addresses had been configured on interface **xe-1:0/0/2** and a fifth MAC address appeared on the interface.

```
user@switch> show ethernet-switching table
Ethernet-switching table: 5 entries, 4 learned
```

| VLAN          | MAC address       | Type  | Age | Interfaces   |
|---------------|-------------------|-------|-----|--------------|
| employee-vlan | 00:05:85:3A:82:80 | Learn | 0   | xe-1:0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:81 | Learn | 0   | xe-1:0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:83 | Learn | 0   | xe-1:0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:85 | Learn | 0   | xe-1:0/0/2.0 |
| employee-vlan | *                 | Flood | -   | xe-1:0/0/2.0 |

**Meaning** Because the fifth address was not allowed it was not learned, and an asterisk (\*) rather than an address appears in the MAC address column in the last line of the sample output.

## Verifying That Interfaces Are Shut Down

**Purpose** Verify that an interface is shut down when the MAC limit is exceeded.

**Action** For more information about interfaces that have been shut down because the MAC limit was exceeded, use the **show ethernet-switching interfaces** command.

```
user@switch> show ethernet-switching interfaces
Interface State VLAN members Tag Tagging Blocking

bme0.32770 down mgmt untagged unblocked
xe-0/0/0.0 down v1 untagged MAC limit exceeded
xe- 0/0/1.0 up v1 untagged unblocked
xe-0/0/2.0 up v1 untagged unblocked
me0.0 up mgmt untagged unblocked
```



**NOTE:** You can configure interfaces to recover automatically when the MAC limit has been exceeded by specifying the **port-error-disable** statement with a **disable timeout** value. The switch automatically restores the disabled interface to service when the disable timeout expires. The **port-error-disable** configuration does not apply to preexisting error conditions—it affects only error conditions that are detected after the **port-error-disable** statement has been enabled and the configuration has been committed. To clear a preexisting error condition and restore the interface to service, use the **clear ethernet-switching port-error** command.

## Customizing the Ethernet Switching Table Display to View Information for a Specific Interface

**Purpose** You can use the **show ethernet-switching table** command to view information for a specific interface.

**Action** For example, to display the MAC addresses that have been learned on the **xe-0/0/2** interface, enter:

```
user@switch> show ethernet-switching table interface xe-0/0/2.0
Ethernet-switching table: 1 unicast entries

VLAN MAC address Type Age Interfaces
v1 * Flood - All-members
v1 00:00:06:00:00:00 Learn 0 xe-0/0/2.0
```

**Meaning** The MAC limit value for the **xe-0/0/2** interface had been set to 1, and the output shows that only one MAC address was learned and added to the MAC cache.

- Related Documentation**
- [Configuring MAC Limiting on page 434](#)
  - [Monitoring Port Security on page 280](#)
  - [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
  - [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 462](#)
  - [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks](#)

## Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks

In an Ethernet switching table overflow attack, an intruder sends so many requests from new MAC addresses that the Ethernet switching table fills up and then overflows, forcing the switch to broadcast all messages.

This example describes how to configure MAC limiting and allowed MAC addresses, two port security features, to protect the switch from Ethernet switching table attacks:

- [Requirements on page 445](#)
- [Overview and Topology on page 445](#)
- [Configuration on page 447](#)
- [Verification on page 448](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch or QFX3500 switch
- Junos OS Release 9.0 or later for EX Series switches or Junos OS 12.1 or later for the QFX Series.
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure specific port security features to mitigate common access-interface attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:


### Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch from an attack on the Ethernet switching table that causes the table to overflow and thus forces the switch to broadcast all messages.

This example shows how to configure port security features on a switch connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch. The procedure for creating that VLAN is described in the topic *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches* and *Example: Setting Up Bridging with Multiple VLANs for the QFX Series*. That procedure is not repeated here. [Figure 21 on page 446](#) illustrates the topology for this example.

*Figure 21: Network Topology for Basic Port Security*

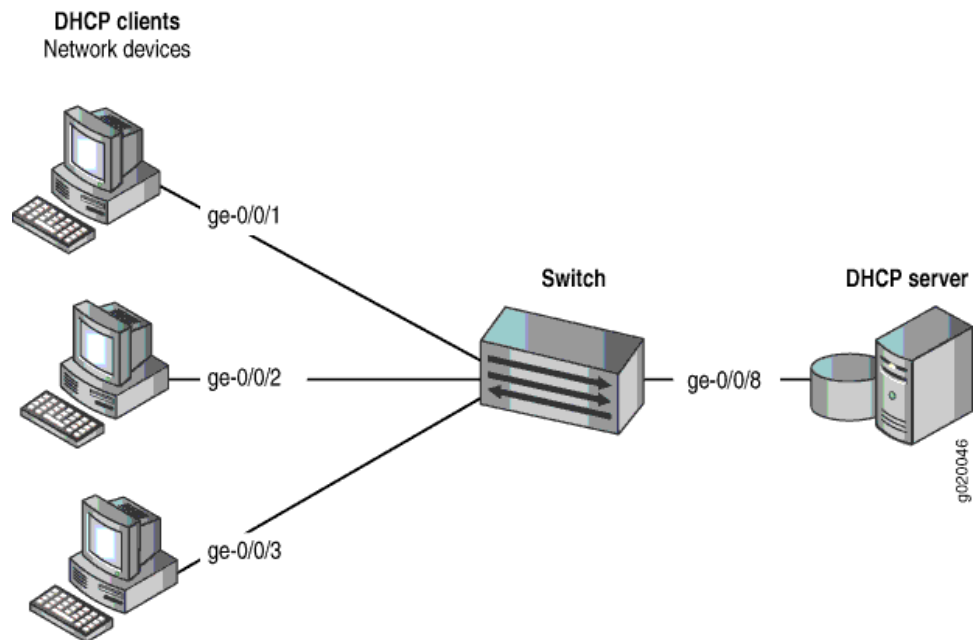

The components of the topology for this example are shown in [Table 21 on page 446](#).

*Table 21: Components of the Port Security Topology*

| Properties                         | Settings                                                                                   |
|------------------------------------|--------------------------------------------------------------------------------------------|
| Switch hardware                    | One EX Series switch or one QFX3500 switch                                                 |
| VLAN name and ID                   | <b>employee-vlan</b> , tag 20                                                              |
| VLAN subnets                       | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is subnet's broadcast address |
| Interfaces in <b>employee-vlan</b> | ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8                                                     |
| Interface for DHCP server          | ge-0/0/8                                                                                   |

In this example, use the MAC limit feature to control the total number of MAC addresses that can be added to the Ethernet switching table for the specified interface. Use the



allowed MAC addresses feature to ensure that the addresses of network devices whose network access is critical are guaranteed to be included in the Ethernet switching table.

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- No MAC limit is set on any of the interfaces.
- All access interfaces are untrusted, which is the default setting.

## Configuration

To configure MAC limiting and some allowed MAC addresses to protect the switch against Ethernet switching table overflow attacks:

**CLI Quick Configuration** To quickly configure MAC limiting, clear the MAC forwarding table, and configure some allowed MAC addresses, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/1 mac-limit 4 action drop
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
exit
exit
clear ethernet-switching-table interface ge-0/0/1
```

**Step-by-Step Procedure** Configure MAC limiting and some allowed MAC addresses:

1. Configure a MAC limit of 4 on **ge-0/0/1** and specify that incoming packets with different addresses be dropped once the limit is exceeded on the interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit (Access Port Security) 4 action drop
```

2. Clear the current entries for interface **ge-0/0/1** from the MAC address forwarding table :

```
user@switch# clear ethernet-switching-table interface ge-0/0/1
```

3. Configure the allowed MAC addresses on **ge-0/0/2**:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/1.0 {
 mac-limit 4 action drop;
}
interface ge-0/0/2.0 {
 allowed-mac [00:05:85:3a:82:80 00:05:85:3a:82:81 00:05:85:3a:82:83 00:05:85:3a:82:85];
}
```

## Verification

To confirm that the configuration is working properly:

- [Verifying That MAC Limiting Is Working Correctly on the Switch on page 448](#)

### Verifying That MAC Limiting Is Working Correctly on the Switch

**Purpose** Verify that MAC limiting is working on the switch.

**Action** Display the MAC cache information after DHCP requests have been sent from hosts on **ge-0/0/1**, with the interface set to a MAC limit of 4 with the action **drop**, and after four allowed MAC addresses have been configured on interface **ge-0/0/2**:

```
user@switch> show vlans
Ethernet-switching table: 5 entries, 4 learned
```

| VLAN          | MAC address       | Type  | Age | Interfaces |
|---------------|-------------------|-------|-----|------------|
| employee-vlan | 00:05:85:3A:82:71 | Learn | 0   | ge-0/0/1.0 |
| employee-vlan | 00:05:85:3A:82:74 | Learn | 0   | ge-0/0/1.0 |
| employee-vlan | 00:05:85:3A:82:77 | Learn | 0   | ge-0/0/1.0 |
| employee-vlan | 00:05:85:3A:82:79 | Learn | 0   | ge-0/0/1.0 |
| employee-vlan | *                 | Flood | 0   | ge-0/0/1.0 |
| employee-vlan | 00:05:85:3A:82:80 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:81 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:83 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:85 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | *                 | Flood | -   | ge-0/0/2.0 |

**Meaning** The sample output shows that with a MAC limit of 4 for the interface, the DHCP request for a fifth MAC address on **ge-0/0/1** was dropped because it exceeded the MAC limit and that only the specified allowed MAC addresses have been learned on the **ge-0/0/2** interface.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 289](#)
  - [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
  - [Configuring MAC Limiting on page 434](#)
  - [Configuring MAC Move Limiting \(CLI Procedure\) on page 350](#)

- *Configuring MAC Limiting (J-Web Procedure)*

## Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks

In a rogue DHCP server attack, an attacker has introduced a rogue server into the network, allowing it to give IP address leases to the network's DHCP clients and to assign itself as the gateway device.

This example describes how to configure a DHCP server interface as untrusted to protect the switch from a rogue DHCP server:

- [Requirements on page 449](#)
- [Overview and Topology on page 449](#)
- [Configuration on page 450](#)
- [Verification on page 451](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch
- Junos OS Release 9.0 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure an untrusted DHCP server interface to mitigate rogue DHCP server attacks, be sure you have:


- Connected the DHCP server to the switch.
- Enabled DHCP snooping on the VLAN.
- Configured a VLAN on the switch. See the task for your platform:
  - *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches*
  - *Example: Setting Up Bridging with Multiple VLANs for the QFX Series*

### Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch from rogue DHCP server attacks.

This example shows how to explicitly configure an untrusted interface on an EX3200-24P switch and a QFX3500 switch. [Figure 22 on page 450](#) illustrates the topology for this example.

Figure 22: Network Topology for Basic Port Security

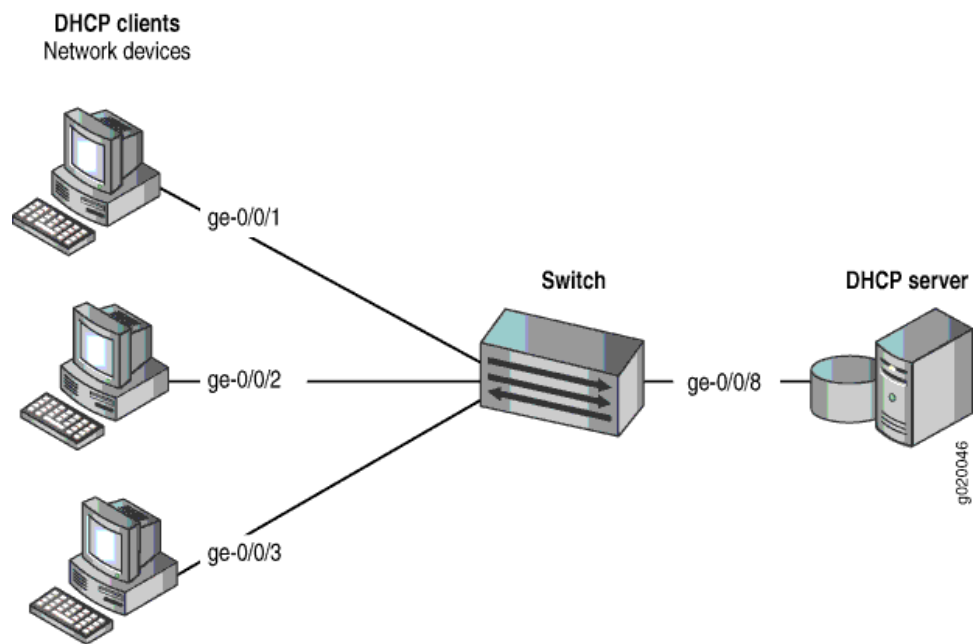

The components of the topology for this example are shown in [Table 22 on page 450](#).

Table 22: Components of the Port Security Topology

| Properties                         | Settings                                                                                       |
|------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware                    | One EX3200-24P, 24 ports (8 PoE ports) or one QFX3500 switch                                   |
| VLAN name and ID                   | <b>employee-vlan</b> , tag 20                                                                  |
| VLAN subnets                       | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is the subnet's broadcast address |
| Interfaces in <b>employee-vlan</b> | ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8                                                         |
| Interface for DHCP server          | ge-0/0/8                                                                                       |

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- DHCP snooping is enabled on the VLAN **employee-vlan**.
- The interface (port) where the rogue DHCP server has connected to the switch is currently trusted.

## Configuration

To configure the DHCP server interface as untrusted because the interface is being used by a rogue DHCP server:

**CLI Quick Configuration** To quickly set the rogue DHCP server interface as untrusted, copy the following command and paste it into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/8 no-dhcp-trusted
```

**Step-by-Step Procedure** To set the DHCP server interface as untrusted:

- Specify the interface (port) from which DHCP responses are not allowed:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 no-dhcp-trusted
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/8.0 {
 no-dhcp-trusted;
}
```

## Verification

Confirm that the configuration is working properly.

### Verifying That the DHCP Server Interface Is Untrusted

**Purpose** Verify that the DHCP server is untrusted.

- Action**
1. Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.
  2. Display the DHCP snooping information when the port on which the DHCP server connects to the switch is not trusted.

**Meaning** There is no output from the command because no entries are added to the DHCP snooping database.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 289](#)
  - [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 538](#)
  - [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)
  - [secure-access-port on page 964](#)
  - [secure-access-port](#)
  - [show dhcp snooping binding on page 1154](#)

## Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks

---

In a DHCP starvation attack, an attacker floods an Ethernet LAN with DHCP requests from spoofed (counterfeit) MAC addresses, causing the switch's overworked DHCP server to stop assigning IP addresses and lease times to legitimate DHCP clients on the switch (hence the name starvation). Requests from those clients are either dropped or directed to a rogue DHCP server set up by the attacker.

This example describes how to configure MAC limiting, a port security feature, to protect the switch against DHCP starvation attacks:

- [Requirements on page 452](#)
- [Overview and Topology on page 452](#)
- [Configuration on page 453](#)
- [Verification on page 454](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch
- Junos OS Release 9.0 or later for EX Series switches
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure MAC limiting, a port security feature, to mitigate DHCP starvation attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured the VLAN **employee-vlan** on the switch. See *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches*.


### Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch against one common type of attack, a DHCP starvation attack.

This example shows how to configure port security features on a switch connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch. The procedure for creating that VLAN is described in the topic *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches*. That procedure is not repeated here. [Figure 23 on page 453](#) illustrates the topology for this example.

Figure 23: Network Topology for Basic Port Security

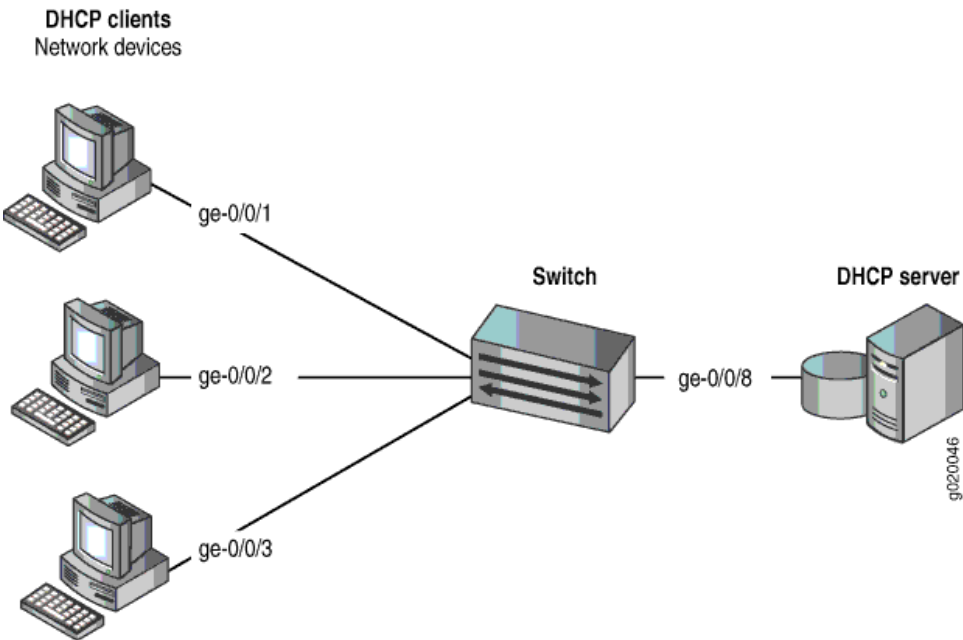

The components of the topology for this example are shown in [Table 23 on page 453](#).

Table 23: Components of the Port Security Topology

| Properties                         | Settings                               |
|------------------------------------|----------------------------------------|
| Switch hardware                    |                                        |
| VLAN name and ID                   | default                                |
| Interfaces in <b>employee-vlan</b> | ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8 |
| Interface for DHCP server          | ge-0/0/8                               |

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- No MAC limit is set on any of the interfaces.
- DHCP snooping is disabled on the VLAN **employee-vlan**.
- All access interfaces are untrusted, which is the default setting.

Configuration

To configure the MAC limiting port security feature to protect the switch against DHCP starvation attacks:

**CLI Quick Configuration** To quickly configure MAC limiting, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/1 mac-limit 3 action drop
set interface ge-0/0/2 mac-limit 3 action drop
```

**Step-by-Step Procedure** Configure MAC limiting:

1. Configure a MAC limit of **3** on **ge-0/0/1** and specify that packets with new addresses be dropped if the limit has been exceeded on the interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/1 mac-limit (Access Port Security) 3 action drop
```

2. Configure a MAC limit of **3** on **ge-0/0/2** and specify that packets with new addresses be dropped if the limit has been exceeded on the interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 mac-limit 3 action drop
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/1.0 {
 mac-limit 3 action drop;
}
interface ge-0/0/2.0 {
 mac-limit 3 action drop;
}
```

## Verification

To confirm that the configuration is working properly:

- [Verifying That MAC Limiting Is Working Correctly on the Switch on page 454](#)

### Verifying That MAC Limiting Is Working Correctly on the Switch

**Purpose** Verify that MAC limiting is working on the switch.



**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the MAC addresses learned when DHCP requests are sent from hosts on **ge-0/0/1** and from hosts on **ge-0/0/2**, with both interfaces set to a MAC limit of **3** with the action **drop**:

```
user@switch> show vlans
Ethernet-switching table: 7 entries, 6 learned
```

| VLAN    | MAC address       | Type  | Age | Interfaces |
|---------|-------------------|-------|-----|------------|
| default | *                 | Flood | -   | ge-0/0/2.0 |
| default | 00:05:85:3A:82:77 | Learn | 0   | ge-0/0/1.0 |
| default | 00:05:85:3A:82:79 | Learn | 0   | ge-0/0/1.0 |
| default | 00:05:85:3A:82:80 | Learn | 0   | ge-0/0/1.0 |
| default | 00:05:85:3A:82:81 | Learn | 0   | ge-0/0/2.0 |
| default | 00:05:85:3A:82:83 | Learn | 0   | ge-0/0/2.0 |
| default | 00:05:85:3A:82:85 | Learn | 0   | ge-0/0/2.0 |

**Meaning** The sample output shows that with a MAC limit of **3** for each interface, the DHCP request for a fourth MAC address on **ge-0/0/2** was dropped because it exceeded the MAC limit.

Because only 3 MAC addresses can be learned on each of the two interfaces, attempted DHCP starvation attacks will fail.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 289](#)
  - [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
  - [Configuring MAC Limiting on page 434](#)
  - [Configuring MAC Limiting \(J-Web Procedure\)](#)

## Enabling a Trusted Port for DHCP

---

By default, all access ports are untrusted and all trunk ports are trusted with regard to DHCP. Trusted ports allow DHCP servers to provide IP addresses and other information to requesting devices. Untrusted ports drop traffic from DHCP servers to prevent unauthorized servers from providing any configuration information to clients.

If you attach a DHCP server to an access port, you must configure it as trusted. You configure a trusted DHCP server on an interface, not on a VLAN.



**NOTE:** Before you attach a DHCP server to a trusted access port, ensure that the server is physically secure—that is, that access to the server is monitored and controlled.

- To configure a trusted interface for a DHCP server by using the CLI (here, the interface is `xe-0/0/8`):

```
[edit ethernet-switching-options secure-access port]
user@switch# set interface xe-0/0/8 dhcp-trusted
```

### Related Documentation

- [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 449](#)
- [Verifying That a Trusted DHCP Server Is Working Correctly on page 307](#)
- [Monitoring Port Security on page 280](#)
- [Understanding Trusted and Untrusted Ports on page 307](#)

## Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks

---

In an ARP spoofing attack, the attacker associates its own MAC address with the IP address of a network device connected to the switch. Traffic intended for that IP address is now sent to the attacker instead of being sent to the intended destination. The attacker can send faked, or “spoofed,” ARP messages on the LAN.



**NOTE:** When dynamic ARP inspection (DAI) is enabled, the switch logs the number of invalid ARP packets that it receives on each interface, along with the sender’s IP and MAC addresses. You can use these log messages to discover ARP spoofing on the network. ARP probe packets are not subjected to dynamic ARP inspection. The switch always forwards such packets.

This example describes how to configure DHCP snooping and dynamic ARP inspection (DAI), two port security features, to protect the switch against ARP spoofing attacks:

- [Requirements on page 457](#)
- [Overview and Topology on page 457](#)
- [Configuration on page 458](#)
- [Verification on page 459](#)

## Requirements

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch
- Junos OS Release 11.4 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure DHCP snooping and DAI (two port security features) to mitigate ARP spoofing attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:
  - *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches*
  - *Example: Setting Up Bridging with Multiple VLANs on Switches for QFX Series Switches*


## Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch against one common type of attack, an ARP spoofing attack.

In an ARP spoofing attack, the attacker sends faked ARP messages, thus creating various types of problems on the LAN—for example, the attacker might launch a man-in-the-middle attack.

This example shows how to configure port security features on a switch that is connected to a DHCP server. The setup for this example includes the VLAN **employee-vlan** on the switch. The procedure for creating that VLAN is described in the topic *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches* and *Example: Setting Up Bridging with Multiple VLANs on Switches for the QFX Series*. That procedure is not repeated here. [Figure 24 on page 458](#) illustrates the topology for this example.

Figure 24: Network Topology for Basic Port Security

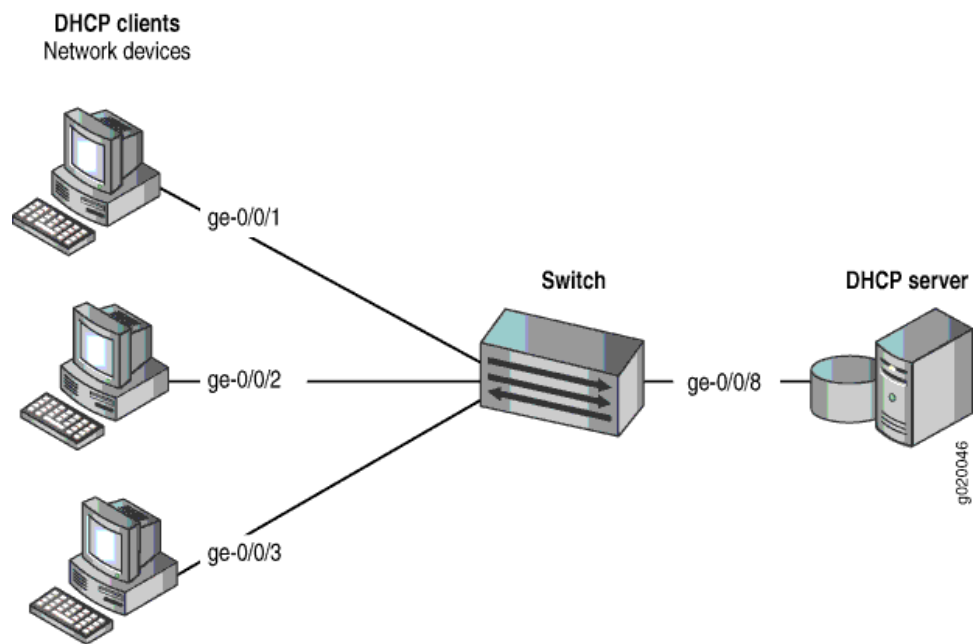

The components of the topology for this example are shown in [Table 24 on page 458](#).

Table 24: Components of the Port Security Topology

| Properties                         | Settings                                                                                       |
|------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware                    | One EX3200-24P, 24 ports (8 PoE ports) or one QFX3500 switch                                   |
| VLAN name and ID                   | <b>employee-vlan</b> , tag 20                                                                  |
| VLAN subnets                       | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is the subnet's broadcast address |
| Interfaces in <b>employee-vlan</b> | <code>ge-0/0/1</code> , <code>ge-0/0/2</code> , <code>ge-0/0/3</code> , <code>ge-0/0/8</code>  |
| Interface for DHCP server          | <code>ge-0/0/8</code>                                                                          |

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- DHCP snooping is disabled on the VLAN **employee-vlan**.
- All access ports are untrusted, which is the default setting.

## Configuration

To configure DHCP snooping and dynamic ARP inspection (DAI) to protect the switch against ARP attacks:

**CLI Quick Configuration** To quickly configure DHCP snooping and dynamic ARP inspection (DAI), copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 dhcp-trusted
user@switch# set vlan employee-vlan examine-dhcp
user@switch# set vlan employee-vlan arp-inspection
```

**Step-by-Step Procedure** Configure DHCP snooping and dynamic ARP inspection (DAI) on the VLAN:

1. Set the **ge-0/0/8** interface as trusted:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/8 dhcp-trusted
```

2. Enable DHCP snooping on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan examine-dhcp
```

3. Enable DAI on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee-vlan arp-inspection
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/8.0 {
 dhcp-trusted;
}
vlan employee-vlan {
 arp-inspection;
 examine-dhcp;
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying That DHCP Snooping Is Working Correctly on the Switch on page 459](#)
- [Verifying That DAI Is Working Correctly on the Switch on page 460](#)

### Verifying That DHCP Snooping Is Working Correctly on the Switch

**Purpose** Verify that DHCP snooping is working on the switch.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the port on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp-snooping binding
DHCP Snooping Information:
MAC Address IP Address Lease Type VLAN Interface

00:05:85:3A:82:77 192.0.2.17 600 dynamic employee-vlan ge-0/0/1.0
00:05:85:3A:82:79 192.0.2.18 653 dynamic employee-vlan ge-0/0/1.0
00:05:85:3A:82:80 192.0.2.19 720 dynamic employee-vlan ge-0/0/2.0
00:05:85:3A:82:81 192.0.2.20 932 dynamic employee-vlan ge-0/0/2.0
00:05:85:3A:82:83 192.0.2.21 1230 dynamic employee-vlan ge-0/0/2.0
00:05:85:27:32:88 192.0.2.22 3200 dynamic employee-vlan ge-0/0/3.0
```

**Meaning** When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

### Verifying That DAI Is Working Correctly on the Switch

**Purpose** Verify that DAI is working on the switch.

**Action** Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch> show arp inspection statistics
ARP inspection statistics:
Interface Packets received ARP inspection pass ARP inspection failed

ge-0/0/1.0 7 5 2
ge-0/0/2.0 10 10 0
ge-0/0/3.0 12 12 0
```

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

**Related Documentation**

- [Example: Configuring Basic Port Security Features on page 289](#)

- [Enabling DHCP Snooping \(CLI Procedure\) on page 504](#)
- [Enabling DHCP Snooping \(J-Web Procedure\)](#)
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 636](#)
- [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)
- [secure-access-port on page 964](#)
- [show arp inspection statistics on page 1108](#)
- [show dhcp snooping binding on page 1154](#)

## Verifying That DAI Is Working Correctly

**Purpose** Verify that dynamic ARP inspection (DAI) is working on the switch.

**Action** Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch> show arp inspection statistics
ARP inspection statistics:
Interface Packets received ARP inspection pass ARP inspection failed

ge-0/0/1.0 7 5 2
ge-0/0/2.0 10 10 0
ge-0/0/3.0 12 12 0
```

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

**Related Documentation**

- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 636](#)
- [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
- [Monitoring Port Security on page 280](#)

## Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks

---

In one type of attack on the DHCP snooping database, an intruder introduces a DHCP client on an untrusted access interface with a MAC address identical to that of a client on another untrusted interface. The intruder then acquires the DHCP lease of that other client, thus changing the entries in the DHCP snooping table. Subsequently, what would have been valid ARP requests from the legitimate client are blocked.

This example describes how to configure allowed MAC addresses, a port security feature, to protect the switch from DHCP snooping database alteration attacks:

- [Requirements on page 462](#)
- [Overview and Topology on page 462](#)
- [Configuration on page 463](#)
- [Verification on page 464](#)

### Requirements

This example uses the following hardware and software components:

- One EX Series switch or one QFX3500 switch
- Junos OS Release 11.4 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure specific port security features to mitigate common access-interface attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured a VLAN on the switch. See the task for your platform:
  - *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches*
  - *Example: Setting Up Bridging with Multiple VLANs for the QFX Series*

### Overview and Topology


Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. This example describes how to protect the switch from an attack on the DHCP snooping database that alters the MAC addresses assigned to some clients.

This example shows how to configure port security features on a switch that is connected to a DHCP server.

The setup for this example includes the VLAN **employee-vlan** on the switch. [Figure 25 on page 463](#) illustrates the topology for this example.



Figure 25: Network Topology for Basic Port Security

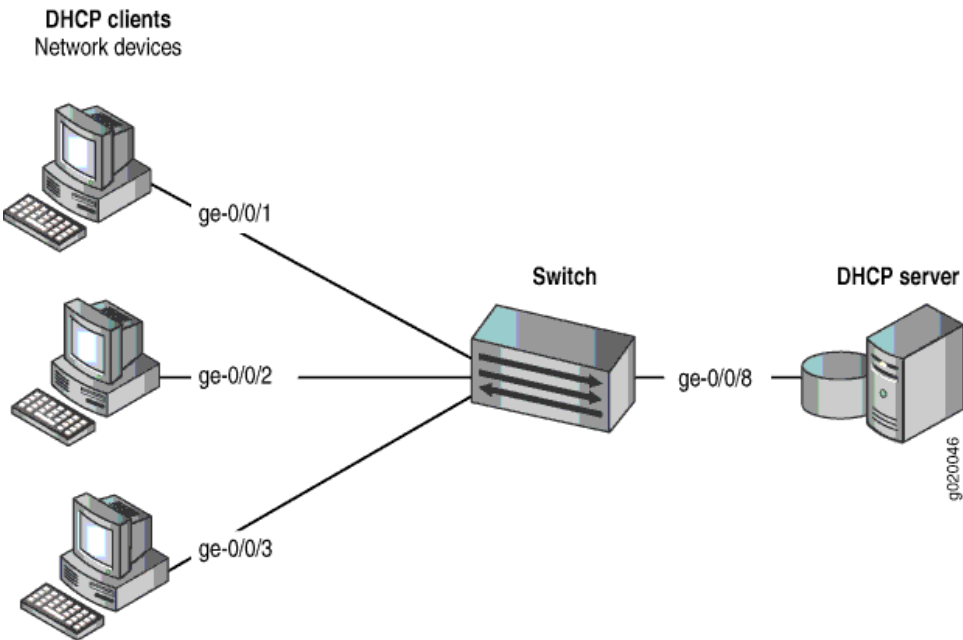

The components of the topology for this example are shown in [Table 25 on page 463](#).

Table 25: Components of the Port Security Topology

| Properties                         | Settings                                                                                       |
|------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware                    | One EX3200-24P, 24 ports (8 PoE ports) or one QFX3500 switch                                   |
| VLAN name and ID                   | <b>employee-vlan</b> , tag 20                                                                  |
| VLAN subnets                       | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is the subnet's broadcast address |
| Interfaces in <b>employee-vlan</b> | ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8                                                         |
| Interface for DHCP server          | ge-0/0/8                                                                                       |

In this example, the switch has already been configured as follows:

- Secure port access is activated on the switch.
- DHCP snooping is enabled on the VLAN **employee-vlan**.
- All access ports are untrusted, which is the default setting.

Configuration

To configure allowed MAC addresses to protect the switch against DHCP snooping database alteration attacks:

**CLI Quick Configuration** To quickly configure some allowed MAC addresses on an interface, copy the following commands and paste them into the switch terminal window:

```
[edit ethernet-switching-options secure-access-port]
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
```

**Step-by-Step Procedure** To configure some allowed MAC addresses on an interface:  
Configure the five allowed MAC addresses on an interface:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:80
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:81
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:83
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:85
user@switch# set interface ge-0/0/2 allowed-mac 00:05:85:3A:82:88
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
interface ge-0/0/2.0 {
 allowed-mac [00:05:85:3a:82:80 00:05:85:3a:82:81 00:05:85:3a:82:83 00:05:85:
:3a:82:85 00:05:85:3a:82:88];
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying That Allowed MAC Addresses Are Working Correctly on the Switch on page 464](#)

### Verifying That Allowed MAC Addresses Are Working Correctly on the Switch

**Purpose** Verify that allowed MAC addresses are working on the switch.

**Action** Display the MAC cache information:

```
user@switch> show ethernet-switching table
Ethernet-switching table: 6 entries, 5 learned
```

| VLAN          | MAC address       | Type  | Age | Interfaces |
|---------------|-------------------|-------|-----|------------|
| employee-vlan | 00:05:85:3A:82:80 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:81 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:83 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:85 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | 00:05:85:3A:82:88 | Learn | 0   | ge-0/0/2.0 |
| employee-vlan | *                 | Flood | -   | ge-0/0/2.0 |

**Meaning** The output shows that the five MAC addresses configured as allowed MAC addresses have been learned and are displayed in the MAC cache. The last MAC address in the list, one that had not been configured as allowed, has not been added to the list of learned addresses.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 289](#)
  - [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
  - [Configuring MAC Limiting \(J-Web Procedure\)](#)
  - [secure-access-port on page 964](#)
  - [secure-access-port](#)
  - [show ethernet-switching table on page 1174](#)

## Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch

You can configure DHCP snooping, dynamic ARP inspection (DAI), and MAC limiting on the access interfaces of a switch to protect the switch and the Ethernet LAN against address spoofing and Layer 2 denial-of-service (DoS) attacks. To obtain the basic settings for these features, you can use the switch's default configuration for port security, configure the MAC limit, and enable DHCP snooping and DAI on a VLAN. You can configure these features when the DHCP server is connected to a switch that is different from the one to which the DHCP clients (network devices) are connected.

This example describes how to configure port security features on a switch whose hosts obtain IP addresses and lease times from a DHCP server connected to a second switch:

- [Requirements on page 466](#)
- [Overview and Topology on page 466](#)
- [Configuring a VLAN, Interfaces, and Port Security Features on Switch 1 on page 468](#)
- [Configuring a VLAN and Interfaces on Switch 2 on page 470](#)
- [Verification on page 471](#)

## Requirements

This example uses the following hardware and software components:

- One EX Series switch or QFX3500 switch—*Switch 1* in this example.
- An additional EX Series switch or QFX3500 switch—*Switch 2* in this example. You do not configure port security on this second switch.
- Junos OS Release 9.0 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series.
- A DHCP server connected to Switch 2. You use the server to provide IP addresses to network devices connected to Switch 1.
- At least two network devices (hosts) that you connect to access interfaces on Switch 1. These devices are DHCP clients.

Before you configure DHCP snooping, DAI, and MAC limiting port security features, be sure you have:

- Connected the DHCP server to Switch 2.
- Configured a VLAN on Switch 1. See the task for your platform:
  - *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches*
  - *Example: Setting Up Bridging with Multiple VLANs for the QFX Series*

## Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. To protect the devices from such attacks, you can configure:


- DHCP snooping to validate DHCP server messages
- DAI to protect against ARP spoofing
- MAC limiting to constrain the number of MAC addresses the switch adds to its MAC address cache

This example shows how to configure these port security features on Switch 1. Switch 1 is connected to another switch (Switch 2), which is not configured with port security features. Switch 2 is connected to a DHCP server (see [Figure 26 on page 467](#).) Network devices (hosts) that are connected to Switch 1 send requests for IP addresses (these network devices are DHCP clients). Those requests are transmitted from Switch 1 to Switch 2 and then to the DHCP server connected to Switch 2. Responses to the requests are transmitted along the reverse path of the one followed by the requests.

The setup for this example includes the VLAN **employee-vlan** on both switches.

[Figure 26 on page 467](#) shows the network topology for the example.

**Figure 26: Network Topology for Port Security Setup with Two Switches on the Same VLAN**

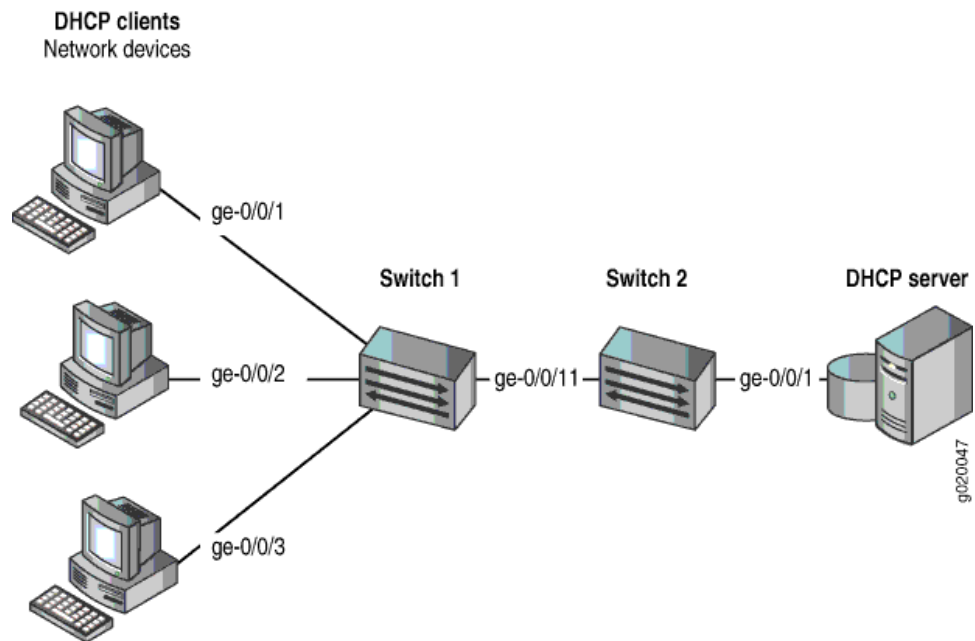

The components of the topology for this example are shown in [Table 26 on page 467](#).

**Table 26: Components of Port Security Setup on Switch 1 with a DHCP Server Connected to Switch 2**

| Properties                       | Settings                                                                                                               |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Switch hardware                  | One EX Series switch or one QFX3500 switch (Switch 1), and an additional EX Series switch or QFX3500 switch (Switch 2) |
| VLAN name and ID                 | <b>employee-vlan, tag 20</b>                                                                                           |
| VLAN subnets                     | <b>192.0.2.16/28</b><br><b>192.0.2.17 through 192.0.2.30</b><br><b>192.0.2.31 is subnet's broadcast address</b>        |
| Trunk interface on both switches | ge-0/0/11                                                                                                              |
| Access interfaces on Switch 1    | ge-0/0/1, ge-0/0/2, and ge-0/0/3                                                                                       |
| Access interface on Switch 2     | ge-0/0/1                                                                                                               |
| Interface for DHCP server        | ge-0/0/1 on Switch 2                                                                                                   |

Switch 1 is initially configured with the default port security setup. In the default configuration on the switch:

- Secure port access is activated on the switch.
- The switch does not drop any packets, which is the default setting.

- DHCP snooping and DAI are disabled on all VLANs.
- All access interfaces are untrusted and trunk interfaces are trusted; these are the default settings.

In the configuration tasks for this example, you configure a VLAN on both switches.

In addition to configuring the VLAN, you enable DHCP snooping on Switch 1. In this example, you also enable DAI and a MAC limit of 5 on Switch 1.

Because the interface that connects Switch 2 to Switch 1 is a trunk interface, you do not need to configure this interface to be trusted. As noted above, trunk interfaces are automatically trusted, so DHCP messages coming from the DHCP server to Switch 2 and then on to Switch 1 are trusted.

## Configuring a VLAN, Interfaces, and Port Security Features on Switch 1

**CLI Quick Configuration** To quickly configure a VLAN, interfaces, and port security features, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans employee-vlan vlan-id 20
set interfaces ge-0/0/11 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/0/1 unit 0 family ethernet-switching vlan members 20
set interfaces ge-0/0/2 unit 0 family ethernet-switching vlan members 20
set interfaces ge-0/0/3 unit 0 family ethernet-switching vlan members 20
set interfaces ge-0/0/11 unit 0 family ethernet-switching vlan members 20
set ethernet-switching-options secure-access-port interface ge-0/0/1 mac-limit 5 action drop
set ethernet-switching-options secure-access-port vlan employee-vlan arp-inspection
set ethernet-switching-options secure-access-port vlan employee-vlan examine-dhcp
clear ethernet-switching table interface ge-0/0/1
```

**Step-by-Step Procedure** To configure MAC limiting, a VLAN, and interfaces on Switch 1 and enable DAI and DHCP on the VLAN:

1. Configure the VLAN **employee-vlan** with VLAN ID 20:

```
[edit vlans]
user@switch1# set employee-vlan vlan-id 20
```

2. Configure an interface on Switch 1 as a trunk interface:

```
[edit interfaces]
user@switch1# set ge-0/0/11 unit 0 family ethernet-switching port-mode trunk
```

3. Associate the VLAN with interfaces ge-0/0/1, ge-0/0/2, ge-0/0/3, and ge-0/0/11:

```
[edit interfaces]
user@switch1# set ge-0/0/1 unit 0 family ethernet-switching vlan members 20
user@switch1# set ge-0/0/2 unit 0 family ethernet-switching vlan members 20
user@switch1# set ge-0/0/3 unit 0 family ethernet-switching vlan members 20
user@switch1# set ge-0/0/11 unit 0 family ethernet-switching vlan members 20
```

4. Enable DHCP snooping on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch1# set vlan employee-vlan examine-dhcp
```

5. Enable DAI on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch1# set vlan employee-vlan arp-inspection
```

6. Configure a MAC limit of 5 on ge-0/0/1 and use the default action, **drop** (packets with new addresses are dropped if the limit is exceeded):

```
[edit ethernet-switching-options secure-access-port]
user@switch1# set interface ge-0/0/1 mac-limit 5 drop
```

7. Clear the existing MAC address table entries from interface ge-0/0/1:

```
user@switch1# clear ethernet-switching table interface ge-0/0/1
```

**Results** Display the results of the configuration:

```
[edit]
user@switch1# show
ethernet-switching-options {
 secure-access-port {
 interface ge-0/0/1.0 {
 mac-limit 5 action drop;
 }
 vlan employee-vlan {
 arp-inspection;
 examine-dhcp;
 }
 }
}
interfaces {
 ge-0/0/1 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members 20;
 }
 }
 }
 }
 ge-0/0/2 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members 20;
 }
 }
 }
 }
 ge-0/0/3 {
 unit 0 {
```

```
 family ethernet-switching {
 vlan {
 port-mode trunk;
 members 20;
 }
 }
 }
}
ge-0/0/11 {
 unit 0 {
 family ethernet-switching {
 port-mode trunk;
 vlan {
 members 20;
 }
 }
 }
}
}
vpls {
 employee-vlan {
 vlan-id 20;
 }
}
}
```

## Configuring a VLAN and Interfaces on Switch 2

To configure the VLAN and interfaces on Switch 2:

**CLI Quick Configuration** To quickly configure the VLAN and interfaces on Switch 2, copy the following commands and paste them into the switch terminal window:

```
[edit]
set vpls employee-vlan vlan-id 20
set interfaces ge-0/0/11 unit 0 family ethernet-switching port-mode trunk
set interfaces ge-0/0/11 unit 0 family ethernet-switching vlan members 20
set interfaces ge-0/0/1 unit 0 family ethernet-switching vlan members 20
```

**Step-by-Step Procedure** To configure the VLAN and interfaces on Switch 2:

1. Configure the VLAN **employee-vlan** with VLAN ID 20:

```
[edit vpls]
user@switch1# set employee-vlan vlan-id 20
```

2. Configure an interface on Switch 2 as a trunk interface:

```
[edit interfaces]
user@switch2# set ge-0/0/11 unit 0 ethernet-switching port-mode trunk
```

3. Associate the VLAN with interfaces ge-0/0/1 and ge-0/0/11:

```
[edit interfaces]
user@switch2# set ge-0/0/1 unit 0 family ethernet-switching vlan members 20
```



```
user@switch2# set ge-0/0/11 unit 0 family ethernet-switching vlan members 20
```

**Results** Display the results of the configuration:

```
[edit]
user@switch2# show
interfaces {
 ge-0/0/1 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members 20;
 }
 }
 }
 }
 ge-0/0/11 {
 unit 0 {
 family ethernet-switching {
 port-mode trunk;
 vlan {
 members 20;
 }
 }
 }
 }
}
vlans {
 employee-vlan {
 vlan-id 20;
 }
}
```

## Verification

To confirm that the configuration is working properly.

- [Verifying That DHCP Snooping Is Working Correctly on Switch 1 on page 471](#)
- [Verifying That DAI Is Working Correctly on Switch 1 on page 472](#)
- [Verifying That MAC Limiting Is Working Correctly on Switch 1 on page 473](#)

### Verifying That DHCP Snooping Is Working Correctly on Switch 1

**Purpose** Verify that DHCP snooping is working on Switch 1.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

issue the operational mode command **show dhcp snooping binding** to display the DHCP snooping information when the interface through which Switch 2 sends the DHCP server replies to clients connected to Switch 1 is trusted. The server has provided the IP addresses and leases:

```
user@switch1> show dhcp snooping binding
DHCP Snooping Information:
MAC Address IP Address Lease Type VLAN Interface

00:05:85:3A:82:77 192.0.2.17 600 dynamic employee-vlan ge-0/0/1.0
00:05:85:3A:82:79 192.0.2.18 653 dynamic employee-vlan ge-0/0/1.0
00:05:85:3A:82:80 192.0.2.19 720 dynamic employee-vlan ge-0/0/1.0
00:05:85:3A:82:81 192.0.2.20 932 dynamic employee-vlan ge-0/0/1.0
00:05:85:3A:82:83 192.0.2.21 1230 dynamic employee-vlan ge-0/0/1.0
00:05:85:3A:82:90 192.0.2.20 932 dynamic employee-vlan ge-0/0/2.0
00:05:85:3A:82:91 192.0.2.21 1230 dynamic employee-vlan ge-0/0/3.0
```

**Meaning** The output shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires.

### Verifying That DAI Is Working Correctly on Switch 1

**Purpose** Verify that DAI is working on Switch 1.

**Action** Send some ARP requests from network devices connected to the switch.

Issue the operational mode command **show arp inspection statistics** to display the DAI information:

```
user@switch1> show arp inspection statistics
ARP inspection statistics:
Interface Packets received ARP inspection pass ARP inspection failed

ge-0/0/1.0 7 5 2
ge-0/0/2.0 10 10 0
ge-0/0/3.0 18 15 3
```

**Meaning** The output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

### Verifying That MAC Limiting Is Working Correctly on Switch 1

**Purpose** Verify that MAC limiting is working on Switch 1.

**Action** Issue the operational mode command **show ethernet-switching table** to display the MAC addresses that are learned when DHCP requests are sent from hosts on ge-0/0/1:

```
user@switch1> show ethernet-switching table
```

```
Ethernet-switching table: 6 entries, 5 learned
VLAN MAC address Type Age Interfaces
employee-vlan 00:05:85:3A:82:77 Learn 0 ge-0/0/1.0
employee-vlan 00:05:85:3A:82:79 Learn 0 ge-0/0/1.0
employee-vlan 00:05:85:3A:82:80 Learn 0 ge-0/0/1.0
employee-vlan 00:05:85:3A:82:81 Learn 0 ge-0/0/1.0
employee-vlan 00:05:85:3A:82:83 Learn 0 ge-0/0/1.0
employee-vlan * Flood - ge-0/0/1.0
```

**Meaning** The output shows that five MAC addresses have been learned for interface **ge-0/0/1**, which corresponds to the MAC limit of **5** set in the configuration. The last line of the output shows that a sixth MAC address request was dropped, as indicated by the asterisk (\*) in the **MAC address** column.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 289](#)
  - [Configuring Port Security \(CLI Procedure\) on page 284](#)
  - [Configuring Port Security \(J-Web Procedure\)](#)
  - [secure-access-port on page 964](#)
  - [secure-access-port](#)
  - [show arp inspection statistics on page 1108](#)
  - [show dhcp snooping binding on page 1154](#)
  - [show ethernet-switching table on page 1174](#)

### Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic

On EX Series switches you might need to use class of service (CoS) to protect packets from critical applications from being dropped during periods of network congestion and delay and you might also need the port security features of DHCP snooping and dynamic ARP inspection (DAI) on the same ports through which those critical packets are entering and leaving. You can combine the advantages of both these features by using CoS forwarding classes and queues to prioritize snooped and inspected packets. This type of configuration places the snooped and inspected packets in the desired egress queue, ensuring that the security procedure does not interfere with the transmittal of this

high-priority traffic. This is especially important for traffic that is sensitive to jitter and delay, such as voice traffic.

This example shows how to configure the switch to prioritize snooped and inspected packets in heavy network traffic.

- [Requirements on page 474](#)
- [Overview and Topology on page 474](#)
- [Configuration on page 475](#)
- [Verification on page 477](#)

## Requirements

This example uses the following hardware and software components:

- One EX Series switch
- Junos OS Release 11.2 or later for EX Series switches
- A DHCP server to provide IP addresses to network devices on the switch

Before you specify CoS forwarding classes for snooped and inspected packets, be sure you have:

- Connected the DHCP server to the switch.
- Configured the VLAN **VLAN200** on the switch. See *Configuring VLANs for EX Series Switches (CLI Procedure)*.
- Configured two interfaces, **ge-0/0/1** and **ge-0/0/8**, to belong to **VLAN200**.

## Overview and Topology

Ethernet LANs are vulnerable to address spoofing and DoS attacks on network devices. To protect the devices from such attacks, you can configure DHCP snooping to validate DHCP server messages and DAI to protect against MAC spoofing. If you have to deal with periods of heavy network congestion and you want to ensure that sensitive traffic is not disrupted, you can combine the port security features with CoS forwarding classes to prioritize the handling of the snooped and inspected security packets.

In the default switch configuration:


- Secure port access is activated on the switch.
- DHCP snooping and DAI are disabled on all VLANs.
- All access ports are untrusted and all trunk ports are trusted for DHCP snooping.

This example shows how to combine the DHCP snooping and DAI security features with prioritized forwarding of snooped and inspected packets.

The setup for this example includes the VLAN **VLAN200** on the switch.

[Figure 27 on page 475](#) illustrates the topology for this example.

*Figure 27: Network Topology for Using CoS Forwarding Classes to Prioritize Snooped and Inspected Packets*

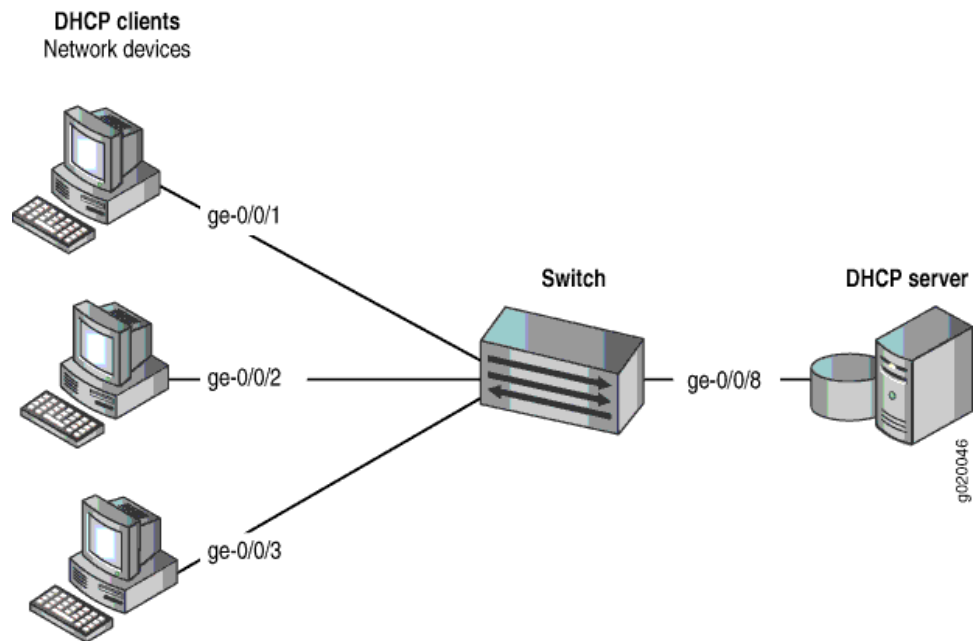

The components of the topology for this example are shown in [Table 27 on page 475](#).

*Table 27: Components of the Topology for Using CoS Forwarding Classes to Prioritize Snooped and Inspected Packets*

| Properties                | Settings                            |
|---------------------------|-------------------------------------|
| Switch hardware           | EX Series switch                    |
| VLAN name                 | VLAN200                             |
| Interfaces in VLAN200     | ge-0/0/1,ge-0/0/2,ge-0/0/3,ge-0/0/8 |
| Interface for DHCP server | ge-0/0/8                            |

In the configuration tasks for this example, you create a user-defined forwarding class **c1**, you enable DHCP snooping and DAI on VLAN200, and you assign the snooped and inspected packets to forwarding class **c1** and queue **6**. Queues 6 and 7 are reserved for high priority, control packets. The packets that are subjected to DHCP snooping and DAI are control (not data) packets; therefore, it is appropriate to place these snooped and inspected high-priority control packets in queue 6. (Queue 7 is higher priority than queue 6 and can also be used for this purpose.)

## Configuration

To configure DHCP snooping and DAI on VLAN200, and to prioritize the snooped and inspected packets:

**CLI Quick Configuration** To quickly configure DHCP snooping and DAI with prioritized forwarding of snooped and inspected packets, copy the following commands and paste them into the switch terminal window:

```
[edit]
set class-of-service forwarding-classes class c1 queue 6
set ethernet-switching-options security-access-port vlan VLAN200 examine-dhcp
forwarding-class c1
set ethernet-switching-options security-access-port vlan VLAN200 arp-inspection
forwarding-class c1
```

**Step-by-Step Procedure** Configure DHCP and DAI with prioritized forwarding of snooped and inspected packets:

1. Create a user-defined forwarding class to be used for prioritizing the snooped and inspected packets.

```
[edit class-of-service]
user@switch# set forwarding-classes class c1 queue 6
```

2. Enable DHCP snooping on the VLAN and apply forwarding class c1 to the snooped packets:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan VLAN200 examine-dhcp forwarding-class c1
```

3. Enable DAI on the VLAN and apply forwarding class c1 to the inspected packets:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan VLAN200 arp-inspection forwarding-class c1
```

---

## Results

Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
vlan VLAN200 {
 arp-inspection forwarding-class c1;
 examine-dhcp forwarding-class c1;
}
[edit class-of-service]
user@switch# show
}
forwarding-classes {
 class c1 queue-num 6;
}
```

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That Prioritized Forwarding Is Working Correctly on the Snooped Packets on page 477](#)
- [Verifying That Prioritized Forwarding Is Working Correctly on the DAI Inspected Packets on page 477](#)

### Verifying That Prioritized Forwarding Is Working Correctly on the Snooped Packets

**Purpose** Verify that prioritized forwarding is working on the DHCP snooped packets.

**Action** Send some DHCP requests from network devices to the switch. Display the output queue for one of the interfaces in VLAN200 to make sure that the packets are being transmitted in the designated queue:

```
user@switch> show interfaces ge 0/0/1 extensive
Egress queues: 8 supported, 5 in use
Queue counters: Queued packets Transmitted packets Dropped packets
0 best-effort 0 0 0
1 assured-forw 0 0 0
5 expedited-fo 0 0 0
6 c1 0 3209 0
7 network-cont 0 126371 0
```

**Meaning** The command output shows that packets have been transmitted on forwarding class **c1** queue 6.

Continue testing by changing the setting of **examine-dhcp forwarding-class** to use one of the default queues, such as **best-effort**, and repeat the **show interfaces** command to compare the difference in the output. You can tell that the setting is working correctly by seeing the difference in the number of transmitted packets reported for forwarding class **c1** queue 6.

### Verifying That Prioritized Forwarding Is Working Correctly on the DAI Inspected Packets

**Purpose** Verify that prioritized forwarding is working on the DAI inspected packets.

**Action** Send some ARP requests from network devices to the switch. Display the output queue for one of the interfaces in VLAN200 to make sure that the packets are being transmitted in the designated queue:

```
user@switch> show interfaces ge-0/0/1 extensive
Egress queues: 8 supported, 5 in use
Queue counters: Queued packets Transmitted packets Dropped packets
0 best-effort 0 0 0
1 assured-forw 0 0 0
```

|   |              |   |        |   |
|---|--------------|---|--------|---|
| 5 | expedited-fo | 0 | 0      | 0 |
| 6 | c1           | 0 | 3209   | 0 |
| 7 | network-cont | 0 | 126371 | 0 |

**Meaning** The command output shows that packets have been transmitted on forwarding class **c1** queue 6.

Continue testing by changing the setting of **arp-inspection forwarding-class** to use one of the default queues, such as best-effort, and repeat the **show interfaces** command to compare the difference in the output. You can tell that the setting is working correctly by seeing the difference in the number of transmitted packets reported for forwarding class **c1** queue 6.

**Related Documentation**

- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)

## Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces

---

Ethernet LAN switches are vulnerable to attacks that involve spoofing (forging) of source IP addresses or source MAC addresses. These spoofed packets are sent from hosts connected to untrusted access interfaces on the switch. You can enable the IP source guard port security feature on EX Series switches to mitigate the effects of such attacks. If IP source guard determines that a source IP address and a source MAC address in a binding in an incoming packet are not valid, the switch does not forward the packet.

You can use IP source guard in combination with other EX Series switch features to mitigate address-spoofing attacks on untrusted access interfaces. This example shows two configuration scenarios:

- [Requirements on page 478](#)
- [Overview and Topology on page 479](#)
- [Configuring IP Source Guard with 802.1X Authentication, DHCP Snooping, and Dynamic ARP Inspection on page 480](#)
- [Configuring IP Source Guard on a Guest VLAN on page 483](#)
- [Verification on page 486](#)

### Requirements

This example uses the following hardware and software components:

- An EX Series switch
- Junos OS Release 9.2 or later for EX Series switches
- A DHCP server to provide IP addresses to network devices on the switch
- A RADIUS server to provide 802.1X authentication



Before you configure IP source guard for the scenarios related in this example, be sure you have:

- Connected the DHCP server to the switch.
- Connected the RADIUS server to the switch and configured user authentication on the RADIUS server. See *Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch*.
- Configured VLANs on the switch. In this example, we have two VLANs, which are named **DATA** and **GUEST**. The **DATA** VLAN is configured with **vlan-id 300**. The **GUEST** VLAN (which functions as the guest VLAN) is configured with **vlan-id 100**. See *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches* for detailed information about configuring VLANs.

## Overview and Topology

IP source guard checks the IP source address and MAC source address in a packet sent from a host attached to an untrusted access interface on the switch. If IP source guard determines that the packet header contains an invalid source IP address or source MAC address, it ensures that the switch does not forward the packet—that is, the packet is discarded.

When you configure IP source guard, you enable it on one or more VLANs. IP source guard applies its checking rules to untrusted access interfaces on those VLANs. By default, on EX Series switches, access interfaces are untrusted and trunk interfaces are trusted. IP source guard does not check packets that have been sent to the switch by devices connected to either trunk interfaces or trusted access interfaces—that is, interfaces configured with **dhcp-trusted**. A DHCP server can be connected to a **dhcp-trusted** interface to provide dynamic IP addresses.

IP source guard obtains information about IP-addresses, MAC-addresses, or VLAN bindings from the DHCP snooping database, which enables the switch to validate incoming IP packets against the entries in that database.

The topology for this example includes an EX Series switch, which is connected to both a DHCP server and to a RADIUS server.



**NOTE:** The 802.1X user authentication applied in this example is for single-supplicant mode.

You can use IP source guard with 802.1X user authentication for single-secure supplicant or multiple supplicant mode. If you are implementing IP source guard with 802.1X authentication in single-secure supplicant or multiple supplicant mode, you must use the following configuration guidelines:

- If the 802.1X interface is part of an untagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has untagged membership.
- If the 802.1X interface is part of a tagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has tagged membership.

In the first configuration example, two clients (network devices) are connected to an access switch. You configure IP source guard and 802.1X user authentication, in combination with two access port security features: DHCP snooping and dynamic ARP inspection (DAI). This setup is designed to protect the switch from IP attacks such as *ping of death* attacks, DHCP starvation, and ARP spoofing.

In the second configuration example, the switch is configured for 802.1X user authentication. If the client fails authentication, the switch redirects the client to a guest VLAN that allows this client to access a set of restricted network features. You configure IP source guard on the guest VLAN to mitigate effects of source IP spoofing.



**TIP:** You can set the `ip-source-guard` flag in the `traceoptions` statement for debugging purposes.

## Configuring IP Source Guard with 802.1X Authentication, DHCP Snooping, and Dynamic ARP Inspection

### CLI Quick Configuration

To quickly configure IP source guard with 802.1X authentication and with other access port security features, copy the following commands and paste them into the switch terminal window:

```
[edit]
set ethernet-switching-options secure-access-port interface ge-0/0/24 dhcp-trusted
set ethernet-switching-options secure-access-port vlan DATA examine-dhcp
set ethernet-switching-options secure-access-port vlan DATA arp-inspection
set ethernet-switching-options secure-access-port vlan DATA ip-source-guard
set interfaces ge-0/0/0 unit 0 family ethernet-switching vlan members DATA
set interfaces ge-0/0/1 unit 0 family ethernet-switching vlan members DATA
set interfaces ge-0/0/24 unit 0 family ethernet-switching vlan members DATA
set protocols lldp-med interface ge-0/0/0.0
set protocols dot1x authenticator authentication-profile-name profile52
```

```

set protocols dot1x authenticator interface ge-0/0/0.0 supplicant single
set protocols lldp-med interface ge-0/0/1.0
set protocols dot1x authenticator interface ge-0/0/1.0 supplicant single

```

### Step-by-Step Procedure

To configure IP source guard with 802.1X authentication and various port security features:

1. Configure the interface on which the DHCP server is connected to the switch as a trusted interface and add that interface to the **DATA** VLAN:

```

[edit ethernet-switching-options]
user@switch# set secure-access-port interface ge-0/0/24 dhcp-trusted
user@switch# set set ge-0/0/24 unit 0 family ethernet-switching vlan members DATA

```

2. Associate two other access interfaces (untrusted) with the DATA VLAN:

```

[edit interfaces]
user@switch# set ge-0/0/0 unit 0 family ethernet-switching vlan members DATA
user@switch# set ge-0/0/1 unit 0 family ethernet-switching vlan members DATA

```

3. Configure 802.1X user authentication and LLDP-MED on the two interfaces that you associated with the DATA VLAN:

```

[edit protocols]
user@switch# set lldp-med interface ge-0/0/0.0
user@switch# set dot1x authenticator authentication-profile-name profile52
user@switch# set dot1x authenticator interface ge-0/0/0.0 supplicant single
user@switch# set lldp-med interface ge-0/0/1.0
user@switch# set dot1x authenticator interface ge-0/0/1.0 supplicant single

```

4. Configure three access port security features—DHCP snooping, dynamic ARP inspection (DAI), and IP source guard—on the **DATA** VLAN:

```

[edit ethernet-switching-options]
user@switch# set secure-access-port vlan DATA examine-dhcp
user@switch# set secure-access-port vlan DATA arp-inspection
user@switch# set secure-access-port vlan DATA ip-source-guard

```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options]
secure-access-port {
 interface ge-0/0/24.0 {
 dhcp-trusted;
 }
 vlan DATA {
 arp-inspection;
 examine-dhcp;
 ip-source-guard;
 }
}

[edit interfaces]
ge-0/0/0 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members DATA;
 }
 }
 }
}
ge-0/0/1 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members DATA;
 }
 }
 }
}
ge-0/0/24 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members DATA;
 }
 }
 }
}

[edit protocols]
lldp-med {
 interface ge-0/0/0.0;
 interface ge-0/0/1.0;
}
dot1x {
 authenticator {
 authentication-profile-name profile52;
 }
 interface {
 ge-0/0/0.0 {
 supplicant single;
 }
 }
}
```

```

 }
 ge-0/0/1.0 {
 supplicant single;
 }
}
}

```

## Configuring IP Source Guard on a Guest VLAN

**CLI Quick Configuration** To quickly configure IP source guard on a guest VLAN, copy the following commands and paste them into the switch terminal window:

```

[edit]
set ethernet-switching-options secure-access-port interface ge-0/0/24 dhcp-trusted
set interfaces ge-0/0/24 unit 0 family ethernet-switching vlan members GUEST
set ethernet-switching-options secure-access-port vlan GUEST examine-dhcp
set ethernet-switching-options secure-access-port vlan GUEST ip-source-guard
set ethernet-switching-options secure-access-port interface ge-0/0/0 static-ip 10.1.1.1 mac
00:11:11:11:11:11 vlan GUEST
set ethernet-switching-options secure-access-port interface ge-0/0/1 static-ip 10.1.1.2 mac
00:22:22:22:22:22 vlan GUEST
set interfaces ge-0/0/0 unit 0 family ethernet-switching port-mode access
set interfaces ge-0/0/1 unit 0 family ethernet-switching port-mode access
set protocols dot1x authenticator authentication-profile-name profile52
set protocols dot1x authenticator interface ge-0/0/0 supplicant single
set protocols dot1x authenticator interface ge-0/0/0 guest-vlan GUEST
set protocols dot1x authenticator interface ge-0/0/0 supplicant-timeout 2
set protocols dot1x authenticator interface ge-0/0/1 supplicant single
set protocols dot1x authenticator interface ge-0/0/1 guest-vlan GUEST
set protocols dot1x authenticator interface ge-0/0/1 supplicant-timeout 2

```

**Step-by-Step Procedure** To configure IP source guard on a guest VLAN:

1. Configure the interface on which the DHCP server is connected to the switch as a trusted interface and add that interface to the **GUEST** VLAN:

```

[edit ethernet-switching-options]
user@switch# set secure-access-port interface ge-0/0/24 dhcp-trusted
user@switch# set ge-0/0/24 unit 0 family ethernet-switching vlan members GUEST

```

2. Configure two interfaces for the access port mode:

```

[edit interfaces]
user@switch# set ge-0/0/0 unit 0 family ethernet-switching port-mode access
user@switch# set ge-0/0/1 unit 0 family ethernet-switching port-mode access

```

3. Configure DHCP snooping and IP source guard on the **GUEST** VLAN:

```

[edit ethernet-switching-options]
user@switch# set secure-access-port vlan GUEST examine-dhcp
user@switch# set secure-access-port vlan GUEST ip-source-guard

```

4. Configure a static IP address on each of two (untrusted) interfaces on the **GUEST** VLAN (optional):

```
[edit ethernet-switching-options]
user@switch# set secure-access-port interface ge-0/0/0 static-ip 10.1.1.1 mac 00:11:11:11:11:11
vlan GUEST
```

```
[edit ethernet-switching-options]
user@switch# set secure-access-port interface ge-0/0/1 static-ip 10.1.1.2 mac
00:22:22:22:22:22 vlan GUEST
```

5. Configure 802.1X user authentication:

```
[edit protocols]
user@switch# set dot1x authenticator authentication-profile-name profile52
user@switch# set dot1x authenticator interface ge-0/0/0 supplicant single
user@switch# set dot1x authenticator interface ge-0/0/1 supplicant single
user@switch# set dot1x authenticator interface ge-0/0/0 supplicant-timeout 2
user@switch# set dot1x authenticator interface ge-0/0/1 supplicant-timeout 2
```

**Results** Check the results of the configuration:

```
[edit protocols]
dot1x {
 authenticator {
 authentication-profile-name profile52;
 }
 interface {
 ge-0/0/0.0 {
 guest-vlan GUEST;
 supplicant single;
 supplicant-timeout 2;
 }
 ge-0/0/1.0 {
 guest-vlan GUEST;
 supplicant single;
 supplicant-timeout 2;
 }
 }
}

[edit vlans]
GUEST {
 vlan-id 100;
}

[edit interfaces]
ge-0/0/0 {
 unit 0 {
 family ethernet-switching {
 port-mode access;
 }
 }
}
ge-0/0/1 {
 unit 0 {
 family ethernet-switching {
 port-mode access;
 }
 }
}
ge-0/0/24 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members GUEST;
 }
 }
 }
}

[edit ethernet-switching-options]
secure-access-port {
 interface ge-0/0/0.0 {
```

```
 static-ip 10.1.1.1 vlan GUEST mac 00:11:11:11:11:11;
 }
 interface ge-0/0/1.0 {
 static-ip 10.1.1.2 vlan GUEST mac 00:22:22:22:22:22;
 }
 interface ge-0/0/24.0 {
 dhcp-trusted;
 }
 vlan GUEST {
 examine-dhcp;
 ip-source-guard;
 }
}
```

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That 802.1X User Authentication Is Working on the Interface on page 486](#)
- [Verifying the VLAN Association with the Interface on page 487](#)
- [Verifying That DHCP Snooping Is Working on the VLAN on page 487](#)
- [Verifying That IP Source Guard Is Working on the VLAN on page 488](#)

### Verifying That 802.1X User Authentication Is Working on the Interface

---

**Purpose** Verify that the 802.1X configuration is working on the interface.



**Action** user@switch> show dot1x interface ge-0/0/0.0 detail  
 ge-0/0/0.0  
 Role: Authenticator  
 Administrative state: Auto  
 Supplicant mode: Single  
 Number of retries: 2  
 Quiet period: 30 seconds  
 Transmit period: 15 seconds  
 Mac Radius: Disabled  
 Mac Radius Restrict: Disabled  
 Reauthentication: Enabled  
 Configured Reauthentication interval: 3600 seconds  
 Supplicant timeout: 2 seconds  
 Server timeout: 30 seconds  
 Maximum EAPOL requests: 1  
 Guest VLAN member: GUEST  
 Number of connected supplicants: 1  
 Supplicant: md5user01, 00:30:48:90:53:B7  
 Operational state: Authenticated  
 Backend Authentication state: Idle  
 Authentication method: Radius  
 Authenticated VLAN: DATA  
 Session Reauth interval: 3600 seconds  
 Reauthentication due in 3581 seconds

**Meaning** The **Supplicant mode** field displays the configured administrative mode for each interface. The **Guest VLAN member** field displays the VLAN to which a supplicant is connected when the supplicant is authenticated using a guest VLAN. The **Authenticated VLAN** field displays the VLAN to which the supplicant is connected.

### Verifying the VLAN Association with the Interface

**Purpose** Verify interface states and VLAN memberships.

**Action** user@switch> show ethernet-switching interfaces

| Interface  | State | VLAN members | Tag | Tagging  | Blocking  |
|------------|-------|--------------|-----|----------|-----------|
| ge-0/0/0.0 | up    | DATA         | 101 | untagged | unblocked |
| ge-0/0/1.0 | up    | DATA         | 101 | untagged | unblocked |
| ge-0/0/24  | up    | DATA         | 101 | untagged | unblocked |

**Meaning** The **VLAN members** field shows the associations between VLANs and interfaces. The **State** field shows whether the interfaces are up or down.

For the guest VLAN configuration, the interface is associated with the guest VLAN if and when the supplicant fails 802.1X user authentication.

### Verifying That DHCP Snooping Is Working on the VLAN

**Purpose** Verify that DHCP snooping is enabled and working on the VLAN. Send some DHCP requests from network devices (DHCP clients) connected to the switch.

**Action** user@switch> [show dhcp snooping binding](#)

DHCP Snooping Information:

| MAC address       | IP address | Lease (seconds) | Type    | VLAN | Interface   |
|-------------------|------------|-----------------|---------|------|-------------|
| 00:30:48:90:53:B7 | 192.0.2.1  | 86392           | dynamic | DATA | ge-0/0/24.0 |

**Meaning** When the interface on which the DHCP server connects to the switch has been set to **dhcp-trusted**, the output shows for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires. Static IP addresses have no assigned lease time. Statically configured entries never expire.

---

### Verifying That IP Source Guard Is Working on the VLAN

---

**Purpose** Verify that IP source guard is enabled and working on the VLAN.

**Action** user@switch> [show ip-source-guard](#)

IP source guard information:

| Interface  | Tag | IP Address | MAC Address       | VLAN |
|------------|-----|------------|-------------------|------|
| ge-0/0/0.0 | 0   | 192.0.2.2  | 00:30:48:90:63:B7 | DATA |
| ge-0/0/1.0 | 0   | 192.0.2.3  | 00:30:48:90:73:B7 | DATA |

**Meaning** The IP source guard database table contains the VLANs for which IP source guard is enabled, the untrusted access interfaces on those VLANs, the VLAN 802.1Q tag IDs if there are any, and the IP addresses and MAC addresses that are bound to one another. If a switch interface is associated with multiple VLANs and some of those VLANs have IP source guard enabled (or configured) while others do not have IP source guard enabled, the VLANs that do not have IP source guard enabled have a star (\*) in the **IP Address** and **MAC Address** fields.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 289](#)
  - [Example: Setting Up VoIP with 802.1X and LLDP-MED on an EX Series Switch](#)
  - [Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN on page 488](#)
  - [Configuring IP Source Guard \(CLI Procedure\) on page 617](#)

---

## Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN

---

Ethernet LAN switches are vulnerable to attacks that involve spoofing (forging) of source IP addresses or source MAC addresses. These spoofed packets are sent from hosts connected to untrusted access interfaces on the switch. You can enable the IP source guard port security feature on EX Series switches to mitigate the effects of such attacks. If IP source guard determines that a source IP address and a source MAC address in a binding in an incoming packet are not valid, the switch does not forward the packet.

If two VLANs share an interface, you can configure IP source guard on just one of the VLANs; in this example, you configure IP source guard on an untagged data VLAN but not on the tagged voice VLAN. You can use 802.1X user authentication to validate the device connections on the data VLAN.

This example describes how to configure IP source guard with 802.1X user authentication on a data VLAN, with a voice VLAN on the same interface:

- [Requirements on page 489](#)
- [Overview and Topology on page 489](#)
- [Configuration on page 490](#)
- [Verification on page 493](#)

## Requirements

This example uses the following hardware and software components:

- One EX Series switch
- Junos OS Release 9.2 or later for EX Series switches
- A DHCP server to provide IP addresses to network devices on the switch
- A RADIUS server to provide 802.1X authentication

Before you configure IP source guard for the data VLANs, be sure you have:

- Connected the DHCP server to the switch.
- Connected the RADIUS server to the switch and configured user authentication on the server. See *Example: Connecting a RADIUS Server for 802.1X to an EX Series Switch*.
- Configured the VLANs. See *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches* for detailed information about configuring VLANs.

## Overview and Topology

IP source guard checks the IP source address and MAC source address in a packet sent from a host attached to an untrusted access interface on the switch. If IP source guard determines that the packet header contains an invalid source IP address or source MAC address, it ensures that the switch does not forward the packet—that is, the packet is discarded.

When you configure IP source guard, you enable it on one or more VLANs. IP source guard applies its checking rules to untrusted access interfaces on those VLANs. By default, on EX Series switches, access interfaces are untrusted and trunk interfaces are trusted. IP source guard does not check packets that have been sent to the switch by devices connected to either trunk interfaces or trusted access interfaces—that is, interfaces configured with **dhcp-trusted** so that a DHCP server can be connected to that interface to provide dynamic IP addresses.

IP source guard obtains information about IP-address/MAC-address/VLAN bindings from the DHCP snooping database. It causes the switch to validate incoming IP packets against the entries in that database.

The topology for this example includes one EX-3200-24P switch, a PC and an IP phone connected on the same interface, a connection to a DHCP server, and a connection to a RADIUS server for user authentication.



**NOTE:** The 802.1X user authentication applied in this example is for single supplicants.

You can also use IP source guard with 802.1X user authentication for single-secure supplicant or multiple supplicant mode. If you are implementing IP source guard with 802.1X authentication in single-secure supplicant or multiple supplicant mode, you must use the following configuration guidelines:

- If the 802.1X interface is part of an untagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has untagged membership.
- If the 802.1X interface is part of a tagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has tagged membership.



**TIP:** You can set the `ip-source-guard` flag in the `traceoptions (Access Port Security)` statement for debugging purposes.

This example shows how to configure a static IP address to be added to the DHCP snooping database.

---

## Configuration

### CLI Quick Configuration

To quickly configure IP source guard on a data VLAN, copy the following commands and paste them into the switch terminal window:

```
set ethernet-switching-options voip interface ge-0/0/14.0 vlan voice
set ethernet-switching-options secure-access-port interface ge-0/0/24.0 dhcp-trusted
set ethernet-switching-options secure-access-port interface ge-0/0/14 static-ip 10.1.1.1 mac
00:11:11:11:11:11 vlan data
set ethernet-switching-options secure-access-port vlan data examine-dhcp
set ethernet-switching-options secure-access-port vlan data ip-source-guard
set interfaces ge-0/0/24 unit 0 family ethernet-switching vlan members data
set vlans voice vlan-id 100
set protocols lldp-med interface ge-0/0/14.0
set protocols dot1x authenticator authentication-profile-name profile52
set protocols dot1x authenticator interface ge-0/0/14.0 supplicant single
```

**Step-by-Step  
Procedure**

To configure IP source guard on the data VLAN:

1. Configure the VoIP interface:

```
[edit ethernet-switching-options]
user@switch# set voip interface ge-0/0/14.0 vlan voice
```

2. Configure the interface on which the DHCP server is connected to the switch as a trusted interface and add that interface to the data VLAN:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port interface ge-0/0/24.0 dhcp-trusted
[edit interfaces]
user@switch# set ge-0/0/24 unit 0 family ethernet-switching vlan members data
```

3. Configure a static IP address on an interface on the data VLAN (optional)

```
[edit ethernet-switching-options]
user@switch# set secure-access-port interface ge-0/0/14 static-ip 10.1.1.1 mac 00:11:11:11:11:11
vlan data
```

4. Configure DHCP snooping and IP source guard on the data VLAN:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port vlan data examine-dhcp
user@switch# set secure-access-port vlan data ip-source-guard
```

5. Configure 802.1X user authentication and LLDP-MED on the interface that is shared by the data VLAN and the voice VLAN:

```
[edit protocols]
user@switch# set lldp-med interface ge-0/0/14.0
user@switch# set dot1x authenticator authentication-profile-name profile52
user@switch# set dot1x authenticator interface ge-0/0/14.0 supplicant single
```

6. Set the VLAN ID for the voice VLAN:

```
[edit vlans]
user@switch# set voice vlan-id 100
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options]
user@switch# show
voip {
 interface ge-0/0/14.0 {
 vlan voice;
 }
}
secure-access-port {
 interface ge-0/0/14.0 {
 static-ip 10.1.1.1 vlan data mac 00:11:11:11:11:11;
 }
 interface ge-0/0/24.0 {
 dhcp-trusted;
 }
 vlan data {
 examine-dhcp;
 ip-source-guard;
 }
}

[edit interfaces]
ge-0/0/24 {
 unit 0 {
 family ethernet-switching {
 vlan {
 members data;
 }
 }
 }
}

[edit vlans]
voice {
 vlan-id 100;
}

[edit protocols]
lldp-med {
 interface ge-0/0/14.0;
}
dot1x {
 authenticator {
 authentication-profile-name profile52;
 interface {
 ge-0/0/14.0 {
 supplicant single;
 }
 }
 }
}
}
```

---

**TIP:** If you wanted to configure IP source guard on the voice VLAN as well as



on the data VLAN, you would configure DHCP snooping and IP source guard exactly as you did for the data VLAN. The configuration result for the voice VLAN under `secure-access-port` would look like this:

```
secure-access-port {
 vlan voice {
 examine-dhcp;
 ip-source-guard;
 }
}
```

---

## Verification

To confirm that the configuration is working properly, perform these tasks:

- [Verifying That 802.1X User Authentication Is Working on the Interface on page 493](#)
- [Verifying the VLAN Association with the Interface on page 494](#)
- [Verifying That DHCP Snooping and IP Source Guard Are Working on the Data VLAN on page 495](#)

### Verifying That 802.1X User Authentication Is Working on the Interface

**Purpose** Verify the 802.1X configuration on interface `ge-0/0/14`.

**Action** Verify the 802.1X configuration with the operational mode command **show dot1x interface**:

```
user@switch> show dot1x interface ge-0/0/14.0 detail
ge-0/0/14.0
 Role: Authenticator
 Administrative state: Auto
 Supplicant mode: Single
 Number of retries: 3
 Quiet period: 60 seconds
 Transmit period: 30 seconds
 Mac Radius: Disabled
 Mac Radius Restrict: Disabled
 Reauthentication: Enabled
 Configured Reauthentication interval: 3600 seconds
 Supplicant timeout: 30 seconds
 Server timeout: 30 seconds
 Maximum EAPOL requests: 2
 Guest VLAN member: <not configured>
 Number of connected supplicants: 1
 Supplicant: user101, 00:04:0f:fd:ac:fe
 Operational state: Authenticated
 Authentication method: Radius
 Authenticated VLAN: vo11
 Dynamic Filter: <not configured>
 Session Reauth interval: 60 seconds
 Reauthentication due in 50 seconds
```

**Meaning** The **Supplicant mode** output field displays the configured administrative mode for each interface. Interface **ge-0/0/14.0** displays **Single** supplicant mode.

---

### Verifying the VLAN Association with the Interface

---

**Purpose** Display the interface state and VLAN membership.



**Action** user@switch> show ethernet-switching interfaces  
Ethernet-switching table: 0 entries, 0 learned

```
user@switch> show ethernet-switching interfaces
Interface State VLAN members Blocking
ge-0/0/0.0 down default unblocked
ge-0/0/1.0 down employee unblocked
ge-0/0/2.0 down employee unblocked
ge-0/0/12.0 down default unblocked
ge-0/0/13.0 down default unblocked
ge-0/0/13.0 down vlan100 unblocked
ge-0/0/14.0 up voice unblocked
 data unblocked
ge-0/0/17.0 down employee unblocked
ge-0/0/23.0 down default unblocked
ge-0/0/24.0 down data unblocked
 employee unblocked
 vlan100 unblocked
 voice unblocked
```

**Meaning** The field **VLAN members** shows that the **ge-0/0/14.0** interface supports both the **data** VLAN and the **voice** VLAN. The **State** field shows that the interface is up.

### Verifying That DHCP Snooping and IP Source Guard Are Working on the Data VLAN

**Purpose** Verify that DHCP snooping and IP source guard are enabled and working on the data VLAN.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the interface on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

| MAC address       | IP address        | Lease (seconds) | Type    | VLAN     | Interface   |
|-------------------|-------------------|-----------------|---------|----------|-------------|
| 00:05:85:3A:82:77 | 192.0.2.17        | 600             | dynamic | employee | ge-0/0/1.0  |
| 00:05:85:3A:82:79 | 192.0.2.18        | 653             | dynamic | employee | ge-0/0/1.0  |
| 00:05:85:3A:82:80 | 192.0.2.19        | 720             | dynamic | employee | ge-0/0/2.0  |
| 00:05:85:3A:82:81 | 192.0.2.20        | 932             | dynamic | employee | ge-0/0/2.0  |
|                   |                   |                 |         |          |             |
|                   | 00:30:48:92:A5:9D | 10.10.10.7      | 720     | dynamic  |             |
| vlan100           | ge-0/0/13.0       |                 |         |          |             |
| 00:30:48:8D:01:3D | 10.10.10.9        | 720             | dynamic | data     | ge-0/0/14.0 |
| 00:30:48:8D:01:5D | 10.10.10.8        | 1230            | dynamic | voice    | ge-0/0/14.0 |
| 00:11:11:11:11:11 | 10.1.1.1          | –               | static  | data     | ge-0/0/14.0 |
| 00:05:85:27:32:88 | 192.0.2.22        | –               | static  | employee | ge-0/0/17.0 |
| 00:05:85:27:32:89 | 192.0.2.23        | –               | static  | employee | ge-0/0/17.0 |
| 00:05:85:27:32:90 | 192.0.2.27        | –               | static  | employee | ge-0/0/17.0 |

View the IP source guard information for the data VLAN.

```
user@switch> show ip-source-guard
```

IP source guard information:

| Interface   | Tag | IP Address | MAC Address       | VLAN    |
|-------------|-----|------------|-------------------|---------|
| ge-0/0/13.0 | 0   | 10.10.10.7 | 00:30:48:92:A5:9D | vlan100 |
| ge-0/0/14.0 | 0   | 10.10.10.9 | 00:30:48:8D:01:3D | data    |
| ge-0/0/14.0 | 0   | 10.1.1.1   | 00:11:11:11:11:11 | data    |
| ge-0/0/13.0 | 100 | *          | *                 | voice   |

**Meaning** When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see the preceding sample output for **show dhcp snooping binding**) shows, for each MAC address, the assigned IP address and lease time—that is, the time, in seconds, remaining before the lease expires. Static IP addresses have no assigned lease time. Statically configured entries never expire.

The IP source guard database table contains the VLANs enabled for IP source guard, the untrusted access interfaces on those VLANs, the VLAN 802.1Q tag IDs if there are any, and the IP addresses and MAC addresses that are bound to one another. If a switch interface is associated with multiple VLANs and some of those VLANs are enabled for IP source guard and others are not, the VLANs that are not enabled for IP source guard have a star (\*) in the **IP Address** and **MAC Address** fields. See the entry for the **voice** VLAN in the preceding sample output.

- Related Documentation**
- [Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces on page 478](#)
  - [Example: Configuring Basic Port Security Features on page 289](#)
  - [Example: Setting Up VoIP with 802.1X and LLDP-MED on an EX Series Switch](#)
  - [Configuring IP Source Guard \(CLI Procedure\) on page 617](#)

## Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

This example describes how to configure DHCP option 82 on a switch that is on the same VLAN with the DHCP clients but on a different VLAN from the DHCP server. In this example, the switch acts as a relay agent:

- [Requirements on page 497](#)
- [Overview and Topology on page 498](#)
- [Configuration on page 498](#)

### Requirements

This example uses the following hardware and software components:

- One EX4200-24P switch or one QFX3500 switch
- Junos OS Release 9.3 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure DHCP option 82 on the switch, be sure you have:

- Connected and configured the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If it is not configured for DHCP option 82, it does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configured the **employee** VLAN on the switch and associated the interfaces on which the clients connect to the switch with that VLAN. See the task for your platform:
  - [Configuring VLANs for EX Series Switches \(CLI Procedure\)](#)
  - [Configuring VLANs on Switches for the QFX Series](#)

- Configured the **corporate** VLAN for the DHCP server.
- Configured the switch as a BOOTP relay agent. See *DHCP/BOOTP Relay for Switches Overview*.
- Configured the routed VLAN interface (RVI) to allow the switch to relay packets to the server and receive packets from the server. See *Configuring Routed VLAN Interfaces on Switches (CLI Procedure)* or *Configuring IRB Interfaces on Switches* for the QFX Series.

## Overview and Topology

If DHCP option 82 is enabled on the switch, then when a network device—a DHCP client—that is connected to the switch on an untrusted interface sends a DHCP request, the switch inserts information about the client's network location into the packet header of that request. The switch then sends the request (in this setting, it relays the request) to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or other parameter for the client.

When option 82 is enabled on the switch, then this sequence of events occurs when a DHCP client sends a DHCP request:

1. The switch receives the request and inserts the option 82 information in the packet header.
2. The switch relays the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response back to the switch. It does not alter the option 82 information.
4. The switch strips the option 82 information from the response packet.
5. The switch forwards the response packet to the client.

In this example, you configure option 82 on the switch. The switch is configured as a BOOTP relay agent. The switch connects to the DHCP server through the routed VLAN interface (RVI) that you configured. The switch and clients are members of the **employee** VLAN. The DHCP server is a member of the **corporate** VLAN.

## Configuration

To configure DHCP option 82:

### CLI Quick Configuration

To quickly configure DHCP option 82, copy the following commands and paste them into the switch terminal window:

```
set forwarding-options helpers bootp dhcp-option82
set forwarding-options helpers bootp dhcp-option82 circuit-id prefix hostname
set forwarding-options helpers bootp dhcp-option82 circuit-id use-vlan-id
set forwarding-options helpers bootp dhcp-option82 remote-id
set forwarding-options helpers bootp dhcp-option82 remote-id prefix mac
set forwarding-options helpers bootp dhcp-option82 remote-id use-string employee-switch1
```

```
set forwarding-options helpers bootp dhcp-option82 vendor-id
```

### Step-by-Step Procedure

To configure DHCP option 82:

1. Specify DHCP option 82 for the **employee** VLAN:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82
```

2. Configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id prefix hostname
```

3. Specify that the circuit ID suboption value contains the VLAN ID rather than the VLAN name (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id use-vlan-id
```

4. Specify that the remote ID suboption be included in the DHCP option 82 information:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id
```

5. Configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id prefix mac
```

6. Specify that the remote ID suboption value contains a character string (here, the string is **employee-switch1**):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id use-string employee-switch1
```

7. Configure a vendor ID suboption value, and use the default value. To use the default value, do not type a character string after the **vendor-id** option keyword:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 vendor-id
```

**Results** Check the results of the configuration:

```
[edit forwarding-options helpers bootp]
user@switch# show
dhcp-option82 {
 circuit-id {
 prefix hostname;
 use-vlan-id;
 }
}
```

```
remote-id {
 prefix mac;
 use-string employee-switch1;
}
vendor-id;
}
```

**Related  
Documentation**

- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500](#)
- [Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 508](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

---

## Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server

---

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

This example describes how to configure DHCP option 82 on a switch with DHCP clients, DHCP server, and switch all on the same VLAN:

- [Requirements on page 500](#)
- [Overview and Topology on page 501](#)
- [Configuration on page 502](#)

## Requirements

This example uses the following hardware and software components:

- One EX Series or QFX Series switch
- Junos OS Release 9.3 or later for EX Series switches or Junos OS Release 12.1 or later for the QFX Series
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure DHCP option 82 on the switch, be sure you have:

- Connected and configured the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If it is not configured for DHCP option 82, it does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

---

- Configured the **employee** VLAN on the switch and associated the interfaces on which the clients and the server connect to the switch with that VLAN. See the task for your platform:
  - *Configuring VLANs for EX Series Switches (CLI Procedure)*
  - *Configuring VLANs on Switches for the QFX Series*

## Overview and Topology

If DHCP option 82 is enabled on the switch, then when a network device—a DHCP client—that is connected to the switch on an untrusted interface sends a DHCP request, the switch inserts information about the client's network location into the packet header of that request. The switch then sends the request to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or other parameter for the client.


DHCP option 82 is enabled on an individual VLAN or on all VLANs on the switch.

When option 82 is enabled on the switch, then this sequence of events occurs when a DHCP client sends a DHCP request:

1. The switch receives the request and inserts the option 82 information in the packet header.
2. The switch forwards the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response back to the switch. It does not alter the option 82 information.
4. The switch strips the option 82 information from the response packet.
5. The switch forwards the response packet to the client.

[Figure 28 on page 502](#) illustrates the topology for this example.

*Figure 28: Network Topology for Configuring DHCP Option 82 on a Switch That Is on the Same VLAN as the DHCP Clients and the DHCP Server*

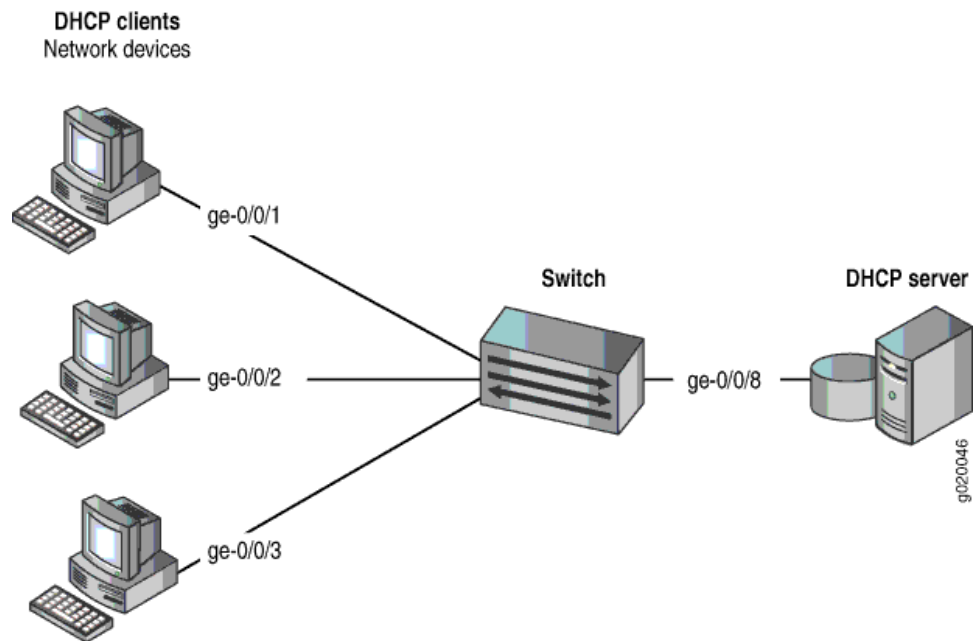

In this example, you configure DHCP option 82 on the switch. The switch connects to the DHCP server on interface **ge-0/0/8**. The DHCP clients connect to the switch on interfaces **ge-0/0/1**, **ge-0/0/2**, and **ge-0/0/3**. The switch, server, and clients are all members of the **employee** VLAN.

## Configuration

### CLI Quick Configuration

To quickly configure DHCP option 82, copy the following commands and paste them into the switch terminal window:

```
set ethernet-switching-options secure-access-port vlan employee dhcp-option82
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 circuit-id prefix
hostname
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 circuit-id
use-vlan-id
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 remote-id
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 remote-id
prefix mac
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 remote-id
use-string employee-switch1
set ethernet-switching-options secure-access-port vlan employee dhcp-option82 vendor-id
```



**Step-by-Step Procedure**

To configure DHCP option 82:

1. Specify DHCP option 82 for the **employee** VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82
```

2. Configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id prefix hostname
```

3. Specify that the circuit ID suboption value contains the VLAN ID rather than the VLAN name (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id use-vlan-id
```

4. Specify that the remote ID suboption be included in the DHCP option 82 information:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id
```

5. Configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id prefix mac
```

6. Specify that the remote ID suboption value contain a character string (here, the string is **employee-switch1**):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id use-string employee-switch1
```

7. Configure a vendor ID suboption value, and use the default value. To use the default value, do not type a character string after the **vendor-id** option keyword:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 vendor-id
```

**Results** Check the results of the configuration:

```
[edit ethernet-switching-options secure-access-port]
user@switch# show
vlan employee {
 dhcp-option82 {
 circuit-id {
 prefix hostname;
 use-vlan-id;
 }
 remote-id {
 prefix mac;
 }
 }
}
```

```
 use-string employee-switch1;
 }
 vendor-id;
}
}
```

**Related  
Documentation**

- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 528](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.
- [secure-access-port on page 964](#)
- *secure-access-port*

---

## Enabling DHCP Snooping (CLI Procedure)

---

DHCP snooping enables the switch to monitor and control DHCP messages received from untrusted devices connected to the switch. The switch builds and maintains a database of valid bindings between IP address and MAC addresses (IP-MAC bindings) called the DHCP snooping database.



**NOTE:** If you configure DHCP snooping for all VLANs and you enable a different port security feature on a specific VLAN, you must also explicitly enable DHCP snooping on that VLAN. Otherwise, the default value of no DHCP snooping applies to that VLAN.

This topic describes:

- [Enabling DHCP Snooping on page 505](#)
- [Applying CoS Forwarding Classes to Prioritize Snooped Packets on page 505](#)

## Enabling DHCP Snooping

You configure DHCP snooping per VLAN, not per interface (port). By default, DHCP snooping is disabled for all VLANs. You can enable DHCP snooping on all VLANs or on specific VLANs.

To enable DHCP snooping:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan vlan-name examine-dhcp
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan all examine-dhcp
```

To enable DHCPv6 snooping:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan vlan-name examine-dhcpv6
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan all examine-dhcpv6
```



**TIP:** By default, the IP-MAC bindings are lost when the switch is rebooted and DHCP clients (the network devices, or hosts) must reacquire bindings. However, you can configure the bindings to persist by setting the switch to store the database file either locally or remotely. See [“Making IP-MAC Bindings in the DHCP Snooping Database Persistent \(CLI Procedure\)”](#) on page 511.



**TIP:** For private VLANs (PVLANS), enable DHCP snooping on the primary VLAN. If you enable DHCP snooping only on a community VLAN, DHCP messages coming from PVLAN trunk ports are not snooped.

## Applying CoS Forwarding Classes to Prioritize Snooped Packets

On EX Series switches you might need to use class of service (CoS) to protect packets from critical applications from being dropped during periods of network congestion and delay, and might also need to configure the port security features of DHCP snooping on the ports through which those packets enter or leave.



**NOTE:** Prioritizing snooped packets by using CoS forwarding classes is not supported on the QFX Series switch.

To apply CoS forwarding classes and queues to snooped packets:

1. Create a user-defined forwarding class to be used for prioritizing snooped packets:

```
[edit class-of-service]
user@switch# set forwarding-classes class class-name queue-num queue-number
```

2. Enable DHCP snooping on a specific VLAN or on all VLANs and apply the required forwarding class on the snooped packets:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan vlan-name examine-dhcp forwarding-class class-name
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan all examine-dhcp forwarding-class class-name
```



**NOTE:** Replace `examine-dhcp` with `examine-dhcpv6` to enable DHCPv6 snooping.

#### Related Documentation

- [Enabling DHCP Snooping \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473](#)
- [Verifying That DHCP Snooping Is Working Correctly on page 297](#)
- [Monitoring Port Security on page 280](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

- *class-of-service*
- [secure-access-port on page 964](#)
- *secure-access-port*

## Setting the none Action on an Interface to Override a MAC Limit Applied to All Interfaces (CLI Procedure)

---

If you set a MAC limit in your port security settings to apply to all interfaces on the EX Series switch, you can override that setting for a particular interface by specifying action **none**.

To use the **none** action to override a MAC limit setting:

1. Set the MAC limit—for example, a limit of **5** with action **drop**:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface all mac-limit (Access Port Security) 5 action drop
```

2. Then change the action for one interface (here, **ge-0/0/2**) with this command. You don't need to specify a limit value.

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface ge-0/0/2 mac-limit action none
```

### Related Documentation

- [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Verifying That MAC Limiting Is Working Correctly on page 300](#)

## Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure)

---

You can use DHCP option 82, also known as the DHCP relay agent information option, to help switches against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

You can configure the DHCP option 82 feature in two topologies:

- The switch functions as a relay agent when the DHCP clients or the DHCP server is connected to the switch through a Layer 3 interface. On the switch, these interfaces are configured as routed VLAN interfaces, or RVIs. The switch relays the clients' requests to the server and then forwards the server's replies to the clients. This topic describes this configuration. The configuration for this topology is the same regardless of whether your switch is running Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style or not.
- The switch, DHCP clients, and DHCP server are all on the same VLAN. The switch forwards the clients' requests to the server and forwards the server's replies to the clients. This configuration for this topology differs if your switch is running Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style.
  - If your switch is running Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style, see [“Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\)”](#) on page 313.
  - If your switch is running Junos OS for EX Series switches without support for ELS, see [“Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\)”](#) on page 528.

Before you configure DHCP option 82 on the switch, perform these tasks:

- Connect and configure the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If the server is not configured for DHCP option 82, the server does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configure the VLAN on the switch and associate the interfaces on which the clients connect to the switch with that VLAN.

- Configure the routed VLAN interface (RVI) to allow the switch to relay packets to the server and receive packets from the server. See *Configuring Routed VLAN Interfaces on Switches (CLI Procedure)* or *Configuring IRB Interfaces on Switches* for the QFX Series.
- Configure the switch as a BOOTP relay agent. See *DHCP/BOOTP Relay for Switches Overview*.

To configure DHCP option 82:



**NOTE:** Replace values displayed in italics with values for your configuration.

1. Specify DHCP option 82 for the BOOTP server:

- On all interfaces that connect to the server:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82
```

- On a specific interface that connects to the server:

```
[edit forwarding-options helpers bootp]
user@switch# set interface ge-0/0/10 dhcp-option82
```

The remaining steps are optional. They show configurations for all interfaces; include the specific interface designation to configure any of the following options on a specific interface:

2. To configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id prefix hostname
```

3. To specify that the circuit ID suboption value should contain the interface description rather than the interface name (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id use-interface-description
```



**NOTE:** When you use the interface description rather than the interface name, the interface description has to be specified under interface unit ("set interfaces ge-0/0/0 unit 0 description "client"). If you do not do this, then the interface name is used.

4. To specify that the circuit ID suboption value should contain the VLAN ID rather than the VLAN name (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 circuit-id use-vlan-id
```

5. To specify that the remote ID suboption be included in the DHCP option 82 information:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id
```

6. To configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id prefix mac
```

7. To specify that the prefix for the remote ID suboption be the hostname of the switch rather than the MAC address of the switch (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id prefix hostname
```

8. To specify that the remote ID suboption value should contain the interface description:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id use-interface-description
```

9. To specify that the remote ID suboption value should contain a character string:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 remote-id use-string mystring
```

10. To configure a vendor ID suboption and use the default value (the default value is **Juniper**), do not type a character string after the **vendor-id** option keyword:

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 vendor-id
```

11. To specify that the vendor ID suboption value contains a character string value that you specify rather than **Juniper** (the default):

```
[edit forwarding-options helpers bootp]
user@switch# set dhcp-option82 vendor-id mystring
```

To view results of the configuration steps before committing the configuration, type the **show** command at the user prompt.

To commit these changes to the active configuration, type the **commit** command at the user prompt.

#### Related Documentation

- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497](#)
- [Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524](#)
- [Understanding DHCP Option 82 for Port Security on page 310](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.



## Making IP-MAC Bindings in the DHCP Snooping Database Persistent (CLI Procedure)

By default, IP-MAC bindings in the DHCP snooping database do not persist through switch reboots. You can configure the IP-MAC bindings in the DHCP snooping database to persist through switch reboots by configuring a storage location for the DHCP snooping database file. When specifying the location for the DHCP snooping database, you must also specify how frequently the switch writes the database entries into the DHCP snooping database file.

The DHCP snooping database of IP-MAC bindings is created when you enable DHCP snooping. DHCP snooping is not enabled by default. You can configure DHCP snooping on a specific VLAN or on all VLANs. See [“Enabling DHCP Snooping \(CLI Procedure\)” on page 504](#).

To configure a local storage location for the DHCP snooping database file:

- For DHCPv4 snooping:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port dhcp-snooping-file location local-pathname write-interval
seconds
```

For example:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port dhcp-snooping-file location /var/tmp/test.log
write-interval 60
```

- For DHCPv6 snooping:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port dhcpv6-snooping-file location local-pathname
write-interval seconds
```

For example:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port dhcpv6-snooping-file location /var/tmp/test.log
write-interval 60
```

To configure a remote storage location for IP-MAC bindings, use `tftp://ip-address` or `ftp://hostname/path` as the remote URL or the local pathname for the storage location of the DHCP or DHCPv6 snooping database file:

- For DHCPv4 snooping:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port dhcp-snooping-file location remote_url write-interval
seconds
```

For example:

```
[edit ethernet-switching-options]
```

```
user@switch# set secure-access-port dhcp-snooping-file location ftp://test:Test123@14.1.2.1
write-interval 60
```

- For DHCPv6 snooping:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port dhcpv6-snooping-file location remote_url write-interval
seconds
```

For example:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port dhcpv6-snooping-file location ftp://test:Test123@14.1.2.1
write-interval 60
```



**NOTE:** If you save the DHCP or DHCPv6 snooping file to a remote server using TFTP, then the CLI returns a message that the save process is initiated. The CLI remains accessible during the save process; however, if you attempt to save a file while the previous save is still pending, the CLI returns an error message.



**NOTE:** Specify any requisite user credentials for the FTP server before you specify the IP address or hostname. In this example, **test** is the username and **Test123** is the password for FTP server 14.1.2.1.

When you are storing the DHCP snooping database at a remote location, you might also want to specify a timeout value for remote read and write operations. See [timeout](#). This configuration is optional.

Release History Table

| Release     | Description                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| 14.1X53-D40 | If you save the DHCP or DHCPv6 snooping file to a remote server using TFTP, then the CLI returns a message that the save process is initiated. |

**Related  
Documentation**

- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices](#) on page 273

## Verifying That IP Source Guard Is Working Correctly

**Purpose** Verify that IP source guard is enabled and is mitigating the effects of any source IP spoofing attacks on the EX Series switch.

**Action** Display the IP source guard database.

```
user@switch> show ip-source-guard
```

```

IP source guard information:
Interface Tag IP Address MAC Address VLAN
ge-0/0/12.0 0 10.10.10.7 00:30:48:92:A5:9D vlan100
ge-0/0/13.0 0 10.10.10.9 00:30:48:8D:01:3D vlan100
ge-0/0/13.0 100 * * voice

```

**Meaning** The IP source guard database table contains the VLANs enabled for IP source guard, the untrusted access interfaces on those VLANs, the VLAN 802.1Q tag IDs if there are any, and the IP addresses and MAC addresses that are bound to one another. If a switch interface is associated with multiple VLANs and some of those VLANs are enabled for IP source guard and others are not, the VLANs that are not enabled for IP source guard have a star (\*) in the **IP Address** and **MAC Address** fields. See the entry for the **voice** VLAN in the preceding sample output.

**Related Documentation** • [Configuring IP Source Guard \(CLI Procedure\) on page 617](#)

## Verifying That Persistent MAC Learning Is Working Correctly

**Purpose** Verify that persistent MAC learning, also known as sticky MAC, is working on the interface. Persistent MAC learning allows retention of dynamically learned MAC addresses on an interface across restarts of the switch (or if the interface goes down).

**Action** Display the MAC addresses that have been learned. The following sample output shows the results when persistent MAC learning is enabled on interface ge-0/0/42:

**show ethernet-switching table persistent-mac**

```

user@switch> show ethernet-switching table
Ethernet-switching table: 8 entries, 2 learned, 5 persistent entries
VLAN MAC address Type Age Interfaces
default * Flood - All-members
default 00:10:94:00:00:02 Persistent 0 ge-0/0/42.0
default 00:10:94:00:00:03 Persistent 0 ge-0/0/42.0
default 00:10:94:00:00:04 Persistent 0 ge-0/0/42.0
default 00:10:94:00:00:05 Persistent 0 ge-0/0/42.0
default 00:10:94:00:00:06 Persistent 0 ge-0/0/42.0
default 00:21:59:c8:0c:50 Learn 0 ae0.0
default 02:21:59:c8:0c:44 Learn 0 ae0.0

```

**Meaning** The sample output shows that learned MAC addresses are stored in the Ethernet switching table as persistent entries. If the switch is rebooted or the interface goes down and comes back up, these addresses will be restored to the table.

**Related Documentation** • [Configuring Port Security \(CLI Procedure\) on page 284](#)

- [Example: Configuring Basic Port Security Features on page 289](#)

## CHAPTER 20

# Configuring DHCP Snooping to Filter DHCP Messages from Untrusted Hosts

- [Understanding DHCP Snooping for Port Security on page 516](#)
- [Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 528](#)
- [Enabling DHCPv6 Options by Using a Lightweight DHCPv6 Relay Agent \(LDRA\) \(CLI Procedure\) on page 531](#)
- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 533](#)
- [Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance \(CLI Procedure\) on page 533](#)

## Understanding DHCP Snooping for Port Security

---



**NOTE:** This topic includes information about enabling Dynamic Host Configuration Protocol (DHCP) snooping when using Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs Junos OS software that does not support ELS, see [“Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices” on page 273](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

DHCP snooping enables the switching device, which can be either a switch or a router, to monitor DHCP messages received from untrusted devices connected to the switching device. When DHCP snooping is enabled on a VLAN, the system examines DHCP messages sent from untrusted hosts associated with the VLAN and extracts their IP addresses and lease information. This information is used to build and maintain the DHCP snooping database. Only hosts that can be verified using this database are allowed access to the network.

- [DHCP Snooping Basics on page 516](#)
- [Enabling DHCP Snooping on page 517](#)
- [DHCP Snooping Process on page 518](#)
- [DHCPv6 Snooping on page 519](#)
- [Rapid Commit for DHCPv6 on page 519](#)
- [DHCP Server Access on page 520](#)
- [Static IP Address Additions to the DHCP Snooping Database on page 523](#)

### DHCP Snooping Basics

DHCP allocates IP addresses dynamically, *leasing* addresses to devices so that the addresses can be reused when they are no longer needed by the devices to which they were assigned. Hosts and end devices that require IP addresses obtained through DHCP must communicate with a DHCP server across the LAN.

DHCP snooping acts as a guardian of network security by keeping track of valid IP addresses assigned to downstream network devices by a trusted DHCP server (the server is connected to a trusted network port).

By default, all trunk ports on the switch are trusted and all access ports are untrusted for DHCP snooping.

When DHCP snooping is enabled, the lease information from the server is used to create the DHCP snooping table, also known as the DHCP binding table. The table shows current IP-MAC address bindings, as well as lease time, type of binding, names of associated VLANs and interfaces.

Entries in the DHCP snooping table are updated in the following events:

- When a network device releases an IP address (sends a DHCPRELEASE message). In this event, the associated mapping entry is deleted from the database.
- When you move a network device from one VLAN to another. In this event, typically the device needs to acquire a new IP address. Therefore, its entry in the database, including the VLAN name, is updated.
- When the lease time (timeout value) assigned by the DHCP server expires. In this event, the associated entry is deleted from the database.
- When the network device renews its lease by sending a unicast DHCPREQUEST message and receiving a positive response from the DHCP server. In this event, the lease time is updated in the database.
- If the network device cannot reach the DHCP server that originally granted the lease, it sends a broadcast DHCPREQUEST message and rebinds to the DHCP server that responds. In this event, the client receives a new IP address and the binding is updated in the DHCP snooping table.
- Starting in Junos OS Release 14.1X53-D35, a network device with a fixed IP allocation from the DHCP server is replaced by a new device with a different MAC address. If a network device with a fixed IP allocation from the DHCP server is replaced by a new device with a different MAC address. In this event, the new IP-MAC address binding is stored until the server sends a DHCPACK message, and then the entry in the DHCP snooping table is updated with the new address binding.



**TIP:** By default, the IP-MAC bindings are lost when the switch is rebooted, and the DHCP clients (the network devices, or hosts) must reacquire bindings. However, you can configure the bindings to persist by setting the `dhcp-snooping-file` statement to store the database file either locally or remotely.

You can configure the switch to snoop DHCP server responses only from specific VLANs. Doing this prevents spoofing of DHCP server messages.

## Enabling DHCP Snooping

DHCP snooping is not enabled in the default switch configuration. DHCP snooping is enabled automatically by Junos OS when you configure any port security features at the `[edit vlans vlan-name forwarding-options dhcp-security]` hierarchy level. Starting in Junos OS Release 17.1R1, you can configure DHCP snooping or DHCPv6 snooping on a VLAN without enabling other port security features by configuring the `dhcp-security` CLI statement at the `[edit vlans vlan-name forwarding-options dhcp-security]`. You enable DHCP snooping per VLAN, not per interface (port). For additional information about enabling DHCP snooping, see [“Configuring Port Security Features” on page 287](#).



**NOTE:** To disable DHCP snooping, you must delete the `dhcp-security` statement from the configuration. DHCP snooping is not disabled automatically when you disable other port security features.

## DHCP Snooping Process

The DHCP snooping process consists of the following steps:



**NOTE:** When DHCP snooping is enabled for a VLAN, all DHCP packets sent from network devices in that VLAN are subjected to DHCP snooping. The final IP-MAC binding occurs when the DHCP server sends a DHCPACK packet to the DHCP client.

1. The network device sends a DHCPDISCOVER packet to request an IP address.
2. The switch forwards the packet to the DHCP server.
3. The server sends a DHCPOFFER packet to offer an address. If the DHCPOFFER packet is from a trusted interface, the switch forwards the packet to the network device.
4. The network device sends a DHCPREQUEST packet to accept the IP address. The switch adds an IP-MAC placeholder binding to the DHCP snooping table. The entry is considered a placeholder until a DHCPACK packet is received from the server. Until then, the IP address could still be assigned to some other host.
5. The server sends a DHCPACK packet to assign the IP address or a DHCPNAK packet to deny the address request.
6. The switch updates the DHCP database according to the type of packet received:
  - If the switch receives a DHCPACK packet, it updates lease information for the IP-MAC address bindings in its database.
  - If the switch receives a DHCPNACK packet, it deletes the placeholder.



**NOTE:** The DHCP database is updated only after the DHCPREQUEST packet is sent.

For general information about the messages that the DHCP client and DHCP server exchange during the assignment of an IP address for the client, see the [Junos OS System Basics Configuration Guide](#).



## DHCPv6 Snooping

Starting in Junos OS Release 14.1X53-D10, DHCP snooping is supported for IPv6 packets on EX 9200 Switches. DHCP snooping is also supported for IPv6 packets. The process for DHCPv6 snooping is similar to that for DHCP snooping, but uses different names for the messages exchanged between the client and server to assign IPv6 addresses.

[Table 10 on page 275](#) shows DHCPv6 messages and their DHCPv4 equivalents.

**Table 28: DHCPv6 Messages and DHCPv4 Equivalent Messages**

| Sent by | DHCPv6 Messages         | DHCPv4 Equivalent Messages |
|---------|-------------------------|----------------------------|
| Client  | SOLICIT                 | DHCPDISCOVER               |
| Server  | ADVERTISE               | DHCPOFFER                  |
| Client  | REQUEST, RENEW, REBIND  | DHCPREQUEST                |
| Server  | REPLY                   | DHCPACK/DHCPNAK            |
| Client  | RELEASE                 | DHCPRELEASE                |
| Client  | INFORMATION-REQUEST     | DHCPINFORM                 |
| Client  | DECLINE                 | DHCPDECLINE                |
| Client  | CONFIRM                 | none                       |
| Server  | RECONFIGURE             | DHCPFORCERENEW             |
| Client  | RELAY-FORW, RELAY-REPLY | none                       |

## Rapid Commit for DHCPv6

The DHCPv6 Rapid Commit option can shorten the exchange of messages between the client and server. When supported by the server and set by the client, this option shortens the exchange from a four-way relay to a two-message handshake. For more information about enabling the Rapid Commit option, see [“Enabling DHCPv6 Rapid Commit Support” on page 315](#).

When the Rapid Commit option is enabled, the exchange of messages is as follows:

1. The DHCPv6 client sends out a SOLICIT message that contains a request that rapid assignment of address, prefix, and other configuration parameters be preferred.
2. If the DHCPv6 server supports rapid assignment, it responds with a REPLY message, which contains the assigned IPv6 address and prefix and other configuration parameters.

## DHCP Server Access

A switch's access to the DHCP server can be configured in three ways:

- [Switch, DHCP Clients, and the DHCP Server Are All on the Same VLAN on page 520](#)
- [Switch Acts as the DHCP Server on page 521](#)
- [Switch Acts as a Relay Agent on page 522](#)

---

### Switch, DHCP Clients, and the DHCP Server Are All on the Same VLAN

When the switch, DHCP clients, and DHCP server are *all members of the same VLAN*, the DHCP server can be connected to the switch in one of two ways:



**NOTE:** To enable DHCP snooping on the VLAN, configure the [dhcp-security](#) statement at the [edit vlans *vlan-name* forwarding-options] hierarchy.

---

- (See [Figure 13 on page 277](#).) The server is directly connected to the same switch as the one connected to the DHCP clients (the hosts, or network devices, that are requesting IP addresses from the server). The VLAN is enabled for DHCP snooping to protect the untrusted access ports. The trunk port is configured by default as a trusted port.
- (See [Figure 14 on page 277](#).) The server is connected to an intermediary switch (Switch 2) that is connected through a trunk port to the switch (Switch 1) that the DHCP clients are connected to. Switch 2 is being used as a transit switch. The VLAN is enabled for DHCP snooping to protect the untrusted access ports of Switch 1. The trunk port is configured by default as a trusted port. In [Figure 14 on page 277](#), ge-0/0/11 is a trusted trunk port.

Figure 29: DHCP Server Connected Directly to a Switch



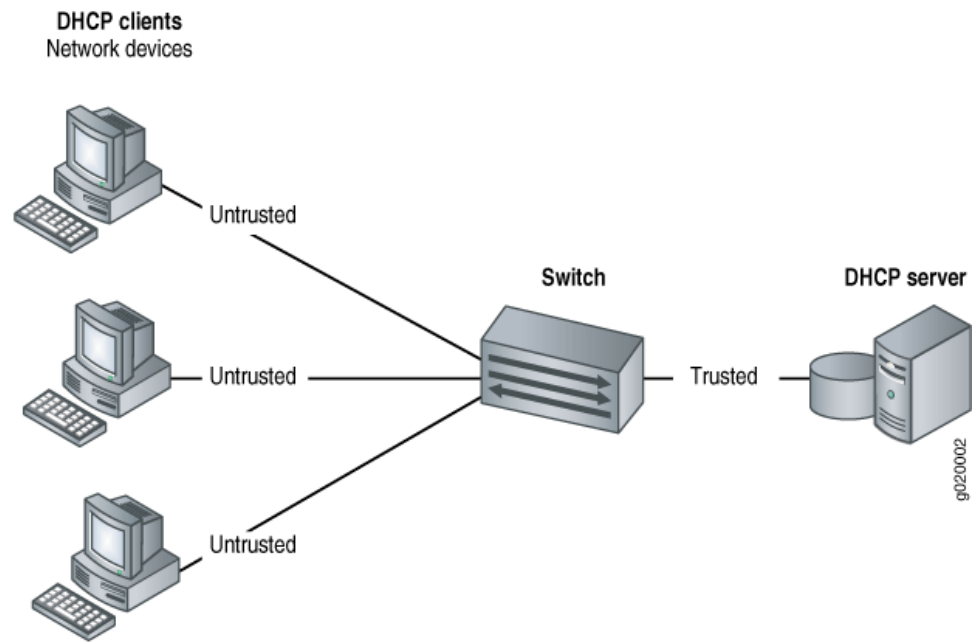


Figure 30: DHCP Server Connected Directly to Switch 2, with Switch 2 Connected to Switch 1 Through a Trusted Trunk Port

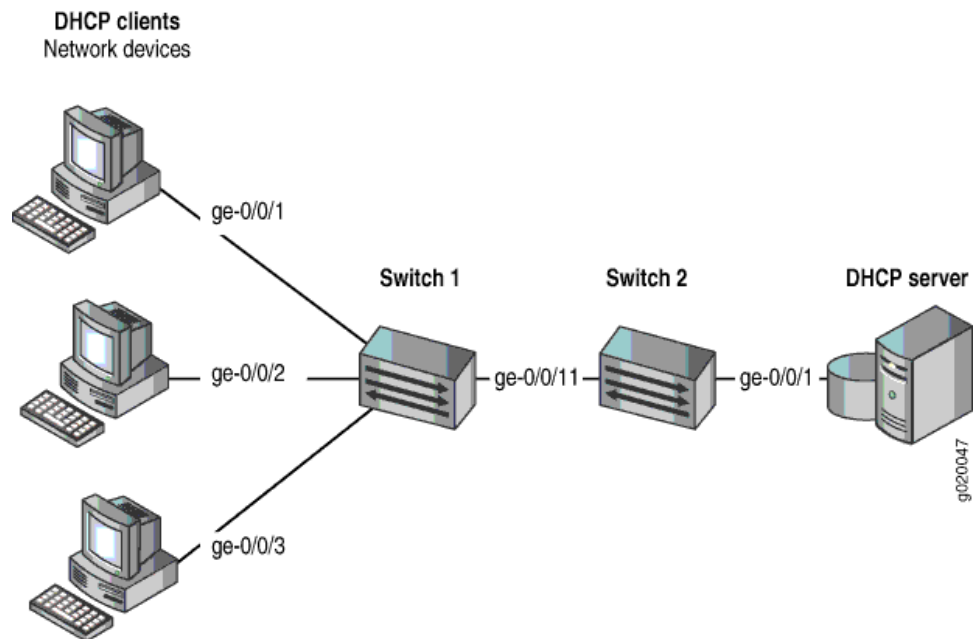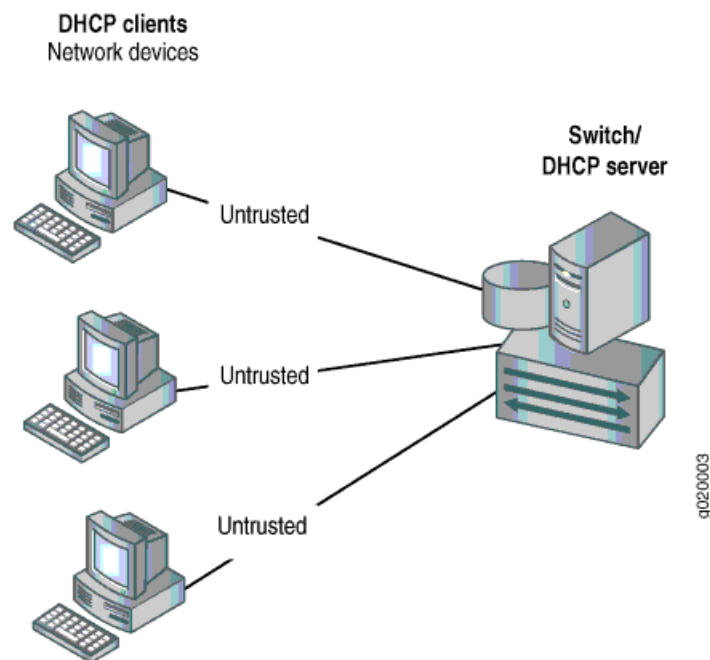

### Switch Acts as the DHCP Server

You can configure DHCP local server options on the switch, which enables the switch to function as an extended DHCP local server. In [Figure 15 on page 278](#), the DHCP clients are connected to the extended DHCP local server through untrusted access ports.

*Figure 31: Switch Is the DHCP Server*


### Switch Acts as a Relay Agent

The switch functions as a relay agent when the DHCP clients or the DHCP server is connected to the switch through a Layer 3 interface (on a switch or a router). The Layer 3 interfaces on the switch are configured as routed VLAN interfaces (RVIs)—also called integrated routing and bridging (IRB) interfaces. The trunk interfaces are trusted by default.

The switch can act as a relay agent in these two scenarios:

- The DHCP server and clients are in different VLANs.
- The switch is connected to a router that is, in turn, connected to the DHCP server. See [Figure 16 on page 279](#).

Figure 32: Switch Acting as a Relay Agent Through a Router to the DHCP Server

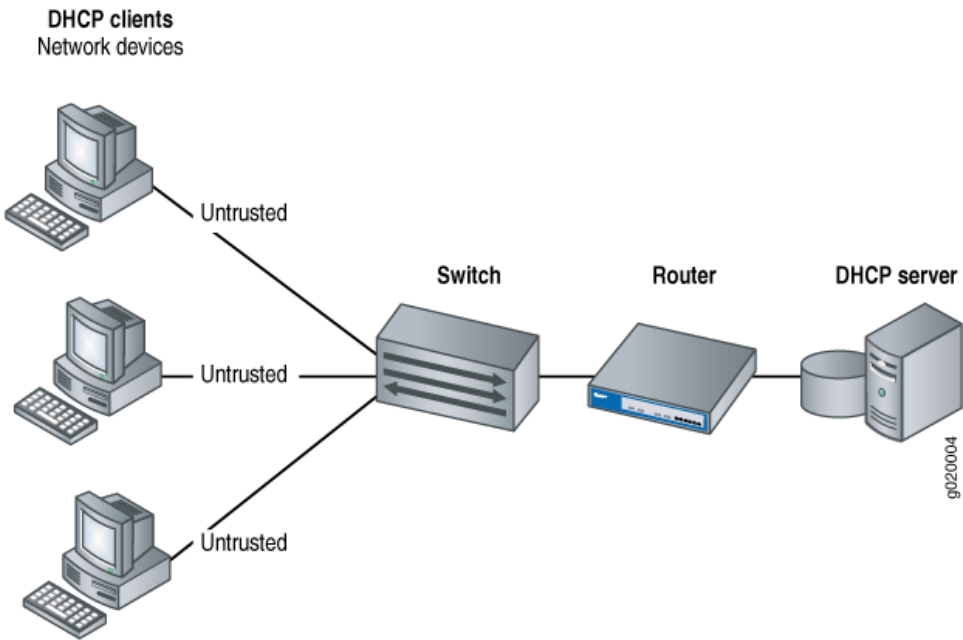

Static IP Address Additions to the DHCP Snooping Database

You can add specific static IP addresses to the database as well as have the addresses dynamically assigned through DHCP snooping. To add a static IP address, you provide the IP address, the MAC address of the device, the interface on which the device is connected, and the VLAN with which the interface is associated. You do not assign a lease time to the entry. The statically configured entry never expires.

| Release History Table | Release     | Description                                                                                                                                                                                                                                                                   |
|-----------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       | 14.1X53-D35 | Starting in Junos OS Release 14.1X53-D35, a network device with a fixed IP allocation from the DHCP server is replaced by a new device with a different MAC address.                                                                                                          |
|                       | 14.1X53-D10 | Starting in Junos OS Release 14.1X53-D10, DHCP snooping is supported for IPv6 packets on EX 9200 Switches.                                                                                                                                                                    |
|                       | 13.2X51-D20 | Starting in Junos OS Release 17.1R1, you can configure DHCP snooping or DHCPv6 snooping on a VLAN without enabling other port security features by configuring the <b>dhcp-security</b> CLI statement at the <b>[edit vlans vlan-name forwarding-options dhcp-security]</b> . |

- Related Documentation
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
  - [Configuring Port Security Features on page 287](#)
  - [Understanding Trusted DHCP Servers for Port Security on page 537](#)

- [Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524](#)
- [Understanding DHCP Services for Switches](#)
- [DHCP/BOOTP Relay for Switches Overview](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 318](#)
- [Enabling DHCP Snooping \(J-Web Procedure\)](#)
- [Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance \(CLI Procedure\) on page 533](#)

## Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect Juniper Networks EX Series Ethernet Switches and MX Series 5G Universal Routing Platforms against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Hosts on untrusted access interfaces on an Ethernet LAN switching device send requests for IP addresses to access the Internet. The switching device forwards or relays these requests to DHCP servers, and the servers send offers for IP address leases in response. Attackers can use these messages to penetrate the network by address spoofing.

Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client. The Junos OS implementation of DHCP option 82 supports RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

- [DHCP Option 82 Overview on page 524](#)
- [Suboption Components of Option 82 on page 525](#)
- [Switching Device Configurations That Support Option 82 on page 526](#)
- [DHCPv6 Options on page 527](#)

### DHCP Option 82 Overview

If DHCP option 82 is enabled on a VLAN or bridge domain, then when a network device—a DHCP client—that is connected to the VLAN or bridge domain on an untrusted interface sends a DHCP request, the switching device inserts information about the client's network location into the packet header of that request. The switching device then sends the request to the DHCP server. The DHCP server reads the option 82 information in the packet header and uses it to implement the IP address or another parameter for the client. See “[Suboption Components of Option 82](#)” on [page 311](#) for more information about option 82.



**NOTE:** On EX4300 switches, DHCP option 82 information is added to DHCP packets received on trusted interfaces as well as untrusted interfaces.

---

If option 82 is enabled on a VLAN or bridge domain, the following sequence of events occurs when a DHCP client sends a DHCP request:

1. The switching device receives the request and inserts the option 82 information in the packet header.
2. The switching device forwards (or relays) the request to the DHCP server.
3. The server uses the DHCP option 82 information to formulate its reply and sends a response to the switching device. It does not alter the option 82 information.
4. The switching device strips the option 82 information from the response packet.
5. The switching device forwards the response packet to the client.

To use the DHCP option 82 feature, you must ensure that the DHCP server is configured to accept option 82. If the DHCP server is not configured to accept option 82, then when it receives requests containing option 82 information, it does not use the information for setting parameters and it does not echo the information in its response message.



**NOTE:** If your switching device is an EX Series switch and uses Junos OS with Enhanced Layer 2 Software (ELS) configuration style, you can enable DHCP option 82 only for a specific VLAN. See [“Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\)”](#) on page 313.

If your switching device is an EX Series switch and does *not* use Junos OS with Enhanced Layer 2 Software (ELS) configuration style, you can enable DHCP option 82 either for a specific VLAN or for all VLANs. See [“Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\)”](#) on page 528.

## Suboption Components of Option 82

Option 82 as implemented on a switching device comprises the suboptions circuit ID, remote ID, and vendor ID. These suboptions are fields in the packet header:

- circuit ID—Identifies the circuit (interface or VLAN) on the switching device on which the request was received. The circuit ID contains the interface name and VLAN name, with the two elements separated by a colon—for example, ge-0/0/10:vlan1, where ge-0/0/10 is the interface name and vlan1 is the VLAN name. If the request packet is received on a Layer 3 interface, the circuit ID is just the interface name—for example, ge-0/0/10.

Use the prefix option to add an optional prefix to the circuit ID. If you enable the prefix option, the hostname for the switching device is used as the prefix; for example, device1:ge-0/0/10:vlan1, where device1 is the hostname.

You can also specify that the interface description be used rather than the interface name or that the VLAN ID be used rather than the VLAN name.

- remote ID—Identifies the remote host. See [remote-id](#) for details.
- vendor ID—Identifies the vendor of the host. If you specify the **vendor-id** option but do not enter a value, the default value Juniper is used. To specify a value, you type a character string.

## Switching Device Configurations That Support Option 82


Switching device configurations that support option 82 are:

- [Switching Device, DHCP Clients, and the DHCP Server Are on the Same VLAN or Bridge Domain on page 526](#)
- [Switching Device Acts as a Relay Agent on page 526](#)

### Switching Device, DHCP Clients, and the DHCP Server Are on the Same VLAN or Bridge Domain

If the switching device, the DHCP clients, and the DHCP server are all on the same VLAN or bridge domain, the switching device forwards the requests from the clients on untrusted access interfaces to the server on a trusted interface. See [Figure 33 on page 526](#).

*Figure 33: DHCP Clients, Switching Device, and the DHCP Server Are All on the Same VLAN or Bridge Domain*

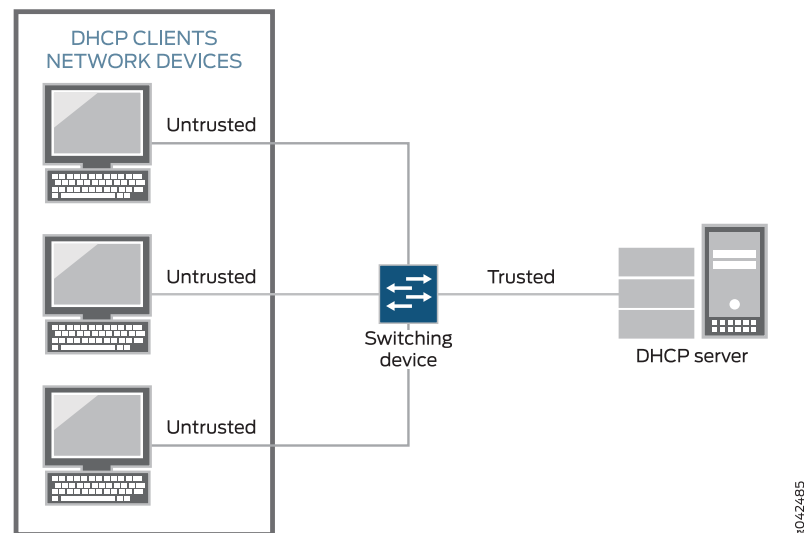


### Switching Device Acts as a Relay Agent

The switching device functions as a relay agent (extended relay server) when the DHCP clients or the DHCP server is connected to the switching device through a Layer 3 interface. On the switching device, these interfaces are configured as routed VLAN interfaces (RVIs). [Figure 18 on page 312](#) illustrates a scenario for the switching device acting as an extended



relay server; in this instance, the switching device relays requests to the server. This figure shows the relay agent and server on the same network, but they can also be on different networks—that is, the relay agent can be external.

*Figure 34: Switching Device Acting as an Extended Relay Server*

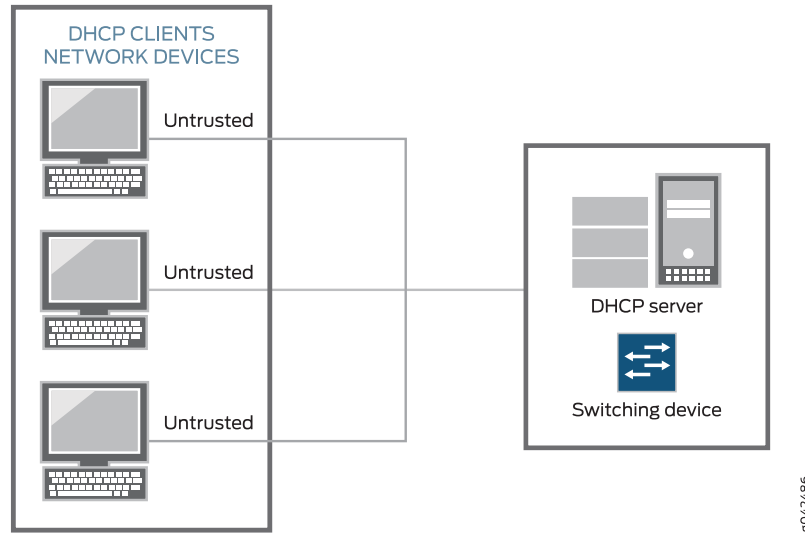

## DHCPv6 Options

DHCPv6 provides several options that can be used to insert information into the DHCPv6 request packets that are relayed to a server from a client. These options are equivalent to the sub-options of DHCP option 82.

- Option 37—Identifies the remote host. Option 37 is equivalent to the **remote-id** sub-option of DHCP option 82.
- Option 18—Identifies the interface on which the DHCP request packet was received from the client. Option 18 is equivalent to the **circuit-id** sub-option of DHCP option 82.
- Option 16—Identifies the vendor of the hardware on which the client is hosted. Option 16 is equivalent to the **vendor-id** sub-option of DHCP option 82.

DHCPv6 options are not enabled automatically when DHCPv6 snooping is enabled on a VLAN. They must be configured using the [dhcpv6-options](#) statement.

### Related Documentation

- [Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks \(CLI Procedure\) on page 551](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)

## Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)

---

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switch against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

You can configure the DHCP option 82 feature in two topologies:

- The switch, DHCP clients, and DHCP server are all on the same VLAN. The switch forwards the clients' requests to the server and forwards the server's replies to the clients. This topic describes this configuration.
- The switch functions as a relay agent when the DHCP clients or the DHCP server is connected to the switch through a Layer 3 interface. This means that the relay agent and server can be on different networks—that is, the relay agent can be external. On the switch, these interfaces are configured as routed VLAN interfaces, or RVIs. The switch relays the clients' requests to the server and then forwards the server's replies to the clients. This configuration is described in [“Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\)”](#) on page 508.

Before you configure DHCP option 82 on the switch, perform these tasks:

- Connect and configure the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If the server is not configured for DHCP option 82, the server does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configure a VLAN on the switch and associate the interfaces on which the clients and the server connect to the switch with that VLAN.

To configure DHCP option 82:



**NOTE:** Replace values displayed in *italics* with values for your configuration.

1. Specify DHCP option 82 for all VLANs associated with the switch or for a specified VLAN. (You can also configure the feature for a VLAN range.)

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all dhcp-option82
```

The remaining steps are optional.

2. To configure a prefix for the circuit ID suboption (the prefix is always the hostname of the switch):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id prefix hostname
```

3. To specify that the circuit ID suboption value should contain the interface description rather than the interface name (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id use-interface-description
```



**NOTE:** When you use the interface description rather than the interface name, the interface description has to be specified under interface unit ("set interfaces ge-0/0/0 unit 0 description "client"). If you do not do this, then the interface name is used.

4. To specify that the circuit ID suboption value should contain the VLAN ID rather than the VLAN name (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 circuit-id use-vlan-id
```

5. To specify that the remote ID suboption be included in the DHCP option 82 information:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id
```

6. To configure a prefix for the remote ID suboption (here, the prefix is the MAC address of the switch):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id prefix mac
```

7. To specify that the prefix for the remote ID suboption be the hostname of the switch rather than the MAC address of the switch (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id prefix hostname
```

8. To specify that the remote ID suboption value should contain the interface description:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id use-interface-description
```

9. To specify that the remote ID suboption value should contain a character string:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 remote-id use-string mystring
```

10. To configure a vendor ID suboption and use the default value (the default value is **Juniper**), do not type a character string after the **vendor-id** option keyword:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 vendor-id
```

11. To specify that the vendor ID suboption value should contain a character string value that you specify rather than **Juniper** (the default):

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan employee dhcp-option82 vendor-id mystring
```

To view results of the configuration steps before committing the configuration, type the **show** command at the user prompt.

To commit these changes to the active configuration, type the **commit** command at the user prompt.

#### Related Documentation

- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500](#)
- [secure-access-port on page 964](#)
- [secure-access-port](#)
- [Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524](#)
- [Understanding DHCP Option 82 for Port Security on page 310](#)
- [RFC 3046, DHCP Relay Agent Information Option](#), at <http://tools.ietf.org/html/rfc3046>.

## Enabling DHCPv6 Options by Using a Lightweight DHCPv6 Relay Agent (LDRA) (CLI Procedure)

In Layer 2 networks that have many nodes on a single link, a DHCP server would normally be unaware of how a DHCP client is attached to the network. In a DHCPv6 deployment, you can use a Lightweight DHCPv6 Relay Agent (LDRA) to add relay agent information to a DHCPv6 message to identify the client-facing interface of the access node that received the message. The server can use this information to assign IP addresses, prefixes, and other configuration parameters for the client.

DHCPv6 relay agents are typically used to forward DHCPv6 messages between clients and servers or other relay agents when they are not on the same IPv6 link node. The relay agent can add information to the messages before relaying them. When the client and server reside on the same IPv6 link, LDRA enables a switching device to perform the function of intercepting DHCPv6 messages and inserting relay agent information that can be used for client identification. The LDRA acts as a relay agent, but without performing the routing function necessary to forward messages to a server or relay agent that resides on a different IPv6 link.

When the LDRA receives a DHCPv6 Solicit message from a client, it encapsulates that message within a DHCPv6 Relay-Forward message, which it then forwards to the server or another relay agent. Before it forwards the Relay-Forward message, the LDRA can also insert relay information by using one or more of the following options:

- **option-16** (Vendor ID)—Option 16 provides the server with information about the vendor that manufactured the hardware on which the DHCPv6 client is running. Option 16 is the DHCPv6 equivalent of the **vendor-id** suboption of DHCP option 82.
- **option-18** (Interface ID)—A unique identifier for the interface on which the client DHCPv6 packet is received. Suboptions can be configured to include a prefix with the interface ID or to change the type of information used to identify the interface. Option 18 is the DHCPv6 equivalent of the **circuit-id** suboption of DHCP option 82.
- **option-37** (Remote ID)—A unique identifier for the remote host. Suboptions can be configured to include a prefix with the remote ID or to change the interface portion of the ID. Option 37 is the DHCPv6 equivalent of the **remote-id** suboption of DHCP option 82.

You must configure LDRA if you configure DHCPv6 options at the **[edit vlan *vlan-name* forwarding-options dhcp-security dhcpv6-options]** hierarchy level. Option 16, option 37, and option 79 are included in the Relay-Forward message only if they are explicitly configured. Option 18 is mandatory in Relay-Forward messages and is included even if it is not explicitly configured. However, suboptions of option 18 are included only if they are configured using the **option-18** statement at the **[edit vlan *vlan-name* forwarding-options dhcp-security dhcpv6-options]** hierarchy level.

To configure LDRA to enable DHCPv6 options:

1. Configure the switch as an LDRA.

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set light-weight-dhcpv6-relay
```

2. Configure the switch to insert DHCPv6 options in the Relay-Forward message to provide additional information about the client to the server or to another relay agent.

- To insert option 16:

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set dhcpv6-options option-16
```

- To insert option 18:

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set dhcpv6-options option-18
```

- To insert option 37:

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set dhcpv6-options option-37
```

3. (Optional) Configure a prefix to include additional information with DHCPv6 option 18 or DHCPv6 option 37. For example, to configure a prefix for option 37 to include the switch's hostname:

```
[edit vlans vlan-name forwarding-options dhcp-security dhcpv6-options]
user@switch# set option-37 prefix host-name
```

4. (Optional) Change the type of information used to identify the interface. For example, to specify that option 18 contain the interface description for the logical unit rather than the interface name (the default):

```
[edit vlans vlan-name forwarding-options dhcp-security dhcpv6-options]
user@switch# set option-18 use-interface-description logical
```



**NOTE:** To use the interface description rather than the interface name for identifying the interface, the interface description must be specified under interface unit (set interfaces ge-0/0/0 unit 0 description *description*). If you do not do this, then the interface name is used by default.

#### Related Documentation

- [Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524](#)

## Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure)

You can add static (fixed) IP addresses and bind them to fixed MAC addresses in the DHCP snooping database. These bindings are labeled *static* in the database, while those bindings that have been added through the process of DHCP snooping are labeled *dynamic*.

To configure a static IP-MAC address binding in the DHCP snooping database:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name static-ip ip-address vlan data-vlan mac mac-address
```

To configure a static IP-MAC address binding in the DHCPv6 snooping database:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set interface interface-name static-ipv6 ip-address vlan data-vlan mac mac-address
```

To view results of the configuration steps before committing the configuration, type the **show** command at the user prompt.

To commit these changes to the active configuration, type the **commit** command at the user prompt.

### Related Documentation

- [Verifying That DHCP Snooping Is Working Correctly on page 297](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
- [secure-access-port on page 964](#)
- *secure-access-port*

## Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance (CLI Procedure)



**NOTE:** This task uses Junos OS for MX Series routers and EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

By default, IP-MAC address bindings in the DHCP snooping database do not persist through device reboots. You can improve network performance by configuring the IP-MAC address bindings in the DHCP snooping database to persist through reboots so that the table does not need to be rebuilt after rebooting. Do this by configuring a storage location for the DHCP snooping database file, where you must specify how frequently the device writes the database entries into the DHCP snooping database file.



.....

**NOTE:** You can also configure persistent bindings for IPv6 addresses and MAC addresses on devices that support DHCPv6 snooping.

DHCPv6 is not supported on the MX Series routers.

.....

The DHCP snooping database of IP-MAC bindings is created when you enable any of the port security features for a specific VLAN or bridge domain in either of the following hierarchy levels:

- [edit vlans *vlan-name* forwarding-options dhcp-security]
- [edit bridge-domains *bridge-domain-name* forwarding-options dhcp-security]

On devices that support DHCPv6, enabling any port security features will automatically enable DHCPv6 snooping. DHCP snooping and DHCPv6 snooping are not enabled by default.



To configure a *local* storage location for the DHCP snooping database file:

- For DHCP snooping:

```
[edit system processes]
user@device# set dhcp-service dhcp-snooping-file local-pathname write-interval seconds
```

For example:

```
[edit system processes]
user@device# set dhcp-service dhcp-snooping-file /var/tmp/test.log write-interval 60
```

- For DHCPv6 snooping:

```
[edit system processes]
user@device# set dhcp-service dhcpv6-snooping-file local-pathname write-interval seconds
```

For example:

```
[edit system processes]
user@device# set dhcp-service dhcpv6-snooping-file /var/tmp/test.log write-interval 60
```

To configure a *remote* storage location for IP-MAC bindings, use **tftp://*ip-address*** or **ftp://*hostname/path*** as the remote URL, or the local pathname for the storage location of the DHCP or DHCPv6 snooping database file:

- For DHCP snooping:

```
[edit system processes]
user@device# set dhcp-service dhcp-snooping-file remote_url write-interval seconds
```

For example:

```
[edit system processes]
user@device# set dhcp-service dhcp-snooping-file tftp://@14.1.2.1 write-interval 60
```

- For DHCPv6 snooping:

```
[edit system processes]
user@device# set dhcp-service dhcpv6-snooping-file remote_url write-interval seconds
```

For example:

```
[edit system processes]
user@device# set dhcp-service dhcpv6-snooping-file tftp://@14.1.2.1 write-interval 60
```

**Related  
Documentation**

- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)



## CHAPTER 21

# Enabling Trusted DHCP Servers to Protect Against Rogue DHCP Servers

- [Understanding Trusted DHCP Servers for Port Security on page 537](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 538](#)

### Understanding Trusted DHCP Servers for Port Security

---

Any interface on the switching device that connects to a DHCP server can be configured as a trusted port. Configuring a DHCP server on a trusted port protects against rogue DHCP servers sending leases.

Ensure that the DHCP server interface is physically secure—that is, that access to the server is monitored and controlled at the site—before you configure the port as trusted.

#### **Related Documentation**

- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 318](#)
- [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)

## Enabling a Trusted DHCP Server (CLI Procedure)

---

You can configure any interface on a switch that connects to a DHCP server as a trusted interface (port). Configuring a DHCP server on a trusted interface protects against rogue DHCP servers sending leases.

You configure a trusted DHCP server on an interface, not on a VLAN. By default, all access interfaces are untrusted, and all trunk interfaces are trusted.

To configure a trusted interface for a DHCP server by using the CLI (here, the interface is **ge-0/0/8**):

```
[edit ethernet-switching-options secure-access port]
user@switch# set interface ge-0/0/8 dhcp-trusted
```

### Related Documentation

- [Enabling a Trusted DHCP Server \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 449](#)
- [Verifying That a Trusted DHCP Server Is Working Correctly on page 307](#)
- [Monitoring Port Security on page 280](#)
- [Understanding Trusted DHCP Servers for Port Security on page 537](#)
- [secure-access-port on page 964](#)
- [secure-access-port](#)

## CHAPTER 22

# Configuring Layer 2 Port Security

- [Configuring Port Security to Protect Access Ports on the Device Against Loss of Information and Productivity \(CLI Procedure\) on page 540](#)
- [Configuring IP Source Guard to Mitigate the Effects of Source IP Address Spoofing and Source MAC Address Spoofing \(CLI Procedure\) on page 543](#)
- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
- [Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 545](#)
- [Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers \(CLI Procedure\) on page 549](#)
- [Configuring Dynamic ARP Inspection to Protect Switching Devices Against ARP Spoofing \(CLI Procedure\) on page 550](#)
- [Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases \(CLI Procedure\) on page 550](#)
- [Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks \(CLI Procedure\) on page 551](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553](#)

## Configuring Port Security to Protect Access Ports on the Device Against Loss of Information and Productivity (CLI Procedure)

---

Ethernet LANs are vulnerable to attacks such as address spoofing and Layer 2 denial of service (DoS) on network devices. The Dynamic Host Configuration Protocol (DHCP) port security features help protect the access ports on the device against the loss of information and productivity that can result from such attacks.

The following port security features are supported for DHCPv4 and MX Series routers:

- DHCP snooping
- DAI (dynamic ARP inspection)
- IP source guard
- DHCP option 82

DHCP snooping is disabled in the default configuration. There is no explicit configuration for enabling DHCP snooping. However, if you configure any other port security features for a bridge domain at the `[edit vlans vlan-name forwarding-options dhcp-security]` or the `[edit bridge-domain bridge-domain-name forwarding-options dhcp-security]` hierarchy level, then DHCP snooping is automatically enabled on that bridge domain.

DAI, neighbor discovery inspection, IP source guard, and DHCP option 82 are configured per bridge domain. You must configure a bridge domain prior to configuring these DHCP port security features. See *Configuring a Bridge Domain*.

The DHCP port security features that you specify for the bridge domain apply to all included interfaces. However, you can create a specific group of access interfaces within the bridge domain to have different attributes, such as:

- Specifying a specific interface to have a static IP-MAC address (`static-ip`)
- Specifying an access interface to act as a trusted interface to a DHCP server (`trusted`)
- Specifying a specific interface not to transmit DHCP (`no-option82`)



NOTE:

- If you configure any of these DHCP port security features—including configuring a group of access interfaces—for a specific bridge domain, the software automatically enables DHCP snooping for that bridge domain.
- If you explicitly disable DHCP snooping by setting `no-dhcp-snooping` for a specific bridge domain, the software automatically disables any other DHCP port security features for that bridge domain.



NOTE: Trunk interfaces are trusted by default. However, on an MX Series router, you can override this default behavior and set a trunk interface as `untrusted`.

For additional details, see:

- [Configuring Dynamic ARP Inspection to Protect Switching Devices Against ARP Spoofing \(CLI Procedure\) on page 550](#)
- [Configuring IP Source Guard to Mitigate the Effects of Source IP Address Spoofing and Source MAC Address Spoofing \(CLI Procedure\) on page 543](#)
- [Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks \(CLI Procedure\) on page 551](#)

You can override the general port security settings for the bridge domain by configuring a group of access interfaces within it. For details, see:

- [Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers \(CLI Procedure\) on page 549](#)
- [Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases \(CLI Procedure\) on page 550](#)

**Related  
Documentation**

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)



## Configuring IP Source Guard to Mitigate the Effects of Source IP Address Spoofing and Source MAC Address Spoofing (CLI Procedure)

You can use the IP source guard access port security feature on MX Series routers to mitigate the effects of source IP address spoofing and source MAC address spoofing. If IP source guard determines that a host connected to an access interface has sent a packet with an invalid source IP address or source MAC address in the packet header, then IP source guard ensures that the switching device does not forward the packet—that is, the packet is discarded.

To configure IP source guard on a specific bridge domain by using the CLI:

- Configure the IP source guard on a bridge domain:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security]
user@device# set ip-source-guard (MX Series)
```

To configure IP source guard at the routing instance level by using the CLI:

- Configure the IP source guard at the routing instance level:

```
[edit routing-instances ri-name bridge-domains bridge-domain-name
forwarding-options dhcp-security]
user@device# set ip-source-guard (MX Series)
```

### Related Documentation

- [ip-source-guard \(MX Series\) on page 816](#)

## Configuring IP Source Guard (CLI Procedure)



**NOTE:** This task uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switching device runs software that does not support ELS, see [“Configuring IP Source Guard \(CLI Procedure\)” on page 617](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.



**NOTE:** On EX9200 switches, IP source guard is not supported in an MC-LAG scenario.

You can use the IP source guard access port security feature to mitigate the effects of source IP address spoofing and source MAC address spoofing. If IP source guard determines that a host connected to an access interface has sent a packet with an invalid source IP address or source MAC address in the packet header, then IP source guard ensures that the switch does not forward the packet—that is, the packet is discarded.

You configure the IP source guard feature on a specific VLAN. When you configure IP source guard on a VLAN, the switch automatically enables DHCP snooping on that VLAN.

IPv6 source guard is supported on switches with support for DHCPv6 snooping. On these switches, configuring IP source guard or IPv6 source guard on a VLAN automatically enables DHCP snooping and DHCPv6 snooping on that VLAN.

IP source guard and IPv6 source guard can be applied only to untrusted interfaces. Access interfaces are untrusted by default.

IP source guard and IPv6 source guard can be used together with 802.1X user authentication in single supplicant, single-secure supplicant, or multiple supplicant mode.

Before you can configure IP source guard or IPv6 source guard on a VLAN, you must configure the VLAN. See the documentation that describes setting up basic bridging and a VLAN for your switch.

To configure IP source guard on a specific VLAN by using the CLI:

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set ip-source-guard
```

To configure IPv6 source guard on a specific VLAN by using the CLI:

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set ipv6-source-guard
```

### Related Documentation

- [Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621](#)
- [Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626](#)

- [Understanding IP Source Guard for Port Security on Switches on page 615](#)

## Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing

This example describes how to enable IPv6 source guard and neighbor discovery inspection on a specified VLAN to protect an EX Series switch against IPv6 address spoofing attacks. IPv6 source guard and neighbor discovery inspection support introduced on EX2200 and EX3300 switches in Junos OS Release 14.1X53-D10.

- [Requirements on page 545](#)
- [Overview and Topology on page 545](#)
- [Configuration on page 547](#)
- [Verification on page 547](#)

### Requirements

This example uses the following hardware and software components:

- One EX2200 or EX3300 switch
- Junos OS Release 14.1X53-D10 or later for EX Series switches
- A DHCPv6 server to provide IPv6 addresses to network devices on the switch

Before you configure IPv6 source guard and neighbor discovery inspection to prevent IPv6 address spoofing attacks, be sure you have:

- Connected the DHCPv6 server to the switch.
- Configured the VLAN to which you are adding DHCPv6 security features. See *Configuring VLANs for EX Series Switches (CLI Procedure)*.

### Overview and Topology

Ethernet LAN switches are vulnerable to attacks on security that involve spoofing (forging) of source MAC addresses or source IPv6 addresses. These spoofed packets are sent from hosts connected to untrusted access interfaces on the switch. For more information on IPv6 address spoofing attacks, see [“Understanding IPv6 Neighbor Discovery Inspection” on page 319](#).


IPv6 source guard and neighbor discovery inspection mitigate the risk of IPv6 spoofing attacks by using the DHCPv6 snooping table. Also known as the binding table, the DHCPv6 snooping table contains the valid bindings of IPv6 addresses to MAC addresses. When a packet is sent from a host attached to an untrusted access interface on the switch, IPv6 source guard verifies the source IPv6 address and MAC address of the packet against the DHCPv6 snooping table. If there is no match in the table, the switch does not forward the packet—that is, the packet is discarded. Neighbor discovery inspection verifies neighbor discovery messages sent between IPv6 nodes on the same network link against the DHCPv6 snooping table, and also discards the packet if no match is found.

This example shows how to configure these important port security features on a switch that is connected to a DHCPv6 server. The setup for this example includes the VLAN **sales** on the switch. [Figure 24 on page 458](#) illustrates the topology for this example.



**NOTE:** The trunk interface connecting to the DHCPv6 server interface is a trusted port by default.

Figure 35: Network Topology for Basic Port Security

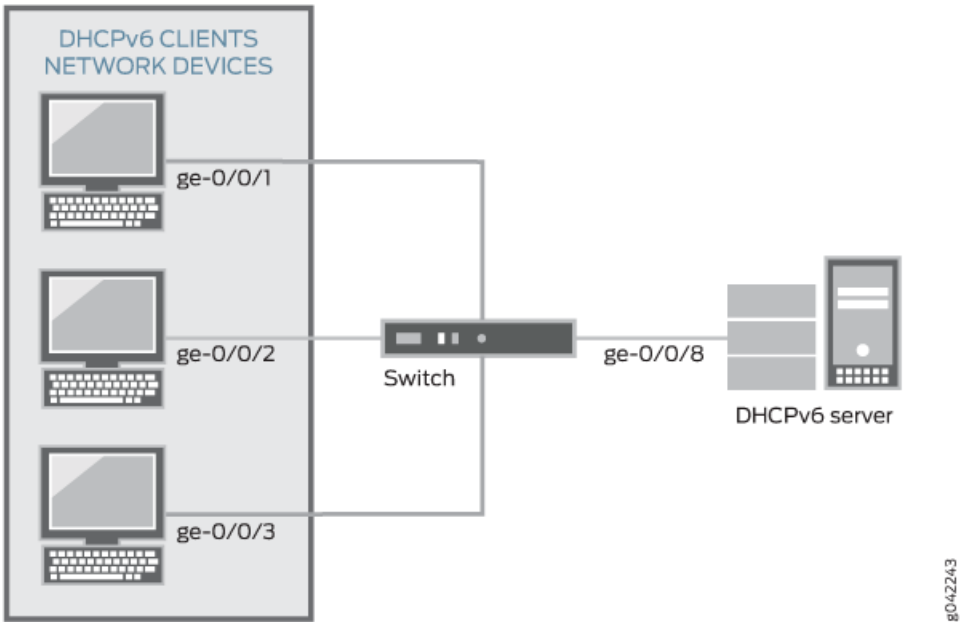

The components of the topology for this example are shown in [Table 24 on page 458](#).

Table 29: Components of the Port Security Topology

| Properties                            | Settings                                                                                       |
|---------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware                       | One EX2200 or EX3300 switch                                                                    |
| VLAN name and ID                      | sales, tag                                                                                     |
| VLAN subnets                          | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is the subnet's broadcast address |
| Interfaces in <b>sales</b>            | ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8                                                         |
| Interface connecting to DHCPv6 server | ge-0/0/8                                                                                       |

In this example, the switch has already been configured as follows:

- All access ports are untrusted, which is the default setting.
- The trunk port (ge-0/0/8) is trusted, which is the default setting.
- The VLAN (sales) has been configured to include the specified interfaces.

## Configuration

**CLI Quick Configuration** To quickly configure IPv6 source guard and neighbor discovery inspection, copy the following commands and paste them into the switch terminal window:

```
[edit]
set ethernet-switching-options secure-access-port vlan sales examine-dhcpv6
set ethernet-switching-options secure-access-port vlan sales ipv6-source-guard
set ethernet-switching-options secure-access-port vlan sales neighbor-discovery-inspection
```

**Step-by-Step Procedure** Configure IPv6 source guard and neighbor discovery inspection (and thereby, also automatically configure DHCPv6 snooping) on the VLAN:

1. Enable DHCPv6 snooping on the VLAN:

```
[edit ethernet-switching-options secure-access-port vlan sales]
user@switch# set examine-dhcpv6
```

2. Configure IPv6 source guard on the VLAN:

```
[edit ethernet-switching-options secure-access-port vlan sales]
user@switch# set ipv6-source-guard
```

3. Configure neighbor discovery inspection on the VLAN:

```
[edit ethernet-switching-options secure-access-port vlan sales]
user@switch# set neighbor-discovery-inspection
```

**Results** Check the results of the configuration:

```
user@switch> show ethernet-switching-options secure-access-port
vlan sales {
 examine-dhcpv6;
 ipv6-source-guard;
 neighbor-discovery-inspection;
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying That DHCPv6 Snooping Is Working Correctly on the Switch on page 548](#)
- [Verifying That Neighbor Discovery Inspection Is Working Correctly on the Switch on page 548](#)

### Verifying That DHCPv6 Snooping Is Working Correctly on the Switch

**Purpose** Verify that DHCPv6 snooping is working on the switch.

**Action** Send DHCPv6 requests from network devices (in this example, these are DHCPv6 clients) connected to the switch.

Display the DHCPv6 snooping information when the port on which the DHCPv6 server connects to the switch is trusted. The following is the output when requests are sent from the MAC addresses and the server has provided the IPv6 addresses and leases:

```
user@switch> show dhcpv6 snooping binding
```

DHCP Snooping Information:

| MAC address       | IP address            | Lease (seconds) | Type    | VLAN  | Interface  |
|-------------------|-----------------------|-----------------|---------|-------|------------|
| 00:10:94:00:00:01 | 2001:db8::10:0:3      | 3599992         | dynamic | sales | ge-0/0/1.0 |
| 00:10:94:00:00:01 | fe80::210:94ff:fe00:1 | 3599992         | dynamic | sales | ge-0/0/1.0 |
| 00:10:94:00:00:02 | 2001:db8::10:0:5      | 3599992         | dynamic | sales | ge-0/0/2.0 |
| 00:10:94:00:00:02 | fe80::210:94ff:fe00:2 | 3599992         | dynamic | sales | ge-0/0/2.0 |
| 00:10:94:00:00:03 | 2001:db8::10:0:7      | 3599992         | dynamic | sales | ge-0/0/3.0 |
| 00:10:94:00:00:03 | fe80::210:94ff:fe00:3 | 3599992         | dynamic | sales | ge-0/0/3.0 |

**Meaning** The output shows the assigned IP address, the MAC address, the VLAN name, and the time, in seconds, leased to the IP address. Because IPv6 hosts usually have more than one IP address assigned to each of their IPv6-enabled network interfaces, there are two entries added for each client: one with the link-local IP address, which is used by the client for DHCP transactions, and another with the IP address assigned by the server. The link-local address always has the prefix **fe80::/10**.

### Verifying That Neighbor Discovery Inspection Is Working Correctly on the Switch

**Purpose** Verify that neighbor discovery inspection is working on the switch.

**Action** Send neighbor discovery packets from network devices connected to the switch.

Display the neighbor discovery information:

```
user@switch> show neighbor-discovery-inspection statistics
```

ND inspection statistics:

| Interface  | Packets received | ND inspection pass | ND inspection failed |
|------------|------------------|--------------------|----------------------|
| ge-0/0/1.0 | 7                | 5                  | 2                    |
| ge-0/0/2.0 | 10               | 10                 | 0                    |
| ge-0/0/3.0 | 12               | 12                 | 0                    |

**Meaning** The sample output shows the number of neighbor discovery packets received and inspected per interface, and lists the number of packets passed and the number that failed the inspection on each interface. The switch compares the neighbor discovery requests and replies against the entries in the DHCPv6 snooping database. If a MAC

address or IPv6 address in the neighbor discovery packet does not match a valid entry in the database, the packet is dropped.

#### Release History Table

| Release     | Description                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 14.1X53-D10 | IPv6 source guard and neighbor discovery inspection support introduced on EX2200 and EX3300 switches in Junos OS Release 14.1X53-D10. |

#### Related Documentation

- [Configuring IP Source Guard \(CLI Procedure\) on page 617](#)
- [Enabling DHCP Snooping \(CLI Procedure\) on page 504](#)
- [Configuring Port Security \(CLI Procedure\) on page 284](#)

## Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers (CLI Procedure)

You can add static (fixed) IP addresses and bind them to fixed MAC addresses in the DHCP snooping database. These bindings are labeled as *static* in the database, while those bindings that have been added through the process of DHCP snooping are labeled *dynamic*.

To configure a static IP address/MAC address binding in the DHCP snooping database, you must first create a group of access interfaces under **[edit bridge-domains *bridge-domain-name* forwarding-options dhcp-security]**. Creating this group automatically enables DHCP snooping, which is a prerequisite for creating the DHCP snooping database. The following procedure shows the configuration in two steps, but it can be done in one. You can then configure a specific interface within the group to have a static IP address that is bound to a fixed MAC address. If you want to have multiple static IP addresses, configure additional interfaces within the same group.

To configure a static IP address and MAC address binding in the DHCP snooping database:

1. Create a group by including an access interface:

```
[edit bridge-domains bd-name forwarding-options dhcp-security]
user@device# set group group-name interface interface-name
```

2. Configure a static IP address:

```
[edit bridge-domains bd-name forwarding-options dhcp-security]
user@device# set group group-name interface interface-name static-ip ip-address
mac mac-address
```

#### Related Documentation

- [show dhcp-security binding on page 1159](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

## Configuring Dynamic ARP Inspection to Protect Switching Devices Against ARP Spoofing (CLI Procedure)

---

Dynamic ARP inspection (DAI) protects switching devices against ARP spoofing. DAI inspects ARP packets on the LAN and uses the information in the DHCP snooping database on the switching devices to validate ARP packets and to protect against ARP cache poisoning.

Before you can enable DAI on a bridge domain, you must configure a bridge domain. See *Configuring a Bridge Domain*.

- To enable DAI on a VLAN by using the CLI:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security]
user@device# set arp-inspection
```

### Related Documentation

- [Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553](#)
- [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)

## Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases (CLI Procedure)

---

You can configure any interface on a switching device that connects to a DHCP server as a trusted interface (port). Configuring a DHCP server on a trusted interface protects against rogue DHCP servers sending leases.

By default, all access interfaces are untrusted, and all trunk interfaces are trusted. However, you can override the default setting for access interfaces by configuring a group of access interfaces within a bridge domain, specifying an interface to belong to that group, and then configuring the group as trusted.

Before you can configure a trusted DHCP server, you must configure a bridge domain.

To configure an untrusted access interface as a trusted interface for a DHCP server by using the CLI :

1. Configure a group within a bridge domain with a specific access interface:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security]
user@device# set group group-name interface interface-name
```

2. Configure that group as **trusted** to make the specified interface contained within the group a trusted interface:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security group
group-name]
user@device# set overrides trusted
```



- Related Documentation**
- [Understanding Trusted DHCP Servers for Port Security on page 537](#)

## Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure)

---

You can use DHCP option 82, also known as the DHCP relay agent information option, to help protect the switching device against attacks such as spoofing (forging) of IP addresses and MAC addresses, and DHCP IP address starvation. Option 82 provides information about the network location of a DHCP client, and the DHCP server uses this information to implement IP addresses or other parameters for the client.

You can configure the DHCP option 82 feature in two topologies:

- The switching device, DHCP clients, and DHCP server are all on the same bridge domain. The switching device forwards the clients' requests to the server and forwards the server's responses to the clients. This topic describes this configuration.
- The switching device functions as a relay agent when the DHCP clients or the DHCP server are connected to the switching device through a Layer 3 interface. On the switching device, these interfaces are configured as integrated routing and bridging (IRB) interfaces. The switching device relays the clients' requests to the server and then forwards the server's responses to the clients.

Before you configure DHCP option 82 on the switching device, perform these tasks:

- Connect and configure the DHCP server.



**NOTE:** Your DHCP server must be configured to accept DHCP option 82. If the server is not configured for DHCP option 82, the server does not use the DHCP option 82 information in the requests sent to it when it formulates its reply messages.

- Configure a bridge domain on the switching device and associate the interfaces on which the clients and the server connect, to the switch with that bridge domain.

To configure DHCP option 82:

1. Specify DHCP option 82 for the bridge domain that you configured:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security]
user@device# set option-82
```



**NOTE:** If you want to enable DHCP option 82 on all bridge domains, you must configure it separately for each specific bridge domain.

*The remaining steps are optional.*

2. Configure the prefix for the circuit ID suboption to include the hostname or the routing instance name for the bridge domain:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set circuit-id prefix (host-name | routing-instance-name)
```

3. Specify that the circuit ID suboption value contains the interface description rather than the interface name (the default):

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set circuit-id use-interface-description
```

4. Specify that the circuit ID suboption value contains the VLAN ID rather than the VLAN name (the default):

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set circuit-id use-vlan-id
```

5. Specify that the remote ID suboption is included in the DHCP option 82 information:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set remote-id
```



**NOTE:** If you do not specify a keyword after `remote-id`, the default value for the `remote-id` suboption is the interface name.

6. Specify that the remote ID suboption is the hostname of the switch:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set remote-id host-name
```

7. Specify that the remote ID suboption value contains the interface description:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set remote-id use-interface-description
```

8. Specify that the remote ID suboption value contains a character string:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set remote-id use-string mystring
```

9. Configure a vendor ID suboption:

- To use the default value (the default value is **Juniper**), do not type a character string after the **vendor-id** option keyword:

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set vendor-id
```

- To configure it so that the vendor ID suboption value contains a character string value that you specify rather than **Juniper** (the default):

```
[edit bridge-domains bridge-domain-name forwarding-options dhcp-security
option-82]
user@device# set vendor-id use-string mystring
```

#### Related Documentation

- [Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

## Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks

This example describes how to enable IP source guard and Dynamic ARP inspection (DAI) on a specified bridge domain to protect the device against spoofed IP/MAC addresses and ARP spoofing attacks. When you enable either IP source guard or DAI, the configuration automatically enables DHCP snooping for the same bridge domain.

- [Requirements on page 553](#)
- [Overview and Topology on page 554](#)
- [Configuration on page 556](#)
- [Verification on page 556](#)

### Requirements

This example uses the following hardware and software components:

- One MX Series router
- Junos OS Release 14.1

- A DHCP server to provide IP addresses to network devices on the device

Before you configure IP source guard to prevent IP/MAC spoofing or DAI to mitigate ARP spoofing attacks, be sure you have:

- Connected the DHCP server to the device.
- Configured the bridge domain to which you are adding DHCP security features. See *Configuring the Bridge Domain for MX Series Router Cloud CPE Services*.

## Overview and Topology

Ethernet LAN devices are vulnerable to attacks on security that involve spoofing (forging) of source MAC addresses or source IP addresses. These spoofed packets are sent from hosts connected to untrusted access interfaces on the device. IP source guard checks the IP source address and MAC source address in a packet sent from a host attached to an untrusted access interface on the device against entries stored in the DHCP snooping database. If IP source guard determines that the packet header contains an invalid source IP address or source MAC address, it ensures that the device does not forward the packet—that is, the packet is discarded.

Another type of security attack is ARP spoofing (also known as ARP poisoning or ARP cache poisoning). ARP spoofing is a way to initiate man-in-the-middle attacks. The attacker sends an ARP packet that spoofs the MAC address of another device on the bridge domain. Instead of the device sending traffic to the proper network device, it sends it to the device with the spoofed address that is impersonating the proper device. If the impersonating device is the attacker's machine, the attacker receives all the traffic from the device that should have gone to another device. The result is that traffic from the device is misdirected and cannot reach its proper destination.



**NOTE:** When DAI is enabled, the device logs the number of invalid ARP packets that it receives on each interface, along with the sender's IP and MAC addresses. You can use these log messages to discover ARP spoofing on the network.

---


This example shows how to configure these important port security features on a device that is connected to a DHCP server. The setup for this example includes the bridge domain **employee-bdomain** on the switching device. [Figure 24 on page 458](#) illustrates the topology for this example.



**NOTE:** The trunk interface connecting to the DHCP server interface is a trusted port by default.

---

Figure 36: Switching Device Network Topology for Basic Port Security

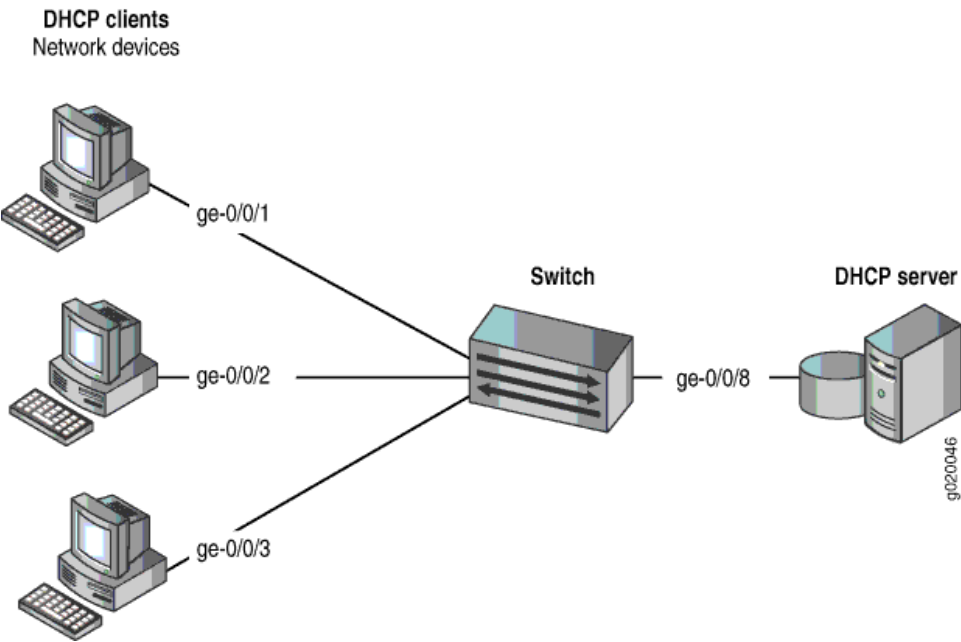

The components of the topology for this example are shown in [Table 24 on page 458](#).

Table 30: Components of the Port Security Topology

| Properties                          | Settings                                                                                       |
|-------------------------------------|------------------------------------------------------------------------------------------------|
| Device hardware                     | One MX Series router                                                                           |
| Bridge domain name and ID           | employee-bdomain, tag 20                                                                       |
| Bridge domain subnets               | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is the subnet's broadcast address |
| Interfaces in employee-bdomain      | ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8                                                         |
| Interface connecting to DHCP server | ge-0/0/8                                                                                       |

In this example, the device has already been configured as follows:

- All access ports are untrusted, which is the default setting.
- The trunk port (ge-0/0/8) is trusted, which is the default setting.
- The bridge-domain (**employee-bdomain**) has been configured to include the specified interfaces.

## Configuration

**CLI Quick Configuration** To quickly configure IP source guard and DAI (and thereby, also automatically configure DHCP snooping to protect the device against IP spoofing and ARP attacks), copy the following commands and paste them into the device terminal window:

```
[edit]
set bridge-domains employee-bdomain forwarding-options dhcp-security ip-source-guard
set bridge-domains employee-bdomain forwarding-options dhcp-security arp-inspection
```

**Step-by-Step Procedure** To configure IP source guard and DAI (and thereby, also automatically configure DHCP snooping) on the bridge domain:

1. Configure IP source guard on the bridge domain:

```
[edit bridge-domains employee-bdomain forwarding-options dhcp-security]
user@device# set ip-source-guard
```

2. Enable DAI on the bridge domain:

```
[edit bridge-domains employee-bdomain forwarding-options dhcp-security]
user@device# set arp-inspection
```

**Results** Check the results of the configuration:

```
user@device> show bridge-domains employee-bdomain forwarding-options
employee-bdomain {
 forwarding-options {
 dhcp-security {
 arp-inspection;
 ip-source-guard;
 }
 }
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying That DHCP Snooping Is Working Correctly on the Device on page 556](#)
- [Verifying That IP Source Guard Is Working on the Bridge Domain on page 557](#)
- [Verifying That DAI Is Working Correctly on the Device on page 557](#)

### Verifying That DHCP Snooping Is Working Correctly on the Device

**Purpose** Verify that DHCP snooping is working on the device.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the device.

Display the DHCP snooping information when the port on which the DHCP server connects to the device is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

user@device> `show dhcp-security binding`

| IP Address | MAC Address       | Vlan          | Expires | State | Interface  |
|------------|-------------------|---------------|---------|-------|------------|
| 192.0.2.17 | 00:05:85:3A:82:77 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.18 | 00:05:85:3A:82:79 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.19 | 00:05:85:3A:82:80 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.20 | 00:05:85:3A:82:81 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.21 | 00:05:85:3A:82:83 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.22 | 00:05:85:27:32:88 | employee-vlan | 86254   | BOUND | ge-0/0/3.0 |

**Meaning** When the interface on which the DHCP server connects to the device has been set to trusted, the output (see the preceding sample) shows, for the assigned IP address, the device's MAC address, the VLAN name, and the time, in seconds, remaining before the lease expires.

### Verifying That IP Source Guard Is Working on the Bridge Domain

**Purpose** Verify that IP source guard is enabled and working on the bridge domain.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the device. View the IP source guard information for the data bridge domain.

user@device> `show dhcp-security binding ip-source-guard`

| IP Address | MAC Address       | Vlan          | Expires | State | Interface  |
|------------|-------------------|---------------|---------|-------|------------|
| 192.0.2.17 | 00:05:85:3A:82:77 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.18 | 00:05:85:3A:82:79 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.19 | 00:05:85:3A:82:80 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.20 | 00:05:85:3A:82:81 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.21 | 00:05:85:3A:82:83 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.22 | 00:05:85:27:32:88 | employee-vlan | 86254   | BOUND | ge-0/0/3.0 |

**Meaning** The IP source guard database table contains the VLANs and bridge domains enabled for IP source guard.

### Verifying That DAI Is Working Correctly on the Device

**Purpose** Verify that DAI is working on the device.

**Action** Send some ARP requests from network devices connected to the device.

Display the DAI information:

```
user@device> show dhcp-security arp inspection statistics
```

```
ARP inspection statistics:
```

| Interface  | Packets received | ARP inspection pass | ARP inspection failed |
|------------|------------------|---------------------|-----------------------|
| ge-0/0/1.0 | 7                | 5                   | 2                     |
| ge-0/0/2.0 | 10               | 10                  | 0                     |
| ge-0/0/3.0 | 12               | 12                  | 0                     |

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The device compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

- Related Documentation**
- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
  - [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 638](#)



## PART 6

# Device Security

- [Configuring Device Security on page 561](#)
- [Storm Control on page 585](#)
- [Configuring IP Source Guard to Prevent IP Spoofing Attacks on page 615](#)
- [Configuring Dynamic ARP Inspection to Prevent ARP Spoofing Attacks on page 633](#)
- [Unknown Unicast Forwarding on page 639](#)



## CHAPTER 23

# Configuring Device Security

- [Understanding Storm Control on page 561](#)
- [Example: Configuring Storm Control to Prevent Network Outages on page 563](#)
- [Understanding Unicast RPF on page 565](#)
- [Configuring Unicast RPF \(CLI Procedure\) on page 569](#)
- [Verifying Unicast RPF Status on page 571](#)
- [Disabling Unicast RPF \(CLI Procedure\) on page 573](#)
- [Understanding How Unicast Reverse Path Forwarding Prevents Spoofed IP Packet Forwarding on page 574](#)
- [Example: Configuring Unicast Reverse-Path-Forwarding Checking to Prevent DoS and DDoS Attacks on page 575](#)

## Understanding Storm Control

---

A traffic storm occurs when broadcast packets prompt receiving devices to broadcast packets in response. This prompts further responses, creating a snowball effect. The switch is flooded with packets, which creates unnecessary traffic that leads to poor performance or even a complete loss of service by some clients. Storm control causes a device to monitor traffic levels and take a specified action when a specified traffic level—called the *storm control level*—is exceeded, thus preventing packets from proliferating and degrading service. You can configure devices to drop broadcast and unknown unicast packets, shut down interfaces, or temporarily disable interfaces when the storm control level is exceeded.

Storm control is enabled by default on ELS platforms and disabled by default on non-ELS platforms. If storm control is enabled, the default level is 80 percent of the available bandwidth for ingress traffic. You can change the storm control level by configuring it as a specific bandwidth value. (The **level** configuration statement, which allows you to configure the storm control level as a percentage of the combined broadcast and unknown unicast streams, is deprecated and might be removed from future releases. We recommend that you phase out its use and replace it with the **bandwidth** statement.)

On switches other than QFX 10000 switches, storm control is applied in aggregate per port. That is, if you set a storm control level of 100 megabits and the sum of the broadcast, unknown unicast, and multicast traffic exceeds 100 megabits, storm control is initiated. On QFX 10000 switches, each traffic stream is measured independently per port, and

storm control is initiated only if one of the streams exceeds the storm control level. For example, if you set a storm control level of 100 megabits and the broadcast and unknown unicast streams on the port are each flowing at 80 mbps, storm control is not triggered. In this case, storm control is initiated only if one of the streams exceeds 100 mbps.



**NOTE:** Storm control is not enabled by default on MX platforms.



**NOTE:** When you configure storm control bandwidth, the value you configure is rounded off internally to the closest multiple of 64 Kbps, and the rounded-off value represents the bandwidth that is actually enforced. For example, if you configure a bandwidth limit of 150 Kbps, storm control enforces a bandwidth limit of 128 Kbps.



**NOTE:** On an FCoE-FC gateway, storm control must be disabled on all Ethernet interfaces that belong to an FCoE VLAN to prevent FCoE traffic from being dropped. Configuring storm control on an Ethernet interface that is included in an FCoE-FC gateway may have undesirable effects, including FCoE packet loss. After disabling storm control on all interfaces, enable storm control on any interfaces that are not part of an FCoE-FC gateway on which you want to use storm control. However, on an FCoE transit switch, you can enable storm control on interfaces that carry FCoE traffic.



**NOTE:** In implementations of storm control prior to Junos version 17.3, rate limiting ingress traffic on a given port was based on PE trap-registers wherein the ingress traffic was rate limited per traffic type. As an example, in earlier implementations on applying a storm-control profile for BUM traffic at say x%; traffic would be rate limited per stream: broadcast, unknown unicast, multicast traffic individually to x% of link bandwidth. This behavior is different from rest of Junos implementation for storm-control where the net or aggregate traffic is rate limited to x% instead of per traffic type (broadcast, unknown unicast and multicast traffic). The implementation for Junos version 17.3 and later is based on policer resource per PE chip instead of the trap-registers and is coherent with the storm-control behavior across different Junos platforms.



**CAUTION:** The Junos OS allows you to configure a storm control value that exceeds the bandwidth of the interface. If you configure an interface this way, storm control does not drop broadcast or unknown unicast packets even if they consume all the available bandwidth.

To recognize a storm, you must be able to identify when traffic has reached an abnormal level. Suspect a storm when operations begin timing out and network response times slow down. Users might be unable to access expected services. Monitor the percentage of broadcast and unknown unicast traffic in the network when it is operating normally. This data can then be used as a benchmark to determine when traffic levels are too high. You can then configure storm control to set the level at which you want to drop broadcast and unknown unicast traffic.



**NOTE:** On a QFX10002 switch, if storm control is configured on a VLAN port associated with an IRB interface, unregistered multicast traffic is classified as registered multicast traffic if IGMP snooping is enabled. If IGMP snooping is disabled, the traffic is classified as unknown unicast traffic.

#### Related Documentation

- [\*action-shutdown\*](#)
- [\*port-error-disable\*](#)
- [storm-control on page 997](#)

## Example: Configuring Storm Control to Prevent Network Outages

Using storm control can prevent problems caused by broadcast storms. You can configure storm control to rate-limit broadcast traffic and unknown unicast traffic at a specified level and to drop packets when the specified traffic level is exceeded, which prevents packets from proliferating and degrading service or causing a security issue. You can also configure the switch to shut down or temporarily disable an interface when the storm control limit is exceeded.

This example shows how to configure storm control:



**NOTE:** This example uses a Junos OS release that does not support the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that supports ELS, see [“Example: Configuring Storm Control to Prevent Network Outages” on page 610](#).

- [Requirements on page 563](#)
- [Overview and Topology on page 564](#)
- [Configuration on page 564](#)

## Requirements

This example uses the following hardware and software components:

- A switch
- Junos OS Release 11.1 or later

## Overview and Topology

A traffic storm occurs when broadcast packets prompt receiving devices to broadcast packets in response. This prompts further responses, creating a snowball effect. The switch is flooded with packets, and the resulting unnecessary traffic leads to poor performance or even a complete loss of service by some clients. Storm control causes a device to monitor traffic levels and take a specified action when a specified traffic level—called the *storm control level*—is exceeded, thus preventing packets from proliferating and degrading service.

Storm control monitors the incoming broadcast traffic and unknown unicast traffic and compares it with the level that you specify. If broadcast traffic and unknown unicast traffic exceed the specified level, the switch drops packets for the controlled traffic types. On non-ELS systems, storm control is disabled by default on all interfaces. If you enable storm control, the default level is 80 percent of the available bandwidth.

This example shows how to configure the storm control level on interface **xe-0/0/0** by setting the level to a traffic rate of 5000000 Kbps, based on the total of the combined broadcast and unknown unicast streams. If broadcast traffic and unknown unicast traffic exceed these levels, the switch drops packets for the controlled traffic types.

## Configuration

- Step-by-Step Procedure** To configure storm control for a 10-Gigabit Ethernet interface to the equivalent of 50 percent of the available bandwidth:
- Specify the level of allowed broadcast traffic and unknown unicast traffic on a specific interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface xe-0/0/0 bandwidth 5000000
```

- Results** Display the results of the configuration:

```
[edit ethernet-switching-options]
user@switch# show storm-control
interface xe-0/0/0 {
 bandwidth 5000000;
}
```

- Related Documentation**
- [Understanding Storm Control on page 561](#)
  - [Configuring Autorecovery for MAC Limited or Storm Control Interfaces \(CLI Procedure\) on page 435](#)
  - *action-shutdown*
  - *interface (Storm Control)*
  - *port-error-disable*

## Understanding Unicast RPF

Unicast reverse-path forwarding (RPF) helps protect the switch against denial-of-service (DoS) and distributed denial-of-service (DDoS) attacks by verifying the unicast source address of each packet that arrives on an ingress interface where unicast RPF is enabled. It also helps ensure that traffic arriving on ingress interfaces comes from a network source that the receiving interface can reach.

When you enable unicast RPF, by default the switch forwards a packet only if the receiving interface is the best return path to the packet's unicast source address. This is known as strict mode unicast RPF. You can also enable loose mode, which means that the system checks to see if the packet has a source address with a corresponding prefix in the routing table but does not check whether the receiving interface is the best return path to the packet's unicast source address.



**NOTE:** On Juniper Networks EX3200, EX4200, and EX4300 Ethernet Switches, the switch applies unicast RPF *globally* to all interfaces when unicast RPF is configured on any interface. For additional information, see “Limitations of the Unicast RPF Implementation on EX3200, EX4200, and EX4300 Switches” on page 568.



**NOTE:** Platform support depends on the Junos OS release in your installation.

- [Unicast RPF for Switches Overview on page 565](#)
- [Unicast RPF Implementation on page 566](#)
- [When to Enable Unicast RPF on page 566](#)
- [When Not to Enable Unicast RPF on page 568](#)
- [Limitations of the Unicast RPF Implementation on EX3200, EX4200, and EX4300 Switches on page 568](#)

## Unicast RPF for Switches Overview

Unicast RPF functions as an ingress filter that reduces the forwarding of IP packets that might be spoofing an address. By default, unicast RPF is disabled on the switch interfaces.

The type of unicast RPF provided on the switches—that is, strict mode unicast RPF is especially useful on untrusted interfaces. An untrusted interface is an interface where untrusted users or processes can place packets on the network segment.

The switch supports only the active paths method of determining the best return path back to a unicast source address. The active paths method looks up the best reverse path entry in the forwarding table. It does not consider alternate routes specified using routing-protocol-specific methods when determining the best return path.

If the forwarding table lists the receiving interface as the interface to use to forward the packet back to its unicast source, it is the best return path interface.

Use strict mode unicast RPF only on symmetrically routed interfaces. (For information about symmetrically routed interfaces, see [“When to Enable Unicast RPF” on page 566.](#))

For more information about strict unicast RPF, see RFC 3704, *Ingress Filtering for Multihomed Networks* at <http://www.ietf.org/rfc/rfc3704.txt>.

## Unicast RPF Implementation

This section includes:

- [Unicast RPF Packet Filtering on page 566](#)
- [Bootstrap Protocol \(BOOTP\) and DHCP Requests on page 566](#)
- [Default Route Handling on page 566](#)

---

### Unicast RPF Packet Filtering

When you enable unicast RPF on the switch, the switch handles traffic in the following manner:

- If the switch receives a packet on the interface that is the best return path to the unicast source address of that packet, the switch forwards the packet.
- If the best return path from the switch to the packet's unicast source address is not the receiving interface, the switch discards the packet.
- If the switch receives a packet that has a source IP address that does not have a routing entry in the forwarding table, the switch discards the packet.

---

### Bootstrap Protocol (BOOTP) and DHCP Requests

Bootstrap protocol (BOOTP) and DHCP request packets are sent with a broadcast MAC address and therefore the switch does not perform unicast RPF checks on them. The switch forwards all BOOTP packets and DHCP request packets without performing unicast RPF checks.

---

### Default Route Handling

If the best return path to the source is the default route (**0.0.0.0**) and the default route points to **reject**, the switch discards the packets. If the default route points to a valid network interface, the switch performs a normal unicast RPF check on the packets.



**NOTE:** On the EX4300, the default route is not used when the switch is configured in unicast RPF strict mode.

---

## When to Enable Unicast RPF


Enable unicast RPF when you want to ensure that traffic arriving on a network interface comes from a source that resides on a network that that interface can reach. You can



enable unicast RPF on untrusted interfaces to filter spoofed packets. For example, a common application for unicast RPF is to help defend an enterprise network from DoS/DDoS attacks coming from the Internet.

Enable unicast RPF only on symmetrically routed interfaces. A symmetrically routed interface uses the same route in both directions between the source and the destination, as shown in [Figure 37 on page 567](#). Symmetrical routing means that if an interface receives a packet, the switch uses the same interface to send a reply to the packet source (the receiving interface matches the forwarding-table entry for the best return path to the source).

*Figure 37: Symmetrically Routed Interfaces*

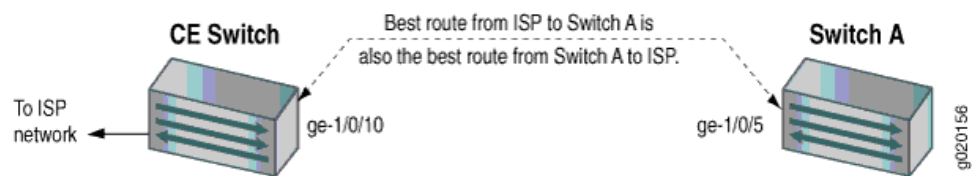

Enabling unicast RPF on asymmetrically routed interfaces (where different interfaces receive a packet and reply to its source) results in packets from legitimate sources being filtered (discarded) because the best return path is not the same interface that received the packet.

The following switch interfaces are most likely to be symmetrically routed and thus are candidates for unicast RPF enabling:

- The service provider edge to a customer
- The customer edge to a service provider
- A single access point out of the network (usually on the network perimeter)
- A terminal network that has only one link



**NOTE:** Because unicast RPF is enabled globally on EX3200, EX4200, and EX4300 switches, ensure that *all* interfaces are symmetrically routed before you enable unicast RPF on these switches. Enabling unicast RPF on asymmetrically routed interfaces results in packets from legitimate sources being filtered.



**TIP:** Enabling unicast RPF as close as possible to the traffic source stops spoofed traffic before it can proliferate or reach interfaces that do not have unicast RPF enabled.


## When Not to Enable Unicast RPF

Typically, you will not enable unicast RPF if:

- Switch interfaces are multihomed.
- Switch interfaces are trusted interfaces.
- BGP is carrying prefixes and some of those prefixes are not advertised or are not accepted by the ISP under its policy. (The effect in this case is the same as filtering an interface by using an incomplete access list.)
- Switch interfaces face the network core. Core-facing interfaces are usually asymmetrically routed.

An asymmetrically routed interface uses different paths to send and receive packets between the source and the destination, as shown in [Figure 38 on page 568](#). This means that if an interface receives a packet, that interface does not match the forwarding table entry as the best return path back to the source. If the receiving interface is not the best return path to the source of a packet, unicast RPF causes the switch to discard the packet even though it comes from a valid source.

*Figure 38: Asymmetrically Routed Interfaces*

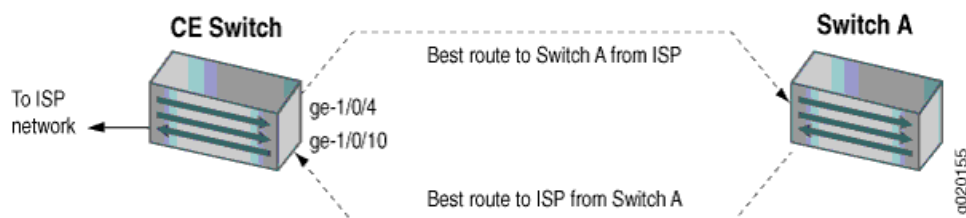

**NOTE:** Do not enable unicast RPF on EX3200, EX4200, and EX4300 switches if any switch interfaces are asymmetrically routed, because unicast RPF is enabled globally on all interfaces of these switches. All switch interfaces must be symmetrically routed for you to enable unicast RPF without the risk of the switch discarding traffic that you want to forward.

## Limitations of the Unicast RPF Implementation on EX3200, EX4200, and EX4300 Switches

On EX3200, EX4200, and EX4300 switches, the switch implements unicast RPF on a global basis. You cannot enable unicast RPF on a per-interface basis. Unicast RPF is globally disabled by default.

- When you enable unicast RPF on any interface, it is automatically enabled on all switch interfaces, including link aggregation groups (LAGs), integrated routing and bridging (IRB) interfaces, and routed VLAN interfaces (RVIs).
- When you disable unicast RPF on the interface (or interfaces) on which you enabled unicast RPF, it is automatically disabled on all switch interfaces.



**NOTE:** You must explicitly disable unicast RPF on every interface on which it was explicitly enabled or unicast RPF remains enabled on all switch interfaces.

QFX switches, OCX switches, and EX3200 and EX4200 switches do not perform unicast RPF filtering on equal-cost multipath (ECMP) traffic. The unicast RPF check examines only one best return path to the packet source, but ECMP traffic employs an address block consisting of multiple paths. Using unicast RPF to filter ECMP traffic on these switches can result in the switch discarding packets that you want to forward because the unicast RPF filter does not examine the entire ECMP address block.

**Related Documentation**

- [Example: Configuring Unicast RPF on an EX Series Switch](#)
- [Configuring Unicast RPF \(CLI Procedure\) on page 569](#)
- [Disabling Unicast RPF \(CLI Procedure\) on page 573](#)

## Configuring Unicast RPF (CLI Procedure)

Unicast reverse-path forwarding (RPF) can help protect your LAN from denial-of-service (DoS) and distributed denial-of-service (DDoS) attacks on untrusted interfaces. When you enable unicast RPF, by default the switch forwards a packet only if the receiving interface is the best return path to the packet's unicast source address. This is known as strict mode unicast RPF. You can also enable loose mode, which means that the system checks to see if the packet has a source address with a corresponding prefix in the routing table but does not check whether the receiving interface is the best return path to the packet's unicast source address.



**NOTE:** On EX3200, EX4200, and EX4300 switches, you can enable unicast RPF only globally—that is, on all switch interfaces. You cannot enable unicast RPF on a per-interface basis.

Before you begin:

- On an EX8200, EX6200, QFX Series switch, or OCX Series switch, ensure that the selected switch interface is symmetrically routed before you enable unicast RPF. A symmetrically routed interface is an interface that uses the same route in both directions between the source and the destination. Do not enable unicast RPF on asymmetrically routed interfaces. An asymmetrically routed interface uses different paths to send and receive packets between the source and the destination.
- On an EX3200, EX4200, or EX4300 switch, ensure that *all* switch interfaces are symmetrically routed before you enable unicast RPF on an interface. When you enable unicast RPF on any interface, it is enabled globally on all switch interfaces. Do not enable unicast RPF on asymmetrically routed interfaces. An asymmetrically routed interface uses different paths to send and receive packets between the source and the destination.

To enable unicast RPF, configure it explicitly on a selected customer-edge interface:

[edit interfaces]

```
user@switch# set interface-name unit 0 family inet rpf-check
```

To enable unicast RPF loose mode, enter:

[edit interfaces]

```
user@switch# set interface-name unit 0 family inet rpf-check mode loose
```



**BEST PRACTICE:** On EX3200, EX4200, and EX4300 switches, unicast RPF is enabled globally on *all* switch interfaces, regardless of whether you configure it explicitly on only one interface or only on some interfaces.

On EX3200, EX4200, and EX4300 switches, we recommend that you enable unicast RPF explicitly on either all interfaces or only one interface. To avoid possible confusion, do not enable it on only some interfaces:

- Enabling unicast RPF explicitly on only one interface makes it easier if you choose to disable it in the future because you must explicitly disable unicast RPF on every interface on which you explicitly enabled it. If you explicitly enable unicast RPF on two interfaces and you disable it on only one interface, unicast RPF is still implicitly enabled globally on the switch. The drawback of this approach is that the switch displays the flag that indicates that unicast RPF is enabled only on interfaces on which unicast RPF is explicitly enabled, so even though unicast RPF is enabled on all interfaces, this status is not displayed.
- Enabling unicast RPF explicitly on all interfaces makes it easier to know whether unicast RPF is enabled on the switch because every interface shows the correct status. (Only interfaces on which you explicitly enable unicast RPF display the flag that indicates that unicast RPF is enabled.) The drawback of this approach is that if you want to disable unicast RPF, you must explicitly disable it on every interface. If unicast RPF is enabled on any interface, it is implicitly enabled on all interfaces.

**Related  
Documentation**

- [Example: Configuring Unicast RPF on an EX Series Switch](#)
- [Verifying Unicast RPF Status on page 571](#)
- [Disabling Unicast RPF \(CLI Procedure\) on page 573](#)
- [Troubleshooting Unicast RPF](#)
- [Understanding Unicast RPF on page 565](#)

## Verifying Unicast RPF Status

**Purpose** Verify that unicast reverse-path forwarding (RPF) is enabled and is working on the interface.

**Action** Use one of the **show interfaces *interface-name*** commands with either the **extensive** or **detail** options to verify that unicast RPF is enabled and working on the switch. The example below displays output from the **show interfaces ge- extensive** command.

```

user@switch> show interfaces ge1/0/10 extensive
Physical interface: ge-1/0/10, Enabled, Physical link is Down
 Interface index: 139, SNMP ifIndex: 58, Generation: 140
 Link-level type: Ethernet, MTU: 1514, Speed: Auto, MAC-REWRITE Error: None,
 Loopback: Disabled, Source filtering: Disabled, Flow control: Enabled,
 Auto-negotiation: Enabled, Remote fault: Online
 Device flags : Present Running
 Interface flags: Hardware-Down SNMP-Traps Internal: 0x0
 Link flags : None
 CoS queues : 8 supported, 8 maximum usable queues
 Hold-times : Up 0 ms, Down 0 ms
 Current address: 00:19:e2:50:95:ab, Hardware address: 00:19:e2:50:95:ab
 Last flapped : Never
 Statistics last cleared: Never
 Traffic statistics:
 Input bytes : 0 0 bps
 Output bytes : 0 0 bps
 Input packets : 0 0 pps
 Output packets: 0 0 pps
 IPv6 transit statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets : 0
 Output packets: 0
 Input errors:
 Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0,
 L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
 FIFO errors: 0, Resource errors: 0
 Output errors:
 Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets: 0,

 FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
 Egress queues: 8 supported, 4 in use
 Queue counters:

```

|                | Queued packets | Transmitted packets | Dropped packets |
|----------------|----------------|---------------------|-----------------|
| 0 best-effort  | 0              | 0                   | 0               |
| 1 assured-forw | 0              | 0                   | 0               |
| 5 expedited-fo | 0              | 0                   | 0               |
| 7 network-cont | 0              | 0                   | 0               |

```

 Active alarms : LINK
 Active defects: LINK
 MAC statistics:
 Total octets Receive Transmit
 Total packets 0 0

```

```

Unicast packets 0 0
Broadcast packets 0 0
Multicast packets 0 0
CRC/Align errors 0 0
FIFO errors 0 0
MAC control frames 0 0
MAC pause frames 0 0
Oversized frames 0
Jabber frames 0
Fragment frames 0
VLAN tagged frames 0
Code violations 0
Filter statistics:
 Input packet count 0
 Input packet rejects 0
 Input DA rejects 0
 Input SA rejects 0
 Output packet count 0
 Output packet pad count 0
 Output packet error count 0
 CAM destination filters: 0, CAM source filters: 0
Autonegotiation information:
 Negotiation status: Incomplete
Packet Forwarding Engine configuration:
 Destination slot: 1

Logical interface ge-1/0/10.0 (Index 69) (SNMP ifIndex 59) (Generation 135)
Flags: Device-Down SNMP-Traps 0x0 Encapsulation: ENET2
Traffic statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
IPv6 transit statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
Local statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
Transit statistics:
 Input bytes : 0 0 bps
 Output bytes : 0 0 bps
 Input packets: 0 0 pps
 Output packets: 0 0 pps
IPv6 transit statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets: 0
 Output packets: 0
 Protocol inet, Generation: 144, Route table: 0
Flags: URPF
Addresses, Flags: Is-Preferred Is-Primary

```

**Meaning** The `show interfaces ge-1/0/10 extensive` command (and the `show interfaces ge-1/0/10 detail` command) displays in-depth information about the interface. The **Flags:** output

field near the bottom of the display reports the unicast RPF status. If unicast RPF has not been enabled, the **uRPF** flag is not displayed.

On EX3200 and EX4200 switches, unicast RPF is implicitly enabled on *all* switch interfaces, including aggregated Ethernet interfaces (also referred to as link aggregation groups or LAGs) and routed VLAN interfaces (RVIs) when you enable unicast RPF on a single interface. However, the unicast RPF status is shown as enabled only on interfaces for which you have explicitly configured unicast RPF. Thus, the **uRPF** flag is not displayed on interfaces for which you have not explicitly configured unicast RPF even though unicast RPF is implicitly enabled on all interfaces on EX3200 and EX4200 switches.

#### Related Documentation

- *show interfaces xe*
- *Example: Configuring Unicast RPF on an EX Series Switch*
- *Configuring Unicast RPF on ACX Series Routers*
- [Configuring Unicast RPF \(CLI Procedure\) on page 569](#)
- [Disabling Unicast RPF \(CLI Procedure\) on page 573](#)
- *Troubleshooting Unicast RPF*

## Disabling Unicast RPF (CLI Procedure)

Unicast reverse-path forwarding (RPF) can help protect your LAN from denial-of-service (DoS) and distributed denial-of-service (DDoS) attacks on untrusted interfaces. Unicast RPF filters traffic with source addresses that do not use the incoming interface as the best return path back to the source. If the network configuration changes so that an interface that has unicast RPF enabled becomes a trusted interface or becomes asymmetrically routed (the interface that receives a packet is not the best return path to the packet's source), disable unicast RPF.

To disable unicast RPF on an EX3200, EX4200, or EX4300 switch, you must delete it from every interface on which you explicitly configured it. If you do not disable unicast RPF on every interface on which you explicitly enabled it, it remains implicitly enabled on all interfaces. If you attempt to delete unicast RPF from an interface on which it was not explicitly enabled, the **warning: statement not found** message appears. If you do not disable unicast RPF on every interface on which you explicitly enabled it, unicast RPF remains implicitly enabled on all interfaces of the EX3200, EX4200, or EX4300 switch.

On EX8200, EX6200, QFX Series switches, and OCX Series switches, the switch does not apply unicast RPF to an interface unless you explicitly enable that interface for unicast RPF.

To disable unicast RPF, delete its configuration from the interface:

[edit interfaces]

user@switch# **delete** ge-1/0/10 unit 0 family inet **rpf-check**



**NOTE:** On EX3200, EX4200, and EX4300 switches, if you do not disable unicast RPF on every interface on which you explicitly enabled it, unicast RPF remains implicitly enabled on all interfaces.

**Related  
Documentation**

- [Example: Configuring Unicast RPF on an EX Series Switch](#)
- [Verifying Unicast RPF Status on page 571](#)
- [Configuring Unicast RPF \(CLI Procedure\) on page 569](#)
- [Understanding Unicast RPF on page 565](#)

---

## Understanding How Unicast Reverse Path Forwarding Prevents Spoofed IP Packet Forwarding

---

IP spoofing can occur during a denial-of-service (DoS) attack. IP spoofing allows an intruder to pass IP packets to a destination as genuine traffic, when in fact the packets are not actually meant for the destination. This type of spoofing is harmful because it consumes the destination's resources.

A unicast reverse-path-forwarding (RPF) check is a tool to reduce forwarding of IP packets that might be spoofing an address. A unicast RPF check performs a route table lookup on an IP packet's source address, and checks the incoming interface. The router or switch determines whether the packet is arriving from a path that the sender would use to reach the destination. If the packet is from a valid path, the router or switch forwards the packet to the destination address. If it is not from a valid path, the router or switch discards the packet. Unicast RPF is supported for the IPv4 and IPv6 protocol families, as well as for the virtual private network (VPN) address family.



**NOTE:** Reverse path forwarding is not supported on the interfaces you configure as tunnel sources. This affects only the transit packets exiting the tunnel.

**Related  
Documentation**

- [Example: Configuring Unicast Reverse-Path-Forwarding Checking to Prevent DoS and DDoS Attacks on page 575](#)



## Example: Configuring Unicast Reverse-Path-Forwarding Checking to Prevent DoS and DDoS Attacks

Unicast reverse path forwarding (RPF) helps protect against DoS and DDoS attacks by verifying the unicast source address of each packet that arrives on an ingress interface where unicast RPF is enabled.

This example shows how to help defend ingress interfaces against denial-of-service (DoS) and distributed denial-of-service (DDoS) attacks by configuring unicast RPF to filter incoming traffic.

- [Requirements on page 575](#)
- [Overview on page 575](#)
- [Configuration on page 576](#)
- [Verification on page 581](#)

### Requirements

In this example, no special configuration beyond device initialization is required.

### Overview

Large amounts of unauthorized traffic such as attempts to flood a network with fake (bogus) service requests in a DoS attack can consume network resources and deny service to legitimate users. One way to help prevent DoS and DDoS attacks is to verify that incoming traffic originates from legitimate network sources.

Unicast RPF helps ensure that a traffic source is legitimate (authorized) by comparing the source address of each packet that arrives on an interface to the forwarding table entry for its source address. If the device uses the same interface that the packet arrived on to reply to the packet's source, this verifies that the packet originated from an authorized source, and the device forwards the packet. If the device does not use the same interface that the packet arrived on to reply to the packet's source, the packet might have originated from an unauthorized source, and the device discards the packet.


In this example, Device B has unicast RPF configured. Device A is using OSPF to advertise a prefix for the link that connects to Device D. OSPF is enabled on the links between Device B and Device C and the links between Device A and Device C, but not on the links between Device A and Device B. Therefore, Device B learns about the route to Device D through Device C.

If ingress filtering is used in an environment where DHCP or BOOTP is used, it should be ensured that the packets with a source address of 0.0.0.0 and a destination address of 255.255.255.255 are allowed to reach the relay agent in routers when appropriate.

This example also includes a fail filter. When a packet fails the unicast RPF check, the fail filter is evaluated to determine if the packet should be accepted anyway. The fail filter in this example allows Device B's interfaces to accept Dynamic Host Configuration Protocol (DHCP) packets. The filter accepts all packets with a source address of 0.0.0.0 and a destination address of 255.255.255.255.

Figure 39 on page 576 shows the sample network.

Figure 39: Unicast RPF Sample Topology

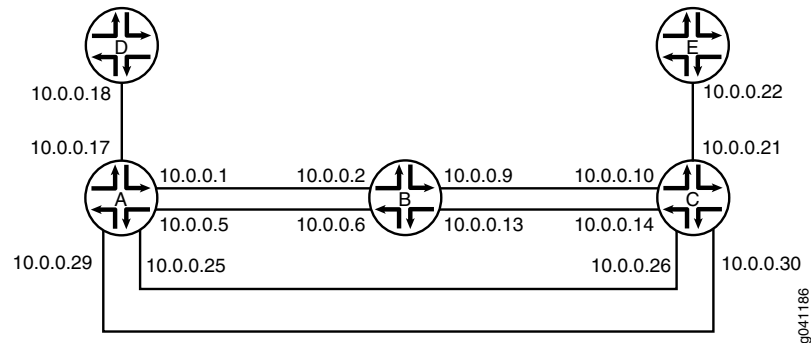

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device A**

```

set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces fe-0/0/2 unit 5 family inet address 10.0.0.5/30
set interfaces fe-0/0/1 unit 17 family inet address 10.0.0.17/30
set interfaces fe-0/1/1 unit 25 family inet address 10.0.0.25/30
set interfaces fe-1/1/1 unit 29 family inet address 10.0.0.29/30
set protocols ospf export send-direct
set protocols ospf area 0.0.0.0 interface fe-0/1/1.25
set protocols ospf area 0.0.0.0 interface fe-1/1/1.29
set policy-options policy-statement send-direct from protocol direct
set policy-options policy-statement send-direct from route-filter 10.0.0.16/30 exact
set policy-options policy-statement send-direct then accept

```

**Device B**

```

set interfaces fe-1/2/0 unit 2 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/1/1 unit 6 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-1/1/1 unit 6 family inet address 10.0.0.6/30
set interfaces fe-0/1/1 unit 9 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-0/1/1 unit 9 family inet address 10.0.0.9/30
set interfaces fe-0/1/0 unit 13 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-0/1/0 unit 13 family inet address 10.0.0.13/30
set protocols ospf area 0.0.0.0 interface fe-0/1/1.9
set protocols ospf area 0.0.0.0 interface fe-0/1/0.13
set routing-options forwarding-table unicast-reverse-path active-paths
set firewall filter rpf-special-case-dhcp term allow-dhcp from source-address 0.0.0.0/32
set firewall filter rpf-special-case-dhcp term allow-dhcp from destination-address 255.255.255.255/32
set firewall filter rpf-special-case-dhcp term allow-dhcp then count rpf-dhcp-traffic
set firewall filter rpf-special-case-dhcp term allow-dhcp then accept
set firewall filter rpf-special-case-dhcp term default then log
set firewall filter rpf-special-case-dhcp term default then reject

```

**Device C**      `set interfaces fe-1/2/0 unit 10 family inet address 10.0.0.10/30`  
`set interfaces fe-0/0/2 unit 14 family inet address 10.0.0.14/30`  
`set interfaces fe-1/0/2 unit 21 family inet address 10.0.0.21/30`  
`set interfaces fe-1/2/2 unit 26 family inet address 10.0.0.26/30`  
`set interfaces fe-1/2/1 unit 30 family inet address 10.0.0.30/30`  
`set protocols ospf area 0.0.0.0 interface fe-1/2/0.10`  
`set protocols ospf area 0.0.0.0 interface fe-0/0/2.14`  
`set protocols ospf area 0.0.0.0 interface fe-1/2/2.26`  
`set protocols ospf area 0.0.0.0 interface fe-1/2/1.30`

**Device D**      `set interfaces fe-1/2/0 unit 18 family inet address 10.0.0.18/30`

**Device E**      `set interfaces fe-1/2/0 unit 22 family inet address 10.0.0.22/30`

### Configuring Device A

**Step-by-Step Procedure**      The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure Device A:

1. Configure the interfaces.  

```
[edit interfaces]
user@A# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30

user@A# set fe-0/0/2 unit 5 family inet address 10.0.0.5/30

user@A# set fe-0/0/1 unit 17 family inet address 10.0.0.17/30

user@A# set fe-0/1/1 unit 25 family inet address 10.0.0.25/30

user@A# set fe-1/1/1 unit 29 family inet address 10.0.0.29/30
```
2. Configure OSPF.  

```
[edit protocols ospf]
user@A# set export send-direct
user@A# set area 0.0.0.0 interface fe-0/1/1.25
user@A# set area 0.0.0.0 interface fe-1/1/1.29
```
3. Configure the routing policy.  

```
[edit policy-options policy-statement send-direct]
user@A# set from protocol direct
user@A# set from route-filter 10.0.0.16/30 exact
user@A# set then accept
```
4. If you are done configuring Device A, commit the configuration.  

```
[edit]
```

```
user@A# commit
```

## Configuring Device B

---

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure Device B:

1. Configure the interfaces.

```
[edit interfaces]
user@B# set fe-1/2/0 unit 2 family inet address 10.0.0.2/30

user@B# set fe-1/1/1 unit 6 family inet address 10.0.0.6/30

user@B# set fe-0/1/1 unit 9 family inet address 10.0.0.9/30

user@B# set fe-0/1/0 unit 13 family inet address 10.0.0.13/30
```

2. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@B# set interface fe-0/1/1.9
user@B# set interface fe-0/1/0.13
```

3. Configure unicast RPF, and apply the optional fail filter.

```
[edit interfaces]
user@B# set fe-1/2/0 unit 2 family inet rpf-check fail-filter rpf-special-case-dhcp

user@B# set fe-1/1/1 unit 6 family inet rpf-check fail-filter rpf-special-case-dhcp

user@B# set fe-0/1/1 unit 9 family inet rpf-check fail-filter rpf-special-case-dhcp

user@B# set fe-0/1/0 unit 13 family inet rpf-check fail-filter rpf-special-case-dhcp
```

4. (Optional) Configure the fail filter that gets evaluated if a packet fails the RPF check.

```
[edit firewall filter rpf-special-case-dhcp]
user@B# set term allow-dhcp from source-address 0.0.0.0/32
user@B# set term allow-dhcp from destination-address 255.255.255.255/32
user@B# set term allow-dhcp then count rpf-dhcp-traffic
user@B# set term allow-dhcp then accept
user@B# set term default then log
user@B# set term default then reject
```

5. (Optional) Configure only active paths to be considered in the RPF check.

This is the default behavior.

```
[edit routing-options forwarding-table]
user@B# set unicast-reverse-path active-paths
```

6. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

## Results

Confirm your configuration by issuing the **show firewall**, **show interfaces**, **show protocols**, **show routing-options**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device A user@A# show interfaces
fe-1/2/0 {
 unit 1 {
 family inet {
 address 10.0.0.1/30;
 }
 }
}
fe-0/0/2 {
 unit 5 {
 family inet {
 address 10.0.0.5/30;
 }
 }
}
fe-0/0/1 {
 unit 17 {
 family inet {
 address 10.0.0.17/30;
 }
 }
}
fe-0/1/1 {
 unit 25 {
 family inet {
 address 10.0.0.25/30;
 }
 }
}
fe-1/1/1 {
 unit 29 {
 family inet {
 address 10.0.0.29/30;
 }
 }
}

user@A# show protocols
```

```
ospf {
 export send-direct;
 area 0.0.0.0 {
 interface fe-0/1/1.25;
 interface fe-1/1/1.29;
 }
}

user@A# show policy-options
policy-statement send-direct {
 from {
 protocol direct;
 route-filter 10.0.0.16/30 exact;
 }
 then accept;
}
```

**Device B**

```
user@B# show firewall
filter rpf-special-case-dhcp {
 term allow-dhcp {
 from {
 source-address {
 0.0.0.0/32;
 }
 destination-address {
 255.255.255.255/32;
 }
 }
 then {
 count rpf-dhcp-traffic;
 accept;
 }
 }
 term default {
 then {
 log;
 reject;
 }
 }
}

user@B# show interfaces
fe-1/2/0 {
 unit 2 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.2/30;
 }
 }
}
fe-1/1/1 {
 unit 6 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.6/30;
 }
 }
}
```

```

}
fe-0/1/1 {
 unit 9 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.9/30;
 }
 }
}
fe-0/1/0 {
 unit 13 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.13/30;
 }
 }
}

```

user@B# show protocols

```

ospf {
 area 0.0.0.0 {
 interface fe-0/1/1.9;
 interface fe-0/1/0.13;
 }
}

```

user@B# show routing-options

```

forwarding-table {
 unicast-reverse-path active-paths;
}

```

Enter the configurations on Device C, Device D, and Device E, as shown in [“CLI Quick Configuration” on page 576](#).

## Verification

Confirm that the configuration is working properly.

- [Confirm That Unicast RPF Is Enabled on page 581](#)
- [Confirm That the Source Addresses Are Blocked on page 582](#)
- [Confirm That the Source Addresses Are Unblocked on page 582](#)

### Confirm That Unicast RPF Is Enabled

**Purpose** Make sure that the interfaces on Device B have unicast RPF enabled.

**Action** user@B> show interfaces fe-0/1/0.13 extensive  
Logical interface fe-0/1/0.13 (Index 73) (SNMP ifIndex 553) (Generation 208)  
Flags: SNMP-Traps 0x4000 Encapsulation: ENET2  
Traffic statistics:  
Input bytes : 999390  
Output bytes : 1230122  
Input packets: 12563  
Output packets: 12613  
Local statistics:  
Input bytes : 998994  
Output bytes : 1230122  
Input packets: 12563  
Output packets: 12613  
Transit statistics:  
Input bytes : 396 0 bps  
Output bytes : 0 0 bps  
Input packets: 0 0 pps  
Output packets: 0 0 pps  
Protocol inet, MTU: 1500, Generation: 289, Route table: 22  
Flags: Sendbcst-pkt-to-re, uRPF  
RPF Failures: Packets: 0, Bytes: 0  
Addresses, Flags: Is-Preferred Is-Primary  
Destination: 10.0.0.12/30, Local: 10.0.0.13, Broadcast: 10.0.0.15,  
Generation: 241

**Meaning** The uRPF flag confirms that unicast RPF is enabled on this interface.

---

### Confirm That the Source Addresses Are Blocked

**Purpose** Use the ping command to make sure that Device B blocks traffic from unexpected source addresses.

**Action** From Device A, ping Device B's interfaces, using 10.0.0.17 as the source address.

```
user@A> ping 10.0.0.6 source 10.0.0.17
PING 10.0.0.6 (10.0.0.6): 56 data bytes
^C
--- 10.0.0.6 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss
```

**Meaning** As expected, the ping operation fails.

---

### Confirm That the Source Addresses Are Unblocked

**Purpose** Use the ping command to make sure that Device B does not block traffic when the RPF check is deactivated.

**Action** 1. Deactivate the RPF check on one of the interfaces.



2. Rerun the ping operation.

```
user@B> deactivate interfaces fe-1/1/1.6 family inet rpf-check

user@A> ping 10.0.0.6 source 10.0.0.17
PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: icmp_seq=0 ttl=63 time=1.316 ms
64 bytes from 10.0.0.2: icmp_seq=1 ttl=63 time=1.263 ms
^C
--- 10.0.0.2 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.263/1.289/1.316/0.027 ms
```

**Meaning** As expected, the ping operation succeeds.

**Related Documentation**

- [Understanding How Unicast Reverse Path Forwarding Prevents Spoofed IP Packet Forwarding on page 574](#)



# Storm Control

- Understanding Storm Control for Managing Traffic Levels on page 585
- Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587
- Configuring or Disabling Storm Control (CLI Procedure) on page 591
- Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 596
- Understanding Storm Control on EX Series Switches on page 597
- Disabling or Enabling Storm Control (CLI Procedure) on page 599
- Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602
- Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607
- Example: Configuring Storm Control to Prevent Network Outages on page 610
- Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 613

## Understanding Storm Control for Managing Traffic Levels

---



**NOTE:** This topic uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switching device is an EX Series switch and runs software that does support ELS, see *Using the Enhanced Layer 2 Software CLI*.

A traffic storm is generated when messages are broadcast on a network and each message prompts a receiving node to respond by broadcasting its own messages on the network. This, in turn, prompts further responses, creating a snowball effect. The LAN is suddenly flooded with packets, creating unnecessary traffic that leads to poor network performance or even a complete loss of network service.

Storm control enables the device to monitor traffic levels and to drop broadcast, multicast, and unknown unicast packets when a specified traffic level—called the *storm control level* or *storm control bandwidth*—is exceeded, thus preventing packets from proliferating and degrading the LAN. As an alternative to having the switching device drop packets,

you can configure storm control to shut down interfaces or temporarily disable interfaces (see the [action-shutdown](#) statement and the [recovery-timeout](#) statement) when the storm control level is exceeded.



**NOTE:** On Juniper Networks EX4300 Ethernet Switches, the factory default configuration enables storm control on all Layer 2 interfaces, with the storm control level set to 80 percent of the combined broadcast, multicast, and unknown unicast traffic streams.

Storm control is not enabled by default on Juniper Networks EX9200 Ethernet Switches.

Starting in Junos OS release 17.4R1 for MX Series routers, you can also configure storm control on logical systems. Storm control is not enabled by default on Juniper Networks MX Series routers.

You can customize the storm control level for a specific interface by explicitly configuring either bandwidth level or bandwidth percentage.

- **Bandwidth level**—Configures the storm control level as the bandwidth in kilobits per second of the applicable traffic streams on that interface.
- **Bandwidth percentage**—Configures the storm control level as a percentage of the available bandwidth used by the combined applicable traffic streams that are subject to storm control on that interface.



**NOTE:** You cannot configure both bandwidth level and bandwidth percentage for the same interface.

You can disable the storm control selectively for broadcast, multicast, or unknown unicast traffic, or any combination of traffic types. When disabling storm control for multicast traffic, you can specify the traffic to be either registered multicast or unregistered multicast. Registered multicast MAC addresses are multicast MAC addresses that are within the range 01-00-5E-00-00-00 through 01-00-5E-7F-FF-FF. This range has been reserved by the Internet Assigned Numbers Association (IANA) for multicast Ethernet addresses. Multicast MAC addresses that are outside this range are called unregistered multicast addresses.

The sending and receiving of broadcast, multicast, and unicast packets are part of normal LAN operation. Therefore, to recognize a storm, you must be able to identify when traffic has reached a level that is abnormal for your LAN. Suspect a storm when operations begin timing out and network response times slow down. As more packets flood the LAN, network users might be unable to access servers or e-mail.

Monitor the level of broadcast, multicast, and unknown unicast traffic in the LAN when it is operating normally. Use this data as a benchmark to determine when traffic levels are too high. Then configure storm control to set the level at which you want the switching

device to drop broadcast traffic, multicast traffic, unknown unicast traffic, or two or all three of those traffic types.



**NOTE:** When you configure storm control level on an aggregated Ethernet interface, the storm control level for each member of the aggregated Ethernet interface is set to that bandwidth or level. For example, if you configure a storm control level of 15,000 Kbps on ae1, and ae1 has two members, ge-0/0/0 and ge-0/0/1, each member has a storm control level of 15,000 Kbps. Thus, the storm control level on ae1 allows a traffic rate of up to 30,000 Kbps of combined traffic streams. Traffic might include broadcast, multicast, and unknown unicast traffic, depending upon the configuration.

Release History Table

| Release | Description                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------|
| 17.4R1  | Starting in Junos OS release 17.4R1 for MX Series routers, you can also configure storm control on logical systems. |

**Related Documentation**

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607](#)
- [Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602](#)
- [Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 596](#)
- [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)

**Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches**

Storm control enables you to prevent network outages caused by broadcast storms on the LAN. You can configure storm control on an EX Series switch to rate-limit broadcast traffic, multicast traffic, and unknown unicast traffic at a specified level so that the switch drops packets when the specified traffic level is exceeded, thus preventing packets from proliferating and degrading the LAN.

This example shows how to configure storm control on a single EX Series switch:

- [Requirements on page 588](#)
- [Overview and Topology on page 588](#)
- [Configuration on page 589](#)
- [Verification on page 589](#)

## Requirements

This example uses the following hardware and software components:

- One EX Series switch
- Junos OS Release 9.5 or later for EX Series switches

## Overview and Topology

A storm is generated when messages are broadcast on a network and each message prompts a receiving node to respond by broadcasting its own messages on the network. This, in turn, prompts further responses, creating a snowball effect and resulting in a broadcast storm that can cause network outages.

You can use storm control to prevent broadcast storms by specifying the amount, also known as the *storm control level*, of broadcast traffic, multicast traffic, and unknown unicast traffic to be allowed on an interface. You specify the storm control level as the traffic rate in kilobits per second (Kbps) of the combined applicable traffic streams.



---

### NOTE:

- On EX2200, EX3200, EX3300, and EX4200 switches—Storm control is not enabled for multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams.
  - On EX4500 and EX8200 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams.
  - On EX6200 switches—Storm control is not enabled for multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams. Storm control can be disabled for each type of traffic individually.
- 

Storm control monitors the level of applicable incoming traffic and compares it with the level that you specify. If the combined level of the applicable traffic exceeds the specified level, the switch drops packets for the controlled traffic types. As an alternative to having the switch drop packets, you can configure it to shut down interfaces or temporarily disable interfaces (see the [action-shutdown](#) statement or the [port-error-disable](#) statement) when the storm control level is exceeded.

The topology used in this example consists of one switch with 24 ports. The switch is connected to various network devices. This example shows how to configure the storm control level on interface ge-0/0/0 by setting the level to a traffic rate of 15,000 Kbps, based on the traffic rate of the combined applicable traffic streams. If the combined

traffic exceeds this level, the switch drops packets for the controlled traffic types to prevent a network outage.

## Configuration

**CLI Quick Configuration** To quickly configure storm control based on the traffic rate in Kbps per second of the combined traffic streams, copy the following command and paste it into the switch terminal window:

```
[edit]
set ethernet-switching-options storm-control interface ge-0/0/0 bandwidth 15000
```

**Step-by-Step Procedure** To configure storm control:

1. Specify the traffic rate in Kbps per second of the combined traffic streams on a specific interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface ge-0/0/0 bandwidth 15000
```

**Results** Display the results of the configuration:

```
[edit ethernet-switching-options]
user@switch> show storm-control
interface ge-0/0/0 {
 bandwidth 15000;
}
```

## Verification

### Verifying That the Storm Control Configuration Is in Effect

**Purpose** Confirm that storm control is limiting the rate of traffic on the interface.

**Action** Use the `show interfaces ge-0/0/0 detail` or `show interfaces ge-0/0/0 extensive` operational mode command to view traffic statistics on the storm controlled interface. The input rate (bps) must not exceed the storm control limit.

```
user@switch> show interfaces ge-0/0/0 extensive
Physical interface: ge-0/0/0, Enabled, Physical link is Up
 Interface index: 160, SNMP ifIndex: 503, Generation: 163
 Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto,
 BPDU Error: None, MAC-REWRITE Error: None, Loopback: Disabled,
 Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled,
 Remote fault: Online
 Device flags : Present Running
 Interface flags: SNMP-Traps Internal: 0x0
 Link flags : None
 CoS queues : 8 supported, 8 maximum usable queues
 Hold-times : Up 0 ms, Down 0 ms
 Current address: b0:c6:9a:67:90:84, Hardware address: b0:c6:9a:67:90:84
 Last flapped : 2013-05-16 22:46:42 UTC (14w3d 03:13 ago)
```

```

Statistics last cleared: Never
Traffic statistics:
Input bytes : 312742788 512 bps
Output bytes : 245552919 0 bps
Input packets: 3550009 1 pps
Output packets: 2622101 0 pps
IPv6 transit statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Dropped traffic statistics due to STP State:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Input errors:
Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Policed discards: 0,
L3 incompletes: 0, L2 channel errors: 0, L2 mismatch timeouts: 0,
FIFO errors: 0, Resource errors: 0
Output errors:
Carrier transitions: 0, Errors: 0, Drops: 0, Collisions: 0, Aged packets:
FIFO errors: 0, HS link CRC errors: 0, MTU errors: 0, Resource errors: 0
Egress queues: 8 supported, 4 in use
Queue counters: Queued packets Transmitted packets Dropped packets

0 best-effort 0 1 0

1 assured-forw 0 0 0

5 expedited-fo 0 0 0

7 network-cont 0 2622100 0

Queue number: Mapped forwarding classes
0 best-effort
1 assured-forwarding
5 expedited-forwarding
7 network-control
Active alarms : None
Active defects : None
MAC statistics:
Total octets Receive Transmit
Total packets 0 0
Unicast packets 0 0
Broadcast packets 0 0
Multicast packets 0 0
CRC/Align errors 0 0
FIFO errors 0 0
MAC control frames 0 0
MAC pause frames 0 0
Oversized frames 0
Jabber frames 0
Fragment frames 0
VLAN tagged frames 0
Code violations 0
Autonegotiation information:
Negotiation status: Incomplete
Packet Forwarding Engine configuration:
Destination slot: 0
Interface transmit statistics: Disabled

```



**Meaning** The traffic statistics **input bytes field** shows the ingress traffic rate at 512 bits per second (bps). This rate is within the storm control limit of 15,000 Kbps.

- Related Documentation**
- [Disabling or Enabling Storm Control \(CLI Procedure\) on page 599](#)
  - [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
  - [Understanding Storm Control on EX Series Switches on page 597](#)

## Configuring or Disabling Storm Control (CLI Procedure)



**NOTE:** This task uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switching device is an EX Series switch and runs software that does not support ELS, see [“Understanding Storm Control on EX Series Switches” on page 597](#). If your switching device is an EX Series switch and runs software that does support ELS, see *Using the Enhanced Layer 2 Software CLI*.

On EX4300 switches, the factory default configuration enables storm control on all Layer 2 switch interfaces. The default storm control level is set to 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams.

Storm control is not enabled by default on EX9200 switches or MX Series routers.

You can customize the storm control level for a specific interface. You specify the storm control level as the traffic rate in kilobits per second (Kbps) of the combined traffic streams or as the percentage of available bandwidth used by the combined traffic streams.

You can selectively disable storm control for broadcast, multicast, or unknown unicast traffic on all interfaces or on a specified interface. You can additionally disable storm control on registered or unregistered multicast traffic.

In the tasks described in this topic, you use the **[edit interfaces *interface-name* unit 0 family ethernet-switching]** hierarchy level to bind the storm control profile for EX Series switches and the **[edit interfaces *interface-name* unit 0 family bridge]** hierarchy level to bind the storm control profile for MX Series routers. Starting in Junos OS release 17.4R1 for MX Series routers, you can also configure storm control on logical systems.

- [Configuring Storm Control on page 592](#)
- [Disabling Storm Control on Broadcast Traffic on page 592](#)
- [Disabling Storm Control on All Multicast Traffic on page 593](#)
- [Disabling Storm Control on Registered Multicast Traffic on page 593](#)

- [Disabling Storm Control on Unregistered Multicast Traffic on page 594](#)
- [Disabling Storm Control on Unknown Unicast Traffic on page 594](#)
- [Disabling Storm Control on Multiple Types of Traffic on page 595](#)

## Configuring Storm Control

You can configure storm control for a specific interface. The storm control level can be customized by explicitly configuring either the bandwidth level or the bandwidth percentage.

- **bandwidth-level**—Configures the storm control level as the bandwidth in kilobits per second of the combined traffic streams.
- **bandwidth-percentage**—Configures the storm control level as a percentage of the available bandwidth used by the combined traffic streams.

To configure storm control:

1. Create a storm control profile and set the storm control level as the traffic rate in kilobits per second of the combined traffic streams:

```
[edit forwarding-options]
user@device# set storm-control-profiles profile-name all bandwidth-level kbps
```



**NOTE:** The name of the storm control profile can contain no more than 127 characters.

2. Bind the storm control profile to a logical interface:

For EX Series switches:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching storm-control
profile-name
```

For MX Series routers:

```
[edit]
user@device# set interfaces interface-name unit 0 family bridge storm-control profile-name
```

## Disabling Storm Control on Broadcast Traffic

To disable storm control on broadcast traffic:

1. Create a storm control profile with the storm control level set as the traffic rate in kilobits per second of the combined traffic streams, and exclude broadcast traffic:

```
[edit forwarding-options]
user@device# set storm-control-profiles profile-name all bandwidth-level kbps no-broadcast
```

2. Bind the storm control profile to a logical interface:

For EX Series switches:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching storm-control
profile-name
```

For MX Series routers:

```
[edit]
user@device# set interfaces interface-name unit 0 family bridge storm-control profile-name
```

## Disabling Storm Control on All Multicast Traffic

To disable storm control on all multicast traffic:

1. Create a storm control profile with the storm control level set as the traffic rate in kilobits per second of the combined traffic streams, but exclude multicast traffic:

```
[edit forwarding-options]
user@device# set storm-control-profiles profile-name all bandwidth-level kbps no-multicast
```

2. Bind the storm control profile to a logical interface:

For EX Series switches:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching storm-control
profile-name
```

For MX Series routers:

```
[edit]
user@device# set interfaces interface-name unit 0 family bridge storm-control profile-name
```

## Disabling Storm Control on Registered Multicast Traffic

To disable storm control on only registered multicast traffic:

1. Create a storm control profile with the storm control level set as the traffic rate in kilobits per second of the combined traffic streams, but exclude registered multicast traffic:

```
[edit forwarding-options]
user@device# set storm-control-profiles profile-name all bandwidth-level kbps
no-registered-multicast
```

2. Bind the storm control profile to a logical interface:

For EX Series switches:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching storm-control
profile-name
```

For MX Series routers:

```
[edit]
user@device# set interfaces interface-name unit 0 family bridge storm-control profile-name
```

## Disabling Storm Control on Unregistered Multicast Traffic

To disable storm control on only unregistered multicast traffic:

1. Create a storm control profile with the storm control level set as the traffic rate in kilobits per second of the combined traffic streams, but exclude unregistered multicast traffic:

```
[edit forwarding-options]
user@device# set storm-control-profiles profile-name all bandwidth-level kbps
no-unregistered-multicast
```

2. Bind the storm control profile to a logical interface:

For EX Series switches:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching storm-control
profile-name
```

For MX Series routers:

```
[edit]
user@device# set interfaces interface-name unit 0 family bridge storm-control profile-name
```

## Disabling Storm Control on Unknown Unicast Traffic

To disable storm control on only unknown unicast traffic:

1. Create a storm control profile with the storm control level set as the traffic rate in kilobits per second of the combined traffic streams, but exclude unregistered multicast traffic:

```
[edit forwarding-options]
user@device# set storm-control-profiles profile-name all bandwidth-level kbps
no-unknown-unicast
```

2. Bind the storm control profile to a logical interface:

For EX Series switches:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching storm-control
profile-name
```

For MX Series routers:

```
[edit]
user@device# set interfaces interface-name unit 0 family bridge storm-control profile-name
```

Disabling Storm Control on Multiple Types of Traffic

To disable storm control on multiple types of traffic; for example, broadcast and multicast traffic:

- 1. Create a storm control profile with the storm control level set as the traffic rate in kilobits per second of the combined traffic streams but exclude broadcast and multicast traffic:

```
[edit forwarding-options]
user@device# set storm-control-profiles profile-name all bandwidth-level kbps no-broadcast
no-multicast
```

- 2. Bind the storm control profile to a logical interface:

For EX Series switches:

```
[edit]
user@switch# set interfaces interface-name unit 0 family ethernet-switching storm-control
profile-name
```

For MX Series routers:

```
[edit]
user@device# set interfaces interface-name unit 0 family bridge storm-control profile-name
```

Release History Table

| Release | Description                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------|
| 17.4R1  | Starting in Junos OS release 17.4R1 for MX Series routers, you can also configure storm control on logical systems. |

Related Documentation

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607](#)
- [Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602](#)
- [Understanding Storm Control for Managing Traffic Levels on page 585](#)

## Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces (CLI Procedure)



**NOTE:** This example uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switching device is an EX Series switch and runs software that does not support ELS, see [“Understanding Storm Control on EX Series Switches” on page 597](#). If your switching device is an EX Series switch and runs software that does support ELS, see *Using the Enhanced Layer 2 Software CLI*.

An Ethernet switching access interface on a switching device might shut down or be disabled as a result of one of the following port-security or storm-control configurations:

- MAC limiting—(Not supported on MX Series routers) The **mac-limit** statement is configured with the **action-shutdown** statement.
- MAC move limiting—(Not supported on MX Series routers) The **mac-move-limit** statement is configured with the **action-shutdown** statement.
- Storm control—The **storm-control** statement is configured with the **action-shutdown** statement.

You can configure the switching device to automatically restore the disabled interfaces to service after a specified period of time. The specified time configured in the **recovery-timeout** statement applies to all the interfaces that have been disabled due to MAC limiting, MAC move limiting, or storm control errors.



**NOTE:** To enable autorecovery, specify the recovery timeout value for the interfaces to recover automatically. There is no default recovery timeout. If you do not specify a timeout value, you need to use the [clear ethernet-switching recovery-timeout](#) command for EX Series switches and the [clear bridge recovery-timeout](#) command for MX Series routers to clear the errors and restore the interfaces to service.

To specify the recovery timeout period for the interface:

- Set the **recovery-timeout** statement.

For EX Series switches:

```
[edit interfaces interface-name unit 0 family ethernet-switching]
user@switch# set recovery-timeout seconds
```

For MX Series routers:

```
[edit interfaces interface-name unit 0 family bridge]
user@switch# set recovery-timeout seconds
```

- Related Documentation**
- [Configuring MAC Limiting \(CLI Procedure\) on page 436](#)
  - [Configuring MAC Move Limiting \(CLI Procedure\) on page 440](#)
  - [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)

## Understanding Storm Control on EX Series Switches

A traffic storm is generated when messages are broadcast on a network and each message prompts a receiving node to respond by broadcasting its own messages on the network. This, in turn, prompts further responses, creating a snowball effect. The LAN is suddenly flooded with packets, creating unnecessary traffic that leads to poor network performance or even a complete loss of network service. Storm control enables the switch to monitor traffic levels and to drop broadcast, multicast, and unknown unicast packets when a specified traffic level—called the *storm control level*—is exceeded, thus preventing packets from proliferating and degrading the LAN. As an alternative to having the switch drop packets, you can configure it to shut down interfaces or temporarily disable interfaces (see the [action-shutdown](#) statement or the [port-error-disable](#) statement) when the storm control level is exceeded.

The default configuration of storm control differs according to the switch line:

- On EX2200, EX3200, EX3300, EX4200, and EX6200 access ports—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control for broadcast and unknown unicast traffic on all switch interfaces, with the storm control level set to 80 percent of the available bandwidth used by the broadcast and unknown unicast traffic streams.
- On EX4500 and EX8200 switches—The factory default configuration enables storm control on all switch interfaces, with the storm control level set to 80 percent of the combined broadcast, multicast, and unknown unicast traffic streams.

You can customize the configuration of storm control, as follows:



**NOTE:** You can customize the storm control level for a specific interface by explicitly configuring either [bandwidth](#) or [level](#).

- **bandwidth**—Configures the storm control level as the bandwidth in kilobits per second of the applicable traffic streams on that interface.
- **level**—Configures the storm control level as a percentage of the available bandwidth used by the combined applicable traffic streams that are subject to storm control on that interface.

You cannot configure both bandwidth and level for the same interface.

- You can change the storm control level for a specific interface by configuring the bandwidth value or the storm control level for the combined traffic streams that are subject to storm control on that interface. The type of traffic stream (broadcast, unknown unicast, and multicast) that is included within the bandwidth or storm control level consideration depends on which types of traffic are enabled for storm control monitoring on that interface.
- You can enable storm control selectively for multicast traffic on a specific interface or on all interfaces.
- On all switches—You can disable storm control selectively for either broadcast streams, or multicast streams, or for unknown unicast streams.
- On EX8200 switches—You can also disable storm control selectively for either registered multicast traffic, or unregistered multicast traffic, or for both types of multicast traffic. Registered multicast MAC addresses are multicast MAC addresses that are within the range 01-00-5E-00-00-00 through 01-00-5E-7F-FF-FF. This range has been reserved by the Internet Assigned Numbers Association (IANA) for multicast Ethernet addresses. Multicast MAC addresses that are outside this range are called unregistered multicast addresses.

The sending and receiving of broadcast, multicast, and unicast packets are part of normal LAN operation, so to recognize a storm, you must be able to identify when traffic has reached a level that is abnormal for your LAN. Suspect a storm when operations begin timing out and network response times slow down. As more packets flood the LAN, network users might be unable to access servers or e-mail.

Monitor the level of broadcast, multicast, and unknown unicast traffic in the LAN when it is operating normally. Use this data as a benchmark to determine when traffic levels are too high. Then configure storm control to set the level at which you want to drop broadcast traffic, multicast traffic, unknown unicast traffic, or two or all three of those traffic types.



**NOTE:** When you configure storm control bandwidth or storm control level on an aggregated Ethernet interface, the storm control level for each member of the aggregated Ethernet interface is set to that bandwidth or level. For example, if you configure a storm control bandwidth of 15,000 Kbps on ae1, and ae1 has two members, ge-0/0/0 and ge-0/0/1, each member has a storm control level of 15,000 Kbps. Thus, the storm control level on ae1 allows a traffic rate of up to 30,000 Kbps of combined traffic streams. Traffic might include broadcast, multicast, and unknown unicast traffic, depending upon the configuration.

**Related Documentation**

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587](#)
- [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
- [Disabling or Enabling Storm Control \(CLI Procedure\) on page 599](#)



## Disabling or Enabling Storm Control (CLI Procedure)



**NOTE:** If your switching device is an EX Series switch and runs Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style, see [“Configuring or Disabling Storm Control \(CLI Procedure\)” on page 591](#).

The factory default configuration enables storm control on all EX Series switch interfaces, with the storm control level set to 80 percent of the combined applicable traffic streams, as follows:

- On EX2200, EX3200, EX3300, and EX4200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams.
- On EX4500 and EX8200 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the combined broadcast, multicast, and unknown unicast streams.
- On EX6200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams. Storm control can be disabled for each type of traffic individually.

You can disable storm control for all the applicable types of traffic on all interfaces or on a specified interface, as follows:

- On all switches—You can selectively disable storm control for broadcast streams, multicast streams, or for unknown unicast streams.
- On EX8200 switches—You can additionally selectively disable storm control on registered multicast traffic, on unregistered multicast traffic, or on both types of multicast traffic.
- On EX6200 switches—You can selectively disable storm control for each type of traffic individually.

You can enable storm control for multicast traffic (both registered and unregistered) on all interfaces or on a specific interface. This applies to all switches.

This topic describes:

- [Disabling Storm Control on Broadcast Traffic on page 601](#)
- [Disabling Storm Control on All Multicast Traffic on page 601](#)
- [Disabling Storm Control on Registered Multicast Traffic \(EX8200 Switches Only\) on page 601](#)
- [Disabling Storm Control on Unregistered Multicast Traffic \(EX8200 Switches Only\) on page 601](#)

- [Disabling Storm Control on Unknown Unicast Traffic on page 602](#)
- [Enabling Storm Control on Multicast Traffic on page 602](#)

## Disabling Storm Control on Broadcast Traffic

To disable storm control on broadcast traffic:

- For all interfaces:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface all no-broadcast
```

- For an individual interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface interface-name no-broadcast
```

## Disabling Storm Control on All Multicast Traffic

To disable storm control on all multicast traffic:

- For all interfaces:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface all no-multicast
```

- For an individual interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface interface-name no-multicast
```

## Disabling Storm Control on Registered Multicast Traffic (EX8200 Switches Only)

To disable storm control only on registered multicast traffic (on EX8200 switches only):

- For all interfaces:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface all no-registered-multicast
```

- For an individual interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface interface-name no-registered-multicast
```

## Disabling Storm Control on Unregistered Multicast Traffic (EX8200 Switches Only)

To disable storm control only on unregistered multicast traffic (on EX8200 switches only):

- For all interfaces:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface all no-unregistered-multicast
```

- For an individual interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface interface-name no-unregistered-multicast
```

## Disabling Storm Control on Unknown Unicast Traffic

To disable storm control on unknown unicast traffic:

- For all interfaces:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface all no-unknown-unicast
```

- For an individual interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface interface-name no-unknown-unicast
```

## Enabling Storm Control on Multicast Traffic

To enable storm control on multicast traffic:

- For all interfaces:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface all multicast
```

- For an individual interface:

```
[edit ethernet-switching-options]
user@switch# set storm-control interface interface-name multicast
```

### Related Documentation

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587](#)
- [Understanding Storm Control on EX Series Switches on page 597](#)

## Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers

Storm control enables you to prevent network outages caused by broadcast storms on the LAN. You can configure storm control on an MX Series router to rate-limit broadcast traffic, multicast traffic, and unknown unicast traffic at a specified level and to have

packets dropped when the specified traffic level is exceeded, thereby preventing packets from proliferating and degrading the LAN.

Storm control is not enabled by default on MX Series routers.

This example shows how to configure storm control on a pair of MX Series routers running Junos OS with Enhanced Layer 2 Software (ELS).

- [Requirements on page 603](#)
- [Overview and Topology on page 603](#)
- [Configuration on page 604](#)
- [Verification on page 606](#)

## Requirements

This example uses the following hardware and software components:

- Two MX Series routers
- Junos OS Release 14.1 or later with ELS
- A traffic generator that can send broadcast and unknown unicast traffic at a rate that exceeds 100 Kbps
- A second host

## Overview and Topology


A storm is generated when messages are broadcast on a network and each message prompts a receiving node to respond by broadcasting its own messages on the network. This, in turn, prompts further responses, creating a snowball effect and resulting in a broadcast storm that can cause network outages.

You can use storm control to prevent broadcast storms by specifying the amount, also known as the *storm control level*, of broadcast traffic, multicast traffic, and unknown unicast traffic to be allowed on an interface. You specify the storm control level as the traffic rate in kilobits per second (Kbps) of the combined applicable traffic streams or as the percentage of available bandwidth used by the combined applicable traffic streams.

Storm control monitors the level of applicable incoming traffic and compares it with the level that you specify. If the combined level of the applicable traffic exceeds the specified level, the router drops packets for the controlled traffic types. As an alternative to having the router drop packets, you can configure storm control to shut down interfaces or temporarily disable interfaces (see the [action-shutdown](#) statement or the [recovery-timeout](#) statement) when the storm control level is exceeded.

This example shows how to configure the storm control level on interface ge-0/0/1 by setting the level to a traffic rate of 100 Kbps. The topology used consists of two routers that could be connected to various network devices. If the combined traffic exceeds this level, the router drops packets for the controlled traffic types to prevent a network outage. (Starting in Junos OS release 17.4R1 for MX Series routers, you can also configure storm control on logical systems.)

Figure 40: Example Storm Control to Prevent Network Outages

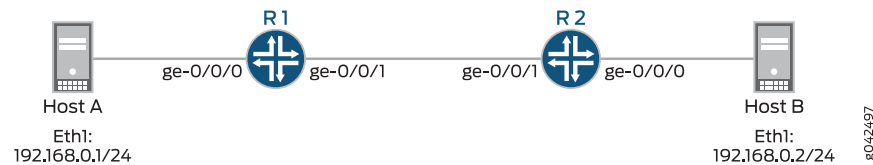

## Configuration

This example excludes multicast traffic from the storm traffic. Many protocols use multicast for control traffic, and for that reason network administrators and operators may want to keep multicast working to avoid obstructing protocol operation.

### CLI Quick Configuration

To quickly configure storm control based on the traffic rate in Kbps of the combined traffic streams, copy the following commands and paste them into the terminal window. The configurations of routers R1 and R2 are exactly the same:

```

set interfaces ge-0/0/0 unit 0 family bridge interface-mode access
set interfaces ge-0/0/0 unit 0 family bridge vlan-id 15
set interfaces ge-0/0/1 vlan-tagging
set interfaces ge-0/0/1 unit 0 family bridge interface-mode trunk
set interfaces ge-0/0/1 unit 0 family bridge vlan-id-list 15
set interfaces ge-0/0/1 unit 0 family bridge storm-control sc
set interfaces ge-0/0/1 unit 0 family bridge recovery-timeout 120
set bridge-domains bd1 domain-type bridge vlan-id 15
set forwarding-options storm-control-profiles sc all bandwidth-level 100 no multicast
set forwarding-options storm-control-profiles sc action-shutdown

```

### Step-by-Step Procedure

To configure storm control:

1. Configure a storm control profile, **sc**, and specify the traffic rate in Kbps of the combined traffic streams. Exclude multicast traffic from the storm control profile.

```

[edit]
user@host# set forwarding-options storm-control-profiles sc all bandwidth-level 100 no-multicast
user@host# set forwarding-options storm-control-profiles sc action-shutdown

```

2. Bind the storm control profile **sc** to a logical interface. Remember to do this for both interfaces between the routers.

```

[edit]
user@host# set interfaces ge-0/0/1 unit 0 family bridge storm-control sc

```

3. Configure interface **ge-0/0/1** (the interface between routers). Do this for both interfaces between the routers.

```

[edit]
user@host# set interfaces ge-0/0/1 vlan-tagging
user@host# set interfaces ge-0/0/1 unit 0 family bridge interface-mode trunk
user@host# set interfaces ge-0/0/1 unit 0 family bridge vlan-id-list 15

```

```
user@host#set interfaces ge-0/0/1 unit 0 family bridge recovery-timeout 120
```

4. Configure interface ge-0/0/0 (the interface from host to router). Remember to do this for both interfaces between the routers.

```
[edit]
user@host# set interfaces ge-0/0/0 unit 0 family bridge interface-mode access
user@host# set interfaces ge-0/0/0 unit 0 family bridge vlan-id 15
```

5. Set the bridge domain domain type and VLAN ID.

```
[edit]
user@host# set bridge-domains bd1 domain-type bridge vlan-id 15
```

**Results** Display the results of the configuration:

```
[edit forwarding-options]
user@router> show storm-control-profiles sc
all {
 bandwidth-level 100;
 no-multicast;
}
action-shutdown;

[edit]
user@router> show interfaces ge-0/0/0
unit 0 {
 family bridge {
 interface-mode access;
 vlan-id 15;
 }
}

[edit]
user@router> show interfaces ge-0/0/1
vlan-tagging;
unit 0 {
 family bridge {
 interface-mode trunk;
 vlan-id-list 15;
 storm-control sc;
 recovery-timeout 120;
 }
}

[edit]
user@router> show bridge-domains bd1
domain-type bridge;
vlan-id 15;
```

## Verification

### Verifying That the Storm Control Configuration Is in Effect

**Purpose** Confirm that storm control is limiting the rate of traffic on the interface.

- Action**
1. From Host A to Host B, use a traffic generator to send broadcast and unknown unicast traffic at a rate that exceeds 100 Kbps.
  2. Verify on device R1's ge-0/0/0 interface that traffic is entering at a rate that exceeds 100 Kbps.

```
user@R1# run show interfaces detail ge-0/0/0
Physical interface: ge-0/0/0, Enabled, Physical link is Up
 Interface index: 137, SNMP ifIndex: 513, Generation: 140
 Link-level type: Ethernet-Bridge, MTU: 1514, MRU: 1522, Speed: 1000mbps,
 BPDU Error: None, MAC-REWRITE Error: None, Loopback: Disabled,
 Source filtering: Disabled, Flow control: Enabled
 Pad to minimum frame size: Disabled
 Device flags : Present Running
 Interface flags: SNMP-Traps Internal: 0x20004000
 Link flags : None
 CoS queues : 8 supported, 8 maximum usable queues
 Hold-times : Up 0 ms, Down 0 ms
 Current address: 00:05:86:71:6a:00, Hardware address: 00:05:86:71:6a:00
 Last flapped : 2014-05-20 14:43:25 PDT (1w1d 01:20 ago)
 Statistics last cleared: 2014-05-28 15:59:39 PDT (00:04:02 ago)
 Traffic statistics:
 Input bytes : 830088 180432 bps
 Output bytes : 0 0 bps
 Input packets : 8472 230 pps
 Output packets: 0 0 pps
 IPv6 transit statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets : 0
 Output packets: 0
 Active alarms : None
 Active defects : None
 Interface transmit statistics: Disabled
```

The Input bytes field shows the ingress traffic rate in bytes per second (bps). The input rate is within the storm control limit of 100 Kbps.

3. Verify that interface ge-0/0/1 on R1 is down (Admin down).

```
user@R1# run show interfaces ge-0/0/1.0 terse
Interface Admin Link Proto Local Remote
ge-0/0/1.0 down up bridge
```



Because the link remains up, control traffic continues to flow.

- 4. After the timeout period of 120 seconds (2 minutes), verify that the interface comes back up.

```
user@R1# run show interfaces ge-0/0/1.0 terse
Interface Admin Link Proto Local Remote
ge-0/0/1.0 up up bridge
```

Release History Table

| Release | Description                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------|
| 17.4R1  | (Starting in Junos OS release 17.4R1 for MX Series routers, you can also configure storm control on logical systems.) |

Related Documentation

- [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)
- [Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 596](#)

Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches



**NOTE:** This example uses Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches” on page 587](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

Storm control enables you to prevent network outages caused by broadcast storms on the LAN. You can configure storm control on an EX Series switch to rate-limit broadcast, unknown unicast, and multicast (BUM) traffic, and at a specified level and to have packets dropped when the specified traffic level is exceeded, thereby preventing packets from proliferating and degrading the LAN.



**NOTE:** On EX4300 switches, the factory default configuration enables storm control on all Layer 2 interfaces, with the storm control level set to 80 percent of the available bandwidth used by the applicable traffic streams on that interface.

This example shows how to configure storm control on an EX Series switch running Junos OS with ELS.

- [Requirements on page 608](#)
- [Overview and Topology on page 608](#)

- [Configuration on page 608](#)
- [Verification on page 609](#)

## Requirements

This example uses the following hardware and software components:

- One EX Series switch running Junos OS with ELS
- Junos OS Release 13.2 or later for EX Series switches

## Overview and Topology

A storm is generated when messages are broadcast on a network and each message prompts a receiving node to respond by broadcasting its own messages on the network. This, in turn, prompts further responses, creating a snowball effect and resulting in a broadcast storm that can cause network outages.

You can use storm control to prevent broadcast storms by specifying the amount, also known as the *storm control level*, of BUM traffic to be allowed on an interface. You specify the storm control level as the traffic rate in kilobits per second (Kbps) of the combined applicable traffic streams or as the percentage of available bandwidth used by the combined applicable traffic streams.

Storm control monitors the level of applicable incoming traffic and compares it with the level that you specify. If the combined level of the applicable traffic exceeds the specified level, the switch drops packets for the controlled traffic types. As an alternative to having the switch drop packets, you can configure storm control to have the switch shut down interfaces or temporarily disable interfaces (see the [action-shutdown](#) statement or the [recovery-timeout](#) statement) when the storm control level is exceeded.

The topology used in this example consists of one switch connected to various network devices. This example shows how to configure the storm control level on interface ge-0/0/0 by setting the level to a traffic rate of 15,000 Kbps, based on the traffic rate of the combined applicable traffic streams. If the combined traffic exceeds this level, the switch drops packets for the controlled traffic types to prevent a network outage.

## Configuration

### CLI Quick Configuration

To quickly configure storm control based on the traffic rate in Kbps of the combined traffic streams, copy the following command and paste it into the switch terminal window:

```
[edit]
set forwarding-options storm-control-profiles sc all bandwidth-level 15000
set interfaces ge-0/0/0 unit 0 family ethernet-switching storm-control sc
```

### Step-by-Step Procedure

To configure storm control:

1. Configure a storm control profile, **sc**, and specify the traffic rate in Kbps of the combined traffic streams:

```
[edit]
```

```
user@switch# set forwarding-options storm-control-profiles sc all bandwidth-level 15000
```



**NOTE:** The name of the storm control profile can contain no more than 127 characters.

2. Bind the storm control profile, `sc`, to a logical interface:

```
[edit]
user@switch# set interfaces ge-0/0/0 unit 0 family ethernet-switching storm-control sc
```

**Results** Display the results of the configuration:

```
[edit forwarding-options]
user@switch# show storm-control-profiles sc
all {
 bandwidth 15000;
}

[edit]
user@switch# show interfaces ge-0/0/0
unit 0 {
 family ethernet-switching {
 vlan {
 members default;
 }
 storm-control sc;
 }
}
```

## Verification

### Verifying That the Storm Control Configuration Is in Effect

**Purpose** Confirm that storm control is limiting the rate of traffic on the interface.

**Action** Use the `show interfaces ge-0/0/0 detail` operational mode command to view traffic statistics on the storm-controlled interface. The input rate (in bits per second) must not exceed the storm control limit.

```
user@switch> show interfaces ge-0/0/0 detail
Physical interface: ge-0/0/0, Enabled, Physical link is Up
Interface index: 160, SNMP ifIndex: 503, Generation: 163
Link-level type: Ethernet, MTU: 1514, Speed: Auto, Duplex: Auto,
BPDU Error: None, MAC-REWRITE Error: None, Loopback: Disabled,
Source filtering: Disabled, Flow control: Enabled, Auto-negotiation: Enabled,
Remote fault: Online
Device flags : Present Running
Interface flags: SNMP-Traps Internal: 0x0
Link flags : None
CoS queues : 8 supported, 8 maximum usable queues
```

```
Hold-times : Up 0 ms, Down 0 ms
Current address: b0:c6:9a:67:90:84, Hardware address: b0:c6:9a:67:90:84
Last flapped : 2013-05-16 22:46:42 UTC (14w3d 03:13 ago)
Statistics last cleared: Never
Traffic statistics:
 Input bytes : 312742788 512 bps
 Output bytes : 245552919 0 bps
 Input packets : 3550009 1 pps
 Output packets: 2622101 0 pps
IPv6 transit statistics:
 Input bytes : 0
 Output bytes : 0
 Input packets : 0
 Output packets: 0
Egress queues: 8 supported, 4 in use
Queue counters: Queued packets Transmitted packets Dropped packets

 0 best-effort 0 1 0
 1 assured-forw 0 0 0
 5 expedited-fo 0 0 0
 7 network-cont 0 2622100 0

Queue number: Mapped forwarding classes
 0 best-effort
 1 assured-forwarding
 5 expedited-forwarding
 7 network-control
Active alarms : None
Active defects : None
Interface transmit statistics: Disabled
```

**Meaning** The **Input bytes** field shows the ingress traffic rate in bits per second (bps). The input rate is within the storm control limit of 15,000 Kbps.

- Related Documentation**
- [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)
  - [Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 596](#)
  - [Understanding Storm Control for Managing Traffic Levels on page 585](#)

---

## Example: Configuring Storm Control to Prevent Network Outages

Storm control enables you to prevent network outages caused by broadcast storms on the LAN. You can configure storm control on to rate-limit broadcast traffic, multicast traffic, and unknown unicast traffic at a specified level and to have packets dropped when the specified traffic level is exceeded, thereby preventing packets from proliferating and degrading the LAN.



**NOTE:** This example uses a Junos OS release that supports the Enhanced Layer 2 Software (ELS) configuration style.

- [Requirements on page 611](#)
- [Overview and Topology on page 611](#)
- [Configuration on page 612](#)

## Requirements

This example uses the following hardware and software components:

- One QFX Series switch running Junos OS with ELS
- Junos OS Release 13.2 or later

## Overview and Topology

A storm is generated when messages are broadcast on a network and each message prompts a receiving node to respond by broadcasting its own messages on the network. This, in turn, prompts further responses, creating a snowball effect and resulting in a broadcast storm that can cause network outages.

You can use storm control to prevent broadcast storms by specifying the amount, also known as the *storm control level*, of broadcast traffic, multicast traffic, and unknown unicast traffic to be allowed on an interface. You specify the storm control level as the traffic rate in kilobits per second (Kbps) of the combined applicable traffic streams or as the percentage of available bandwidth used by the combined applicable traffic streams. On ELS systems, storm control is enabled by default on all interfaces at a level of 80 percent of the available bandwidth.

Storm control monitors the level of applicable incoming traffic and compares it with the level that you specify. If the combined level of the applicable traffic exceeds the specified level, the switch drops packets for the controlled traffic types. As an alternative to having the switch drop packets, you can configure storm control to shut down interfaces or temporarily disable interfaces (see the [action-shutdown](#) statement or the [recovery-timeout](#) statement) when the storm control level is exceeded.



**NOTE:** If you configure storm control on an aggregated Ethernet interface, the storm-control level is applied to each member interface individually. For example, if the aggregated interface has two members and you configure a storm-control level of 20 kbps, Junos will not detect a storm if one or both of the member interfaces receives traffic at 15 kbps because in neither of these cases does an individual member receive traffic at a rate greater than the configured storm-control level. In this example, Junos detects a storm only if at least one member interface receives traffic at greater than 20 Kbps.

The topology used in this example consists of one switch connected to various network devices. This example shows how to configure the storm control level on interface xe-0/0/0 by setting the level to a traffic rate of 15,000 Kbps, based on the traffic rate of the combined applicable traffic streams. If the combined traffic exceeds this level, the switch drops packets for the controlled traffic types to prevent a network outage.

## Configuration

**CLI Quick Configuration** To quickly configure storm control based on the traffic rate in kilobits per second of the combined traffic streams, copy the following command and paste it into the switch terminal window:

```
[edit]
set forwarding-options storm-control-profiles sc-profile all bandwidth-level 15000
set interfaces xe-0/0/0 unit 0 family ethernet-switching storm-control sc-profile
```

**Step-by-Step Procedure** To configure storm control:

1. Configure a storm control profile, **sc-profile**, and specify the traffic rate in kilobits per second of the combined traffic streams:

```
[edit]
user@switch> set forwarding-options storm-control-profiles sc-profile all bandwidth-level 15000
```

2. Bind the storm control profile, **sc**, to a logical interface:

```
[edit]
user@switch> set interfaces xe-0/0/0 unit 0 family ethernet-switching storm-control sc-profile
```

**Results** Display the results of the configuration:

```
[edit forwarding-options]
user@switch> show storm-control-profiles sc-profile
all {
 bandwidth 15000;
}

[edit]
user@switch> show interfaces xe-0/0/0
unit 0 {
 family ethernet-switching {
 vlan {
 members default;
 }
 storm-control sc-profile;
 }
}
```

**Related Documentation** • [Understanding Storm Control on page 561](#)

- [Configuring Autorecovery for MAC Limited or Storm Control Interfaces \(CLI Procedure\) on page 435](#)

## Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces (CLI Procedure)

An Ethernet switching access interface on an EX Series switch might shut down or be disabled as a result of one of the following port-security or storm-control configurations:

- MAC limiting—**mac-limit** statement is configured with action **shutdown**.
- MAC move limiting—**mac-move-limit** statement is configured with action **shutdown**.
- Storm control—**storm-control** statement is configured with the action **shutdown**.

You can configure the switch to automatically restore the disabled interfaces to service after a specified period of time. Autorecovery applies to all the interfaces that have been disabled due to MAC limiting, MAC move limiting, or storm control errors.



**NOTE:** You must specify the disable timeout value for the interfaces to recover automatically. There is no default disable timeout. If you do not specify a timeout value, you need to use the [clear ethernet-switching port-error](#) command to clear the errors and restore the interfaces or the specified interface to service.

To configure autorecovery from the disabled state due to MAC limiting, MAC move limiting, or storm control shutdown actions:

```
[edit ethernet-switching-options]
user@switch# set port-error-disable disable-timeout 60
```

### Related Documentation

- [Example: Configuring Basic Port Security Features on page 289](#)
- [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587](#)
- [Understanding MAC Limiting and MAC Move Limiting for Port Security on EX Series Switches on page 343](#)
- [Understanding Storm Control on EX Series Switches on page 597](#)





## CHAPTER 25

# Configuring IP Source Guard to Prevent IP Spoofing Attacks

- [Understanding IP Source Guard for Port Security on Switches on page 615](#)
- [Configuring IP Source Guard \(CLI Procedure\) on page 617](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621](#)
- [Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626](#)

## Understanding IP Source Guard for Port Security on Switches

---

Ethernet LAN switches are vulnerable to attacks that involve spoofing (forging) of source IP addresses or source MAC addresses. You can use the IP source guard access port security feature to mitigate the effects of these attacks.

- [IP Address Spoofing on page 615](#)
- [How IP Source Guard Works on page 615](#)
- [IPv6 Source Guard on page 616](#)
- [The DHCP Snooping Table on page 616](#)
- [Typical Uses of Other Junos OS Features with IP Source Guard on page 617](#)

## IP Address Spoofing

Hosts on access interfaces can spoof source IP addresses and source MAC addresses by flooding the switch with packets containing invalid addresses. Such attacks combined with other techniques such as TCP SYN flood attacks can cause denial-of-service (DoS) attacks. With source IP address or source MAC address spoofing, the system administrator cannot identify the source of the attack. The attacker can spoof addresses on the same subnet or on a different subnet.

## How IP Source Guard Works

IP source guard examines each packet sent from a host attached to an untrusted access interface on the switch. The IP address, MAC address, VLAN and interface associated with the host is checked against entries stored in the DHCP snooping database. If the

packet header does not match a valid entry in the DHCP snooping database, the switch does not forward the packet—that is, the packet is discarded.



NOTE:

- If your switch uses Junos OS for EX Series with support for the Enhanced Layer 2 Software (ELS) configuration style, DHCP snooping is enabled automatically when you enable IP source guard on a VLAN. See [“Configuring IP Source Guard \(CLI Procedure\)” on page 544](#).
- If your switch uses Junos OS for EX Series without support the Enhanced Layer 2 Software (ELS) configuration style and you enable IP source guard on a VLAN, you must also explicitly enable DHCP snooping on that VLAN. Otherwise, the default value of no DHCP snooping applies to the VLAN. See [“Configuring IP Source Guard \(CLI Procedure\)” on page 617](#).

IP source guard examines packets sent from untrusted access interfaces on those VLANs. By default, access interfaces are untrusted and trunk interfaces are trusted. IP source guard does not examine packets that have been sent to the switch by devices connected to trusted interfaces so that a DHCP server can be connected to that interface to provide dynamic IP addresses.



NOTE: On an EX9200 switch, you can set a trunk interface as untrusted so that it supports IP source guard.

## IPv6 Source Guard

IPv6 source guard is available on switches that support DHCPv6 snooping. To determine whether your switch supports DHCPv6 snooping, see [Feature Explorer](#).

## The DHCP Snooping Table

IP source guard obtains information about IP address to MAC address bindings (IP-MAC binding) from the DHCP snooping table, also known as the DHCP binding table. The DHCP snooping table is populated either through dynamic DHCP snooping or through configuration of specific static IP address to MAC address bindings. For more information about the DHCP snooping table, see [“Understanding DHCP Snooping for Port Security” on page 516](#).

To display the DHCP snooping table, issue the operational mode command that appears in the switch CLI.

For DHCP snooping:

- (For non-ELS switches) [show ip-source-guard](#)
- (ELS switches only) [show dhcp-security binding](#)

For DHCPv6 snooping:

- (For non-ELS switches) [show dhcpv6 snooping binding](#)
- (ELS switches only) [show dhcp-security ipv6 binding](#)

## Typical Uses of Other Junos OS Features with IP Source Guard

You can configure IP source guard with various other port security features including:

- VLAN tagging (used for voice VLANs)
- GRES (graceful Routing Engine switchover)
- Virtual Chassis configurations
- Link aggregation groups (LAGs)
- 802.1X user authentication in single supplicant, single-secure supplicant, or multiple supplicant mode.



**NOTE:** While implementing 801.X user authentication in single-secure supplicant or multiple supplicant mode, use the following configuration guidelines:

- If the 802.1X interface is part of an untagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has untagged membership. This also applies to IPv6 source guard and DHCPv6 snooping.
- If the 802.1X interface is part of a tagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has tagged membership. This also applies to IPv6 source guard and DHCPv6 snooping.

### Related Documentation

- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621](#)
- [Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626](#)

## Configuring IP Source Guard (CLI Procedure)

You can use the IP source guard access port security feature on EX Series switches to mitigate the effects of source IP address spoofing and source MAC address spoofing. If IP source guard determines that a host connected to an access interface has sent a

packet with an invalid source IP address or source MAC address in the packet header, it ensures that the switch does not forward the packet—that is, the packet is discarded.

You enable the IP source guard feature on VLANs. You can enable it on a specific VLAN, on all VLANs, or on a VLAN range.



**NOTE:** IP source guard applies only to access interfaces and only to untrusted interfaces. If you enable IP source guard on a VLAN that includes trunk interfaces or an interface set to **dhcp-trusted**, the CLI shows an error when you try to commit the configuration.



**NOTE:** You can use IP source guard together with 802.1X user authentication in single supplicant, single-secure supplicant, or multiple supplicant mode.

While implementing 801.X user authentication in single-secure supplicant or multiple supplicant mode, use the following configuration guidelines:

- If the 802.1X interface is part of an untagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has untagged membership.
- If the 802.1X interface is part of a tagged MAC-based VLAN and you want to enable IP source guard and DHCP snooping on that VLAN, you must enable IP source guard and DHCP snooping on all dynamic VLANs in which the interface has tagged membership.

- 
- [Configuring IP Source Guard on page 618](#)
  - [Configuring IPv6 Source Guard on page 619](#)
  - [Disabling IP Source Guard on page 620](#)

## Configuring IP Source Guard

Before you configure IP source guard, be sure that you have:

Explicitly enabled DHCP snooping on the specific VLAN or specific VLANs on which you will configure IP source guard. See “[Enabling DHCP Snooping \(CLI Procedure\)](#)” on page 504. If you configure IP source guard on specific VLANs rather than on all VLANs, you must also enable DHCP snooping explicitly on those VLANs. Otherwise, the default value of no DHCP snooping applies to that VLAN.

To configure IP source guard:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name ip-source-guard
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all ip-source-guard
```

- On a VLAN range:

1. Set the VLAN range:

```
[edit vlans]
user@switch# set vlan-name vlan-range vlan-id-low-vlan-id-high
```

2. Associate an interface with the VLAN-range and set the port mode to **access**:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode access vlan
members vlan-name
```

3. Enable IP source guard on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name ip-source-guard
```

To commit these changes to the active configuration, type the **commit** command at the user prompt.

## Configuring IPv6 Source Guard

Before you configure IPv6 source guard, be sure that you have:

- Explicitly enabled DHCPv6 snooping on the specific VLAN or specific VLANs on which you will configure IPv6 source guard. See [“Enabling DHCP Snooping \(CLI Procedure\)” on page 504](#). If you configure IPv6 source guard on specific VLANs rather than on all VLANs, you must also enable DHCPv6 snooping explicitly on those VLANs. Otherwise, the default value of no DHCPv6 snooping applies to that VLAN.
- Set the maximum number of IPv6 source guard sessions:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set ipv6-source-guard-sessions max-number maximum-number
```



**NOTE:** After setting or changing the maximum number of IPv6 source guard sessions and committing the configuration, you must reboot the switch for the configuration to take effect.

To configure IPv6 source guard:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name ipv6-source-guard
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
```

```
user@switch# set vlan all ipv6-source-guard
```

- On a VLAN range:

1. Set the VLAN range):

```
[edit vlans]
user@switch# set vlan-name vlan-range vlan-id-low-vlan-id-high
```

2. Associate an interface with a VLAN-range and set the port mode to **access**:

```
[edit interfaces]
user@switch# set interface-name unit 0 family ethernet-switching port-mode access vlan
members vlan-name
```

3. Enable IPv6 source guard on the VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name ipv6-source-guard
```

To commit these changes to the active configuration, type the **commit** command at the user prompt.

## Disabling IP Source Guard

You can disable IP source guard for a specific VLAN after you have enabled the feature for all VLANs, or for all VLANs.

- To disable IP source guard on a specific VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name no-ip-source-guard
```

- To disable IP source guard on all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all no-ipv6-source-guard
```



**NOTE:** Replace **no-ip-source-guard** with **no-ipv6-source-guard** to disable IPv6 source guard.

---

### Related Documentation

- [Verifying That IP Source Guard Is Working Correctly on page 512](#)
- [Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN on page 488](#)
- [Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces on page 478](#)
- [Understanding IP Source Guard for Port Security on Switches on page 615](#)

## Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing



**NOTE:** This example uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks” on page 456](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.



**NOTE:** On EX9200 switches, DHCP snooping, DAI, and IP source guard are not supported in an MC-LAG scenario.

This example describes how to enable IP source guard and Dynamic ARP Inspection (DAI) on a specified VLAN to protect the switch against spoofed IP/MAC addresses and ARP spoofing attacks. When you enable either IP source guard or DAI, the configuration automatically enables DHCP snooping for the same VLAN.

- [Requirements on page 621](#)
- [Overview and Topology on page 622](#)
- [Configuration on page 623](#)
- [Verification on page 624](#)

### Requirements

This example uses the following hardware and software components:



**NOTE:** This example also applies to QFX5100, QFX5110, and QFX5200 switches.

- One EX4300 switch or EX9200 switch
- Junos OS Release 13.2X50-D10 or later for EX Series switches
- A DHCP server to provide IP addresses to network devices on the switch

Before you configure IP source guard to prevent IP/MAC spoofing or DAI to mitigate ARP spoofing attacks, be sure you have:

- Connected the DHCP server to the switch.
- Configured the VLAN to which you are adding DHCP security features.

## Overview and Topology

Ethernet LAN switches are vulnerable to attacks on security that involve spoofing (forging) of source MAC addresses or source IP addresses. These spoofed packets are sent from hosts connected to untrusted access interfaces on the switch. These spoofed packets are sent from hosts connected to untrusted access interfaces on the switch. IP source guard checks the IP source address and MAC source address in a packet sent from a host attached to an untrusted access interface on the switch against entries stored in the DHCP snooping database. If IP source guard determines that the packet header contains an invalid source IP address or source MAC address, it ensures that the switch does not forward the packet—that is, the packet is discarded.

Another type of security attack is ARP spoofing (also known as ARP poisoning or ARP cache poisoning). ARP-spoofing is a way to initiate man-in-the-middle attacks. The attacker sends an ARP packet that spoofs the MAC address of another device on the LAN. Instead of the switch sending traffic to the proper network device, it sends it to the device with the spoofed address that is impersonating the proper device. If the impersonating device is the attacker's machine, the attacker receives all the traffic from the switch that should have gone to another device. The result is that traffic from the switch is misdirected and cannot reach its proper destination.



**NOTE:** When dynamic ARP inspection (DAI) is enabled, the switch logs the number of invalid ARP packets that it receives on each interface, along with the sender's IP and MAC addresses. You can use these log messages to discover ARP spoofing on the network.

This example shows how to configure these important port security features on a switch that is connected to a DHCP server. The setup for this example includes the VLAN **employee-vlan** on the switch. [Figure 24 on page 458](#) illustrates the topology for this example.




**NOTE:**

The trunk interface connecting to the DHCP server interface is a trusted port by default.



Figure 41: Network Topology for Basic Port Security

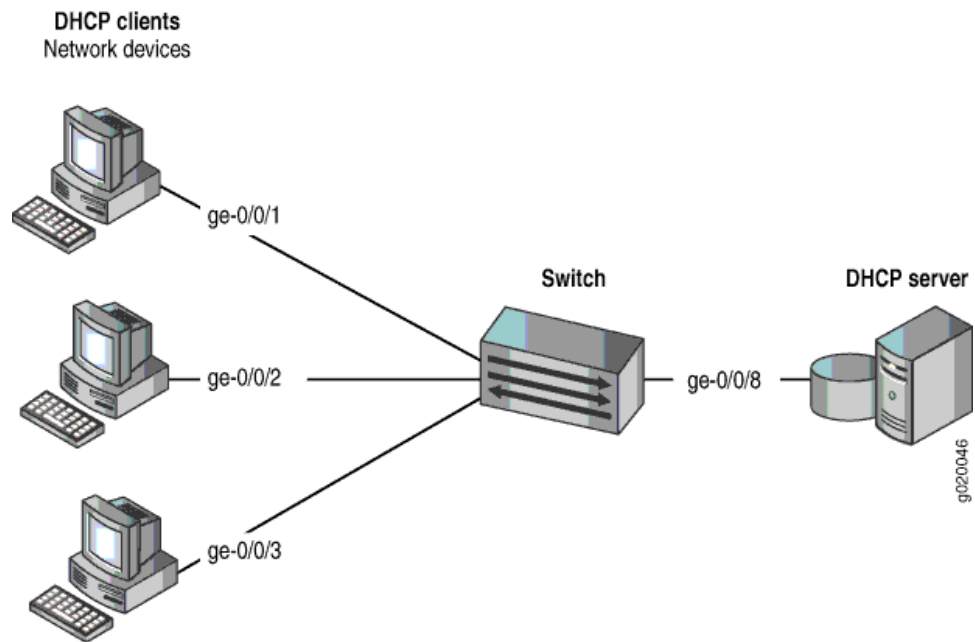

The components of the topology for this example are shown in [Table 24 on page 458](#).

Table 31: Components of the Port Security Topology

| Properties                          | Settings                                                                                       |
|-------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware                     | One EX4300 or EX9200 switch                                                                    |
| VLAN name and ID                    | <b>employee-vlan</b> , tag 20                                                                  |
| VLAN subnets                        | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is the subnet's broadcast address |
| Interfaces in <b>employee-vlan</b>  | <b>ge-0/0/1</b> , <b>ge-0/0/2</b> , <b>ge-0/0/3</b> , <b>ge-0/0/8</b>                          |
| Interface connecting to DHCP server | <b>ge-0/0/8</b>                                                                                |

In this example, the switch has already been configured as follows:

- All access ports are untrusted, which is the default setting.
- The trunk port (**ge-0/0/8**) is trusted, which is the default setting.
- The VLAN (**employee-vlan**) has been configured to include the specified interfaces.

## Configuration

To configure IP source guard and DAI (and thereby, also automatically configure DHCP snooping) to protect the switch against IP spoofing and ARP attacks:

**CLI Quick Configuration** To quickly configure IP source guard and DAI (and thereby, also automatically configure DHCP snooping), copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans employee-vlan forwarding-options dhcp-security ip-source-guard
set vlans employee-vlan forwarding-options dhcp-security arp-inspection
```

**Step-by-Step Procedure** Configure IP source guard and DAI (and thereby, also automatically configure DHCP snooping) on the VLAN:

1. Configure IP source guard on the VLAN:

```
[edit vlans employee-vlan forwarding-options dhcp-security]
user@switch# set ip-source-guard
```

2. Enable DAI on the VLAN:

```
[edit vlans employee-vlan forwarding-options dhcp-security]
user@switch# set arp-inspection
```

**Results** Check the results of the configuration:

```
user@switch> show vlans employee-vlan forwarding-options
employee-vlan {
 forwarding-options {
 dhcp-security {
 arp-inspection;
 ip-source-guard;
 }
 }
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying That DHCP Snooping Is Working Correctly on the Switch on page 624](#)
- [Verifying That IP Source Guard is Working on the VLAN on page 625](#)
- [Verifying That DAI Is Working Correctly on the Switch on page 625](#)

---

### [Verifying That DHCP Snooping Is Working Correctly on the Switch](#)

**Purpose** Verify that DHCP snooping is working on the switch.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch.

Display the DHCP snooping information when the port on which the DHCP server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IP addresses and leases:

user@switch> **show dhcp-security binding**

| IP Address | MAC Address       | Vlan          | Expires | State | Interface  |
|------------|-------------------|---------------|---------|-------|------------|
| 192.0.2.17 | 00:05:85:3A:82:77 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.18 | 00:05:85:3A:82:79 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.19 | 00:05:85:3A:82:80 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.20 | 00:05:85:3A:82:81 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.21 | 00:05:85:3A:82:83 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.22 | 00:05:85:27:32:88 | employee-vlan | 86254   | BOUND | ge-0/0/3.0 |

**Meaning** When the interface on which the DHCP server connects to the switch has been set to trusted, the output (see preceding sample) shows, for the assigned IP address, the device's MAC address, the VLAN name, and the time, in seconds, remaining before the lease expires.

### Verifying That IP Source Guard is Working on the VLAN

**Purpose** Verify that IP source guard is enabled and working on the VLAN.

**Action** Send some DHCP requests from network devices (here they are DHCP clients) connected to the switch. View the IP source guard information for the data VLAN.

user@switch> **show dhcp-security binding ip-source-guard**

| IP Address | MAC Address       | Vlan          | Expires | State | Interface  |
|------------|-------------------|---------------|---------|-------|------------|
| 192.0.2.17 | 00:05:85:3A:82:77 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.18 | 00:05:85:3A:82:79 | employee-vlan | 86265   | BOUND | ge-0/0/1.0 |
| 192.0.2.19 | 00:05:85:3A:82:80 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.20 | 00:05:85:3A:82:81 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.21 | 00:05:85:3A:82:83 | employee-vlan | 86287   | BOUND | ge-0/0/2.0 |
| 192.0.2.22 | 00:05:85:27:32:88 | employee-vlan | 86254   | BOUND | ge-0/0/3.0 |

**Meaning** The IP source guard database table contains the VLANs enabled for IP source guard.

### Verifying That DAI Is Working Correctly on the Switch

**Purpose** Verify that DAI is working on the switch.

**Action** Send some ARP requests from network devices connected to the switch.

Display the DAI information:

```
user@switch> show dhcp-security arp inspection statistics
```

ARP inspection statistics:

| Interface  | Packets received | ARP inspection pass | ARP inspection failed |
|------------|------------------|---------------------|-----------------------|
| ge-0/0/1.0 | 7                | 5                   | 2                     |
| ge-0/0/2.0 | 10               | 10                  | 0                     |
| ge-0/0/3.0 | 12               | 12                  | 0                     |

**Meaning** The sample output shows the number of ARP packets received and inspected per interface, with a listing of how many packets passed and how many failed the inspection on each interface. The switch compares the ARP requests and replies against the entries in the DHCP snooping database. If a MAC address or IP address in the ARP packet does not match a valid entry in the database, the packet is dropped.

- Related Documentation**
- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
  - [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 638](#)
  - [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)

## Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing

---



**NOTE:** This example uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see “[Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks](#)” on page 456. For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

This example describes how to enable IPv6 source guard and neighbor discovery inspection on a specified VLAN to protect the switch against IPv6 address spoofing attacks. When you enable either IPv6 source guard or neighbor discovery inspection, DHCPv6 snooping is automatically enabled on the same VLAN.

- [Requirements on page 627](#)
- [Overview and Topology on page 627](#)
- [Configuration on page 628](#)
- [Verification on page 629](#)

## Requirements

This example uses the following hardware and software components:



**NOTE:** This example also applies to QFX5100, QFX5110, and QFX5200 switches.

- One EX Series switch that supports the Enhanced Layer 2 Software configuration style.
- Junos OS Release 13.2X51-D20 or later for EX Series switches
- A DHCPv6 server to provide IPv6 addresses to network devices on the switch

Before you configure IPv6 source guard and neighbor discovery inspection to prevent IPv6 address spoofing attacks, be sure you have:

- Connected the DHCPv6 server to the switch.
- Configured the VLAN to which you are adding DHCPv6 security features. See the documentation that describes setting up basic bridging and a VLAN for your switch.

## Overview and Topology

Ethernet LAN switches are vulnerable to attacks on security that involve spoofing (forging) of source MAC addresses or source IPv6 addresses. These spoofed packets are sent from hosts connected to untrusted access interfaces on the switch. For more information on IPv6 address spoofing attacks, see [“Understanding IPv6 Neighbor Discovery Inspection” on page 319](#).


By using the DHCPv6 snooping table, also known as the binding table, IPv6 source guard and neighbor discovery inspection mitigate the risk of IPv6 spoofing attacks. The DHCPv6 snooping table contains the IP address, MAC address, VLAN and interface ID for each host associated with the VLAN. When a packet is sent from a host attached to an untrusted access interface on the switch, IPv6 source guard checks it against the entries in the DHCPv6 snooping table. If there is no match in the table, the switch does not forward the packet—that is, the packet is discarded. Neighbor discovery inspection verifies neighbor discovery messages sent between IPv6 nodes on the same network link against the DHCPv6 snooping table, and also discards the packet if no match is found.

This example shows how to configure these important port security features on a switch that is connected to a DHCPv6 server. The setup for this example includes the VLAN sales on the switch. [Figure 24 on page 458](#) illustrates the topology for this example.



**NOTE:** The trunk interface connecting to the DHCPv6 server interface is a trusted port by default.

Figure 42: Network Topology for Basic Port Security

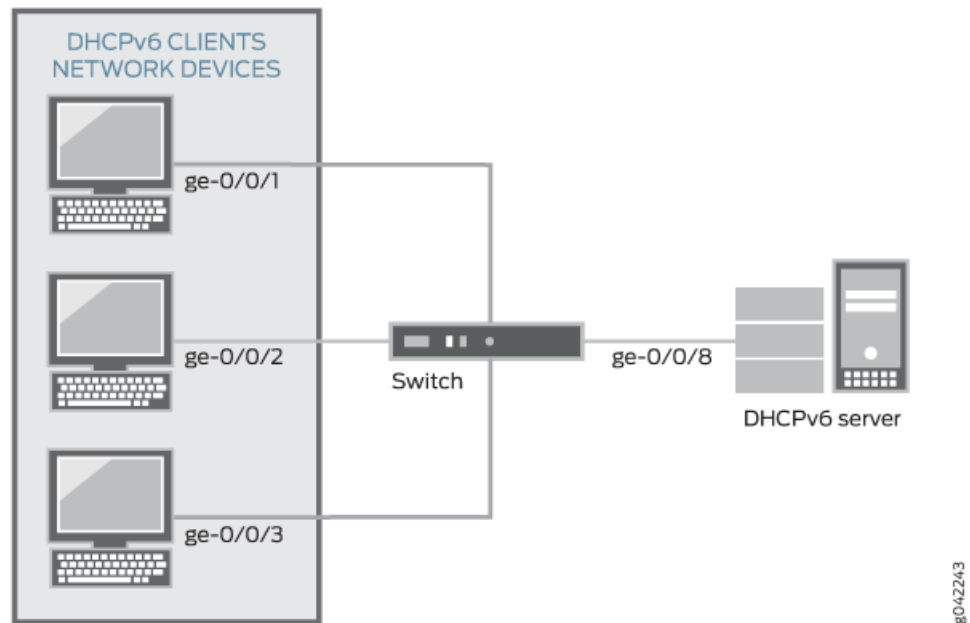

The components of the topology for this example are shown in [Table 24 on page 458](#).

Table 32: Components of the Port Security Topology

| Properties                            | Settings                                                                                       |
|---------------------------------------|------------------------------------------------------------------------------------------------|
| Switch hardware                       | One EX Series switch that supports the Enhanced Layer 2 Software configuration style.          |
| VLAN name and ID                      | sales, tag 20                                                                                  |
| VLAN subnets                          | 192.0.2.16/28<br>192.0.2.17 through 192.0.2.30<br>192.0.2.31 is the subnet's broadcast address |
| Interfaces in sales                   | ge-0/0/1, ge-0/0/2, ge-0/0/3, ge-0/0/8                                                         |
| Interface connecting to DHCPv6 server | ge-0/0/8                                                                                       |

In this example, the switch has already been configured as follows:

- All access ports are untrusted, which is the default setting.
- The trunk port (ge-0/0/8) is trusted, which is the default setting.
- The VLAN (sales) has been configured to include the specified interfaces.

## Configuration

- [\[xref target has no title\]](#)

**CLI Quick Configuration** To quickly configure IPv6 source guard and neighbor discovery inspection (and thereby, also automatically configure DHCPv6 snooping), copy the following commands and paste them into the switch terminal window:

```
[edit]
set vlans sales forwarding-options dhcp-security ipv6-source-guard
set vlans sales forwarding-options dhcp-security neighbor-discovery-inspection
```

**Step-by-Step Procedure** Configure IPv6 source guard and neighbor discovery inspection (and thereby, also automatically configure DHCPv6 snooping) on the VLAN:

1. Configure IPv6 source guard on the VLAN:

```
[edit vlans sales forwarding-options dhcp-security]
user@switch# set ipv6-source-guard
```

2. Enable neighbor discovery inspection on the VLAN:

```
[edit vlans sales forwarding-options dhcp-security]
user@switch# set neighbor-discovery-inspection
```

**Results** Check the results of the configuration:

```
user@switch> show vlans sales forwarding-options
dhcp-security {
 neighbor-discovery-inspection;
 ipv6-source-guard;
}
```

## Verification

Confirm that the configuration is working properly.

- [Verifying That DHCPv6 Snooping Is Working Correctly on the Switch on page 629](#)
- [Verifying That Neighbor Discovery Inspection Is Working Correctly on the Switch on page 630](#)

### Verifying That DHCPv6 Snooping Is Working Correctly on the Switch

**Purpose** Verify that DHCPv6 snooping is working on the switch.

**Action** Send DHCPv6 requests from network devices (in this example, these are DHCPv6 clients) connected to the switch.

Display the DHCPv6 snooping information when the port on which the DHCPv6 server connects to the switch is trusted. The following output results when requests are sent from the MAC addresses and the server has provided the IPv6 addresses and leases:

```
user@switch> show dhcp-security ipv6 binding
```

| IPv6 address          | MAC address       | Vlan   | Expires | State | Interface  |
|-----------------------|-------------------|--------|---------|-------|------------|
| 2001:db8:fe10::       | 00:10:94:00:55:0b | vlan20 | 3456    | BOUND | ge-0/0/1.0 |
| fe80::210:94ff:fe00:1 | 00:10:94:00:55:0b | vlan20 | 3456    | BOUND | ge-0/0/1.0 |
| 2001:db8:fe12::       | 00:10:94:00:00:34 | vlan20 | 3456    | BOUND | ge-0/0/2.0 |
| fe80::210:94ff:fe00:2 | 00:10:94:00:00:34 | vlan20 | 3456    | BOUND | ge-0/0/2.0 |
| 2001:db8:fe14::       | 00:10:94:00:00:55 | vlan20 | 3456    | BOUND | ge-0/0/3.0 |
| fe80::210:94ff:fe00:3 | 00:10:94:00:00:55 | vlan20 | 3456    | BOUND | ge-0/0/3.0 |

**Meaning** The output shows the assigned IPv6 addresses, the MAC address, the VLAN name, and the time, in seconds, remaining before the lease expires. Because IPv6 hosts usually have more than one IPv6 address assigned to each of their IPv6-enabled network interfaces, there are two entries added for each client: one with the link-local IPv6 address, which is used by the client for DHCP transactions, and another with the IPv6 address assigned by the server. The link-local address always has the prefix **fe80::/10**.

### Verifying That Neighbor Discovery Inspection Is Working Correctly on the Switch

**Purpose** Verify that neighbor discovery inspection is working on the switch.

**Action** Send neighbor discovery packets from network devices connected to the switch.

Display the neighbor discovery information:

```
user@switch> show dhcp-security neighbor-discovery-inspection statistics
```

ND inspection statistics:

| Interface  | ND Packets received | ND inspection pass | ND inspection failed |
|------------|---------------------|--------------------|----------------------|
| ge-0/0/1.0 | 7                   | 5                  | 2                    |
| ge-0/0/2.0 | 10                  | 10                 | 0                    |
| ge-0/0/3.0 | 12                  | 12                 | 0                    |

**Meaning** The sample output shows the number of neighbor discovery packets received and inspected per interface, with a list of the number of packets that passed and the number of packets that failed the inspection on each interface. The switch compares the neighbor discovery requests and replies against the entries in the DHCPv6 snooping database. If



a MAC address or IPv6 address in the neighbor discovery packet does not match a valid entry in the database, the packet is dropped.

**Related  
Documentation**

- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
- [Enabling IPv6 Neighbor Discovery Inspection on page 321](#)
- [Configuring Port Security Features on page 287](#)



## CHAPTER 26

# Configuring Dynamic ARP Inspection to Prevent ARP Spoofing Attacks

- [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 636](#)
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 638](#)

## Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing

---

Dynamic ARP inspection (DAI) protects switching devices against ARP spoofing.

DAI inspects Address Resolution Protocol (ARP) packets on the LAN and uses the information in the DHCP snooping database on the switch to validate ARP packets and to protect against ARP spoofing (also known as ARP poisoning or ARP cache poisoning). ARP requests and replies are compared against entries in the DHCP snooping database, and filtering decisions are made based on the results of those comparisons. When an attacker tries to use a forged ARP packet to spoof an address, the switch compares the address with entries in the database. If the media access control (MAC) address or IP address in the ARP packet does not match a valid entry in the DHCP snooping database, the packet is dropped.

ARP packets are sent to the Routing Engine and are rate-limited to protect the switching device from CPU overload.

- [Address Resolution Protocol on page 633](#)
- [ARP Spoofing on page 634](#)
- [Dynamic ARP Inspection on page 634](#)
- [Prioritizing Inspected Packets on page 635](#)

## Address Resolution Protocol

Sending IP packets on a multi-access network requires mapping an IP address to an Ethernet MAC address.

Ethernet LANs use ARP to map MAC addresses to IP addresses.

The switching device maintains this mapping in a cache that it consults when forwarding packets to network devices. If the ARP cache does not contain an entry for the destination device, the host (the DHCP client) broadcasts an ARP request for that device's address and stores the response in the cache.

## ARP Spoofing

ARP spoofing is one way to initiate man-in-the-middle attacks. The attacker sends an ARP packet that spoofs the MAC address of another device on the LAN. Instead of the switching device sending traffic to the proper network device, it sends the traffic to the device with the spoofed address that is impersonating the proper device. If the impersonating device is the attacker's machine, the attacker receives all the traffic from the switch that must have gone to another device. The result is that traffic from the switching device is misdirected and cannot reach its proper destination.

One type of ARP spoofing is gratuitous ARP, which is when a network device sends an ARP request to resolve its own IP address. In normal LAN operation, gratuitous ARP messages indicate that two devices have the same MAC address. They are also broadcast when a network interface card (NIC) in a device is changed and the device is rebooted, so that other devices on the LAN update their ARP caches. In malicious situations, an attacker can poison the ARP cache of a network device by sending an ARP response to the device that directs all packets destined for a certain IP address to go to a different MAC address instead.

To prevent MAC spoofing through gratuitous ARP and through other types of spoofing, the switches examine ARP responses through DAI.

## Dynamic ARP Inspection

DAI examines ARP requests and responses on the LAN and validates ARP packets. The switch intercepts ARP packets from an access port and validates them against the DHCP snooping database. If no IP-MAC entry in the database corresponds to the information in the ARP packet, DAI drops the ARP packet and the local ARP cache is not updated with the information in that packet. DAI also drops ARP packets when the IP address in the packet is invalid. ARP probe packets are not subjected to dynamic ARP inspection. The switch always forwards such packets.

Junos OS for EX Series switches and the QFX Series uses DAI for ARP packets received on access ports because these ports are untrusted by default. Trunk ports are trusted by default, and therefore ARP packets bypass DAI on them.

You configure DAI for each VLAN, not for each interface (port). By default, DAI is disabled for all VLANs.

If you set an interface to be a DHCP trusted port, it is also trusted for ARP packets.

**NOTE:**

- If your switching device is an EX Series switch and uses Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style, see [“Enabling a Trusted DHCP Server \(CLI Procedure\)” on page 318](#) for information about configuring an access interface to be a DHCP trusted port.

For packets directed to the switching device to which a network device is connected, ARP queries are broadcast on the VLAN. The ARP responses to those queries are subjected to the DAI check.

For DAI, all ARP packets are trapped to the Packet Forwarding Engine. To prevent CPU overloading, ARP packets destined for the Routing Engine are rate-limited.

If the DHCP server goes down and the lease time for an IP-MAC entry for a previously valid ARP packet runs out, that packet is blocked.

## Prioritizing Inspected Packets



**NOTE:** Prioritizing inspected packets is not supported on the QFX Series and the EX4600 switch.

You can use class-of-service (CoS) forwarding classes and queues to prioritize DAI packets for a specified VLAN. This type of configuration places inspected packets for that VLAN in the egress queue, that you specify, ensuring that the security procedure does not interfere with the transmission of high-priority traffic.

### Related Documentation

- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473](#)
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 636](#)
- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 638](#)

- *Enabling Dynamic ARP Inspection (J-Web Procedure)*

## Enabling Dynamic ARP Inspection (CLI Procedure)

---

Dynamic ARP inspection (DAI) protects switches against ARP spoofing. DAI inspects ARP packets on the LAN and uses the information in the DHCP snooping database on the switch to validate ARP packets and to protect against ARP cache poisoning.

This topic describes:

- [Enabling DAI on page 636](#)
- [Applying CoS Forwarding Classes to Prioritize Inspected Packets on page 636](#)

### Enabling DAI

You configure DAI for each VLAN, not for each interface (port). By default, DAI is disabled for all VLANs.

To enable DAI on a VLAN or all VLANs:

- On a single VLAN:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan vlan-name arp-inspection
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access-port]
user@switch# set vlan all arp-inspection
```

### Applying CoS Forwarding Classes to Prioritize Inspected Packets

You might need to use class of service (CoS) to protect packets from critical applications from being dropped during periods of network congestion and delay and you might also need the port security features of DHCP snooping on the same ports through which those critical packets are entering and leaving.

To apply CoS forwarding classes and queues to DAI packets:

1. Create a user-defined forwarding class to be used for prioritizing DAI packets:

```
[edit class-of-service]
user@switch# set forwarding-classes class class-name queue queue-number
```

2. Enable DAI on a specific VLAN or on all VLANs and apply the desired forwarding class on the DAI packets:

- On a specific VLAN:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan vlan-name arp-inspection forwarding-class class-name
```

- On all VLANs:

```
[edit ethernet-switching-options secure-access port]
user@switch# set vlan all arp-inspection forwarding-class class-name
```

**Related  
Documentation**

- [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI , and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473](#)
- [Verifying That DAI Is Working Correctly on page 461](#)
- [Monitoring Port Security on page 280](#)
- [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)
- [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)
- *class-of-service*
- [secure-access-port on page 964](#)
- *secure-access-port*

## Enabling Dynamic ARP Inspection (CLI Procedure)

---



**NOTE:** This task uses Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see [“Enabling Dynamic ARP Inspection \(CLI Procedure\)” on page 636](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.



**NOTE:** On EX9200 switches, DHCP snooping, DAI, and IP source guard are not supported in an MC-LAG scenario.

Dynamic ARP inspection (DAI) protects switches against ARP spoofing. DAI inspects ARP packets on the LAN and uses the information in the DHCP snooping database on the switch to validate ARP packets and to protect against ARP cache poisoning.

Before you can enable DAI on a VLAN, you must configure the VLAN. See *Configuring VLANs for EX Series Switches with ELS Support (CLI Procedure)*.

To enable DAI on a VLAN by using the CLI:

```
[edit vlans vlan-name forwarding-options dhcp-security]
user@switch# set arp-inspection
```

### Related Documentation

- [Enabling Dynamic ARP Inspection \(J-Web Procedure\)](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621](#)
- [Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633](#)



## CHAPTER 27

# Unknown Unicast Forwarding

- [Understanding Unknown Unicast Forwarding on page 639](#)
- [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 640](#)
- [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 641](#)
- [Verifying That Unknown Unicast Packets Are Forwarded to a Single Interface on page 643](#)
- [Configuring Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages on page 644](#)
- [Configuring Junos OS ICMPv6 Rate Limit for ICMPv6 Routing Engine Messages on page 644](#)
- [Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface on page 645](#)

## Understanding Unknown Unicast Forwarding

Unknown unicast traffic consists of unicast packets with unknown destination MAC addresses. By default, the switch floods these unicast packets that traverse a VLAN to all interfaces that are members of that VLAN. Forwarding this type of traffic can create unnecessary traffic that leads to poor network performance or even a complete loss of network service. This flooding of packets is known as a traffic storm.

To prevent a traffic storm, you can disable the flooding of unknown unicast packets to all VLAN interfaces by configuring specific VLANs or all VLANs to forward all unknown unicast traffic traversing them to a specific interface. You can configure multiple VLANs to forward unknown unicast packets to the same interface or configure different interfaces for different VLANs. This channels the unknown unicast traffic traversing VLANs to specific interfaces instead of flooding all interfaces.

### **Related Documentation**

- [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 640](#)
- [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 641](#)
- [Understanding Storm Control on EX Series Switches on page 597](#)
- [Understanding Storm Control for Managing Traffic Levels on page 585](#)
- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587](#)

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607](#)

## Configuring Unknown Unicast Forwarding (CLI Procedure)

---

Unknown unicast traffic consists of packets with unknown destination MAC addresses. By default, the switch floods these packets to all interfaces associated with a VLAN. Forwarding such traffic to interfaces on the switch can create a security issue.

To prevent flooding unknown unicast traffic across the switch, configure unknown unicast forwarding to direct all unknown unicast packets within a VLAN out to a specific trunk interface. From there, the destination MAC address can be learned and added to the Ethernet switching table. You can configure each VLAN to divert unknown unicast traffic to different trunk interfaces or use one trunk interface for multiple VLANs.



**NOTE:** For Junos OS for EX Series switches or QFX Series with support for the Enhanced Layer 2 Software (ELS) configuration style, see [“Configuring Unknown Unicast Forwarding \(CLI Procedure\)” on page 641](#).

To configure unknown unicast forwarding options:



**NOTE:** Before you can configure unknown unicast forwarding within a VLAN, you must first configure that VLAN.

1. Configure unknown unicast forwarding for a specific VLAN (here, the VLAN name is **employee**):

```
[edit ethernet-switching-options]
user@switch# set unknown-unicast-forwarding vlan employee
```

2. Specify the trunk interface to which all unknown unicast traffic will be forwarded:

```
[edit ethernet-switching-options]
user@switch# set unknown-unicast-forwarding vlan employee interface ge-0/0/3.0
```

### Related Documentation

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587](#)
- [Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface on page 645](#)
- [Understanding Unknown Unicast Forwarding on page 639](#)
- [Understanding Storm Control on EX Series Switches on page 597](#)

## Configuring Unknown Unicast Forwarding (CLI Procedure)



**NOTE:** This task uses Junos OS for EX Series switches or QFX Series with support for the Enhanced Layer 2 Software (ELS) configuration style. If your EX Series switch runs software that does not support ELS, see [“Configuring Unknown Unicast Forwarding \(CLI Procedure\)” on page 640](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*

Unknown unicast traffic consists of packets with unknown destination MAC addresses. By default, the switch floods these packets that traverse a VLAN to all interfaces associated with that VLAN. This flooding of packets is known as a traffic storm and can negatively impact network performance.

To prevent flooding unknown unicast traffic across the switch, configure unknown unicast forwarding to direct all unknown unicast packets within a VLAN to a specific interface. You can configure each VLAN to divert unknown unicast traffic to a different interface or use the same interface for multiple VLANs.

- [Configuring Unknown Unicast Forwarding on EX4300 Switches on page 641](#)
- [Configuring Unknown Unicast Forwarding on EX9200 Switches on page 641](#)

### Configuring Unknown Unicast Forwarding on EX4300 Switches

To configure unknown unicast forwarding options on EX4300 switches:

- Configure unknown unicast forwarding for a specific VLAN and specify the interface to which all unknown unicast traffic will be forwarded:

```
[edit switch-options]
user@switch# set unknown-unicast-forwarding vlan vlan-name interface interface-name
```

- Configure unknown unicast forwarding for all VLANs and specify the interface to which all unknown unicast traffic will be forwarded:

```
[edit switch-options]
user@switch# set unknown-unicast-forwarding vlan all interface interface-name
```

### Configuring Unknown Unicast Forwarding on EX9200 Switches

To configure unknown unicast forwarding on EX9200 switches, you must configure a flood filter and apply it to VLANs for which you want to configure unknown unicast forwarding. Flood filters are firewall filters that are applied only to broadcast, unknown unicast, and multicast (BUM) traffic. If a flood filter is configured, only traffic packets that are of the packet type **unknown-unicast** are forwarded to the interface on which unicast forwarding is configured. A next-hop group redirects the packets according to the action specified in the flood filter.

To configure the next-hop group that receives Layer 2 packets and then configure the interface to which these packets are forwarded:

1. Configure the **next-hop-group** action for the Layer 2 interface expected to receive unknown unicast packets:

```
[edit forwarding-options]
user@switch# set next-hop-group next-hop-group-name group-type layer-2
[edit forwarding-options]
user@switch# set next-hop-group next-hop-group-name interface interface-name
```

For example:

```
[edit forwarding-options]
user@switch# set next-hop-group uuf-nhg group-type layer-2
[edit forwarding-options]
user@switch# set next-hop-group uuf-nhg interface ge-3/1/7.0
```

2. Configure a firewall filter with family address type **ethernet-switching**:

```
[edit firewall]
user@switch# set family ethernet-switching filter filter-name
```

For example:

```
[edit firewall]
user@switch# set family ethernet-switching filter uuf_filter
```

3. Configure a term in the firewall filter for the interface that receives unknown unicast packets (the interface specified in Step 1) to discard unknown unicast packets:

```
[edit firewall family ethernet-switching filter filter-name]
user@switch# set term term-name from interface interface-name
user@switch# set term term-name from traffic-type unknown-unicast
user@switch# set term term-name then discard
```

For example:

```
[edit firewall family ethernet-switching filter uuf_filter]
user@switch# set term source-drop from interface ge-3/1/7.0
user@switch# set term source-drop from traffic-type unknown-unicast
user@switch# set term source-drop then discard
```

4. Configure a term in the firewall filter for unknown unicast packets to be flooded to the interface enabled for unknown unicast forwarding by using **next-hop-group** (in step 1):

```
[edit firewall family ethernet-switching filter filter-name]
user@switch# set term term-name from traffic-type unknown-unicast
user@switch# set term term-name then next-hop-group group-name
```

For example:

```
[edit firewall family ethernet-switching filter uuf_filter]
user@switch# set term uuf-flood from traffic-type unknown-unicast
user@switch# set term uuf-flood then next-hop-group uuf-nhg
```

5. Configure a default term for the firewall filter to forward packets other than unknown unicast packets:

```
[edit firewall family ethernet-switching filter filter-name]
user@switch# set term term-name then accept
```

For example:

```
[edit firewall family ethernet-switching filter uuf_filter]
user@switch# set term fwd-default then accept
```

6. Apply the filter as a flood filter on the VLAN that includes the interface which will receive unknown unicast packets:

```
[edit vlans vlan-name]
user@switch# set forwarding-options flood input filter-name
```

For example:

```
[edit vlans v1]
user@switch# set forwarding-options flood input uuf_filter
```

- Related Documentation**
- [Understanding Unknown Unicast Forwarding on page 639](#)
  - [Verifying That Unknown Unicast Packets Are Forwarded to a Single Interface on page 643](#)

## Verifying That Unknown Unicast Packets Are Forwarded to a Single Interface

**Purpose** Verify that a VLAN is forwarding all unknown unicast packets (those with unknown destination MAC addresses) to a single interface instead of flooding unknown unicast packets across all interfaces that are members of that VLAN.



**NOTE:** This procedure uses Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, See: [“Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface” on page 645](#). For ELS details see: *Using the Enhanced Layer 2 Software CLI*.

**Action** (EX4300 Switches) Display the forwarding interface for unknown unicast packets for a VLAN (here, the VLAN name is v1):

```
user@switch> show configuration switch-options
```

```
unknown-unicast-forwarding {
 vlan v1 {
 interface ge-0/0/7.0;
 }
}
```

(EX9200 Switches) Display the forwarding interface for unknown unicast packets:

```
user@switch> show forwarding-options
```

```
next-hop-group uuf-nhg {
 group-type layer-2;
 interface ge-0/0/7.0;
}
```

**Meaning** The sample output from the **show** commands show that the unknown unicast forwarding interface for VLAN v1 is interface **ge-0/0/7**.

**Related Documentation** • [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 641](#)

---

## Configuring Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages

To limit the rate at which ICMPv4 messages can be generated by the Routing Engine and sent to the Routing Engine, include the **icmpv4-rate-limit** statement at the **[edit system internet-options]** hierarchy level:

```
icmpv4-rate-limit bucket-size bucket-size packet-rate packet-rate;
```

The bucket size is the number of seconds in the rate-limiting bucket. The packet rate is the rate-limiting packets earned per second. Specify a **bucket-size** from 0 through 4294967295 seconds. The default value is 5 seconds. Specify a **packet-rate** from 0 through 4,294,967,295. The default value is 1000.

**Related Documentation** • [Configuring Junos OS ICMPv6 Rate Limit for ICMPv6 Routing Engine Messages on page 644](#)

---

## Configuring Junos OS ICMPv6 Rate Limit for ICMPv6 Routing Engine Messages

To limit the rate at which ICMPv6 messages are sent, include the **icmpv6-rate-limit** statement at the **[edit system internet-options]** hierarchy level:

```
icmpv6-rate-limit bucket-size bucket-size packet-rate packet-rate;
```

The bucket size is the the number of seconds in the rate-limiting bucket. The packet rate is the rate-limiting packets earned per second. Specify a **bucket-size** from 0 through 4294967295 seconds. The default value is 5 seconds. Specify a **packet-rate** from 0 through 4294967295. The default value is 1000.

- Related Documentation**
- [Configuring Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages on page 644](#)

## Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface

**Purpose** Verify that a VLAN is forwarding all unknown unicast packets (those with unknown destination MAC addresses) to a single trunk interface instead of flooding unknown unicast packets across all interfaces that are members of the same VLAN.

**Action** Display the forwarding interface for unknown unicast packets for a VLAN (here, the VLAN name is **v1**):

```
user@switch> show configuration ethernet-switching-options
```

```
unknown-unicast-forwarding {
 vlan v1 {
 interface ge-0/0/7.0;
 }
}
```

Display the Ethernet switching table:

```
user@switch> show ethernet-switching table vlan v1
```

Ethernet-switching table: 3 unicast entries

| VLAN | MAC address       | Type  | Age | Interfaces    |
|------|-------------------|-------|-----|---------------|
| v1   | *                 | Flood |     | - All-members |
| v1   | 00:01:09:00:00:00 | Learn | 24  | ge-0/0/7.0    |
| v1   | 00:11:09:00:01:00 | Learn | 37  | ge-0/0/3.0    |

**Meaning** The sample output from the **show configuration ethernet-switching-options** command shows that the unknown unicast forwarding interface for VLAN **v1** is interface **ge-0/0/7**. The **show ethernet-switching table** command shows that an unknown unicast packet is received on interface **ge-0/0/3** with the destination MAC address (DMAC) **00:01:09:00:00:00** and the source MAC address (SMAC) of **00:11:09:00:01:00**. This shows that the SMAC of the packet is learned in the normal way (through the interface **ge-0/0/3.0**), while the DMAC is learned on interface **ge-0/0/7**.

- Related Documentation**
- [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 640](#)





## PART 7

# Configuration Statements and Operational Commands

- [Configuration Statements on page 649](#)
- [Operational Commands on page 1047](#)



## CHAPTER 28

# Configuration Statements

- Security Services Configuration Statements on page 657
- accept on page 660
- accept-source-mac on page 662
- access-security on page 664
- action-priority on page 665
- action-shutdown on page 666
- algorithm (Authentication Keychain) on page 668
- algorithm (Junos FIPS) on page 668
- allowed-mac on page 669
- arp-inspection on page 670
- arp-inspection (MX Series) on page 671
- authentication (Security IPsec) on page 672
- authentication-algorithm (Security IKE) on page 673
- authentication-algorithm (Security IPsec) on page 674
- authentication-key-chains on page 676
- authentication-method on page 677
- auto-re-enrollment on page 678
- auxiliary-spi (Security IPsec) on page 679
- bandwidth on page 680
- bandwidth (DDoS) on page 681
- bandwidth-level on page 682
- bandwidth-percentage on page 683
- bandwidth-scale (DDoS) on page 684
- bridge-domains on page 685
- burst (DDoS) on page 686
- burst-scale (DDoS) on page 687
- bypass-aggregate (DDoS) on page 688
- cache-size on page 689

- [cache-timeout-negative](#) on page 690
- [ca-identity](#) on page 691
- [cak](#) on page 692
- [cak \(MX Series\)](#) on page 693
- [ca-name](#) on page 694
- [ca-profile](#) on page 695
- [certificate-id](#) on page 696
- [certificates](#) on page 697
- [certification-authority](#) on page 698
- [challenge-password](#) on page 699
- [cipher-suite \(MACsec\)](#) on page 700
- [circuit-id](#) on page 702
- [ckn](#) on page 703
- [connectivity-association](#) on page 704
- [connectivity-association \(MACsec Interfaces\)](#) on page 705
- [connectivity-association \(MACsec Interfaces for MX Series\)](#) on page 705
- [crl \(Adaptive Services Interface\)](#) on page 706
- [crl \(Encryption Interface\)](#) on page 707
- [ddos-protection \(DDoS\)](#) on page 708
- [ddos-protection \(DDoS\) \(PTX Series and QFX Series\)](#) on page 710
- [description \(Authentication Keychain\)](#) on page 711
- [description \(IKE policy\)](#) on page 712
- [dhcp-option82](#) on page 713
- [dhcp-security](#) on page 715
- [dhcp-security \(MX Series\)](#) on page 718
- [dhcp-service](#) on page 720
- [dhcp-snooping-file](#) on page 721
- [dhcp-snooping-file](#) on page 722
- [dhcp-trusted](#) on page 723
- [dhcpv6-options](#) on page 724
- [dhcpv6-snooping-file](#) on page 725
- [dh-group](#) on page 726
- [direction](#) on page 727
- [direction \(Junos OS\)](#) on page 728
- [direction \(Junos-FIPS Software\)](#) on page 729
- [direction \(MX Series\)](#) on page 730
- [disable-fpc \(DDoS\)](#) on page 731

- [disable-logging \(DDoS\) on page 732](#)
- [disable-routing-engine \(DDoS\) on page 733](#)
- [disable-timeout on page 734](#)
- [disable-timeout \(Port Error Disable\) on page 735](#)
- [discard on page 736](#)
- [dynamic on page 737](#)
- [eapol-address \(MX Series\) on page 738](#)
- [encoding on page 739](#)
- [encryption \(MACsec\) on page 740](#)
- [encryption \(MACsec for MX Series\) on page 741](#)
- [encryption \(Junos OS\) on page 742](#)
- [encryption \(Junos-FIPS Software\) on page 743](#)
- [encryption-algorithm \(Security\) on page 744](#)
- [enrollment on page 745](#)
- [enrollment-retry on page 746](#)
- [enrollment-url on page 747](#)
- [ethernet-switching-options on page 748](#)
- [examine-dhcp on page 754](#)
- [examine-dhcpv6 on page 756](#)
- [examine-fip on page 758](#)
- [exclude-protocol on page 759](#)
- [exclude-protocol \(MX Series\) on page 760](#)
- [family vpls \(Layer 2 Pseudowires\) on page 761](#)
- [fc-map on page 762](#)
- [fcoe-trusted on page 764](#)
- [file on page 765](#)
- [flood \(VLANs\) on page 766](#)
- [flow-detection \(DDoS Flow Detection\) on page 767](#)
- [flow-detection \(DDoS Packet Level\) on page 768](#)
- [flow-detection-mode \(DDoS Flow Detection\) on page 769](#)
- [flow-detection-mode \(DDoS Global Flow Detection\) on page 770](#)
- [flow-detect-time \(DDoS Flow Detection\) on page 771](#)
- [flow-level-bandwidth \(DDoS Flow Detection\) on page 772](#)
- [flow-level-control \(DDoS Flow Detection\) on page 773](#)
- [flow-level-control \(DDoS Global Flow Detection\) on page 774](#)
- [flow-level-detection \(DDoS Flow Detection\) on page 775](#)
- [flow-recover-time \(DDoS Flow Detection\) on page 776](#)

- [flow-report-rate \(DDoS Flow Detection\)](#) on page 777
- [flow-timeout-time \(DDoS Flow Detection\)](#) on page 778
- [forwarding-class \(for DHCP Snooping or DAI Packets\)](#) on page 779
- [forwarding-options](#) on page 780
- [fpc \(DDoS\)](#) on page 786
- [global \(DDoS\)](#) on page 787
- [group \(DHCP Security\)](#) on page 788
- [group \(DHCP Security for MX Series\)](#) on page 789
- [group-type \(Unknown Unicast Forwarding\)](#) on page 790
- [host-name](#) on page 791
- [icmpv4-rate-limit](#) on page 792
- [icmpv6-rate-limit](#) on page 793
- [id](#) on page 794
- [id \(MACsec for MX Series\)](#) on page 795
- [identity](#) on page 795
- [ike \(Security\)](#) on page 796
- [include-sci](#) on page 797
- [include-sci \(MACsec for MX Series\)](#) on page 798
- [interface \(Access Port Security\)](#) on page 799
- [interface \(DHCP Security for MX Series\)](#) on page 800
- [interface \(RA Guard\)](#) on page 801
- [interface \(Secure Access Port\)](#) on page 802
- [interface \(Static MAC Bypass\)](#) on page 803
- [interface \(Storm Control\)](#) on page 804
- [interface \(Unknown Unicast Forwarding\)](#) on page 805
- [interface-mac-limit](#) on page 806
- [interface-shutdown-action](#) on page 808
- [interfaces \(MACsec\)](#) on page 809
- [interfaces \(MACsec for MX Series\)](#) on page 810
- [internal](#) on page 811
- [ipsec \(Security\)](#) on page 812
- [ip-source-guard](#) on page 814
- [ip-source-guard \(MX Series\)](#) on page 816
- [source-ip-address-list](#) on page 817
- [ipv6-source-guard](#) on page 818
- [ipv6-source-guard-sessions](#) on page 819
- [key \(Authentication Keychain\)](#) on page 820

- [key \(Junos FIPS\) on page 821](#)
- [key \(MACsec\) on page 822](#)
- [key-chain \(Security\) on page 823](#)
- [key-name on page 824](#)
- [key-server-priority \(MACsec\) on page 825](#)
- [key-server-priority \(MACsec for MX Series\) on page 826](#)
- [ldap-url on page 827](#)
- [level on page 828](#)
- [lifetime-seconds \(Security\) on page 829](#)
- [light-weight-dhcpv6-relay on page 830](#)
- [local on page 832](#)
- [local-certificate \(Security\) on page 833](#)
- [local-key-pair on page 833](#)
- [location on page 834](#)
- [location \(DHCP Snooping Database\) on page 835](#)
- [logical-interface \(DDoS Flow Detection\) on page 836](#)
- [mac on page 838](#)
- [mac \(Option 82\) on page 839](#)
- [mac-address \(MACsec\) on page 840](#)
- [mac-address \(MACsec\) on page 841](#)
- [mac-limit on page 842](#)
- [mac-limit \(Access Port Security\) on page 843](#)
- [mac-list on page 845](#)
- [mac-move-limit on page 846](#)
- [macsec on page 848](#)
- [macsec \(MX Series\) on page 850](#)
- [manual \(Junos OS\) on page 851](#)
- [manual \(Junos-FIPS Software\) on page 852](#)
- [mark-interface \(RA Guard\) on page 853](#)
- [match-list on page 854](#)
- [match-option on page 856](#)
- [maximum-certificates on page 857](#)
- [mka on page 858](#)
- [mka \(MX Series\) on page 858](#)
- [mode \(IKE\) on page 859](#)
- [mode \(IPsec\) on page 860](#)
- [multicast on page 861](#)

- [must-secure](#) on page 862
- [neighbor-discovery-inspection](#) on page 863
- [next-hop-group](#) (Unknown Unicast Forwarding) on page 864
- [no-allowed-mac-log](#) on page 865
- [no-broadcast](#) on page 866
- [no-dhcp-snooping](#) on page 868
- [no-dhcp-trusted](#) on page 869
- [no-dhcpv6-options](#) on page 870
- [no-dhcpv6-snooping](#) on page 870
- [no-encryption](#) (MACsec) on page 871
- [no-encryption](#) (MACsec for MX Series) on page 872
- [no-examine-dhcpv6](#) on page 873
- [no-fcoe-trusted](#) on page 874
- [no-flow-logging](#) (DDoS Flow Detection) on page 875
- [no-gratuitous-arp-request](#) on page 876
- [no-gratuitous-arp-request](#) on page 877
- [no-multicast](#) on page 878
- [no-option16](#) on page 879
- [no-option18](#) on page 880
- [no-option37](#) on page 880
- [no-option82](#) on page 881
- [no-registered-multicast](#) on page 882
- [no-unknown-unicast](#) on page 883
- [no-unregistered-multicast](#) on page 885
- [offset](#) on page 886
- [offset](#) (MX Series) on page 888
- [option-16](#) (DHCPv6 Snooping) on page 889
- [option-18](#) (DHCPv6 Snooping) on page 890
- [option-37](#) (DHCPv6 Snooping) on page 892
- [no-option-37](#) on page 893
- [option-82](#) on page 894
- [options](#) (Security) on page 895
- [overrides](#) (DHCP Security) on page 896
- [overrides](#) (DHCP Security for MX Series) on page 897
- [packet-action](#) on page 898
- [path-length](#) on page 901
- [perfect-forward-secrecy](#) (Security) on page 902



- [perfect-forward-secrecy \(Services\) on page 903](#)
- [persistent-learning on page 904](#)
- [persistent-learning on page 904](#)
- [physical-interface \(DDoS Flow Detection\) on page 905](#)
- [pki on page 907](#)
- [policy on page 909](#)
- [policy \(Security IKE\) on page 910](#)
- [policy \(Security IPsec\) on page 911](#)
- [port-error-disable on page 912](#)
- [port-id on page 913](#)
- [port-id \(MACsec for MX Series\) on page 914](#)
- [prefix \(Circuit ID for Option 82\) on page 915](#)
- [prefix \(DHCPv6 Options\) on page 917](#)
- [prefix \(Remote ID for Option 82\) on page 918](#)
- [prefix-list-name on page 919](#)
- [pre-shared-key on page 920](#)
- [pre-shared-key \(MX Series\) on page 921](#)
- [pre-shared-key \(Security\) on page 922](#)
- [priority \(DDoS\) on page 923](#)
- [proposal \(Security IKE\) on page 924](#)
- [proposal \(Security IPsec\) on page 925](#)
- [proposals on page 925](#)
- [protocol \(Junos OS\) on page 926](#)
- [protocol \(Junos-FIPS Software\) on page 927](#)
- [protocols \(DDoS\) on page 928](#)
- [protocols \(DDoS\) \(PTX Series and QFX Series\) on page 939](#)
- [recover-time \(DDoS\) on page 945](#)
- [recovery-timeout on page 946](#)
- [re-enroll-trigger-time-percentage on page 947](#)
- [refresh-interval on page 948](#)
- [re-generate-keypair on page 948](#)
- [remote-id on page 949](#)
- [remote-id \(MX Series\) on page 951](#)
- [replay-protect on page 952](#)
- [replay-protect \(MX Series\) on page 952](#)
- [replay-window-size \(MX Series\) on page 953](#)
- [replay-window-size on page 954](#)

- [retry \(Adaptive Services Interface\) on page 955](#)
- [retry-interval on page 955](#)
- [revocation-check on page 956](#)
- [router-advertisement-guard on page 957](#)
- [routing-instance-name on page 959](#)
- [routing-instance-name \(circuit-id\) on page 960](#)
- [rpf-check on page 961](#)
- [secret on page 963](#)
- [secure-access-port on page 964](#)
- [secure-channel on page 966](#)
- [secure-channel on page 967](#)
- [security on page 968](#)
- [security-association on page 969](#)
- [security-association \(Junos OS\) on page 970](#)
- [security-association \(Junos-FIPS Software\) on page 971](#)
- [security-mode on page 972](#)
- [show ddos-protection protocols culprit-flows](#)
- [show ddos-protection protocols flow-detection](#)
- [source-mac-address-list on page 984](#)
- [spi \(Junos OS\) on page 985](#)
- [spi \(Junos-FIPS Software\) on page 985](#)
- [ssh on page 986](#)
- [ssh-known-hosts on page 987](#)
- [start-time \(Authentication Key Transmission\) on page 989](#)
- [stateful on page 991](#)
- [stateless on page 992](#)
- [static-ip on page 993](#)
- [static-ip \(MX Series\) on page 994](#)
- [static-ipv6 on page 995](#)
- [storm-control on page 996](#)
- [storm-control on page 997](#)
- [storm-control on page 998](#)
- [storm-control-profiles on page 999](#)
- [subscriber \(DDoS Flow Detection\) on page 1000](#)
- [switch-options \(VLANs\) on page 1002](#)
- [timeout on page 1003](#)
- [timeout-active-flows \(DDoS Flow Detection\) on page 1004](#)

- [tolerance](#) on page 1005
- [traceoptions](#) on page 1006
- [traceoptions \(Access Port Security\)](#) on page 1008
- [traceoptions \(DDoS\)](#) on page 1011
- [traceoptions \(DHCP\)](#) on page 1013
- [traceoptions \(MACsec\)](#) on page 1016
- [traceoptions \(MACsec interfaces\)](#) on page 1018
- [transmit-interval \(MACsec\)](#) on page 1020
- [transmit-interval \(MACsec for MX Series\)](#) on page 1021
- [trusted](#) on page 1022
- [trusted \(DHCP Security\)](#) on page 1022
- [unknown-unicast-forwarding](#) on page 1023
- [untrusted](#) on page 1024
- [untrusted](#) on page 1024
- [url \(Security\)](#) on page 1025
- [use-interface-description](#) on page 1026
- [use-interface-description](#) on page 1028
- [use-interface-index](#) on page 1030
- [use-interface-name](#) on page 1031
- [use-string](#) on page 1032
- [use-vlan-id](#) on page 1034
- [validity-period](#) on page 1035
- [vendor-id](#) on page 1036
- [violation-report-rate \(DDoS Flow Detection\)](#) on page 1037
- [vlan \(Access Port Security\)](#) on page 1038
- [vlan \(DHCP Bindings on Access Ports\)](#) on page 1040
- [vlans \(RA Guard\)](#) on page 1041
- [vlan \(Secure Access Port\)](#) on page 1042
- [vlan \(Static IP\)](#) on page 1043
- [vlan \(Unknown Unicast Forwarding\)](#) on page 1044
- [voip-mac-exclusive](#) on page 1045
- [write-interval](#) on page 1046

---

## Security Services Configuration Statements

The following table lists the security services configuration statements available at the **[edit security]** hierarchy level:

Table 33: Security Services Configuration Statements

| A-C                                       | D-G                                   | H-M                           | N-R                                 | S-Z                                          |
|-------------------------------------------|---------------------------------------|-------------------------------|-------------------------------------|----------------------------------------------|
| algorithm (Authentication Keychain)       | description (Authentication Keychain) | identity                      | options (Security)                  | secret                                       |
| algorithm (Junos FIPS)                    | description (IKE policy)              | ike                           | path-length                         | security-association (Junos OS)              |
| authentication (Security IPsec)           | dh-group                              | internal                      | perfect-forward-secrecy (Security)  | security-association (Junos-FIPS Software)   |
| authentication-algorithm (Security IKE)   | direction (Junos OS)                  | ipsec (Security)              | pki                                 | spi (Junos OS)                               |
| authentication-algorithm (Security IPsec) | direction (Junos-FIPS Software)       | key (Authentication Keychain) | policy (Security IKE)               | spi (Junos-FIPS Software)                    |
| authentication-key-chains                 | dynamic                               | key (Junos FIPS)              | policy (Security IPsec)             | ssh-known-hosts                              |
| authentication-method                     | encoding                              | key-chain (Security)          | pre-shared-key (Security)           | start-time (Authentication Key Transmission) |
| auto-re-enrollment                        | encryption (Junos OS)                 | ldap-url                      | proposal (Security IKE)             | tolerance                                    |
| auxiliary-spi                             | encryption (Junos-FIPS Software)      | lifetime-seconds (Security)   | proposal (Security IPsec)           | traceoptions                                 |
| ca-identity                               | encryption-algorithm                  | local                         | proposals                           | url                                          |
| ca-name                                   | enrollment                            | local-certificate (Security)  | protocol (Junos OS)                 | validity-period                              |
| ca-profile                                | enrollment-retry                      | local-key-pair                | protocol (Junos-FIPS Software)      |                                              |
| cache-size                                | enrollment-url                        | manual (Junos OS)             | re-enroll-trigger-time-percentage   |                                              |
| cache-timeout-negative                    | file                                  | manual (Junos-FIPS Software)  | re-generate-keypair                 |                                              |
| certificate-id                            |                                       | maximum-certificates          | refresh-interval                    |                                              |
| certificates                              |                                       | mode (IKE)                    | retry (Adaptive Services Interface) |                                              |
| certification-authority                   |                                       | mode (IPsec)                  | retry-interval                      |                                              |
| challenge-password                        |                                       |                               | revocation-check                    |                                              |

Table 33: Security Services Configuration Statements (continued)

| A-C                               | D-G | H-M | N-R | S-Z |
|-----------------------------------|-----|-----|-----|-----|
| crl (Adaptive Services Interface) |     |     |     |     |
| crl (Encryption Interface)        |     |     |     |     |

**Related Documentation** • [\[edit security\] Hierarchy Level](#)

## accept

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> accept {   match-list {     match-criteria {       (match-all   match-any);     }     prefix-list-name <i>prefix-list-name</i>;     source-ip-address-list <i>address-list-name</i>;     source-mac-address-list <i>address-list-name</i>;   }   match-option {     hop-limit {       (maximum   minimum) <i>value</i>;     }     managed-config-flag;     other-config-flag;     router-preference (high   low   medium);   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit forwarding-options access-security <b>router-advertisement-guard</b> policy <i>policy-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Configure the accept policy for an IPv6 Router Advertisement (RA) guard policy. RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in the policy.</p> <p>When RA guard is enabled, the switch compares the information contained in the attributes of RA messages to the information contained in the policy. If RA guard is enabled by using an accept policy, any RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped.</p> <p>The criteria are configured either as one or more lists of source address or address prefixes, which are associated with the accept policy by using the <b>match-list</b> statement, or match condition parameters, which are associated with the accept policy by using the <b>match-option</b> statement.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

- [Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330](#)

## accept-source-mac

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> accept-source-mac {   mac-address <i>mac-address</i> {     policer {       input <i>cos-policer-name</i>;       output <i>cos-policer-name</i>;     }   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>     | <p>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 12.1X48 for PTX Packet Transport Routers.</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>         | <p>For Gigabit Ethernet intelligent queuing (IQ) interfaces only, accept traffic from and to the specified remote media access control (MAC) address.</p> <p>The <b>accept-source-mac</b> statement is equivalent to the <b>source-address-filter</b> statement, which is valid for aggregated Ethernet, Fast Ethernet, and Gigabit Ethernet interfaces only. To allow the interface to receive packets from specific MAC addresses, include the <b>accept-source-mac</b> statement.</p> <p>On untagged Gigabit Ethernet interfaces, you should not configure the <b>source-address-filter</b> statement and the <b>accept-source-mac</b> statement simultaneously. On tagged Gigabit Ethernet interfaces, you should not configure the <b>source-address-filter</b> statement and the <b>accept-source-mac</b> statement with an identical MAC address specified in both filters.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |



**NOTE:** The **policer** statement is not supported on PTX Series Packet Transport Routers.



**NOTE:** On QFX platforms, if you configure source MAC addresses for an interface using the *static-mac* or **persistent-learning** statements and later configure a different MAC address for the same interface using the **accept-source-mac** statement, the MAC addresses that you previously configured for the interface remain in the ethernet-switching table and can still be used to send packets to the interface.



|                              |                                                                                                                                                                                                                        |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege</b>    | interface—To view this statement in the configuration.                                                                                                                                                                 |
| <b>Level</b>                 | interface-control—To add this statement to the configuration.                                                                                                                                                          |
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <i>Configuring MAC Address Filtering</i></li><li>• <i>Configuring MAC Address Filtering on PTX Series Packet Transport Routers</i></li><li>• <i>source-filtering</i></li></ul> |

## access-security

```
Syntax access-security {
 router-advertisement-guard {
 interface interface-name {
 mark-interface (trusted | block);
 policy policy-name (stateful | stateless);
 }
 vlans (vlan-name | all) {
 policy policy-name (stateful | stateless);
 }
 policy policy-name {
 accept {
 match-list {
 match-criteria {
 (match-all | match-any);
 }
 prefix-list-name prefix-list-name;
 source-ip-address-list address-list-name;
 source-mac-address-list address-list-name;
 }
 match-option {
 hop-limit {
 (maximum | minimum) value;
 }
 managed-config-flag;
 other-config-flag;
 router-preference (high | low | medium);
 }
 }
 discard {
 prefix-list-name prefix-list-name;
 source-ip-address-list address-list-name;
 source-mac-address-list address-list-name;
 }
 }
 }
 }
```

**Hierarchy Level** [edit forwarding-options]

**Release Information** Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.  
Statement introduced in Junos OS Release 16.1 for EX Series switches.

**Description** Configure IPv6 access security options.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324](#)
  - [Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330](#)

## action-priority

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>action-priority value;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | <code>[edit vlans <i>vlan-name</i> switch-options <a href="#">mac-move-limit</a> interface <i>interface-name</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | <p>Configure a priority for an interface on which the MAC move limit action will be applied. When a MAC move limit is configured, and a MAC address moves to a new interface more times than is allowed by the limit, the configured action will be applied to the interface associated with that MAC address having the highest priority. The interface with the highest priority is the interface with the lowest value configured for <b>action-priority</b>. The default value for <b>action-priority</b> on an interface is 4.</p> <p>If no action priority is configured, or if the interfaces have the same action priority, then the action will be applied to the interface to which the MAC address moved last.</p> |
| <b>Default</b>                  | The default value for <b>action-priority</b> on an interface is 4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system—control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li> <li>• <a href="#">Configuring MAC Move Limiting (CLI Procedure) on page 440</a></li> <li>• <a href="#">Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 596</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                          |

## action-shutdown

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>action-shutdown;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>     | <ul style="list-style-type: none"><li>For platforms with Enhanced Layer 2 Software (ELS):<br/>[edit forwarding-options <b>storm-control-profiles</b> <i>profile-name</i>]</li><li>For platforms without ELS:<br/>[edit ethernet-switching-options storm-control]</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Hierarchy level [edit forwarding-options] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 14.1 for MX Series routers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>         | <p>Logically shut down or temporarily disable interfaces when the storm control level is exceeded.</p> <p>To configure the shutdown action so that the interfaces are disabled temporarily, and recover automatically after a specified period of time:</p> <ul style="list-style-type: none"><li>Configure both the <b>action-shutdown</b> and the <b>port-error-disable</b> statements. The interfaces recover automatically when the disable timeout expires. (The <b>port-error-disable</b> statement is not supported on QFX Series switches or MX Series routers.)</li><li>Configure both the <b>action-shutdown</b> and the <b>recovery-timeout</b> statements. The interfaces recover automatically when the recovery timeout expires.</li></ul> <p>If you configure the <b>action-shutdown</b> statement and do not configure the <b>port-error-disable</b> or <b>recovery-timeout</b> statement, the interfaces that are enabled for storm control are shut down when the storm control level is exceeded and they do not recover automatically from that port-error condition.</p> <p>If you do not configure the switch for autorecovery from the disabled condition, you can bring up the disabled interfaces by running one of the following commands:</p> <ul style="list-style-type: none"><li>(MX Series)—Issue the <b>clear bridge recovery-timeout</b></li><li>(QFX Series)—Issue the <b>clear ethernet-switching recovery-timeout</b></li><li>(EX Series switches that support ELS)—Issue the <b>clear ethernet-switching recovery-timeout</b></li><li>(EX Series switches that do not support ELS)—Issue the <b>clear ethernet-switching port-error</b></li></ul> |



**NOTE:** On EX4300 switches, **action-shutdown** causes an interface to stop learning MAC addresses and it also drops all incoming packets, but does not disable the physical interface.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | The <b>action-shutdown</b> option is not enabled by default. The switching device drops packets for the controlled traffic types if the ingress rate of the combined traffic streams exceeds the specified storm control level. Depending upon the configuration, applicable traffic could include broadcast, unknown unicast, and multicast traffic.                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">recovery-timeout on page 946</a></li> <li>• <a href="#">clear bridge recovery-timeout on page 1055</a></li> <li>• <a href="#">clear ethernet-switching recovery-timeout on page 1067</a></li> <li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602</a></li> <li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607</a></li> <li>• <a href="#">Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 596</a></li> </ul> |

## algorithm (Authentication Keychain)

---

|                                 |                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | algorithm (hmac-sha-1   md5);                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> key <i>key</i> ]                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                      |
| <b>Description</b>              | Configure the authentication algorithm for IS-IS.                                                                                                                                                        |
| <b>Options</b>                  | <b>hmac-sha-1</b> —96-bit hash-based message authentication code (SHA-1).<br><b>md5</b> —Message digest 5.<br><b>Default:</b> md5                                                                        |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li><li>• <i>Understanding Hitless Authentication Key Rollover for IS-IS</i></li></ul> |

## algorithm (Junos FIPS)

---

|                                 |                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | algorithm 3des-cbc;                                                                                                              |
| <b>Hierarchy Level</b>          | [edit security ipsec internal security-association manual direction encryption]                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                |
| <b>Description</b>              | Select the encryption algorithm for the internal Routing-Engine-to-Routing-Engine IPsec security association (SA) configuration. |
| <b>Options</b>                  | Only <b>3des-cbc</b> is supported.                                                                                               |
| <b>Required Privilege Level</b> | Crypto Officer—To add and view this statement in the configuration.                                                              |

## allowed-mac

|                            |                                                                                                               |
|----------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>allowed-mac {<br/>    <i>mac-address-list</i>;<br/>}</code>                                             |
| <b>Hierarchy Level</b>     | [edit <a href="#">ethernet-switching-options secure-access-port interface</a> (all   <i>interface-name</i> )] |
| <b>Release Information</b> | Statement introduced in Junos OS Release 9.0 for EX Series switches.                                          |
| <b>Description</b>         | Specify particular MAC addresses to be added to the MAC address cache.                                        |



**NOTE:** Although this configuration restricts the addresses that can be added to the MAC address cache, it does not block the switch from receiving Layer 2 control packets—such as Link Layer Discovery Protocol (LLDP) packets—transmitted from MAC addresses that are not specified in the list of allowed MAC addresses. Control packets do not undergo the MAC address check and they are therefore included in the statistics of packets received. However, they are not forwarded to another destination. They are trapped within the switch.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | Allowed MAC addresses take precedence over dynamic MAC values that have been applied with the <b>mac-limit</b> statement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <b><i>mac-address-list</i></b> —One or more MAC addresses configured as allowed MAC addresses for a specified interface or all interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">mac-limit (Access Port Security) on page 843</a></li> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li> <li>• <a href="#">Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 462</a></li> <li>• <a href="#">Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445</a></li> <li>• <a href="#">Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452</a></li> <li>• <a href="#">Configuring MAC Limiting (CLI Procedure) on page 346</a></li> <li>• <a href="#">Configuring MAC Limiting (J-Web Procedure)</a></li> </ul> |

## arp-inspection

**Syntax**    `arp-inspection {  
                  forwarding-class class-name;  
                  }`

- Hierarchy Level**
- For platforms with ELS:  
     [edit vlans *vlan-name* forwarding-options [dhcp-security](#)],  
     [edit forwarding-options dhcp-relay ]
  - For platforms without ELS:  
     [edit [ethernet-switching-options secure-access-port vlan](#) (all | *vlan-name*)],  
     [edit forwarding-options dhcp-relay ]

**Release Information**    Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                                  Hierarchy level [edit vlans *vlan-name* forwarding-options [dhcp-security](#)] introduced in Junos OS Release 13.2X50-D10. (See *Using the Enhanced Layer 2 Software CLI* for information about ELS.)  
                                  Statement introduced in Junos OS Release 13.2 for the QFX series.

**Description**    Perform dynamic ARP inspection (DAI) on all VLANs or on the specified VLAN.

When DAI is enabled, the switch logs invalid ARP packets that it receives on each interface, along with the sender's IP and MAC addresses. ARP probe packets, which have the sender IP address 0.0.0.0, are validated by DAI.



**NOTE:** If you configure DAI at the [edit vlans *vlan-name* forwarding-options [dhcp-security](#)] hierarchy level:

- DAI can be configured only for a specific VLAN, not for a list or a range of VLAN IDs.
- DHCP snooping is automatically enabled on the specified VLAN.
- The forwarding-class statement is not available at the [edit vlans *vlan-name* forwarding-options [dhcp-security](#)] hierarchy level.

See “[Enabling Dynamic ARP Inspection \(CLI Procedure\)](#)” on page 638 for more information about this configuration.



**NOTE:** On EX9200 switches, DAI is not supported in an MC-LAG scenario.

The remaining statement is explained separately.




|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring DHCP Snooping, DAI , and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465</a></li> <li>• <a href="#">Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456</a></li> <li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621</a></li> <li>• <a href="#">Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473</a></li> <li>• <a href="#">Enabling Dynamic ARP Inspection (CLI Procedure) on page 636</a></li> <li>• <a href="#">Enabling Dynamic ARP Inspection (J-Web Procedure)</a></li> </ul> |

## arp-inspection (MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | arp-inspection;                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <a href="#">dhcp-security</a> ]                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Perform dynamic ARP inspection (DAI).</p> <p>DAI can only be configured for a specific bridge domain, not for a list or a range of bridge domain names.</p> <p>DHCP snooping is automatically enabled on the specified VLAN or bridge domain.</p>                                                                                                            |
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Dynamic ARP Inspection to Protect Switching Devices Against ARP Spoofing (CLI Procedure) on page 550</a></li> <li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553</a></li> </ul> |

## authentication (Security IPsec)

---

|                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                 | <pre>authentication {<br/>    algorithm (hmac-sha1-96   hmac-sha2-256);<br/>    key (ascii-text <i>key</i>   hexadecimal <i>key</i>);<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                        | [edit security ipsec security-association <i>sa-name</i> manual direction (inbound   outbound   bi-directional)]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>                                                                                                                                                                                                                    | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                                                                                                                                                                                                                            | Configure IP Security (IPsec) authentication parameters for manual security association (SA).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <div> <b>NOTE:</b> The hexadecimal format must be used for the encryption key to be FIPS compliant. The hexadecimal keys provide maximum key strength.</div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                                                                                                                                                                                                                                | <p><b>algorithm</b>—Hash algorithm that authenticates packet data. It can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>hmac-md5-96</b>—Produces a 128-bit digest.</li><li>• <b>hmac-sha1-96</b>—Produces a 160-bit digest.</li></ul> <p><b>key</b>—Type of authentication key. It can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>ascii-text <i>key</i></b>—ASCII text key. For <b>hmac-md5-96</b>, the key is 16 ASCII characters; for <b>hmac-sha1-96</b>, the key is 20 ASCII characters.</li><li>• <b>hexadecimal <i>key</i></b>—Hexadecimal key. For <b>hmac-md5-96</b>, the key is 32 hexadecimal characters; for <b>hmac-sha1-96</b>, the key is 40 hexadecimal characters.</li></ul> |
| <b>Required Privilege Level</b>                                                                                                                                                                                                               | <p><b>admin</b>—To view this statement in the configuration.</p> <p><b>admin-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>                                                                                                                                                                                                                  | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Authentication Algorithm and Key on page 200</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

---

## authentication-algorithm (Security IKE)

---

|                                 |                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | authentication-algorithm (md5   sha1);                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">proposal</a> <i>ike-proposal-name</i> ]                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                         |
| <b>Description</b>              | Configure the Internet Key Exchange (IKE) authentication algorithm.                                                                                                                                                                                       |
| <b>Options</b>                  | <b>authentication-algorithm</b> —Hash algorithm that authenticates packet data. It can be one of two algorithms: <ul style="list-style-type: none"><li>• <b>md5</b>—Produces a 128-bit digest.</li><li>• <b>sha1</b>—Produces a 160-bit digest.</li></ul> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Authentication Algorithm for an IKE Proposal on page 208</a></li></ul>                                                                                                                |

## authentication-algorithm (Security IPsec)

---

|                            |                                                            |
|----------------------------|------------------------------------------------------------|
| <b>Syntax</b>              | authentication-algorithm (hmac-md5-96   hmac-sha1-96);     |
| <b>Hierarchy Level</b>     | [edit security ipsec proposal <i>ipsec-proposal-name</i> ] |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.          |
| <b>Description</b>         | Configure the IPsec authentication algorithm.              |



**NOTE:** Keep the following points in mind when you configure the authentication algorithm in an IPsec proposal:

- When both ends of an IPsec VPN tunnel contain the same IKE proposal but different IPsec proposals, an error occurs and the tunnel is not established in this scenario. For example, if one end of the tunnel contains router 1 configured with the authentication algorithm as hmac-sha-256-128 and the other end of the tunnel contains router 2 configured with the authentication algorithm as hmac-md5-96, the VPN tunnel is not established.
- When both ends of an IPsec VPN tunnel contain the same IKE proposal but different IPsec proposals, and when one end of the tunnel contains two IPsec proposals to check whether a less secure algorithm is selected or not, an error occurs and the tunnel is not established. For example, if you configure two authentication algorithms for an IPsec proposal as hmac-sha-256-128 and hmac-md5-96 on one end of the tunnel, router 1, and if you configure the algorithm for an IPsec proposal as hmac-md5-96 on the other end of the tunnel, router 2, the tunnel is not established and the number of proposals mismatch.
- When you configure two IPsec proposals at both ends of a tunnel, such as the authentication-algorithm hmac-sha-256-128 and authentication-algorithm hmac-md5-96 statements at the [edit services ipsec-vpn ipsec proposal *proposal-name*] hierarchy level on one of the tunnel, router 1 (with the algorithms in two successive statements to specify the order), and the authentication-algorithm hmac-md5-96 and authentication-algorithm hmac-sha-256-128 statements at the [edit services ipsec-vpn ipsec proposal *proposal-name*] hierarchy level on one of the tunnel, router 2 (with the algorithms in two successive statements to specify the order, which is the reverse order of router 1), the tunnel is established in this combination as expected because the number of proposals is the same on both ends and they contain the same set of algorithms. However, the authentication algorithm selected is hmac-md5-96 and not the stronger algorithm of hmac-sha-256-128. This method of selection of the algorithm occurs because the first matching proposal is selected. Also, for a default proposal, regardless of whether the router supports the Advanced Encryption Standard (AES) encryption algorithm, the 3des-cbc algorithm is chosen

and not the aes-cfb algorithm, which is because of the first algorithm in the default proposal being selected. In the sample scenario described here, on router 2, if you reverse the order of the algorithm configuration in the proposal so that it is the same order as the one specified on router 1, hmac-sha-256-128 is selected as the authentication method.

- You must be aware of the order of proposals in an IPsec policy at the time of configuration if you want the matching of proposals to happen in a certain order of preference, such as the strongest algorithm to be considered first when a match is made when both policies from the two peers have a proposal.
- 

**Options**    **authentication-algorithm**—Hash algorithm that authenticates packet data. It can be one of two algorithms:

- **hmac-md5-96**—Produces a 128-bit digest.
- **hmac-sha1-96**—Produces a 160-bit digest.

**Required Privilege Level**    admin—To view this statement in the configuration.  
                                         admin-control—To add this statement to the configuration.

**Related Documentation**    • [Configuring the Authentication Algorithm for an IPsec Proposal on page 213](#)

## authentication-key-chains

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> authentication-key-chains {   key-chain key-chain-name {     description text-string;     key key {       algorithm (md5   hmac-sha-1);       options (basic   isis-enhanced);       secret secret-data;       start-time yyyy-mm-dd.hh:mm:ss;     }     tolerance seconds;   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit security]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in JUNOS OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Configure authentication key updates for the Border Gateway Protocol (BGP), the Label Distribution Protocol (LDP) routing protocols, the Bidirectional Forwarding Detection (BFD) protocol, and the Intermediate System-to-Intermediate System (IS-IS) protocol. When the <b>authentication-key-chains</b> statement is configured at the <b>[edit security]</b> hierarchy level, and is associated with the BGP, LDP, or IS-IS protocols at the <b>[edit protocols]</b> hierarchy level or with the BFD protocol using the <b>bfd-liveness-detection</b> statement, authentication key updates can occur without interrupting routing and signaling protocols such as Open Shortest Path First (OSPF) and Resource Reservation Setup Protocol (RSVP).</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Authentication Key Updates</i></li> <li>• <i>Example: Configuring BFD Authentication for Securing Static Routes</i></li> <li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## authentication-method

---

|                                 |                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | authentication-method (dsa-signatures   pre-shared-keys   rsa-signatures);                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">proposal</a> <i>ike-proposal-name</i> ]                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure the IKE authentication method.                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>dsa-signatures</b>—Digital Signature Algorithm (DSA)</p> <p><b>rsa-signatures</b>—A public key algorithm, which supports encryption and digital signatures</p> <p><b>pre-shared-keys</b>—A key derived from an out-of-band mechanism; the key authenticates the exchange</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Authentication Algorithm and Key on page 200</a></li> <li>• <i>authentication-method (SRX Series)</i></li> </ul>                                                                                              |

## auto-re-enrollment

---

|                                 |                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>auto-re-enrollment {<br/>  certificate-id {<br/>    ca-profile <i>ca-profile-name</i>;<br/>    challenge-password <i>password</i>;<br/>    re-enroll-trigger-time-percentage <i>percentage</i>;<br/>    re-generate-keypair;<br/>    validity-period <i>days</i>;<br/>  }<br/>}</pre>   |
| <b>Hierarchy Level</b>          | [edit security pki]                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.                                                                                                                                                                                                                                                |
| <b>Description</b>              | Specify auto-reenrollment parameters for a certificate authority (CA) issued router certificate. Auto-reenrollment requests that the issuing CA replace a router certificate before its specified expiration date.                                                                           |
| <b>Options</b>                  | The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 24</a></li><li>• <a href="#">Configuring Digital Certificates for Adaptive Services Interfaces on page 18</a></li></ul> |




---

## auxiliary-spi (Security IPsec)

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>auxiliary-spi <i>auxiliary-spi-value</i>;</code>                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit security ipsec security-association <i>sa-name</i> manual <b>direction</b> (inbound   outbound   bi-directional)]                                                                        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                              |
| <b>Description</b>              | Configure the auxiliary Security Parameter Index (SPI) for a manual SA. Use the auxiliary SPI when you configure the <b>protocol</b> statement to use the <b>bundle</b> option.                |
| <b>Options</b>                  | <b><i>auxiliary-spi-value</i></b> —Arbitrary value that uniquely identifies which SA to use at the receiving host (the destination address in the packet).<br><b>Range:</b> 256 through 16,639 |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Security Parameter Index on page 200</a></li><li>• <a href="#">spi on page 985</a></li></ul>                               |

## bandwidth


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bandwidth <i>bandwidth</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <code>ethernet-switching-options storm-control interface</code> (all   <i>interface-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.5 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Configure the storm control level as the bandwidth in kilobits per second of the applicable traffic streams, as follows:</p> <ul style="list-style-type: none"> <li>On EX2200, EX3200, EX3300, EX4200, and EX6200 switches—Applies to the combined broadcast and unknown unicast streams by default. Storm control does not apply to multicast traffic by default on these switches. If you enable storm control for multicast traffic on a specific interface, the configured bandwidth allocation applies to the combined broadcast, unknown unicast, and multicast traffic on that interface.</li> <li>On EX4500 and EX8200 switches—Applies to the combined broadcast, multicast, and unknown unicast streams.</li> </ul> |
|                                 | <p> <b>NOTE:</b> When you configure storm control bandwidth on an aggregated Ethernet interface, the storm control level for each member of the aggregated Ethernet interface is set to that bandwidth. For example, if you configure a storm control bandwidth of 15,000 Kbps on ae1, and ae1 has two members, ge-0/0/0 and ge-0/0/1, each member has a storm control level of 15,000 Kbps. Thus, the storm control level on ae1 allows a traffic rate of up to 30,000 Kbps of combined broadcast, multicast, and unknown unicast traffic.</p>                                                                                               |
| <b>Default</b>                  | If you omit the <b>bandwidth</b> statement when you configure storm control on an interface, the storm control level defaults to 80 percent of the available bandwidth used by the combined applicable traffic streams. Depending upon the configuration, applicable traffic could include broadcast, unknown unicast, and multicast traffic.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <p><b>bandwidth</b>—Traffic rate in kilobits per second of the combined applicable traffic streams.</p> <p><b>Range:</b> 100 through 10,000,000</p> <p><b>Default:</b> None</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">level on page 828</a></li> <li><a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

- [Disabling or Enabling Storm Control \(CLI Procedure\) on page 599](#)

## bandwidth (DDoS)


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bandwidth <i>packets-per-second</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"> <li>• For MX Series routers, T4000 routers, and EX9200 switches:<br/>[edit system ddos-protection <a href="#">protocols</a> <i>protocol-group</i> (aggregate   <i>packet-type</i>)]</li> <li>• For PTX Series routers and QFX Series switches:<br/>[edit system ddos-protection <a href="#">protocols</a> <i>protocol-group</i> (aggregate   <i>packet-type</i>)]</li> </ul>                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.</p> <p>Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.</p>                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Configure the DDoS bandwidth rate limit; that is, the maximum traffic rate (packets per second) allowed by the specified policer. When the value is exceeded, a violation is declared.                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b><i>packets-per-second</i></b>—Number of packets per second that are allowed by the aggregate or packet-type policer.</p> <p><b>Range:</b> 1 through 100,000 packets per second</p> <p><b>Default:</b> The default bandwidth value varies by packet type or protocol. You can view the default values for all packet types or protocols before you begin DDoS protection configuration by entering the <b>show ddos-protection protocols parameters brief</b> command from operational mode. For PTX Series routers and QFX Series switches, the default bandwidth limits are also provided in the <a href="#">protocols (DDoS) (PTX Series and QFX Series)</a> statement description.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li> <li>• <a href="#">Configuring DDoS Protection Policers on QFX Series Switches on page 56</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## bandwidth-level

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bandwidth-level <i>kbps</i></code> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit forwarding-options <b>storm-control-profiles</b> <i>profile-name</i> all]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 13.2 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1 for MX Series routers.                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Configure the storm control level as the bandwidth in kilobits per second of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                 | <div>  <p><b>NOTE:</b> When you configure storm control level on an aggregated Ethernet interface, the storm control level for each member of the aggregated Ethernet interface is set to that bandwidth. For example, if you configure a storm control level of 15,000 Kbps on ae1, and ae1 has two members, ge-0/0/0 and ge-0/0/1, each member has a storm control level of 15,000 Kbps. Thus, the storm control level on ae1 allows a traffic rate of up to 30,000 Kbps of combined broadcast, multicast, and unknown unicast traffic.</p> </div> |
| <b>Default</b>                  | <p>On EX4300 switches—If you do not specify the storm control level using either the <b>bandwidth-level</b> or the <b>bandwidth-percentage</b> statements, the storm control level defaults to 80 percent of the available bandwidth used by the combined broadcast, unknown unicast, and multicast traffic streams.</p> <p>On EX9200 switches—Storm control is not enabled by default.</p> <p>On MX Series routers—Storm control is not enabled by default.</p>                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>bandwidth-level <i>kbps</i></b>—Traffic rate in kilobits per second of the combined broadcast, multicast, and unknown unicast traffic streams.</p> <p><b>Range:</b> 100 through 10,000,000</p> <p><b>Range:</b> 100 through 100,000,000 on QFX10000 Series switches</p> <p><b>Default:</b> None</p>                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">bandwidth-percentage on page 683</a></li> <li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                       |

- [Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602](#)
- [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)

## bandwidth-percentage

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bandwidth-percentage <i>percentage</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit forwarding-options <a href="#">storm-control-profiles</a> <i>profile-name</i> all]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 13.2 for the QFX series.<br>Statement introduced in Junos OS Release 14.1 for MX Series routers.                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Configure the storm control level as the percentage of available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams on an interface. The storm control level is configured as part of the storm control profile.                                                                                                                                                                                                                                                                                                                                                                                 |
|                                 | <div>  <p><b>NOTE:</b> When you configure storm control level on an aggregated Ethernet interface, the storm control level for each member of the aggregated Ethernet interface is set to that bandwidth. For example, if you configure a storm control level of 15,000 Kbps on ae1, and ae1 has two members, ge-0/0/0 and ge-0/0/1, each member has a storm control level of 15,000 Kbps. Thus, the storm control level on ae1 allows a traffic rate of up to 30,000 Kbps of combined broadcast, multicast, and unknown unicast traffic.</p> </div> |
| <b>Default</b>                  | <p>On EX4300 switches—The storm control level is 80 percent of the available bandwidth used by the combined broadcast, unknown unicast, and multicast traffic streams.</p> <p>On EX9200 switches—Storm control is not enabled by default.</p> <p>On MX Series routers—Storm control is not enabled by default.</p>                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">bandwidth-level on page 682</a></li> <li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607</a></li> <li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602</a></li> <li>• <a href="#">Configuring or Disabling Storm Control (CLI Procedure) on page 591</a></li> </ul>                                                                                                                                                                                     |

## bandwidth-scale (DDoS)

---

|                                 |                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>bandwidth-scale <i>percentage</i>;</code>                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit system ddos-protection protocols <i>protocol-group</i> (aggregate   <i>packet-type</i> ) <b>fpc</b> <i>slot-number</i> ]                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.</p> <p>Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.</p> |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Configure the percentage by which the DDoS bandwidth rate limit is scaled down for the aggregate or packet-type policer on the card in the specified slot.                        |
| <b>Options</b>                  | <p><b><i>percentage</i></b>—Percentage multiplied by the bandwidth rate limit to reduce the number of packets per second allowed for the packet type or protocol.</p> <p><b>Range:</b> 1 through 100 percent</p> <p><b>Default:</b> 100</p>                                                                      |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li><li>• <a href="#">Configuring DDoS Protection Policers on QFX Series Switches on page 56</a></li></ul>                                                                   |

## bridge-domains

**Syntax**

```
bridge-domains {
 bridge-domain-name {
 bridge-options {
 ...bridge-options-configuration...
 }
 domain-type bridge;
 interface interface-name;
 no-irb-layer-2-copy;
 no-local-switching;
 routing-interface routing-interface-name;
 vlan-id (all | none | number);
 vlan-id-list [vlan-id-numbers];
 vlan-tags outer number inner number;
 bridge-options {
 interface interface-name {
 mac-pinning
 static-mac mac-address;
 }
 interface-mac-limit limit;
 mac-statistics;
 mac-table-size limit;
 no-mac-learning;
 }
 }
}
```

**Hierarchy Level** [edit],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name*],  
[edit routing-instances *routing-instance-name*]

**Release Information** Statement introduced in Junos OS Release 8.4.  
Support for logical systems added in Junos OS Release 9.6.  
Support for the **no-irb-layer-2-copy** statement added in Junos OS Release 10.2.

**Description** (MX Series routers only) Configure a domain that includes a set of logical ports that share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

**Options** *bridge-domain-name*—Name of the bridge domain.



**NOTE:** You cannot use the slash (/) character as part of the bridge domain name. If you do, the configuration will not commit.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring a Bridge Domain](#)
- [Configuring a Layer 2 Virtual Switch](#)

---

## burst (DDoS)

---

**Syntax** burst size;

**Hierarchy Level**

- For MX Series routers, T4000 routers, and EX9200 switches:  
[edit system ddos-protection **protocols** protocol-group (aggregate | packet-type)]
- For PTX Series routers and QFX Series switches:  
[edit system ddos-protection **protocols** protocol-group (aggregate | packet-type)]

**Release Information** Statement introduced in Junos OS Release 11.2.  
Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.  
Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.  
Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.

**Description** (MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Configure the DDoS burst limit; that is, the maximum number of packets that is allowed in a burst of traffic by the specified policer. When this value is exceeded, a violation is declared.

**Options** size—Number of packets that are allowed in a burst by the aggregate or packet-type policer.  
**Range:** 1 through 100,000 packets  
**Default:** The default burst value varies by packet type or protocol. You can view the default values for all packet types or protocols on an unconfigured router or switch by entering the **show ddos-protection protocols parameters brief** command from operational mode. For PTX Series routers and QFX Series switches, the default bandwidth limits are also provided in the [protocols \(DDoS\) \(PTX Series and QFX Series\)](#) statement description.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring DDoS Protection Policers for Individual Packet Types on page 61](#)
- [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)



## burst-scale (DDoS)

|                                 |                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>burst-scale <i>percentage</i>;</code>                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit system ddos-protection protocols <i>protocol-group</i> (aggregate   <i>packet-type</i> ) <b>fpc</b> <i>slot-number</i> ]                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.</p> <p>Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.</p> |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Configure the percentage by which the DDoS burst limit is scaled down for the aggregate or packet-type policer on the card in the specified slot.                                 |
| <b>Options</b>                  | <p><b><i>percentage</i></b>—Percentage multiplied by the burst limit to reduce the number of packets allowed in a burst for the packet type or protocol.</p> <p><b>Range:</b> 1 through 100 percent</p> <p><b>Default:</b> 100</p>                                                                               |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li> <li>• <a href="#">Configuring DDoS Protection Policers on QFX Series Switches on page 56</a></li> </ul>                                                                |

## bypass-aggregate (DDoS)

---

**Syntax**    `bypass-aggregate;`

- Hierarchy Level**
- For MX Series routers, T4000 routers, and EX9200 switches:  
[edit system ddos-protection [protocols](#) *protocol-group packet-type*]
  - For QFX10000 and QFX5200 switches:  
[edit system ddos-protection [protocols](#) *protocol-group packet-type*]



**NOTE:** The `bypass-aggregate` option is not supported on QFX10002-60C switches.

**Release Information**

Statement introduced in Junos OS Release 11.2.  
Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.  
Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.

**Description** (MX Series routers with only MPCs, T4000 routers with only FPC5s, EX9200 switches, or QFX Series switches) Prevent this packet type from being considered by the DDoS aggregate policer. Traffic for the packet type is still included in traffic statistics.


**Required Privilege Level**

admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring DDoS Protection Policers for Individual Packet Types on page 61](#)
  - [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)


## cache-size

---

|                                                                                                                                                                           |                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                             | cache-size <i>bytes</i> ;                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>                                                                                                                                                    | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                              |
| <b>Release Information</b>                                                                                                                                                | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>                                                                                                                                                        | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure the cache size for digital certificates.                                                                                                                                  |
| <b>Options</b>                                                                                                                                                            | <b>bytes</b> —Cache size for digital certificates.<br><b>Range:</b> 64 through 4,294,967,295<br><b>Default:</b> 2 megabytes (MB)                                                                                                                                           |
| <div>  <b>NOTE:</b> We recommend that you limit your cache size to 4 MB.         </div> |                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b>                                                                                                                                           | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration                                                                                                                                                             |
| <b>Related Documentation</b>                                                                                                                                              | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Cache Size on page 14</a></li> </ul>                                                                                                                                                                  |

## cache-timeout-negative

---

|                                                                                                                                                                                                |                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                  | cache-timeout-negative <i>seconds</i> ;                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>                                                                                                                                                                         | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                              |
| <b>Release Information</b>                                                                                                                                                                     | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>                                                                                                                                                                             | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure a negative cache for digital certificates.                                                                                                                                |
| <b>Options</b>                                                                                                                                                                                 | <b>seconds</b> —Negative time to cache digital certificates, in seconds.<br><b>Range:</b> 10 through 4,294,967,295<br><b>Default:</b> 20                                                                                                                                   |
| <div> <b>CAUTION:</b> Configuring a large negative cache value can lead to a denial-of-service attack.</div> |                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b>                                                                                                                                                                | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration                                                                                                                                                             |
| <b>Related Documentation</b>                                                                                                                                                                   | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Negative Cache on page 15</a></li></ul>                                                                                                                                                                |

---

## ca-identity

---

|                                 |                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ca-identity <i>ca-identity</i>;</code>                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit security <a href="#">pki</a> <a href="#">ca-profile</a> <i>ca-profile-name</i> ]                                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.5.                                                                                                                                                                         |
| <b>Description</b>              | Specify the certificate authority (CA) identity to use in requesting digital certificates for J Series Services Routers and Adaptive Services (AS) and MultiServices PICs installed in M Series and T Series routers. |
| <b>Options</b>                  | <i>ca-identity</i> —The name of the CA identity. This name is typically the domain name of the CA.                                                                                                                    |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Specifying the CA Profile Name on page 20</a></li></ul>                                                                                                           |

## cak

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ckn <i>hexadecimal-number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association</a> <i>connectivity-association-name</i> <a href="#">pre-shared-key</a> ]                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Specifies the connectivity association key (CAK) for a pre-shared key.</p> <p>A pre-shared key includes a connectivity association key name (CKN) and a CAK. A pre-shared key is exchanged between two devices at each end of a point-to-point link to enable MACsec using dynamic security keys. The MACsec Key Agreement (MKA) protocol is enabled once the pre-shared keys are successfully exchanged. The pre-shared key—the CKN and CAK—must match on both ends of a link</p> |
| <b>Default</b>                  | No CAK exists, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b><i>hexadecimal-number</i></b>—The key name, in hexadecimal format.</p> <p>The key name is 32 hexadecimal characters in length. To maximize security, we recommend configuring all 32 digits of a CAK. If you enter a key name that is less than 32 characters long, the remaining characters are set to 0. However, you will receive a warning message when you commit the configuration.</p>                                                                                   |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                      |

## cak (MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>cak <i>hexadecimal-number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> pre-shared-key]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers. Statement introduced in Junos OS Release 17.3R1 for MX10003 Universal Routing Platforms.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Specifies the connectivity association key (CAK) for a pre-shared key.</p> <p>A pre-shared key includes a connectivity association key name (CKN) and a CAK. A pre-shared key is exchanged between two devices at each end of a point-to-point link to enable MACsec using dynamic security keys. The MACsec Key Agreement (MKA) protocol is enabled once the pre-shared keys are successfully exchanged. The pre-shared key—the CKN and CAK—must match on both ends of a link</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Default</b>                  | No CAK exists, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b><i>hexadecimal-number</i></b>—The key name, in hexadecimal format.</p> <p>The key name is 32 hexadecimal characters in length. If you enter a key name that is less than 32 characters long, the remaining characters are set to 0.</p> <p>On MX10003 router, to maximize the security, it is recommended to configure CAK of even length.</p> <ul style="list-style-type: none"> <li>• If you configure CAK of length that is less than 32 hexadecimal digits and if cipher-suite is gcm-aes-128/gcm-aes-256 and less than 64 hexadecimal digits, then the following warning message is displayed: <b>warning: To maximize security, recommend configuring all 32 digits of pre-shared-key cak</b> or <b>warning: To maximize security, recommend configuring all 64 digits of pre-shared-key cak</b></li> <li>• On MX10003 router, if you configure the length of CAK to an odd value, then the following warning message is displayed: <b>To maximize security, it is recommended to configure pre-shared-key cak of even length</b></li> </ul> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## ca-name

---

|                                 |                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ca-name <i>ca-identity</i>;</code>                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> ]                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify the certificate authority (CA) identity to use in the certificate request.                                                                                                 |
| <b>Options</b>                  | <i>ca-identity</i> —CA identity to use in the certificate request.                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Specifying the Certificate Authority Name on page 13</a></li></ul>                                                                                                                                                    |



## ca-profile

```
Syntax ca-profile ca-profile-name {
 ca-identity ca-identity;
 enrollment {
 url url-name;
 retry number-of-enrollment-attempts;
 retry-interval seconds;
 }
 revocation-check {
 disable:
 crl {
 disable on-download-failure;
 refresh-interval number-of-hours;
 url {
 url-name;
 password;
 }
 }
 }
 }
```

**Hierarchy Level** [edit security *pki*]

**Release Information** Statement introduced in Junos OS Release 7.5.  
*revocation-check* and *crl* statements added in Junos OS Release 8.1.

**Description** Specify the name of the certificate authority (CA) profile for Adaptive Services (AS) and MultiServices PICs installed on M Series and T Series routers.

The remaining statements are explained separately.

**Options** *ca-profile-name*—Name of the trusted CA.

**Required Privilege Level** admin—To view this statement in the configuration.  
 admin-control—To add this statement to the configuration.

**Related Documentation**

- [Specifying the CA Profile Name on page 20](#)

## certificate-id

---

|                                 |                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>certificate-id {<br/>    ca-profile <i>ca-profile-name</i>;<br/>    challenge-password <i>password</i>;<br/>    re-enroll-trigger-time-percentage <i>percentage</i>;<br/>    re-generate-keypair;<br/>    validity-period <i>days</i>;<br/>}</pre> |
| <b>Hierarchy Level</b>          | [edit security <a href="#">auto-re-enrollment</a> ]                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.                                                                                                                                                                                                           |
| <b>Description</b>              | Specify a router certificate for auto-reenrollment. The ID is the same as that used to get the end entity's certificate from the issuing certificate authority.                                                                                         |
| <b>Options</b>                  | The remaining statements are explained separately. See <a href="#">CLI Explorer</a> .                                                                                                                                                                   |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 24</a></li><li>• <a href="#">auto-re-enrollment on page 678</a></li></ul>          |

## certificates

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> certificates {   cache-size bytes;   cache-timeout-negative seconds;   certification-authority ca-profile-name {     ca-name ca-identity;     crt file-name;     encoding (binary   pem);     enrollment-url url-name;     file certificate-filename;     ldap-url url-name;   }   enrollment-retry attempts;   local certificate-name {     certificate-key-string;     load-key-file URL filename;   }   maximum-certificates number;   path-length certificate-path-length; } </pre> |
| <b>Hierarchy Level</b>          | [edit security]                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                 |
| <b>Description</b>              | <p>(Encryption interface on M Series and T Series routers and EX Series switches only)</p> <p>Configure the digital certificates for IPsec.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Digital Certificates for an ES PIC on page 11</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                 |

## certification-authority

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>certification-authority <i>ca-profile-name</i> {<br/>  <i>ca-name</i> <i>ca-identity</i>;<br/>  <i>crl</i> <i>file-name</i>;<br/>  <i>encoding</i> (binary   pem);<br/>  <i>enrollment-url</i> <i>url-name</i>;<br/>  <i>file</i> <i>certificate-filename</i>;<br/>  <i>ldap-url</i> <i>url-name</i>;<br/>}</pre>                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced before Junos OS Release 12.1 for the SRX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                  |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure a certificate authority profile name.<br><br>Configure certification authority (CA) for X.509 certificate.                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <ul style="list-style-type: none"><li>• <i>profile-name</i>—Name of this CA configuration.</li><li>• <i>ca-name</i> <i>name</i>—Name of the CA.</li><li>• <i>crl</i> <i>filename</i>—Certificate revocation list (CRL) filename.</li><li>• <i>encoding</i>—Certificate encoding, either <b>binary</b> or <b>pem</b> (privacy-enhanced mail).</li><li>• <i>enrollment-url</i> <i>url</i>—Enrollment URL.</li><li>• <i>file</i> <i>filename</i>—Certificate filename.</li><li>• <i>ldap-url</i> <i>url</i>—Lightweight Directory Access Protocol (LDAP) URL.</li></ul> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Certificate Authority Properties for an ES PIC on page 12</a></li><li>• <a href="#">Configuring the Certificate Authority Properties for an ES PIC on page 12</a></li></ul>                                                                                                                                                                                                                                                                                                                      |



---

## challenge-password

---

|                                 |                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>challenge-password <i>password</i>;</code>                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security pki auto-re-enrollment certificate-id]                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.                                                                                                                                                                                                  |
| <b>Description</b>              | Specify the challenge password used by the certificate authority (CA) for router certificate enrollment and revocation. This challenge password must be the same used when the router certificate was originally configured.                   |
| <b>Options</b>                  | <i>password</i> —The password required by the CA.                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 24</a></li><li>• <a href="#">auto-re-enrollment on page 678</a></li></ul> |

## cipher-suite (MACsec)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>cipher-suite <i>encryption-algorithm-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>     | [edit security <code>macsec</code> <code>connectivity-association</code> <code>connectivity-association-name</code> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 16.2R1 for MX240, MX480, MX960, MX2020, and MX2010 routers.</p> <p>Statement introduced in Junos OS Release 17.2R1 for QFX Series switches.</p> <p>Statement introduced in Junos OS Release 17.3R1 for JNP-MIC1-MACSEC MIC on MX10003 routers.</p> <p>Statement introduced in Junos OS Release 18.2R1 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>         | <p>Specify the set of ciphers used to encrypt traffic on an Ethernet link that is secured with Media Access Control Security (MACsec). The encryption used by MACsec ensures that the data in the Ethernet frame cannot be viewed by anybody monitoring traffic on the link. MACsec encryption is optional and user-configurable. The configured cipher suites should be the same between MACsec peers.</p> <p>MACsec utilizes the Galois/Counter Mode Advanced Encryption Standard (GCM-AES). The default cipher suite used for MACsec is GCM-AES-128, with a maximum key length of 128 bits. MACsec also supports GCM-AES-256, with a maximum key length of 256 bits.</p> <p>GCM-AES-128 and GCM-AES-256 use a 32-bit packet number as part of the initial value that has to be unique for every packet sent with a given secure association key (SAK). When the permutations of the 32-bit packet number are exhausted, the SAK must be refreshed. The frequency of SAK refreshes can be reduced by using a cipher suite with Extended Packet Numbering (XPN), which increases the size of the packet number to 64-bits. Both GCM-AES-128 and GCM-AES-256 are available with XPN.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 20px;"> <p> <b>NOTE:</b> When enabling MACsec on ports with speeds greater than 10-Gigabit Ethernet, we recommend using either the GCM-AES-XPN-128 or GCM-AES-XPN-256 cipher suite.</p> </div> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 20px;"> <p> <b>NOTE:</b> On EX4300-48MP switches, the XPN cipher suites are not supported on multi-rate ports.</p> </div> |
| <b>Default</b>             | If the <code>cipher-suite</code> statement is not configured, the default cipher suite used for encryption is GCM-AES-128.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>             | <code>gcm-aes-128</code> —GCM-AES-128 has a maximum key size of 128 bits.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

**gcm-aes-xpn-128**—GCM-AES-XPB-128 has a maximum key size of 128 bits and extended packet number.


**gcm-aes-256**—GCM-AES-256 has a maximum key size of 256 bits.

**gcm-aes-xpn-256**—GCM-AES-XPB-256 has a maximum key size of 256 bits and extended packet number.

|                                 |                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin— To view this statement in the configuration.<br>admin-control— To add this statement to the configuration. |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                           |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul> |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## circuit-id

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> circuit-id {   prefix {     host-name;     logical-system-name;     routing-instance-name;   }   use-interface-description (device   logical);   use-vlan-id; } </pre>                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"> <li>For platforms with Enhanced Layer 2 Software (ELS):<br/>[edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security option-82</a> ]</li> <li>For MX Series platforms:<br/>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options <a href="#">dhcp-security option-82</a>]</li> </ul>                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Hierarchy level [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security</a>] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 14.1 for the MX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> |
| <b>Description</b>              | <p>Configure the <b>circuit-id</b> suboption (suboption 1) of DHCP option 82 (the DHCP relay agent information option) in DHCP packets destined for a DHCP server. This suboption identifies the circuit (the interface, the VLAN, or both) on which the DHCP request arrived.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                 |
| <b>Default</b>                  | <p>If DHCP option 82 is enabled on the switch, the circuit ID is supplied by default in the format <i>interface-name:vlan-name</i> or, on a Layer 3 interface, just <i>interface-name</i>.</p>                                                                                                                                                                                                                                                                                                                                                 |
|                                 | <div>  <p><b>NOTE:</b> When you configure <b>circuit-id</b>, <b>remote-id</b> is also enabled, even if you do not explicitly configure <b>remote-id</b>.</p> </div>                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                 |



- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500](#)
- [Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 528](#)
- [Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 508](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>

## ckn

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ckn <i>hexadecimal-number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association</a> <i>connectivity-association-name</i> <a href="#">pre-shared-key</a> ]                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Specifies the connectivity association key name (CKN) for a pre-shared key.</p> <p>A pre-shared key includes a CKN and a connectivity association key (CAK). A pre-shared key is exchanged between two devices at each end of a point-to-point link to enable MACsec using dynamic security keys. The MACsec Key Agreement (MKA) protocol is enabled once the pre-shared keys are successfully exchanged. The pre-shared key—the CKN and CAK—must match on both ends of a link</p> |
| <b>Default</b>                  | No CKN exists, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><i>hexadecimal-number</i>—The key name, in hexadecimal format.</p> <p>The key name is 64 hexadecimal characters in length. To maximize security, we recommend configuring all 64 digits of a CKN. If you enter a key name that is less than 64 characters long, the remaining characters are set to 0. However, you will receive a warning message when you commit the configuration.</p>                                                                                          |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                    |

## connectivity-association

---

**Syntax**    connectivity-association *connectivity-association-name* {  
              exclude-protocol *protocol-name*;  
              include-sci;  
              mka {  
                  must-secure;  
                  key-server-priority *priority-number*;  
                  transmit-interval *interval*;  
              }  
              no-encryption;  
              offset (0|30|50);  
              pre-shared-key {  
                  cak *hexadecimal-number*;  
                  ckn *hexadecimal-number*;  
              }  
              replay-protect {  
                  replay-window-size *number-of-packets*;  
              }  
              secure-channel *secure-channel-name* {  
                  direction (inbound | outbound);  
                  encryption (MACsec);  
                  id {  
                      mac-address *mac-address*;  
                      port-id *port-id-number*;  
                  }  
                  offset (0|30|50);  
                  security-association *security-association-number* {  
                      key *key-string*;  
                  }  
              }  
              security-mode *security-mode*;  
          }

**Hierarchy Level**    [edit security [macsec](#)]

**Release Information**    Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.

**Description**    Create or configure a MACsec connectivity association.

A connectivity association is not applying MACsec to traffic until it is associated with an interface. MACsec connectivity associations are associated with interfaces using the [interfaces](#) statement in the [edit security macsec] hierarchy.

**Default**    No connectivity associations are present, by default.

**Options**    The remaining statements are explained separately.

**Required Privilege Level**    admin—To view this statement in the configuration.  
                                  admin-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring Media Access Control Security \(MACsec\) on page 413](#)

## connectivity-association (MACsec Interfaces)

---

|                                 |                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>connectivity-association <i>connectivity-association-name</i>;</code>                                                        |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec interfaces</a> <i>interface-name</i> ]                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                       |
| <b>Description</b>              | Applies a connectivity association to an interface, which enables Media Access Control Security (MACsec) on that interface.        |
| <b>Default</b>                  | No connectivity associations are associated with any interfaces.                                                                   |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul> |

## connectivity-association (MACsec Interfaces for MX Series)

---

|                                 |                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>connectivity-association <i>connectivity-association-name</i>;</code>                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec interfaces</a> <i>interface-name</i> ]                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                |
| <b>Description</b>              | Applies a connectivity association to an interface, which enables Media Access Control Security (MACsec) on that interface.                                                                       |
| <b>Default</b>                  | No connectivity associations are associated with any interfaces.                                                                                                                                  |
| <b>Options</b>                  | <p><b><i>connectivity-association-name</i></b>—Name of the MACsec connectivity association.</p> <p><b>Range:</b> 1 through 32 alphanumeric characters. Allowed characters are [a-z, A-Z, 0-9]</p> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on MX Series Routers</a></li> </ul>                                                       |

## crl (Adaptive Services Interface)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>crl {<br/>  disable on-download-failure;<br/>  refresh-interval <i>number-of-hours</i>;<br/>  url {<br/>    url-name;<br/>    password;<br/>  }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit security <b>pki</b> <b>ca-profile</b> <i>ca-profile-name</i> revocation-check]                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Configure the certificate revocation list (CRL). A CRL is a time-stamped list identifying revoked certificates, which is signed by a CA and made available to the participating IPsec peers on a regular periodic basis.                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>disable on-download-failure</b>—Permit the authentication of the IPsec peer when the CRL is not downloaded.</p> <p><b>password</b>—Password to access the URLs.</p> <p><b>refresh-interval</b> <i>number-of-hours</i>—Time interval, in hours, between CRL updates.<br/><b>Range:</b> 0 through 8784<br/><b>Default:</b> 24</p> <p><b>url</b> <i>url-name</i>—Location from which to retrieve the CRL through the Lightweight Directory Access Protocol (LDAP). You can configure as many as three URLs for each configured CA profile.</p> |
| <b>Required Privilege Level</b> | <p><b>admin</b>—To view this statement in the configuration.</p> <p><b>admin-control</b>—To add this statement to the configuration</p>                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Certificate Revocation List on page 21</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                          |

---

## crl (Encryption Interface)

---

|                                 |                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>crl <i>file-name</i>;</code>                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                              |
| <b>Description</b>              | <p>(Encryption interface on M Series and T Series routers and EX Series switches only)</p> <p>Configure the certificate revocation list (CRL). A CRL is a time-stamped list identifying revoked certificates, which is signed by a CA and made available to the participating IPsec peers on a regular periodic basis.</p> |
| <b>Options</b>                  | <i>file-name</i> —Specify the file from which to read the CRL.                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration</p>                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Certificate Authority Properties for an ES PIC on page 12</a></li></ul>                                                                                                                                                                                |

## ddos-protection (DDoS)

```
Syntax ddos-protection
 global {
 disable-fpc;
 disable-logging;
 disable-routing-engine;
 flow-detection;
 flow-level-control;
 flow-detection-mode;
 flow-report-rate;
 violation-report-rate;
 }
 protocols protocol-group (aggregate | packet-type) {
 bandwidth packets-per-second;
 burst size;
 bypass-aggregate;
 disable-fpc;
 disable-logging;
 disable-routing-engine;
 flow-detection-mode (automatic | off | on);
 flow-detect-time seconds;
 flow-level-bandwidth {
 logical-interface flow-bandwidth;
 physical-interface flow-bandwidth;
 subscriber flow-bandwidth;
 }
 flow-level-control {
 logical-interface flow-control-mode;
 physical-interface flow-control-mode;
 subscriber flow-control-mode;
 }
 flow-level-detection {
 logical-interface flow-detection-mode;
 physical-interface flow-detection-mode;
 subscriber flow-detection-mode;
 }
 flow-recover-time seconds;
 flow-timeout-time seconds;
 fpc slot-number {
 bandwidth-scale percentage;
 burst-scale percentage;
 disable-fpc;
 }
 no-flow-logging
 priority level;
 recover-time seconds;
 timeout-active-flows;
 }
 traceoptions{
 file filename <files number> <match regular-expression > <size maximum-file-size>
 <world-readable | no-world-readable>;
 flag flag;
 level (all | error | info | notice | verbose | warning);
```

```

 no-remote-trace;
 }
}

```

|                                 |                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>          | [edit system]                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                     |
| <b>Description</b>              | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure DDoS policers.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Protection Against DDoS Attacks on page 60</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul>                                                                                            |

## ddos-protection (DDoS) (PTX Series and QFX Series)

```
Syntax ddos-protection
 global {
 disable-fpc;
 disable-logging;
 }
 protocols protocol-group (aggregate | packet-type) {
 bandwidth packets-per-second;
 burst size;
 bypass-aggregate;
 disable-fpc;
 disable-logging;
 fpc slot-number {
 bandwidth-scale percentage;
 burst-scale percentage;
 disable-fpc;
 }
 priority level;
 }
 traceoptions {
 file filename <files number> <match regular-expression> <size maximum-file-size>
 <world-readable | no-world-readable>;
 flag flag;
 level (all | error | info | notice | verbose | warning);
 no-remote-trace;
 }
 }
```

**Hierarchy Level** [edit system]

**Release Information** Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.  
Statement introduced in Junos OS Release 17.4R1 on PTX Series switches.

**Description** Configure DDoS policers.

The remaining statements are explained separately. See [CLI Explorer](#).



**NOTE:** PTX Series routers and QFX10002-60C switches do not support the `bypass-aggregate` option.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)



## description (Authentication Keychain)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>description <i>text-string</i>;</code>                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | <code>[edit security authentication-key-chains key-chain <i>key-chain-name</i>]</code>                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in JUNOS OS Release 11.2.</p> |
| <b>Description</b>              | Configure a description for an authentication key-chain.                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <b><i>text-string</i></b> —A text string describing the <b>authentication-key-chain</b> . Put the text string in quotes ("text description").                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Authentication Key Updates</i></li> <li>• <i>Example: Configuring BFD Authentication for Securing Static Routes</i></li> <li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li> </ul>                                                                                           |

## description (IKE policy)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>description <i>description</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">policy</a> <i>ike-peer-address</i> ],<br>[edit security ike <a href="#">proposal</a> <i>ike-proposal-name</i> ],<br>[edit security ipsec <a href="#">policy</a> <i>ipsec-policy-name</i> ],<br>[edit security ipsec <a href="#">proposal</a> <i>ipsec-proposal-name</i> ],<br>[edit security ipsec <a href="#">security-association</a> <i>sa-name</i> ]                                                                                             |
| <b>Description</b>              | Specify a text description for an IKE proposal or policy, or an IPsec proposal, policy, or SA.                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Security Associations for IPsec on an ES PIC on page 195</a></li><li>• <a href="#">Configuring the Description for an IKE Proposal on page 208</a></li><li>• <a href="#">Configuring the Description for an IKE Policy on page 211</a></li><li>• <a href="#">Configuring an IPsec Proposal for an ES PIC on page 213</a></li><li>• <a href="#">Configuring the IPsec Policy for an ES PIC on page 215</a></li></ul> |

## dhcp-option82

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> dhcp-option82 {   circuit-id {     prefix hostname;     use-interface-description;     use-vlan-id;   }   remote-id {     prefix hostname   mac   none;     use-interface-description;     use-string <i>string</i>;   }   vendor-id &lt;<i>string</i>&gt;; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i>)]</p> <p>[edit forwarding-options helpers bootp]</p> <p>[edit forwarding-options helpers bootp interface <i>interface-name</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>When the switch receives a DHCP request from a DHCP client connected on one of the switch's interfaces, have the switch insert DHCP option 82 (also known as the DHCP relay agent information option) information in the DHCP request packet header before it forwards or relays the request to a DHCP server. The server uses the option 82 information, which provides details about the circuit and host the request came from, in formulating the reply; the server does not, however, make any changes to the option 82 information in the packet header. The switch receives the reply and then removes the DHCP option 82 information before forwarding the reply to the client.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Default</b>                  | <p>Insertion of DHCP option 82 information is not enabled.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 528</a></li> <li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 508</a></li> </ul>                                                                                                                                                     |

- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>.

## dhcp-security

```
Syntax dhcp-security {
 arp-inspection;
 dhcpv6-options {
 light-weight-dhcpv6-relay;
 option-16 {
 use-string string;
 }
 option-18 {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 vlan-id;
 vlan-name;
 }
 use-interface-mac;
 use-interface-index (device | logical);
 use-interface-description (device | logical);
 use-interface-name (device | logical);
 use-string string;
 }
 option-37 {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 vlan-id;
 vlan-name;
 }
 use-interface-mac;
 use-interface-index (device | logical);
 use-interface-description (device | logical);
 use-interface-name (device | logical);
 use-string string;
 }
 }
 group group-name {
 interface interface-name {
 static-ip ip-address {
 mac mac-address;
 }
 static-ipv6 ip-address {
 mac mac-address;
 }
 }
 }
 overrides {
 no-dhcpv6-options;
 no-option16;
 no-option18;
 no-option37;
 no-option82;
 trusted;
 }
 }
```

```
 untrusted;
 }
}
ip-source-guard;
ipv6-source-guard;
neighbor-discovery-inspection;
no-dhcp-snooping;
no-dhcpv6-snooping;
option-82 {
 circuit-id {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 }
 use-interface-description (device | logical);
 use-vlan-id;
 }
 remote-id {
 host-name hostname;
 use-interface-description (device | logical);
 mac;
 use-string string;
 }
 vendor-id {
 use-string string;
 }
}
}
```

**Hierarchy Level** [edit vlans *vlan-name* forwarding-options]

**Release Information** Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches. Statement introduced in Junos OS Release 13.2 for the QFX series. Support for **static-ipv6**, **neighbor-discovery-inspection**, **ipv6-source-guard**, **no-dhcpv6-snooping**, and **no-option37** introduced in Junos OS Release 13.2X51-D20 for EX Series switches. Support for **dhcpv6-options**, **option-16**, **option-18**, **option-37**, **no-dhcpv6-options**, **no-option16**, **no-option18**, and **no-option37** introduced in Junos OS Release 14.2 for EX Series switches.

**Description** Configure DHCP or DHCPv6 snooping on the switch. DHCP snooping is also enabled automatically if you configure any of the following port security features within this hierarchy:

- Dynamic ARP inspection (DAI)
- IP source guard
- DHCP option 82
- Static IP

For switches that support DHCPv6, both DHCP snooping and DHCPv6 snooping are enabled automatically if you configure any of the afore-mentioned features or any of the following IPv6 features:

- IPv6 neighbor discovery inspection
- IPv6 source guard
- Static IPv6



**NOTE:** On EX9200 switches, DHCP Snooping, DHCPv6 Snooping and Port Security features are not supported in MC-LAG scenario.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 638](#)
- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)
- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 316](#)

## dhcp-security (MX Series)

---

**Syntax**    `dhcp-security {  
    arp-inspection;  
    group group-name {  
        interface interface-name {  
            static-ip ip-address {  
                mac mac-address;  
            }  
        }  
    }  
    overrides {  
        no-option82;  
        trusted;  
        untrusted;  
    }  
}  
ip-source-guard;  
no-dhcp-snooping;  
option-82 {  
    circuit-id {  
        prefix {  
            host-name;  
            logical-system-name;  
            routing-instance-name;  
        }  
    use-interface-description (device | logical);  
    use-vlan-id;  
}  
remote-id {  
    host-name;  
    use-interface-description (device | logical);  
    use-string string;  
}  
vendor-id {  
    use-string string;  
}  
}`

**Hierarchy Level**    [edit [bridge-domains](#) *bridge-domain-name* [forwarding-options](#) dhcp-security]

**Release Information**    Statement introduced in Junos OS Release 14.1 for the MX Series.

**Description**    Configure port security features on the switching device. DHCP snooping is enabled automatically if you configure any of the following port security features within this hierarchy:

- Dynamic ARP inspection (DAI)
- IP source guard
- DHCP option 82
- Static IP



The remaining statements are explained separately. See [CLI Explorer](#).

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <i>mac-address</i> —Value (in hexadecimal format) of the address assigned to this device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Dynamic ARP Inspection to Protect Switching Devices Against ARP Spoofing (CLI Procedure) on page 550</a></li><li>• <a href="#">Configuring IP Source Guard to Mitigate the Effects of Source IP Address Spoofing and Source MAC Address Spoofing (CLI Procedure) on page 543</a></li><li>• <a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li><li>• <a href="#">Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers (CLI Procedure) on page 549</a></li></ul> |

## dhcp-service

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> dhcp-service {   accept-max-tcp-connections <i>max-tcp-connections</i>;   dhcp-snooping-file(<i>local_pathname</i>   <i>remote_URL</i>) {     write-interval <i>interval</i>;   }   interface-traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i>&gt; &lt;size <i>maximum-file-size</i>&gt;       &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i>;     level (all   error   info   notice   verbose   warning);     no-remote-trace;   }   ltv-syslog-interval <i>seconds</i>;   request-max-tcp-connections <i>max-tcp-connections</i>;   traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i>&gt; &lt;size <i>maximum-file-size</i>&gt;       &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i>;     level (all   error   info   notice   verbose   warning);     no-remote-trace;   } } </pre> |
| <b>Hierarchy Level</b>          | [edit system processes]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1 for MX Series routers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Enable DHCP services on the device. DHCP services automate network-parameter assignment to network devices. The DHCP service process is enabled by default. However, by default, IP-MAC bindings in the DHCP snooping database do not persist through device reboots. You can improve performance after rebooting by configuring the IP-MAC bindings to persist, by configuring a storage location for the DHCP database file. When specifying the location for the DHCP database, you must also specify how frequently the switch writes the database entries into the DHCP snooping database file.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance (CLI Procedure) on page 533</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## dhcp-snooping-file

---

|                                 |                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>dhcp-snooping-file {   location ( local_pathname   remote_URL );   timeout seconds;   write-interval seconds; }</pre>                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options secure-access-port</a> ]                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.4 for EX Series switches.                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Ensure that IP-MAC bindings persist through switch reboots by specifying a local pathname or a remote URL for the storage location of the DHCP snooping database file.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                       |
| <b>Default</b>                  | The IP-MAC bindings in the DHCP snooping database file are not persistent. If the switch is rebooted, the bindings are lost.                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Making IP-MAC Bindings in the DHCP Snooping Database Persistent (CLI Procedure) on page 511</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |

## dhcp-snooping-file

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>dhcp-snooping-file (<i>local_pathname</i>   <i>remote_URL</i>);<br/>    <i>write-interval</i> <i>seconds</i>;<br/>}</code>                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit system processes <a href="#">dhcp-service</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 14.1 for MX Series routers.                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Ensure that IP-MAC bindings persist through the device reboots by specifying a local pathname or a remote URL for the storage location of the DHCP snooping database file. You <i>must</i> specify how frequently the device writes the database entries into the DHCP snooping database file.</p> <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                   |
| <b>Default</b>                  | The IP-MAC bindings in the DHCP snooping database file are not persistent by default. If the device is rebooted, the bindings are lost, and the table must be rebuilt on reboot.                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance (CLI Procedure) on page 533</a></li><li>• <a href="#">Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers (CLI Procedure) on page 549</a></li><li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li></ul> |

---

## dhcp-trusted

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (dhcp-trusted   no-dhcp-trusted);                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options secure-access-port interface</a> (all   <i>interface-name</i> )]                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Allow DHCP responses from the specified interfaces (ports) or all interfaces.</p> <ul style="list-style-type: none"><li>• <b>dhcp-trusted</b>—Allow DHCP responses.</li><li>• <b>no-dhcp-trusted</b>—Deny DHCP responses.</li></ul>                                                                                                                                    |
| <b>Default</b>                  | Trusted for trunk ports, untrusted for access ports.                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li>• <a href="#">Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 449</a></li><li>• <a href="#">Enabling a Trusted DHCP Server (CLI Procedure) on page 538</a></li></ul> |

## dhcpv6-options

```
Syntax dhcpv6-options {
 option-16 {
 use-string string;
 }
 option-18 {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 vlan-id;
 vlan-name;
 }
 use-interface-mac;
 use-interface-index (device | logical);
 use-interface-description (device | logical);
 use-interface-name (device | logical);
 use-string string;
 }
 option-37 {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 vlan-id;
 vlan-name;
 }
 use-interface-mac;
 use-interface-index (device | logical);
 use-interface-description (device | logical);
 use-interface-name (device | logical);
 use-string string;
 }
 }
```

**Hierarchy Level** [edit vlans *vlan-name* forwarding-options [dhcp-security](#)]

**Release Information** Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Configure optional information to be included in DHCPv6 packets during the DHCPv6 snooping process.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [no-dhcpv6-options on page 870](#)

- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)
- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 316](#)

## dhcpv6-snooping-file

|                                 |                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>dhcpv6-snooping-file (<i>local_pathname</i>   <i>remote_URL</i>);   location <i>local_pathname</i>   <i>remote_URL</i>;   timeout <i>seconds</i>;   write-interval <i>seconds</i>; }</pre>                                                                                                                                        |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"> <li>• For platforms with Enhanced Layer 2 Software (ELS):<br/>[edit system processes <a href="#">dhcp-service</a>];</li> <li>• For platforms without ELS:<br/>[edit ethernet-switching-options <a href="#">secure-access-port</a>]</li> </ul>                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X51-D20 for EX Series switches. Support at the [edit ethernet-switching-options <a href="#">secure-access-port</a> ] hierarchy level introduced in Junos OS 14.1X53-D10 for EX Series switches.                                                                                           |
| <b>Description</b>              | <p>Ensure that IP-MAC bindings persist through switch reboots by specifying a local pathname or a remote URL for the storage location of the DHCPv6 snooping database file.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                            |
| <b>Default</b>                  | The IP-MAC bindings in the DHCPv6 snooping database are not persistent. If the switch is rebooted, the bindings are lost.                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance (CLI Procedure) on page 533</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |

## dh-group

---

|                                 |                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | dh-group (group1   group2   group5   group14);                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">proposal</a> <i>ike-proposal-name</i> ]                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure the IKE Diffie-Hellman group.                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>dh-group</b>—Type of Diffie-Hellman prime modulus group when performing the new Diffie-Hellman exchange. It can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>group1</b>—768-bit.</li><li>• <b>group2</b>—1024-bit.</li><li>• <b>group5</b>—1536-bit.</li><li>• <b>group14</b>—2048-bit.</li></ul> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Diffie-Hellman Group for an IKE Proposal on page 209</a></li></ul>                                                                                                                                                                                             |



## direction

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | direction (inbound   outbound);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> <b>secure-channel</b> <i>secure-channel-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Configure whether the secure channel applies MACsec security to traffic entering or leaving an interface.</p> <p>If you need to apply MACsec on traffic entering and leaving an interface, you need to create one secure channel to apply MACsec on incoming traffic and another secure channel to apply MACsec on outgoing traffic within the same connectivity association. When you associate the connectivity association with an interface, MACsec is applied on traffic entering and leaving that interface.</p> <p>You only use this configuration option when you are configuring MACsec using static secure association keys (SAK) security mode. When you are configuring MACsec using static connectivity association keys (CAK) security mode, two secure channels that are not user-configurable—one inbound secure channel and one outbound secure channel—are automatically created within the connectivity association.</p> |
| <b>Default</b>                  | <p>This statement does not have a default value.</p> <p>If you have configured a secure channel to enable MACsec using static SAK security mode, you must specify whether the secure channel applies MACsec to traffic entering or leaving an interface. A candidate configuration that contains a secure channel that has not configured a direction cannot be committed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>inbound</b>—Enable MACsec security on traffic entering the interface that has applied the secure channel.</p> <p><b>outbound</b>—Enable MACsec security on traffic leaving the interface that has applied the secure channel.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## direction (Junos OS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>direction (inbound   outbound   bidirectional) {   authentication {     algorithm (hmac-md5-96   hmac-sha1-96);     key (ascii-text key   hexadecimal key);   }   auxiliary-spi auxiliary-spi-value;   encryption {     algorithm (des-cbc   3des-cbc);     key (ascii-text key   hexadecimal key);   }   protocol (ah   esp   bundle);   spi spi-value; }</pre>                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit security ipsec security-association <i>sa-name</i> <a href="#">manual</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Define the direction of IPsec processing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><b>inbound</b>—Inbound SA—Define algorithms, keys, or security parameter index (SPI) values to decrypt and authenticate incoming traffic coming from the peer.</p> <p><b>outbound</b>—Outbound SA—Define algorithms, keys, or SPI values to decrypt and authenticate outbound traffic to the peer.</p> <p><b>bidirectional</b>—Bidirectional SA—Decrypt and authenticate the incoming and outgoing traffic using the same algorithm, keys, or SPI in both directions, unlike inbound and outbound SAs that use different attributes in both directions.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Processing Direction on page 198</a></li><li>• <i>Example: Using IPsec to Protect BGP Traffic</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## direction (Junos-FIPS Software)

|                                 |                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> direction (bidirectional   inbound   outbound) {   protocol esp;   spi spi-value;   encryption {     algorithm 3des-cbc;     key ascii-text <i>ascii-text-string</i>;   } }</pre>                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit security ipsec internal security-association manual],<br>[edit security trusted-channel ipsec security-association manual]                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Establish a manual security association (SA) for internal Routing-Engine-to-Routing-Engine communication.                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b>bidirectional</b>—Apply the same SA values in both directions between Routing Engines.</p> <p><b>inbound</b>—Apply these SA properties only to the inbound IPsec tunnel.</p> <p><b>outbound</b>—Apply these SA properties only to the outbound IPsec tunnel.</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | Crypto Officer—To view and add this statement in the configuration.                                                                                                                                                                                                                                                              |

## direction (MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | direction (inbound   outbound);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> secure-channel <i>secure-channel-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Configure whether the secure channel applies MACsec security to traffic entering or leaving an interface.</p> <p>If you need to apply MACsec on traffic entering and leaving an interface, you need to create one secure channel to apply MACsec on incoming traffic and another secure channel to apply MACsec on outgoing traffic within the same connectivity association. When you associate the connectivity association with an interface, MACsec is applied on traffic entering and leaving that interface.</p> <p>You only use this configuration option when you are configuring MACsec using static secure association keys (SAK) security mode. When you are configuring MACsec using static connectivity association keys (CAK) security mode, two secure channels that are not user-configurable—one inbound secure channel and one outbound secure channel—are automatically created within the connectivity association.</p> |
| <b>Default</b>                  | <p>This statement does not have a default value.</p> <p>If you have configured a secure channel to enable MACsec using static SAK security mode, you must specify whether the secure channel applies MACsec to traffic entering or leaving an interface. A candidate configuration that contains a secure channel that has not configured a direction cannot be committed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>inbound</b>—Enable MACsec security on traffic entering the interface that has applied the secure channel.</p> <p><b>outbound</b>—Enable MACsec security on traffic leaving the interface that has applied the secure channel.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## disable-fpc (DDoS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable-fpc;                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ],<br>[edit system ddos-protection protocols <i>protocol-group</i> (aggregate   <i>packet-type</i> )],<br>[edit system ddos-protection protocols <i>protocol-group</i> (aggregate   <i>packet-type</i> ) <b>fpc</b> <i>slot-number</i> ]                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2.<br>Support at the [edit system ddos-protection protocols <i>protocol-group</i> (aggregate   <i>packet-type</i> )] hierarchy level introduced in Junos OS Release 12.1.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.<br>Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.                |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Disable DDoS policers for debugging purposes on the card in the specified slot for a particular packet type within a protocol group, on all cards for a particular packet type within a protocol group, or globally on all cards and for all packet types in all protocols. This statement does not affect the state of the Routing Engine policers. |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Disabling DDoS Protection Policers and Logging Globally on page 67</a></li> <li>• <a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li> <li>• <a href="#">Configuring DDoS Protection Policers on QFX Series Switches on page 56</a></li> </ul>                                                                                                                                     |

## disable-logging (DDoS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable-logging;                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ],<br>[edit system ddos-protection protocols <i>protocol-group</i> (aggregate   <i>packet-type</i> )]                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2.<br>Support at the [edit system ddos-protection protocols <i>protocol-group</i> (aggregate   <i>packet-type</i> )] hierarchy level introduced in Junos OS Release 12.1.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.                                                            |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 routers with only FPC5s, EX9200 switches, or QFX Series switches) Disable device-wide logging of all DDoS violation and flow detection events globally. Disable only logging of events other than flow detection culprit flow events for a particular packet type or for a protocol group. Typically used for debugging purposes.                                                                            |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Disabling DDoS Protection Policers and Logging Globally on page 67</a></li><li>• <a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li><li>• <a href="#">Configuring DDoS Protection Policers on QFX Series Switches on page 56</a></li><li>• <a href="#">Disabling Automatic Logging of Culprit Flow Events for a Packet Type on page 88</a></li></ul> |

---


## disable-routing-engine (DDoS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable-routing-engine;                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ],<br>[edit system ddos-protection <a href="#">protocols</a> <i>protocol-group</i> ( <i>aggregate</i>   <i>packet-type</i> )                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.                                                                                                                                                                                            |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Disable DDoS Routing Engine policers for debugging purposes for a particular packet type within a protocol group or globally for all packet types in all protocols. This statement does not affect the state of the line card policers. |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Disabling DDoS Protection Policers and Logging Globally on page 67</a></li></ul>                                                                                                                                                                                               |


## disable-timeout

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>disable-timeout <i>timeout</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options port-error-disable</a> ],                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.6 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Specify how long the Ethernet switching interfaces remain in a disabled state because of MAC limiting, MAC move limiting, or storm control errors.</p> <hr/> <div> <b>NOTE:</b> If you modify the timeout value of an existing disable timeout setting, the new timeout value does not impact the timing of restoration to service of currently disabled interfaces that have been configured for automatic recovery. The new timeout value is applied only during the next occurrence of a port error.</div> <p>You can bring up the currently disabled interfaces by running the operational command <a href="#">clear ethernet-switching port-error</a>.</p> <hr/> |
| <b>Default</b>                  | The disable timeout is not enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b><i>timeout</i></b>—Time, in seconds, that the disabled state remains in effect. The disabled interface is automatically restored to service when the specified timeout value is reached.</p> <p><b>Range:</b> 10 through 3600 seconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587</a></li><li>• <a href="#">Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 613</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                            |



## disable-timeout (Port Error Disable)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>disable-timeout <i>timeout</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options</a> port-error-disable]                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Specify how long Ethernet switching interfaces remain in a disabled state due to MAC limiting, MAC move limiting, or storm control errors.                                                                                                                                                                                                                                                                                                                                                        |
|                                 | <div>  <p><b>NOTE:</b> If you modify an existing timeout value, the new timeout value does not affect currently disabled interfaces are configured for automatic recovery. The new timeout value applies only to subsequent port errors. Run the <code>clear ethernet-switching port-error</code> command to restore currently disabled interfaces.</p> </div>                                                   |
| <b>Default</b>                  | The disable timeout statement is not enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b><i>timeout</i></b>—Time, in seconds, that an interface remains disabled. The disabled interface automatically returns to service when the specified time expires.</p> <p><b>Range:</b> 10 through 3600 seconds</p>                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299</a></li> <li>• <a href="#">Understanding Storm Control on page 561</a></li> <li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on page 563</a></li> <li>• <a href="#">Configuring Autorecovery for MAC Limited or Storm Control Interfaces (CLI Procedure) on page 435</a></li> <li>• <a href="#">action-shutdown</a></li> </ul> |

## discard

---


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>discard {<br/>  <b>prefix-list-name</b> <i>prefix-list-name</i>;<br/>  <b>source-ip-address-list</b> <i>address-list-name</i>;<br/>  <b>source-mac-address-list</b> <i>address-list-name</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit forwarding-options access-security <b>router-advertisement-guard</b> <b>policy</b> <i>policy-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Configure a discard policy for an IPv6 Router Advertisement (RA) guard policy. RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in the policy.</p> <p>When RA guard is enabled, the switch compares the information contained in the attributes of RA messages to the criteria configured in the policy. When RA guard is enabled by using a discard policy, any RA messages that match the conditions defined in the policy are dropped, and RA messages that do not match the conditions are forwarded.</p> <p>The criteria are configured as one or more lists of IPv6 addresses, MAC addresses, or IPv6 address prefixes associated with the policy. RA guard compares the source address or address prefix of incoming RA messages with the configured lists. You configure the lists at the [edit policy-options] hierarchy level, by using the <b>prefix-list</b> option for an IPv6 address or address prefix list, and the <b>mac-list</b> option for a MAC address list.</p> <p>If more than one list is associated with a discard policy, then an incoming RA message that meets the criteria in any of the lists is discarded.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li><li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## dynamic

---

|                                 |                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | dynamic {<br>ipsec-policy <i>ipsec-policy-name</i> ;<br>replay-window-size (32   64);<br>}                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit security ipsec <a href="#">security-association name</a> ]                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Define a dynamic IPsec SA.                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>ipsec-policy <i>ipsec-policy-name</i></b>—Name of the IPsec policy.</p> <p><b>replay-window-size</b>—(Optional) Antireplay window size. It can be one of the following values:</p> <ul style="list-style-type: none"> <li>• <b>32</b>—32-packet window size.</li> <li>• <b>64</b>—64-packet window size.</li> </ul> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Dynamic IPsec Security Associations on page 202</a></li> <li>• <a href="#">Associating the Configured Security Association with a Logical Interface on page 18</a></li> </ul>                                                                            |

## eapol-address (MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>eapol-address (pae   provider-bridge   lldp-multicast);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <code>[edit security macsec connectivity-association <i>connectivity-association-name</i> mka]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 18.3R1 for MX Series routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Configure an EAPoL destination MAC address. The <b>eapol-address pae</b> is the default configuration.</p> <p>To establish a MACsec session, MACsec Key Agreement PDUs (MKPDUs) are sent or received between nodes. These PDUs are Extensible Authentication Protocol over LAN (EAPoL) packets and, by default, their destination MAC address is the EAPoL multicast address 01:80:C2:00:00:03.</p> <p>If the nodes are connected through a provider network, it might consume these multicast packets or drop them depending on its configuration. To overcome this issue, configure the EAPoL address for PAE, provider-bridge, or LLDP multicast. To establish a MACsec session successfully, it is necessary that the configuration must match on both the nodes.</p>                                    |
|                                 | <div>  <p><b>NOTE:</b></p> <ul style="list-style-type: none"> <li>All three options to configure MACsec EAPoL destination MAC address are multicast addresses. If a provider network is configured with LLDP protocol (such as STP, RSTP, MSTP, and dot1x), then all these options does not work. That is, this configuration statement does not support unicast MAC address.</li> <li>It is assumed that the adjacency between both the nodes is guaranteed by the provider network. The MKPDUs are not VLAN-tagged and include multicast address as their destination address. It is also assumed that the provider network has a configuration to transfer the untagged MKPDUs to the destination node.</li> </ul> </div> |
| <b>Default</b>                  | Port Access Entity (PAE) group address (01:80:C2:00:00:03).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>pae</b>—The MAC address for Port Access Entity is 01:80:C2:00:00:03.</p> <p><b>provider-bridge</b>—The MAC address for provider bridge is 01:80:C2:00:00:00.</p> <p><b>lldp-multicast</b>—The MAC address for Link Level Discovery Protocol multicast address is 01:80:C2:00:00:0E.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

- Related Documentation**
- [mka \(MX Series\) on page 858](#)
  - [Configuring Media Access Control Security \(MACsec\) on MX Series Routers](#)

## encoding

---

|                                 |                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | encoding (binary   pem);                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">policy</a> <i>ike-peer-address</i> ],<br>[edit security certificates <a href="#">certification-authority</a> <i>ca-profile-name</i> ]                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify the file format used for the <b>local-certificate</b> and <b>local-key-pair</b> statements.                                                                                 |
| <b>Options</b>                  | <b>binary</b> —Binary file format.<br><br><b>pem</b> —Privacy-enhanced mail (PEM), an ASCII base 64 encoded format.<br><b>Default:</b> <b>binary</b>                                                                                                                       |
| <b>Required Privilege Level</b> | <b>admin</b> —To view this statement in the configuration.<br><b>admin-control</b> —To add this statement to the configuration.                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Type of Encoding Your CA Supports on page 13</a></li> <li>• <a href="#">Configuring the Type of Encoding Your CA Supports on page 17</a></li> </ul>                                                   |

## encryption (MACsec)



---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | encryption;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> <b>secure-channel</b> <i>secure-channel-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Enable MACsec encryption within a secure channel.</p> <p>You can enable MACsec without enabling encryption. If a connectivity association with a secure channel that has not enabled MACsec encryption is associated with an interface, traffic is forwarded across the Ethernet link in clear text. You are, therefore, able to view this unencrypted traffic when you are monitoring the link. The MACsec header is still applied to the frame, however, and all MACsec data integrity checks are run on both ends of the link to ensure the traffic has not been tampered with and does not represent a security threat.</p> <p>Traffic traversing a MAC-enabled point-to-point Ethernet link traverses the link at the same speed regardless of whether encryption is enabled or disabled. You cannot increase the speed of traffic traversing a MACsec-enabled Ethernet link by disabling encryption.</p> <p>This command is used to enable encryption when MACsec is configured using secure association key (SAK) security mode only. When MACsec is configuring using static connectivity association key (CAK) security mode, the encryption setting is configured outside of the secure channel using the <b>no-encryption</b> configuration statement.</p> |
| <b>Default</b>                  | MACsec encryption is disabled when MACsec is configured using static SAK security mode, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## encryption (MACsec for MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | encryption;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> secure-channel <i>secure-channel-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Enable MACsec encryption within a secure channel.</p> <p>You can enable MACsec without enabling encryption. If a connectivity association with a secure channel that has not enabled MACsec encryption is associated with an interface, traffic is forwarded across the Ethernet link in clear text. You are, therefore, able to view this unencrypted traffic when you are monitoring the link. The MACsec header is still applied to the frame, however, and all MACsec data integrity checks are run on both ends of the link to ensure the traffic has not been tampered with and does not represent a security threat.</p> <p>Traffic traversing a MAC-enabled point-to-point Ethernet link traverses the link at the same speed regardless of whether encryption is enabled or disabled. You cannot increase the speed of traffic traversing a MACsec-enabled Ethernet link by disabling encryption.</p> <p>This command is used to enable encryption when MACsec is configured using secure association key (SAK) security mode only. When MACsec is configuring using static connectivity association key (CAK) security mode, the encryption setting is configured outside of the secure channel using the <b>no-encryption</b> configuration statement.</p> |
| <b>Default</b>                  | MACsec encryption is disabled when MACsec is configured using static SAK security mode, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## encryption (Junos OS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> encryption {   algorithm (des-cbc   3des-cbc   aes-128-cbc   aes-192-cbc   aes-256-cbc);   key (ascii-text key   hexadecimal key); } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit security ipsec security-association <i>sa-name</i> manual <b>direction</b> (inbound   outbound   bidirectional)]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p><b>aes-128-cbc</b>, <b>aes-192-cbc</b>, and <b>aes-256-cbc</b> algorithm options added in Junos OS Release 15.1.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Configure an encryption algorithm and key for a manual Security Association.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>algorithm</b>—Type of encryption algorithm. It can be one of the following:</p> <ul style="list-style-type: none"> <li>• <b>des-cbc</b>—Has a block size of 8 bytes (64 bits); its key size is 48 bits long.</li> <li>• <b>3des-cbc</b>—Has block size of 8 bytes (64 bits); its key size is 192 bits long.</li> </ul> <p>.....</p> <p> <b>NOTE:</b> For <b>3des-cbc</b>, we recommend that the first 8 bytes be different from the second 8 bytes, and the second 8 bytes be the same as the third 8 bytes.</p> <p>.....</p> <ul style="list-style-type: none"> <li>• <b>aes-128-cbc</b>—Has a block size of 128 bits; its key size is 128 bits long.</li> <li>• <b>aes-192-cbc</b>—Has a block size of 128 bits; its key size is 192 bits long.</li> <li>• <b>aes-256-cbc</b>—Has a block size of 128 bits; its key size is 256 bits long.</li> </ul> <p>.....</p> <p> <b>NOTE:</b> The <b>aes-*-cbc</b> algorithms support both IKE and IPsec configurations at the [security] hierarchy level.</p> <p>.....</p> <p><b>key</b>—Type of encryption key. It can be one of the following:</p> <ul style="list-style-type: none"> <li>• <b>ascii-text</b>—ASCII text key. For the <b>des-cbc</b> option, the key contains 8 ASCII characters; for <b>3des-cbc</b>, the key contains 24 ASCII characters.</li> <li>• <b>hexadecimal</b>—Hexadecimal key. For the <b>des-cbc</b> option, the key contains 16 hexadecimal characters; for the <b>3des-cbc</b> option, the key contains 48 hexadecimal characters.</li> </ul> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



- Related Documentation**
- [Example: Using IPsec to Protect BGP Traffic](#)
  - [Configuring the Encryption Algorithm and Key on page 201](#)

## encryption (Junos-FIPS Software)

**Syntax**

```
encryption {
 algorithm 3des-cbc;
 key ascii-text ascii-text-string;
}
```

**Hierarchy Level** [edit security ipsec internal security-association manual direction]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Define the encryption parameters for internal Routing-Engine-to-Routing-Engine communication. The remaining statements are explained separately.



**NOTE:** The hexadecimal format must be used for the encryption key to be FIPS compliant. The hexadecimal keys provide maximum key strength.

**Required Privilege Level** Crypto Officer—To view and add this statement in the configuration.

## encryption-algorithm (Security)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | encryption-algorithm (3des-cbc   des-cbc   aes-128-cbc   aes-192-cbc   aes-256-cbc);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">proposal</a> <i>ike-proposal-name</i> ],<br>[edit security ipsec <a href="#">proposal</a> <i>ipsec-proposal-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Configure an IKE or IPsec encryption algorithm.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><b>3des-cbc</b>—Encryption algorithm with key size of 24 bytes; its key size is 192 bits long.</p> <p><b>des-cbc</b>—Encryption algorithm with key size of 8 bytes; its key size is 48 bits long.</p> <p><b>aes-128-cbc</b>—Advanced encryption algorithm that has a key size of 16 bytes; its key size is 128 bits long.</p> <p><b>aes-192-cbc</b>—Advanced encryption algorithm that has a key size of 24 bytes; its key size is 192 bits long.</p> <p><b>aes-256-cbc</b>—Advanced encryption algorithm that has a key size of 32 bytes; its key size is 256 bits long.</p> |
| <b>Required Privilege Level</b> | security—To view this statement in the configuration.<br>security-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring an IKE Proposal for Dynamic SAs</a></li><li>• <a href="#">Configuring an IPsec Proposal for an ES PIC</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                              |

## enrollment

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> enrollment {     url <i>url-name</i>;     retry <i>number-of-enrollment-attempts</i>;     retry-interval <i>seconds</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit security <a href="#">pki</a> <a href="#">ca-profile</a> <i>ca-profile-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Specify the URL and enrollment parameters of the certificate authority (CA) for Adaptive Services (AS) and MultiServices PICs installed on MX Series, M Series, and T Series routers.                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>url <i>url-name</i></b>—Location of the CA to which the router sends the Simple Certificate Enrollment Protocol-based (SCEP-based) certificate enrollment requests for the configured CA profile. Use the CA host DNS name or IP address.</p> <p><b>retry <i>number-of-enrollment-attempts</i></b>—Number of enrollment retries.<br/> <b>Range:</b> 0 through 100<br/> <b>Default:</b> 0</p> <p><b>retry-interval <i>seconds</i></b>—Length of time, in seconds, that a router should wait between enrollment attempts.<br/> <b>Range:</b> 0 through 3600<br/> <b>Default:</b> 0</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying an Enrollment URL on page 20</a></li> <li>• <a href="#">Specifying the Enrollment Properties on page 21</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                     |

## enrollment-retry

---

|                                 |                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>enrollment-retry <i>attempts</i>;</code>                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify how many times a router or switch can resend a digital certificate request.                            |
| <b>Options</b>                  | <b><i>attempts</i></b> —Number of enrollment retries.<br><b>Range:</b> 0 through 100<br><b>Default:</b> 0                                                                                             |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Number of Enrollment Retries on page 15</a></li></ul>                                                                             |

## enrollment-url

---

|                                 |                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>enrollment-url <i>url-name</i>;</code>                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> <i>ca-profile-name</i> ]                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify where your router or switch sends Simple Certificate Enrollment Protocol-based (SCEP-based) certificate enrollment requests (certificate authority URL).                    |
| <b>Options</b>                  | <i>url-name</i> —Certificate authority URL.                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying an Enrollment URL on page 14</a></li> </ul>                                                                                                                                                                |

## ethernet-switching-options

**List of Syntax**   [EX Series on page 748](#)  
                           [QFX Series, QFabric, EX4600 on page 751](#)

**EX Series**   ethernet-switching-options {  
                   analyzer (Port Mirroring) {  
                     name {  
                       loss-priority *priority*;  
                       ratio *number*;  
                     input {  
                       ingress {  
                         interface (all | *interface-name*);  
                         vlan (*vlan-id* | *vlan-name*);  
                       }  
                       egress {  
                         interface (all | *interface-name*);  
                       }  
                     }  
                     output {  
                       interface *interface-name*;  
                       vlan (*vlan-id* | *vlan-name*) {  
                         no-tag;  
                       }  
                     }  
                   }  
                   }  
                   bpdu-block {  
                     disable-timeout *timeout*;  
                     interface (all | [*interface-name*]) {  
                       (disable | drop | shutdown);  
                     }  
                   }  
                   dot1q-tunneling {  
                     ether-type (0x8100 | 0x88a8 | 0x9100);  
                   }  
                   interfaces *interface-name* {  
                     no-mac-learning;  
                   }  
                   mac-lookup-length *number-of-entries*;  
                   }  
                   mac-notification {  
                     notification-interval *seconds*;  
                   }  
                   mac-table-aging-time *seconds*;  
                   nonstop-bridging;  
                   port-error-disable {  
                     disable-timeout *timeout*;  
                   }  
                   redundant-trunk-group {  
                     group *name* {  
                       interface *interface-name* <primary>;  
                       interface *interface-name*;  
                     }  
                   }  
                   }  
                   }

```

}
secure-access-port {
 dhcp-snooping-file {
 location local_pathname | remote_URL;
 timeout seconds;
 write-interval seconds;
 }
 dhcpv6-snooping-file {
 location local_pathname | remote_URL;
 timeout seconds;
 write-interval seconds;
 }
}
interface (all | interface-name) {
 allowed-mac {
 mac-address-list;
 }
 (dhcp-trusted | no-dhcp-trusted);
 fcoe-trusted;
 mac-limit limit action (drop | log | none | shutdown);
 no-allowed-mac-log;
 persistent-learning;
 static-ip ip-address {
 vlan vlan-name;
 mac mac-address;
 }
 static-ipv6 ip-address {
 vlan vlan-name;
 mac mac-address;
 }
}
}
vlan (all | vlan-name) {
 (arp-inspection | no-arp-inspection) [
 forwarding-class class-name;
]
 dhcp-option82 {
 circuit-id {
 prefix hostname;
 use-interface-description;
 use-vlan-id;
 }
 remote-id {
 prefix hostname | mac | none;
 use-interface-description;
 use-string string;
 }
 vendor-id [string];
 }
 (examine-dhcp | no-examine-dhcp) {
 forwarding-class class-name;
 }
 (examine-dhcpv6 | no-examine-dhcpv6) {
 forwarding-class class-name;
 }
 examine-fip {
 fc-map fc-map-value;
 }
}

```

```
(ip-source-guard | no-ip-source-guard);
(ipv6-source-guard | no-ipv6-source-guard);
mac-move-limit limit action (drop | log | none | shutdown);
}
(neighbor-discovery-inspection | no-neighbor-discovery-inspection);
no-option-37;
static {
 vlan name {
 mac mac-address {
 next-hop interface-name;
 }
 }
}
storm-control {
 action-shutdown;
 interface (all | interface-name) {
 bandwidth bandwidth;
 level level;
 multicast;
 no-broadcast;
 no-multicast;
 no-registered-multicast;
 no-unknown-unicast;
 no-unregistered-multicast;
 }
}
traceoptions {
 file filename <files number> <no-stamp> <replace> <size size> <world-readable |
 no-world-readable>;
 flag flag <disable>;
}
unknown-unicast-forwarding {
 vlan (all | vlan-name) {
 interface interface-name;
 }
}
}
voip {
 interface (all | [interface-name | access-ports]) {
 vlan vlan-name;
 forwarding-class (assured-forwarding | best-effort | expedited-forwarding |
 network-control);
 }
}
}
```



```

QFX Series, QFabric, ethernet-switching-options {
EX4600 analyzer {
 name {
 input {
 egress {
 interface (all | interface-name);
 }
 ingress {
 interface (all | interface-name);
 vlan (vlan-id | vlan-name);
 }
 }
 output {
 interface interface-name;
 ip-address ip-address;
 vlan (vlan-id | vlan-name);
 }
 }
 }
 bpdv-block {
 interface (all | [interface-name]);
 disable-timeout timeout;
 }
 dot1q-tunneling {
 ether-type (0x8100 | 0x88a8 | 0x9100)
 }
 interfaces interface-name {
 no-mac-learning;
 }
 mac-table-aging-time seconds {
 }
 port-error-disable {
 disable-timeout timeout;
 }
 secure-access-port {
 dhcp-snooping-file {
 location local_pathname | remote_URL;
 timeout seconds;
 write-interval seconds;
 }
 interface (all | interface-name) {
 allowed-mac {
 mac-address-list;
 }
 (dhcp-trusted | no-dhcp-trusted);
 fcoe-trusted;
 mac-limit limit action action;
 no-allowed-mac-log;
 }
 vlan (all | vlan-name) {
 (arp-inspection | no-arp-inspection) [
 forwarding-class (for DHCP Snooping or DAI Packets) class-name;
]
 dhcp-option82 {
 circuit-id {
 prefix (Circuit ID for Option 82) hostname;
 use-interface-description;
 }
 }
 }
 }
 }
 }
}

```

```

 use-vlan-id;
 }
 remote-id {
 prefix (Remote ID for Option 82) hostname | mac | none;
 use-interface-description;
 use-string string;
 }
 vendor-id <string>;
}
(examine-dhcp | no-examine-dhcp) {
 forwarding-class (for DHCP Snooping or DAI Packets) class-name;
}
examine-fip {
 examine-vn2vn {
 beacon-period milliseconds;
 }
 fc-map fc-map-value;
}
mac-move-limit limit <fabric-limit limit action action>;
}
}
static {
 vlan vlan-id {
 mac mac-address next-hop interface-name;
 }
}
storm-control {
 interface (all | interface-name) {
 bandwidth bandwidth;
 no-broadcast;
 no-multicast;
 no-unknown-unicast;
 }
}
traceoptions {
 file filename <files number> <no-stamp> <replace> <size size> <world-readable |
 no-world-readable>;
 flag flag <disable>;
}
}

```

**Hierarchy Level** [edit]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Configure Ethernet switching options.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

- Related Documentation**
- *Understanding Port Mirroring*
  - [Overview of Access Port Protection on page 270](#)
  - [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
  - *Understanding BPDU Protection for STP, RSTP, and MSTP*
  - *Understanding Redundant Trunk Links (Legacy RTG Configuration)*
  - [Understanding Storm Control on page 561](#)
  - [Understanding Storm Control on EX Series Switches on page 597](#)
  - *Understanding 802.1X and VoIP on EX Series Switches*
  - *Understanding Q-in-Q Tunneling and VLAN Translation*
  - [Understanding Unknown Unicast Forwarding on page 639](#)
  - *Understanding MAC Notification on EX Series Switches*
  - *Understanding FIP Snooping*
  - *Understanding Nonstop Bridging on EX Series Switches*

## examine-dhcp

**Syntax** (examine-dhcp | no-examine-dhcp) {  
     forwarding-class *class-name*;  
 }

**Hierarchy Level** [edit [ethernet-switching-options secure-access-port vlan](#) (all | *vlan-name*)]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Enable DHCP snooping on all VLANs or on the specified VLAN.



**NOTE:** If you configure DHCP for all VLANs and you enable a different port security feature on a specific VLAN, you must also explicitly enable DHCP snooping on that VLAN. Otherwise, the default value of no DHCP snooping applies to that VLAN.

- **examine-dhcp**—Enable DHCP snooping.
- **no-examine-dhcp**—Disable DHCP snooping.

When DHCP snooping is enabled, the switch logs DHCP packets (DHCP OFFER, DHCP DECLINE, DHCP ACK, and DHCP NAK packets) that it receives on untrusted ports. You can monitor the log for these messages, which can signal the presence of a malicious DHCP server on the network.



**TIP:** For private VLANs (PVLANS), enable DHCP snooping on the primary VLAN. If you enable DHCP snooping only on a community VLAN, DHCP messages coming from PVLAN trunk ports are not snooped.

The remaining statement is explained separately.

**Default** Disabled.

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)

- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473](#)
- [Enabling DHCP Snooping \(CLI Procedure\) on page 504](#)
- [Enabling DHCP Snooping \(J-Web Procedure\)](#)

## examine-dhcpv6

**Syntax** `examine-dhcpv6 {  
    forwarding-class class-name;  
}`

**Hierarchy Level** [edit `ethernet-switching-options secure-access-port vlan` (all | *vlan-name*)]

**Release Information** Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Enable DHCPv6 snooping on all VLANs or on the specified VLAN.



**NOTE:** If you configure DHCP for all VLANs and you enable a different port security feature on a specific VLAN, you must also explicitly enable DHCP snooping on that VLAN. Otherwise, the default value of no DHCP snooping applies to that VLAN.

When DHCP snooping is enabled, the switch logs DHCP packets (DHCP OFFER, DHCP DECLINE, DHCP ACK, and DHCP NAK packets) that it receives on untrusted ports. You can monitor the log for these messages, which can signal the presence of a malicious DHCP server on the network.



**TIP:** For private VLANs (PVLANS), enable DHCP snooping on the primary VLAN. If you enable DHCP snooping only on a community VLAN, DHCP messages coming from PVLAN trunk ports are not snooped.

The remaining statement is explained separately.

**Default** Disabled.


**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring DHCP Snooping, DAI, and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465](#)
- [Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456](#)
- [Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473](#)

- [Enabling DHCP Snooping \(CLI Procedure\) on page 504](#)
- *Enabling DHCP Snooping (J-Web Procedure)*

## examine-fip

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>examine-fip {   examine-vn2vn {     beacon-period <i>milliseconds</i>;   }   <b>fc-map</b> <i>fc-map-value</i>;   no-fip-snooping-scaling; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 10.4 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Statement <b>examine-vn2vn</b> introduced in Junos OS Release 12.2 for the QFX Series.</p> <p>Statement <b>no-fip-snooping-scaling</b> introduced in Junos OS Release 13.2X52-D10 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p> <b>NOTE:</b> This statement supports the original CLI. If your switch runs the Enhanced Layer 2 Software (ELS) CLI, see <i>examine-vn2vf</i> for VN_Port to VF_Port (VN2VF_Port) FIP snooping, and see <i>examine-vn2vn</i> for VN_Port to VN_Port (VN2VN_Port) FIP snooping. For ELS details, see <i>Using the Enhanced Layer 2 Software CLI</i>.</p> <p>Enable FIP snooping on a specified VLAN. Ensure that the VLAN is a dedicated FCoE VLAN that transports only FCoE traffic.</p> <p>(QFX Series only) Enable VN2VN_Port FIP snooping on the specified VLAN. The VLAN must be a dedicated FCoE VLAN that transports only VN2VN_Port traffic. One FCoE VLAN cannot support both VN2VF_Port FIP snooping and VN2VN_Port FIP snooping. Configure separate, dedicated FCoE VLANs for VN2VN_Port FIP snooping and VN2VN_Port FIP snooping.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">vlan on page 1038</a></li> <li>• <i>Example: Configuring an FCoE Transit Switch</i></li> <li>• <i>Configuring VN2VF_Port FIP Snooping and FCoE Trusted Interfaces on an FCoE Transit Switch</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



## exclude-protocol

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>exclude-protocol <i>protocol-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <code>[edit security <i>macsec connectivity-association connectivity-association-name</i>]</code>                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Specifies protocols whose packets are not secured using Media Access Control Security (MACsec) when MACsec is enabled on a link using static connectivity association key (CAK) security mode.</p> <p>When this option is enabled in a connectivity association that is attached to an interface, MACsec is not enabled for all packets of the specified protocols that are sent and received on the link.</p> |
| <b>Default</b>                  | <p>Disabled.</p> <p>All packets are secured on a link when MACsec is enabled, with the exception of all types of Spanning Tree Protocol (STP) packets.</p>                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b><i>protocol-name</i></b>—Specifies the name of the protocol that should not be MACsec-secured. Options include:</p> <ul style="list-style-type: none"> <li>• <b><i>cdp</i></b>—Cisco Discovery Protocol.</li> <li>• <b><i>lcp</i></b>—Link Aggregation Control Protocol.</li> <li>• <b><i>lldp</i></b>—Link Level Discovery Protocol.</li> </ul>                                                            |
| <b>Required Privilege Level</b> | <p><b>admin</b>—To view this statement in the configuration.</p> <p><b>admin-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                |

## exclude-protocol (MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>exclude-protocol <i>protocol-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <code>[edit security macsec connectivity-association <i>connectivity-association-name</i>]</code>                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Specifies protocols whose packets are not secured using Media Access Control Security (MACsec) when MACsec is enabled on a link using static connectivity association key (CAK) security mode.</p> <p>When this option is enabled in a connectivity association that is attached to an interface, MACsec is not enabled for all packets of the specified protocols that are sent and received on the link.</p> |
| <b>Default</b>                  | <p>Disabled.</p> <p>All packets are secured on a link when MACsec is enabled, with the exception of all types of Spanning Tree Protocol (STP) packets.</p>                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b><i>protocol-name</i></b>—Specifies the name of the protocol that should not be MACsec-secured. Options include:</p> <ul style="list-style-type: none"><li>• <b>cdp</b>—Cisco Discovery Protocol.</li><li>• <b>lcp</b>—Link Aggregation Control Protocol.</li><li>• <b>lldp</b>—Link Level Discovery Protocol.</li></ul>                                                                                     |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                  |

---

## family vpls (Layer 2 Pseudowires)

---

|                                 |                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | family vpls;                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit dynamic-profiles <i>profile-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> ]                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1.                                                                                                                                         |
| <b>Description</b>              | Specify that the protocol family for the logical interface is VPLS.                                                                                                                    |
| <b>Required Privilege Level</b> | router—To view this statement in the configuration.<br>router-control—To add this statement to the configuration.                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Applying the Policers to Dynamic Profile Interfaces</i></li><li>• <i>Creating a Dynamic Profile for the Complex Configuration</i></li></ul> |

## fc-map

**Syntax** `fc-map fc-map-value;`

**Hierarchy Level** Original CLI

[edit ethernet-switching options secure-access-port vlan (all | *vlan-name*) [examine-fip](#)]

ELS CLI for Platforms that Support FCoE

[edit vlans *vlan-name* forwarding-options fip-security]



**NOTE:** The `fc-map` configuration statement is in a different hierarchy on the original CLI than on the Enhanced Layer 2 Software (ELS) CLI.

QFX Series that Support FCoE-FC Gateway Configuration

[edit fc-fabrics *fc-fabric-name* protocols fip]

**Release Information**

Statement introduced in Junos OS Release 10.4 for EX Series switches.

Statement introduced in Junos OS Release 11.1 for the QFX Series.

Statement introduced for the ELS CLI in Junos OS Release 13.2 for the QFX Series.

**Description**

Set the FCoE mapped address prefix (FC-MAP) value for the FCoE VLAN to match the FC switch (or FCoE forwarder) FC-MAP value for the FC fabric. The FC-MAP value is a unique MAC address prefix an FC switch uses to identify FCoE traffic for a given FC fabric (traffic on a particular FCoE VLAN).

You can configure the FC-MAP value or use the default value. The default FC-MAP value is different for VN\_Port to VF\_Port (VN2VF\_Port) FIP snooping (0x0EFC00) than for VN\_Port to VN\_Port (VN2VN\_Port) FIP snooping.

The FC switch provides the FC-MAP value to FCoE nodes (ENodes) in the FIP discovery advertisement message. If the EX Series switch or the QFX Series FCoE VLAN FC-MAP value does not match the FC switch FC-MAP value, neither device discovers the FC switch on that VLAN, and the ENodes on that VLAN cannot access the FC switch. The FC switch accepts only FCoE traffic that uses the correct FC-MAP value as part of the VN\_Port MAC address.

When the QFX Series acts as an FCoE-FC gateway, the FC-MAP value for the gateway and the FCoE devices must match the FC switch FC-MAP value in order to communicate with the FC switch.



**NOTE:** Changing the FC-MAP value causes all logins to drop and forces the ENodes to log in again.

|                                 |                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <b><i>fc-map-value</i></b> —FC-MAP value, hexadecimal value preceded by "0x".<br><b>Range:</b> 0x0EFC00 through 0x0EFCFF<br><b>Default:</b> 0x0EFC00 for VN2VF_Port FIP snooping 0x0EFD00 for VN2VN_Port FIP snooping                                                                                |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">examine-fip on page 758</a></li><li>• <i>show fip snooping</i></li><li>• <i>Example: Configuring an FCoE Transit Switch</i></li><li>• <i>Configuring VN2VF_Port FIP Snooping and FCoE Trusted Interfaces on an FCoE Transit Switch</i></li></ul> |

## fcoe-trusted

---

**Syntax** `fcoe-trusted;`

**Hierarchy Level** Original CLI

[edit ethernet-switching-options secure-access-port interface *interface-name*]

ELS CLI for Platforms that Support FCoE

[edit vlans *vlan-name* forwarding-options fip-security interface *interface-name*]



**NOTE:** The `fcoe-trusted` configuration statement is in a different hierarchy on the original CLI than on the Enhanced Layer 2 Software (ELS) CLI.

---

QFX Series that Support FCoE-FC Gateway Configuration

[edit fc-fabrics *fc-fabric-name* protocols fip]

**Release Information** Statement introduced in Junos OS Release 10.4 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.  
Statement introduced for the FC fabric in Junos OS Release 11.3 for the QFX Series.  
Statement introduced for the ELS CLI in Junos OS Release 13.2 for the QFX Series.

**Description** Configure the specified 10-Gigabit Ethernet interface to trust Fibre Channel over Ethernet (FCoE) traffic. If an interface is connected to another switch such as an FCoE forwarder (FCF) or a transit switch, you can configure the interface as trusted so that the interface forwards FCoE traffic from the switch to the FCoE devices without installing FIP snooping filters.

(QFX Series FCoE-FC gateway) Configure the specified local Fibre Channel fabric to trust FCoE traffic on all ports in the fabric. Changing the fabric ports from untrusted to trusted removes any existing FIP snooping filters from the ports. Changing the fabric ports from trusted to untrusted by removing the `fcoe-trusted` configuration from the fabric forces all of the FCoE sessions on those ports to log out so that when the ENodes and VN\_Ports log in again, the switch can build the appropriate FIP snooping filters.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *show fip snooping*
- *Example: Configuring an FCoE Transit Switch*
- *Configuring VN2VF\_Port FIP Snooping and FCoE Trusted Interfaces on an FCoE Transit Switch*

- *Configuring VN2VF\_Port FIP Snooping and FCoE Trusted Interfaces on an FCoE Transit Switch*

## file

---

|                                 |                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>file <i>certificate-filename</i>;</code>                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> <i>ca-profile-name</i> ]                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Specify the file from which to read the digital certificate.                                                                                                                        |
| <b>Options</b>                  | <i>certificate-filename</i> —File from which to read the digital certificate.                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying a File to Read the Digital Certificate on page 14</a></li> </ul>                                                                                                                                           |

## flood (VLANs)

---

|                                 |                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>flood {<br/>  input <i>filter-name</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> ],<br>[edit vlans <i>vlan-name</i> <b>forwarding-options</b> ]                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.2 for EX Series switches.                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | <p>Apply a flood filter to traffic ingressing a VLAN. Flood filters are triggered only for broadcast, unknown unicast, and multicast (BUM) traffic.</p> <p>Flood filters and firewall filters can coexist on the same VLAN. If the actions in the filters are conflicting, then the firewall filter takes priority over the flood filter.</p> |
| <b>Default</b>                  | All incoming traffic is accepted unmodified to a VLAN, and all outgoing traffic is sent unmodified from a VLAN.                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b><i>filter-name</i></b>—Name of a filter defined at the [edit firewall family <i>family-name</i> filter] hierarchy level.</p> <p><b>input</b>—Apply a flood filter to VLAN ingress traffic.</p>                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Unknown Unicast Forwarding (CLI Procedure) on page 641</a></li><li>• <a href="#">Configuring Firewall Filters</a></li><li>• <a href="#">Overview of Firewall Filters</a></li></ul>                                                                                            |



## flow-detection (DDoS Flow Detection)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | flow-detection;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Enable flow detection globally for all protocol groups and packet types except the following, which do not have typical Ethernet, IP, or IPv6 headers:</p> <ul style="list-style-type: none"> <li>• Protocol groups: <b>fab-probe</b>, <b>frame-relay</b>, <b>inline-ka</b>, <b>isis</b>, <b>jfm</b>, <b>mlp</b>, <b>pfe-alive</b>, <b>pos</b>, and <b>services</b>.</li> <li>• Packet type: <b>unclassified</b> in the <b>ip-options</b> protocol group.</li> </ul> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Enabling Flow Detection for All Protocol Groups and Packet Types on page 79</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul>                                                                                                                                                                                                                                                                                                                               |

## flow-detection (DDoS Packet Level)

---

**Syntax**    `flow-detection {  
          flow-detect-time detect-period;  
          no-flow-logging;  
          timeout-active-flows enable-period;  
          flow-level-bandwidth {  
            logical-interface flow-bandwidth;  
            physical-interface flow-bandwidth;  
            subscriber flow-bandwidth;  
          }  
          flow-level-control {  
            logical-interface flow-control-mode;  
            physical-interface flow-control-mode;  
            subscriber flow-control-mode;  
          }  
          flow-level-detection {  
            logical-interface operation-mode;  
            physical-interface operation-mode;  
            subscriber operation-mode;  
          }  
          flow-detection-mode (automatic | off | on);  
          flow-recover-time recover-period;  
          flow-timeout-time timeout-period;  
          }  
}`

**Hierarchy Level**    `[edit system ddos-protection protocols protocol-group packet-type ]`

**Release Information**    Statement introduced in Junos OS Release 12.3.  
Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.

**Description**    (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure DDoS protection suspicious control flow detection for a packet type.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level**    admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.


**Related Documentation**    • [Configuring Flow Detection for DDoS Protection on page 77](#)

## flow-detection-mode (DDoS Flow Detection)


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | flow-detection-mode (automatic   off   on)                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">protocols</a> <i>protocol-group packet-type</i> ]                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                                                                                                                                                                                                                            |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure the mode of operation for flow detection for a protocol group or packet type. Use this statement to override global flow detection settings configured with the <b>flow-detection-mode</b> statement at the <b>[edit system ddos-protection global]</b> hierarchy level. The operation mode is effective only when flow detection is enabled. |
| <b>Default</b>                  | The default mode for all protocol groups and packet types is <b>automatic</b> .                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <b>automatic</b> —Detect flows only when the policer is being violated.<br><br><b>off</b> —Disable flow detection.<br><br><b>on</b> —Always monitor and detect flows, even when the policer is not being violated.                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring How Flow Detection Operates for Individual Protocol Groups or Packets on page 83</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul>                                                                                                                                                                                              |

## flow-detection-mode (DDoS Global Flow Detection)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | flow-detection-mode (automatic   off   on)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 17.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure the mode of operation for flow detection globally for almost all protocol groups and packet types. The operation mode is effective only when flow detection is enabled.</p> <div><div></div><div><p><b>NOTE:</b> You cannot enable flow detection globally for the following groups and packet type because they do not have typical Ethernet, IP, or IPv6 headers:</p><ul style="list-style-type: none"><li>• Protocol groups: <b>fab-probe</b>, <b>frame-relay</b>, <b>inline-ka</b>, <b>isis</b>, <b>jfm</b>, <b>mlp</b>, <b>pfe-alive</b>, <b>pos</b>, and <b>services</b>.</li><li>• Packet type: <b>unclassified</b> in the <b>ip-options</b> protocol group.</li></ul></div></div> |
|                                 | <p>To override the global configuration for a protocol group or packet type, use the <b>flow-detection-mode</b> statement at the <b>[edit system ddos-protection protocols <i>protocol-group packet-type</i>]</b> hierarchy level.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Default</b>                  | The default global mode is <b>automatic</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>automatic</b>—Detect flows only when the policer is being violated.</p> <p><b>off</b>—Disable flow detection.</p> <p><b>on</b>—Always monitor and detect flows, even when the policer is not being violated.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p><b>admin</b>—To view this statement in the configuration.</p> <p><b>admin-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring How Flow Detection Operates for Individual Protocol Groups or Packets on page 83</a></li><li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## flow-detect-time (DDoS Flow Detection)

|                                                                                                                                                                                            |                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                              | <code>flow-detect-time seconds;</code>                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>                                                                                                                                                                     | [edit system ddos-protection protocols <i>protocol-group packet-type</i> <b>flow-detection</b> ]                                                                                                                                                     |
| <b>Release Information</b>                                                                                                                                                                 | Statement introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                              |
| <b>Description</b>                                                                                                                                                                         | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure how much time must pass before a suspicious flow that has exceeded the bandwidth allowed for the packet type is confirmed to be a culprit flow. |
| <div>  <b>BEST PRACTICE:</b> We recommend that you use the default value for the detection period. </div> |                                                                                                                                                                                                                                                      |
| <b>Options</b>                                                                                                                                                                             | <b>seconds</b> —Period of excessive bandwidth required for flow to be a culprit flow.<br><b>Range:</b> 1 through 60 seconds<br><b>Default:</b> 3 seconds                                                                                             |
| <b>Required Privilege Level</b>                                                                                                                                                            | <b>admin</b> —To view this statement in the configuration.<br><b>admin-control</b> —To add this statement to the configuration.                                                                                                                      |
| <b>Related Documentation</b>                                                                                                                                                               | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Detection Period for Suspicious Flows on page 80</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul>                            |

## flow-level-bandwidth (DDoS Flow Detection)

---

|                                 |                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>flow-level-bandwidth {<br/>    logical-interface <i>flow-bandwidth</i>;<br/>    physical-interface <i>flow-bandwidth</i>;<br/>    subscriber <i>flow-bandwidth</i>;<br/>}</pre>                                                                                               |
| <b>Hierarchy Level</b>          | [edit system ddos-protection protocols <i>protocol-group packet-type</i> ]                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                             |
| <b>Description</b>              | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure allowed flow bandwidth for the packet type at each flow aggregation level.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level on page 85</a></li><li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li></ul>                                             |

## flow-level-control (DDoS Flow Detection)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> flow-level-control {   logical-interface <i>flow-control-mode</i>;   physical-interface <i>flow-control-mode</i>;   subscriber <i>flow-control-mode</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">protocols</a> <i>protocol-group packet-type</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Specify how traffic in the detected flow is handled for the protocol group or packet type at one or more flow aggregation levels. Use this statement to override global flow control mode settings configured with the <b>flow-level-control</b> statement at the <b>[edit system ddos-protection global]</b> hierarchy level.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level on page 87</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul>                                                                                                                                                                                                                                                                   |


## flow-level-control (DDoS Global Flow Detection)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>flow-level-control <i>flow-control-mode</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 17.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Specify how traffic in the detected flow is handled globally for all protocol groups and packet types at all flow aggregation levels.</p> <p>To override the global configuration for a protocol group or packet type, use the <b>flow-level-control</b> statement at the <b>[edit system ddos-protection protocols <i>protocol-group packet-type</i>]</b> hierarchy level to specify the flow control mode at one or more flow aggregation levels.</p> |
| <b>Options</b>                  | <p><b><i>flow-control-mode</i></b>—Mode for how traffic in the detected flow is controlled globally.</p> <ul style="list-style-type: none"><li>• <b>drop</b>—Drop all traffic in flow.</li><li>• <b>keep</b>—Keep all traffic in flow.</li><li>• <b>police</b>—Police the traffic to within its allowed bandwidth.</li></ul> <p><b>Default:</b> drop</p>                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring How Traffic in a Culprit Flow Is Controlled Globally on page 86</a></li><li>• <a href="#">Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level on page 87</a></li><li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li></ul>                                                                                                                                                                                         |



## flow-level-detection (DDoS Flow Detection)

|                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                    | <pre> flow-level-detection {   logical-interface <i>flow-detection-mode</i>;   physical-interface <i>flow-detection-mode</i>;   subscriber <i>flow-detection-mode</i>; } </pre>                                                                                                                      |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                           | [edit system ddos-protection <a href="#">protocols</a> <i>protocol-group packet-type</i> ]                                                                                                                                                                                                           |
| <b>Release Information</b>                                                                                                                                                                                                                                                                       | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                               |
| <b>Description</b>                                                                                                                                                                                                                                                                               | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure the mode of operation for flow detection for the packet type at each flow aggregation level.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <div>  <p><b>NOTE:</b> Flow detection operates for individual flow aggregation levels only when the flow detection mode at the packet level is configured to either <b>automatic</b> or <b>on</b>.</p> </div> |                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                  | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                           |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>• <a href="#">Configuring How Flow Detection Operates at Each Flow Aggregation Level on page 84</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul>                                                           |

## flow-recover-time (DDoS Flow Detection)

---

|                                 |                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>flow-recover-time <i>seconds</i>;</code>                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit system ddos-protection protocols <i>protocol-group packet-type</i> ]                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                        |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure how much time must pass before a culprit flow for the packet type is considered to have returned to normal. The period starts when the flow drops below the threshold that triggered the last violation. |
| <b>Options</b>                  | <p><b><i>seconds</i></b>—Period required for the traffic to recover.</p> <p><b>Range:</b> 1 through 3600 seconds</p> <p><b>Default:</b> 60 seconds</p>                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Recovery Period for a Culprit Flow on page 81</a></li><li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li></ul>                                                                                           |

## flow-report-rate (DDoS Flow Detection)


|                                 |                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>flow-report-rate <i>report-rate</i>;</code>                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ]                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                   |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Set the rate at which culprit flow events are reported by system log messages, for all protocol groups and packet types on all line cards.                    |
| <b>Options</b>                  | <p><b><i>report-rate</i></b>—Number of flows per second.</p> <p><b>Range:</b> 1 through 50,000</p> <p><b>Default:</b> 10</p>                                                                                                                             |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Culprit Flow Reporting Rate for All Protocol Groups and Packet Types on page 79</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul> |

## flow-timeout-time (DDoS Flow Detection)

---

|                                 |                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>flow-timeout-time <i>seconds</i>;</code>                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit system ddos-protection protocols <i>protocol-group packet-type</i> ]                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                               |
| <b>Description</b>              | <p>(MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure the period of time that a culprit flow is suppressed for the packet type. The timeout period is effective only when timing out has been enabled with the <a href="#">timeout-active-flows</a> statement.</p> |
| <b>Options</b>                  | <p><b><i>seconds</i></b>—Period that the traffic is suppressed.</p> <p><b>Range:</b> 1 through 7200 seconds</p> <p><b>Default:</b> 300 seconds</p>                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Timeout Period for a Culprit Flow on page 81</a></li><li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li></ul>                                                                                                   |

## forwarding-class (for DHCP Snooping or DAI Packets)

|                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                            | forwarding-class class <i>class-name</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                   | [edit <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i> ) ( <a href="#">examine-dhcp</a>   <a href="#">arp-inspection</a> )]                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                               | Statement introduced in Junos OS Release 11.2 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>                                                                                                                                                                                                                                                                                                       | Assign a user-defined or a predefined forwarding class to the packets that have been checked for DHCP snooping or dynamic ARP inspection (DAI).                                                                                                                                                                                                                                                                                                                                                                                        |
| <div>  <p><b>NOTE:</b> To assign a user-defined class, you must first configure the user-defined class by using the <i>forwarding-classes</i> configuration statement at the [edit <i>class-of-service</i>] hierarchy level.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Default</b>                                                                                                                                                                                                                                                                                                           | Disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                                                                                                                                                                                                                                                                                           | <i>class-name</i> —Name of the forwarding class. The forwarding class can be one of the predefined forwarding classes (best-effort, assured-forwarding, expedited-forwarding, network-control) or it can be a user-defined forwarding class.                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                          | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>• <a href="#">Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473</a></li> <li>• <a href="#">Understanding Junos OS CoS Components for EX Series Switches</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> <li>• <a href="#">Understanding Dynamic ARP Inspection for Protecting Switching Devices Against ARP Spoofing on page 633</a></li> </ul> |

## forwarding-options

```
Syntax forwarding-options {
 dhcp-security {
 arp-inspection;
 group group-name {
 interface interface-name {
 static-ip ip-address {
 mac mac-address;
 }
 }
 }
 overrides {
 no-option82;
 (trusted | untrusted);
 }
 }
 ip-source-guard;
 no-dhcp-snooping;
 option-82 {
 circuit-id {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 }
 use-interface-description (device | logical);
 use-vlan-id;
 }
 remote-id {
 host-name hostname;
 use-interface-description (device | logical);
 use-string string;
 }
 vendor-id {
 use-string string;
 }
 }
 filter (VLANs) {
 input filter-name;
 output filter-name;
 }
 flood {
 input filter-name;
 }
}
```

Chassis: EX4600 and QFX Series

```
forwarding options profile-name {
 num-65-127-prefix number;
}
```

Chassis: EX4600 and QFX Series

```
forwarding-options lpm-profile {
 prefix-65-127-disable;
 unicast-in-lpm;
```

```
}

```

**Chassis: EX4600 and QFX Series**

```
forwarding-options custom-profile {
 l2-entries | l3-entries | lpm-entries {
 num-banks number;
 }
}
```

**Hierarchy Level**

```
[edit],
[edit bridge-domains bridge-domain-name],
[edit vlan vlan-name]

[edit chassis (QFX Series)]
```

**Release Information**

Statement introduced before Junos OS Release 7.4.

Statement introduced in Junos OS Release 11.3 for QFX Series switches.

Hierarchy level **[edit *vlan* *vlan-name*]** introduced in Junos OS Release 13.2X50-D10 for EX Series switches.

Hierarchy level **[edit *bridge-domains* *bridge-domain-name*]** introduced in Junos OS Release 14.1 for MX Series routers.

**custom-profile** option introduced in Junos OS Release 15.1x53-D30 for QFX5200 Series switches only.

**Description** Configure a unified forwarding table profile to allocate the amount of memory available for the following:

- MAC addresses.
- Layer 3 host entries.
- Longest prefix match table entries.

This feature enables you to select a profile that optimizes the amount of memory available for various types of forwarding-table entries based on the needs of your network. For example, for a switch that handles a great deal of Layer 2 traffic, such as a virtualized network with many servers and virtualized machines, you would choose the **l2-profile-one**, which allocates the highest amount of memory to MAC addresses.

You configure the memory allocation for LPM table entries differently, depending on whether you are using Junos OS Release 13.2X51-D10 or Junos OS Release 13.2X51-D15 and later. For more information about configuring memory allocation for LPM table entries, see *Configuring the Unified Forwarding Table on Switches*.

The **num-65-127-prefix *number*** statement is not supported on the **custom-profile** and the **lpm-profile**. The **prefix-65-127-disable** and **unicast-in-lpm** statements are supported only on the **lpm-profile**.

When you commit a configuration with a forwarding table profile change, in most cases the Packet Forwarding Engine restarts automatically to apply the new parameters, which brings the data interfaces down and then up again.

However, starting with Junos OS Releases 14.1X53-D40, 15.1R5, and 16.1R3, for a Virtual Chassis or Virtual Chassis Fabric (VCF) comprised of EX4600 or QFX5100 switches, the Packet Forwarding Engine in member switches does not automatically restart upon configuring and committing a unified forwarding table profile change. This behavior avoids having Virtual Chassis or VCF instability and a prolonged convergence period if a profile change is propagated to member switches and multiple Packet Forwarding Engines all restart at the same time. In this environment, instead of automatically restarting when you initially commit a profile configuration change, the message **Reboot required for configuration to take effect** is displayed at the master switch CLI prompt, notifying you that the profile change does not take effect until the next time you restart the Virtual Chassis or VCF. The profile configuration change is propagated to member switches that support this feature, and a reminder that a reboot is required to apply this pending configuration change appears in the system log of the master switch and applicable member switches. You then enable the profile change subsequently during a planned downtime period using the **request system reboot** command, which quickly establishes a stable Virtual Chassis or VCF with the new configuration.



**NOTE:** You should plan to make unified forwarding table profile changes only when you are ready to perform a Virtual Chassis or VCF system reboot *immediately* after committing the configuration update. Otherwise, in the intervening period between committing the configuration change and rebooting the Virtual Chassis or VCF, the system can become inconsistent if



a member experiences a problem and restarts. In that case, the new configuration takes effect on the member that was restarted, while the change is not yet activated on all the other members.

.....  
The remaining statements are explained separately. See [CLI Explorer](#).

**Options** **profile-name**—name of the profile to use for memory allocation in the unified forwarding table. [Table 34 on page 784](#) lists the profiles you can choose that have set values and the associated values for each type of entry.

On QFX5200 Series switches only, you can also select **custom-profile**. This profile enables you to allocate from one to four banks of shared hash memory to a specific type of forwarding-table entry. Each shared hash memory bank can store a maximum of the equivalent of 32,000 IPv4 unicast addresses.

**Table 34: Unified Forwarding Table Profiles**

| Profile Name                      | MAC Table     | Host Table (unicast and multicast addresses) |              |             |             |             |             |
|-----------------------------------|---------------|----------------------------------------------|--------------|-------------|-------------|-------------|-------------|
|                                   | MAC Addresses | IPv4 unicast                                 | IPv6 unicast | IPv4 (*, G) | IPv4 (S, G) | IPv6 (*, G) | IPv6 (S, G) |
| <b>l2-profile-one</b>             | 288K          | 16K                                          | 8K           | 8K          | 8K          | 4K          | 4K          |
| <b>l2-profile-two</b>             | 224K          | 80K                                          | 40K          | 40K         | 40K         | 20K         | 20K         |
| <b>l2-profile-three (default)</b> | 160K          | 144K                                         | 72K          | 72K         | 72K         | 36K         | 36K         |
| <b>l3-profile</b>                 | 96K           | 208K                                         | 104K         | 104K        | 104K        | 52K         | 52K         |
| <b>lpm-profile*</b>               | 32K           | 16K                                          | 8K           | 8K          | 8K          | 4K          | 4K          |

\* This profile supports only IPv4 in Junos OS Release 13.2X51-D10. Starting in Junos OS Release 13.2X51-D15, the **lpm-profile** supports IPv4 and IPv6 entries.



**NOTE:** If the host stores the maximum number of entries for any given type, the entire table is full and is unable to accommodate *any* entries of any other type. For information about valid combinations of table entries see *Understanding the Unified Forwarding Table*.

**l2-entries | l3-entries | lpm-entries—(custom-profile only)** Select a type of forwarding-table entry—Layer 2, Layer 3, or LPM—to allocate a specific number of shared memory banks. You configure the amount of memory to allocate for each type of entry separately.

**num-banks *number*—(custom-profile only)** Specify the number of shared memory banks to allocate for a specific type of forwarding-table entry. Each shared memory bank stores the equivalent of 32,000 IPv4 unicast addresses.

**Range:** 0 through 4.



**NOTE:** There are four shared memory banks, which can be allocated flexibly among the three types of forwarding-table entries. To allocate

no shared memory for a particular entry type, specify the number 0. When you commit the configuration, the system issues a commit check to ensure that you have not configured more than four memory banks. You do not have to configure all four shared memory banks. By default, each entry type is allocated the equivalent of 32,000 IPv4 unicast addresses in shared memory.

---

|                           |                                                               |
|---------------------------|---------------------------------------------------------------|
| <b>Required Privilege</b> | interface—To view this statement in the configuration.        |
| <b>Level</b>              | interface-control—To add this statement to the configuration. |


|                              |                                                                                                                                                                                                                                                                           |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <i>Understanding the Unified Forwarding Table</i></li><li>• <i>Example: Configuring a Unified Forwarding Table Custom Profile on QFX Series Switches</i></li><li>• <i>Configuring Traffic Forwarding and Monitoring</i></li></ul> |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## fpc (DDoS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>fpc slot-number;<br/>    bandwidth-scale percentage;<br/>    burst-scale percentage;<br/>    disable-fpc;<br/>}</pre>                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"><li>For MX Series routers, T4000 routers, and EX9200 switches:<br/>[edit system ddos-protection <b>protocols</b> <i>protocol-group</i> (aggregate   <i>packet-type</i>)]</li><li>For PTX Series routers and QFX Series switches:<br/>[edit system ddos-protection <b>protocols</b> <i>protocol-group</i> (aggregate   <i>packet-type</i>)]</li></ul> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.</p> <p>Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.</p>                                                                       |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Modify the aggregate or packet-type policer on the specified line card.                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>slot-number</b>—Slot number of the card.</p> <p><b>Range:</b> Depends on the router or switch model</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li><li><a href="#">Configuring DDoS Protection Policers on QFX Series Switches on page 56</a></li></ul>                                                                                                                                             |

## global (DDoS)

|                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                   | <pre>global {   disable-fpc;   disable-logging;   disable-routing-engine;   flow-detection;   flow-level-control;   flow-detection-mode;   flow-report-rate;   violation-report-rate; }</pre>                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                          | [edit system <a href="#">ddos-protection</a> ]                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p> <p>Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.</p> |
| <b>Description</b>                                                                                                                                                                                                                                                                                                              | <p>(MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Modify DDoS policers, event logging, and flow detection globally for all protocols.</p>                                                                                                                                                                            |
| <div>  <p><b>NOTE:</b> The following statements are not supported on PTX Series routers and QFX Series switches: <b>disable-routing-engine</b>, <b>flow-detection</b>, <b>flow-report-rate</b>, and <b>violation-report-rate</b>.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                      |
| <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                 | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• <a href="#">Disabling DDoS Protection Policers and Logging Globally on page 67</a></li> </ul>                                                                                                                                                                                                                                                               |

## group (DHCP Security)

---

**Syntax**

```
group group-name {
 interface interface-name {
 static-ip ip-address {
 mac mac-address;
 }
 static-ipv6 ip-address {
 mac mac-address;
 }
 }
 overrides {
 no-dhcpv6-options;
 no-option16;
 no-option18;
 no-option37;
 no-option82;
 trusted;
 untrusted;
 }
}
```

**Hierarchy Level** [edit vlans *vlan-name* forwarding-options **dhcp-security**]

**Release Information** Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.  
Statement introduced in Junos OS Release 13.2 for the QFX series.  
Support for the **static-ipv6** and **no-option37** statements introduced in Junos OS Release 13.2X51-D20 for EX Series switches.

**Description** Specify the name of a group of access interfaces that you want to configure for DHCP security attributes that are different from the attributes set for other interfaces in the VLAN. A group must contain at least one interface.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 316](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 318](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

## group (DHCP Security for MX Series)

```
Syntax group group-name {
 interface interface-name {
 static-ip ip-address {
 mac mac-address;
 }
 }
 overrides {
 no-option82;
 trusted;
 untrusted;
 }
 }
```

**Hierarchy Level** [edit bridge-domains *bridge-domain-name* forwarding-options dhcp-security]

**Release Information** Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.  
Statement introduced in Junos OS Release 13.2 for the QFX series.  
Support for the **static-ipv6** and **no-option37** statements introduced in Junos OS Release 13.2X51-D20 for EX Series switches.  
Statement introduced in Junos OS Release 14.1 for the MX Series.

**Description** Specify the name of a group of access interfaces that you want to configure for DHCP security attributes that are different from the attributes set for other interfaces in the VLAN or bridge domain. A group must contain at least one interface.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers \(CLI Procedure\) on page 549](#)
- [Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases \(CLI Procedure\) on page 550](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

## group-type (Unknown Unicast Forwarding)

---

|                                 |                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | group-type ( <i>none</i>   layer-2)                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit <a href="#">forwarding-options next-hop-group</a> ]                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.2 for EX Series switches.                                                                                                                                                                      |
| <b>Description</b>              | Configure the type of addresses to be used in the next-hop group.                                                                                                                                                                          |
| <b>Options</b>                  | <i>none</i> —Next-hop group uses Layer 2 addresses.<br><br>layer-2—Specify a next-hop group that uses Layer 2 addresses.                                                                                                                   |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Unknown Unicast Forwarding (CLI Procedure) on page 641</a></li><li>• <a href="#">Configuring Mirroring on EX9200 Switches to Analyze Traffic (CLI Procedure)</a></li></ul> |



## host-name

---

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | host-name <i>host-name</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level (EX Series)</b> | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security option-82 remote-id</b> ]                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level (MX Series)</b> | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security remote-id option-82</b> ]                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>         | Statement introduced in Junos OS Release 13.2X50-D10.<br>Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                 | Use the hostname of the switching device as the <b>remote-id</b> suboption of DHCP option 82 (also known as the DHCP relay agent information option) in DHCP request packet headers before forwarding or relaying requests to a DHCP server. This suboption provides a trusted identifier for the host system that has forwarded or relayed requests to the server.                                                                                                                         |
| <b>Required Privilege Level</b>    | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)</a> on page 313</li> <li>• <a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure)</a> on page 551</li> <li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a></li> </ul> |

## icmpv4-rate-limit

---

|                                 |                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>icmpv4-rate-limit {<br/>    bucket-size <i>seconds</i>;<br/>    packet-rate <i>pps</i>;<br/>}</pre>                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit system internet-options]                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                      |
| <b>Description</b>              | Configure rate-limiting parameters for ICMPv4 messages sent.                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b>bucket-size <i>seconds</i></b>—Number of seconds in the rate-limiting bucket.<br/><b>Range:</b> 0 through 4294967295 seconds<br/><b>Default:</b> 5</p> <p><b>packet-rate <i>pps</i></b>—Rate-limiting packets earned per second.<br/><b>Range:</b> 0 through 4294967295 pps<br/><b>Default:</b> 1000</p> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Junos OS ICMPv4 Rate Limit for ICMPv4 Routing Engine Messages on page 644</a></li></ul>                                                                                                                                                        |

## icmpv6-rate-limit

---

|                                 |                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | icmpv6-rate-limit {<br>bucket-size <i>seconds</i> ;<br>packet-rate <i>packet-rate</i> ;<br>}                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit system internet-options]                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                          |
| <b>Description</b>              | Configure rate-limiting parameters for ICMPv6 messages sent.                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>bucket-size <i>seconds</i></b>—Number of seconds in the rate-limiting bucket.<br/> <b>Range:</b> 0 through 4294967295 seconds<br/> <b>Default:</b> 5</p> <p><b>packet-rate <i>pps</i></b>—Rate-limiting packets earned per second.<br/> <b>Range:</b> 0 through 4294967295 pps<br/> <b>Default:</b> 1000</p> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Junos OS ICMPv6 Rate Limit for ICMPv6 Routing Engine Messages on page 644</a></li> </ul>                                                                                                                                                          |

## id

---

|                                 |                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>id {<br/>    <b>mac-address</b> <i>mac-address</i>;<br/>    <b>port-id</b> <i>port-id-number</i>;<br/>}</pre>                                                                     |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> <b>secure-channel</b> <i>secure-channel-name</i> ]                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                           |
| <b>Description</b>              | Specify a MAC address and a port that traffic on the link must be from to be accepted by the interface when MACsec is enabled using static secure association key (SAK) security mode. |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                     |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                       |

## id (MACsec for MX Series)

|                                 |                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | id {<br>mac-address <i>mac-address</i> ;<br>port-id <i>port-id-number</i> ;<br>}                                                                                                       |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> secure-channel <i>secure-channel-name</i> ]                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                     |
| <b>Description</b>              | Specify a MAC address and a port that traffic on the link must be from to be accepted by the interface when MACsec is enabled using static secure association key (SAK) security mode. |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                     |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on MX Series Routers</a></li> </ul>                                            |

## identity

|                                 |                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | identity <i>identity-name</i> ;                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security <a href="#">ike</a> ]                                                                                                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                             |
| <b>Description</b>              | Define the identity of the remote certificate name if the identity cannot be learned through IKE (ID payload or IP address).                  |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Identity to Define the Remote Certificate Name on page 17</a></li> </ul> |

## ike (Security)

---

```
Syntax ike {
 policy ike-peer-address {
 description policy-description;
 encoding (binary | pem);
 identity identity-name;
 local-certificate certificate-filename;
 local-key-pair private-public-key-file;
 mode (aggressive | main);
 pre-shared-key (ascii-text key | hexadecimal key);
 proposals [proposal-names];
 }
 proposal ike-proposal-name {
 authentication-algorithm (md5 | sha1);
 authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);
 dh-group (group1 | group2);
 encryption-algorithm (3des-cbc | des-cbc);
 lifetime-seconds seconds;
 }
 }
```

**Hierarchy Level** [edit security]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** (Encryption interface on M Series and T Series routers only) Configure IKE.

**Options** The remaining statements are explained separately.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring an IKE Proposal for Dynamic SAs on page 207](#)
- [Configuring an IKE Policy for Preshared Keys on page 210](#)

## include-sci

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | include-sci;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.<br>Statement introduced in Junos OS Release 14.1X53-D15 for QFX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Specifies that the SCI tag should be appended to each packet on a link that has enabled MACsec.</p> <p>You must enable SCI tagging on a switch that is enabling MACsec on an Ethernet link connecting to an EX4300 switch.</p> <p>SCI tags are automatically appended to packets leaving a MACsec-enabled interface on an EX4300 switch. This option is, therefore, not available on EX4300 switches.</p> <p>You should only use this option when connecting a switch to an EX4300 switch, or to a host device that requires SCI tagging. SCI tags are eight octets long, so appending an SCI tag to all traffic on the link adds a significant amount of unneeded overhead.</p> |
| <b>Default</b>                  | <p>SCI tagging is enabled on EX4300 switches that have enabled MACsec using static connectivity association key (CAK) security mode, by default.</p> <p>SCI tagging is disabled on all other interfaces, by default.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## include-sci (MACsec for MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | include-sci;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Specifies that the SCI tag should be appended to each packet on a link that has enabled MACsec.</p> <p>SCI tags are automatically appended to packets leaving a MACsec-enabled interface on an MX240, MX480, or MX960 router. This option is, therefore, redundant to be configured.</p> <p>This option is used only when connecting a router to a host device that requires SCI tagging. SCI tags are eight octets long, so appending an SCI tag to all traffic on the link adds a significant amount of unneeded overhead.</p> |
| <b>Default</b>                  | SCI tagging is enabled on MX Series routers that have enabled MACsec using static connectivity association key (CAK) security mode, by default.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                    |



## interface (Access Port Security)

**Syntax** `interface (all | interface-name) {  
     allowed-mac {  
         mac-address-list;  
     }  
     (dhcp-trusted | no-dhcp-trusted);  
     fcoe-trusted;  
     mac-limit limit action (drop | log | none | shutdown);  
     no-allowed-mac-log;  
     persistent-learning;  
     static-ip ip-address {  
         vlan vlan-name;  
         mac mac-address;  
     }  
     static-ipv6 ip-address {  
         vlan vlan-name;  
         mac mac-address;  
     }  
     }  
     vlan vlan-name {  
         mac-limit limit action (drop | log | none | shutdown);  
     }  
 }`

**Hierarchy Level** [edit [ethernet-switching-options secure-access-port](#)]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Support for the **ipv6-source-guard** statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Apply port security features to all interfaces or to the specified interface.

**Options** **all**—Apply port security features to all interfaces.

***interface-name***—Apply port security features to the specified interface.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 462](#)
- [Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445](#)

- [Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452](#)
- [Example: Configuring a DHCP Server Interface as Untrusted to Protect the Switch from Rogue DHCP Server Attacks on page 449](#)
- [Configuring MAC Limiting \(CLI Procedure\) on page 346](#)
- [Enabling a Trusted DHCP Server \(CLI Procedure\) on page 538](#)
- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 533](#)

---

## interface (DHCP Security for MX Series)

---

**Syntax**    `interface interface-name {  
              static-ip ip-address {  
                  mac mac-address;  
              }  
          }`

**Hierarchy Level**    `[edit bridge-domains bridge-domain-name forwarding-options dhcp-security group group-name]`

**Release Information**    Statement introduced in Junos OS Release 14.1 for the MX Series.

**Description**    Configure an interface for a static IP address to MAC address binding (IP-MAC binding) or configure an interface to belong to a group within the bridge domain that has DHCP security attributes that are different from the attributes of other interfaces in the bridge domain.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                  interface-control—To add this statement to the configuration.

**Related Documentation**    • [Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers \(CLI Procedure\) on page 549](#)

## interface (RA Guard)

**Syntax** `interface interface-name {  
     mark-interface (trusted | block);  
     policy policy-name (stateful | stateless);  
 }`

**Hierarchy Level** [edit forwarding-options **access-security router-advertisement-guard**]

**Release Information** Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.  
 Statement introduced in Junos OS Release 16.1 for EX Series switches.

**Description** Configure IPv6 Router Advertisement (RA) guard on an interface. In an IPv6 deployment, RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in a policy.

Before you can configure RA guard on an interface, you must first configure a policy at the [edit forwarding-options **access-security router-advertisement-guard**] hierarchy level. The policy is then applied to an interface at the [edit forwarding-options **access-security router-advertisement-guard interface *interface-name***] hierarchy level.



**NOTE:** If you apply an RA guard policy on an interface, you must enable RA guard on the VLAN that is associated with that interface by using the `vlan` statement at the [edit forwarding-options **access-security router-advertisement-guard**] hierarchy level.

The remaining statements are explained separately. See [CLI Explorer](#).

**Options** *interface-name*—Configure RA guard parameters on the specified interface.

**Required Privilege Level** interface—To view this statement in the configuration.  
 interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324](#)
- [Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330](#)

## interface (Secure Access Port)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>interface (all   <i>interface-name</i>) {     allowed-mac <i>mac-address-list</i>;     (dhcp-trusted   no-dhcp-trusted);     mac-limit <i>limit</i> action <i>action</i>;     no-allowed-mac-log;     static-ip <i>ip-address</i> {         vlan <i>vlan-name</i>;         mac <i>mac-address</i>;     } }</pre>                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options</a> secure-access-port]                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Apply port security features to all interfaces or to the specified interface.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>all</b>—Apply port security features to all interfaces. Does not apply to QFabric systems.</p> <p><b><i>interface-name</i></b>—Apply port security features to the specified interface.</p>                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Overview of Access Port Protection on page 270</a></li><li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299</a></li><li>• <a href="#">Understanding Trusted and Untrusted Ports on page 307</a></li><li>• <a href="#">Configuring MAC Limiting on page 434</a></li><li>• <a href="#">Enabling a Trusted Port for DHCP on page 456</a></li></ul> |

## interface (Static MAC Bypass)

---

|                                 |                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interface [<i>interface-names</i>];</code>                                                                                                                |
| <b>Hierarchy Level</b>          | [edit protocols authentication-access-control]                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.2 for MX240, MX480, and MX960 routers in enhanced LAN mode.                                                         |
| <b>Description</b>              | Configure interfaces on which the specified MAC addresses are allowed to bypass RADIUS authentication and allowed to connect to the LAN without authentication. |
| <b>Options</b>                  | <i>interface-names</i> —List of interfaces.                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                             |
| <b>Related Documentation</b>    |                                                                                                                                                                 |

## interface (Storm Control)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>interface (all   <i>interface-name</i>) {<br/>    bandwidth <i>bandwidth</i>;<br/>    level <i>level</i>;<br/>    multicast;<br/>    no-broadcast;<br/>    no-multicast;<br/>    no-registered-multicast;<br/>    no-unknown-unicast;<br/>    no-unregistered-multicast;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options storm-control</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Configure storm control on all interfaces or on the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Default</b>                  | <ul style="list-style-type: none"><li>On EX2200, EX3200, EX3300, EX4200, and EX6200 switches—Storm control does not apply by default to multicast traffic. The factory default configuration enables storm control for broadcast and unknown unicast traffic on all switch interfaces, with the storm control level set to 80 percent of the combined broadcast and unknown unicast streams.</li><li>On EX4500 and EX8200 switches—Storm control applies to broadcast, multicast, and unknown unicast traffic. The factory default configuration enables storm control on all switch interfaces, with the storm control level set to 80 percent of the combined broadcast, multicast, and unknown unicast streams.</li></ul> |
| <b>Options</b>                  | <p><b>all</b>—All interfaces. The storm control settings configured with the <b>all</b> option affect only those interfaces that have not been individually configured for storm control.</p> <p><b><i>interface-name</i></b>—Name of an interface. The storm control settings configured with the <b><i>interface-name</i></b> option override any settings configured with the <b>all</b> option.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587</a></li><li><a href="#">Disabling or Enabling Storm Control (CLI Procedure) on page 599</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## interface (Unknown Unicast Forwarding)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>interface <i>interface-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"> <li>For platforms with ELS:<br/>[edit switch-options <a href="#">unknown-unicast-forwarding</a> vlan <i>vlan-name</i>]</li> <li>For platforms without ELS:<br/>[edit <a href="#">ethernet-switching-options</a> <a href="#">unknown-unicast-forwarding</a> vlan <i>vlan-name</i>]</li> </ul>                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Hierarchy level <a href="#">[edit switch-options]</a> introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> |
| <b>Description</b>              | Specify the interface to which unknown unicast packets will be forwarded.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">show vlans</a></li> <li><a href="#">show ethernet-switching table on page 1174</a></li> <li><a href="#">Configuring Unknown Unicast Forwarding (CLI Procedure) on page 640</a></li> <li><a href="#">Understanding Unknown Unicast Forwarding on page 639</a></li> </ul>                                                                                                    |

## interface-mac-limit

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> interface-mac-limit {     limit     disable;     packet-action ; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>     | <p>[edit <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options],</p> <p>[edit <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options],</p> <p>[edit logical-systems <i>logical-system-name</i> <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> switch-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> switch-options interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> switch-options],</p> <p>[edit logical-systems <i>logical-system-name</i> switch-options interface <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> <b>bridge-domains</b> <i>bridge-domain-name</i> bridge-options interface <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> switch-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> switch-options interface <i>interface-name</i>],</p> <p>[edit switch-options],</p> <p>[edit switch-options interface <i>interface-name</i>],</p> <p>[edit switch-options interface <i>interface-name</i>],</p> <p>[edit vlans <i>vlan-name</i> switch-options],</p> <p>[edit vlans <i>vlan-name</i> switch-options interface <i>interface-name</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 8.4.</p> <p>Support for the <b>switch-options</b> statement added in Junos OS Release 9.2.</p> <p>Support for top-level configuration for the <b>virtual-switch</b> type of routing instance added in Junos OS Release 9.2. In Junos OS Release 9.1 and earlier, the routing instances hierarchy supported this statement only for a VPLS instance or a bridge domain configured within a virtual switch.</p> <p>Support for logical systems added in Junos OS Release 9.6.</p> <p>[edit switch-options], [edit switch-options interface <i>interface-name</i>], [edit vlans <i>vlan-name</i> switch-options], and [edit vlans <i>vlan-name</i> switch-options interface <i>interface-name</i>] hierarchy levels introduced in Junos OS Release 12.3R2 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>         | <p>Configure a limit to the number of MAC addresses that can be learned from a bridge domain, VLAN, virtual switch, or set of bridge domains or VLANs.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |





**NOTE:** For multichassis link aggregation (MC-LAG) peers in active-active mode, configuring the `interface-mac-limit` statement or changing the `interface-mac-limit` configuration when traffic is flowing can cause the MAC entries to be out of synchronization between the two MC-LAG peers, which might result in flooding. To avoid flooding, you must either halt traffic forwarding and then configure the `interface-mac-limit` statement or use the `commit at` configuration statement to commit the changes at the same time in both the peer nodes.

Alternatively, if flooding does occur, you can clear the bridge MAC table on both the routers or switches by using the `clear bridge mac-table` command. Running this command ensures that the MAC entries are re-learned and in synchronization between both the peers.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | The default MAC limit varies with the platform.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>disable</b>—Disables the global <code>interface-mac-limit</code> configuration on an interface and sets the maximum <code>interface-mac-limit</code> that is permitted on the device.</p> <p><b>limit</b>—Sets the maximum number of MAC addresses learned from an interface.</p> <p><b>Range:</b> 1 through &lt;default MAC limit&gt; MAC addresses per interface. Range is platform specific.</p> <p>If you configure both <b>disable</b> and <b>limit</b>, <b>disable</b> takes precedence and <code>packet-action</code> is set to <b>none</b>. The remaining statement is explained separately.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Understanding Layer 2 Learning and Forwarding for Bridge Domains</i></li> <li>• <i>Layer 2 Learning and Forwarding for VLANs Overview</i></li> <li>• <i>Understanding Layer 2 Learning and Forwarding for Bridge Domains Functioning as Switches with Layer 2 Trunk Ports</i></li> <li>• <i>Layer 2 Learning and Forwarding for VLANs Acting as a Switch for a Layer 2 Trunk Port</i></li> </ul>                                                                                                                                                                   |

## interface-shutdown-action

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | interface-shutdown-action [soft-shutdown   hard-shutdown]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit switch-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D40 for EX Series switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Configure storm control to shut down interfaces or temporarily disable interfaces. This action can be done in addition to the default switching device action for storm control (dropping packets).</p> <p>Storm control enables the switching device to monitor traffic levels and to drop broadcast, multicast, and unknown unicast packets when a specified traffic level—called the storm control level or storm control bandwidth—is exceeded, thus preventing packets from proliferating and degrading the LAN.</p> <p>When you include the <b>interface-shutdown-action</b> statement at the [edit switch-options] hierarchy level, the behavior is to temporarily disable interfaces when the storm control level threshold is exceeded.</p> <p>When the configuration statement <b>recovery-timeout</b> is included under the [edit interfaces ether-options ethernet-switch-profile hierarchy level, a temporarily disabled port will come up again after the specified time interval.</p> |
| <b>Default</b>                  | Default behavior for this configuration is soft shutdown.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <ul style="list-style-type: none"><li>• <b>hard-shutdown</b>—When the storm control level threshold is exceeded, the physical interface is brought down.</li><li>• <b>soft-shutdown</b>—When the storm control level threshold is exceeded, data traffic is blocked and only control traffic is allowed to pass.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607</a></li><li>• <a href="#">Understanding Storm Control for Managing Traffic Levels on page 585</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |


## interfaces (MACsec)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> interfaces <i>interface-name</i> {     <b>connectivity-association</b> <i>connectivity-association-name</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Applies the specified connectivity association to the specified interface to enable MACsec.</p> <p>One connectivity association can be applied to multiple interfaces.</p> <p>You must always use this statement to apply a connectivity association to an interface to enable MACsec. You must complete this configuration step regardless of whether MACsec is enabled using static connectivity association key (CAK) security mode or static secure association key (SAK) security mode.</p> <p>If you are enabling MACsec using static SAK security mode and need to configure MACsec on inbound and outbound traffic on the same interface, you must configure a connectivity association with one secure channel for inbound traffic and a second secure channel for outbound traffic. The connectivity association is then applied to the interface using this statement to enable MACsec for traffic entering and leaving the interface.</p> |
| <b>Default</b>                  | Interfaces are not associated with any connectivity associations, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## interfaces (MACsec for MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>interfaces <i>interface-name</i> {<br/>    connectivity-association <i>connectivity-association-name</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit security macsec]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Applies the specified connectivity association to the specified interface to enable MACsec.</p> <p>One connectivity association can be applied to multiple interfaces.</p> <p>You must always use this statement to apply a connectivity association to an interface to enable MACsec. You must complete this configuration step regardless of whether MACsec is enabled using static connectivity association key (CAK) security mode or static secure association key (SAK) security mode.</p> <p>If you are enabling MACsec using static SAK security mode and need to configure MACsec on inbound and outbound traffic on the same interface, you must configure a connectivity association with one secure channel for inbound traffic and a second secure channel for outbound traffic. The connectivity association is then applied to the interface using this statement to enable MACsec for traffic entering and leaving the interface.</p> <div> <b>NOTE:</b> Starting in Junos OS Release 16.1R2, when Media Access Control Security (MACsec) is enabled on an interface, the interface flow control capability is enabled by default, regardless of the configuration that you set using the (flow-control   no-flow-control) statement at the [edit interfaces <i>interface-name</i> gicether-options] hierarchy level. When MACsec is disabled, interface flow control is restored to the configuration that you set using the flow-control statement at the [edit interfaces] hierarchy level. When MACsec is enabled, additional header bytes are added to the packet by the MACsec PHY. With line rate traffic, when MACsec is enabled and flow control is disabled, the pause frames sent by the MACsec PHY are terminated by the MIC's MAC (enhanced 20-port Gigabit Ethernet MICs on MX Series routers) and not transferred to the Packet Forwarding Engine, causing framing errors. Therefore, when MACsec is enabled on an interface, flow control is also automatically enabled on such an interface.</div> |
| <b>Default</b>                  | Interfaces are not associated with any connectivity associations, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

- Related Documentation**
- [Configuring Media Access Control Security \(MACsec\) on MX Series Routers](#)

## internal

**Syntax**

```
internal {
 security-association {
 manual {
 direction (bidirectional | inbound | outbound) {
 protocol esp;
 spi spi-value;
 encryption {
 algorithm 3des-cbc;
 key ascii-text ascii-text-string;
 }
 }
 }
 }
}
```

**Hierarchy Level** [edit security ipsec]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** (Junos-FIPS only) Define an internal security association (SA) for internal Routing-Engine-to-Routing-Engine communication.

**Options** The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** Crypto Officer—To view and add this statement in the configuration.

- Related Documentation**
- [Configuring IPsec for Enabling Internal Communications Between Routing Engines for Junos OS in FIPS Mode on page 217](#)
  - [Secure Configuration Guide for Common Criteria and Junos-FIPS](#)

## ipsec (Security)

```
Syntax ipsec {
 security-association {
 manual {
 direction (bidirectional | inbound | outbound) {
 protocol esp;
 spi spi-value;
 encryption {
 algorithm 3des-cbc;
 key (ascii-text ascii-text-string | hexadecimal hexadecimal-string);
 }
 }
 }
 }
 policy ipsec-policy-name {
 perfect-forward-secrecy {
 keys (group1 | group2);
 }
 proposals [proposal-names];
 }
 proposal ipsec-proposal-name {
 authentication-algorithm (hmac-sha1-96 | hmac-sha2-256);
 encryption-algorithm (3des-cbc | des-cbc);
 lifetime-seconds seconds;
 protocol (ah | esp | bundle);
 }
 security-association name {
 dynamic {
 ipsec-policy policy-name;
 replay-window-size (32 | 64);
 }
 manual {
 direction (inbound | outbound | bi-directional) {
 authentication {
 algorithm (hmac-sha1-96 | hmac-sha2-256);
 key (ascii-text key | hexadecimal key);
 }
 auxiliary-spi auxiliary-spi-value;
 encryption {
 algorithm (des-cbc | 3des-cbc);
 key (ascii-text key | hexadecimal key);
 }
 protocol (ah | esp | bundle);
 spi spi-value;
 }
 }
 mode (tunnel | transport);
 }
 traceoptions {
 file <files number> < size size>;
 flag all;
 flag database;
 flag general;
 }
}
```

```

 flag ike;
 flag parse;
 flag policy-manager;
 flag routing-socket;
 flag timer;
 }
}

```

**Hierarchy Level** [edit security]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Configure IPsec on encryption interfaces.



**NOTE:** You must configure the IPsec keys as hexadecimal keys for maximum key strength with Junos OS in FIPS mode.

**Options** The remaining statements are explained separately.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Security Associations for IPsec on an ES PIC on page 195](#)

## ip-source-guard

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>ip-source-guard;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>     | <ul style="list-style-type: none"><li>For platforms with ELS:<br/>[edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b>]</li><li>For platforms without ELS:<br/>[edit <b>ethernet-switching-options secure-access-port vlan</b> (all   <i>vlan-name</i>)]</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Hierarchy level [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b>] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 17.3 for QFX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>         | <p>Perform IP source guard checking on packets sent from access interfaces. Validate source IP addresses and source MAC addresses on all VLANs or on the specified VLAN or VLAN range. Forward packets with valid addresses and drop those with invalid addresses.</p> <ul style="list-style-type: none"><li><b>ip-source-guard</b>—Enable IP source guard checking.</li><li><b>no-ip-source-guard</b>—(Not available in [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b>]) Disable IP source guard checking.</li></ul> <p>If you configure IP source guard at the [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b>] hierarchy level:</p> <ul style="list-style-type: none"><li>IP source guard can be configured only for a specific VLAN, not for a list or a range of VLAN IDs.</li><li>DHCP snooping is automatically enabled.</li></ul> <p>See “<a href="#">Configuring IP Source Guard (CLI Procedure)</a>” on page 544 for more information about this configuration.</p> <p>If you configure IP source guard at the [edit <b>ethernet-switching-options secure-access-port vlan</b> (all   <i>vlan-name</i>)] hierarchy level:</p> <ul style="list-style-type: none"><li>You must enable DHCP snooping on all VLANs if you configure IP source guard on all VLANs.</li><li>You must enable DHCP snooping for the specific VLAN if you configure IP source guard on that specific VLAN. Otherwise, the default behavior of no DHCP snooping applies to that VLAN.</li></ul> <p>See “<a href="#">Enabling DHCP Snooping (CLI Procedure)</a>” on page 504 for more information about this configuration.</p> |





**NOTE:** On EX9200 switches, IP source guard is not supported in an MC-LAG scenario.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN on page 488</a></li> <li>• <a href="#">Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces on page 478</a></li> <li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621</a></li> <li>• <a href="#">Configuring IP Source Guard (CLI Procedure) on page 617</a></li> <li>• <a href="#">Configuring IP Source Guard (CLI Procedure) on page 544</a></li> </ul> |

## ip-source-guard (MX Series)

---


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ip-source-guard;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options <a href="#">dhcp-security</a>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Hierarchy level <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security]</code> introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Perform IP source guard checking on packets sent from access interfaces. Validate source IP addresses and source MAC addresses on all bridge domains or on the specified bridge domain or bridge domain range. Forward packets with valid addresses and drop those with invalid addresses.</p> <ul style="list-style-type: none"><li>• <b>ip-source-guard</b>—Enable IP source guard checking.</li></ul> <p>If you configure IP source guard at the <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security]</code> hierarchy level:</p> <ul style="list-style-type: none"><li>• IP source guard can be configured only for a specific bridge domain, not for a list or range of bridge domains.</li><li>• DHCP snooping is automatically enabled.</li></ul> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring IP Source Guard to Mitigate the Effects of Source IP Address Spoofing and Source MAC Address Spoofing (CLI Procedure) on page 543</a></li><li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                     |

## source-ip-address-list


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source-ip-address-list <i>address-list-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit forwarding-options access-security <a href="#">router-advertisement-guard policy <i>policy-name</i> discard</a>]</p> <p>[edit forwarding-options access-security <a href="#">router-advertisement-guard policy <i>policy-name</i> accept match-list</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.</p> <p>Statement introduced in Junos OS Release 16.1 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Configure a list of IPv6 addresses for an IPv6 Router Advertisement (RA) guard policy to validate the source IPv6 address of an incoming RA message against the IPv6 addresses in this list. RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in the policy.</p> <p>You can use a list of IPv6 addresses for validating RA messages as part of either an accept policy or a discard policy. Before you can include a list in an RA policy, you must configure the list name at the [edit policy-options prefix-list] hierarchy level. When RA guard is enabled by using an accept policy, any RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped. When RA guard is enabled by using a discard policy, any RA messages that match the conditions are dropped, and RA messages that do not match the conditions are forwarded.</p> |
| <b>Options</b>                  | <p><b><i>address-list-name</i></b>—Configure a list of IPv6 addresses to use in an RA guard policy. The policy is used to validate the source of an incoming RA message by comparing the IPv6 address of the RA message to the IPv6 addresses contained in the list.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li> <li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## ipv6-source-guard

---

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ipv6-source-guard;                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"><li>For platforms with Enhanced Layer 2 Software (ELS):<br/>[edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security</a>];</li><li>For platforms without ELS:<br/>[edit <a href="#">ethernet-switching-options secure-access-port</a> vlan (all   <i>vlan-name</i>)]</li></ul>                                 |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Statement introduced in Junos OS Release 13.2X51-D20 for EX Series switches.<br>Support at the [edit <a href="#">ethernet-switching-options secure-access-port</a> vlan (all   <i>vlan-name</i> )] hierarchy level introduced in Junos OS Release 14.1X53-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 17.3R1 for QFX Series switches. |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Perform IPv6 source guard checking on packets sent from access interfaces. Validate source IP addresses and source MAC addresses on all VLANs or on the specified VLAN. Forward packets with valid addresses and drop those with invalid addresses.                                                                                                               |
| <div> <b>NOTE:</b> If you configure the <code>ipv6-source-guard</code> statement at the [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security</a>] hierarchy level, DHCPv6 snooping is automatically enabled for the specified VLAN.</div> <div>If you configure the <code>ipv6-source-guard</code> statement at the [edit <a href="#">ethernet-switching-options secure-access-port</a> vlan <i>vlan-name</i>] hierarchy level, you must also enable DHCPv6 snooping for the specified VLAN.</div> |                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Default</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Disabled.                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"><li><a href="#">Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626</a></li><li><a href="#">Configuring IP Source Guard (CLI Procedure) on page 544</a></li></ul>                                                                               |

## ipv6-source-guard-sessions

|                                 |                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> ipv6-source-guard-sessions {     max-number <i>max-number</i>; } </pre>                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options secure-access-port</a> ]                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                     |
| <b>Description</b>              | Specify the maximum number of IPv6 source guard sessions for TCAM space provisioning.                                                                                                                                                                                                            |
|                                 | <div>  <p><b>NOTE:</b> After setting or changing the maximum number of IPv6 source guard sessions and committing the configuration, you must reboot the switch for the configuration to take effect.</p> </div> |
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <b>max-number <i>max-number</i></b> —The maximum number of IPv6 source guard sessions.<br><b>Range:</b> 50 through 300.                                                                                                                                                                          |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626</a></li> <li>• <a href="#">Configuring IP Source Guard (CLI Procedure) on page 544</a></li> </ul>       |

## key (Authentication Keychain)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>key key {<br/>  algorithm (md5   hmac-sha-1);<br/>  options (basic   isis-enhanced);<br/>  key-name authentication-key-name;<br/>  secret secret-data;<br/>  start-time yyyy-mm-dd.hh:mm:ss;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Statement introduced in Junos OS Release 17.4.</p> |
| <b>Description</b>              | Configure the authentication element.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>key</b>—Each key within a keychain is identified by a unique integer value.</p> <p><b>Range:</b> 0 through 63</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Authentication Key Updates</i></li><li>• <i>Example: Configuring BFD Authentication for Securing Static Routes</i></li><li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li></ul>                                                                                                                                                                                                                                                                                                              |

## key (Junos FIPS)

---

|                                 |                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>key (ascii-text <i>key</i>   hexadecimal <i>key</i>);</code>                                             |
| <b>Hierarchy Level</b>          | [edit security ipsec internal security-association manual direction encryption]                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                              |
| <b>Description</b>              | The key used for the internal Routing-Engine-to-Routing-Engine IPsec security association (SA) configuration.  |
| <b>Options</b>                  | <i>ascii-text-key</i> —The encrypted ASCII text key.<br><i>hexadecimal key</i> —The encrypted hexadecimal key. |
| <b>Required Privilege Level</b> | Crypto Officer—To add and view this statement in the configuration.                                            |

## key (MACsec)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>key key-string;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association connectivity-association-name secure-channel secure-channel-name security-association security-association-number</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Specifies the static security key to exchange to enable MACsec using static secure association key (SAK) security mode.</p> <p>The key string is a 32-digit hexadecimal number. The key string and the security association must match on both sides of an Ethernet connection to secure traffic using MACsec when enabling MACsec using SAK security mode.</p> <p>You must configure at least two security associations with unique security association numbers and key strings to enable MACsec using static SAK security mode. MACsec initially establishes a secure connection when a security association number and key match on both ends of an Ethernet link. After a certain number of Ethernet frames are securely transmitted across the Ethernet link, MACsec automatically rotates to a new security association with a new security association number and key to maintain the secured Ethernet link. This rotation continues each time a certain number of Ethernet frames are securely transmitted across the secured Ethernet link, so you must always configure MACsec to have at least two security associations.</p> |
| <b>Default</b>                  | This statement does not have a default value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <b>key-string</b> —Specifies the key to exchange with the other end of the link on the secure channel. The <i>key-string</i> is a 32-digit hexadecimal string that is created by the user.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## key-chain (Security)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> key-chain <i>key-chain-name</i> {   <b>description</b> <i>text-string</i>;   <b>key</b> <i>key</i> {     <b>algorithm</b> (md5   hmac-sha-1);     <b>options</b> (basic   isis-enhanced);     <b>key-name</b> <i>authentication-key-name</i>;     <b>secret</b> <i>secret-data</i>;     <b>start-time</b> <i>yyyy-mm-dd.hh:mm:ss</i>;   }   <b>tolerance</b> <i>seconds</i>; } </pre>                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Statement introduced in Junos OS Release 17.4.</p> |
| <b>Description</b>              | Create the key-chain configuration for the Border Gateway Protocol (BGP), the Label Distribution Protocol (LDP) routing protocols, the Bidirectional Forwarding Detection (BFD) protocol, and the Intermediate System-to-Intermediate System (IS-IS) protocol.                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b><i>key-chain-name</i></b>—Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">authentication-key-chains on page 676</a></li> <li>• <i>Configuring Authentication Key Updates</i></li> <li>• <i>Example: Configuring BFD Authentication for Securing Static Routes</i></li> <li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li> </ul>                                                                                                                                                                                                                                         |

## key-name

---

|                                 |                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>key-name authentication-key-name;</code>                                                                                   |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> key <i>key</i> ]                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 17.4.                                                                                   |
| <b>Description</b>              | Specify a password in encrypted text or plain text format. The secret password always appears in encrypted format.               |
| <b>Options</b>                  | <i>key-name</i> —Authentication key name to use                                                                                  |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul> |

## key-server-priority (MACsec)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>key-server-priority <i>priority-number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> mka]                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Specifies the key server priority used by the MACsec Key Agreement (MKA) protocol to select the key server when MACsec is enabled using static connectivity association key (CAK) security mode.</p> <p>The switch with the lower <i>priority-number</i> is selected as the key server.</p> <p>If the <i>priority-number</i> is identical on both sides of a point-to-point link, the MKA protocol selects the device with the lower MAC address as the key server.</p> |
| <b>Default</b>                  | The default key server priority number is 16.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b><i>priority-number</i></b>—Specifies the MKA server election priority number.</p> <p>The <i>priority-number</i> can be any number between 0 and 255. The lower the number, the higher the priority.</p>                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                         |

## key-server-priority (MACsec for MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>key-server-priority <i>priority-number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> mka]                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | <p>Specifies the key server priority used by the MACsec Key Agreement (MKA) protocol to select the key server when MACsec is enabled using static connectivity association key (CAK) security mode.</p> <p>The switch with the lower <i>priority-number</i> is selected as the key server.</p> <p>If the <i>priority-number</i> is identical on both sides of a point-to-point link, the MKA protocol selects the device with the lower MAC address as the key server.</p> |
| <b>Default</b>                  | The default key server priority number is 16.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b><i>priority-number</i></b>—Specifies the MKA server election priority number.</p> <p>The <i>priority-number</i> can be any number between 0 and 255. The lower the number, the higher the priority.</p>                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                                                                           |

## ldap-url

---

|                                 |                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <ldap-url <i>url-name</i> >;                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security certificates <a href="#">certification-authority</a> <i>ca-profile-name</i> ]                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series, |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>(Optional) Specify the Lightweight Directory Access Protocol (LDAP) URL for digital certificates.                                                                                   |
| <b>Options</b>                  | <i>url-name</i> —Name of the LDAP URL.                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying an LDAP URL on page 14</a></li> </ul>                                                                                                                                                                      |

## level

---

|                                 |                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>level <i>level</i>;</code>                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options storm-control interface</a> (all   <i>interface-name</i> )]                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in JUNOS Release 9.1 for EX Series switches.<br>Statement deprecated in JUNOS Release 9.5 for EX Series switches.<br>Statement reinstated in JUNOS Release 11.4 for EX Series switches.                                                                                              |
| <b>Description</b>              | For interfaces that are enabled for storm control, configure the storm control level as a percentage of the combined traffic streams that are subject to storm control on that interface.                                                                                                                 |
| <b>Default</b>                  | When storm control is enabled on an interface, the default storm control level is 80 percent of the combined traffic streams that are subject to storm control on that interface.                                                                                                                         |
| <b>Options</b>                  | <b>level</b> —Percentage of the combined traffic streams that are subject to storm control on that interface.<br><b>Range:</b> 0 through 100 percent<br><b>Default:</b> 80 percent                                                                                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">bandwidth on page 680</a></li><li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587</a></li><li>• <a href="#">Understanding Storm Control on EX Series Switches on page 597</a></li></ul> |


---

## lifetime-seconds (Security)

---

|                                 |                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <lifetime-seconds <i>seconds</i> >;                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit security ike proposal <i>ike-proposal-name</i> ],<br>[edit security ipsec proposal <i>ipsec-proposal-name</i> ]                                                                               |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                   |
| <b>Description</b>              | (Optional) Configure the lifetime of IKE or IPsec SA. When the SA expires, it is replaced by a new SA (and SPI) or terminated.                                                                      |
| <b>Options</b>                  | <b><i>seconds</i></b> —Lifetime, in seconds.<br><b>Range:</b> 180 through 86,400                                                                                                                    |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Lifetime for an IKE SA on page 209</a></li><li>• <a href="#">Configuring the Lifetime for an IPsec SA on page 214</a></li></ul> |

## light-weight-dhcpv6-relay


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | lightweight-dhcpv6-relay;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security dhcpv6-options</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 16.1R3 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Configure a Lightweight DHCPv6 Relay Agent (LDRA) to insert relay agent information in messages sent from a DHCPv6 client to a server or other relay agent on the same IPv6 link. The LDRA acts as a relay agent, but without performing the routing function necessary to forward messages to a server or relay agent that resides on a different IPv6 link.</p> <p>When the LDRA receives a DHCPv6 Solicit message from a client, it encapsulates that message within a DHCPv6 Relay-Forward message, which it then forwards to the server or to another relay agent. Before it forwards the Relay-Forward message, the LDRA can also insert DHCPv6 options in the message. These options contain information that the server uses to assign IP addresses, prefixes, and other configuration parameters for the client.</p> <p>You must configure LDRA if you configure the following DHCPv6 options at the [edit vlan <i>vlan-name</i> forwarding-options <b>dhcp-security dhcpv6-options</b>] hierarchy level:</p> <ul style="list-style-type: none"> <li>• <b>option-16</b> (Vendor ID)—Option 16 provides the server with information about the vendor that manufactured the hardware on which the DHCPv6 client is running. Option 16 is the DHCPv6 equivalent of the <b>vendor-id</b> suboption of DHCP option 82.</li> <li>• <b>option-18</b> (Interface ID)—A unique identifier for the interface on which the client DHCPv6 packet is received. Suboptions can be configured to include a prefix with the interface ID or to change the type of information used to identify the interface. Option 18 is the DHCPv6 equivalent of the <b>circuit-id</b> suboption of DHCP option 82.</li> <li>• <b>option-37</b> (Remote ID)—A unique identifier for the remote host. Suboptions can be configured to include a prefix with the remote ID or to change the interface portion of the ID. Option 37 is the DHCPv6 equivalent of the <b>remote-id</b> suboption of DHCP option 82.</li> </ul> <div style="margin-top: 20px;">  <p><b>NOTE:</b> Option 18 is mandatory in Relay-Forward messages and is included even if it is not explicitly configured. However, suboptions of option 18 are included in Relay-Foward messages only if they are configured using the <b>option-18 CLI</b> statement at the [edit vlan <i>vlan-name</i> forwarding-options <b>dhcp-security dhcpv6-options</b>] hierarchy level.</p> </div> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



- Related Documentation**
- [Enabling DHCPv6 Options by Using a Lightweight DHCPv6 Relay Agent \(LDRA\) \(CLI Procedure\) on page 531](#)
  - [no-option18 on page 880](#)
  - [no-dhcpv6-options on page 870](#)

## local

---

|                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                      | <pre>local <i>certificate-name</i> {<br/>    <i>certificate-key-string</i>;<br/>    load-key-file <i>URL filename</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                             | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                                                                                                                                                                                                                                         | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                                                                                                                                                                                                                                                 | Import a paired X.509 private key and authentication certificate, to enable Junos XML protocol client applications to establish Secure Sockets Layer (SSL) connections to the router or switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <div> <b>NOTE:</b> For FIPS mode, the digital security certificates must be compliant with the National Institute of Standards and Technology (NIST) SP 800-131A standard.</div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                                                                                                                                                                                                                                                     | <p><b><i>certificate-key-string</i></b>—String of alphanumeric characters that constitute the private key and certificate.</p> <p><b><i>certificate-name</i></b>—Name that uniquely identifies the certificate.</p> <p><b><i>load-key-file URL filename</i></b>—File that contains the private key and certificate. It can be one of two types of values:</p> <ul style="list-style-type: none"><li>• Pathname of a file on the local disk (assuming you have already used another method to copy the certificate file to the router's or switch's local disk)</li><li>• URL to the certificate file location (for instance, on the computer where the Junos XML protocol client application runs)</li></ul> |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                    | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>                                                                                                                                                                                                                                       | <ul style="list-style-type: none"><li>• <a href="#">Importing SSL Certificates for Junos XML Protocol Support on page 7</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## local-certificate (Security)

---

|                                 |                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>local-certificate <i>certificate-filename</i>;</code>                                                        |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">policy</a> <i>ike-peer-address</i> ]                                                |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                  |
| <b>Description</b>              | Configure the certificate filename from which to read the local certificate.                                       |
| <b>Options</b>                  | <i>certificate-filename</i> —File from which to read the local certificate.                                        |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying the Certificate Filename on page 17</a></li> </ul> |

## local-key-pair

---

|                                 |                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>local-key-pair <i>private-public-key-file</i>;</code>                                                               |
| <b>Hierarchy Level</b>          | [edit security ike <a href="#">policy</a> <i>ike-peer-address</i> ]                                                       |
| <b>Release Information</b>      | Statement introduced before Junos 7.4.                                                                                    |
| <b>Description</b>              | Specify private and public keys.                                                                                          |
| <b>Options</b>                  | <i>private-public-key-file</i> —Specify the file from which to read the private and public key pair.                      |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying the Private and Public Key File on page 17</a></li> </ul> |

## location


---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>location <i>local_pathname</i>   <i>remote_URL</i>;</code>                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options</a> secure-access-port dhcp-snooping-file]                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Specify either a local pathname or a remote URL as the location in which to store the DHCP snooping database.                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><i>local_pathname</i>   <i>remote_URL</i> —Location for storing the DHCP snooping database.</p> <ul style="list-style-type: none"><li>• <i>local_pathname</i> —Use <i>/path</i> to store the database on a local switch.</li><li>• <i>remote_URL</i> —Use <code>ftp://ip-address</code> or <code>ftp://hostname/path</code> to store the database at a remote location.</li></ul> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                       |

## location (DHCP Snooping Database)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>location (<i>local_pathname</i>   <i>remote_url</i>);     timeout <i>seconds</i>;     write-interval <i>seconds</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <pre>[edit ethernet-switching-options secure-access-port dhcp-snooping-file]; [edit ethernet-switching-options secure-access-port dhcpv6-snooping-file]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.4 for EX Series switches.</p> <p>Support at the <code>[edit ethernet-switching-options secure-access-port dhcpv6-snooping-file]</code> hierarchy level introduced in Junos OS Release 14.1X53-D10 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure IP-MAC address bindings to persist through switch reboots by specifying a location in which to store the DHCP snooping database. When specifying the location for the DHCP snooping database, you must also specify how frequently the switch writes (<b>write-interval</b>) the database entries into the DHCP snooping database file.</p> <p>If you choose to store the DHCP snooping database on a remote FTP site, you might want to specify the time (<b>timeout</b>) that the switch waits for a remote system to respond when the DHCP snooping database is stored on a remote FTP site. This is optional.</p> |
| <b>Options</b>                  | <p><i>local_pathname</i>   <i>remote_url</i></p> <ul style="list-style-type: none"> <li>• <i>local_pathname</i>—Use <i>/path</i> to store the database file on the local switch.</li> <li>• <i>remote_url</i>—Use <code>ftp://ip-address</code> or <code>ftp://hostname/path</code> to store the database on a remote FTP site.</li> </ul>                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Making IP-MAC Bindings in the DHCP Snooping Database Persistent (CLI Procedure) on page 511</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul>                                                                                                                                                                                                                                                                                                                                    |

## logical-interface (DDoS Flow Detection)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>logical-interface (<i>flow-bandwidth</i>   <i>flow-control-mode</i>   <i>flow-detection-mode</i>)</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>     | [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-bandwidth</i> ],<br>[edit system ddos-protection protocols <i>protocol-group packet-type flow-level-control</i> ],<br>[edit system ddos-protection protocols <i>protocol-group packet-type flow-level-detection</i> ]                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b> | Statement introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>         | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure flow bandwidth, flow control mode, or flow detection mode for flow detection at the logical interface flow aggregation level for the packet type.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>             | <p><b><i>flow-bandwidth</i></b>—Bandwidth for the flow at the logical interface level. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-bandwidth</i>] hierarchy level.</p> <p><b>Default:</b> 200 packets per second</p> <p><b>Range:</b> 1 through 30,000 packets per second</p> <p><b><i>flow-control-mode</i></b>—Mode for how traffic in the detected flow is controlled at the logical interface level. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-control</i>] hierarchy level.</p> |
|                            | <p> <b>NOTE:</b> The configuration at this level overrides the global configuration using the <b>flow-level-control</b> statement at the [edit system ddos-protection global] hierarchy level.</p>                                                                                                                                                                                                                                                                                                                      |
|                            | <ul style="list-style-type: none"> <li>• <b>drop</b>—Drop all traffic in flow.</li> <li>• <b>keep</b>—Keep all traffic in flow.</li> <li>• <b>police</b>—Police the traffic to within its allowed bandwidth.</li> </ul> <p><b>Default:</b> drop</p> <p><b><i>flow-detection-mode</i></b>—Mode for how flow detection operates at the logical interface level when a policer has been violated. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-detection</i>] hierarchy level.</p>                                                                   |



**NOTE:** The configuration at this level overrides the global configuration using the `flow-detection-mode` statement at the `[edit system ddos-protection global]` hierarchy level.

- **automatic**—Search flows at the logical interface level only when a DDoS policer is being violated and only when the flow causing the policer violation is not discovered at the finer flow aggregation level, subscriber. When the suspicious flow is not found at this level, then the search moves to a coarser level of flow aggregation (physical interface). Flows at the logical interface level are subsequently not searched again until the policer is no longer violated at the coarser level, and a subsequent violation occurs that cannot be found at the subscriber level.
- **off**—Disable flow detection at the logical interface level so that flows are never searched at this level.
- **on**—Search flows at the logical interface level, even when no DDoS protection policer is currently being violated. Monitoring continues at this level regardless of whether a suspect flow is identified at this level.

**Default:** `automatic`

|                                 |                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration. |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level on page 85</a></li> <li>• <a href="#">Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level on page 87</a></li> <li>• <a href="#">Configuring How Flow Detection Operates at Each Flow Aggregation Level on page 84</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul> |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## mac

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mac mac-address;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"> <li>For platforms with Enhanced Layer 2 Software (ELS):<br/> <code>[edit vlans <i>vlan-name</i> forwarding-options dhcp-security group <i>group-name</i> interface <i>interface-name</i> static-ip <i>ip-address</i>]</code></li> <li>For platforms without ELS:<br/> <code>[edit ethernet-switching-options secure-access-port interface (all   <i>interface-name</i>) static-ip <i>ip-address</i> vlan <i>vlan-name</i>]</code></li> <li>For MX Series platforms:<br/> <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security group <i>group-name</i> interface <i>interface-name</i> static-ip <i>ip-address</i>]</code></li> </ul> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Hierarchy level <code>[edit vlans <i>vlan-name</i> forwarding-options dhcp-security]</code> introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Hierarchy level <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security]</code> introduced in Junos OS Release 14.1 for the MX Series.</p>                                                                                                                                                                                                                   |
| <b>Description</b>              | Configure the media access control (MAC) address or hardware address of the device connected to the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <i>mac-address</i> —Value (in hexadecimal format) of the address assigned to this device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure) on page 533</a></li> <li><a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure) on page 316</a></li> <li><a href="#">Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers (CLI Procedure) on page 549</a></li> </ul>                                                                                                                                                                                                                                            |



---

## mac (Option 82)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | mac;                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security option-82 remote-id</b> ]                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2 for EX Series switches.                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Use the MAC address of the port connected to the DHCP client as the <b>remote-id</b> suboption of DHCP option 82 (also known as the DHCP relay agent information option) in DHCP request packet headers before forwarding or relaying requests to a DHCP server. This suboption provides a trusted identifier for the host system that has forwarded or relayed requests to the server. |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 313</a></li><li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a></li></ul>                                        |

## mac-address (MACsec)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mac-address mac-address;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> secure-channel <i>secure-channel-name</i> id]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Specify a MAC address to enable MACsec using static secure association key (SAK) security mode. The <b>mac-address</b> variables must match on the sending and receiving ends of a link to enable MACsec using static SAK security mode.</p> <p>If you are configuring a MAC address on a secure channel in the outbound direction, you should specify the MAC address of the interface as the <b>mac-address</b>.</p> <p>If you are configuring a MAC address on a secure channel in the inbound direction, you should specify the MAC address of the interface at the other end of the link as the <b>mac-address</b>.</p> <p>You only use this configuration option when you are configuring MACsec using static SAK security mode. This option does not need to be specified when you are enabling MACsec using static connectivity association key (CAK) security mode.</p> |
| <b>Default</b>                  | No MAC address is specified in the secure channel, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <b>mac-address</b> —The MAC address, in six groups of two hexadecimal digits.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## mac-address (MACsec)


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mac-address <i>mac-address</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association</a> <i>connectivity-association-name</i> <a href="#">secure-channel</a> <i>secure-channel-name id</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Specify a MAC address to enable MACsec using static secure association key (SAK) security mode. The <b>mac-address</b> variables must match on the sending and receiving ends of a link to enable MACsec using static SAK security mode.</p> <p>If you are configuring a MAC address on a secure channel in the outbound direction, you should specify the MAC address of the interface as the <b>mac-address</b>.</p> <p>If you are configuring a MAC address on a secure channel in the inbound direction, you should specify the MAC address of the interface at the other end of the link as the <b>mac-address</b>.</p> <p>You only use this configuration option when you are configuring MACsec using static SAK security mode. This option does not need to be specified when you are enabling MACsec using static connectivity association key (CAK) security mode.</p> |
| <b>Default</b>                  | No MAC address is specified in the secure channel, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <b>mac-address</b> —The MAC address, in six groups of two hexadecimal digits.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## mac-limit

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mac-limit <i>limit</i> {<br/>    &lt;action <i>action</i>&gt;;<br/>}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options</a> secure-access-port <a href="#">interface</a> (all   <i>interface-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Specify the number of MAC addresses that can be dynamically added to the MAC address cache for this access interface (port) and the action to be taken if the limit is exceeded.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Default</b>                  | The default action is <b>drop</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><i>limit</i>—Maximum number of MAC addresses.</p> <p><i>action action</i>—(Optional) Action to take when the MAC address limit is exceeded:</p> <ul style="list-style-type: none"><li>• <b>drop</b>—Drop the packet and generate a system log entry. This is the default.</li><li>• <b>log</b>—Do not drop the packet but generate a system log entry.</li><li>• <b>none</b>—No action.</li><li>• <b>shutdown</b>—Disable the interface and generate an alarm. If you configure the switch with the <b>port-error-disable</b> statement, the disabled interface recovers automatically upon expiration of the specified timeout. If this statement is not configured, you can bring up the disabled interfaces by running the <b>clear ethernet-switching port-error</b> command.</li></ul> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299</a></li><li>• <a href="#">Configuring MAC Limiting on page 434</a></li><li>• <i>allowed-mac</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## mac-limit (Access Port Security)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>mac-limit <i>limit</i> action <i>action</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | [edit <code>ethernet-switching-options secure-access-port interface</code> (all   <i>interface-name</i> )],<br>[edit <code>ethernet-switching-options secure-access-port interface <i>interface-name</i> vlan <i>vlan-name</i></code> ],                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b> | Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>         | <p>Set a limit on the number of MAC addresses that can be added to the Ethernet switching table.</p> <ul style="list-style-type: none"> <li>[edit <code>ethernet-switching options secure-access-port interface</code>]—Set the MAC address learning limit for a specific interface, for a range of interfaces, or for all interfaces on the switch.</li> <li>[edit <code>ethernet-switching options secure-access-port interface <i>interface-name</i> vlan <i>vlan-name</i></code>]—Set the MAC address learning limit for a specific interface as a member of a specific VLAN (VLAN membership MAC limit).</li> </ul> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;"> <p> <b>NOTE:</b> If you set the MAC address limit on a specific interface as a member of a specific VLAN (VLAN membership MAC limit), the switch drops any additional packets when the VLAN membership MAC limit is exceeded and logs the MAC addresses of those packets. You cannot specify a different action for this specific configuration. If a single interface belongs to more than one VLAN, you can set separate VLAN membership MAC limits for the same interface.</p> </div> <p>When you reset the number of MAC addresses, the MAC address table is not automatically cleared. Previous entries remain in the table after you reduce the number of addresses, so you should clear the forwarding table for the specified interface or MAC address. Use the <code>clear ethernet-switching table</code> command to clear the existing MAC addresses from the table.</p> |
| <b>Default</b>             | The default action is <b>drop</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>             | <p><b>action <i>action</i></b>—(Optional) Action to take when the MAC address limit for an interface or for all interfaces is exceeded:</p> <ul style="list-style-type: none"> <li><b>drop</b>—Drop the packet and generate a system log entry.</li> <li><b>log</b>—Do not drop the packet but generate a system log entry.</li> <li><b>none</b>—No action.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

- **shutdown**—Disable the interface and generate a system log entry. If you have configured the switch with the [port-error-disable](#) statement, the disabled interface recovers automatically upon expiration of the specified disable timeout. If you have not configured the switch for autorecovery from port error disabled conditions, you can bring up the disabled interfaces by running the [clear ethernet-switching port-error](#) command.

*limit*—Maximum number of MAC addresses.

|                                 |                                                            |
|---------------------------------|------------------------------------------------------------|
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.        |
|                                 | system—control—To add this statement to the configuration. |

- |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">allowed-mac on page 669</a></li><li>• <a href="#">clear ethernet-switching table on page 1068</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li>• <a href="#">Example: Configuring MAC Limiting, Including Dynamic and Allowed MAC Addresses, to Protect the Switch from Ethernet Switching Table Overflow Attacks on page 445</a></li><li>• <a href="#">Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452</a></li><li>• <a href="#">Configuring MAC Limiting (CLI Procedure) on page 346</a></li><li>• <a href="#">Configuring MAC Limiting (J-Web Procedure)</a></li><li>• <a href="#">Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 613</a></li></ul> |
|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## mac-list

---

|                                 |                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mac-list <i>name</i> {<br/>    <i>mac-addresses</i>;<br/>}</code>                                                                            |
| <b>Hierarchy Level</b>          | [edit policy-options]                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches. |
| <b>Description</b>              | Define a list of MAC addresses for use in an IPv6 Router Advertisement (RA) guard policy.                                                          |
| <b>Options</b>                  | <i>mac-addresses</i> —List of MAC addresses, one MAC address per line in the configuration.                                                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Understanding Prefix Lists for Use in Routing Policy Match Conditions</i></li> </ul>                   |

## mac-move-limit

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>mac-move-limit {     limit;     &lt;action action   packet-action action&gt;; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>     | <ul style="list-style-type: none"> <li>For platforms with ELS:           <br/>[edit vlans <i>vlan-name</i> switch-options]         </li> <li>For platforms without ELS:           <br/>[edit <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i>)]         </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Hierarchy level [edit vlans <i>vlan-name</i> switch-options] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>         | Specify the number of times a MAC address can move to a new interface (port) in one second and the action to be taken by the switch if the MAC address move limit is exceeded.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Default</b>             | If you do not specify <b>mac-move-limit</b> , the default MAC address move limit is unlimited.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>             | <p><b>limit</b> <i>limit</i>—Maximum number of moves to a new interface per second.</p> <ul style="list-style-type: none"> <li><b>action</b> <i>action</i>—(Optional) (Available <i>only</i> under the hierarchy level [edit <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i>) <b>mac-move-limit</b>]) Action to take when the MAC address move limit is reached:           <ul style="list-style-type: none"> <li><b>drop</b>—Drop the packet and generate a system log entry. This is the default.</li> <li><b>log</b>—Do not drop the packet but generate a system log entry.</li> <li><b>none</b>—No action.</li> <li><b>shutdown</b>—Logically disable the interface and generate a system log entry. If you have configured the switch with the <b>port-error-disable</b> statement, the disabled interfaces recover automatically upon expiration of the specified disable timeout. If you have not configured the switch for autorecovery from port error disabled conditions, you can bring up the disabled interfaces by running the <a href="#">clear ethernet-switching port-error</a> command.</li> </ul> </li> <li><b>packet-action</b> <i>action</i>—(Optional) (Available <i>only</i> under the hierarchy level, [edit vlans <i>vlan-name</i> switch-options <b>mac-move-limit</b>]) Action to take when the MAC address move limit is reached:</li> </ul> |



**NOTE:** There is no default action.



- **drop**—Drop the packet and do not generate an alarm.
- **drop and log**—Drop the packet and generate an alarm, an SNMP trap, or system log entry.
- **log**— Do not drop the packet, but generate an alarm, an SNMP trap, or a system log entry.
- **none**—No action.
- **shutdown**—Logically disable the interface and generate an alarm or an SNMP trap. If you have configured the interface with the [recovery-timeout](#) statement, the disabled interface recovers automatically upon expiration of the specified timeout. If you have not configured the interface for a recovery timeout, you can bring up the disabled interface by running the operational command **clear ethernet-switching recovery-timeout**.

**Required Privilege Level**    system—To view this statement in the configuration.  
                                          system—control—To add this statement to the configuration.

- Related Documentation**
- [Example: Configuring Basic Port Security Features on page 289](#)
  - [Configuring MAC Move Limiting \(CLI Procedure\) on page 440 \(ELS\)](#)
  - [Configuring Persistent MAC Learning \(CLI Procedure\) on page 438](#)
  - [Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 613](#)
  - [Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces \(CLI Procedure\) on page 596](#)

## macsec

```
Syntax macsec {
 connectivity-association connectivity-association-name {
 exclude-protocol protocol-name;
 include-sci;
 mka {
 must-secure;
 key-server-priority priority-number;
 transmit-interval interval;
 }
 no-encryption;
 offset (0|30|50);
 pre-shared-key {
 cak hexadecimal-number;
 ckn hexadecimal-number;
 }
 replay-protect {
 replay-window-size number-of-packets;
 }
 secure-channel secure-channel-name {
 direction (inbound | outbound);
 encryption (MACsec);
 id {
 mac-address mac-address;
 port-id port-id-number;
 }
 offset (0|30|50);
 security-association security-association-number {
 key key-string;
 }
 }
 security-mode security-mode;
 }
 interfaces interface-name {
 connectivity-association connectivity-association-name;
 }
 }
```

**Hierarchy Level** [edit security]

**Release Information** Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.

**Description** Configure Media Access Control Security (MACsec)..

**Options** The remaining statements are explained separately.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring Media Access Control Security \(MACsec\) on page 413](#)

## macsec (MX Series)

```

Syntax macsec {
 connectivity-association connectivity-association-name {
 cipher-suite encryption-algorithm-name;
 exclude-protocol protocol-name;
 pre-shared-key-chain macsec-pre-shared-key-chain-name
 include-sci;
 mka {
 must-secure;
 key-server-priority priority-number;
 transmit-interval interval;
 }
 no-encryption;
 offset (0|30|50);
 pre-shared-key {
 cak hexadecimal-number;
 ckn hexadecimal-number;
 }
 replay-protect{
 replay-window-size number-of-packets;
 }
 secure-channel secure-channel-name {
 direction (inbound | outbound);
 encryption ;
 id {
 mac-address mac-address;
 port-id port-id-number;
 }
 offset (0|30|50);
 security-association security-association-number {
 key key-string;
 }
 }
 security-mode security-mode;
 }
 interfaces interface-name {
 connectivity-association connectivity-association-name;
 }
 }

```

**Hierarchy Level** [edit security]

**Release Information** Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.

**Description** Configure Media Access Control Security (MACsec) on MX Series routers.

**Options** The remaining statements are explained separately.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation** • [Configuring Media Access Control Security \(MACsec\) on MX Series Routers](#)

## manual (Junos OS)

**Syntax**

```
manual {
 direction (inbound | outbound | bi-directional) {
 authentication {
 algorithm (hmac-md5-96 | hmac-sha1-96);
 key (ascii-text key | hexadecimal key);
 }
 auxiliary-spi auxiliary-spi-value;
 }
 encryption {
 algorithm (des-cbc | 3des-cbc);
 key (ascii-text key | hexadecimal key);
 }
 protocol (ah | esp | bundle);
 spi spi-value;
}
```

**Hierarchy Level** [edit security ipsec [security-association](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Define a manual IPsec SA.

**Options** The remaining statements are explained separately.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation** • [Configuring Manual IPsec Security Associations for an ES PIC on page 198](#)

## manual (Junos-FIPS Software)

---

**Syntax**    manual {  
              **direction** (bidirectional | inbound | outbound) {  
                  **protocol** esp;  
                  **spi** *spi-value*;  
                  **encryption** {  
                      **algorithm** 3des-cbc;  
                      **key** ascii-text *ascii-text-string*;  
                  }  
                  **auxiliary-spi** *auxiliary-spi-value*;  
                  **encryption** {  
                      **algorithm** 3des-cbc;  
                      **key** (ascii-text *key* | hexadecimal *key*);  
                  }  
                  **protocol** (esp | bundle);  
                  **spi** *spi-value*;  
              }  
          }

**Hierarchy Level**    [edit security ipsec internal security-association]

**Release Information**    Statement introduced before Junos OS Release 7.4.

**Description**    Define a manual security association (SA) for internal Routing Engine-to-Routing Engine communication.

**Options**    The remaining statements are explained separately.

**Required Privilege Level**    Crypto Officer—To view and add this statement in the configuration.

**Related Documentation**

- [Configuring IPsec for Enabling Internal Communications Between Routing Engines for Junos OS in FIPS Mode on page 217](#)
- *Secure Configuration Guide for Common Criteria and Junos-FIPS*

## mark-interface (RA Guard)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>mark-interface (trusted   block);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit forwarding-options <a href="#">access-security router-advertisement-guard interface interface-name</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Configure an interface as blocked or trusted for IPv6 Router Advertisement (RA) guard. In an IPv6 deployment, RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. RA guard performs checks on incoming RA messages to make sure that they are sent from legitimate routers. If the sender of the RA message cannot be validated, the RA message is dropped.</p> <p>You can configure the <b>mark-interface</b> statement on an interface to bypass RA guard policy checks on that interface. If an interface is configured as either a trusted interface or a blocked interface, RA messages received on the interface are not subject to inspection by RA guard, even if the interface or VLAN is enabled for RA guard. If the interface is trusted, it forwards all RA messages. If the interface is blocked, it drops all RA messages.</p> |
| <b>Options</b>                  | <p><b>block</b>—Configure an interface as blocked for bypassing inspection of RA messages received on that interface by RA guard. When you configure an interface as blocked, all RA messages received on the interface are dropped.</p> <p><b>trusted</b>—Configure an interface as trusted for bypassing inspection of RA messages received on that interface by RA guard. When you configure an interface as trusted, all RA messages received on the interface are forwarded.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li> <li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## match-list

---

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre>match-list {<br/>  match-criteria {<br/>    (match-all   match-any);<br/>  }<br/>  prefix-list-name <i>prefix-list-name</i>;<br/>  source-ip-address-list <i>address-list-name</i>;<br/>  source-mac-address-list <i>address-list-name</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Hierarchy Level     | [edit forwarding-options access-security <b>router-advertisement-guard</b> <i>policy</i> <i>policy-name</i> <b>accept</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Release Information | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description         | <p>Configure one or more lists of IPv6 addresses, MAC addresses, or IPv6 address prefixes to be associated with an IPv6 Router Advertisement (RA) guard <i>accept</i> policy.</p> <p>RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in the policy.</p> <p>You can configure match lists in either an accept policy or a discard policy. When RA guard is enabled by using an accept policy, RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped. When RA guard is enabled by using a discard policy, RA messages that match the conditions are dropped, and RA messages that do not match the conditions are forwarded.</p> <p>You can associate match lists or match conditions (see <a href="#">match-option</a>) with an accept policy. You can configure match lists that be associated with an accept policy by using the match-list statement. The lists configured by using the <b>match-list</b> statement can contain IPv6 addresses, MAC addresses, or IPv6 address prefixes. RA guard examines the source address or address prefix. You configure the lists at the [edit <b>policy-options</b>] hierarchy level by using the <b>prefix-list</b> option for an IPv6 address or address prefix list, and <b>mac-list</b> for a MAC address list.</p> |
| Options             | <p><b>match-all</b>—Configure the RA guard policy so that a received RA message is accepted only if it matches criteria in all of the lists configured under <b>match-list</b>; otherwise, the message is discarded.</p> <p><b>match-any</b>—Configure the RA guard policy so that a received RA message is accepted if it matches criteria in any of the lists configured under <b>match-list</b>; otherwise, the message is discarded.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

The remaining statements are explained separately. See [CLI Explorer](#).



**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324](#)
- [Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330](#)

## match-option

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>match-option {   hop-limit {     (maximum   minimum) value;   }   managed-config-flag;   other-config-flag;   router-preference maximum (high   low   medium); }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>     | [edit forwarding-options access-security <b>router-advertisement-guard</b> policy <i>policy-name</i> <b>accept</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b> | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>         | <p>Configure one or more parameters such as hop-count limit, managed configuration flag, other configuration flag, or router preference priority as the match condition to be associated with an IPv6 Router Advertisement (RA) guard <i>accept</i> policy.</p> <p>RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in the policy.</p> <p>You can associate match lists (see <a href="#">match-list</a>) or match conditions with an accept policy. You can configure match conditions by using the <b>match-option</b> statement in an RA guard accept policy. When RA guard is enabled by using an accept policy, any RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped.</p>                                                                                                                                                                           |
| <b>Options</b>             | <p><b>hop-limit</b>—Configure the RA guard policy to verify the minimum or maximum hop count for an incoming RA message. Use <b>maximum</b> to set a maximum hop count, or <b>minimum</b> to set a minimum hop count.</p> <p><b>managed-config-flag</b>—Configure the RA guard policy to verify that the managed address configuration flag of an incoming RA message is set. When the managed address configuration flag is set, it indicates that addresses are available for allocation by Dynamic Host Configuration Protocol version 6 (DHCPv6).</p> <p><b>other-config-flag</b>—Configure the RA guard policy to verify that the other configuration flag of an incoming RA message is set. When this flag is set, it indicates that other configuration information is available through DHCPv6. Examples of such information are DNS-related information or information on other servers within the network.</p> <p><b>router-preference-maximum</b>—Configure the RA guard policy to verify that the default router preference parameter value of an incoming RA message is lower than or equal to a specified limit. The default router preference value improves the ability of IPv6</p> |

hosts to select a default router to reach a remote destination when the host has multiple routers on its default router list. Use **high**, **medium**, or **low** to set the maximum preference.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324](#)
- [Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330](#)

## maximum-certificates

**Syntax** maximum-certificates *number*;

**Hierarchy Level** [edit security [certificates](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** (Encryption interface on M Series and T Series routers and EX Series switches only)  
Configure the maximum number of peer digital certificates to be cached.

**Options** *number*—Maximum number of peer digital certificates to be cached.  
**Range:** 64 through 4,294,967,295 peer certificates  
**Default:** 1024 peer certificates

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring the Maximum Number of Peer Certificates on page 15](#)

## mka

---


|                                 |                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>mka {<br/>    must-secure;<br/>    key-server-priority <i>priority-number</i>;<br/>    transmit-interval <i>interval</i>;<br/>}</pre> |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association</a> <i>connectivity-association-name</i> ]                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15.                                                                                      |
| <b>Description</b>              | Specify parameters for the MACsec Key Agreement (MKA) protocol.                                                                            |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                         |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>           |

## mka (MX Series)

---


|                                 |                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>mka {<br/>    must-secure;<br/>    key-server-priority <i>priority-number</i>;<br/>    transmit-interval <i>interval</i>;<br/>    eapol-address (pae   provider-bridge   lldp-multicast);<br/>}</pre> |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> ]                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.<br>Option <b>eapol-address</b> introduced in Junos OS Release 18.3R1 for MX Series routers.                             |
| <b>Description</b>              | Specify parameters for the MACsec Key Agreement (MKA) protocol.                                                                                                                                            |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                         |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on MX Series Routers</a></li><li>• <a href="#">eapol-address (MX Series) on page 738</a></li></ul>  |

## mode (IKE)

|                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                           | mode (aggressive   main);                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>                                                                                                                                                  | [edit security ike <b>policy</b> <i>ike-peer-address</i> ]                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>                                                                                                                                              | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                                                                                                                                                      | Define the IKE policy mode.                                                                                                                                                                                                                                                                                                                                                                  |
| <div>  <b>NOTE:</b> IKEv2 protocol does not negotiate using mode configuration. </div> |                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Default</b>                                                                                                                                                          | main                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                                                                                                                                                          | <p><b>aggressive</b>—Take half the number of messages of main mode, has less negotiation power, and does not provide identity protection.</p> <p><b>main</b>—Use six messages, in three peer-to-peer exchanges, to establish the IKE SA. These three steps include the IKE SA negotiation, a Diffie-Hellman exchange, and authentication of the peer. Also provides identity protection.</p> |
| <b>Required Privilege Level</b>                                                                                                                                         | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>                                                                                                                                            | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Mode for an IKE Policy on page 211</a></li> </ul>                                                                                                                                                                                                                                                                       |

## mode (IPsec)

---

|                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                         | mode (transport   tunnel);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                | [edit security ipsec <a href="#">security-association name</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                            | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                    | Define the mode for the IPsec security association.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Default</b>                                                                                                                                                                                                                                                                                                                                                                                                        | tunnel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                                                        | <p><b>transport</b>—Protect traffic when the communication endpoint and cryptographic endpoint are the same. The data portion of the IP packet is encrypted, but the IP header is not. Virtual Private Network (VPN) gateways that provide encryption and decryption services for protected hosts cannot use transport mode for protected VPN communications.</p> <p><b>tunnel</b>—Protect traffic using preshared keys with IKE to authenticate peers or digital certificates with IKE to authenticate peers.</p> |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <div> <b>NOTE:</b> The Junos OS supports only encapsulating security payload (ESP) when you use tunnel mode.</div> <p>In transport mode, the Junos OS does not support authentication header (AH) and ESP header bundles.</p> <p>In transport mode, the Junos OS supports only Border Gateway Protocol (BGP).</p> <div><hr/></div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                       | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                          | <ul style="list-style-type: none"><li>• <i>Example: Using IPsec to Protect BGP Traffic</i></li><li>• <a href="#">Configuring IPsec Tunnel Mode on page 197</a></li></ul>                                                                                                                                                                                                                                                                                                                                           |

---

## multicast

---

|                                 |                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>multicast;</code>                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options storm-control interface</a> (all   <i>interface-name</i> )]                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2 for EX Series switches.                                                                                                                                                                          |
| <b>Description</b>              | Enable storm control for all multicast traffic (both registered multicast and unregistered multicast) for the specified interface or for all interfaces.                                                                                       |
| <b>Default</b>                  | <ul style="list-style-type: none"><li>• On EX2200, EX3200, and EX4200 switches—Storm control does not apply to multicast traffic by default.</li><li>• On EX4500 and EX8200 switches—Storm control is enabled for multicast traffic.</li></ul> |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Disabling or Enabling Storm Control (CLI Procedure)</a> on page 599</li></ul>                                                                                                              |


## must-secure

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>must-secure;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <code>[edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> <b>mka</b>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Specifies that all traffic travelling on the MACsec-secured link must be MACsec-secured to be forwarded onward.</p> <p>When the <b>must-secure</b> option is enabled, all traffic that is not MACsec-secured that is received on the interface is dropped.</p> <p>When the <b>must-secure</b> option is disabled, all traffic from devices that support MACsec is MACsec-secured while traffic received from devices that do not support MACsec is forwarded through the network.</p> <p>The <b>must-secure</b> option is particularly useful in scenarios where multiple devices, such as a phone and a PC, are accessing the network through the same Ethernet interface. If one of the devices supports MACsec while the other device does not support MACsec, the device that doesn't support MACsec can continue to send and receive traffic over the network—provided the <b>must-secure</b> option is disabled—while traffic to and from the device that supports MACsec is MACsec-secured. In this scenario, traffic to the device that is not MACsec-secured must be VLAN-tagged.</p> |
| <b>Default</b>                  | The <b>must-secure</b> option is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <code>admin</code> —To view this statement in the configuration.<br><code>admin-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



## neighbor-discovery-inspection

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | neighbor-discovery-inspection;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b> ];<br>[edit <b>ethernet-switching-options secure-access-port</b> vlan (all   <i>vlan-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X51-D20 for EX Series switches.<br>Support at the [edit <b>ethernet-switching-options secure-access-port</b> vlan (all   <i>vlan-name</i> )] hierarchy level introduced in Junos OS Release 14.1X53-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 17.2R1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Perform dynamic IPv6 neighbor discovery inspection on the specified VLAN.</p> <p>When neighbor discovery inspection is configured, the switch inspects IPv6 packets with neighbor discovery messages and validates them against the DHCPv6 binding table. The source IP address and source MAC address of each packet are checked against the table, and if a valid match is not found, the packet is dropped.</p>                                                                                                                                                                                                                                                                                                                            |
|                                 | <p> <b>NOTE:</b> If you configure the <b>neighbor-discovery-inspection</b> statement at the [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b>] hierarchy level, DHCPv6 snooping is automatically enabled for the specified VLAN.</p> <p>See “<a href="#">Enabling IPv6 Neighbor Discovery Inspection</a>” on page 321 for more information about this configuration.</p> <p>If you configure the <b>neighbor-discovery-inspection</b> statement at the [edit <b>ethernet-switching-options secure-access-port</b> vlan (all   <i>vlan-name</i>)] hierarchy level, you must also enable DHCPv6 snooping for the specified VLAN or VLANs.</p> |
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Port Security Features on page 287</a></li> <li>• <a href="#">Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626</a></li> <li>• <a href="#">Enabling IPv6 Neighbor Discovery Inspection on page 321</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                             |

## next-hop-group (Unknown Unicast Forwarding)

---

**Syntax**    `next-hop-group group-name {  
                  group-type {  
                    layer-2;  
                  }  
                  interface interface-name {  
                    next-hop address;  
                  }  
                  next-hop-subgroup subgroup-name {  
                    interface interface-name;  
                  }  
                  }  
                  }`

**Hierarchy Level**    [edit [forwarding-options](#)]

**Release Information**    Statement introduced in Junos OS Release 14.2 for EX Series switches.

**Description**    Configure a next-hop group to forward unknown unicast packets to a specific interface or interfaces.

**Options**    *group-name*—Name of the next-hop group.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                  interface-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 641](#)
- [Configuring Mirroring on EX9200 Switches to Analyze Traffic \(CLI Procedure\)](#)

---

## no-allowed-mac-log

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-allowed-mac-log;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options secure-access-port interface</a> (all   <i>interface-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.3 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Specify that the switch does not log messages when it receives packets from invalid MAC addresses on an interface that has been configured for particular (allowed) MAC addresses.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Default</b>                  | The switch logs messages when it receives packets from invalid MAC addresses on an interface that has been configured for particular (allowed) MAC addresses.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system—control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">allowed-mac on page 669</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li>• <a href="#">Example: Configuring Allowed MAC Addresses to Protect the Switch from DHCP Snooping Database Alteration Attacks on page 462</a></li><li>• <a href="#">Example: Configuring MAC Limiting to Protect the Switch from DHCP Starvation Attacks on page 452</a></li><li>• <a href="#">Configuring MAC Limiting (CLI Procedure) on page 346</a></li></ul> |

## no-broadcast

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-broadcast;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"><li>For platforms with Enhanced Layer 2 Software (ELS) (EX Series switches and MX Series routers):<br/><br/>[edit forwarding-options <b>storm-control-profiles</b> <i>profile-name</i> all]</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.1 for EX Series switches.</p> <p>Hierarchy level <b>[edit forwarding-options]</b> introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1 for MX Series routers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Disable storm control for broadcast traffic for the specified interface or for all interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Default</b>                  | <ul style="list-style-type: none"><li>On EX2200, EX3200, EX3300, and EX4200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams. You can selectively disable storm control on broadcast, multicast, or unknown-unicast traffic.</li><li>On EX4300 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams. You can selectively disable storm control on any type of traffic.</li><li>On EX4500 and EX8200 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams. On EX8200 switches, you can selectively disable storm control on registered multicast traffic, on unregistered multicast traffic, or on both types of multicast traffic.</li><li>On EX6200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams. You can selectively disable storm control for each type of traffic individually.</li><li>On EX9200 switches—Storm control is not enabled by default.</li><li>On MX Series routers—Storm control is not enabled by default.</li></ul> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607](#)
- [Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602](#)
- [Disabling or Enabling Storm Control \(CLI Procedure\) on page 599](#)
- [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)

## no-dhcp-snooping

|                                                |                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                  | no-dhcp-snooping;                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level (EX Series, QFX Series)</b> | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b> ]                                                                                                                                                                                                                                               |
| <b>Hierarchy Level (MX Series)</b>             | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security</b> ]                                                                                                                                                                                                                             |
| <b>Release Information</b>                     | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 13.2 for the QFX series.<br>Hierarchy level [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security</b> ] introduced in Junos OS Release 14.1 for the MX Series. |
| <b>Description</b>                             | Disable DHCP snooping for the specified VLAN or bridge domain.                                                                                                                                                                                                                                                       |



**NOTE:** Explicitly disabling DHCP snooping also disables any other port security features that you have enabled under [edit vlans *vlan-name* forwarding-options **dhcp-security**], including dynamic ARP inspection (DAI) and IP source guard for the specified VLAN or bridge domain.

There is no configuration statement that explicitly enables DHCP snooping.

**Default** DHCP snooping is not enabled.



**NOTE:** Junos OS for EX Series switches with support for the Enhanced Layer 2 Software (ELS) configuration style and MX Series routers do not have a configuration statement that explicitly enables DHCP snooping.

DHCP snooping is enabled automatically by Junos OS if any of the following is configured at the [edit vlans *vlan-name* forwarding-options **dhcp-security**] hierarchy level for EX Series and QFX Series switches or at the [edit bridge-domains *bridge-domain-name* forwarding-options **dhcp-security**] for MX Series routers:

- DAI
- IP source guard
- Static IP
- DHCP option 82

|                                 |                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |

## no-dhcp-trusted

|                                 |                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (dhcp-trusted   no-dhcp-trusted);                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options</a> secure-access-port <a href="#">interface (Access Port Security)</a> (all   <i>interface-name</i> )]                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Port security features, such as DHCP snooping and dynamic ARP inspection inspect packets only on untrusted interfaces.</p> <p>Allow or deny DHCP responses from the specified interfaces (ports) or all interfaces.</p> <ul style="list-style-type: none"> <li>• <b>dhcp-trusted</b>—Allow DHCP responses.</li> <li>• <b>no-dhcp-trusted</b>—Deny DHCP responses.</li> </ul> |
| <b>Default</b>                  | Trusted for trunk ports, untrusted for access ports.                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Access Port Protection on page 270</a></li> <li>• <a href="#">Enabling a Trusted Port for DHCP on page 456</a></li> </ul>                                                                                                                                                                                      |

## no-dhcpv6-options

---

|                                 |                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-dhcpv6-options;                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security group group-name overrides</a> ]                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                         |
| <b>Description</b>              | Configure a specific group of one or more access interfaces within the VLAN not to add any DHCPv6 options, even if the VLAN is configured to perform DHCPv6 snooping. DHCPv6 options include option 16, option 18, and option 37.                                                                    |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">dhcpv6-options on page 724</a></li><li>• <a href="#">Understanding DHCP Snooping for Port Security on page 516</a></li><li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li></ul> |

## no-dhcpv6-snooping

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-dhcpv6-snooping;                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security</a> ]                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X51-D20 for EX Series switches.                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Disable DHCPv6 snooping for the specified VLAN.                                                                                                                                                                                                                                                                                                                                                         |
| <b>Default</b>                  | DHCPv6 snooping is not enabled by default.<br><br>There is no configuration statement that explicitly enables DHCPv6 snooping. DHCPv6 snooping is enabled automatically by Junos OS if any port security feature, such as IPv6 neighbor discovery inspection or IPv6 source guard, is configured at the <a href="#">[edit vlans <i>vlan-name</i> forwarding-options dhcp-security]</a> hierarchy level. |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li></ul>                                                                                                                                                                                                                                  |



## no-encryption (MACsec)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-encryption;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Disables MACsec encryption for a connectivity association that is configured to enable MACsec using static connectivity association key (CAK) or dynamic security mode.</p> <p>You can enable MACsec without enabling encryption. If a connectivity association that has not enabled MACsec encryption is associated with an interface, traffic is forwarded across the Ethernet link in clear text. You are, therefore, able to view this unencrypted traffic when you are monitoring the link. The MACsec header is still applied to the packet, however, and all MACsec data integrity checks are run on both ends of the link to ensure the traffic does not represent a security threat.</p> <p>This command is used to disable encryption when MACsec is configured using static CAK or dynamic security mode only. When MACsec is configuring using static secure association key (SAK) security mode, the encryption setting is managed in the secure channel using the <b>encryption</b> configuration statement.</p> |
| <b>Default</b>                  | MACsec encryption is enabled if MACsec is enabled using static CAK or dynamic security mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## no-encryption (MACsec for MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-encryption;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Disables MACsec encryption for a connectivity association that is configured to enable MACsec using static connectivity association key (CAK) or dynamic security mode.</p> <p>You can enable MACsec without enabling encryption. If a connectivity association that has not enabled MACsec encryption is associated with an interface, traffic is forwarded across the Ethernet link in clear text. You are, therefore, able to view this unencrypted traffic when you are monitoring the link. The MACsec header is still applied to the packet, however, and all MACsec data integrity checks are run on both ends of the link to ensure the traffic does not represent a security threat.</p> <p>This command is used to disable encryption when MACsec is configured using static CAK or dynamic security mode only. When MACsec is configuring using static secure association key (SAK) security mode, the encryption setting is managed in the secure channel using the <b>encryption</b> configuration statement.</p> |
| <b>Default</b>                  | MACsec encryption is enabled if MACsec is enabled using static CAK or dynamic security mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## no-examine-dhcpv6

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-examine-dhcpv6 {<br><a href="#">forwarding-class class-name</a> ;<br>}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Disable DHCPv6 snooping on all VLANs or on the specified VLAN.<br><br>The remaining statement is explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">examine-dhcpv6 on page 756</a></li> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li> <li>• <a href="#">Example: Configuring DHCP Snooping, DAI , and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465</a></li> <li>• <a href="#">Example: Configuring DHCP Snooping and DAI to Protect the Switch from ARP Spoofing Attacks on page 456</a></li> <li>• <a href="#">Example: Using CoS Forwarding Classes to Prioritize Snooped Packets in Heavy Network Traffic on page 473</a></li> <li>• <a href="#">Enabling DHCP Snooping (CLI Procedure) on page 504</a></li> <li>• <a href="#">Enabling DHCP Snooping (J-Web Procedure)</a></li> </ul> |

## no-fcoe-trusted

**Syntax** no-fcoe-trusted;

**Hierarchy Level** Original CLI

[edit ethernet-switching-options secure-access-port interface *interface-name*]

ELS CLI for Platforms that Support FCoE

[edit vlans *vlan-name* forwarding-options fip-security interface *interface-name*]



**NOTE:** The **no-fcoe-trusted** configuration statement is in a different hierarchy on the original CLI than on the Enhanced Layer 2 Software (ELS) CLI.

**Release Information** Statement introduced in Junos OS Release 10.4 for EX Series switches.  
Statement introduced in Junos OS Release 11.1 for the QFX Series.  
Statement introduced for the ELS CLI in Junos OS Release 13.2 for the QFX Series.

**Description** Configure the specified 10-Gigabit Ethernet interface not to trust Fibre Channel over Ethernet (FCoE) traffic. If an interface is directly connected to an FCoE device, the interface should not be configured as an FCoE trusted interface. If an interface that you want to connect to an FCoE device has been configured as an FCoE trusted interface, use the **no-fcoe-trusted** statement to convert the interface to an untrusted interface. Untrusted interfaces can perform FIP snooping to provide access security for FCoE traffic.


However, if an interface is connected to another switch such as an FCoE forwarder (FCF) or a transit switch, you can configure the interface as trusted so that the interface forwards FCoE traffic from the switch to the FCoE devices without installing FIP snooping filters.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- *show fip snooping*
- *Example: Configuring an FCoE Transit Switch*
- *Configuring VN2VF\_Port FIP Snooping and FCoE Trusted Interfaces on an FCoE Transit Switch*
- *Configuring VN2VF\_Port FIP Snooping and FCoE Trusted Interfaces on an FCoE Transit Switch*

## no-flow-logging (DDoS Flow Detection)

|                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                         | no-flow-logging;                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                | [edit system ddos-protection protocols <i>protocol-group packet-type</i> ]                                                                                                                                                               |
| <b>Release Information</b>                                                                                                                                                                                                                                                                            | Statement introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                  |
| <b>Description</b>                                                                                                                                                                                                                                                                                    | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Disable automatic logging of flow detection culprit flow events (flow reports) for the packet type.                                           |
| <div>  <p><b>NOTE:</b> You can disable logging of suspicious flow events (violation reports) with the <code>disable-logging</code> statement at the [edit system ddos-protection global hierarchy level].</p> </div> |                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                       | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                          |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                          | <ul style="list-style-type: none"> <li>• <a href="#">Disabling Automatic Logging of Culprit Flow Events for a Packet Type on page 88</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul> |

## no-gratuitous-arp-request

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-gratuitous-arp-request;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit interfaces <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Configure the switch not to respond to gratuitous ARP requests. You can disable responses to gratuitous ARP requests on Layer 2 Ethernet switching interfaces, and integrated routing and bridging (IRB) interfaces or routed VLAN interfaces (RVIs). (On EX Series switches that use Junos OS with support for the Enhanced Layer 2 Software (ELS) configuration style, the feature is known as an IRB interface. On EX Series switches that use Junos OS that does not support ELS, the feature is known as an RVI.) |
| <b>Default</b>                  | Gratuitous ARP responses are enabled on all Ethernet switching interfaces, and IRB interfaces or RVIs.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Example: Configuring Proxy ARP on an EX Series Switch</i></li><li>• <i>Configuring Proxy ARP on Switches (CLI Procedure)</i></li><li>• <i>Configuring Proxy ARP on Devices with ELS Support (CLI Procedure)</i></li></ul>                                                                                                                                                                                                                                                   |

---

## no-gratuitous-arp-request

---

|                                 |                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-gratuitous-arp-request;                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit interfaces <i>interface-name</i> ],<br>[edit interfaces interface-range <i>interface-name</i> ]                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                     |
| <b>Description</b>              | Configure the switch not to respond to gratuitous ARP requests. You can disable responses to gratuitous ARP requests on both Layer 2 Ethernet switching interfaces and routed VLAN interfaces (RVIs). |
| <b>Default</b>                  | Gratuitous ARP responses are enabled on all Ethernet switching interfaces and RVIs.                                                                                                                   |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring IRB Interfaces on Switches</i></li></ul>                                                                                                       |

## no-multicast

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"><li>For platforms with Enhanced Layer 2 Software (ELS) (EX Series switches and MX Series routers):<br/>[edit forwarding-options <b>storm-control-profiles</b> <i>profile-name</i> all]</li><li>For platforms without ELS:<br/>[edit <b>ethernet-switching-options storm-control interface</b> (all   <i>interface-name</i>)]</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 10.3 for EX Series switches.</p> <p>Hierarchy level [edit forwarding-options] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1 for MX Series routers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Disable storm control for all multicast traffic (both registered multicast and unregistered multicast) for the specified interface or for all interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Default</b>                  | <ul style="list-style-type: none"><li>On EX2200, EX3200, EX3300, and EX4200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams.</li><li>On EX4300 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams. You can selectively disable storm control on any type of traffic.</li><li>On EX4500 and EX8200 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams. On EX8200 switches, you can selectively disable storm control on registered multicast traffic, on unregistered multicast traffic, or on both types of multicast traffic.</li><li>On EX6200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams. You can selectively disable storm control for each type of traffic individually.</li><li>On EX9200 switches—Storm control is not enabled by default.</li><li>On MX Series routers—Storm control is not enabled by default.</li></ul> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



- Related Documentation**
- [no-registered-multicast on page 882](#)
  - [no-unregistered-multicast on page 885](#)
  - [Disabling or Enabling Storm Control \(CLI Procedure\) on page 599](#)
  - [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)

## no-option16

|                                 |                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-option16;                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security group group-name overrides</a> ]                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                        |
| <b>Description</b>              | Configure a specific group of one or more access interfaces within the VLAN not to transmit DHCPv6 option 16 information, even if the VLAN is configured to perform DHCPv6 snooping. Option 16 information that has already been added by a DHCPv6 client will be forwarded as is.                  |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">option-16 on page 889</a></li> <li>• <a href="#">Understanding DHCP Snooping for Port Security on page 516</a></li> <li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li> </ul> |

## no-option18

---

|                                 |                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-option18;                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security group group-name overrides</a> ]                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                    |
| <b>Description</b>              | Configure a specific group of one or more access interfaces within the VLAN <i>not</i> to transmit DHCP option 18 information, even if the VLAN is configured to perform DHCPv6 snooping.                                                                                                       |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">option-18 on page 890</a></li><li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li><li>• <a href="#">Understanding DHCP Snooping for Port Security on page 516</a></li></ul> |

## no-option37

---

|                                 |                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-option37;                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security group group-name overrides</a> ]                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X51-D20 for EX Series switches.                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Configure a specific group of one or more access interfaces within the VLAN <i>not</i> to transmit DHCP option 37 information, even if the VLAN is configured to perform DHCPv6 snooping.                                                                                                                                                  |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">option-37 on page 892</a></li><li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li><li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li></ul> |

## no-option82

|                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                  | no-option82;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level (EX Series, QFX Series)</b> | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security group group-name overrides</a> ]                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level (MX Series)</b>             | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <a href="#">group group group-name overrides</a> ]                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>                     | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 13.2 for the QFX series.<br>Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                             |
| <b>Description</b>                             | Configure a specific group of one or more access interfaces within the VLAN or bridge domain <i>not</i> to transmit DHCP option 82 information, even if the VLAN or bridge domain is configured to use option 82.                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b>                | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>                   | <ul style="list-style-type: none"> <li>• <a href="#">option-82 on page 894</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 313</a></li> <li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |

## no-registered-multicast

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-registered-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"><li>For platforms with Enhanced Layer 2 Software (ELS) (EX Series switches and MX Series routers):<br/>[edit forwarding-options <b>storm-control-profiles</b> <i>profile-name</i> all]</li><li>For platforms without ELS:<br/>[edit <b>ethernet-switching-options storm-control interface</b> (all   <i>interface-name</i>)]</li></ul>                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 10.3 for EX Series switches.</p> <p>Hierarchy level [edit <b>forwarding-options</b>] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX series.</p> <p>Statement introduced in Junos OS Release 14.1 for MX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> |
| <b>Description</b>              | <p>(EX8200 switches only) Disable storm control for registered multicast traffic for the specified interface or for all interfaces.</p> <p>(EX4300 and EX9200 switches only) Exclude storm control for registered multicast traffic from a storm control profile.</p> <p>(MX Series routers only) Exclude storm control for registered multicast traffic from a storm control profile.</p>                                                                                                            |
| <b>Default</b>                  | <p>EX4300 and EX8200 switches—Storm control is enabled for unknown unicast traffic, multicast traffic, and broadcast traffic. The default storm control level is 80 percent of the available bandwidth used by the combined applicable traffic streams.</p> <p>EX9200 switches—Storm control is not enabled by default.</p> <p>MX Series routers—Storm control is not enabled by default.</p>                                                                                                         |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">no-multicast on page 878</a></li><li><a href="#">no-unregistered-multicast on page 885</a></li><li><a href="#">Understanding Storm Control on EX Series Switches on page 597</a></li><li><a href="#">Understanding Storm Control for Managing Traffic Levels on page 585</a></li></ul>                                                                                                                                                              |

## no-unknown-unicast

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | no-unknown-unicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | <ul style="list-style-type: none"> <li>For platforms with Enhanced Layer 2 Software (ELS) (EX Series switches and MX Series routers):<br/>[edit forwarding-options <b>storm-control-profiles</b> <i>profile-name</i> all]</li> <li>For platforms without ELS:<br/>[edit <b>ethernet-switching-options storm-control interface</b> (all   <i>interface-name</i>)]</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 9.1 for EX Series switches.</p> <p>Hierarchy level [edit forwarding-options] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1 for MX Series routers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>         | Disable storm control for unknown unicast traffic for the specified interface or for all interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Default</b>             | <ul style="list-style-type: none"> <li>On EX2200, EX3200, EX3300, and EX4200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams. You can selectively disable storm control on broadcast, multicast, or unknown-unicast traffic.</li> <li>On EX4300 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams. You can selectively disable storm control on any type of traffic.</li> <li>On EX4500 and EX8200 switches—The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined broadcast, multicast, and unknown unicast traffic streams. On EX8200 switches, you can selectively disable storm control on registered multicast traffic, on unregistered multicast traffic, or on both types of multicast traffic.</li> <li>On EX6200 switches—Storm control does not apply to multicast traffic by default. The factory default configuration enables storm control on all interfaces at 80 percent of the available bandwidth used by the combined unknown unicast and broadcast traffic streams. You can selectively disable storm control for each type of traffic individually.</li> <li>On EX9200 switches—Storm control is not enabled by default.</li> <li>MX Series routers—Storm control is not enabled by default.</li> </ul> |

**Required Privilege Level**    system—To view this statement in the configuration.  
                                         system-control—To add this statement to the configuration.

- Related Documentation**
- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587](#)
  - [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607](#)
  - [Example: Configuring Storm Control to Prevent Network Outages on MX Series Routers on page 602](#)
  - [Disabling or Enabling Storm Control \(CLI Procedure\) on page 599](#)
  - [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)

## no-unregistered-multicast

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-unregistered-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"> <li>For platforms with Enhanced Layer 2 Software (ELS) (EX Series switches and MX Series routers):<br/>[edit forwarding-options <b>storm-control-profiles</b> <i>profile-name</i> all]</li> <li>For platforms without ELS:<br/>[edit <b>ethernet-switching-options storm-control interface</b> (all   <i>interface-name</i>)]</li> </ul>                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 10.3 for EX Series switches.</p> <p>Hierarchy level [edit forwarding-options] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX series.</p> <p>Statement introduced in Junos OS Release 14.1 for MX Series routers.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> |
| <b>Description</b>              | <p>(EX8200 switches only) Disable storm control for unregistered multicast traffic for the specified interface or for all interfaces.</p> <p>(EX4300 and EX9200 switches only) Exclude storm control for unregistered multicast traffic from a storm control profile.</p> <p>(MX Series routers) Exclude storm control for unregistered multicast traffic from a storm control profile.</p>                                                                                                    |
| <b>Default</b>                  | <p>EX4300 and EX8200 switches—Storm control is enabled for unknown unicast traffic, multicast traffic, and broadcast traffic. The default storm control level is 80 percent of the available bandwidth used by the combined applicable traffic streams.</p> <p>EX9200 switches—Storm control is not enabled by default.</p> <p>MX Series routers—Storm control is not enabled by default.</p>                                                                                                  |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">no-multicast on page 878</a></li> <li><a href="#">no-registered-multicast on page 882</a></li> <li><a href="#">Understanding Storm Control on EX Series Switches on page 597</a></li> <li><a href="#">Understanding Storm Control for Managing Traffic Levels on page 585</a></li> </ul>                                                                                                                                                    |

## offset

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | offset (0  30   50);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>     | [edit security <b>macsec connectivity-association</b> <i>connectivity-association-name</i> ]<br>[edit security <b>macsec connectivity-association</b> <i>connectivity-association-name</i> <b>secure-channel</b> <i>secure-channel-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b> | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.<br>Statement introduced in Junos OS Release 14.1X53-D15 for QFX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>         | <p>Configure a confidentiality offset for MACsec. When MACsec is enabled with encryption, the confidentiality offset specifies a number of octets in an Ethernet frame that are sent in unencrypted plain-text.</p> <p>Per 802.1AE-2006, confidentiality offset is relevant for switch-to-host connections by allowing a system that is incapable of terminating the secure association before distributing the load to perform load balancing across multiple processors based on the first few bytes of packets. Additionally, confidentiality offset can be used to expose IPv4 or IPv6 headers to bump-in-the-wire devices, such as transparent firewalls or monitoring devices.</p> <p>Setting the offset to 30 allows a feature to see the IPv4 header and the TCP/UDP header while encrypting the remaining traffic. Setting the offset to 50 allows a feature to see the IPv6 header and the TCP/UDP header while encrypting the remaining traffic.</p> <p>You would typically forward traffic with the first 30 or 50 octets unencrypted if a feature needed to see the data in the octets to perform a function, but you otherwise prefer to encrypt the remaining data in the frames traversing the link. Load balancing features, in particular, typically need to see the IP and TCP/UDP headers in the first 30 or 50 octets to properly load balance traffic.</p> <p>You configure the <b>offset</b> in the [edit security <b>macsec connectivity-association</b> <i>connectivity-association-name</i>] hierarchy when you are enabling MACsec using static connectivity association key (CAK) or dynamic security mode.</p> <p>You configure the <b>offset</b> in the [edit security <b>macsec connectivity-association</b> <i>connectivity-association-name</i> <b>secure-channel</b> <i>secure-channel-name</i>] hierarchy when you are enabling MACsec using static secure association key (SAK) security mode.</p> |
| <b>Default</b>             | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>             | <p><b>0</b>—Specifies that no octets are unencrypted. When you set the offset to 0, all traffic on the interface where the connectivity association or secure channel is applied is encrypted.</p> <p><b>30</b>—Specifies that the first 30 octets of each Ethernet frame are unencrypted.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |





**NOTE:** In IPv4 traffic, setting the offset to 30 allows a feature to see the IPv4 header and the TCP/UDP header while encrypting the rest of the traffic. An offset of 30, therefore, is typically used when a feature needs this information to perform a task on IPv4 traffic.

**50**—Specified that the first 50 octets of each Ethernet frame are unencrypted.



**NOTE:** In IPv6 traffic, setting the offset to 50 allows a feature to see the IPv6 header and the TCP/UDP header while encrypting the rest of the traffic. An offset of 50, therefore, is typically used when a feature needs this information to perform a task on IPv6 traffic.

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| <b>Required Privilege</b> | admin—To view this statement in the configuration.        |
| <b>Level</b>              | admin-control—To add this statement to the configuration. |

|                              |                                                                                                                                    |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul> |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|

## offset (MX Series)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | offset (0  30   50);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>     | [edit security macsec connectivity-association <i>connectivity-association-name</i> ]<br>[edit security macsec connectivity-association <i>connectivity-association-name</i> secure-channel <i>secure-channel-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b> | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>         | <p>Specifies the number of octets in an Ethernet frame that are sent in unencrypted plain-text when encryption is enabled for MACsec.</p> <p>Setting the offset to 30 allows a feature to see the IPv4 header and the TCP/UDP header while encrypting the remaining traffic. Setting the offset to 50 allows a feature to see the IPv6 header and the TCP/UDP header while encrypting the remaining traffic.</p> <p>You would typically forward traffic with the first 30 or 50 octets unencrypted if a feature needed to see the data in the octets to perform a function, but you otherwise prefer to encrypt the remaining data in the frames traversing the link. Load balancing features, in particular, typically need to see the IP and TCP/UDP headers in the first 30 or 50 octets to properly load balance traffic.</p> <p>You configure the <b>offset</b> in the [edit security macsec connectivity-association <i>connectivity-association-name</i>] hierarchy when you are enabling MACsec using static connectivity association key (CAK) or dynamic security mode.</p> <p>You configure the <b>offset</b> in the [edit security macsec connectivity-association <i>connectivity-association-name</i> secure-channel <i>secure-channel-name</i>] hierarchy when you are enabling MACsec using static secure association key (SAK) security mode.</p> |
| <b>Default</b>             | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>             | <p><b>0</b>—Specifies that no octets are unencrypted. When you set the offset to 0, all traffic on the interface where the connectivity association or secure channel is applied is encrypted.</p> <p><b>30</b>—Specifies that the first 30 octets of each Ethernet frame are unencrypted.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |



**NOTE:** In IPv4 traffic, setting the offset to 30 allows a feature to see the IPv4 header and the TCP/UDP header while encrypting the rest of the traffic. An offset of 30, therefore, is typically used when a feature needs this information to perform a task on IPv4 traffic.

**50**—Specified that the first 50 octets of each Ethernet frame are unencrypted.



**NOTE:** In IPv6 traffic, setting the offset to 50 allows a feature to see the IPv6 header and the TCP/UDP header while encrypting the rest of the traffic. An offset of 50, therefore, is typically used when a feature needs this information to perform a task on IPv6 traffic.

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Media Access Control Security \(MACsec\) on MX Series Routers](#)

## option-16 (DHCPv6 Snooping)

**Syntax**

```
option-16 {
 use-string string;
}
```

**Hierarchy Level** [edit vlans *vlan-name* forwarding-options **dhcp-security** **dhcpv6-options**]

**Release Information** Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Configure the DHCPv6 Vendor ID option (option 16) to be included in DHCPv6 requests from clients before forwarding them to a DHCPv6 server. Option 16 provides the server with information about the vendor that manufactured the hardware on which the DHCP client is running. When configured, the switch will overwrite any existing option 16 information sent by clients in the DHCPv6 packets.

Option 16 is the DHCPv6 equivalent of the **vendor-id** sub-option of DHCP option 82.

**Options** **use-string *string***—Define a custom string to be used as the DHCPv6 vendor identifier.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

**Related Documentation**

- [Enabling Dynamic ARP Inspection \(CLI Procedure\) on page 638](#)
- [Configuring IP Source Guard \(CLI Procedure\) on page 544](#)
- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)
- [Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports \(CLI Procedure\) on page 316](#)

## option-18 (DHCPv6 Snooping)

**Syntax**

```
option-18 {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 vlan-id;
 vlan-name;
 }
 use-interface-index (device | logical);
 use-interface-description (device | logical);
 use-interface-mac;
 use-interface-name (device | logical);
 use-string string;
}
```

**Hierarchy Level** [edit vlans *vlan-name* forwarding-options **dhcp-security dhcpv6-options**]

**Release Information** Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Configure the DHCPv6 Relay Agent Interface ID option (option 18) to insert information in DHCPv6 requests from clients before forwarding them to a DHCPv6 server. Option 18 provides information about the port on which the request was received, which the server can use to assign IP addresses, prefixes, and other configuration parameters for the client.

When option 18 is configured, a unique interface ID is inserted into the DHCPv6 packet headers. Suboptions can be configured to include a prefix with the interface ID or to change the type of information used to identify the interface. The default fields included in option 18 are the Juniper Enterprise ID, VLAN, and MAC address of the interface.

Option 18 is the DHCPv6 equivalent of the **circuit-id** sub-option of DHCP option 82.



**NOTE:** DHCPv6 packets that already contain option 18 information when received from a client are dropped by the switch.

**Options** **use-interface-mac**—Use the MAC address of the interface in the DHCPv6 interface ID.

**use-string *string***—Use a custom string in the DHCPv6 interface ID.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

- Related Documentation
- [no-option18 on page 880](#)
  - [no-dhcpv6-options on page 870](#)

## option-37 (DHCPv6 Snooping)

**Syntax**

```
option-37 {
 prefix {
 host-name;
 logical-system-name;
 routing-instance-name;
 vlan-id;
 vlan-name;
 }
 use-interface-index (device | logical);
 use-interface-description (device | logical);
 use-interface-mac;
 use-interface-name (device | logical);
 use-string string;
}
```

**Hierarchy Level** [edit vlans *vlan-name* forwarding-options **dhcp-security dhcpv6-options**]

**Release Information** Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Configure the DHCPv6 Relay Agent Remote ID option (option 37) to insert information in DHCPv6 requests from clients before forwarding them to a DHCPv6 server. Option 37 provides information about the remote host, which the server can use to assign IP addresses, prefixes, and other configuration parameters for the client.

When option 37 is configured, a unique remote ID is inserted into the DHCPv6 packet headers. Suboptions can be configured to include a prefix with the remote ID or to change the interface portion of the ID. The default fields included in option 37 are the Juniper Enterprise ID, VLAN, and MAC address of the interface.

Option 37 is the DHCPv6 equivalent of the **remote-id** sub-option of DHCP option 82.



**NOTE:** DHCPv6 packets that already contain option 37 information when received from a client are dropped by the switch.

**Options** **use-interface-mac**—Use the MAC address of the interface in the DHCPv6 remote ID.

**use-string *string***—Use a custom string in the DHCPv6 remote ID.

The remaining statements are explained separately.

**Required Privilege Level** interface—To view this statement in the configuration.  
interface-control—To add this statement to the configuration.

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">no-option37 on page 880</a></li> <li>• <a href="#">no-dhcpv6-options on page 870</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 313</a></li> <li>• <a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure) on page 316</a></li> </ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## no-option-37

---

|                                 |                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-option-37;                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit ethernet-switching-options <a href="#">secure-access-port</a> vlan <i>vlan-name</i> ]                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Configure the VLAN <i>not</i> to transmit DHCP option 37 information, even if the VLAN is configured to perform DHCPv6 snooping.                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">option-82 on page 894</a></li> <li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |

## option-82

```
Syntax option-82 {
 circuit-id {
 prefix (host-name | routing-instance-name);
 use-interface-description;
 use-vlan-id;
 }
 remote-id {
 host-name;
 mac (Option 82);
 use-interface-description;
 use-string string;
 }
 vendor-id {
 use-string string;
 }
 }
```

**Hierarchy Level (EX Series, QFX Series)** [edit vlans *vlan-name* forwarding-options **dhcp-security**]

**Hierarchy Level (MX Series)** [edit bridge-domains *bridge-domain-name* forwarding-options **dhcp-security**]

**Release Information** Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.  
Statement introduced in Junos OS Release 13.2 for the QFX Series.  
Statement introduced in Junos OS Release 14.1 for the MX Series.

**Description** Have the device insert DHCP option 82 (also known as the DHCP relay agent information option) information in the DHCP request packet header of a DHCP request that it receives from a DHCP client connected to one of its interfaces before it forwards or relays that DHCP request to a DHCP server. The server uses the option 82 information, which provides details about the circuit and host the request came from. However, in formulating the reply, the server does not make any changes to the option 82 information in the packet header. The device receives the reply and then removes the DHCP option 82 information before forwarding the reply to the client.

The remaining statements are explained separately. See [CLI Explorer](#).

**Default** Insertion of DHCP option 82 information is not enabled.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\) on page 313](#)
- [no-option82 on page 881](#)



- Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524
- Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>

## options (Security)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | options (basic   isis-enhanced);                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> key <i>key</i> ]                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | For IS-IS only, configure the protocol transmission encoding format for encoding the message authentication code in routing protocol packets.<br><br>Because this setting is for IS-IS only, the TCP and the BFD protocol ignore the encoding option configured in the key.                                                                                                                                                                                            |
| <b>Options</b>                  | <b>basic</b> —RFC 5304 based encoding. Junos OS sends and receives RFC 5304-encoded routing protocols packets, and drops 5310-encoded routing protocol packets that are received from other devices.<br><br><b>isis-enhanced</b> —RFC 5310 based encoding. Junos OS sends RFC 5310-encoded routing protocol packets and accepts both RFC 5304-encoded and RFC 5310-encoded routing protocol packets that are received from other devices.<br><br><b>Default:</b> basic |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li> <li>• <i>Understanding Hitless Authentication Key Rollover for IS-IS</i></li> </ul>                                                                                                                                                                                                                                                            |

## overrides (DHCP Security)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>overrides {<br/>  no-dhcpv6-options;<br/>  no-option16;<br/>  no-option18;<br/>  no-option37;<br/>  no-option82;<br/>  trusted;<br/>  untrusted;<br/>}</pre>                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security group</b> <i>group-name</i> ]                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX series.</p> <p>Support for the <b>no-option37</b> option introduced in Junos OS Release 13.2X51-D20 for EX Series switches.</p> <p>Support for the <b>no-dhcpv6-options</b>, <b>no-option16</b> and <b>no-option18</b> options introduced in Junos OS Release 14.2 for EX Series switches.</p> |
| <b>Description</b>              | Modify selected DHCP attributes for a group of interfaces that is configured within a specified VLAN.                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Enabling a Trusted DHCP Server (CLI Procedure) on page 318</a></li><li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li><li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li></ul>                                                                 |

## overrides (DHCP Security for MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | overrides ( <a href="#">trusted</a>   <a href="#">untrusted</a>   <a href="#">no-option82</a> );                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <a href="#">dhcp-security group</a> <i>group-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Modify selected attributes of a specific interface within a group of interfaces configured within a specified bridge domain.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>no-option 82</b>—The interface specified in this group does not support DHCP option 82.</p> <p><b>trusted</b>—The interface specified in this group is trusted. DHCP snooping does not apply to the trusted interface. Likewise, DAI and IP source guard—even if they are enabled for the VLAN or bridge domain—do not apply to the interface that is configured with the <b>overrides</b> and the <b>trusted</b> options. Trunk interfaces are trusted by default. Access interfaces are untrusted by default.</p> <p><b>untrusted</b>— The interface specified in this group is untrusted. Trunk interfaces are trusted by default. Access interfaces are untrusted by default.</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li> <li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                       |

## packet-action

**Syntax** `packet-action action;`

**Hierarchy Level** [edit **bridge-domains** *bridge-domain-name* bridge-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit **bridge-domains** *bridge-domain-name* bridge-options **interface-mac-limit** *limit*],  
 [edit logical-systems *logical-system-name* **bridge-domains** *bridge-domain-name* bridge-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit logical-systems *logical-system-name* **bridge-domains** *bridge-domain-name* bridge-options **interface-mac-limit** *limit*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* **bridge-domains** *bridge-domain-name* bridge-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* **bridge-domains** *bridge-domain-name* bridge-options **interface-mac-limit** *limit*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* switch-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* switch-options **interface-mac-limit** *limit*],  
 [edit logical-systems *logical-system-name* switch-options **interface-mac-limit** *limit*],  
 [edit protocols l2-learning global-mac-limit *limit*],  
 [edit routing-instances *routing-instance-name* **bridge-domains** *bridge-domain-name* bridge-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit routing-instances *routing-instance-name* **bridge-domains** *bridge-domain-name* bridge-options **interface-mac-limit** *limit*],  
 [edit routing-instances *routing-instance-name* protocols evpn interface-mac-limit (VPLS)],  
 [edit routing-instances *routing-instance-name* protocols evpn interface *interface-name* interface-mac-limit (VPLS)],  
 [edit routing-instances *routing-instance-name* protocols evpn mac-table-size *limit*],  
 [edit routing-instances *routing-instance-name* switch-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit routing-instances *routing-instance-name* switch-options **interface-mac-limit** *limit*],  
 [edit switch-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit switch-options **interface-mac-limit** *limit*],  
 [edit switch-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit switch-options **interface-mac-limit** *limit*],  
 [edit switch-options mac-table-size *limit*],  
 [edit switch-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit vlans *vlan-name* switch-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit vlans *vlan-name* switch-options **interface-mac-limit** *limit*],  
 [edit vlans *vlan-name* switch-options mac-table-size *limit*]  
 [edit vlans *vlan-name* switch-options **interface-mac-limit** *limit*],  
 [edit vlans *vlan-name* switch-options interface *interface-name* **interface-mac-limit** *limit*],  
 [edit vlans *vlan-name* switch-options mac-table-size *limit*]

**Release Information** Statement introduced in Junos OS Release 8.4.  
 Support for the **switch-options** statement added in Junos OS Release 9.2.  
 Support for top-level configuration for the **virtual-switch** type of routing instance added in Junos OS Release 9.2. In Junos OS Release 9.1 and earlier, the routing instances hierarchy

supported this statement only for a VPLS instance or a bridge domain configured within a virtual switch.

Support for logical systems added in Junos OS Release 9.6.

[edit switch-options interface *interface-name* interface-mac-limit *limit*], [edit switch-options interface-mac-limit *limit*], [edit switch-options mac-table-size *limit*], [edit vlans *vlan-name* switch-options interface *interface-name* interface-mac-limit *limit*], [edit vlans *vlan-name* switch-options interface-mac-limit *limit*], and [edit vlans *vlan-name* switch-options mac-table-size *limit*] hierarchy levels introduced in Junos OS Release 12.3R2 for EX Series switches.

Support for EVPNs introduced in Junos OS Release 13.2 on MX Series 5G Universal Routing Platforms.

Support at the [edit switch-options interface *interface-name* interface-mac-limit *limit*] hierarchy level and hierarchy levels under [edit vlans *vlan-name*] introduced in Junos OS Release 13.2X50-D10 for EX Series switches and Junos OS Release 13.2 for the QFX Series.

**Description** Specify the action taken when packets with new source MAC addresses are received after the MAC address limit is reached. If this statement is not configured, packets with new source MAC addresses are forwarded by default.



**NOTE:** The `packet-action` statement is not supported on the QFX10002-60C switch.

**Default**



**NOTE:** On a QFX Series Virtual Chassis, if you include the shutdown option at the [edit vlans *vlan-name* switch-options interface *interface-name* interface-mac-limit packet-action] hierarchy level and issue the commit operation, the system generates a commit error. The system does not generate an error if you include the shutdown option at the [edit switch-options interface *interface-name* interface-mac-limit packet-action] hierarchy level.

Disabled. The default is for packets for new source MAC addresses to be forwarded after the MAC address limit is reached.

**Options**    **drop**—Drop packets with new source MAC addresses, and do not learn the new source MAC addresses.



**NOTE:** On QFX10000 switches, if you include the drop option, you cannot configure unicast reverse-path forwarding (URFP) on integrated routing and bridging (IRB) and MAC limiting on the same interface. If you have an MC-LAG configuration, you cannot configure MAC limiting on the interchassis link (ICL) interface.

**drop-and-log**—(EX Series switches and QFX Series only) Drop packets with new source MAC addresses, and generate an alarm, an SNMP trap, or a system log entry.

**log**—(EX Series switches and QFX Series only) Hold packets with new source MAC addresses, and generate an alarm, an SNMP trap, or a system log entry.

**none**—(EX Series switches and QFX Series only) Forward packets with new source MAC addresses, and learn the new source MAC address.

**shutdown**—(EX Series switches and QFX Series only) Disable the specified interface, and generate an alarm, an SNMP trap, or a system log entry.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                         routing-control—To add this statement to the configuration.

- Related Documentation**
- *Configuring EVPN Routing Instances*
  - *Configuring EVPN Routing Instances on EX9200 Switches*
  - [Configuring MAC Limiting \(CLI Procedure\) on page 436](#)
  - [Configuring Persistent MAC Learning \(CLI Procedure\) on page 438](#)
  - *Understanding Layer 2 Learning and Forwarding for Bridge Domains*
  - *Layer 2 Learning and Forwarding for VLANs Overview*
  - *Understanding Layer 2 Learning and Forwarding for Bridge Domains Functioning as Switches with Layer 2 Trunk Ports*
  - *Layer 2 Learning and Forwarding for VLANs Overview*
  - *Layer 2 Learning and Forwarding for VLANs Acting as a Switch for a Layer 2 Trunk Port*

---

## path-length

---

|                                 |                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>path-length <i>certificate-path-length</i>;</code>                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security <a href="#">certificates</a> ]                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Configure the digital certificate path length.                                                                                                                                      |
| <b>Options</b>                  | <b><i>certificate-path-length</i></b> —Digital certificate path length.<br><b>Range:</b> 2 through 15 certificates<br><b>Default:</b> 15 certificates                                                                                                                      |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Path Length for the Certificate Hierarchy on page 16</a></li></ul>                                                                                                                                     |

## perfect-forward-secrecy (Security)

---

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>perfect-forward-secrecy {<br/>    keys (group1   group2);<br/>}</pre>                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit security ipsec <a href="#">policy</a> <i>ipsec-policy-name</i> ]                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                   |
| <b>Description</b>              | Define the Perfect Forward Secrecy (PFS) protocol. Create single-use keys.                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>keys</b>—Type of Diffie-Hellman prime modulus group that IKE uses when performing the new Diffie-Hellman exchange.</p> <p>The key can be one of the following:</p> <ul style="list-style-type: none"><li>• <b>group1</b>—768-bit.</li><li>• <b>group2</b>—1024-bit.</li></ul> |
| <b>Required Privilege Level</b> | <p><b>admin</b>—To view this statement in the configuration.</p> <p><b>admin-control</b>—To add this statement to the configuration.</p>                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Perfect Forward Secrecy on page 216</a></li></ul>                                                                                                                                                                   |



## perfect-forward-secrecy (Services)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>perfect-forward-secrecy {   keys (group1   group2  group5  group14  group15   group16   group24); }</pre>                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit services ipsec-vpn ipsec policy <i>policy-name</i> ]                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p><b>group15</b>, <b>group16</b>, and <b>group24</b> options added in Junos OS Release 17.4R1.</p>                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Define Perfect Forward Secrecy (PFS). Creates single-use keys. This statement is optional.                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>keys</b>—Type of Diffie-Hellman prime modulus group that IKE uses when performing the new Diffie-Hellman exchange. The key can be one of the following:</p> <p><b>group1</b>—768-bit.</p> <p><b>group2</b>—1024-bit.</p> <p><b>group5</b>—1536-bit.</p> <p><b>group14</b>—2048-bit.</p> <p><b>group15</b>—3072-bit.</p> <p><b>group16</b>—4096-bit.</p> <p><b>group24</b>—2048-bit with 256-bit Prime Order Subgroup.</p> |
| <b>Required Privilege Level</b> | <p><b>admin</b>—To view this statement in the configuration.</p> <p><b>admin-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring IPsec Policies</i></li> </ul>                                                                                                                                                                                                                                                                                                                                           |

## persistent-learning

---


|                                 |                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>persistent-learning;</code>                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"><li>For platforms without ELS:<br/>[edit <code>ethernet-switching-options secure-access-port interface</code> (all   <i>interface-name</i>)]</li><li>For platforms with ELS:<br/>[edit switch-options <code>interface interface-name</code>]</li></ul>                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.4 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Hierarchy level [edit switch-options interface interface-name] introduced in Junos OS Release 13.2X50-D10                                                       |
| <b>Description</b>              | Specify that learned MAC addresses persist on the specified interfaces across restarts of the switch and link-down conditions. This feature is also known as sticky MAC.                                                                                                                                      |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li><a href="#">Configuring Persistent MAC Learning (CLI Procedure) on page 353</a></li><li><a href="#">Configuring Persistent MAC Learning (CLI Procedure) on page 438</a></li></ul> |

## persistent-learning

---

|                                 |                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>persistent-learning;</code>                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit switch-options <code>interface interface-name</code> ]                                                                                                                                                          |
| <b>Release Information</b>      | Hierarchy level [edit switch-options interface interface-name] introduced in Junos OS Release 13.2X50-D10                                                                                                             |
| <b>Description</b>              | Specify that learned MAC addresses persist on the specified interfaces across restarts of the switch and link-down conditions. This feature is also known as sticky MAC.                                              |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li><a href="#">Configuring Persistent MAC Learning (CLI Procedure) on page 438</a></li></ul> |

## physical-interface (DDoS Flow Detection)

|                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                      | <code>physical-interface (flow-bandwidth   flow-control-mode   flow-detection-mode)</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                             | [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-bandwidth</i> ],<br>[edit system ddos-protection protocols <i>protocol-group packet-type flow-level-control</i> ],<br>[edit system ddos-protection protocols <i>protocol-group packet-type flow-level-detection</i> ]                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>                                                                                                                                                                                                                                                                         | Statement introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>                                                                                                                                                                                                                                                                                 | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure flow bandwidth, flow control mode, or flow detection mode at the physical interface flow aggregation level for the packet type.                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                                                                                                                                                                                                                                                                                     | <p><b><i>flow-bandwidth</i></b>—Bandwidth for the flow at the physical interface level. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-bandwidth</i>] hierarchy level.</p> <p><b>Default:</b> 20,000 packets per second</p> <p><b>Range:</b> 1 through 50,000 packets per second</p> <p><b><i>flow-control-mode</i></b>—Mode for how traffic in the detected flow is controlled at the physical interface level. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-control</i>] hierarchy level.</p> |
| <div>  <p><b>NOTE:</b> The configuration at this level overrides the global configuration using the <b>flow-level-control</b> statement at the [edit system ddos-protection global] hierarchy level.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <ul style="list-style-type: none"> <li>• <b>drop</b>—Drop all traffic in flow.</li> <li>• <b>keep</b>—Keep all traffic in flow.</li> <li>• <b>police</b>—Police the traffic to within its allowed bandwidth.</li> </ul> <p><b>Default:</b> drop</p>                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <p><b><i>flow-detection-mode</i></b>—Mode for how flow detection operates at the physical interface level when a policer has been violated. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type flow-level-detection</i>] hierarchy level.</p>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



**NOTE:** The configuration at this level overrides the global configuration using the `flow-detection-mode` statement at the `[edit system ddos-protection global]` hierarchy level.

- **automatic**—Search flows at the physical interface level only when a DDoS policer is being violated and only when the policer violation is not discovered at the finer aggregation levels, logical interface or subscriber. Flows at the physical interface level are subsequently not searched again until a subsequent violation occurs that cannot be found at the subscriber or logical interface levels.
- **off**—Disable flow detection at the physical interface level so that flows are never searched at this level.
- **on**—Search flows at the physical interface level, even when no DDoS protection policer is currently being violated. Monitoring continues at this level regardless of whether a suspect flow is identified at this level.

**Default:** `automatic`

|                                 |                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <code>admin</code> —To view this statement in the configuration.<br><code>admin-control</code> —To add this statement to the configuration. |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level on page 85</a></li><li>• <a href="#">Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level on page 87</a></li><li>• <a href="#">Configuring How Flow Detection Operates at Each Flow Aggregation Level on page 84</a></li><li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li></ul> |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## pki

```
Syntax pki {
 auto-re-enrollment {
 certificate-id {
 ca-profile ca-profile-name;
 challenge-password password;
 re-enroll-trigger-time-percentage percentage;
 re-generate-keypair;
 validity-period days;
 }
 }
 ca-profile ca-profile-name {
 ca-identity ca-identity;
 enrollment {
 url url-name;
 retry number-of-enrollment-attempts;
 retry-interval seconds;
 }
 revocation-check {
 disable;
 crl {
 disable on-download-failure;
 refresh-interval hours;
 url {
 url-name;
 password;
 }
 }
 }
 }
 traceoptions {
 file filename <files number> <match regular-expression> <size maximum-file-size>
 <world-readable | no-world-readable>;
 flag flag;
 }
 }
```

**Hierarchy Level** [edit security]

**Release Information** Statement introduced in Junos OS Release 7.5.  
**revocation-check** and **crl** statements added in Junos OS Release 8.1.

**Description** Configure an IPsec profile to request digital certificates for J Series Services Routers and Adaptive Services (AS) and MultiServices PICs installed in M Series and T Series routers.

**Options** The remaining statements are explained separately.

**Required Privilege Level** admin—To view this statement in the configuration.  
 admin-control—To add this statement to the configuration.

- Related Documentation**
- [Configuring Digital Certificates for Adaptive Services Interfaces on page 18](#)
  - [CLI Explorer](#)

## policy

```
Syntax policy policy-name {
 accept {
 match-list {
 match-criteria {
 (match-all | match-any);
 }
 prefix-list-name prefix-list-name;
 source-ip-address-list address-list-name;
 source-mac-address-list address-list-name;
 }
 match-option {
 hop-limit {
 (maximum | minimum) value;
 }
 managed-config-flag;
 other-config-flag;
 router-preference (high | low | medium);
 }
 }
 discard {
 prefix-list-name prefix-list-name;
 source-ip-address-list address-list-name;
 source-mac-address-list address-list-name;
 }
 }
```

**Hierarchy Level** [edit forwarding-options access-security [router-advertisement-guard](#)]  
 [edit forwarding-options access-security [router-advertisement-guard](#) interface *interface-name*]  
 [edit forwarding-options access-security [router-advertisement-guard](#) vlans (*vlan-name* | all)]

**Release Information** Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.  
 Statement introduced in Junos OS Release 16.1 for EX Series switches.

**Description** Configure the policy for an IPv6 Router Advertisement (RA) guard. RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages based on whether they match the conditions defined in the policy.

RA guard compares the information contained in attributes of RA messages to the information contained in the policy. You must configure the policy before you can enable RA guard. You can configure either an accept policy or a discard policy and enable it on an interface or on a VLAN. When RA guard is enabled by using an accept policy, any RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped. When RA guard is enabled by using a discard policy, any RA messages that match the conditions defined in the policy are dropped, and RA messages that do not match the conditions are forwarded.

The remaining statements are explained separately. See [CLI Explorer](#).

|                                 |                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li><li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li></ul> |

---

## policy (Security IKE)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>policy <i>ike-peer-address</i> {<br/>  description <i>policy-description</i>;<br/>  encoding (binary   pem);<br/>  identity <i>identity-name</i>;<br/>  local-certificate <i>certificate-filename</i>;<br/>  local-key-pair <i>private-public-key-file</i>;<br/>  mode (aggressive   main);<br/>  pre-shared-key (ascii-text <i>key</i>   hexadecimal <i>key</i>);<br/>  proposals [ <i>proposal-names</i> ];<br/>}</pre> |
| <b>Hierarchy Level</b>          | [edit security <a href="#">ike</a> ]                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Define an IKE policy.                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><i>ike-peer-address</i>—A tunnel address configured at the [edit interfaces <a href="#">es</a>] hierarchy level.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring an IKE Policy for Preshared Keys on page 210</a></li><li>• <a href="#">Configuring an IKE Policy for Digital Certificates for an ES PIC on page 16</a></li></ul>                                                                                                                                                                                               |




## policy (Security IPsec)

---

|                                 |                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> policy <i>ipsec-policy-name</i> {   description <i>description</i>;     perfect-forward-secrecy {       keys (group1   group 14   group2   group 5);     }   proposals [ <i>proposal-names</i> ]; }</pre> |
| <b>Hierarchy Level</b>          | [edit security <a href="#">ipsec</a> ]                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                               |
| <b>Description</b>              | Define an IPsec policy.                                                                                                                                                                                         |
| <b>Options</b>                  | <p><i>ipsec-policy-name</i>—Specify an IPsec policy name.</p> <p>The remaining statements are explained separately.</p>                                                                                         |
| <b>Required Privilege Level</b> | <p>security—To view this statement in the configuration.</p> <p>security-control—To add this statement to the configuration.</p>                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the IPsec Policy for an ES PIC on page 215</a></li> </ul>                                                                                      |

## port-error-disable

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>port-error-disable {     disable-timeout <i>timeout</i> ; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Hierarchy Level          | [edit <a href="#">ethernet-switching-options</a> ],                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Release Information      | Statement introduced in Junos OS Release 9.6 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description              | <p>Disable rather than block an interface when enforcing MAC limiting, MAC move limiting, and rate-limiting configuration options for shutting down the interface, and allow the interface to recover automatically from the error condition after a specified period of time:</p> <ul style="list-style-type: none"> <li>• If you have enabled MAC limiting with the <b>shutdown</b> option and you enable <b>port-error-disable</b>, the switch disables (rather than shuts down) the interface when the MAC address limit is reached.</li> <li>• If you have enabled MAC move limiting with the <b>shutdown</b> option and you enable <b>port-error-disable</b>, the switch disables (rather than shuts down) the interface when the maximum number of moves to a new interface is reached.</li> <li>• If you have enabled storm control with the <b>action-shutdown</b> option and you enable <b>port-error-disable</b>, the switch disables (rather than shuts down) the interface when applicable traffic exceeds the specified levels. Depending upon the configuration, applicable traffic could include broadcast, unknown unicast, and multicast traffic.</li> </ul> |
|                          | <p> <b>NOTE:</b> The <b>port-error-disable</b> configuration does not apply to pre-existing error conditions. It impacts only error conditions that are detected after <b>port-error-disable</b> has been enabled and committed. To clear a pre-existing error condition and restore the interface to service, use the operational command that appears in your CLI:</p> <ul style="list-style-type: none"> <li>• <a href="#">clear ethernet-switching port-error</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          | <p>The remaining statement is explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Default                  | Not enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Required Privilege Level | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">action-shutdown on page 666</a></li> <li>• <a href="#">Configuring MAC Move Limiting (CLI Procedure) on page 350</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## port-id

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>port-id <i>port-id-number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association</a> <i>connectivity-association-name</i> <a href="#">secure-channel</a> <i>secure-channel-name</i> <b>id</b> ]                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Specify a port ID in a secure channel when enabling MACsec using static secure association key (SAK) security mode. The port IDs must match on a sending and receiving secure channel on each side of a link to enable MACsec.</p> <p>Once the port numbers match, MACsec is enabled for all traffic on the connection.</p> <p>You only use this configuration option when you are configuring MACsec using static SAK security mode. This option does not need to be specified when you are enabling MACsec using static connectivity association key (CAK) security mode.</p> |
| <b>Default</b>                  | No port ID is specified.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <i>port-id-number</i> —The port ID number.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## port-id (MACsec for MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>port-id port-id-number;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> secure-channel <i>secure-channel-name</i> id]                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Specify a port ID in a secure channel when enabling MACsec using static secure association key (SAK) security mode. The port IDs must match on a sending and receiving secure channel on each side of a link to enable MACsec.</p> <p>Once the port numbers match, MACsec is enabled for all traffic on the connection.</p> <p>You only use this configuration option when you are configuring MACsec using static SAK security mode. This option does not need to be specified when you are enabling MACsec using static connectivity association key (CAK) security mode.</p> |
| <b>Default</b>                  | No port ID is specified.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <i>port-id-number</i> —The port ID number.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## prefix (Circuit ID for Option 82)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>prefix {   host-name;   logical-system-name;   routing-instance-name; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>     | <ul style="list-style-type: none"> <li>For platforms with enhanced Layer 2 software (ELS):<br/>[edit vlans forwarding-options <b>dhcp-security option-82 circuit-id</b>]</li> <li>For platforms without ELS:<br/>[edit <b>ethernet-switching-options secure-access-port vlan</b> (all   <i>vlan-name</i>) <b>dhcp-option82 circuit-id</b>],<br/>[edit forwarding-options helpers bootp <b>dhcp-option82 circuit-id</b>],<br/>[edit forwarding-options helpers bootp interface <i>interface-name</i> <b>dhcp-option82 circuit-id</b>]</li> <li>For MX Series platforms:<br/>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security <b>option-82circuit-id</b>]</li> </ul> |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Hierarchy level [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security option-82 circuit-id</b>] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 14.1 for the MX Series.</p>                                                                                                                                                                                                                        |
| <b>Description</b>         | <p>Configure an optional prefix for the circuit ID suboption in the DHCP option 82 information that is inserted by the switch or router into the packet header of a DHCP request before it forwards or relays the request to a DHCP server.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Default</b>             | <p>If the <b>prefix</b> statement is not explicitly specified, no prefix is prepended to the circuit ID.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>             | <p><b>host-name</b>—Add router host name to DHCP option 82 circuit ID.</p> <p><b>logical-system-name</b>—Add logical system name to DHCP option-82 circuit ID.</p> <p>This option is not used for the <b>prefix</b> statement at any of the above hierarchy levels.</p> <p><b>routing-instance-name</b>—Add routing instance name to DHCP option-82 circuit ID.</p> <p>This option is not used for the <b>prefix</b> statement occurring at the following hierarchy levels:</p> <ul style="list-style-type: none"> <li>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security <b>option-82circuit-id</b>]</li> </ul>                                                     |

- Any of the hierarchy levels for the platforms without ELS

|                           |                                                            |
|---------------------------|------------------------------------------------------------|
| <b>Required Privilege</b> | system—To view this statement in the configuration.        |
| <b>Level</b>              | system-control—To add this statement to the configuration. |

- |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 528</a></li><li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 508</a></li><li>• <a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li><li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li></ul> |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## prefix (DHCPv6 Options)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>prefix {     host-name;     logical-system-name;     routing-instance-name;     vlan-id;     vlan-name; }</pre>                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit vlans forwarding-options <a href="#">dhcp-security dhcpv6-options option-18</a> ]<br>[edit vlans forwarding-options <a href="#">dhcp-security dhcpv6-options option-37</a> ]                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Configure a prefix for DHCPv6 option 18 (Interface ID) or option 37 (Remote ID). When configured, the prefix is inserted into DHCPv6 packets during the DHCPv6 snooping process.                                                                                                                                                                                                       |
| <b>Default</b>                  | If the <b>prefix</b> statement is not explicitly specified, no prefix is inserted in DHCPv6 packets.                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b>host-name</b>—Add the host name of the switch to DHCPv6 options.</p> <p><b>logical-system-name</b>—Add the logical system name to the DHCPv6 options.</p> <p><b>routing-instance-name</b>—Add the routing instance name to the DHCPv6 options.</p> <p><b>vlan-id</b>—Add the VLAN ID to the DHCPv6 options.</p> <p><b>vlan-name</b>—Add the VLAN name to the DHCPv6 options.</p> |
| <b>Required Privilege Level</b> | <p><b>system</b>—To view this statement in the configuration.</p> <p><b>system-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">option-37 (DHCPv6 Snooping) on page 892</a></li> <li>• <a href="#">option-18 (DHCPv6 Snooping) on page 890</a></li> </ul>                                                                                                                                                                                                         |

## prefix (Remote ID for Option 82)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | prefix (hostname   mac   none);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit <b>ethernet-switching-options secure-access-port vlan</b> (all   <i>vlan-name</i> ) <b>dhcp-option82 remote-id</b> ]<br>[edit forwarding-options helpers bootp <b>dhcp-option82 remote-id</b> ]<br>[edit forwarding-options helpers bootp interface <i>interface-name</i> <b>dhcp-option82 remote-id</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.3 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Configure an optional prefix for the remote ID suboption in the DHCP option 82 information that is inserted by the switch into the packet header of a DHCP request before it forwards or relays the request to a DHCP server.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Default</b>                  | If <b>prefix</b> is not explicitly specified, no prefix is appended to the remote ID.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <b>hostname</b> —Name of the host system (the switch) that is forwarding or relaying the DHCP request from the DHCP client to the DHCP server.<br><br><b>mac</b> —MAC address of the host system (the switch) that is forwarding or relaying the DHCP request from the DHCP client to the DHCP server.<br><br><b>none</b> —No prefix is applied to the remote ID.                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 528</a></li><li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 508</a></li><li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li></ul> |



## prefix-list-name

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>prefix-list-name <i>prefix-list-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <p>[edit forwarding-options access-security <b>router-advertisement-guard</b> <b>policy</b> <i>policy-name</i> <b>discard</b>]</p> <p>[edit forwarding-options access-security <b>router-advertisement-guard</b> <b>policy</b> <i>policy-name</i> <b>accept</b> <b>match-list</b>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.</p> <p>Statement introduced in Junos OS Release 16.1 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Configure a list of IPv6 address prefixes for an IPv6 Router Advertisement (RA) guard policy. The policy is used to validate the source IPv6 address prefix of an incoming RA message against the IPv6 address prefixes in this list. RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in the policy.</p> <p>You can use a list of IPv6 address prefixes for validating RA messages as part of either an accept policy or a discard policy. Before you can include a list in an RA guard policy, you must configure the list name at the [edit <b>policy-options prefix-list</b>] hierarchy level. When RA guard is enabled by using an accept policy, any RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped. When RA guard is enabled by using a discard policy, any RA messages that match the conditions are dropped, and RA messages that do not match the conditions are forwarded.</p> |
| <b>Options</b>                  | <p><b><i>prefix-list-name</i></b>—Configure a list of IPv6 address prefixes for an RA guard policy. The policy is used to validate the source of an incoming RA message by comparing the IPv6 address prefix of the RA message to the IPv6 address prefixes contained in the list.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li> <li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## pre-shared-key

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>pre-shared-key {<br/>    cak hexadecimal-number;<br/>    ckn hexadecimal-number;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association</a> <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Specifies the pre-shared key used to enable MACsec using static connectivity association key (CAK) security mode.</p> <p>A pre-shared key includes a connectivity association key name (CKN) and a connectivity association key (CAK). A pre-shared key is exchanged between two devices at each end of a point-to-point link to enable MACsec using static CAK security mode. The MACsec Key Agreement (MKA) protocol is enabled after the pre-shared keys are successfully verified and exchanged. The pre-shared key—the CKN and CAK—must match on both ends of a link.</p> |
| <b>Default</b>                  | No pre-shared keys exist, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## pre-shared-key (MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>pre-shared-key {     cak hexadecimal-number;     ckn hexadecimal-number; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | <p>Specifies the pre-shared key used to enable MACsec using static connectivity association key (CAK) security mode.</p> <p>A pre-shared key includes a connectivity association key name (CKN) and a connectivity association key (CAK). A pre-shared key is exchanged between two devices at each end of a point-to-point link to enable MACsec using static CAK security mode. The MACsec Key Agreement (MKA) protocol is enabled after the pre-shared keys are successfully verified and exchanged. The pre-shared key—the CKN and CAK—must match on both ends of a link.</p> |
| <b>Default</b>                  | No pre-shared keys exist, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring Media Access Control Security (MACsec) on MX Series Routers</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## pre-shared-key (Security)

---

|                                 |                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>pre-shared-key (ascii-text <i>key</i>   hexadecimal <i>key</i>);</code>                                                                 |
| <b>Hierarchy Level</b>          | [edit security ike <b>policy</b> <i>ike-peer-address</i> ]                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                             |
| <b>Description</b>              | Configure the key used to authenticate a dynamic peer during IKE phase 1 negotiation. Specify the key in either ASCII or hexadecimal format.  |
| <b>Options</b>                  | <b>ascii-text <i>key</i></b> —Authentication key in ASCII format.<br><b>hexadecimal <i>key</i></b> —Authentication key in hexadecimal format. |
| <b>Required Privilege Level</b> | <b>admin</b> —To view this statement in the configuration.<br><b>admin-control</b> —To add this statement to the configuration.               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Preshared Key for an IKE Policy on page 211</a></li></ul>                 |

## priority (DDoS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority <i>level</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | <ul style="list-style-type: none"> <li>For MX Series routers, T4000 routers, and EX9200 switches:<br/>[edit system ddos-protection <a href="#">protocols</a> <i>protocol-group packet-type</i>]</li> <li>For PTX Series routers and QFX Series switches:<br/>[edit system ddos-protection <a href="#">protocols</a> <i>protocol-group packet-type</i>]</li> </ul>                                                                                                                                |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.</p> <p>Statement introduced in Junos OS Release 17.4R1 on PTX Series routers.</p>                                                                                                                                                                                 |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 routers with only FPC5s, PTX Series routers, EX9200 switches, or QFX Series switches) Configure the priority for the packet type within the parent protocol group. In the event of downstream traffic congestion, high priority packets are provided bandwidth before medium priority packets. In turn, medium priority packets are provided bandwidth before low priority packets. Packets are dropped when there is insufficient available bandwidth. |
| <b>Options</b>                  | <i>level</i> —Priority of the packet type, low, medium, or high.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li> <li><a href="#">Configuring DDoS Protection Policers on QFX Series Switches on page 56</a></li> </ul>                                                                                                                                                                                                                                                    |

## proposal (Security IKE)

---

**Syntax**    `proposal ike-proposal-name {  
                  authentication-algorithm (md5 | sha1 | sha-256);  
                  authentication-method (dsa-signatures | pre-shared-keys | rsa-signatures);  
                  description description;  
                  dh-group (group1 | group2 | group 5 | group14);  
                  encryption-algorithm algorithm;  
                  lifetime-seconds seconds;  
                  }`

**Hierarchy Level**    [edit security [ike](#)]

**Release Information**    Statement introduced before Junos OS Release 7.4.

**Description**    Define an IKE proposal for a dynamic SA.

**Options**    *ike-proposal-name*—Specify an IKE proposal name.  
  
              The remaining statements are explained separately.

**Required Privilege**    security—To view this statement in the configuration.  
**Level**                security-control—To add this statement to the configuration.

**Related**    • [Configuring an IKE Proposal for Dynamic SAs on page 207](#)  
**Documentation**

## proposal (Security IPsec)

|                                 |                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>proposal <i>ipsec-proposal-name</i> {     authentication-algorithm (hmac-md5-96   hmac-sha1-96);     <b>encryption-algorithm</b> <i>algorithm</i>;     lifetime-seconds <i>seconds</i>;     protocol (ah   bundle   esp); }</pre> |
| <b>Hierarchy Level</b>          | [edit security ipsec]                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                      |
| <b>Description</b>              | Define an IPsec proposal for a dynamic SA.                                                                                                                                                                                             |
| <b>Options</b>                  | <p><i>ipsec-proposal-name</i>—Specify an IPsec proposal name.</p> <p>The remaining statements are explained separately.</p>                                                                                                            |
| <b>Required Privilege Level</b> | <p>security—To view this statement in the configuration.</p> <p>security-control—To add this statement to the configuration.</p>                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring an IPsec Proposal for an ES PIC on page 213</a></li> </ul>                                                                                                            |

## proposals

|                                 |                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | proposals [ <i>proposal-names</i> ];                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <p>[edit security ike <b>policy</b> <i>ike-peer-address</i>],</p> <p>[edit security ipsec <b>policy</b> <i>ipsec-policy-name</i>]</p>                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                          |
| <b>Description</b>              | Associate one or more proposals with an IKE or IPsec policy.                                                                                                                                               |
| <b>Options</b>                  | <i>proposal-names</i> —Name of one or more proposals.                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Associating Proposals with an IKE Policy on page 212</a></li> <li>• <a href="#">Configuring the IPsec Policy for an ES PIC on page 215</a></li> </ul> |

## protocol (Junos OS)

---

|                            |                                                                                                                                                                                                                |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>protocol (ah   esp   bundle);</code>                                                                                                                                                                     |
| <b>Hierarchy Level</b>     | [edit security ipsec <a href="#">proposal</a> <i>ipsec-proposal-name</i> ],<br>[edit security ipsec security-association <i>sa-name</i> manual <a href="#">direction</a> (inbound   outbound   bidirectional)] |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.                                                                                                                                                              |
| <b>Description</b>         | Define the IPsec protocol for a manual or dynamic SA.                                                                                                                                                          |



**NOTE:** The Junos OS supports only encapsulating security payload (ESP) when you use tunnel mode.

In transport mode, the Junos OS does not support authentication header (AH) and ESP header bundles.

In transport mode, the Junos OS supports only Border Gateway Protocol (BGP).

---

|                                 |                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <b>ah</b> —Authentication Header protocol<br><br><b>bundle</b> —AH and ESP protocols<br><br><b>esp</b> —ESP protocol (the <b>tunnel</b> statement must be included at the [edit security ipsec security-association <i>sa-name</i> mode hierarchy level])                          |
| <b>Required Privilege Level</b> | <b>admin</b> —To view this statement in the configuration.<br><b>admin-control</b> —To add this statement to the configuration.                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Using IPsec to Protect BGP Traffic</a></li><li>• <a href="#">Configuring the Protocol for a Manual SA on page 199</a></li><li>• <a href="#">Configuring the Protocol for a Dynamic IPsec SA on page 215</a></li></ul> |



## protocol (Junos-FIPS Software)

---

|                                 |                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | protocol esp;                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit security ipsec internal security-association manual direction]                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                     |
| <b>Description</b>              | The protocol used for the internal Routing-Engine-to-Routing-Engine IPsec security association (SA) configuration.                                                                                                                                                    |
| <b>Options</b>                  | Only <b>esp</b> is supported.                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | Crypto Officer—To add and view this statement in the configuration.                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring IPsec for Enabling Internal Communications Between Routing Engines for Junos OS in FIPS Mode on page 217</a></li><li>• <i>Secure Configuration Guide for Common Criteria and Junos-FIPS</i></li></ul> |

## protocols (DDoS)

---

**Syntax** `protocols protocol-group (aggregate | packet-type) {  
 bandwidth packets-per-second;  
 burst size;  
 bypass-aggregate;  
 disable-fpc;  
 disable-logging;  
 disable-routing-engine;  
 flow-detection-mode (automatic | off | on);  
 flow-detect-time seconds;  
 flow-level-bandwidth {  
 logical-interface flow-bandwidth;  
 physical-interface flow-bandwidth;  
 subscriber flow-bandwidth;  
 }  
 flow-level-control {  
 logical-interface flow-control-mode;  
 physical-interface flow-control-mode;  
 subscriber flow-control-mode;  
 }  
 flow-level-detection {  
 logical-interface flow-operation-mode;  
 physical-interface flow-operation-mode;  
 subscriber flow-operation-mode;  
 }  
 flow-recover-time seconds;  
 flow-timeout-time seconds;  
 fpc slot-number {  
 bandwidth-scale percentage;  
 burst-scale percentage;  
 disable-fpc;  
 }  
 no-flow-logging  
 priority level;  
 recover-time seconds;  
 timeout-active-flows;  
}`

**Hierarchy Level** [edit system [ddos-protection](#)]

**Release Information** Statement introduced in Junos OS Release 11.2.  
Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.  
Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.

**Description** (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure DDoS policers for all packet types within a protocol group or for a particular packet type within a protocol group.

**Options** **aggregate**—Configure the policer to monitor all control packets within the protocol group. You can configure an aggregate policer for any protocol group.

**packet-type**—(Optional) Name of the control packet type to be policed. You can configure a specific policer for only the following packet types and protocol groups:

- **arp**—The following ARP packet types are available:
  - **aggregate**—Applies to the combination of all types of control packet traffic for this protocol group.
- **bgp**—The following BGP packet types are available:
  - **aggregate**—Applies to the combination of all types of control packet traffic for this protocol group.
- **bgpv6**—The following BGPv6 packet types are available:
  - **aggregate**—Applies to the combination of all types of control packet traffic for this protocol group.
- **dhcpv4**—The following packet types are available for DHCPv4 traffic:
  - **ack**—DHCPACK packets.
  - **bad-packets**—DHCPv4 packets with bad formats.
  - **bootp**—DHCPBOOTP packets.
  - **decline**—DHCPDECLINE packets.
  - **discover**—DHCPDISCOVER packets.
  - **force-renew**—DHCPFORCERENEW packets.
  - **inform**—DHCPINFORM packets.
  - **lease-active**—DHCPLEASEACTIVE packets.
  - **lease-query**—DHCPLEASEQUERY packets.
  - **lease-unassigned**—DHCPLEASEUNASSIGNED packets.
  - **lease-unknown**—DHCPLEASEUNKNOWN packets.
  - **nak**—DHCPNAK packets.
  - **no-message-type**—DHCP packets that are missing the message type.
  - **offer**—DHCPOFFER packets.
  - **release**—DHCPRELEASE packets.
  - **renew**—DHCPRENEW packets.
  - **request**—DHCPREQUEST packets.
  - **unclassified**—All unclassified packets in the protocol group.
- **dhcpv6**—The following packet types are available for DHCPv6 traffic:

- **advertise**—ADVERTISE packets.
- **confirm**—CONFIRM packets.
- **decline**—DECLINE packets.
- **information-request**—INFORMATION-REQUEST packets.
- **leasequery**—LEASEQUERY packets.
- **leasequery-data**—LEASEQUERY-DATA packets.
- **leasequery-done**—LEASEQUERY-DONE packets.
- **leasequery-reply**—LEASEQUERY-REPLY packets.
- **rebind**—REBIND packets.
- **reconfigure**—RECONFIGURE packets.
- **relay-forward**—RELAY-FORWARD packets.
- **relay-reply**—RELAY-REPLY packets.
- **release**—RELEASE packets.
- **renew**—RENEW packets.
- **reply**—REPLY packets.
- **request**—REQUEST packets.
- **solicit**—SOLICIT packets.
- **unclassified**—All unclassified packets in the protocol group.
- **filter-action**—The following packet types are available for unclassified firewall filter action packets, sent to the host because of reject terms in firewall filters:
  - **filter-v4**—Unclassified IPv4 filter action packets.
  - **filter-v6**—Unclassified IPv6 filter action packets.
  - **other**—All other unclassified filter action packets that are not IPv4 or IPv6.
- **frame-relay**—The following packet types are available for Frame Relay traffic:
  - **frf15**—Multilink frame relay FRF.15 packets.
  - **frf16**—Multilink frame relay FRF.16 packets.
- **ip-fragments**—The following packet types are available for IP fragments:
  - **first-fragment**—First IP fragment.
  - **trail-fragment**—Last IP fragment.

- **ip-options**—The following packet types are available for IP option traffic:
  - **non-v4v6**—Options packets other than IPv4/v6.
  - **router-alert**—Router alert options packets.
  - **unclassified**—All unclassified packets in the protocol group.
- **l2tp**—The following packet types are available for L2TP traffic:
  - **cdn**—Call-Disconnect-Notify message packets.
  - **hello**—Hello message packets.
  - **iccn**—Incoming-Call-Connected message packets.
  - **icrq**—Incoming-Call-Request message packets.
  - **scccn**—Start-Control-Connection-Connected message packets.
  - **sccrq**—Start-Control-Connection-Request message packets.
  - **stopccn**—Stop-Control-Connection-Notification message packets.
  - **unclassified**—All unclassified packets in the protocol group.
- **mcast-snoop**—Control traffic for multicast snooping.
  - **igmp**—Snooped IGMP traffic.
  - **mld**—Snooped MLD traffic.
  - **pim**—Snooped PIM control traffic.
- **mlp**—The following MLP packet types are available:
  - **aggregate**—Applies to the combination of all types of control packet traffic for this protocol group.
  - **add**—Add requests; internal MAC address learning request packets sent to the host.
  - **delete**—Delete requests; internal MAC address learning request packets sent to the host.
  - **lookup**—Lookup requests; internal MAC address learning request packets sent to the host.
  - **unclassified**—All unclassified packets in the protocol group.
  - **macpin-exception**—Exceptions to MAC address pinning (wherein dynamically learned MAC addresses are pinned to prevent looping caused by MAC moves from duplicate MAC detection).

- **ndpv6**—The following NDPv6 packet types are available, except where noted, starting in 14.1R8, 14.2R8, 15.1R5, 15.1F7, and 16.1R1:
  - **aggregate**—Applies to the combination of all types of control packet traffic for this protocol group.
  - **invalid-hop-limit**—(Starting in 16.1R2) Invalid hop limit packets. These messages might represent crafted packets in a malicious network-based packet flood.
  - **neighbor-advertisement**—Neighbor advertisement packets. These are messages used for duplicate address detection and to test reachability of neighbors. Neighbor advertisements are sent in response to neighbor solicitation messages.
  - **neighbor-solicitation**—Neighbor solicitation packets. These are messages used for duplicate address detection and to test reachability of neighbors.
  - **redirect**—Redirect packets.
  - **router-advertisement**—Router advertisement packets. These are messages sent to announce the presence of the router, advertise prefixes, assist in address configuration, and share other link information such as MTU size and hop limit. The IPv6 nodes on the link can use this information to configure themselves with an IPv6 address and routing information such as the default gateway.
  - **router-solicitation**—Router solicitation packets. These are messages sent by IPv6 nodes when they come online to solicit immediate router advertisements from the router.
- **ppp**—The following PPP packet types are available:
  - **authentication**—PPP authentication protocol packets.
  - **echo-rep**—LCP echo reply packets.
  - **echo-req**—LCP echo request packets.
  - **ipcp**—IP Control Protocol packets.
  - **ipv6cp**—IPv6 Control Protocol packets.
  - **isis**—IS-IS packets.
  - **lcp**—Link Control Protocol packets.
  - **mlppp-lcp**—MLPPP LCP packets.
  - **mplscp**—MPLS Control Protocol packets.
  - **unclassified**—All unclassified packets in the protocol group.

- **pppoe**—The following PPPoE packet types are available:
  - **padi**—PADI packets.
  - **padm**—PADM packets.
  - **padn**—PADN packets.
  - **pado**—PADO packets.
  - **padr**—PADR packets.
  - **pads**—PADS packets.
  - **padt**—PADT packets.
- **radius**—The following RADIUS packet types are available:
  - **accounting**—RADIUS accounting packets.
  - **authorization**—RADIUS authorization packets.
  - **server**—RADIUS server traffic.
  - **unclassified**—All unclassified packets in the protocol group.
- **re-services**—The following packet type is available for Routing Engine-based HTTP redirect IPv4 traffic:
  - **captive-portal**—Routing Engine-based captive portal content delivery packets.
- **re-services-v6**—The following packet type is available for Routing Engine-based HTTP redirect IPv6 traffic:
  - **captive-portal**—Routing Engine-based captive portal content delivery packets.
- **resolve**—The following packet types are available for unclassified resolve packets, which are sent to the host because of a traffic request resolve action:
  - **mcast-v4**—Unclassified IPv4 multicast resolve packets.
  - **mcast-v6**—Unclassified IPv6 multicast resolve packets.
  - **ucast-v4**—Unclassified IPv4 unicast resolve packets.
  - **ucast-v6**—Unclassified IPv6 unicast resolve packets.
  - **other**—All other unclassified resolve packets.
- **sample**—The following sample packet types are available:
  - **host**—Host packets.
  - **pfe**—Packet Forwarding Engine packets.
  - **syslog**—System log message packets.
  - **tap**—TAP packets.

- **tcp-flags**—The following TCP-flagged packet types are available:
  - **established**—TCP packets with ACK or RST flags set.
  - **initial**—TCP packets with SYN flag set and ACK flag not set.
  - **unclassified**—TCP packets with flags set any other way than the established and initial packets.
- **unclassified**—The following unclassified packet types are available:
  - **control-layer2**—Unclassified layer 2 control packets.
  - **control-v4**—Unclassified IPv4 control packets.
  - **control-v6**—Unclassified IPv6 control packets.
  - **fw-host**—Unclassified send-to-host firewall packets.
  - **host-route-v4**—Unclassified IPv4 routing protocol and host packets in traffic sent to the router local interface address.
  - **host-route-v6**—Unclassified IPv6 routing protocol and host packets in traffic sent to the router local interface address.
  - **other**—All unclassified packets that do not belong to another type.
- **virtual-chassis**—The following packet types are available for virtual chassis packets:
  - **control-low**—Low-priority control packets.
  - **control-high**—High-priority control packets.
  - **unclassified**—All unclassified packets in the protocol group.
  - **vc-packets**—All exception packets on the virtual chassis link.
  - **vc-ttl-errors**—Virtual chassis TTL error packets.



***protocol-group***—Name of the protocol group for which traffic is policed. You can configure a policer for any of the following protocol groups:

- **amtv4**—IPv4 AMT traffic.
- **amtv6**—IPv6 AMT traffic.
- **ancp**—ANCP traffic.
- **ancpv6**—ANCPv6 traffic.
- **arp**—ARP traffic.
- **atm**—ATM traffic.
- **bfd**—BFD traffic.
- **bfdv6**—BFDv6 traffic.
- **bgp**—BGP traffic.
- **bgpv6**—BGPv6 traffic.
- **control**—Control traffic.
- **demux-autosense**—Demux autosensing traffic.
- **dhcipv4**—DHCPv4 traffic.
- **dhcipv6**—DHCPv6 traffic.
- **diameter**—Diameter and Gx-Plus traffic.
- **dns**—DNS traffic.
- **dtcp**—DTCP traffic.
- **dynamic-vlan**—Dynamic VLAN exception traffic.
- **egpv6**—EGPv6 traffic.
- **eoam**—EOAM traffic.
- **esmc**—ESMC traffic.
- **fab-probe**—Fab out probe packets.
- **filter-action**—IPv4 and IPv6 firewall filter action packets sent to the host because of reject terms in firewall filters
- **frame-relay**—Frame relay traffic.
- **ftp**—FTP traffic.
- **ftpv6**—FTPv6 traffic.
- **gre**—GRE traffic.
- **icmp**—ICMP traffic.
- **igmp**—IGMP traffic
- **igmpv4v6**—IGMP v4/v6 traffic.

- **igmpv6**—IGMPv6 traffic.
- **inline-ka**—Inline service interfaces keepalive traffic.
- **inline-svcs**—Inline services traffic.
- **ip-fragments**—IP fragments traffic.
- **ip-options**—IP traffic with IP packet header options.
- **isis**—IS-IS traffic.
- **jfm**—JFM traffic.
- **l2pt**—Layer 2 protocol tunneling traffic.
- **lACP**—LACP traffic.
- **ldp**—LDP traffic.
- **ldpv6**—LDPv6 traffic.
- **lldp**—LLDP traffic.
- **lmp**—LMP traffic.
- **lmpv6**—LMPv6 traffic.
- **mac-host**—Layer 2 MAC send-to-host traffic.
- **mcast-snoop**—Control traffic for multicast snooping.
- **mlp**—MLP traffic.
- **msdp**—MSDP traffic.
- **msdpv6**—MSDPv6 traffic.
- **multicast-copy**—Host copy traffic due to multicast routing.
- **mvrp**—MVRP traffic.
- **ndpv6**—NDPv6 traffic.
- **ntp**—NTP traffic.
- **oam-lfm**—OAM-LFM traffic.
- **ospf**—OSPF traffic.
- **ospfv3v6**—OSPFv3/IPv6 traffic.
- **pfe-alive**—Packet Forwarding Engine keepalive traffic.
- **pim**—PIM traffic.
- **pimv6**—PIMv6 traffic.
- **pmvrp**—PMVRP traffic.
- **pos**—POS traffic.
- **ppp**—PPP traffic.

- **pppoe**—PPPoE traffic.
- **ptp**—PTP traffic.
- **pvstp**—PVSTP traffic.
- **radius**—RADIUS traffic.
- **re-services**—Captive portal content delivery IPv4 traffic for Routing Engine HTTP redirect.
- **re-services-v6**—Captive portal content delivery IPv6 traffic for Routing Engine HTTP redirect.
- **redirect**—Traffic that triggers ICMP redirects.
- **reject**—Packets rejected by a next-hop forwarding decision.
- **rejectv6**—V6 packets rejected by a next-hop forwarding decision.
- **resolve**—Unclassified IPv4 and IPv6 resolve packets sent to the host because of a traffic request resolve action.
- **rip**—RIP traffic.
- **ripv6**—RIPv6 traffic.
- **rsvp**—RSVP traffic.
- **rsvpv6**—RSVPv6 traffic.
- **services**—Service traffic.
- **snmp**—SNMP traffic.
- **snmpv6**—SNMPv6 traffic.
- **ssh**—SSH traffic.
- **sshv6**—SSHv6 traffic.
- **stp**—STP traffic.
- **syslog**—System log messages UDP traffic on port 6333 for the Routing Engine syslog server.
- **tacacs**—TACACS traffic.
- **tcp-flags**—Traffic with TCP flags.
- **telnet**—TELNET traffic.
- **telnetv6**—TELNETv6 traffic.
- **ttl**—TTL traffic.
- **tunnel-fragment**—Tunnel fragments traffic.
- **tunnel-ka**—Tunnel keepalive traffic.
- **unclassified**—Unclassified traffic.
- **virtual-chassis**—Virtual chassis traffic.

- **vrp**—VRRP traffic.
- **vrpv6**—VRRPv6 traffic.

The remaining statements are explained separately. Search for a statement in [CLI Explorer](#) or click a linked statement in the Syntax section for details.

|                                 |                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration. |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                             |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Configuring DDoS Protection Policers for Individual Packet Types on page 61</a></li><li>• <i>Understanding Distributed Denial-of-Service Protection with IPv6 Neighbor Discovery Protocol</i></li></ul> |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## protocols (DDoS) (PTX Series and QFX Series)

**Syntax** `protocols protocol-group (aggregate | packet-type) {  
     bandwidth packets-per-second;  
     burst size;  
     bypass-aggregate;  
     disable-fpc;  
     disable-logging;  
     fpc slot-number {  
         bandwidth-scale percentage;  
         burst-scale percentage;  
         disable-fpc;  
     }  
     priority level;  
}`

**Hierarchy Level** [edit system `ddos-protection`]

**Release Information** Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.  
 Statement introduced in Junos OS Release 17.4R1 on PTX Series switches.

**Description** Configure DDoS policers for all packet types within a protocol group or for a particular packet type within a protocol group.



**NOTE:** PTX Series routers and QFX10002-60C switches do not support the `bypass-aggregate` option.

Not all protocol groups and packet types listed in [Table 35 on page 940](#) or [Table 36 on page 942](#) below are supported on all devices. Exceptions include:

- PTX Series routers do not support the following DDoS policer protocol group options: `all-fiber-channel-enode`, `arp-snoop`, `bridge-control`, `dhcpv4v6`, `diameter`, `garp-reply`, `martian-address`, `proto-802-1x`, `ptp`, `pvstp`, `radius`, `stp`, and `tacacs`
- QFX10002-60C switches do not support the following DDoS policer protocol group options: `all-fiber-channel-enode`, `arp-snoop`, `bridge-control`, `dhcpv4v6`, `diameter`, `garp-reply`, `martian-address`, `proto-802-1x`, `ptp`, `radius`, and `tacacs`

**Options** `aggregate`—Configure the policer that polices all control packets belonging to the specified protocol as a combined group. An aggregate policer exists for all protocol groups.

`packet-type`—Name of the control packet type to be policed. You can configure a packet-type policer only for the protocol groups listed in [Table 35 on page 940](#). For all other protocol groups, only aggregate policers are supported. [Table 35 on page 940](#) lists the packet-type policers and their default configuration.

*Table 35: Packet Types Supported by DDoS Protection on QFX Switches*

| Protocol Group     | Packet Type          | Description                       | Default Bandwidth | Default Burst | Default Priority |
|--------------------|----------------------|-----------------------------------|-------------------|---------------|------------------|
| <b>mcast-snoop</b> | <b>igmp</b>          | Control packets for IGMP snooping | 500               | 2048          | High             |
|                    | <b>mld</b>           | Control packets for MLD snooping  | 500               | 2048          | High             |
|                    | <b>pim</b>           | Control packets for PIM snooping  | 500               | 2048          | High             |
| <b>radius</b>      | <b>accounting</b>    | RADIUS accounting packets         | 200               | 2048          | High             |
|                    | <b>authorization</b> | RADIUS authorization packets      | 200               | 2048          | High             |
|                    | <b>server</b>        | RADIUS server traffic             | 200               | 2048          | High             |

***protocol-group***—Name of the protocol group for which traffic is policed. You can configure the aggregate policer for any of the following protocol groups listed in [Table 36 on page 942](#). The table shows the default configuration for the policers.

Table 36: Protocol Groups Supported by DDoS Protection on QFX Switches

| Protocol Group                 | Description                                                                                                                                         | Default Bandwidth | Default Burst |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|
| <b>all-fiber-channel-enode</b> | Fiber channel ENode traffic                                                                                                                         | 10                | 2048          |
| <b>arp</b>                     | ARP traffic                                                                                                                                         | 500               | 1024          |
| <b>arp-snoop</b>               | ARP snooping traffic                                                                                                                                | 500               | 2048          |
| <b>bfd</b>                     | Single-hop BFD traffic                                                                                                                              | 1000              | 2048          |
| <b>bfdv6</b>                   | BFDv6 traffic                                                                                                                                       | 3000              | 10000         |
| <b>bgp</b>                     | BGP traffic                                                                                                                                         | 1500              | 2048          |
| <b>bridge-control</b>          | Bridge Control traffic                                                                                                                              | 10                | 2048          |
| <b>dhcpv4v6</b>                | DHCPv4 and DHCPv6 traffic<br>(limits apply to combined traffic)                                                                                     | 500               | 2048          |
| <b>diameter</b>                | Diameter and Gx-Plus traffic                                                                                                                        | 200               | 2048          |
| <b>dns</b>                     | DNS traffic                                                                                                                                         | 200               | 2048          |
| <b>dtcp</b>                    | DTCP traffic                                                                                                                                        | 200               | 2048          |
| <b>egpv6</b>                   | EGPv6 traffic                                                                                                                                       | 10                | 2048          |
| <b>eoam</b>                    | Ethernet OAM traffic                                                                                                                                | 100000            | 2048          |
| <b>ethernet-tcc</b>            | TCC-encapsulated Ethernet traffic<br><br><b>NOTE:</b> The <b>tcc</b> option encompasses this protocol group on PTX Series and QFX10002-60C devices. | 100               | 2048          |
| <b>ftp</b>                     | FTP traffic                                                                                                                                         | 500               | 2048          |
| <b>garp-reply</b>              | Gratuitous ARP reply traffic                                                                                                                        | 100               | 2048          |
| <b>gre</b>                     | GRE traffic                                                                                                                                         | 500               | 2048          |
| <b>icmp</b>                    | ICMP traffic                                                                                                                                        | 500               | 2048          |
| <b>igmp</b>                    | IGMPv4 and IGMPv6 traffic<br><br><b>NOTE:</b> Use this option on PTX Series and QFX10002-60C devices for                                            | 1000              | 2048          |



Table 36: Protocol Groups Supported by DDoS Protection on QFX Switches (continued)

| Protocol Group         | Description                                                                                                                                    | Default Bandwidth | Default Burst |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|
|                        | IGMPv4 traffic only, and <b>igmpv6</b> option for IGMPv6 traffic.                                                                              |                   |               |
| <b>igmpv6</b>          | IGMPv6 traffic                                                                                                                                 | 90000             | 2048          |
| <b>ip-options</b>      | IP traffic with IP packet header options                                                                                                       | 100               | 2048          |
| <b>isis</b>            | IS-IS traffic                                                                                                                                  | 1000              | 2048          |
| <b>iso-tcc</b>         | TCC-encapsulated ISO traffic<br><br><b>NOTE:</b> The <b>tcc</b> option encompasses this protocol group on PTX Series and QFX10002-60C devices. | 100               | 2048          |
| <b>l2pt</b>            | Layer 2 protocol tunneling traffic                                                                                                             | 500               | 2048          |
| <b>l2tp</b>            | Layer 2 tunneling protocol traffic                                                                                                             | 500               | 2048          |
| <b>lacp</b>            | LACP traffic                                                                                                                                   | 300               | 2048          |
| <b>ldp</b>             | LDP traffic                                                                                                                                    | 1000              | 200           |
| <b>ldp-hello</b>       | LDP hello packets                                                                                                                              | 1000              | 2048          |
| <b>lldp</b>            | LLDP traffic                                                                                                                                   | 60                | 2048          |
| <b>lmp</b>             | LMP traffic                                                                                                                                    | 100               | 2048          |
| <b>martian-address</b> | Martian address                                                                                                                                | 200               | 20            |
| <b>mcast-snoop</b>     | Control traffic for multicast snooping                                                                                                         | 500               | 2048          |
| <b>mld</b>             | MLD traffic                                                                                                                                    | 1000              | 2048          |
| <b>msdp</b>            | MSDP traffic                                                                                                                                   | 300               | 2048          |
| <b>multihop-bfd</b>    | Multihop BFD traffic                                                                                                                           | 1500              | 2048          |
| <b>ndpv6</b>           | NDPv6 traffic                                                                                                                                  | 500               | 1024          |
| <b>ntp</b>             | NTP traffic                                                                                                                                    | 200               | 2048          |

Table 36: Protocol Groups Supported by DDoS Protection on QFX Switches (continued)

| Protocol Group      | Description                                                                                             | Default Bandwidth | Default Burst |
|---------------------|---------------------------------------------------------------------------------------------------------|-------------------|---------------|
| <b>oam-cfm</b>      | OAM CFM traffic                                                                                         | 200               | 2048          |
| <b>oam-lfm</b>      | OAM LFM traffic                                                                                         | 200               | 2048          |
| <b>ospf</b>         | OSPF traffic                                                                                            | 1000              | 200           |
| <b>ospf-hello</b>   | OSPF hello packets                                                                                      | 1500              | 2048          |
| <b>pim-ctrl</b>     | PIM control packets                                                                                     | 1000              | 2048          |
| <b>pim-data</b>     | PIM data                                                                                                | 2000              | 2048          |
| <b>proto-802-1x</b> | 802.1X traffic                                                                                          | 200               | 2048          |
| <b>ptp</b>          | PTP traffic                                                                                             | 100               | 2048          |
| <b>pvstp</b>        | PVSTP traffic                                                                                           | 2000              | 2048          |
| <b>radius</b>       | RADIUS traffic                                                                                          | 200               | 2048          |
| <b>reject</b>       | Packets rejected by a next-hop forwarding decision                                                      | 100               | 2048          |
| <b>resolve</b>      | Unclassified IPv4 and IPv6 resolve packets sent to the host because of a traffic request resolve action | 500               | 2048          |
| <b>rip</b>          | RIP traffic                                                                                             | 100               | 2048          |
| <b>rsvp</b>         | RSVP traffic                                                                                            | 1000              | 2048          |
| <b>snmp</b>         | SNMP traffic                                                                                            | 500               | 2048          |
| <b>ssh</b>          | SSH traffic                                                                                             | 500               | 2048          |
| <b>stp</b>          | STP traffic                                                                                             | 2000              | 2048          |
| <b>tacacs</b>       | TACACS+ traffic                                                                                         | 200               | 2048          |
| <b>tcc</b>          | Transitional Cross-connect encapsulated traffic                                                         | 100               | 2048          |
| <b>telnet</b>       | Telnet traffic                                                                                          | 500               | 2048          |
| <b>tll</b>          | Time to Live packets                                                                                    | 100               | 2048          |

Table 36: Protocol Groups Supported by DDoS Protection on QFX Switches (continued)

| Protocol Group | Description                                                                       | Default Bandwidth | Default Burst |
|----------------|-----------------------------------------------------------------------------------|-------------------|---------------|
| unclassified   | Traffic that cannot be classified into one of the other available protocol groups | 100               | 2048          |
| vrrp           | VRRP traffic                                                                      | 1000              | 2048          |

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring DDoS Protection Policers on QFX Series Switches on page 56](#)

## recover-time (DDoS)

**Syntax** `recover-time seconds;`

**Hierarchy Level** [edit system ddos-protection [protocols](#) *protocol-group* (aggregate | *packet-type*)]

**Release Information** Statement introduced in Junos OS Release 11.2.  
Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.

**Description** (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure how much time must pass since the last detected DDoS violation before the traffic is considered to have recovered from the attack and returned to normal.

**Options** **seconds**—Period required for the traffic to recover.  
**Range:** 1 through 3600 seconds  
**Default:** 300

**Required Privilege Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring DDoS Protection Policers for Individual Packet Types on page 61](#)

## recovery-timeout

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <code>recovery-timeout seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level (EX Series and QFX Series)</b> | [edit interfaces <i>interface-name</i> unit 0 family ethernet-switching]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level (MX Series)</b>                | [edit interfaces <i>interface-name</i> unit 0 family bridge]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                        | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 13.2 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1 for the MX Series routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>                                | <p>Configure an interface to be temporarily disabled when MAC limiting, MAC move limiting, or rate-limiting is in effect with the action <b>shutdown</b>. This enables the affected interface to recover automatically from the error condition after the specified period of time:</p> <ul style="list-style-type: none"> <li>• If you configure MAC limiting with the <b>shutdown</b> option and you enable <b>recovery-timeout</b>, the interface is temporarily disabled when the MAC address limit is reached. The interface will recover automatically after the number of seconds specified.</li> <li>• If you enable MAC move limiting with the <b>shutdown</b> option and you enable <b>recovery-timeout</b>, the interface is temporarily disabled when the maximum number of MAC address moves is reached. The interface will recover automatically after the number of seconds specified.</li> <li>• If you enable MAC move limiting with the <b>vlan-member-shutdown</b> option and you enable <b>recovery-timeout</b>, the interface is temporarily disabled when the maximum number of MAC address moves is reached. The interface will recover automatically after the number of seconds specified. If the recovery timeout is not configured, the interface will recover automatically after 180 seconds.</li> <li>• If you enable storm control with the <b>action-shutdown</b> option and you enable <b>recovery-timeout</b>, the interface is temporarily disabled when applicable traffic exceeds the specified levels. Depending upon the configuration, applicable traffic can include broadcast, unknown unicast, and multicast traffic.</li> </ul> |



**NOTE:** The **recovery-timeout** configuration does not apply to preexisting error conditions. It impacts only error conditions that are detected after the **recovery-timeout** statement is configured and committed. To clear a preexisting error condition and restore the interface to service, use the operational mode commands **clear ethernet-switching recovery-timeout** for EX Series and QFX Series and **clear bridge recovery-timeout** for MX Series routers.

**Default** The interface does not automatically recover from an error condition.



**NOTE:** On EX9200 switches, if a MAC move limit is configured with the action `vlan-member-shutdown`, the interface automatically recovers from the disabled condition after 180 seconds by default.

**Options** **seconds**— Number of seconds that the interface remains in a disabled state due to a port error prior to automatic recovery.  
**Range:** 10 through 3600

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- [action-shutdown on page 666](#)
- [Configuring MAC Limiting \(CLI Procedure\) on page 436](#)
- [Configuring MAC Move Limiting \(CLI Procedure\) on page 440](#)
- [Configuring or Disabling Storm Control \(CLI Procedure\) on page 591](#)

## re-enroll-trigger-time-percentage

**Syntax** `re-enroll-trigger-time-percentage percentage;`

**Hierarchy Level** [edit security [pki auto-re-enrollment certificate-id](#)]

**Release Information** Statement introduced in Junos OS Release 8.5.

**Description** Percentage of the router certificate [validity-period](#) statement value, in days, when auto-reenrollment should start before expiration.

**Options** **percentage**—Percentage for the reenroll trigger time.  
**Range:** 1 through 99

**Required Privilege Level** admin—To view this statement in the configuration.  
 admin-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 24](#)
- [auto-re-enrollment on page 678](#)

## refresh-interval

---

|                                 |                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>refresh-interval <i>number-of-hours</i>;</code>                                                                                                              |
| <b>Hierarchy Level</b>          | [edit security pki ca-profile <i>ca-profile-name</i> revocation-check <i>crl</i> ]                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.                                                                                                                      |
| <b>Description</b>              | (Adaptive services interfaces only) Specify the amount of time between certificate revocation list (CRL) updates.                                                  |
| <b>Options</b>                  | <i>number-of-hours</i> —Time interval, in hours, between CRL updates.<br><b>Range:</b> 0 through 8784<br><b>Default:</b> 24                                        |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Certificate Revocation List on page 21</a></li><li>• <a href="#">crl on page 706</a></li></ul> |

## re-generate-keypair

---

|                                 |                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>&lt;re-generate-keypair&gt;;</code>                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit security pki auto-re-enrollment certificate-id]                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.                                                                                                                                                                                                  |
| <b>Description</b>              | (Optional) Automatically generate a new key pair when auto-reenrolling a router certificate. If this statement is not configured, the current key pair is used.                                                                                |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 24</a></li><li>• <a href="#">auto-re-enrollment on page 678</a></li></ul> |

## remote-id

**Syntax** remote-id {  
     **host-name** *host-name*;  
     **mac** (**Option 82**);  
     **prefix** ( hostname | mac | none);  
     use-interface-description (logical | device);  
     use-string *string*;  
 }

- Hierarchy Level**
- For platforms with Enhanced Level 2 Software (ELS):  
 [edit vlans *vlan-name* forwarding-options **dhcp-security option-82**]
  - For platforms without ELS:  
 [edit ethernet-switching-options secure-access-port **vlan** (all | *vlan-name*) **dhcp-option82**],  
 [edit forwarding-options helpers bootp **dhcp-option82**],  
 [edit forwarding-options helpers bootp interface *interface-name* **dhcp-option82**]

**Release Information** Statement introduced in Junos OS Release 9.3 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.  
 Hierarchy level [edit vlans *vlan-name* forwarding-options **dhcp-security option-82**] introduced in Junos OS Release 13.2X50-D10. (See *Using the Enhanced Layer 2 Software CLI* for information about ELS.)

**Description** Insert the **remote-id** suboption of DHCP option 82 (also known as the DHCP relay agent information option) in DHCP request packet headers before forwarding or relaying requests to a DHCP server. This suboption provides a trusted identifier for the host system that has forwarded or relayed requests to the server.

The remaining statements are explained separately, and their availability depends on the hierarchy level at which the **remote-id** suboption is specified, as follows:

- The statement **prefix**, is *not* supported at the [edit vlans *vlan-name* forwarding-options **dhcp-security option-82**] hierarchy level.
- The statement **host-name** is supported *only* at the [edit vlans *vlan-name* forwarding-options **dhcp-security option-82**] hierarchy level.

**Default** If the **remote-id** statement is not explicitly set, no remote ID value is inserted in the DHCP request packet header.

If the **remote-id** statement is explicitly set, but is not qualified by a keyword, the following are true:

- At the [edit vlans *vlan-name* forwarding-options **dhcp-security**] hierarchy level, the default keyword value is *interface-name*.

- At all other hierarchy levels, the default value of the **remote-id** keyword is the MAC address of the switch.



**NOTE:** When you configure **remote-id**, **circuit-id** is also enabled, even if you do not explicitly configure **circuit-id**.

|                                 |                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration. |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------|

- |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 528</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 313</a></li><li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 508</a></li><li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a></li></ul> |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## remote-id (MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>remote-id {     host-name;     use-interface-description (logical   device);     use-string <i>string</i>; }</pre>                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security option-82]                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Insert the <b>remote-id</b> suboption of DHCP option 82 (also known as the DHCP relay agent information option) in DHCP request packet headers before forwarding or relaying requests to a DHCP server. This suboption provides a trusted identifier for the host system that has forwarded or relayed requests to the server.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Default</b>                  | <p>If the <b>remote-id</b> statement is not explicitly set, no remote ID value is inserted in the DHCP request packet header.</p> <p>If the <b>remote-id</b> statement is explicitly set, but is not qualified by a keyword, the default value is the device MAC address.</p>                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li> <li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a></li> </ul>                                                                                          |

## replay-protect

---

|                                 |                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>replay-protect {<br/>    <b>replay-window-size</b> <i>number-of-packets</i>;<br/>}</pre>                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> ]                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                            |
| <b>Description</b>              | <p>Enable replay protection for MACsec.</p> <p>A replay window size specified using the <b>replay-window-size</b> <i>number-of-packets</i> statement must be specified to enable replay protection.</p> |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                      |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                        |

## replay-protect (MX Series)

---

|                                 |                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>replay-protect {<br/>    <b>replay-window-size</b> <i>number-of-packets</i>;<br/>}</pre>                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> ]                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                      |
| <b>Description</b>              | <p>Enable replay protection for MACsec.</p> <p>A replay window size specified using the <b>replay-window-size</b> <i>number-of-packets</i> statement must be specified to enable replay protection.</p> |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                      |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on MX Series Routers</a></li></ul>                                                               |

## replay-window-size (MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>replay-window-size <i>number-of-packets</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> replay-protect]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Specifies the size of the replay protection window.</p> <p>This statement has to be configured to enable replay protection.</p> <p>When MACsec is enabled on an Ethernet link, an ID number is assigned to each packet entering the link. The ID number of the packet is checked by the receiving interface after the packet has traversed the MACsec-enabled link.</p> <p>When replay protection is enabled, the sequence of the ID number of received packets are checked. If the packet arrives out of sequence and the difference between the packet numbers exceeds the replay protection window size, the packet is dropped by the receiving interface. For instance, if the replay protection window size is set to five and a packet assigned the ID of 1006 arrives on the receiving link immediately after the packet assigned the ID of 1000, the packet that is assigned the ID of 1006 is dropped because it falls outside the parameters of the replay protection window.</p> <p>Replay protection is especially useful for fighting man-in-the-middle attacks. A packet that is replayed by a man-in-the-middle attacker on the Ethernet link will arrive on the receiving link out of sequence, so replay protection helps ensure the replayed packet is dropped instead of forwarded through the network.</p> <p>Replay protection should not be enabled in cases where packets are expected to arrive out of order.</p> |
| <b>Default</b>                  | Replay protection is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b><i>number-of-packets</i></b>—Specifies the size of the replay protection window, in packets.</p> <p>When this variable is set to 0, all packets that arrive out-of-order are dropped.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## replay-window-size

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>replay-window-size <i>number-of-packets</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association</a> <i>connectivity-association-name</i> replay-protect]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Specifies the size of the replay protection window.</p> <p>This statement has to be configured to enable replay protection.</p> <p>When MACsec is enabled on an Ethernet link, an ID number is assigned to each packet entering the link. The ID number of the packet is checked by the receiving interface after the packet has traversed the MACsec-enabled link.</p> <p>When replay protection is enabled, the sequence of the ID number of received packets are checked. If the packet arrives out of sequence and the difference between the packet numbers exceeds the replay protection window size, the packet is dropped by the receiving interface. For instance, if the replay protection window size is set to five and a packet assigned the ID of 1006 arrives on the receiving link immediately after the packet assigned the ID of 1000, the packet that is assigned the ID of 1006 is dropped because it falls outside the parameters of the replay protection window.</p> <p>Replay protection is especially useful for fighting man-in-the-middle attacks. A packet that is replayed by a man-in-the-middle attacker on the Ethernet link will arrive on the receiving link out of sequence, so replay protection helps ensure the replayed packet is dropped instead of forwarded through the network.</p> <p>Replay protection should not be enabled in cases where packets are expected to arrive out of order.</p> |
| <b>Default</b>                  | Replay protection is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b><i>number-of-packets</i></b>—Specifies the size of the replay protection window, in packets.</p> <p>When this variable is set to 0, all packets that arrive out-of-order are dropped.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## retry (Adaptive Services Interface)

---

|                                 |                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>retry <i>number-of-attempts</i>;</code>                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit security pki ca-profile <i>ca-profile-name</i> enrollment]                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.5.                                                                                                                         |
| <b>Description</b>              | (Adaptive services interfaces only) Specify how many times a router can resend a digital certificate request.                                                         |
| <b>Options</b>                  | <i>number-of-attempts</i> —Number of enrollment retries.<br><b>Range:</b> 0 through 100<br><b>Default:</b> 0                                                          |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying the Enrollment Properties on page 21</a></li> <li>• <a href="#">enrollment on page 745</a></li> </ul> |

## retry-interval

---

|                                 |                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>retry-interval <i>seconds</i>;</code>                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security pki ca-profile <i>ca-profile-name</i> enrollment]                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.5.                                                                                                                         |
| <b>Description</b>              | (Adaptive services interfaces only) Specify the amount of time the router should wait between enrollment retries.                                                     |
| <b>Options</b>                  | <i>seconds</i> —Time interval, in seconds, between enrollment retries.<br><b>Range:</b> 0 through 3600<br><b>Default:</b> 0                                           |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying the Enrollment Properties on page 21</a></li> <li>• <a href="#">enrollment on page 745</a></li> </ul> |

## revocation-check

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>revocation-check {<br/>  disable;<br/>  <b>crl</b> {<br/>    refresh-interval <i>number-of-hours</i>;<br/>    url {<br/>      <i>url-name</i>;<br/>    }<br/>  }<br/>}</pre>                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security pki ca-profile <i>ca-profile-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Specify the method to verify revocation status of digital certificates for J Series Services Routers and Adaptive Services (AS) and MultiServices PICs installed in M Series and T Series routers.                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>disable</b>—Disable verification of status of digital certificates.</p> <p><b>crl</b>—Only certificate revocation list (CRL) is supported. A CRL is a time-stamped list identifying revoked certificates, which is signed by a CA and made available to the participating IPsec peers on a regular periodic basis. By default, <b>crl</b> is enabled.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Certificate Revocation List on page 21</a></li></ul>                                                                                                                                                                                                                                                                                                                                    |

## router-advertisement-guard

```
Syntax router-advertisement-guard {
 interface interface-name {
 mark-interface (trusted | block);
 policy policy-name (stateful | stateless);
 }
 vlans (vlan-name | all) {
 policy policy-name (stateful | stateless);
 }
 policy policy-name {
 accept {
 match-list {
 match-criteria {
 (match-all | match-any);
 }
 prefix-list-name prefix-list-name;
 source-ip-address-list address-list-name;
 source-mac-address-list address-list-name;
 }
 match-option {
 hop-limit {
 (maximum | minimum) value;
 }
 managed-config-flag;
 other-config-flag;
 router-preference (high | low | medium);
 }
 }
 discard {
 prefix-list-name prefix-list-name;
 source-ip-address-list address-list-name;
 source-mac-address-list address-list-name;
 }
 }
}
```

**Hierarchy Level** [edit forwarding-options [access-security](#)]

**Release Information** Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.  
Statement introduced in Junos OS Release 16.1 for EX Series switches.

**Description** Configure IPv6 Router Advertisement (RA) guard. In an IPv6 deployment, RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in a policy. The policy can be either an accept policy or a discard policy. When RA guard is enabled by using an accept policy, any RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped. When RA guard is enabled by using a discard

policy, any RA messages that match the conditions are dropped, and RA messages that do not match the conditions are forwarded.

You can enable RA guard on an interface or on a VLAN. You must first configure a policy at the `[edit forwarding-options access-security router-advertisement-guard]` hierarchy level. The policy is then applied to an interface at the `[edit forwarding-options access-security router-advertisement-guard interface interface-name]` hierarchy level, or to a VLAN at the `[edit forwarding-options access-security router-advertisement-guard vlan vlan-name]` hierarchy level.



**NOTE:** If you apply an RA guard policy on an interface, you must enable RA guard on the VLAN that is associated with that interface using the `vlan` statement at the `[edit forwarding-options access-security router-advertisement-guard]` hierarchy level.

You can configure RA guard to be stateless or stateful. Stateless RA guard enables a switch to examine incoming RA messages and filter each message on the basis of whether it matches the conditions configured in the policy. For example, an interface can be statically configured to forward RA messages only from predefined sources. Stateful RA guard enables a switch to learn about legitimate senders of RA messages and store this information, which is used to validate senders of subsequent RA messages. For example, an interface that is in the learning state and receives RA messages from legitimate senders dynamically transitions to the forwarding state, in which RA messages from valid senders are forwarded to their destination.

The remaining statements are explained separately. See [CLI Explorer](#).

|                                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration. |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                        |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li><li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li></ul> |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## routing-instance-name

---

|                                    |                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | routing-instance-name;                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level (EX Series)</b> | [edit vlans forwarding-options <a href="#">dhcp-security option-82 circuit-id prefix</a> ]                                                                                                                                                                                                                                          |
| <b>Hierarchy Level (MX Series)</b> | [edit bridge-domains <i>bridge domain name</i> forwarding-options dhcp-security <a href="#">option-82 circuit-id prefix</a> ]                                                                                                                                                                                                       |
| <b>Release Information</b>         | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                    |
| <b>Description</b>                 | Specify that the routing instance name be included within the optional prefix for the circuit ID suboption in the DHCP option 82 information that is inserted by the switch into the packet header of a DHCP request before it forwards or relays the request to a DHCP server.                                                     |
| <b>Required Privilege Level</b>    | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                             |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 313</a></li> <li>• <a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li> </ul> |

## routing-instance-name (circuit-id)

---

|                                 |                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | routing-instance--name;                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security option-82 circuit-id prefix</a> ]                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2 for EX Series switches.                                                                                                                                                                                                                                         |
| <b>Description</b>              | Specify that the routing instance name used by the VLAN is included with the circuit ID suboption in the DHCP option 82 information that is inserted by the switch into the packet header of a DHCP request before it forwards or relays the request to a DHCP server                                         |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure)</a> on page 313</li><li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks</a> on page 524</li></ul> |

## rpf-check

|                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                                                          | <a href="#">Syntax (MX Series, SRX Series, M Series, T Series, PTX Series) on page 961</a><br><a href="#">Syntax (EX Series) on page 961</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Syntax (MX Series, SRX Series, M Series, T Series, PTX Series)</b>          | <pre>rpf-check {     fail-filter <i>filter-name</i>;     mode loose; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Syntax (EX Series)</b>                                                      | <pre>rpf-check;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level (MX Series, SRX Series, M Series, T Series, PTX Series)</b> | <pre>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>inet</i>], [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>inet6</i>], [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>inet</i>] [edit logical-systems <i>logical-system-name</i> interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>inet6</i>]</pre>                                                                                                                                                                                                                           |
| <b>Hierarchy Level (EX Series)</b>                                             | <pre>[edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>inet</i>], [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i> family <i>inet6</i>]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>                                                     | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Support for interface <b>ps0</b> (pseudowire subscriber logical interface device) added in Junos OS Release 15.1.</p>                                                                                                                                                                                                                                                                                     |
| <b>Description</b>                                                             | <p>Enable a reverse-path forwarding (RPF) check on unicast traffic.</p> <p>On EX3200 and EX4200 switches, enable a reverse-path forwarding (RPF) check on unicast traffic (except ECMP packets) on all ingress interfaces.</p> <p>On EX4300 switches, enable a reverse-path forwarding (RPF) check on unicast traffic, including ECMP packets, on all ingress interfaces.</p> <p>On EX8200 and EX6200 switches, enable an RPF check on unicast traffic, including ECMP packets, on the selected ingress interfaces.</p> <p>On QFX Series switches, enable an RPF check on unicast traffic (except ECMP packets) on the selected ingress interfaces.</p> <p>The mode statement is explained separately.</p> |
| <b>Default</b>                                                                 | <p>Unicast RPF is disabled on all interfaces.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Options**    **fail-filter**—A filter to evaluate when packets are received on the interface. If the RPF check fails, this optional filter is evaluated. If the fail filter is not configured, the default action is to silently discard the packet.

**Required Privilege**    interface—To view this statement in the configuration.  
**Level**    interface-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring Unicast RPF Strict Mode*
- *Configuring Unicast RPF Loose Mode*
- *Example: Configuring Unicast Reverse-Path-Forwarding Check*
- *Configuring a Pseudowire Subscriber Logical Interface Device*
- *Example: Configuring Unicast RPF on an EX Series Switch*
- [Configuring Unicast RPF \(CLI Procedure\) on page 569](#)
- [Disabling Unicast RPF \(CLI Procedure\) on page 573](#)
- [Understanding Unicast RPF on page 565](#)

## secret

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>secret <i>secret-data</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit security authentication-key-chains key-chain <i>key-chain-name</i> key <i>key</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for QFX Series switches.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> |
| <b>Description</b>              | Specify a password in encrypted text or plain text format. The secret password always appears in encrypted format.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <b><i>secret-data</i></b> —Password to use; it can include spaces if the character string is enclosed in quotation marks.                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Authentication Key Updates</i></li> <li>• <i>Example: Configuring BFD Authentication for Securing Static Routes</i></li> <li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li> </ul>                                                                                                                                                                                                                                                         |

## secure-access-port

---

```
Syntax secure-access-port {
 dhcp-snooping-file {
 location local_pathname | remote_URL;
 timeout seconds;
 write-interval seconds;
 }
 dhcpv6-snooping-file {
 location local_pathname | remote_URL;
 timeout seconds;
 write-interval seconds;
 }
 interface (all | interface-name) {
 allowed-mac {
 mac-address-list;
 }
 (dhcp-trusted | no-dhcp-trusted);
 fcoe-trusted;
 mac-limit limit action (drop | log | none | shutdown);
 no-allowed-mac-log;
 persistent-learning;
 static-ipip-address {
 vlan vlan-name;
 mac mac-address;
 }
 static-ipv6ip-address {
 vlan vlan-name;
 mac mac-address;
 }
 }
 voip-mac-exclusive;
 (dhcp-trusted | no-dhcp-trusted);
 }
 vlan (all | vlan-name) {
 (arp-inspection | no-arp-inspection) [
 forwarding-class class-name;
]
 dhcp-option82 {
 circuit-id {
 prefix hostname;
 use-interface-description;
 use-vlan-id;
 }
 remote-id {
 prefix hostname | mac | none;
 use-interface-description;
 use-string string;
 }
 vendor-id <string>;
 }
 (examine-dhcp | no-examine-dhcp) {
 forwarding-class class-name;
 }
 (examine-dhcpv6 | no-examine-dhcpv6) {
```

```

 forwarding-class class-name;
 }
 examine-fip {
 fc-map fc-map-value;
 }
 (ip-source-guard | no-ip-source-guard);
 (ipv6-source-guard | no-ipv6-source-guard);
 mac-move-limit limit action (drop | log | none | shutdown);
 }
 (neighbor-discovery-inspection | no-neighbor-discovery-inspection);
 no-option37;
}
}

```

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hierarchy Level          | [edit <a href="#">ethernet-switching-options</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Release Information      | Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for IPv6 introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description              | <p>Configure port security features, including MAC limiting, dynamic ARP inspection, whether interfaces can receive DHCP responses, DHCP snooping, IP source guard, DHCP option 82, MAC move limiting, and FIP snooping.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                                                                                                                        |
| Required Privilege Level | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Related Documentation    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li> <li>• <a href="#">Example: Configuring DHCP Snooping, DAI , and MAC Limiting on a Switch with Access to a DHCP Server Through a Second Switch on page 465</a></li> <li>• <a href="#">Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN on page 488</a></li> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li> <li>• <a href="#">Example: Configuring an FCoE Transit Switch</a></li> </ul> |

## secure-channel

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>secure-channel <i>secure-channel-name</i> {<br/>    <b>direction</b> (inbound   outbound);<br/>    <b>encryption</b> (MACsec);<br/>    <b>id</b> {<br/>        <b>mac-address</b> <i>mac-address</i>;<br/>        <b>port-id</b> <i>port-id-number</i>;<br/>    }<br/>    <b>offset</b> (0 30 50);<br/>    <b>security-association</b> <i>security-association-number</i> {<br/>        <b>key</b> <i>key-string</i>;<br/>    }<br/>}</pre>                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit security <b>macsec</b> <b>connectivity-association</b> <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Create and configure a secure channel to enable and configure MACsec when MACsec is enabled using static secure association key (SAK) security mode.</p> <p>You do not need to use this option to enable MACsec using static connectivity association key (CAK) security mode. All configuration for MACsec using static CAK security mode is done inside of the connectivity association but outside of the secure channel. When MACsec is enabled using static CAK security mode, an inbound and an outbound secure channel—neither of which is user-configurable—is automatically created within the connectivity association.</p> |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



## secure-channel

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> secure-channel <i>secure-channel-name</i> {     direction (inbound   outbound);     encryption (MACsec);     id {         mac-address <i>mac-address</i>;         port-id <i>port-id-number</i>;     }     offset (0 30 50);     security-association <i>security-association-number</i> {         key <i>key-string</i>;     } } </pre>                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Create and configure a secure channel to enable and configure MACsec when MACsec is enabled using static secure association key (SAK) security mode.</p> <p>You do not need to use this option to enable MACsec using static connectivity association key (CAK) security mode. All configuration for MACsec using static CAK security mode is done inside of the connectivity association but outside of the secure channel. When MACsec is enabled using static CAK security mode, an inbound and an outbound secure channel—neither of which is user-configurable—is automatically created within the connectivity association.</p> |
| <b>Options</b>                  | The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## security

```
Syntax security {
 authentication-key-chains {
 key-chain key-chain-name {
 key key {
 secret secret-data;
 start-time yyyy-mm-dd.hh:mm:ss;
 }
 }
 }
 certificates {
 cache-size bytes;
 cache-timeout-negative seconds;
 certification-authority ca-profile-name {
 ca-name ca-identity;
 crl file-name;
 encoding (binary | pem);
 enrollment-url url-name;
 file certificate-filename;
 ldap-url url-name;
 }
 enrollment-retry attempts;
 local certificate-filename {
 certificate-key-string;
 load-key-file key-file-name;
 }
 maximum-certificates number;
 path-length certificate-path-length;
 }
 ssh-known-hosts {
 host {
 fetch-from-server host-name;
 load-key-file file-name;
 }
 }
 traceoptions {
 file filename <files number> <size size>;
 flag flag;
 level level;
 no-remote-trace
 }
}
```

Hierarchy Level [\[edit\]](#)

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Configure security services. Most of the configuration statements do not have default values. If you do not specify an identifier for a statement that does not have a default value, you cannot commit the configuration.

**Required Privilege  
Level**

**Related  
Documentation**

## security-association

**Syntax** `security-association security-association-number {  
    key key-string;  
}`

**Hierarchy Level** [edit security [macsec connectivity-association](#) *connectivity-association-name* [secure-channel](#) *secure-channel-name*]

**Release Information** Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.

**Description** Specifies the number of one of the security associations in the secure channel when MACsec is enabled using static secure association key (SAK) security mode. Because SAKs are created by the key server when MACsec is enabled using static connectivity association key (CAK) security mode, the **security-association** statement is not used when enabling MACsec using static CAK security mode.

You must configure at least two security associations to enable MACsec using static SAK security mode. MACsec initially establishes a secure connection when a security association number and key match on both ends of an Ethernet link. After a certain number of Ethernet frames are securely transmitted across the Ethernet link, MACsec automatically rotates to a new security association with a new security association number and key to maintain the secured Ethernet link. This rotation continues each time a certain number of Ethernet frames are securely transmitted across the secured Ethernet link, so you must always configure MACsec to have at least two security associations.

**Default** No security keys are configured, by default.

**Options** ***security-association-number***—Specifies the security association number and creates the SAK.

The security association number is a whole number between 0 and 3. You can configure two security associations in a secure channel when enabling MACsec using static security keys.

**Required Privilege  
Level** admin—To view this statement in the configuration.  
admin-control—To add this statement to the configuration.

**Related  
Documentation** • [Configuring Media Access Control Security \(MACsec\) on page 413](#)

## security-association (Junos OS)

**Syntax** `security-association sa-name {`  
     `dynamic {`  
         `ipsec-policy policy-name;`  
         `replay-window-size (32 | 64);`  
     `}`  
     `manual {`  
         `direction (inbound | outbound | bi-directional) {`  
             `authentication {`  
                 `algorithm (hmac-sha1-96 | hmac-sha2-256);`  
                 `key (ascii-text key | hexadecimal key);`  
             `}`  
             `auxiliary-spi auxiliary-spi-value;`  
             `encryption {`  
                 `algorithm (des-cbc | 3des-cbc);`  
                 `key (ascii-text key | hexadecimal key);`  
             `}`  
             `protocol ( ah | esp | bundle);`  
             `spi spi-value;`  
         `}`  
         `mode (tunnel | transport);`  
     `}`  
`}`

**Hierarchy Level** [edit security ipsec]

**Release Information** Statement introduced before Junos OS Release 7.4.



**NOTE:** You must configure the IPsec keys as hexadecimal keys for maximum key strength with Junos OS in FIPS mode.

**Description** Configure an IPsec security association.

**Options** *sa-name*—Name of the security association.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- [Configuring Security Associations for IPsec on an ES PIC on page 195](#)

## security-association (Junos-FIPS Software)

**Syntax** `security-association sa-name {`  
     `dynamic {`  
         `ipsec-policy policy-name;`  
         `replay-window-size (32 | 64);`  
     `}`  
     `manual {`  
         `direction (inbound | outbound | bi-directional) {`  
             `authentication {`  
                 `algorithm (hmac-sha1-96 | hmac-sha2-256);`  
                 `key (ascii-text key | hexadecimal key);`  
             `}`  
             `auxiliary-spi auxiliary-spi-value;`  
             `encryption {`  
                 `algorithm 3des-cbc;`  
                 `key (ascii-text key | hexadecimal key);`  
             `}`  
             `protocol ( ah | esp | bundle);`  
             `spi spi-value;`  
         `}`  
         `mode (tunnel | transport);`  
     `}`  
`}`

**Hierarchy Level** [edit security ipsec]

**Release Information** Statement introduced before Junos OS Release 7.4.



**NOTE:** We recommend that you configure the IPsec keys as hexadecimal keys for maximum key strength with Junos OS in FIPS mode.

**Description** Configure an IPsec security association.

**Options** *sa-name*—Name of the security association.

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** Crypto Officer—To view and add this statement in the configuration.

## security-mode

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>security-mode security-mode;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association connectivity-association-name</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15.<br>The <b>dynamic</b> security mode option was introduced in Junos OS Release 14.1X53-D10.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Configure the MACsec security mode for the connectivity association.</p> <p>We recommend enabling MACsec on switch-to-switch Ethernet links using static connectivity association key (CAK) security mode. Static CAK security mode ensures security by frequently refreshing to a new random secure association key (SAK) and by only sharing the SAK between the two devices on the MACsec-secured point-to-point link. Additionally, some optional MACsec features—replay protection, SCI tagging, and the ability to exclude traffic from MACsec—are only available when you enable MACsec using static CAK security mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b>security-mode</b>—Specifies the MACsec security mode. Options include:</p> <ul style="list-style-type: none"><li>• <b>dynamic</b>—Dynamic mode.<br/><br/>Dynamic security mode is used to enable MACsec on switch-to-host Ethernet links. In dynamic mode, a master key is retrieved from a RADIUS server by a switch and a host as part of the AAA handshake in separate transactions. The MKA protocol is enabled when the master key is exchanged between the switch and the host.</li><li>• <b>static-cak</b>—Static connectivity association key (CAK) mode.<br/><br/>Static CAK security mode is used to enable MACsec on switch-to-switch Ethernet links. In <b>static-cak</b> mode, the switch at one end of the point-to-point link acts as the key server and regularly transmits a randomized key using a process that does not transmit any traffic outside of the MACsec-secured point-to-point link.</li><li>• <b>static-sak</b>—Static secure association key (SAK) mode.<br/><br/>Static SAK security mode is used to enable MACsec on switch-to-switch Ethernet links. In <b>static-sak</b> mode, one of two user-configured security keys is used to secure the point-to-point link. The two security keys are regularly rotated.</li></ul> |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## show ddos-protection protocols culprit-flows

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show ddos-protection protocols</b> < <i>protocol-group</i> ( <i>aggregate</i>   <i>packet-type</i> )> <b>culprit-flows</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | <p>Command introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Display culprit flow information for protocol groups or individual packet types.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>none</b>—Display information for all protocol groups and packet types.</p> <p><b>brief   detail</b> —(Optional) Display the specified level of output.</p> <p><b>fpc-slot</b>—(Optional) Display information for the specified Flexible PIC Concentrator (FPC) slot.</p> <p><b>Default:</b> system-wide, that is; include all the FPC slots.</p> <p><b>Range:</b> 0 through 2</p> <p><b>summary</b>—(Optional) Display flow information summary.</p> <p><b>aggregate</b>—(Optional) Display DDoS protection information for the aggregate policer. The <b>aggregate</b> option is available for all protocol groups.</p> <p><b>packet-type</b>—(Optional) Display information for the specified packet type in the protocol group. The available packet types vary by protocol group.</p> <p>See <a href="#">show ddos-protection protocols</a> for a list of available packet types.</p> <p><b>protocol-group</b>—(Optional) Display information for a particular protocol group.</p> <p>See <a href="#">show ddos-protection protocols</a> for a list of available groups.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear ddos-protection protocols on page 1056</a></li> <li>• <a href="#">show ddos-protection protocols on page 1110</a></li> <li>• <a href="#">show ddos-protection protocols flow-detection on page 980</a></li> <li>• <a href="#">show ddos-protection protocols parameters on page 1131</a></li> <li>• <a href="#">show ddos-protection protocols statistics on page 1138</a></li> <li>• <a href="#">show ddos-protection protocols violations on page 1148</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">show ddos-protection protocols culprit-flows brief on page 975</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

[show ddos-protection protocols culprit-flows for all protocols on page 975](#)  
[show ddos-protection protocols culprit-flows detail \(Specific Protocol Group\) on page 976](#)  
[show expanded format for dhcpv4 discover packet type on page 976](#)  
[show dhcpv4 flow detection information on page 977](#)  
[show dhcpv4 flow detection information in brief format on page 978](#)  
[show global statistics on page 978](#)  
[show ddos-protection protocols culprit-flows fpc-slot on page 979](#)

**Output Fields** Table 37 on page 974 lists the output fields for the **show ddos-protection protocols culprit-flows** command. Output fields are listed in the approximate order in which they appear.

*Table 37: show ddos-protection protocols culprit-flows Output Fields*

| Field Name                           | Field Description                                                                                        | Level of Output |
|--------------------------------------|----------------------------------------------------------------------------------------------------------|-----------------|
| <b>Currently tracked flows</b>       | Number of active flows that are being tracked as culprit flows by flow detection.                        | All levels      |
| <b>Total detected flows</b>          | Total number of culprit flows that have been detected, including those that have recovered or timed out. | All levels      |
| <b>Protocol Group</b>                | Name of protocol group.                                                                                  | <b>detail</b>   |
| <b>Packet type</b>                   | Name of packet type in protocol group.                                                                   | <b>detail</b>   |
| <b>Arriving Interface</b>            | Logical interface on which the traffic flow arrived.                                                     | <b>detail</b>   |
| <b>Aggr Flow Id level</b>            | Shows the flow_id, such as flow_id 0001000000000022                                                      | <b>detail</b>   |
| <b>Source Address MAC or IP</b>      | Source address of the traffic flow, either a MAC address or an IP address.                               | <b>detail</b>   |
| <b>Destination Address MAC or IP</b> | Destination address of the traffic flow, either a MAC address or an IP address.                          | <b>detail</b>   |
| <b>Source Port</b>                   | Source port number.                                                                                      | <b>detail</b>   |
| <b>Destination Port</b>              | Destination port number.                                                                                 | <b>detail</b>   |
| <b>pps</b>                           | Rate of the traffic flow in packets per second.                                                          | <b>brief</b>    |
| <b>Rate</b>                          | Rate of the traffic flow in packets per second.                                                          | <b>detail</b>   |
| <b>pkts</b>                          | Number of packets received in the traffic flow.                                                          | <b>brief</b>    |
| <b>received packets</b>              | Number of packets received in the traffic flow.                                                          | <b>detail</b>   |



Table 37: show ddos-protection protocols culprit-flows Output Fields (continued)

| Field Name             | Field Description                                                                                                                                                                                                                                                                                                      | Level of Output |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Additional information | Flow ID numbers automatically assigned to flow, with embedded slot ID. The flow ID is prefixed by <b>sub</b> , <b>ifl</b> , or <b>ifd</b> , which indicate the subscriber, logical interface, and physical interface flow aggregation levels.<br><br>Timestamp that identifies when the flow arrived on the interface. | <b>detail</b>   |

## Sample Output

### show ddos-protection protocols culprit-flows brief

```

user@host> show ddos-protection protocols culprit-flows brief
Currently tracked flows: 1000, Total detected flows: 1000
Protocol Packet Arriving Source Address
group type Interface MAC or IP
ndpv6 router-adv ge-1/1/0.0

2001:db8::03d4 sub:0001000000000384 2015-03-13 00:21:07 PDT pps:72 pkts:547072
ndpv6 router-adv ge-1/1/0.0
2001:db8::013f
sub:0001000000000385 2015-03-13 00:21:07 PDT pps:72 pkts:552704
ndpv6 router-adv ge-1/1/0.0
2001:db8::02e4
sub:0001000000000386 2015-03-13 00:21:07 PDT pps:72 pkts:726784
ndpv6 router-adv ge-1/1/0.0
2001:0db8::0102
sub:0001000000000387 2015-03-13 00:21:07 PDT pps:72 pkts:762880

```

### show ddos-protection protocols culprit-flows for all protocols

```

user@host> show ddos-protection protocols culprit-flows
Currently tracked flows: 1003, Total detected flows: 1003
Protocol group Packet type Arriving Interface Source Address MAC or IP
pppoe padi ge-1/3/0.0 00:10:94:00:00:02
flow_id:0001000000000003 2017-09-12 16:48:58 PDT pps:2000 pkts:153606295
dhcpv4 discover ge-1/2/0.100 -- -- --
flow_id:0001000000000000 2017-09-12 16:48:56 PDT pps:1000 pkts:76805613
dhcpv4 discover ge-1/2/0.100 192.85.1.2
flow_id:0001000000000001 2017-09-12 16:48:56 PDT pps:1000 pkts:76805603
bfd aggregate ge-1/2/0.100 192.85.1.2
flow_id:0001000000000002 2017-09-12 16:48:57 PDT pps:30 pkts:2303747286
bfd aggregate ge-1/2/0.100 192.85.2.249
flow_id:0001000000000004 2017-09-13 14:08:53 PDT pps:30 pkts:203
bfd aggregate ge-1/2/0.100 192.85.1.36
flow_id:0001000000000005 2017-09-13 14:08:53 PDT pps:30 pkts:204
bfd aggregate ge-1/2/0.100 192.85.1.211
flow_id:0001000000000006 2017-09-13 14:08:53 PDT pps:30 pkts:204
bfd aggregate ge-1/2/0.100 192.85.4.79
flow_id:0001000000000007 2017-09-13 14:08:53 PDT pps:30 pkts:205
bfd aggregate ge-1/2/0.100 192.85.4.219
flow_id:0001000000000008 2017-09-13 14:08:53 PDT pps:30 pkts:204
bfd aggregate ge-1/2/0.100 192.85.2.134
flow_id:0001000000000009 2017-09-13 14:08:53 PDT pps:30 pkts:204

```

**show ddos-protection protocols culprit-flows detail (Specific Protocol Group)**

```

user@host> show ddos-protection protocols pppoe culprit-flows detail
Currently tracked flows: 2, Total detected flows: 1000
Protocol group Packet type Arriving Interface Aggr Flow Id level
pppoe padi ge-1/1/0.1 flow_id 0001000000000022
Ethertype: 0x0 outer-vlan: 100 inner-vlan: ---
Source Address: 00:10:94:00:00:02
Destination Address: FF:FF:FF:FF:FF:FF
Found at: 2017-10-07 07:11:27 PDT
Last Violation: 2017-10-07 07:43:24 PDT
Rate: 9995 pps received packets: 18546724

ppoe padi ge-1/1/0.1 flow_id 0001000000000031c
Ethertype: 0x0 outer-vlan: 100 inner-vlan: ---
Source Address: 00:10:94:00:00:03
Destination Address: FF:FF:FF:FF:FF:FF
Found at: 2017-10-07 07:11:27 PDT
Last Violation: 2017-10-07 07:43:24 PDT
Rate: 9995 pps received packets: 18546715

user@host> show ddos-protection protocols pppoe culprit-flows detail
Currently tracked flows: 1, Total detected flows: 1000
Protocol Packet Arriving Aggr Flow Id
group type Interface level
pppoe padi ge-1/1/0.1 sub 0001000000000022
Ethertype: 0x0 outer-vlan: 100 inner-vlan: ---
Source Address: 2001:db8::02
Destination Address: 2001:db8::FF
Found at: 2014-10-07 07:11:27 PDT
Last Violation: 2014-10-07 07:43:24 PDT
Rate: 9995 pps received packets: 18546724

user@host> show ddos-protection protocols ndpv6 culprit-flows detail
Currently tracked flows: 1, Total detected flows: 1
Protocol Packet Arriving Aggr Flow Id
group type Interface level
ndpv6 router-sol ge-1/1/0.2 sub 0001000000000001
Source Address: 2001:db8::03
Destination Address: 2001:0db8::0111
Type: 133 Code: 0
Found at: 2014-10-23 11:55:20 PDT
Last Violation: 2014-10-23 11:55:21 PDT
Rate: 30000 pps received packets: 43469

```

**show expanded format for dhcpv4 discover packet type**

```

user@host> show ddos-protection protocols dhcpv4 discover
Currently tracked flows: 0, Total detected flows: 0
* = User configured value Protocol Group: DHCPv4

Packet type: discover (DHCPv4 DHCPDISCOVER) Individual policer configuration:
 Bandwidth: 500 pps
 Burst: 500 packets
 Priority: Low
 Recover time: 300 seconds Enabled: Yes
 Bypass aggregate: No
Flow detection configuration:
 Detection mode: Automatic Detect time: 3 seconds
 Log flows: Yes
 Recover time: 60 seconds

```

```

Timeout flows: No
Timeout time: 300 seconds
Flow aggregation level configuration:
Aggregation level Detection mode Control mode Flow rate
Subscriber Automatic Drop 10 pps
Logical interface Automatic Drop 10 pps
Physical interface Automatic Drop 500 pps
System-wide information: Bandwidth is never violated
Received: 0
Arrival rate: 0 pps
Dropped: 0
Max arrival rate: 0 pps
Routing Engine information:
Bandwidth: 500 pps, Burst: 500 packets, enabled Policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps Dropped by aggregate policer: 0
FPC slot 1 information:
Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled Policer is never
violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps Dropped by aggregate policer: 0
Dropped by flow suppression: 0

```

#### show dhcpv4 flow detection information

```

user@host> show ddos-protection protocols dhcpv4 flow-detection
Packet types: 19, Modified: 0
* = User configured value Protocol Group: DHCPv4
Packet type: aggregate
Flow detection configuration:
Detection mode: Automatic
Detect time: 3 seconds
Log flows: Yes
Recover time: 60 seconds
Timeout flows: No
Timeout time: 300 seconds
Flow aggregation level configuration:
Aggregation level Detection mode Control mode Flow rate
Subscriber Automatic Drop 10 pps
Logical interface Automatic Drop 10 pps
Physical interface Automatic Drop 5000 pps

Packet type: unclassified
Flow detection configuration:
Detection mode: Automatic
Detect time: 3 seconds
Log flows: Yes
Recover time: 60 seconds
Timeout flows: No
Timeout time: 300 seconds
Flow aggregation level configuration:
Aggregation level Detection mode Control mode Flow rate
Subscriber Automatic Drop 10 pps
Logical interface Automatic Drop 10 pps
Physical interface Automatic Drop 300 pps

Packet type: discover
Flow detection configuration:
Detection mode: Automatic
Detect time: 3 seconds
Log flows: Yes

```

```

Recover time: 60 seconds
Timeout flows: No
Timeout time: 300 seconds
Flow aggregation level configuration:
Aggregation level Detection mode Control mode Flow rate
Subscriber Automatic Drop 10 pps
Logical interface Automatic Drop 10 pps
Physical interface Automatic Drop 500 pps

Packet type: offer
Flow detection configuration:
Detection mode: Automatic
Detect time: 3 seconds
Log flows: Yes
Recover time: 60 seconds
Timeout flows: No
Timeout time: 300 seconds
Flow aggregation level configuration:
Aggregation level Detection mode Control mode Flow rate
Subscriber Automatic Drop 10 pps
Logical interface Automatic Drop 10 pps

```

#### show dhcpv4 flow detection information in brief format

```

user@host> show ddos-protection protocols dhcpv4 flow-detection brief
Packet types: 19, Modified: 0
* = User configured value

```

Detection mode(Op): a = automatic Flow control mode(Fc): d = drop o = on k = keep  
x = off p = police

| Protocol | Packet type | Op mode | Policer BW(pps) | Aggr lvl sub | Op:Fc: BWidth(pps) | Log ifl | Time ifd | flow out |
|----------|-------------|---------|-----------------|--------------|--------------------|---------|----------|----------|
|----------|-------------|---------|-----------------|--------------|--------------------|---------|----------|----------|

|        |            |      |      |        |        |          |     |    |
|--------|------------|------|------|--------|--------|----------|-----|----|
| dhcpv4 | aggregate  | auto | 5000 | a:d:10 | a:d:10 | a:d:5000 | Yes | No |
| dhcpv4 | unclass..  | auto | 300  | a:d:10 | a:d:10 | a:d:300  | Yes | No |
| dhcpv4 | discover   | auto | 500  | a:d:10 | a:d:10 | a:d:500  | Yes | No |
| dhcpv4 | offer      | auto | 1000 | a:d:10 | a:d:10 | a:d:1000 | Yes | No |
| dhcpv4 | request    | auto | 1000 | a:d:10 | a:d:10 | a:d:1000 | Yes | No |
| dhcpv4 | decline    | auto | 500  | a:d:10 | a:d:10 | a:d:500  | Yes | No |
| dhcpv4 | ack        | auto | 500  | a:d:10 | a:d:10 | a:d:500  | Yes | No |
| dhcpv4 | nak        | auto | 500  | a:d:10 | a:d:10 | a:d:500  | Yes | No |
| dhcpv4 | release    | auto | 2000 | a:d:10 | a:d:10 | a:d:2000 | Yes | No |
| dhcpv4 | inform     | auto | 500  | a:d:10 | a:d:10 | a:d:500  | Yes | No |
| dhcpv4 | renew      | auto | 2000 | a:d:10 | a:d:10 | a:d:2000 | Yes | No |
| dhcpv4 | forcerenew | auto | 2000 | a:d:10 | a:d:10 | a:d:2000 | Yes | No |
| dhcpv4 | leasequery | auto | 2000 | a:d:10 | a:d:10 | a:d:2000 | Yes | No |
| dhcpv4 | leaseuna.. | auto | 2000 | a:d:10 | a:d:10 | a:d:2000 | Yes | No |
| dhcpv4 | leaseunk.. | auto | 2000 | a:d:10 | a:d:10 | a:d:2000 | Yes | No |
| dhcpv4 | leaseact.. | auto | 2000 | a:d:10 | a:d:10 | a:d:2000 | Yes | No |
| dhcpv4 | bootp      | auto | 300  | a:d:10 | a:d:10 | a:d:300  | Yes | No |
| dhcpv4 | no-msgtype | auto | 1000 | a:d:10 | a:d:10 | a:d:1000 | Yes | No |
| dhcpv4 | bad-pack.. | auto | 0    | a:d:10 | a:d:10 | a:d:0    | Yes | No |

#### show global statistics

```

user@host> show ddos-protection statistics
DDOS protection global statistics:
Policing on routing engine: Yes

```

```
Policing on FPC: Yes
Flow detection: No
Logging: Yes
Policer violation report rate: 100
Flow report rate: 100
Currently violated packet types: 0
Packet types have seen violations: 0
Total violation counts: 0
Currently tracked flows: 0
Total detected flows: 0
```

#### `show ddos-protection protocols culprit-flows fpc-slot`

```
user@host> show ddos-protection protocols ndpv6 culprit-flows fpc-slot 1
Currently tracked flows: 2, Total detected flows: 2
```

## show ddos-protection protocols flow-detection

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show ddos-protection protocols</b> <protocol-group> flow-detection<br><brief   detail   terse>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | Display flow detection information for all protocol groups or for a particular protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <b>none</b> —Display information for all protocol groups.<br><br><b>brief   detail   terse</b> —(Optional) Display the specified level of output. <ul style="list-style-type: none"><li>• <b>brief</b>—Display basic function information.</li><li>• <b>detail</b>—Add information to the <b>brief</b> output; it is identical to the output displayed when you choose no option. The <b>brief</b> and <b>detail</b> options display information for all protocol groups, which can be a long list.</li><li>• <b>terse</b>—Display the same level of information as the <b>brief</b> option but only for active protocol groups.</li></ul><br><b>protocol-group</b> —(Optional) Display information for a particular protocol group. See <a href="#">show ddos-protection protocols</a> for a list of available groups. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">clear ddos-protection protocols on page 1056</a></li><li>• <a href="#">show ddos-protection protocols on page 1110</a></li><li>• <a href="#">show ddos-protection protocols culprit-flows on page 973</a></li><li>• <a href="#">show ddos-protection protocols parameters on page 1131</a></li><li>• <a href="#">show ddos-protection protocols statistics on page 1138</a></li><li>• <a href="#">show ddos-protection protocols violations on page 1148</a></li></ul>                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>    | <a href="#">show ddos-protection protocols flow-detection on page 982</a><br><a href="#">show ddos-protection protocols flow-detection brief (Parameters for a Specific Protocol) on page 983</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Output Fields** Table 38 on page 981 lists the output fields for the **show ddos-protection protocols flow-detection** command. Output fields are listed in the approximate order in which they appear.

*Table 38: show ddos-protection protocols flow-detection Output Fields*

| Field Name                                  | Field Description                                                                                                                                                                                                                                                                                                                                                                | Level of Output    |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Packet types</b>                         | Number of packet types.                                                                                                                                                                                                                                                                                                                                                          | All levels         |
| <b>Modified</b>                             | Number of packets for which policer values have been modified from the default.                                                                                                                                                                                                                                                                                                  | All levels         |
| <b>Protocol Group</b>                       | Name of protocol group.                                                                                                                                                                                                                                                                                                                                                          | All levels         |
| <b>Packet type</b>                          | Name of packet type in protocol group.                                                                                                                                                                                                                                                                                                                                           | All levels         |
| <b>Flow detection configuration</b>         | Configuration of flow detection at the packet level.                                                                                                                                                                                                                                                                                                                             | <b>detail none</b> |
| <b>Detection mode or Op mode</b>            | Mode of operation for flow detection at the packet level: <ul style="list-style-type: none"> <li>• <b>Automatic</b> or <b>a</b>—Search flows only when a policer is being violated.</li> <li>• <b>Off</b> or <b>x</b>—Never search flows even when a policer is being violated.</li> <li>• <b>On</b> or <b>o</b>—Search flows even when no policer is being violated.</li> </ul> | All levels         |
| <b>Policer BW (pps)</b>                     | Bandwidth allowed at the packet level.                                                                                                                                                                                                                                                                                                                                           | <b>brief terse</b> |
| <b>Detect time</b>                          | Time in seconds that a suspicious flow that has exceeded the bandwidth allowed for the packet type must remain in violation to be confirmed as a culprit flow.                                                                                                                                                                                                                   | <b>detail none</b> |
| <b>Log flows or Log flow</b>                | State of automatic logging of suspicious traffic flows for the packet type: on ( <b>Yes</b> ) or off ( <b>No</b> ).                                                                                                                                                                                                                                                              | All levels         |
| <b>Recover time</b>                         | Time in seconds that must pass before a culprit flow for the packet type is considered to have returned to normal. The period starts when the flow drops below the threshold that triggered the last violation.                                                                                                                                                                  | <b>detail none</b> |
| <b>Timeout flows or Time out</b>            | State of timeout enabling for culprit flows: <ul style="list-style-type: none"> <li>• <b>Yes</b>—Enabled; flows can time out (released from suppression) when a timeout period expires, regardless of whether flow is still in violation.</li> <li>• <b>No</b>—Disabled; flows are not allowed to time out.</li> </ul>                                                           | All levels         |
| <b>Timeout time</b>                         | Time in seconds that a culprit flow is suppressed. On expiration, the flow times out even if it is still violating the bandwidth limit.                                                                                                                                                                                                                                          | <b>detail none</b> |
| <b>Flow aggregation level configuration</b> | Configuration of flow detection for each flow aggregation level.                                                                                                                                                                                                                                                                                                                 | <b>detail none</b> |

Table 38: show ddos-protection protocols flow-detection Output Fields (continued)

| Field Name                            | Field Description                                                                                                                                                                                                                                                                                                                                      | Level of Output    |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Aggregation level or Agg level</b> | One of three levels of flow aggregation <ul style="list-style-type: none"> <li>• <b>Subscriber</b> or sub</li> <li>• <b>Logical interface</b> or ifl</li> <li>• <b>Physical interface</b> or ifd</li> </ul>                                                                                                                                            | All levels         |
| <b>Detection mode or Op</b>           | Mode of operation for flow detection at the flow aggregation level: <ul style="list-style-type: none"> <li>• <b>Automatic</b>—Search flows only when a policer is being violated.</li> <li>• <b>Off</b>—Never search flows even when a policer is being violated.</li> <li>• <b>On</b>—Search flows even when no policer is being violated.</li> </ul> | All levels         |
| <b>Control mode or Fc</b>             | Mode by which traffic in a culprit flow is handled. <ul style="list-style-type: none"> <li>• <b>drop</b>—Drop all traffic in flow.</li> <li>• <b>keep</b>—Keep all traffic in flow.</li> <li>• <b>police</b>—Police the traffic to within its allowed bandwidth.</li> </ul>                                                                            | All levels         |
| <b>Flow rate or BWidth (pps)</b>      | Bandwidth allowed at the flow aggregation level.                                                                                                                                                                                                                                                                                                       | <b>brief terse</b> |

## Sample Output

### show ddos-protection protocols flow-detection

```

user@host> show ddos-protection protocols flow-detection
Packet types: 190, Modified: 2
* = User configured value

Protocol Group: IPv4-Unclassified

Packet type: aggregate
Flow detection configuration:
 Detection mode: Automatic Detect time: 3 seconds
 Log flows: No Recover time: 60 seconds
 Timeout flows: No Timeout time: 300 seconds
Flow aggregation level configuration:
 Aggregation level Detection mode Control mode Flow rate
 Subscriber Automatic Drop 10 pps
 Logical interface Automatic Drop 10 pps
 Physical interface Automatic Drop 2000 pps

Protocol Group: IPv6-Unclassified

Packet type: aggregate
Flow detection configuration:
 Detection mode: Automatic Detect time: 3 seconds
 Log flows: No Recover time: 60 seconds
 Timeout flows: No Timeout time: 300 seconds
Flow aggregation level configuration:
 Aggregation level Detection mode Control mode Flow rate
 Subscriber Automatic Drop 10 pps

```



|                    |           |      |          |
|--------------------|-----------|------|----------|
| Logical interface  | Automatic | Drop | 10 pps   |
| Physical interface | Automatic | Drop | 2000 pps |

...

### show ddos-protection protocols flow-detection brief (Parameters for a Specific Protocol)

```
user@host> show ddos-protection protocols dhcpv4 flow-detection brief
```

```
Packet types: 19, Modified: 1
```

```
* = User configured value
```

```
Detection mode(Op): a = automatic Flow control mode(Fc): d = drop
 o = on k = keep
 x = off p = police
```

| Protocol group | Packet type | Op mode | Policer BW(pps) | Aggr level sub | Op:Fc:BWwidth(pps) ifl | ifd      | Log flow | Time out |
|----------------|-------------|---------|-----------------|----------------|------------------------|----------|----------|----------|
| dhcpv4         | aggregate   | auto    | 5000            | a:d:10         | a:d:10                 | a:d:5000 | No       | No       |
| dhcpv4         | unclass..   | auto    | 300             | a:d:10         | a:d:10                 | a:d:300  | No       | No       |
| dhcpv4         | discover    | auto    | 777*            | a:d:10         | a:d:10                 | a:d:500  | No       | No       |
| dhcpv4         | offer       | auto    | 1000            | a:d:10         | a:d:10                 | a:d:1000 | No       | No       |
| dhcpv4         | request     | auto    | 1000            | a:d:10         | a:d:10                 | a:d:1000 | No       | No       |
| dhcpv4         | decline     | auto    | 500             | a:d:10         | a:d:10                 | a:d:500  | No       | No       |
| dhcpv4         | ack         | auto    | 500             | a:d:10         | a:d:10                 | a:d:500  | No       | No       |
| dhcpv4         | nak         | auto    | 500             | a:d:10         | a:d:10                 | a:d:500  | No       | No       |
| dhcpv4         | release     | auto    | 2000            | a:d:10         | a:d:10                 | a:d:2000 | No       | No       |
| dhcpv4         | inform      | auto    | 500             | a:d:10         | a:d:10                 | a:d:500  | No       | No       |
| dhcpv4         | renew       | auto    | 2000            | a:d:10         | a:d:10                 | a:d:2000 | No       | No       |
| dhcpv4         | forcerenew  | auto    | 2000            | a:d:10         | a:d:10                 | a:d:2000 | No       | No       |
| dhcpv4         | leasequery  | auto    | 2000            | a:d:10         | a:d:10                 | a:d:2000 | No       | No       |
| dhcpv4         | leaseuna..  | auto    | 2000            | a:d:10         | a:d:10                 | a:d:2000 | No       | No       |
| dhcpv4         | leaseunk..  | auto    | 2000            | a:d:10         | a:d:10                 | a:d:2000 | No       | No       |
| dhcpv4         | leaseact..  | auto    | 2000            | a:d:10         | a:d:10                 | a:d:2000 | No       | No       |
| dhcpv4         | bootp       | auto    | 300             | a:d:10         | a:d:10                 | a:d:300  | No       | No       |
| dhcpv4         | no-msgtype  | auto    | 0               | a:d:10         | a:d:10                 | a:d:0    | No       | No       |
| dhcpv4         | bad-pack..  | auto    | 0               | a:d:10         | a:d:10                 | a:d:0    | No       | No       |

## source-mac-address-list

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source-mac-address-list <i>address-list-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | <code>[edit forwarding-options access-security <b>router-advertisement-guard</b> <i>policy</i> <i>policy-name</i> <b>discard</b>]</code><br><code>[edit forwarding-options access-security <b>router-advertisement-guard</b> <i>policy</i> <i>policy-name</i> <b>accept</b> <i>match-list</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Configure a list of MAC addresses for an IPv6 Router Advertisement (RA) guard policy to validate the source MAC address of an incoming RA message against the MAC addresses in this list. RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in the policy.</p> <p>You can use a list of MAC address for validating RA messages as part of either an accept policy or a discard policy. Before you can include a list in an RA policy, you must configure the list name at the <code>[edit policy-options <b>mac-list</b>]</code> hierarchy level. When RA guard is enabled by using an accept policy, any RA messages that match the conditions defined in the policy are forwarded, and RA messages that do not match the conditions are dropped. When RA guard is enabled by using a discard policy, any RA messages that match the conditions are dropped, and RA messages that do not match the conditions are forwarded.</p> |
| <b>Options</b>                  | <b><i>address-list-name</i></b> —Configure the RA guard policy to match the MAC source address of an incoming RA message to a MAC address contained in the list.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <b>interface</b> —To view this statement in the configuration.<br><b>interface-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li><li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## spi (Junos OS)

|                            |                                                                                                                                                                                            |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>spi spi-value;</code>                                                                                                                                                                |
| <b>Hierarchy Level</b>     | [edit security ipsec security-association <i>sa-name</i> manual <a href="#">direction</a> (inbound   outbound   bi-directional)]                                                           |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.                                                                                                                                          |
| <b>Description</b>         | Configure the security parameter index (SPI) for a security association (SA).                                                                                                              |
| <b>Options</b>             | <p><b>spi-value</b>—An arbitrary value that uniquely identifies which SA to use at the receiving host (the destination address in the packet).</p> <p><b>Range:</b> 256 through 16,639</p> |



**NOTE:** Use the auxiliary SPI when you configure the protocol statement to use the **bundle** option.

|                           |                                                            |
|---------------------------|------------------------------------------------------------|
| <b>Required Privilege</b> | system—To view this statement in the configuration.        |
| <b>Level</b>              | system-control—To add this statement to the configuration. |

## spi (Junos-FIPS Software)

|                              |                                                                                                                                                                                                                                                                                   |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                | <code>spi spi-value;</code>                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>       | [edit security ipsec internal security-association manual <a href="#">direction</a> ]                                                                                                                                                                                             |
| <b>Release Information</b>   | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                 |
| <b>Description</b>           | The security parameter index (SPI) value used for the internal Routing Engine-to-Routing Engine IPsec security association (SA) configuration.                                                                                                                                    |
| <b>Options</b>               | <p><b>spi-value</b>—Integer to use for this SPI.</p> <p><b>Range:</b> 256 through 16,639</p>                                                                                                                                                                                      |
| <b>Required Privilege</b>    | Crypto Officer—To add and view this statement in the configuration.                                                                                                                                                                                                               |
| <b>Level</b>                 |                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Configuring IPsec for Enabling Internal Communications Between Routing Engines for Junos OS in FIPS Mode on page 217</a></li> <li>• <a href="#">Secure Configuration Guide for Common Criteria and Junos-FIPS</a></li> </ul> |

## ssh

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ssh {   authentication-order [<i>method 1 method 2...</i>];   ciphers [ <i>cipher-1 cipher-2 cipher-3 ...</i>];   client-alive-count-max <i>seconds</i>;   client-alive-interval <i>seconds</i>;   connection-limit <i>limit</i>;   fingerprint-hash (md5   sha2-256);   hostkey-algorithm (<i>algorithm</i>   <i>no-algorithm</i>);   key-exchange [<i>algorithm1 algorithm 2...</i>];   log-key-changes <i>log-key-changes</i>;   macs [<i>algorithm1 algorithm 2...</i>];   max-sessions-per-connection &lt;<i>number</i>&gt;;   no-passwords;   no-public-keys;   no-tcp-forwarding;   protocol-version [v2];   rate-limit <i>limit</i>;   root-login (allow   deny   deny-password); } tcp-forwarding (JDM)</pre>                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit system services]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.1 for the QFX Series.</p> <p><b>client-alive-interval</b> and <b>client-alive-max-count</b> statements introduced in Junos OS Release 12.2.</p> <p><b>no-passwords</b> statement introduced in Junos OS Release 13.3.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for OCX Series switches.</p> <p><b>no-public-keys</b> statement introduced in Junos OS release 15.1.</p> <p><b>tcp-forwarding</b> statement introduced in Junos OS Release 15.1X53-D50 for the NFX250 Network Services Platform.</p> <p><b>fingerprint-hash</b> statement introduced in Junos OS Release 16.1.</p> <p><b>log-key-changes</b> statement introduced in Junos OS Release 17.4R1.</p> |
| <b>Description</b>              | <p>Allow SSH requests from remote systems to access the local router or switch.</p> <p>The remaining statements are explained separately. Search for a statement in <a href="#">CLI Explorer</a> or click a linked statement in the Syntax section for details.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring SSH Service for Remote Access to the Router or Switch</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## ssh-known-hosts

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ssh-known-hosts {   fetch-from-server server;   host hostname {     dsa-key key;     ecdsa-sha2-nistp256-key key;     ecdsa-sha2-nistp384-key key;     ecdsa-sha2-nistp521-key key;     ed25519-key key;     rsa-key key;     rsa1-key key;   }   load-key-file filename; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit security]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Configure SSH support for known hosts and for administering SSH host key updates.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>fetch-from-server <i>server</i></b>—Retrieve SSH public host key information from the specified server. Specify by server name or IP address.</p> <p><b>host <i>host-name</i></b>—Hostname of the SSH known host entry. This option has the following suboptions:</p> <ul style="list-style-type: none"> <li>• <b>dsa-key <i>key</i></b>—Base64 encoded Digital Signature Algorithm (DSA) key for SSH version 2.</li> <li>• <b>ecdsa-sha2-nistp256-key <i>key</i></b>—Base64 encoded ECDSA-SHA2-NIST256 key.</li> <li>• <b>ecdsa-sha2-nistp384-key <i>key</i></b>—Base64 encoded ECDSA-SHA2-NIST384 key.</li> <li>• <b>ecdsa-sha2-nistp521-key <i>key</i></b>—Base64 encoded ECDSA-SHA2-NIST521 key.</li> <li>• <b>ed25519-key <i>key</i></b>—Base64 encoded ED25519 key.</li> <li>• <b>rsa-key <i>key</i></b>—Base64 encoded public key algorithm that supports encryption and digital signatures for SSH version 1 and SSH version 2.</li> <li>• <b>rsa1-key <i>key</i></b>—Base64 encoded RSA public key algorithm, which supports encryption and digital signatures for SSH version 1.</li> </ul> <p><b>load-key-file <i>filename</i></b>—Import SSH host key information from the named file. If the file is in a directory other than the home directory of the device, specify pathname as well.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

- Related Documentation**
- [Configuring SSH Host Keys for Secure Copying of Data on page 4](#)

## start-time (Authentication Key Transmission)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>start-time (now   yyyy-mm-dd.hh:mm:ss);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>     | [edit security authentication-key-chains key-chain <i>key-chain-name</i> key <i>key</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in Junos OS Release 11.2.</p> <p>Statement introduced in Junos OS Release 11.3 for QFX Series switches.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>         | Specify a start time for key transmission. You do not need to specify an end time for the key. If a new key is present with a new start time, the keychain rolls over to the new one. The start time must be unique within the keychain.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>             | <p><b>now</b>—Start time as the current year, month, day, hour, minute, and second.</p> <p><b>daydays</b>—Start time as the specified number of days after the current day. For example, if the current day is the 12th and you configure <b>start-time 2day</b>, the start time will be on the 14th, exactly two days after the configuration is entered.</p> <p><b>hourhours</b>—Start time as the specified number of hours after the current hour. For example, if the current hour is 9:00 and you configure <b>start-time 3hour</b>, the start time will be in 12:00, exactly three hours after the configuration is entered.</p> <p><b>minuteminutes</b>—Start time as the specified number of minutes after the current minute. For example, if the current minute is 27 minutes after the hour and you configure <b>start-time 5min</b>, the start time will be in 32 minutes after the hour, exactly five minutes after the configuration is entered.</p> <p><b>monthmonths</b>—Start time as the specified number of months after the current month. For example, if the current month is March and you configure <b>start-time 4month</b>, the start time will be in July, exactly four months after the configuration is entered.</p> <p><b>secondseconds</b>—Start time as the specified number of seconds after the current second. For example, if the current second is 10:20:40 and you configure <b>start-time 10seconds</b>, the start time will be 10:20:50, exactly 10 seconds after the configuration is entered.</p> <p><b>yearyears</b>—Start time as the specified number of years after the current year. For example, if the current year is 2011 and you configure <b>start-time 1year</b>, the start time will be in 2012, exactly one year after the configuration is entered.</p> <p><b>yyyy-mm-dd.hh:mm:ss</b>—Start time in UTC (Coordinated Universal Time). The start time must be unique within the keychain.</p> |

**Required Privilege** admin—To view this statement in the configuration.  
**Level** admin-control—To add this statement to the configuration.

**Related Documentation**

- *Configuring Authentication Key Updates*
- *Example: Configuring BFD Authentication for Securing Static Routes*
- *Example: Configuring BFD Authentication for Securing Static Routes*
- *Example: Configuring Hitless Authentication Key Rollover for IS-IS*



## stateful


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (stateful   stateless);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <p>[edit forwarding-options <a href="#">access-security router-advertisement-guard interface</a> (<i>interface-name</i>   <i>interface-range-name</i>)]</p> <p>[edit forwarding-options <a href="#">access-security router-advertisement-guard vlans</a> <i>vlan-name</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.</p> <p>Statement introduced in Junos OS Release 16.1 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Configure stateful IPv6 Router Advertisement (RA) guard. In an IPv6 deployment, RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. RA guard performs checks on incoming RA messages to make sure that they are sent from legitimate routers. If the sender of the RA message cannot be validated, the RA message is dropped.</p> <p>Stateful RA guard enables the switch to learn about the sources of RA messages for a certain period of time. During this period, when the switch is known to be in the learning state, the information contained in attributes of received RA messages is stored and compared to the policy. When the learning period ends, the switch has a record of which interfaces are attached to links with valid IPv6 routers. If there is no valid IPv6 router attached to the interface, the switch dynamically transitions the interface from the learning state into the blocking state. Subsequent RA messages received after the transition to blocking state are dropped. If there is a valid IPv6 router attached to the interface, the interface transitions to the forwarding state, and subsequent RA messages that can be validated against the configured policy are forwarded.</p> <p>You can enable stateful RA guard on an interface or on a VLAN. When you enable stateful RA guard, the initial state is <b>Off</b>. You initiate the learning state by issuing the <b>request access-security router-advertisement-guard-learn</b> command.</p> |
| <b>Default</b>                  | RA guard is stateless by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li> <li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## stateless

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (stateful   stateless);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit forwarding-options <a href="#">access-security router-advertisement-guard interface</a> ( <i>interface-name</i>   <i>interface-range-name</i> )]<br>[edit forwarding-options <a href="#">access-security router-advertisement-guard vlans</a> <i>vlan-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Configure stateless IPv6 Router Advertisement (RA) guard. In an IPv6 deployment, RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in a policy.</p> <p>You can configure RA guard to be stateless or stateful. If stateless RA guard is enabled, the switch examines incoming RA messages and filters each message on the basis of whether it matches the conditions configured in the policy. After the switch has validated the content of the RA message, it forwards the RA message to its destination; otherwise, the RA message is dropped. For example, an interface can be statically configured to forward RA messages only from predefined sources.</p> <p>You can enable stateless RA guard on an interface or on a VLAN.</p> |
| <b>Default</b>                  | RA guard is stateless by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li><li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## static-ip

|                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                  | <pre>static-ip ip-addresses {     vlan vlan-name;     mac mac-address; }</pre>                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>For platforms with ELS:           <br/>[edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security group</b> <i>group-name</i> interface <i>interface-name</i>]         </li> <li>For platforms without ELS:           <br/>[edit <b>ethernet-switching-options secure-access-port interface</b> (all   <i>interface-name</i>)]         </li> </ul> |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                     | <p>Statement introduced in Junos OS Release 9.2 for EX Series switches.</p> <p>Hierarchy level [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b>] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p>                                                                                            |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                             | Configure a static IP address to MAC address (IP-MAC) binding to be added to the DHCP snooping database.                                                                                                                                                                                                                                                                                        |
| <div>  <p><b>NOTE:</b> The VLAN is specified at the higher hierarchy level when <b>static-ip</b> is configured at [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security group</b> <i>group-name</i> interface <i>interface-name</i>].</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                 | <p><b>ip-address</b>—Static IP address assigned to a device connected on the specified interface.</p> <p><b>mac</b><i>mac-address</i>—Static MAC address assigned to a device connected on the specified interface.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                             |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                   | <ul style="list-style-type: none"> <li><a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure) on page 533</a></li> <li><a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure) on page 316</a></li> </ul>                                                                                |

## static-ip (MX Series)

---

|                                 |                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>static-ip <i>ip-address</i> <b>mac</b> <i>mac-address</i>;</code>                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security</b> group <i>group-name</i> <b>interface</b> <i>interface-name</i>]</code>                                                         |
| <b>Release Information</b>      | Statement introduced in Juos OS Release 14.1 for the MX Series.                                                                                                                                                             |
| <b>Description</b>              | Configure a static IP address to MAC address (IP-MAC) binding record to be added to the DHCP snooping database.                                                                                                             |
| <b>Options</b>                  | <p><b><i>ip-address</i></b>—Static IP address assigned to a device connected on the specified interface.</p> <p><b><i>mac-address</i></b>—Static MAC address assigned to a device connected on the specified interface.</p> |
| <b>Required Privilege Level</b> | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Static IP Addresses for DHCP Bindings on Access Ports for MX Series Routers (CLI Procedure) on page 549</a></li></ul>                                       |

## static-ipv6

|                                 |                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>static-ipv6 <i>ip-address</i> {<br/>    <code>mac</code> <i>mac-address</i>;<br/>}</code>                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <code>dhcp-security group</code> <i>group-name</i> interface <i>interface-name</i> ];<br>[edit ethernet-switching-options <code>secure-access-port</code> interface <i>interface-name</i> ]                                                                                    |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X51-D20 for EX Series switches.<br>Support at the [edit ethernet-switching-options <code>secure-access-port</code> interface <i>interface-name</i> ] hierarchy level introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                           |
| <b>Description</b>              | Configure a static IP-MAC binding to be added to the DHCPv6 snooping database.                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <code>ip-address</code> —Static IPv6 address assigned to a device connected on the specified interface.<br><br><code>mac</code> <i>mac-address</i> —Static MAC address assigned to a device connected on the specified interface.<br><br>The remaining statements are explained separately. See <a href="#">CLI Explorer</a> . |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure)</a> on page 316</li> </ul>                                                                                                                                                 |

## storm-control

---

**Syntax**    storm-control {  
              action-shutdown;  
              interface (all | *interface-name*) {  
                  bandwidth *bandwidth*;  
                  level *level*;  
                  multicast;  
                  no-broadcast;  
                  no-multicast;  
                  no-registered-multicast;  
                  no-unknown-unicast;  
                  no-unregistered-multicast;  
              }  
          }

**Hierarchy Level**    [edit [ethernet-switching-options](#)]

**Release Information**    Statement introduced in Junos OS Release 9.1 for EX Series switches.

**Description**    Configure storm control on the switch.


The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level**    system—To view this statement in the configuration.  
                                  system-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587](#)
- [Understanding Storm Control on EX Series Switches on page 597](#)

## storm-control

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <code>storm-control storm-control-profile;</code>                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <p>[edit interfaces <i>interface-name</i> unit <i>number</i> family ethernet-switching],<br/>         [edit interfaces <i>interface-name</i> unit <i>number</i> family bridge]<br/>         [edit interfaces <i>interface-name</i> ether-options ethernet-switch-profile]<br/>         [edit logical-systems <i>name</i> interfaces <i>interface-name</i> unit <i>number</i> family bridge]</p> |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <p>Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br/>         Statement introduced in Junos OS Release 13.2 for the QFX series.<br/>         Statement introduced in Junos OS Release 14.1 for the MX Series routers.<br/>         Starting in Junos OS release 17.4R1 for MX Series routers, support for storm control was added for logical systems.</p>       |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Bind a storm control profile to a given interface.</p> <p>On switches running ELS software, storm control is enabled by default on all switch interfaces at a level of 80 percent of the combined broadcast and unknown unicast streams. (For the equivalent statement for platforms running non-ELS software, see <a href="#">storm-control</a>.)</p>                                       |
| <div style="display: flex; align-items: flex-start;"> <div style="flex: 1; text-align: center; margin-right: 10px;">  </div> <div> <p><b>NOTE:</b> If you configure storm control on an aggregated Ethernet interface, the storm-control level is applied to each member interface individually. For example, if the aggregated interface has two members and you configure a storm-control level of 20 kbps, Junos will not detect a storm if one or both of the member interfaces receives traffic at 15 kbps because in neither of these cases does an individual member receive traffic at a rate greater than the configured storm-control level. In this example, Junos detects a storm only if at least one member interface receives traffic at greater than 20 Kbps.</p> </div> </div> |                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <p>system—To view this statement in the configuration.<br/>         system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607</a></li> <li>• <a href="#">Understanding Storm Control for Managing Traffic Levels on page 585</a></li> </ul>                                                                                                                              |

## storm-control

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>storm-control {<br/>  action-shutdown;<br/>  interface (all   <i>interface-name</i>) {<br/>    bandwidth <i>bandwidth</i>;<br/>    no-broadcast;<br/>    no-multicast;<br/>    no-unknown-unicast;<br/>  }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | <p>Apply storm control to all interfaces or to the specified interfaces on switches running non-ELS software. (For the equivalent statement for switches running ELS software, see <a href="#">storm-control</a>.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | <p>On switches running non-ELS software, storm control is disabled by default on all switch interfaces. If you enable storm control and do not specify a storm control level, the default level is 80 percent of the available bandwidth for ingress traffic. You can change the storm control level by configuring it as a specific bandwidth value.</p> <p>When you configure storm control bandwidth on an aggregated Ethernet interface, each member of the aggregated interface is assigned that bandwidth. For example, if you configure 7000000 Kbps on aggregated interface <b>ae1</b>, and <b>ae1</b> has two members, <b>xe-2:0/0/0</b> and <b>xe-2:0/0/1</b>, each member is allowed a bandwidth level of 7000000 Kbps. Thus, the storm control bandwidth on <b>ae1</b> could be as much as 14000000 Kbps of combined broadcast and unknown unicast traffic.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Understanding Storm Control on page 561</a></li><li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on page 563</a></li><li>• <a href="#">port-error-disable</a></li><li>• <a href="#">disable-timeout on page 735</a></li><li>• <a href="#">clear ethernet-switching port-error</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



## storm-control-profiles

**Syntax** `storm-control-profiles profile-name {  
     action-shutdown;  
     all {  
         bandwidth-level;  
         bandwidth-percentage;  
         no-broadcast;  
         no-multicast;  
         no-registered-multicast;  
         no-unknown-unicast;  
         no-unregistered-multicast;  
     }  
 }`

**Hierarchy Level** [edit forwarding-options]  
 [edit logical-systems *name* forwarding-options]

**Release Information** Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.  
 Statement introduced in Junos OS Release 13.2 for the QFX Series.  
 Statement introduced in Junos OS Release 14.1 for MX Series routers.  
 Starting in Junos OS release 17.4R1 for MX Series routers, support for storm control was added for logical systems.

**Description** Configure a storm control profile on a switch or router. Storm control is used to prevent network outages that are caused by broadcast traffic storms. Storm control enables the switching device to monitor traffic levels and to drop broadcast, multicast, and unknown unicast packets when a specified traffic level—called the storm control level or storm control bandwidth—is exceeded, thus preventing packets from proliferating and degrading the LAN.



**NOTE:** The name of the storm control profile can contain no more than 127 characters.


The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** system—To view this statement in the configuration.  
 system-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 607](#)
- [Understanding Storm Control for Managing Traffic Levels on page 585](#)

## subscriber (DDoS Flow Detection)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>subscriber (flow-bandwidth   flow-control-mode   flow-detection-mode)</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>     | [edit system ddos-protection protocols <i>protocol-group packet-type</i> <b>flow-level-bandwidth</b> ],<br>[edit system ddos-protection protocols <i>protocol-group packet-type</i> <b>flow-level-control</b> ],<br>[edit system ddos-protection protocols <i>protocol-group packet-type</i> <b>flow-level-detection</b> ]                                                                                                                                                                                                                                                                              |
| <b>Release Information</b> | Statement introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>         | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Configure flow bandwidth, flow control mode, or flow detection mode at the subscriber flow aggregation level for the packet type.                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>             | <p><b>flow-bandwidth</b>—Specify the bandwidth for the flow at the subscriber level. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type</i> <b>flow-level-bandwidth</b>] hierarchy level.</p> <p><b>Default:</b> 100 packets per second</p> <p><b>Range:</b> 1 through 10,000 packets per second</p> <p><b>flow-control-mode</b>—Specify how traffic in the detected flow is controlled at the subscriber level. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type</i> <b>flow-level-control</b>] hierarchy level.</p> |
|                            | <p> <b>NOTE:</b> The configuration at this level overrides the global configuration using the <b>flow-level-control</b> statement at the [edit system ddos-protection global] hierarchy level.</p>                                                                                                                                                                                                                                                                                                                   |
|                            | <ul style="list-style-type: none"> <li><b>drop</b>—Drop all traffic in flow.</li> <li><b>keep</b>—Keep all traffic in flow.</li> <li><b>police</b>—Police the traffic to within its allowed bandwidth.</li> </ul> <p><b>Default:</b> drop</p> <p><b>flow-detection-mode</b>—Specify how flow detection operates at the subscriber level when a policer has been violated. Available only at the [edit system ddos-protection protocols <i>protocol-group packet-type</i> <b>flow-level-detection</b>] hierarchy level.</p>                                                                              |



**NOTE:** The configuration at this level overrides the global configuration using the `flow-detection-mode` statement at the `[edit system ddos-protection global]` hierarchy level.

- **automatic**—Search flows at the subscriber level only when a DDoS policer is being violated and only until it is established that the flow causing the violation is not at this level. When the suspicious flow is not at this level, then the search moves to a coarser level of flow aggregation (logical interface). Flows at the subscriber level are subsequently not searched again until the policer is no longer violated at the coarser level.
- **off**—Disable flow detection at the subscriber level so that flows are never searched at this level.
- **on**—Search flows at the subscriber level, even when no DDoS protection policer is currently being violated. Monitoring continues at this level regardless of whether a suspect flow is identified at this level.

**Default:** `automatic`

|                                 |                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration. |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Maximum Flow Bandwidth at Each Flow Aggregation Level on page 85</a></li> <li>• <a href="#">Configuring How Traffic in a Culprit Flow Is Controlled at Each Flow Aggregation Level on page 87</a></li> <li>• <a href="#">Configuring How Flow Detection Operates at Each Flow Aggregation Level on page 84</a></li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li> </ul> |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## switch-options (VLANs)

---

**List of Syntax**    [Syntax \(EX Series, MX Series, QFX Series and NFX Series\) on page 1002](#)  
                          [Syntax \(SRX Series\) on page 1002](#)

**Syntax (EX Series, MX Series, QFX Series and NFX Series)**

```
switch-options {
 interface interface-name {
 interface-mac-limit limit {
 packet-action drop;
 }
 mac-pinning
 no-mac-learning;
 static-mac static-mac-address {
 vlan-id number;
 }
 }
 interface-mac-limit limit {
 packet-action drop;
 }
 mac-statistics;
 mac-ip-table-size number;
 mac-table-size limit {
 packet-action drop;
 }
 no-mac-learning;
 service-id number;
 vtep-source-interface
}
```

**Syntax (SRX Series)**

```
switch-options {
 interface interface-name {
 encapsulation-type;
 ignore-encapsulation-mismatch;
 pseudowire-status-tlv;
 static-mac mac-address {
 vlan-id vlan-id;
 }
 }
 mac-table-aging-time seconds;
 mac-table-size {
 number;
 packet-action drop;
 }
}
```

**EX Series, MX Series, QFX Series and NFX Series**

```
[edit],
[edit logical-systems logical-system-name routing-instances routing-instance-name vlans
 vlan-name],
[edit routing-instances routing-instance-name vlans vlan-name],
[edit vlans vlan-name]
```

**SRX Series**

```
[edit vlans vlans-name]
```

**Release Information** Statement modified in Junos OS Release 9.5.  
Statement introduced in Junos OS Release 12.3R2 for EX Series switches and MX Series routers.  
Statement introduced in Junos OS Release 13.2 for the QFX Series.  
Statement (mac-pinning) introduced in Junos OS 16.2 for MX Series routers.  
**mac-ip-table-size** statement introduced in Junos OS 17.4 Release for MX Series routers and EX9200 switches.

**Description** Configure Layer 2 learning and forwarding properties for a VLAN or a virtual switch.  
The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Ethernet Switching and Layer 2 Transparent Mode Overview](#)

## timeout

**Syntax** `timeout seconds;`

**Hierarchy Level** [edit [ethernet-switching-options secure-access-port dhcp-snooping-file](#)];  
[edit [ethernet-switching-options secure-access-port dhcpv6-snooping-file](#)]

**Release Information** Statement introduced in Junos OS Release 9.4 for EX Series switches.  
Support at the [edit [ethernet-switching-options secure-access-port dhcpv6-snooping-file](#)] hierarchy level introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Specify a timeout value for remote read and write operations. This value determines the amount of time that the switch waits for a remote system to respond when the DHCP snooping database is stored on the remote FTP site.

**Default** None

**Options** **seconds**—Value in seconds.  
**Range:** 10 through 3600.

**Required Privilege Level** system—To view this statement in the configuration.  
system-control—To add this statement to the configuration.

**Related Documentation**

- [Making IP-MAC Bindings in the DHCP Snooping Database Persistent \(CLI Procedure\) on page 511](#)
- [Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273](#)

## timeout-active-flows (DDoS Flow Detection)

---

|                                 |                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | timeout-active-flows;                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit system ddos-protection protocols <i>protocol-group packet-type</i> ]                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 12.3.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                                                |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Enable culprit flows for the packet type to time out according to the timeout period. The culprit flow is suppressed for the duration of the timeout period. When the period expires, the flow times out and is released from suppression. |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring the Timeout Period for a Culprit Flow on page 81</a></li><li>• <a href="#">Configuring Flow Detection for DDoS Protection on page 77</a></li></ul>                                                                                                                    |

## tolerance

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>tolerance seconds;</code>                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <code>[edit security authentication-key-chains key-chain <i>key-chain-name</i>]</code>                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 7.6.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6.</p> <p>Support for the BFD protocol introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Support for IS-IS introduced in Junos OS Release 11.2.</p> |
| <b>Description</b>              | Configure the clock-skew tolerance for accepting keys for a key chain.                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>seconds</b>—Number of seconds to accept for clock-skew.</p> <p><b>Default:</b> 0 seconds</p> <p><b>Range:</b> 0 through 999,999,999</p>                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Authentication Key Updates</i></li> <li>• <i>Example: Configuring BFD Authentication for Securing Static Routes</i></li> <li>• <i>Example: Configuring Hitless Authentication Key Rollover for IS-IS</i></li> </ul>                                                                                           |

## traceoptions

---

**Syntax**    traceoptions {  
              file *filename* <files *number*> <size *size*>;  
              flag all;  
              flag certificates;  
              flag database;  
              flag general;  
              flag ike;  
              flag parse;  
              flag policy-manager;  
              flag routing-socket;  
              flag timer;  
              level  
              no-remote-trace  
          }

**Hierarchy Level**    [edit security],  
                          [edit services ipsec-vpn]

Trace options can be configured at either the [edit security] or the [edit services ipsec-vpn] hierarchy level, but not at both levels.

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 11.1 for the QFX Series.  
                              Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description**    Configure security trace options.

To specify more than one trace option, include multiple **flag** statements. Trace option output is recorded in the `/var/log/kmd` file.



**NOTE:** The `traceoptions` statement is not supported on QFabric systems.

---

**Options**    **files *number***—(Optional) Maximum number of trace files. When a trace file (for example, **kmd**) reaches its maximum size, it is renamed **kmd.0**, then **kmd.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

If you specify a maximum number of files, you must also specify a maximum file size with the **size** option.

**Range:** 2 through 1000 files

**Default:** 0 files

**size *size***—(Optional) Maximum size of each trace file, in kilobytes (KB). When a trace file (for example, **kmd**) reaches this size, it is renamed, **kmd.0**, then **kmd.1** and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.



**Default:** 1024 KB

**flag *flag***—Trace operation to perform. To specify more than one trace operation, include multiple **flag** statements.

- **all**—Trace all security events.
- **certificates**—Trace certificate events.
- **database**—Trace database events.
- **general**—Trace general events.
- **ike**—Trace IKE module processing.
- **parse**—Trace configuration processing.
- **policy-manager**—Trace policy manager processing.
- **routing-socket**—Trace routing socket messages.
- **timer**—Trace internal timer events.

**level *level***—(Optional) Set traceoptions level.

- **all**—match all levels.
- **error**—Match error conditions.
- **info**—Match informational messages.
- **notice**—Match conditions that should be handled specially.
- **verbose**—Match verbose messages.
- **warning**—Match warning messages.

**no-remote-trace**—(Optional) Disable remote tracing

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| <b>Required Privilege</b> | admin—To view the configuration.                          |
| <b>Level</b>              | admin-control—To add this statement to the configuration. |

|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | • <a href="#">Configuring Tracing Operations for Security Services on page 259</a> |
|------------------------------|------------------------------------------------------------------------------------|

## traceoptions (Access Port Security)

---

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre>traceoptions {<br/>    file (<i>file-name</i>   files <i>files</i>   match <i>match</i>   no-world-readable   size <i>size</i>   world-readable);<br/>    flag ( all   asynch   chassis-scheduler   cos-adjustment   dynamic   hardware-database  <br/>        init   parse   performance-monitor   process   restart   route-socket   show   snmp   util);<br/>    no-remote-trace;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Hierarchy Level     | [edit <a href="#">ethernet-switching-options</a> ],<br>[edit class-of-service]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Release Information | Statement introduced in Junos OS Release 9.2 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Description         | Define global tracing operations for access security features on Ethernet switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Default             | The <b>traceoptions</b> feature is disabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Options             | <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached (<b>xk</b> to specify KB, <b>xm</b> to specify MB, or <b>xg</b> to specify gigabytes), at which point the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000</p> <p><b>Default:</b> 3 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple flag statements. You can include the following flags:</p> <ul style="list-style-type: none"><li>• <b>access-security</b>—Trace access security events.</li><li>• <b>all</b>—All tracing operations.</li><li>• <b>config-internals</b>—Trace internal configuration operations.</li><li>• <b>forwarding-database</b>—Trace forwarding database and next-hop events.</li><li>• <b>general</b>—Trace general events.</li><li>• <b>interface</b>—Trace interface events.</li><li>• <b>ip-source-guard</b>—Trace IP source guard events.</li></ul> |

- **krt**—Trace communications over routing sockets.
- **lib**—Trace library calls.
- **normal**—Trace normal events.
- **parse**—Trace reading of the configuration.
- **regex-parse**—Trace regular-expression parsing operations.
- **rtg**—Trace redundant trunk group events.
- **state**—Trace state transitions.
- **stp**—Trace spanning-tree events.
- **task**—Trace Ethernet-switching task processing.
- **timer**—Trace Ethernet-switching timer processing.
- **vlan**—Trace VLAN events.

**no-stamp**—(Optional) Do not timestamp the trace file.

**Default:** If you omit this option, timestamp information is placed at the beginning of each line of the tracing output.

**no-world-readable**—(Optional) Restrict file access to the user who created the file.

**replace**—(Optional) Replace an existing trace file if there is one rather than appending to it.

**Default:** If you do not include this option, tracing output is appended to an existing trace file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. If you specify a maximum number of files, you also must specify a maximum file size with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify gigabytes

**Range:** 10 KB through 1 gigabyte

**Default:** 128 KB

**world-readable**—(Optional) Enable unrestricted file access.

**no-remote-trace**—(Optional) Disable remote tracing.

|                                 |                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <p><b>system</b>—To view this statement in the configuration.</p> <p><b>system-control</b>—To add this statement to the configuration.</p> |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|

- Related Documentation**
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)
  - *Interfaces Overview for Switches*
  - [Understanding IP Source Guard for Port Security on Switches on page 615](#)
  - *Understanding Redundant Trunk Links (Legacy RTG Configuration)*
  - *Understanding STP*
  - *Understanding Bridging and VLANs on Switches*

## traceoptions (DDoS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i>&gt; &lt;size <i>maximum-file-size</i>&gt;         &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i>;     level (all   error   info   notice   verbose   warning);     no-remote-trace; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>     | [edit system <a href="#">ddos-protection</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 11.2 for MX Series routers with MPCs.</p> <p>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches, and T4000 routers with FPC5s.</p> <p>Statement introduced in Junos OS Release 14.1X53 on QFX Series switches.</p> <p>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>         | Define tracing operations for DDoS protection processes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>             | <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the filename within quotation marks. All files are placed in the directory <code>/var/log</code>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files to create before overwriting the oldest one. If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000</p> <p><b>Default:</b> 3 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. You can include the following flags:</p> <ul style="list-style-type: none"> <li>• <b>all</b>—Trace all operations.</li> <li>• <b>config</b>—Trace processing of the DDoS configuration at an extensive level.</li> <li>• <b>events</b>—Trace jddosd event processing; currently only exit events are traced.</li> <li>• <b>gres</b>—Trace messages exchanged with the kernel and jddosd process that could affect graceful Routing Engine switchover (GRES).</li> <li>• <b>init</b>—Trace jddosd initialization.</li> <li>• <b>ipc</b>—Trace interface interprocess communication (IPC) messages.</li> <li>• <b>memory</b>—Trace memory management code. This flag is not currently supported.</li> <li>• <b>protocol</b>—Trace DDoS protocol state processing. Only the violation state is currently traced.</li> <li>• <b>rtsock</b>—Trace messages exchanged with the kernel and jddosd process.</li> <li>• <b>signal</b>—Trace system signals that are passed to jddosd, such as SIGTERM.</li> </ul> |

- **socket**—Trace socket messages that are passed to jddosd from the Packet Forwarding Engine.
- **state**—Trace state machine events. This flag is not currently supported.
- **timer**—Trace jddosd timer events.
- **ui**—Trace user interface processing. This flag is not currently supported.

**level**—Level of tracing to perform. You can specify any of the following levels:

- **all**—Match all levels.
- **error**—Match error conditions.
- **info**—Match informational messages.
- **notice**—Match notice messages about conditions requiring special handling.
- **verbose**—Match verbose messages.
- **warning**—Match warning messages.

**match *regular-expression***—(Optional) Refine the output to include lines that contain the regular expression.

**no-remote-trace**—Disable remote tracing.

**no-world-readable**—(Optional) Disable unrestricted file access.

**size *maximum-file-size***—(Optional) Maximum size of each trace file. By default, the number entered is treated as bytes. Alternatively, you can include a suffix to the number to indicate kilobytes (KB), megabytes (MB), or gigabytes (GB). If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** *sizek* to specify KB, *sizem* to specify MB, or *sizeg* to specify GB

**Range:** 10,240 through 1,073,741,824

**world-readable**—(Optional) Enable unrestricted file access.

|                                 |                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | trace—To view this statement in the configuration.<br>trace-control—To add this statement to the configuration. |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Tracing DDoS Protection Operations on page 68</a></li></ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------|

## traceoptions (DHCP)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i> &gt; &lt;size <i>maximum-file-size</i>&gt;         &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i>;     level (all   error   info   notice   verbose   warning);     no-remote-trace; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>     | [edit system processes dhcp-service]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 11.4.</p> <p>Statement introduced in Junos OS Release 12.1 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>         | <p>Define global tracing operations for extended DHCP local server and extended DHCP relay agent processes.</p> <p>This statement replaces the deprecated <b>traceoptions</b> statements at the [edit forwarding-options dhcp-relay] and [edit system services dhcp-local-server] hierarchy levels.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>             | <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files to create before overwriting the oldest one. If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000</p> <p><b>Default:</b> 3 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements:</p> <ul style="list-style-type: none"> <li>• <b>all</b>—Trace all events.</li> <li>• <b>auth</b>—Trace authentication events.</li> <li>• <b>database</b>—Trace database events.</li> <li>• <b>fwd</b>—Trace firewall process events.</li> <li>• <b>general</b>—Trace miscellaneous events.</li> <li>• <b>ha</b>—Trace high availability-related events.</li> <li>• <b>interface</b>—Trace interface operations.</li> <li>• <b>io</b>—Trace I/O operations.</li> <li>• <b>liveness-detection</b>—Trace liveness detection operations.</li> <li>• <b>packet</b>—Trace packet and option decoding operations.</li> </ul> |

- **performance**—Trace performance measurement operations.
- **profile**—Trace profile operations.
- **rpd**—Trace routing protocol process events.
- **rtsock**—Trace routing socket operations.
- **security-persistence**—Trace security persistence events.
- **session-db**—Trace session database events.
- **state**—Trace changes in state.
- **statistics**—Trace baseline statistics.
- **ui**—Trace user interface operations.

**level**—Level of tracing to perform; also known as severity level. The option you configure enables tracing of events at that level and all higher (more restrictive) levels. You can specify any of the following levels:

- **all**—Match messages of all levels.
- **error**—Match error messages.
- **info**—Match informational messages.
- **notice**—Match notice messages about conditions requiring special handling.
- **verbose**—Match verbose messages. This is the lowest (least restrictive) severity level; when you configure **verbose**, messages at all higher levels are traced. Therefore, the result is the same as when you configure **all**.
- **warning**—Match warning messages.

**Default:** error

**match *regular-expression***—(Optional) Refine the output to include lines that contain the regular expression.

**no-remote-trace**—Disable remote tracing.

**no-world-readable**—(Optional) Disable unrestricted file access, allowing only the user **root** and users who have the Junos OS **maintenance** permission to access the trace files.

**size *maximum-file-size***—(Optional) Maximum size of each trace file. By default, the number entered is treated as bytes. Alternatively, you can include a suffix to the number to indicate kilobytes (***maximum-file-sizek***), megabytes (***maximum-file-sizem***), or gigabytes (***maximum-file-sizeg***). If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Range:** 10,240 through 1,073,741,824

**Default:** 128 KB

**world-readable**—(Optional) Enable unrestricted file access.



**Required Privilege** trace—To view this statement in the configuration.  
**Level** trace-control—To add this statement to the configuration.

**Related Documentation** • *Tracing Extended DHCP Operations*

## traceoptions (MACsec)

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;<br/>    flag <i>flag</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | [edit security macsec]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b> | <p>Statement introduced in Junos OS Release 15.1 for MIC-3D-20GE-SFP-E on MX Series routers.</p> <p>Statement introduced in Junos OS Release 16.1 for MPC7E-10G on MX Series routers.</p> <p>Statement introduced in Junos OS Release 17.3R2 for JNP-MIC1-MACSEC MIC on MX10003 routers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>         | <p>Define tracing operations at the MACsec level. Tracing operations provide support for debugging protocol-level issues. MACsec is an industry-standard security technology that provides secure communication for almost all types of traffic on Ethernet links. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p>The interfaces <b>traceoptions</b> statement does not support a separate trace file. The logging is done by the kernel, so the tracing information is placed in the <b>syslog</b> file in the directory <b>/var/log/dcd</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Default</b>             | If you do not include this statement, no tracing operations are performed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>             | <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. By default, interface process tracing output is placed in the directory. If you do not specify the name of the trace file, all files are placed in the directory <b>/var/log/dcd</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches the maximum value, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. Values range from 2 through 1000.</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. The following are the tracing operation options:</p> <p><b>all</b>—Trace all operations.</p> <p><b>config</b>—Trace configuration messages.</p> <p><b>debug</b>—Trace debug messages.</p> <p><b>normal</b>—Trace normal messages.</p> <p><b>no-world-readable</b>—(Optional) Prevent any user from reading the log file.</p> |

**size** *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.

**world-readable**—(Optional) Allow any user to read the log file.

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| <b>Required Privilege</b> | admin—To view this statement in the configuration.        |
| <b>Level</b>              | admin-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                                                             |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <i>Understanding Media Access Control Security (MACsec) on MX Series Routers</i></li><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## traceoptions (MACsec interfaces)

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;<br/>    flag <i>flag</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>     | [edit security macsec interfaces <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b> | Statement introduced in Junos OS Release 16.1 for MPC7E-10G on MX Series routers.<br>Statement introduced in Junos OS Release 17.3R2 for JNP-MIC1-MACSEC MIC on MX10003 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>         | <p>Define tracing operations for individual MACsec interfaces. Tracing operations provide support for debugging protocol-level issues. MACsec is an industry-standard security technology that provides secure communication for almost all types of traffic on Ethernet links. To specify more than one tracing operation, include multiple <b>flag</b> statements.</p> <p>The interfaces <b>traceoptions</b> statement does not support a separate trace file. The logging is done by the kernel, so the tracing information is placed in the system <b>syslog</b> file in the directory <b>/var/log/dcd</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Default</b>             | If you do not include this statement, no tracing operations are performed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>             | <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. By default, interface process tracing output is placed in the directory. If you do not specify the name of the tracefile, all files are placed in the directory <b>/var/log/dcd</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches the maximum value, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten. Values range from 2 through 1000.</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. The following are the tracing operation options:</p> <p><b>all</b>—Trace all operations.</p> <p><b>keys</b>—Trace key creation or generation information.</p> <p><b>mka-packets</b>—Trace MACsec Key Agreement (MKA) protocol input and output packet information.</p> <p><b>normal</b>—Trace all normal events and messages.</p> <p><b>state</b>—Trace MKA protocol state information.</p> <p><b>to-secy</b>—Trace MKA to security entity state change information.</p> |

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size** *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.

**world-readable**—(Optional) Allow any user to read the log file.

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| <b>Required Privilege</b> | admin—To view this statement in the configuration.        |
| <b>Level</b>              | admin-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                                                             |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <i>Understanding Media Access Control Security (MACsec) on MX Series Routers</i></li><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## transmit-interval (MACsec)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | transmit-interval <i>interval</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit security <a href="#">macsec connectivity-association connectivity-association-name mka</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Specifies the transmit interval for MACsec Key Agreement (MKA) protocol data units (PDUs).</p> <p>The MKA transmit interval setting sets the frequency for how often the MKA PDU is sent to the directly connected device to maintain MACsec on a point-to-point Ethernet link. A lower <i>interval</i> increases bandwidth overhead on the link; a higher <i>interval</i> optimizes the MKA protocol data unit exchange process.</p> <p>The transmit interval settings must be identical on both ends of the link when MACsec using static connectivity association key (CAK) security mode is enabled.</p> <p>We recommend increasing the interval to 6000 ms in high-traffic load environments.</p> |
| <b>Default</b>                  | The default transmit interval is 2000 milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <i>interval</i> —Specifies the transmit interval, in milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Media Access Control Security (MACsec) on page 413</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## transmit-interval (MACsec for MX Series)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>transmit-interval <i>interval</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> mka]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Specifies the transmit interval for MACsec Key Agreement (MKA) protocol data units (PDUs).</p> <p>The MKA transmit interval setting sets the frequency for how often the MKA PDU is sent to the directly connected device to maintain MACsec on a point-to-point Ethernet link. A lower <i>interval</i> increases bandwidth overhead on the link; a higher <i>interval</i> optimizes the MKA protocol data unit exchange process.</p> <p>The transmit interval settings must be identical on both ends of the link when MACsec using static connectivity association key (CAK) security mode is enabled.</p> <p>We recommend increasing the interval to 6000 ms in high-traffic load environments.</p> |
| <b>Default</b>                  | The default transmit interval is 2000 milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <i>interval</i> —Specifies the transmit interval, in milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## trusted

---

|                                 |                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | trusted;                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit bridge domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security group</b> <i>group-name overrides</i> ]                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                  |
| <b>Description</b>              | Allow DHCP responses from the specified interface.                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases (CLI Procedure) on page 550</a></li><li>• <a href="#">Understanding Trusted DHCP Servers for Port Security on page 537</a></li></ul> |


## trusted (DHCP Security)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | trusted;                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security group</b> <i>group-name overrides</i> ]                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Statement introduced in Junos OS Release 13.2 for the QFX series.                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Specify that the interface in this group is trusted. DHCP snooping and DHCPv6 snooping do not apply to the trusted interface, even if the VLAN is enabled for DHCP or DHCPv6 snooping. Likewise, DAI, IP source guard, IPv6 source guard, and IPv6 neighbor discovery inspection—even if they are enabled for the VLAN—do not apply to the interface that is configured with the <b>overrides</b> and the <b>trusted</b> options. Access interfaces are untrusted by default. |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Enabling a Trusted DHCP Server (CLI Procedure) on page 318</a></li><li>• <a href="#">Understanding Trusted DHCP Servers for Port Security on page 537</a></li><li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li></ul>                                                                                                                        |



## unknown-unicast-forwarding

|                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                           | <pre>unknown-unicast-forwarding {   vlan <i>vlan-name</i> {     interface <i>interface-name</i>;   } }</pre>                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>For platforms with ELS:<br/>[edit switch-options]</li> <li>For platforms without ELS:<br/>[edit <a href="#">ethernet-switching-options</a>]</li> </ul>                                                                                                                                                                                                                 |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                              | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 13.2 for the QFX Series.</p> <p>Hierarchy level [edit switch-options] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> |
| <b>Description</b>                                                                                                                                                                                                                                                                                                      | <p>Configure the switch to forward all unknown unicast packets in a VLAN or on all VLANs to a particular interface.</p>                                                                                                                                                                                                                                                                                       |
| <div>  <p><b>NOTE:</b> Before you can configure unknown unicast forwarding within a VLAN, you must first configure that VLAN.</p> </div> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Default</b>                                                                                                                                                                                                                                                                                                          | Unknown unicast packets are flooded to all interfaces that belong to the same VLAN.                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                         | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li><a href="#">show vlans</a></li> <li><a href="#">show ethernet-switching table on page 1174</a></li> <li><a href="#">Configuring Unknown Unicast Forwarding (CLI Procedure) on page 641</a></li> <li><a href="#">Understanding Unknown Unicast Forwarding on page 639</a></li> </ul>                                                                                    |

## untrusted

---

|                                 |                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | untrusted;                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security group</b> <i>group-name</i> <b>overrides</b> ]                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 13.2 for EX Series switches.                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | (EX9200 only) Override the default behavior of a trunk interface from trusted to untrusted.                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Enabling a Trusted DHCP Server (CLI Procedure) on page 318</a></li><li>• <a href="#">Understanding Trusted DHCP Servers for Port Security on page 537</a></li><li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li></ul> |

## untrusted

---

|                                 |                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | untrusted;                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit bridge domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security group</b> <i>group-name</i> <b>overrides</b> ]                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                  |
| <b>Description</b>              | Allow DHCP responses from the specified interface.                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring a DHCP Server on a Trusted Interface to Protect it Against Rogue DHCP Servers Sending Leases (CLI Procedure) on page 550</a></li><li>• <a href="#">Understanding Trusted DHCP Servers for Port Security on page 537</a></li></ul> |

## url (Security)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>url <i>url-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit security pki ca-profile <i>ca-profile-name</i> <a href="#">enrollment</a> ],<br>[edit security pki ca-profile <i>ca-profile-name</i> revocation-check <code>crl</code> ]                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | (Supported on Adaptive Services (AS) and MultiServices PICs only.) Specify the certificate authority (CA) URL to use in requesting digital certificates or the URL for the Lightweight Directory Access Protocol (LDAP) location from which the certificate revocation list (CRL) is retrieved.                                                                                                                     |
| <b>Options</b>                  | <p><b><i>url-name</i></b>—Location of the CA to which enrollment requests are sent or LDAP location of the CRL. With Simple Certificate Enrollment Protocol (SCEP), you enroll CA certificates with the <b>request security pki ca-certificate enroll</b> command and specify the CA profile. There is no separate command to enroll CA certificates with CMPv2.</p> <p>The format of the URL is protocol http.</p> |
| <b>Required Privilege Level</b> | <p>admin—To view the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Specifying an Enrollment URL on page 20</a></li> <li>• <a href="#">Specifying an LDAP URL on page 21</a></li> <li>• <a href="#">crl on page 706</a></li> </ul>                                                                                                                                                                                                 |

## use-interface-description

|                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                             | <code>use-interface-description (device   logical);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>For Platforms with Enhanced Layer 2 Software (ELS)</b> | <code>[edit vlans <i>vlan-name</i> forwarding-options dhcp-security option-82 circuit-id]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>For Platforms Without ELS</b>                          | <code>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>) dhcp-option82 circuit-id],</code><br><code>[edit forwarding-options helpers bootp dhcp-option82 circuit-id],</code><br><code>[edit forwarding-options helpers bootp interface <i>interface-name</i> dhcp-option82 circuit-id],</code><br><code>[edit ethernet-switching-options secure-access-port vlan (all   <i>vlan-name</i>) dhcp-option82 remote-id],</code><br><code>[edit forwarding-options helpers bootp dhcp-option82 remote-id],</code><br><code>[edit forwarding-options helpers bootp interface <i>interface-name</i> dhcp-option82 remote-id]</code>                                                                                                           |
| <b>For MX Series Platforms</b>                            | <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security option-82circuit-id]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>                                | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Hierarchy level <code>[edit vlans <i>vlan-name</i> forwarding-options dhcp-security]</code> introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Hierarchy level <code>[edit bridge-domains <i>bridge domain name</i> forwarding-options dhcp-security]</code> introduced in Junos OS Release 14.1 for the MX Series.</p>                                                                                                                                                                                                      |
| <b>Description</b>                                        | <p>Use the interface description rather than the interface name (which is the default value) in the circuit ID or remote ID value in the DHCP option 82 information.</p> <p>The textual description is configured using the <b>description</b> statement at the <code>[edit interfaces <i>interface-name</i>]</code> hierarchy level. If you specify that the textual description be used and no description is configured for the interface, DHCP relay defaults to using the Layer 2 interface name. When you use the interface description rather than the interface name, the interface description has to be specified under interface unit ("set interfaces ge-0/0/0 unit 0 description "client"). If you do not do this, then the interface name is used.</p> |
| <b>Options</b>                                            | <p><b>device</b>—Use the device interface description. Only available for MX Series platform configuration.</p> <p><b>logical</b>—Use the logical interface description. Only available for MX Series platform configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b>                           | <p><b>system</b>—To view this statement in the configuration.</p> <p><b>system-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Related  
Documentation**

- Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500
- Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497
- Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 528
- Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 508
- Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 313
- Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>

## use-interface-description

**Syntax** use-interface-description (logical | device);

**Hierarchy Level** [edit forwarding-options dhcp-relay dhcpv6 (relay-agent-interface-id | relay-agent-remote-id)],  
 [edit forwarding-options dhcp-relay dhcpv6 group *group-name* (relay-agent-interface-id | relay-agent-remote-id)],  
 [edit forwarding-options dhcp-relay relay-option-82 (circuit-id | remote-id)],  
 [edit forwarding-options dhcp-relay group *group-name* relay-option-82 (circuit-id | remote-id)],  
 [edit logical-systems *logical-system-name* ... forwarding-options dhcp-relay dhcpv6 (relay-agent-interface-id | relay-agent-remote-id)],  
 [edit logical-systems *logical-system-name* ... forwarding-options dhcp-relay ... relay-option-82 (circuit-id | remote-id)],  
 [edit routing-instances *routing-instance-name* forwarding-options dhcp-relay dhcpv6 (relay-agent-interface-id | relay-agent-remote-id)],  
 [edit routing-instances *routing-instance-name* forwarding-options dhcp-relay ... relay-option-82 (circuit-id | remote-id)],  
 [edit vlans *vlan-name* forwarding-options dhcp-security dhcpv6-options [option-18](#)],  
 [edit vlans *vlan-name* forwarding-options dhcp-security dhcpv6-options [option-37](#)]

**Release Information** Statement introduced in Junos OS Release 9.6.  
 Support at the [edit ... **dhcpv6**] hierarchy levels introduced in Junos OS Release 11.4.  
 Statement introduced in Junos OS Release 12.3 for EX Series switches.  
 Support at the [edit ... **relay-agent-remote-id**] and [edit ... **remote-id**] hierarchy levels introduced in Junos OS Release 14.1.  
 Support at the [edit vlans *vlan-name* dhcp-security dhcpv6-options [option-18](#)] and [edit vlans *vlan-name* dhcp-security dhcpv6-options [option-37](#)] hierarchy levels introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Use the textual interface description instead of the interface identifier in the DHCP base option 82 Agent Circuit ID (suboption 1) or Agent Remote ID (suboption 2) information, or in the DHCPv6 option 18 (Relay Agent Interface ID) or option 37 (Relay Agent Remote ID) information in DHCP packets that the DHCP relay agent sends to a DHCP server.



**NOTE:** For integrated routing and bridging (IRB) interfaces, the option 82 field must be able to uniquely identify the incoming interface based on either the Agent Circuit ID or Agent Remote ID. You can modify the information in the textual interface description to match the raw IFD (physical interface without a subunit) name and configure the option 82 field to use the interface description.

The textual description is configured using the **description** statement at the [edit **interfaces interface-name**] hierarchy level. If you specify that the textual description be used and no description is configured for the interface, DHCP relay defaults to using the Layer 2 interface name. When you use the interface description rather than the interface name,

the interface description has to be specified under interface unit ("set interfaces ge-0/0/0 unit 0 description "client"). If you do not do this, then the interface name is used.

In the case of integrated routing and bridging (IRB) interfaces, the textual description of the Layer 2 interface is used instead of the IRB interface. If there is no description configured, the Layer 2 logical interface name is used. To include the IRB interface description instead of the Layer 2 interface description, configure the **use-interface-description** and the **no-vlan-interface-name** statements. If no description is configured for the IRB interface, DHCP relay defaults to using the IRB interface name.



**NOTE:** The **use-interface-description** statement is mutually exclusive with the **use-vlan-id** statement.

If you specify the textual interface description, rather than accepting the default syntax, the identification is for packets returned from the server, and only for instances where that identification would be required by the DHCP relay, such as a stateless pass-through.



**NOTE:** By default, DHCP relay accepts a maximum of 253 ASCII characters. If the textual interface description exceeds 253 characters, DHCP relay drops the packet, which results in the DHCP client failing to bind.

**Options**    **logical**—Use the textual description that is configured for the logical interface.  
               **device**—Use the textual description that is configured for the device interface.

**Required Privilege Level**    interface—To view this statement in the configuration.  
                                       interface-control—To add this statement to the configuration.

**Related Documentation**

- *Including a Textual Description in DHCP Options*
- *Using DHCP Relay Agent Option 82 Information*
- *Configuring DHCPv6 Relay Agent Options*

## use-interface-index

---

|                                 |                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>use-interface-index (logical   device);</code>                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options dhcp-security dhcpv6-options <a href="#">option-18</a> ],<br>[edit vlans <i>vlan-name</i> forwarding-options dhcp-security dhcpv6-options <a href="#">option-37</a> ],                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                           |
| <b>Description</b>              | Use the index number of the interface instead of the interface name in the DHCPv6 option 18 (Relay Agent Interface-ID) or option 37 (Relay Agent Remote-ID). These options are used by a relay agent to insert information in DHCPv6 requests before the relay agent forwards them to a DHCPv6 server. |
| <b>Options</b>                  | <b>logical</b> —Use the textual description that is configured for the logical interface.<br><br><b>device</b> —Use the textual description that is configured for the device interface.                                                                                                               |
| <b>Required Privilege Level</b> | <b>interface</b> —To view this statement in the configuration.<br><b>interface-control</b> —To add this statement to the configuration.                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Including a Textual Description in DHCP Options</i></li><li>• <i>Using DHCP Relay Agent Option 82 Information</i></li><li>• <i>Configuring DHCPv6 Relay Agent Options</i></li></ul>                                                                         |



## use-interface-name

---

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | use-interface-name (logical   device);                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit vlans <i>vlan-name</i> forwarding-options dhcp-security dhcpv6-options <a href="#">option-18</a> ],<br>[edit vlans <i>vlan-name</i> forwarding-options dhcp-security dhcpv6-options <a href="#">option-37</a> ],             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                       |
| <b>Description</b>              | Configure DHCPv6 option 18 (Relay Agent Interface-ID) or option 37 (Relay Agent Remote-ID) to use the interface name to identify the port identity of the DHCP client to the DHCP server.                                          |
| <b>Options</b>                  | <p><b>logical</b>—Use the name that is configured for the logical interface.</p> <p><b>device</b>—Use the name that is configured for the device interface.</p>                                                                    |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Including a Textual Description in DHCP Options</i></li> <li>• <i>Using DHCP Relay Agent Option 82 Information</i></li> <li>• <i>Configuring DHCPv6 Relay Agent Options</i></li> </ul> |




## use-string

---

|                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                             | <code>use-string <i>string</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>For Platforms with Enhanced Layer 2 Software (ELS)</b> | <code>[edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security option-82 remote-id</b>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>For Platforms Without ELS</b>                          | <code>[edit <b>ethernet-switching-options secure-access-port</b> vlan (all   <i>vlan-name</i>) <b>dhcp-option82 remote-id</b>],</code><br><code>[edit forwarding-options helpers bootp <b>dhcp-option82 remote-id</b>],</code><br><code>[edit forwarding-options helpers bootp interface <i>interface-name</i> <b>dhcp-option82 remote-id</b>]</code>                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>For MX Series Platforms</b>                            | <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security option-82 circuit-id</b>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>                                | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Hierarchy level <code>[edit vlans <i>vlan-name</i> forwarding-options <b>dhcp-security</b>]</code> introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Hierarchy level <code>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security</b>]</code> introduced in Junos OS Release 14.1 for the MX Series.</p>                                                                                                                                                               |
| <b>Description</b>                                        | Use a string rather than the MAC address of the host system (the default) in the remote ID value in the DHCP option 82 information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                                            | <p><b>string</b>—Character string used as the remote ID value.</p> <p><b>Range:</b> 1–255 characters</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b>                           | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>                              | <ul style="list-style-type: none"><li>• <a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li><li>• <a href="#">Understanding DHCP Option 82 for Protecting Switching Devices Against Attacks on page 524</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li><li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497</a></li><li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 528</a></li></ul> |

- Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 508
- Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 313
- RFC 3046, *DHCP Relay Agent Information Option*, at <http://tools.ietf.org/html/rfc3046>

## use-vlan-id

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <code>use-vlan-id;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>For Platforms with Enhanced Layer 2 Software (ELS)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <p>[edit forwarding-options helpers bootp dhcp-option82-circuit-id]<br/> [edit forwarding-options helpers bootp interface <i>interface-name</i> dhcp-option82-circuit-id]</p>                                                                                                                                                                                                                                                                                                                                                                       |
| <b>For MX Series Platforms</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <b>dhcp-security option-82 circuit-id</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p>Statement introduced in Junos OS Release 9.3 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p> <p>Hierarchy level <b>[edit vlans <i>vlan-name</i> forwarding-options dhcp-security]</b> introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)</p> <p>Hierarchy level <b>[edit bridge-domains <i>bridge-domain-name</i> forwarding-options dhcp-security]</b> introduced in Junos OS Release 14.1 for the MX Series.</p> |
| <div>  <p><b>NOTE:</b> The EX Series switches that support the <code>use-vlan-id</code> statement are the EX4300, EX4600, and EX9200 switches.</p> </div>                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Use the VLAN ID rather than the VLAN name (the default) in the circuit ID or remote ID value in the DHCP option 82 information.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <div>  <p><b>NOTE:</b> The <code>use-vlan-id</code> statement is mutually exclusive with the <code>use-interface-description</code> and <code>no-vlan-interface-name</code> statements.</p> </div> <p>The <code>use-vlan-id</code> statement only applies to interfaces in a bridge domain. The format of the Agent Circuit ID or Agent Remote ID information for Fast Ethernet or Gigabit Ethernet interfaces is as follows:</p> <pre>(fe   ge)-fpc/pic/port.subunit:svlan_id-vlan_id</pre> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <div>  <p><b>NOTE:</b> The <i>subunit</i> is required and used to differentiate the interface for remote systems, and <i>svlan_id-vlan_id</i> represents the VLANs associated with the bridge domain.</p> </div>                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                      |

- |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li> <li>• <a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497</a></li> <li>• <a href="#">Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 528</a></li> <li>• <a href="#">Setting Up DHCP Option 82 with the Switch as a Relay Agent Between Clients and DHCP Server (CLI Procedure) on page 508</a></li> <li>• RFC 3046, <i>DHCP Relay Agent Information Option</i>, at <a href="http://tools.ietf.org/html/rfc3046">http://tools.ietf.org/html/rfc3046</a>.</li> </ul> |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## validity-period

---

|                                 |                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>validity-period days;</code>                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit security pki auto-re-enrollment certificate-id]                                                                                                                                                                                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.5.                                                                                                                                                                                                     |
| <b>Description</b>              | Certificate validity period, in days, from the enrollment start date. If not specified, the issuing certificate authority (CA) sets this time as per its own policy. The start time is when auto-reenrollment is initiated.                       |
| <b>Options</b>                  | <p><b>days</b>—Number of days that the certificate is valid.</p> <p><b>Range:</b> 1 through 4095 days</p> <p><b>Default:</b> Per CA policy</p>                                                                                                    |
| <b>Required Privilege Level</b> | <p>admin—To view this statement in the configuration.</p> <p>admin-control—To add this statement to the configuration.</p>                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Auto-Reenrollment Properties for Automatic Renewal of the Router Certificate from the CA on page 24</a></li> <li>• <a href="#">auto-re-enrollment on page 678</a></li> </ul> |

## vendor-id

|                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                             | <code>vendor-id &lt;string&gt;;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>For Platforms with Enhanced Layer 2 Software (ELS)</b> | [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security option-82</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>For Platforms Without ELS</b>                          | [edit <a href="#">ethernet-switching-options secure-access-port vlan</a> (all   <i>vlan-name</i> ) <a href="#">dhcp-option82</a> ],<br>[edit forwarding-options helpers bootp <a href="#">dhcp-option82</a> ],<br>[edit forwarding-options helpers bootp interface <i>interface-name</i> <a href="#">dhcp-option82</a> ]                                                                                                                                                                                                                                                                                                         |
| <b>For MX Series Platforms</b>                            | [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <a href="#">dhcp-security option-82</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                                | Statement introduced in Junos OS Release 9.3 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.<br>Hierarchy level [edit vlans <i>vlan-name</i> forwarding-options <a href="#">dhcp-security</a> ] introduced in Junos OS Release 13.2X50-D10. (See <i>Using the Enhanced Layer 2 Software CLI</i> for information about ELS.)<br>Hierarchy level [edit bridge-domains <i>bridge-domain-name</i> forwarding-options <a href="#">dhcp-security</a> ] introduced in Junos OS Release 14.1 for the MX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>                                        | Insert a vendor ID in the DHCP option 82 information in a DHCP request packet header before forwarding or relaying the request to a DHCP server.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Default</b>                                            | If <b>vendor-id</b> is not explicitly configured for DHCP option 82, then no vendor ID is set.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                                            | <b>string</b> —(Optional) A single string that designates the vendor ID.<br><br><b>Range:</b> 1–255 characters<br><br><b>Default:</b> If you specify <b>vendor-id</b> with no <b>string</b> value, then the default vendor ID <b>Juniper Networks</b> is configured.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b>                           | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>                              | <ul style="list-style-type: none"> <li><a href="#">Configuring DHCP Option 82 to Help Protect the Switching Devices Against Attacks (CLI Procedure) on page 551</a></li> <li><a href="#">Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500</a></li> <li><a href="#">Example: Setting Up DHCP Option 82 with a Switch as a Relay Agent Between Clients and a DHCP Server on page 497</a></li> </ul>                                                                                                                                                              |

- [Setting Up DHCP Option 82 on the Switch with No Relay Agent Between Clients and DHCP Server \(CLI Procedure\)](#) on page 313

## violation-report-rate (DDoS Flow Detection)

|                                 |                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>violation-report-rate <i>report-rate</i>;</code>                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit system ddos-protection <a href="#">global</a> ]                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.3.<br>Statement introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                                                 |
| <b>Description</b>              | (MX Series routers with only MPCs, T4000 Core Routers with only FPC5s, or EX9200 switches) Limit the rate at which bandwidth violations (violation reports) are reported from an FPC to the Routing Engine, for all protocol groups and packet types on all line cards. |
| <b>Options</b>                  | <b><i>report-rate</i></b> —Number of violations per second.<br><b>Range:</b> 1 through 50,000<br><b>Default:</b> 100                                                                                                                                                    |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring the Violation Reporting Rate for All Protocol Groups and Packet Types</a> on page 80</li> <li>• <a href="#">Configuring Flow Detection for DDoS Protection</a> on page 77</li> </ul>                   |

## vlan (Access Port Security)

**Syntax** `vlan` (all | *vlan-name*) {  
     (`arp-inspection` | `no-arp-inspection`) {  
         `forwarding-class` *class-name*;  
     }  
     `dhcp-option82` {  
         `circuit-id` {  
             `prefix` *hostname*;  
             `use-interface-description`;  
             `use-vlan-id`;  
         }  
         `remote-id` {  
             `prefix` *hostname* | *mac* | *none*;  
             `use-interface-description`;  
             `use-string` *string*;  
         }  
         `vendor-id` <*string*>;  
     }  
     (`examine-dhcp` | `no-examine-dhcp`) {  
         `forwarding-class` *class-name*;  
     }  
     (`examine-dhcpv6` | `no-examine-dhcpv6`) {  
         `forwarding-class` *class-name*;  
     }  
     `examine-fip` {  
         `fc-map` *fc-map-value*;  
     }  
     (`ip-source-guard` | `no-ip-source-guard`);  
     (`ipv6-source-guard` | `no-ipv6-source-guard`);  
     `mac-move-limit` *limit* *action* (`drop` | `log` | `none` | `shutdown`);  
     }  
     (`neighbor-discovery-inspection` | `no-neighbor-discovery-inspection`);  
     `no-option37`;  
 }

**Hierarchy Level** [edit `ethernet-switching-options secure-access-port`]

**Release Information** Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Support for the `examine-dhcpv6`, `no-option37`, `neighbor-discovery-inspection`, and `ipv6-source-guard` statements introduced in Junos OS Release 14.1x53-D10 for EX Series switches.

**Description** Apply any of the following security options to a VLAN:

- DHCP snooping
- DHCPv6 snooping with DHCP option 37
- DHCP option 82
- Dynamic ARP inspection (DAI)
- IPv6 neighbor discovery inspection



- FIP snooping
- IP source guard
- IPv6 source guard
- MAC move limiting

The remaining statements are explained separately. See [CLI Explorer](#).



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after `vlan` or `vlangs` in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.

**Options** `all`—Apply the feature to all VLANs.

`vlan-name`—Apply the feature to the specified VLAN.

**Required Privilege Level** `system`—To view this statement in the configuration.  
`system-control`—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring Basic Port Security Features on page 289](#)
- [Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces on page 478](#)
- [Example: Setting Up DHCP Option 82 with a Switch with No Relay Agent Between Clients and a DHCP Server on page 500](#)
- [Example: Configuring an FCoE Transit Switch](#)

## vlan (DHCP Bindings on Access Ports)

---

|                                 |                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>vlan <i>vlan-name</i>;</code>                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit <code>ethernet-switching-options secure-access-port interface</code> (all   <i>interface-name</i> ) <code>static-ip ip-address</code> ]                                |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 9.2 for EX Series switches.                                                                                                         |
| <b>Description</b>              | Associate the static IP address with the specified VLAN associated with the specified interface.                                                                             |
| <b>Options</b>                  | <i>vlan-name</i> —Name of a specific VLAN associated with the specified interface.                                                                                           |
| <b>Required Privilege Level</b> | system—To view this statement in the configuration.<br>system-control—To add this statement to the configuration.                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure)</a> on page 533</li></ul> |

## vlands (RA Guard)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>vlands (<i>vlan-name</i>   all) {<br/>    <i>policy</i> <i>policy-name</i> (stateful   stateless);<br/>}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit forwarding-options <a href="#">access-security router-advertisement-guard</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Statement introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | <p>Configure IPv6 Router Advertisement (RA) guard on a VLAN. In an IPv6 deployment, RA guard protects against rogue RA messages generated either maliciously or unintentionally by unauthorized or improperly configured routers connecting to the network segment. An RA guard policy is used to validate incoming RA messages on the basis of whether they match the conditions defined in a policy.</p> <p>Before you can configure RA guard on a VLAN, you must first configure a policy at the [edit forwarding-options <a href="#">access-security router-advertisement-guard</a>] hierarchy level. The policy is then applied to the VLAN at the [edit forwarding-options <a href="#">access-security router-advertisement-guard vlands <i>vlan-name</i></a>] hierarchy level.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p> |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Stateless IPv6 Router Advertisement Guard on Switches on page 324</a></li> <li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## vlan (Secure Access Port)

```
Syntax vlan (all | vlan-name) {
 examine-fip {
 examine-vn2vn {
 beacon-period milliseconds;
 }
 fc-map fc-map-value;
 no-fip-snooping-scaling;
 }
 dhcp-option82
 circuit-id {
 prefix (Circuit ID for Option 82) hostname;
 use-interface-description;
 use-vlan-id;
 }
 remote-id {
 prefix (Remote ID for Option 82) hostname | mac | none;
 use-interface-description;
 use-string string;
 }
 vendor-id <string>;
 }
 (arp-inspection | no-arp-inspection);
 circuit-id {
 prefix (Circuit ID for Option 82) hostname;
 use-interface-description;
 use-vlan-id;
 }
 remote-id {
 prefix (Remote ID for Option 82) hostname | mac | none;
 use-interface-description;
 use-string string;
 }
 vendor-id <string>;
 }
 (examine-dhcp | no-examine-dhcp);
 mac-move-limit limit action action;
}
```

**Hierarchy Level** [edit [ethernet-switching-options](#) secure-access-port]

**Release Information** Statement introduced in Junos OS Release 11.1 for the QFX Series.

**Description** Apply DHCP snooping, dynamic ARP inspection (DAI), DHCP option 82, and MAC move limiting.



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after vlan or vlans in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.

The remaining statements are explained separately. See [CLI Explorer](#).

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <b>all</b> —Apply DHCP snooping, DAI, DHCP option 82, and MAC move limiting to all VLANs.                                                                                                                                                                                                                                                                                                                                                             |
|                                 | <b>vlan-name</b> —Apply DHCP snooping, DAI, DHCP option 82, and MAC move limiting to the specified VLAN.                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                 | routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Overview of Access Port Protection on page 270</a></li> <li>• <a href="#">Understanding MAC Limiting and MAC Move Limiting for Port Security on page 299</a></li> <li>• <a href="#">Understanding Trusted and Untrusted Ports on page 307</a></li> <li>• <a href="#">Configuring MAC Limiting on page 434</a></li> <li>• <a href="#">Enabling a Trusted Port for DHCP on page 456</a></li> </ul> |

## vlan (Static IP)

|                                 |                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>vlan <i>vlan-name</i>;</code>                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit <a href="#">ethernet-switching-options</a> secure-access-port <a href="#">interface</a> (all   <i>interface-name</i> ) static-ip <i>ip-address</i> ]                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 12.1 for the QFX Series switches.                                                                                                     |
| <b>Description</b>              | Associate a static IP address with the specified VLAN.                                                                                                                         |
| <b>Options</b>                  | <b>vlan-name</b> —Name of a VLAN associated with the specified interface.                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.                                                                                                                           |
|                                 | routing-control—To add this statement to the configuration.                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Static IP Addresses in the DHCP Snooping Database for Access Ports (CLI Procedure) on page 533</a></li> </ul> |

## vlan (Unknown Unicast Forwarding)

---

**Syntax**    `vlan (all | vlan-name) {  
                  interface \(Unknown Unicast Forwarding\) interface-name;  
                  }`

**Hierarchy Level**    [edit [ethernet-switching-options unknown-unicast-forwarding](#)]

**Release Information**    Statement introduced in Junos OS Release 9.3 for EX Series switches.  
Statement updated with enhanced ? (CLI completion feature) functionality in Junos OS Release 9.5 for EX Series switches.

**Description**    Specify a VLAN from which unknown unicast packets will be forwarded or specify that the packets will be forwarded from all VLANs. Unknown unicast packets are forwarded from a VLAN to a specific trunk interface.

The **interface** statement is explained separately.



**TIP:** To display a list of all configured VLANs on the system, including VLANs that are configured but not committed, type ? after `vlan` or `vlangs` in your configuration mode command line. Note that only one VLAN is displayed for a VLAN range.

**Options**    `all`—All VLANs.

***vlan-name***—Name of a VLAN.

**Required Privilege Level**    `system`—To view this statement in the configuration.  
                                  `system-control`—To add this statement to the configuration.

**Related Documentation**

- [show vlans](#)
- [show ethernet-switching table on page 1174](#)
- [Configuring Unknown Unicast Forwarding \(CLI Procedure\) on page 640](#)
- [Verifying That Unknown Unicast Packets Are Forwarded to a Trunk Interface on page 645](#)
- [Understanding Unknown Unicast Forwarding on page 639](#)

---

## voip-mac-exclusive

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | voip-mac-exclusive;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | [edit ethernet-switching-options secure-access-port interface (all   <i>interface-name</i> )]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Statement introduced in JUNOS Release 13.2X50-D10.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Restrict a VoIP client MAC address to be learned only in a configured VoIP VLAN.</p> <p>If the <b>voip-exclusive-mac</b> statement is configured at the [edit ethernet-switching-options secure-access-port interface <i>interface-name</i>] hierarchy level for an interface in a VoIP VLAN, any MAC address learned on that interface for the VoIP VLAN is not learned on an interface for a data VLAN. If a MAC address has been learned on a data VLAN interface and then later, is learned on a VoIP VLAN with that same interface, the MAC address is removed from the data VLAN interface.</p> |
| <b>Default</b>                  | A client MAC address is unrestricted and can be learned on both a VoIP VLAN and a data VLAN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Port Security (CLI Procedure) on page 284</a></li><li>• <a href="#">secure-access-port on page 964</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                         |

## write-interval

---

|                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                             | <code>write-interval seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>For Platforms with Enhanced Layer 2 Software (ELS)</b> | [edit system processes <a href="#">dhcp-service dhcp-snooping-file</a> ],<br>[edit system processes <a href="#">dhcp-service dhcpv6-snooping-file</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>For Platforms Without ELS</b>                          | [edit <a href="#">ethernet-switching-options secure-access-port dhcp-snooping-file</a> ],<br>[edit <a href="#">ethernet-switching-options secure-access-port dhcpv6-snooping-file</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>For MX Series Platforms</b>                            | [edit system processes <a href="#">dhcp-service dhcp-snooping-file</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>                                | <p>Statement introduced in Junos OS Release 9.4 for EX Series switches.</p> <p>Support at the [edit system processes <a href="#">dhcp-service dhcp-snooping-file</a>] hierarchy level introduced in Junos OS Release 13.2X50-D10.</p> <p>Support at the [edit system processes <a href="#">dhcp-service dhcpv6-snooping-file</a>] hierarchy level introduced in Junos OS Release 13.2X51-D20.</p> <p>Statement introduced in Junos OS Release 14.1 for the MX Series.</p> <p>Support at the [edit <a href="#">ethernet-switching-options secure-access-port dhcpv6-snooping-file</a>] hierarchy level introduced in Junos OS Release 14.1X53-D10 for EX Series switches.</p> |
| <b>Description</b>                                        | <p>Specify how frequently the device writes the database entries from memory into the DHCP snooping database file.</p> <ul style="list-style-type: none"><li>If you are configuring <b>write-interval</b> at the [edit system processes <a href="#">dhcp-service dhcp-snooping-file</a>] or the [edit system processes <a href="#">dhcp-service dhcpv6-snooping-file</a>] hierarchy level, see “<a href="#">Configuring Persistent Bindings in the DHCP or DHCPv6 Snooping Database to Improve Network Performance (CLI Procedure)</a>” on page 533.</li></ul>                                                                                                               |
| <b>Options</b>                                            | <p><b>seconds</b>—Value in seconds.</p> <p><b>Range:</b> 60 through 86,400 seconds.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b>                           | <p>system—To view this statement in the configuration.</p> <p>system-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>                              | <ul style="list-style-type: none"><li><a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



## CHAPTER 29

# Operational Commands

- clear security pki certificate-request
- clear access-security router-advertisement statistics
- clear arp
- clear arp inspection statistics
- clear bridge recovery-timeout
- clear ddos-protection protocols
- clear dhcp snooping binding
- clear dhcp snooping statistics
- clear dhcp-security binding
- clear dhcp-security ipv6 binding
- clear dhcpv6 snooping binding
- clear dhcpv6 snooping statistics
- clear dot1x
- clear ethernet-switching port-error
- clear ethernet-switching recovery-timeout
- clear ethernet-switching table
- clear neighbor-discovery-inspection statistics
- show security macsec connections
- clear security mka statistics
- clear security mka statistics (MX Series)
- clear security pki ca-certificate
- clear security pki crl
- clear security pki key-pair
- clear security pki local-certificate
- clear services ipsec-vpn certificates
- clear services ipsec-vpn ike security-associations
- clear services ipsec-vpn ipsec security-associations
- clear services ipsec-vpn ipsec statistics

- request access-security router-advertisement-guard-block
- request access-security router-advertisement-guard-forward
- request access-security router-advertisement-guard-learn interface
- request ipsec switch
- request security certificate enroll (Signed)
- request security certificate enroll (Unsigned)
- request security key-pair
- request security pki ca-certificate enroll
- request security pki ca-certificate load
- request security pki ca-certificate verify
- request security pki crl load
- request security pki generate-certificate-request
- request security pki generate-key-pair
- request security pki local-certificate enroll
- request security pki local-certificate generate-self-signed
- request security pki local-certificate load
- request security pki local-certificate verify
- request system certificate add
- show access-security router-advertisement state
- show access-security router-advertisement statistics
- show arp inspection statistics
- show ddos-protection protocols
- show ddos-protection protocols parameters
- show ddos-protection protocols statistics
- show ddos-protection protocols violations
- show ddos-protection statistics
- show ddos-protection version
- show dhcp snooping binding
- show dhcp snooping statistics
- show dhcp-security arp inspection statistics
- show dhcp-security binding
- show dhcp-security binding ip-source-guard
- show dhcp-security ipv6 binding
- show dhcp-security ipv6 statistics
- show dhcp-security neighbor-discovery-inspection statistics
- show dhcpv6 snooping binding
- show dhcpv6 snooping statistics

- `show ethernet-switching table`
- `show ike security-associations`
- `show ipsec certificates`
- `show ipsec security-associations`
- `show ip-source-guard`
- `show ipv6-source-guard`
- `show neighbor-discovery-inspection statistics`
- `show security keychain`
- `show security macsec connections`
- `show security macsec connections (MX Series)`
- `show security macsec statistics`
- `include-sci (MACsec for MX Series) on page 1224`
- `show security mka sessions`
- `show security mka sessions (MX Series)`
- `show security mka statistics`
- `show security mka sessions (MX Series)`
- `show security pki ca-certificate`
- `show security pki certificate-request`
- `show security pki crt`
- `show security pki local-certificate`
- `show services ipsec-vpn certificates`
- `show services ipsec-vpn ike security-associations`
- `show services ipsec-vpn ipsec security-associations`
- `show services ipsec-vpn ipsec statistics`
- `show system certificate`
- `show system statistics arp`

## clear security pki certificate-request

---

|                                 |                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear security pki certificate-request (all   certificate-id <i>certificate-id-name</i> )                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                   |
| <b>Description</b>              | Delete manually generated local digital certificate requests from the router.                                                                                                                                                 |
| <b>Options</b>                  | <b>all</b> —Delete all local digital certificate requests from the router.<br><br><b>certificate-id <i>certificate-id-name</i></b> —Delete the specified local digital certificate and corresponding public/private key pair. |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show security pki certificate-request on page 1239</a></li></ul>                                                                                                          |
| <b>List of Sample Output</b>    | <a href="#">clear security pki certificate-request all on page 1050</a>                                                                                                                                                       |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                         |

## Sample Output

clear security pki certificate-request all

```
user@host> clear security pki certificate-request all
```

## clear access-security router-advertisement statistics

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>clear access-security router-advertisement statistics (fail   success) (all   interface <i>interface-name</i>   vlan <i>vlan-name</i>)</b>                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Command introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Clear the IPv6 Router Advertisement (RA) guard entries for received RA messages. If RA guard is enabled on a switch, the switch examines incoming RA messages and filters them on the basis of a predefined set of criteria. If the switch validates the sender of the RA message as a legitimate IPv6 router, it forwards the RA message to its destination; otherwise, the RA message is dropped.                         |
| <b>Options</b>                  | <p><b>all</b>—Clear the RA guard entries on all VLANs.</p> <p><b>fail</b>—Clear RA guard entries for RA messages that were discarded.</p> <p><b>interface <i>interface-name</i></b>—Clear the RA guard entries for the specified interface.</p> <p><b>success</b>—Clear the RA guard entries for RA messages that were accepted.</p> <p><b>vlan <i>vlan-name</i></b>—Clear the RA guard entries for the specified VLAN.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show access-security router-advertisement statistics on page 1106</a></li> </ul>                                                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>            | This command generates no output.                                                                                                                                                                                                                                                                                                                                                                                           |

## clear arp

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear arp</code><br><code>&lt;all&gt;</code><br><code>&lt;hostname <i>hostname</i>&gt;</code><br><code>&lt;interface <i>interface-name</i>&gt;</code><br><code>&lt;logical-system <i>logical-system-name</i>&gt;</code><br><code>&lt;tenant <i>name</i>&gt;</code><br><code>&lt;vpn <i>vpn</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 14.1 for the MX Series.<br><b>all</b> option introduced in Junos OS Release 14.2.<br><b>tenant</b> option added in Junos OS Release 18.3.                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Remove entries from the Address Resolution Protocol (ARP) table for the current CLI view. To clear entries for a specific logical system, you must first enter the <b>set cli logical-system <i>logical-system-name</i></b> command, and then issue the <b>clear arp</b> command.                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <b>all</b> — Clear all entries from the ARP table.<br><br><b>hostname <i>hostname</i></b> —(Optional) Clear only the specified host entry from the ARP table.<br><br><b>interface <i>interface-name</i></b> —(Optional) Clear entries only for the specified interface from the ARP table.<br><br><b>logical-system <i>logical-system-name</i></b> —(Optional) Clear entries for only the specified logical system from the ARP table (only available in main router context).<br><br><b>tenant <i>name</i></b> —(Optional) Display the name of the tenant.<br><br><b>vpn <i>vpn</i></b> —(Optional) Clear entries from the ARP table for the specified virtual private network (VPN). |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">set cli logical-system</a></li><li>• <a href="#">show arp</a></li><li>• <a href="#">show dhcp-security arp inspection statistics on page 1157</a></li><li>• <a href="#">Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282</a></li></ul>                                                                                                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>    | <a href="#">clear arp all on page 1053</a><br><a href="#">clear arp logical-system ls1 on page 1053</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

### clear arp all

```
user@host> clear arp all
192.168.71.254 deleted
192.168.65.46 deleted
192.168.64.10 deleted
10.0.12.14 deleted
10.0.17.14 deleted
```

### clear arp logical-system ls1

```
user@host> clear arp logical-system ls1
192.168.71.254 deleted
192.168.65.46 deleted
192.168.64.10 deleted
10.0.12.14 deleted
10.0.17.14 deleted
```

## clear arp inspection statistics

---

|                                 |                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear arp inspection statistics<br><interface <i>interface</i> >                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                               |
| <b>Description</b>              | Clear ARP inspection statistics.                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <b>none</b> —Clears ARP statistics on all interfaces.<br><b>interface <i>interface-names</i></b> —(Optional) Clear ARP statistics on one or more interfaces.                                                                                                                        |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show arp inspection statistics on page 1108</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li>• <a href="#">Verifying That DAI Is Working Correctly on page 461</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear arp inspection statistics on page 1054</a>                                                                                                                                                                                                                        |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                    |

## Sample Output

### clear arp inspection statistics

```
user@switch> clear arp inspection statistics
```



## clear bridge recovery-timeout

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear bridge recovery-timeout<br><interface <i>interface-name</i> >                                                                                                                            |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1 for MX Series routers.                                                                                                                             |
| <b>Description</b>              | Clear all storm control errors from all the Ethernet switching interfaces on the switch, and restore the interfaces to service.                                                                |
| <b>Options</b>                  | <b>interface <i>interface-name</i></b> —Clear all storm control errors from the Ethernet switching interfaces on the interface specified in the command and restore this interface to service. |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 596</a></li></ul>           |
| <b>List of Sample Output</b>    | <a href="#">clear bridge recovery-timeout (interface interface-name) on page 1055</a>                                                                                                          |

### Sample Output

#### clear bridge recovery-timeout (interface interface-name)

```
user@host> clear bridge recovery-timeout interface ae0.0
user@host> clear bridge recovery-timeout interface ae0.0
```

## clear ddos-protection protocols

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <b>clear ddos-protection protocols</b><br><b>&lt;protocol-group &lt;packet-type&gt;&gt; (culprit-flows   states   statistics)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Release Information      | Command introduced in Junos OS Release 11.2.<br>Option <b>culprit-flows</b> introduced in Junos OS Release 12.3.<br>Command introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Command introduced in Junos OS Release 14.1X53 on QFX Series switches.<br>Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Description              | Clear current DDoS protection statistics, violation states, or culprit flows for all packet types in all protocol groups, for all packet types in a particular protocol group, or for a particular packet type in a particular protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Options                  | <b>protocol-group</b> —(Optional) Protocol group that is cleared. See <a href="#">show ddos-protection protocols</a> for a list of available groups.<br><br><b>packet-type</b> —(Optional) Packet type in a particular protocol group that is cleared. See <a href="#">show ddos-protection protocols</a> for a list of available packet types.<br><br><b>culprit-flows</b> —Clear culprit flows for a packet type, for a protocol group, or for all protocol groups. This option is not supported on QFX Series switches.<br><br><b>states</b> —Clear DDoS protection violation states for a packet type, for a protocol group, or for all protocol groups.<br><br><b>statistics</b> —Clear DDoS protection statistics such as packet counts and rates for a packet type, for a protocol group, or for all protocol groups. |
| Required Privilege Level | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Related Documentation    | <ul style="list-style-type: none"><li>• <a href="#">show ddos-protection protocols on page 1110</a></li><li>• <a href="#">show ddos-protection statistics on page 1150</a></li><li>• <a href="#">show ddos-protection version on page 1152</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| List of Sample Output    | <a href="#">clear ddos-protection protocols (Clear Statistics for All Protocols) on page 1057</a><br><a href="#">clear ddos-protection protocols (Clear Violation States for Packet Type) on page 1057</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Output Fields            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## Sample Output

clear ddos-protection protocols (Clear Statistics for All Protocols)

```
user@host> clear ddos-protection protocols statistics
```

clear ddos-protection protocols (Clear Violation States for Packet Type)

```
user@host> clear ddos-protection protocols radius server states
```

## clear dhcp snooping binding

---

|                                 |                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear dhcp snooping binding</code><br><code>&lt;mac (all   <i>mac-address</i>)&gt;</code><br><code>&lt;vlan (all   <i>vlan-name</i>)&gt;</code><br><code>&lt;vlan (all   <i>vlan-name</i>) mac (all   <i>mac-address</i>)&gt;</code>                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                     |
| <b>Description</b>              | Clear the DHCP snooping database information.                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <b>mac (all   <i>mac-address</i>)</b> —(Optional) Clear DHCP snooping information for the specified MAC address or all MAC addresses.<br><br><b>vlan (all   <i>vlan-name</i>)</b> —(Optional) Clear DHCP snooping information for the specified VLAN or all VLANs.                        |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dhcp snooping binding on page 1154</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li>• <a href="#">Verifying That DHCP Snooping Is Working Correctly on page 297</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear dhcp snooping binding on page 1058</a>                                                                                                                                                                                                                                  |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                          |

## Sample Output

### clear dhcp snooping binding

```
user@switch> clear dhcp snooping binding
```

## clear dhcp snooping statistics

|                                 |                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear dhcp snooping statistics</code>                                                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.4 for EX Series switches.                                                                                                                                                                             |
| <b>Description</b>              | Clear all Dynamic Host Configuration Protocol (DHCP) snooping statistics.                                                                                                                                                                      |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dhcp snooping statistics on page 1156</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">clear dhcp snooping statistics on page 1059</a>                                                                                                                                                                                    |
| <b>Output Fields</b>            | See <a href="#">show dhcp snooping statistics</a> for an explanation of the output fields.                                                                                                                                                     |

## Sample Output

### clear dhcp snooping statistics

The following sample output displays the DHCP snooping statistics before and after the `clear dhcp snooping statistics` command is issued.

```
user@switch> show dhcp snooping statistics
Successful Transfers : 0 Failed Transfers : 21
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 21
```

```
user@switch> clear dhcp snooping statistics
user@switch> show dhcp snooping statistics
Successful Transfers : 0 Failed Transfers : 0
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 0
```

## clear dhcp-security binding

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear dhcp-security binding</code><br><code>&lt;interface <i>interface-name</i>&gt;</code><br><code>&lt;ip-address <i>ip-address</i>&gt;</code><br><code>&lt;statistics&gt;</code><br><code>&lt;vlan <i>vlan-name</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Command introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Clear the DHCP snooping database information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>interface <i>interface-name</i></b>—(Optional) Clear DHCP snooping database information for the specified interface.</p> <p><b>ip-address <i>ip-address</i></b>—(Optional) Clear DHCP snooping database information for the specified IP address.</p> <p><b>statistics</b>—(Optional) Clear all DHCP snooping database statistics.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Clear DHCP snooping database information for the specified VLAN.</p>                                                                                                                                                             |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dhcp-security binding on page 1159</a></li><li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621</a></li><li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553</a></li><li>• <a href="#">Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282</a></li></ul> |

## clear dhcp-security ipv6 binding

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear dhcp-security ipv6 binding<br><all><br><interface <i>interface-name</i> ><br><ipv6-address <i>ipv6-address</i> ><br><vlan <i>vlan-name</i> >                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X51-D20 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Clear the DHCPv6 snooping database information.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>all</b>—(Optional) Clear all DHCPv6 snooping database statistics.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear DHCPv6 snooping database information for the specified interface.</p> <p><b>ipv6-address <i>ipv6-address</i></b>—(Optional) Clear DHCPv6 snooping database information for the specified IPv6 address.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Clear DHCPv6 snooping database information for the specified VLAN.</p> |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dhcp-security ipv6 binding on page 1164</a></li> <li>• <a href="#">Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626</a></li> </ul>                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">clear dhcp-security ipv6 binding on page 1061</a>                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Sample Output

### clear dhcp-security ipv6 binding

```
user@switch> clear dhcp-security ipv6 binding
```

## clear dhcpv6 snooping binding

---

|                                 |                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear dhcpv6 snooping binding</code><br><code>&lt;mac (all   <i>mac-address</i>)&gt;</code><br><code>&lt;vlan (all   <i>vlan-name</i>)&gt;</code><br><code>&lt;vlan (all   <i>vlan-name</i>) mac (all   <i>mac-address</i>)&gt;</code>                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                  |
| <b>Description</b>              | Clear the DHCPv6 snooping database information.                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <b>mac (all   <i>mac-address</i>)</b> —(Optional) Clear DHCPv6 snooping information for the specified MAC address or all MAC addresses.<br><br><b>vlan (all   <i>vlan-name</i>)</b> —(Optional) Clear DHCPv6 snooping information for the specified VLAN or all VLANs.                      |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dhcpv6 snooping binding on page 1171</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li><li>• <a href="#">Verifying That DHCP Snooping Is Working Correctly on page 297</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear dhcpv6 snooping binding on page 1062</a>                                                                                                                                                                                                                                  |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                            |

## Sample Output

### clear dhcpv6 snooping binding

```
user@switch> clear dhcpv6 snooping binding
```



## clear dhcpv6 snooping statistics

|                                 |                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear dhcpv6 snooping statistics</code>                                                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                       |
| <b>Description</b>              | Clear all Dynamic Host Configuration Protocol for IPv6 (DHCPv6) snooping statistics.                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dhcpv6 snooping statistics on page 1173</a></li> <li>• <a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">clear dhcpv6 snooping statistics on page 1063</a>                                                                                                                                                                                    |
| <b>Output Fields</b>            | See <a href="#">show dhcpv6 snooping statistics</a> for an explanation of the output fields.                                                                                                                                                     |

## Sample Output

### clear dhcpv6 snooping statistics

The following sample output displays the DHCPv6 snooping statistics before and after the `clear dhcpv6 snooping statistics` command is issued.

```
user@switch> show dhcpv6 snooping statistics
Successful Transfers : 0 Failed Transfers : 21
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 21
```

```
user@switch> clear dhcpv6 snooping statistics
user@switch> show dhcpv6 snooping statistics
Successful Transfers : 0 Failed Transfers : 0
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 0
```

## clear dot1x

**Syntax** `clear dot1x (firewall <counter-name> | interface <[interface-name]> | mac-address [mac-addresses] | statistics <interface interface-name>)`

**Release Information** Command introduced in Junos OS Release 9.0 for EX Series switches.  
**firewall** option added in Junos OS Release 9.5 for EX Series switches.  
 Command introduced in Junos OS Release 14.2 for MX240, MX480, and MX960 routers in enhanced LAN mode.  
 Command introduced in Junos OS Release 14.1X53-D30 for the QFX Series.  
 Support for **eapol-block** introduced in Junos OS Releases 14.1X53-D40 and 15.1X53-D51 for EX Series switches.

**Description** Reset the authentication state of an interface or delete 802.1X statistics from the switch. When you reset an interface using the **interface** or **mac-address** options, reauthentication on the interface is also triggered. The switch sends out a multicast message on the interface to restart the authentication of all connected supplicants. If a MAC address is reset, then the switch sends out a unicast message to that specific MAC address to restart authentication.

If a supplicant is sending traffic when the **clear dot1x interface** command is issued, the authenticator immediately initiates reauthentication. This process happens quickly, and it might seem that reauthentication did not occur. To verify that reauthentication has happened, issue the **show dot1x interface detail** command. The values for **Reauthentication due** and **Reauthentication interval** will be about the same.



**CAUTION:** When you clear the learned MAC addresses from an interface using the **clear dot1x interface** command, all MAC addresses are cleared, including those in static MAC bypass list.

If you have enabled Media Access Control Security (MACsec) using static secure association key (SAK) security mode on an EX Series switch, the SAKs are rotated when the **clear dot1x** command is entered. The **clear dot1x** command has no impact on MACsec when MACsec is enabled using static connectivity association keys (CAK) or any other security mode.

**Options** **eapol-block**—Clear EAPOL block on the interface and allow the switch to receive EAPOL messages from a supplicant connected to that interface.

**firewall <counter-name>**—Clear 802.1X firewall counter statistics. If the *counter-name* option is specified, clear 802.1X firewall statistics for that counter.

**interface <[interface-name]>**—Reset the authentication state of all the supplicants (also, clears all the authentication bypassed clients) connected to the specified interface (when the interface is an authenticator) or reset the authentication state for the interface itself (when the interface is a supplicant).

**mac-address** [*mac-addresses*]  
—Reset the authentication state of the specified MAC addresses.

**statistics** <interface *interface-name*>  
—Clear 802.1X statistics on all 802.1X-enabled interfaces. If the **interface** option is specified, clear 802.1X firewall statistics for that interface or interfaces.

**Required Privilege Level**

view

**Related Documentation**

- *show dot1x*
- *Example: Setting Up 802.1X for Single-Suppliant or Multiple-Suppliant Configurations on an EX Series Switch*
- *Filtering 802.1X Suplicants by Using RADIUS Server Attributes*

**List of Sample Output**

[clear dot1x firewall on page 1065](#)  
[clear dot1x interface \(Specific Interfaces\) on page 1065](#)  
[clear dot1x mac-address \(Specific MAC Address\) on page 1065](#)  
[clear dot1x statistics interface \(Specific Interface\) on page 1065](#)  
[clear dot1x eapol-block on page 1065](#)

## Sample Output

**clear dot1x firewall**

```
user@switch> clear dot1x firewall c1
```

**clear dot1x interface (Specific Interfaces)**

```
user@switch> clear dot1x interface ge-1/0/0 ge-2/0/0 ge-2/0/0 ge5/0/0
```

**clear dot1x mac-address (Specific MAC Address)**

```
user@switch> clear dot1x mac-address 00:04:ae:cd:23:5f
```

**clear dot1x statistics interface (Specific Interface)**

```
user@switch> clear dot1x statistics interface ge-1/0/1
```

**clear dot1x eapol-block**

```
user@switch> clear dot1x eapol-block
```

## clear ethernet-switching port-error

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear ethernet-switching port-error<br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Command introduced in JUNOS Release 9.6 for EX Series switches.                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Clear all MAC limiting, MAC move limiting, and storm control errors from all the Ethernet switching interfaces on the switch or from the specified interface, and restore all interfaces or the specified interface to service.                                                                                                                                                                |
| <b>Options</b>                  | <b>none</b> —Clear all MAC limiting, MAC move limiting, and storm control errors from all the Ethernet switching interfaces on the switch and restore these interfaces to service.<br><br><b>interface <i>interface-name</i></b> —(Optional) Clear all MAC limiting, MAC move limiting, and storm control errors from the specified interface and restore the interface to service.            |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Storm Control to Prevent Network Outages on EX Series Switches on page 587</a></li><li>• <a href="#">Configuring Port Security (CLI Procedure) on page 284</a></li><li>• <a href="#">Configuring Autorecovery From the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 613</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear ethernet-switching port-error on page 1066</a>                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                                                                                                               |

## Sample Output

### clear ethernet-switching port-error

```
user@switch> clear ethernet-switching port-error
```

## clear ethernet-switching recovery-timeout

---

|                                 |                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear ethernet-switching recovery-timeout                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D10 for EX Series switches.                                                                                                                                                                                                  |
| <b>Description</b>              | Clear all MAC limiting, MAC move limiting, and storm control errors from all the Ethernet switching interfaces on the switch, and restore the interfaces to service.                                                                                                        |
| <b>Options</b>                  | <b>interface <i>interface-name</i> vlan <i>vlan-name</i></b> —(EX9200 switches) Unblock an interface on the basis of its membership in the specified VLAN. This option can be used to restore an interface that is blocked because of a <b>vlan-member-shutdown</b> action. |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Autorecovery from the Disabled State on Secure or Storm Control Interfaces (CLI Procedure) on page 596</a></li></ul>                                                                                        |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                            |

## clear ethernet-switching table

**Syntax** clear ethernet-switching table  
 <interface *interface-name*>  
 <mac *mac-address*>  
 <management-vlan>  
 <persistent-mac <*interface* | *mac-address*>>  
 <vlan *vlan-name*>

**Syntax (QFX Series)** clear ethernet-switching table  
 <interface *interface-name*>  
 <mac *mac-address*>  
 <persistent-mac <*interface* | *mac-address*>>  
 <vlan *vlan-name*>

**Release Information** Command introduced in Junos OS Release 9.3 for EX Series switches.  
 Command introduced in Junos OS Release 11.1 for the QFX Series.

### Description



**NOTE:** On a QFabric system, using this command on an FCoE-enabled VLAN when FCoE sessions are active can cause traffic flooding and FCoE traffic drop. The FCoE sessions are not terminated and the traffic reconverges after a short period of time.

Clear learned entries, which are media access control (MAC) addresses, in the Ethernet switching table (also called the forwarding database table).

**Options** **none**—Clear learned entries in the Ethernet switching table, except for persistent MAC addresses.

**interface *interface-name***—(Optional) Clear all learned MAC addresses for the specified interface from the Ethernet switching table.

**mac *mac-address***—(Optional) Clear the specified learned MAC address from the Ethernet switching table.

**management-vlan**—(Optional) Clear all MAC addresses learned for the management VLAN from the Ethernet switching table. Note that you do not specify a VLAN name because only one management VLAN exists.

**persistent-mac <*interface* | *mac-address*>**—(Optional) Clear all MAC addresses, including persistent MAC addresses. Use the **interface** option to clear all MAC addresses on an interface, or use the **mac-address** option to clear all entries for a specific MAC address.

Use this command whenever you move a device in your network that has a persistent MAC address on the switch. If you move the device to another port on the switch and do not clear the persistent MAC address from the original port it was learned

on, then the new port will not learn the MAC address and the device will not be able to connect. If the original port is down when you move the device, then the new port will learn the MAC address and the device can connect—however, unless you cleared the MAC address on the original port, when the port comes back up, the system reinstalls the persistent MAC address in the forwarding table for that port. If this occurs, the address is removed from the new port and the device loses connectivity.

**vlan *vlan-name***—(Optional) Clear all MAC addresses learned for the specified VLAN from the Ethernet switching table.

**Required Privilege Level** view

**Related Documentation** • [show ethernet-switching table on page 1174](#)

**List of Sample Output** [clear ethernet-switching table on page 1069](#)

**Output Fields** This command produces no output.

## Sample Output

### clear ethernet-switching table

```
user@switch> clear ethernet-switching table
```

## clear neighbor-discovery-inspection statistics

---

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear neighbor-discovery-inspection statistics<br><interface <i>interface-name</i> >                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                           |
| <b>Description</b>              | Clear IPv6 neighbor discovery inspection statistics.                                                                                                                                                                 |
| <b>Options</b>                  | <b>none</b> —Clear neighbor discovery inspection statistics on all interfaces.<br><br><b>interface <i>interface-name</i></b> —(Optional) Clear neighbor discovery inspection statistics on one or more interfaces.   |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show neighbor-discovery-inspection statistics on page 1211</a></li><li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">clear neighbor-discovery-inspection statistics on page 1070</a>                                                                                                                                          |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                     |

### Sample Output

#### clear neighbor-discovery-inspection statistics

```
user@switch> clear neighbor-discovery-inspection statistics
```



## show security macsec connections

|                                 |                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security macsec connections<br><interface <i>interface-name</i> >                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D15 for EX Series switches.<br>Command introduced in Junos OS Release 14.1X53-D15 for QFX Series switches.                                                              |
| <b>Description</b>              | Display the status of the active MACsec connections on the switch.<br><br>This command does not display output when MACsec is enabled using static secure association key (SAK) security mode.                         |
| <b>Options</b>                  | <b>none</b> —Display MACsec connection information for all interfaces on the switch.<br><br><b>interface <i>interface-name</i></b> —(Optional) Display MACsec connection information for the specified interface only. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show security macsec statistics on page 1220</a></li> </ul>                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show security macsec connections on page 1072</a>                                                                                                                                                          |
| <b>Output Fields</b>            | <a href="#">Table 39 on page 1071</a> lists the output fields for the <b>show security macsec connections</b> command. Output fields are listed in the approximate order in which they appear.                         |

Table 39: show security macsec connections Output Fields

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fields for Interface |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Interface name       | Name of the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CA name              | Name of the connectivity association.<br><br>A connectivity association is named using the <b>connectivity-association</b> statement when you are enabling MACsec.                                                                                                                                                                                                                                                                                     |
| Cipher suite         | Name of the cipher suite used for encryption.                                                                                                                                                                                                                                                                                                                                                                                                          |
| Encryption           | Encryption setting. Encryption is enabled when this output is <b>on</b> and disabled when this output is <b>off</b> .<br><br>The encryption setting is set using the <b>no-encryption</b> statement in the connectivity association when using static connectivity association key (CAK) security mode and is set using the <b>encryption</b> statement in the secure channel when using static secure association key (SAK) or dynamic security mode. |

Table 39: show security macsec connections Output Fields (continued)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Key server offset | <p>Offset setting.</p> <p>The offset is set using the <b>offset</b> statement when configuring the connectivity association when using static connectivity association key (CAK) or dynamic security mode or the secure channel when using static secure association key (SAK) security mode.</p>                                                                                                                                                                                                                                                                        |
| Include SCI       | <p>SCI tagging. The SCI tag is included on packets in a secure channel when this output is <b>yes</b>, and not included on packets in a secure channel when this output is <b>no</b>.</p> <p>You can enable SCI tagging using the <b>include-sci</b> statement in the connectivity association.</p> <p><b>NOTE:</b> SCI tags are automatically appended to packets leaving a MACsec-enabled interface on an EX4300 switch. The <b>include-sci</b> option is, therefore, not available on EX4300 switches. The output for the <b>Include SCI</b> field is <b>yes</b>.</p> |
| Replay protect    | <p>Replay protection setting. Replay protection is enabled when this output is <b>on</b> and disabled when this output is <b>off</b>.</p> <p>You can enable replay protection using the <b>replay-protect</b> statement in the connectivity association.</p>                                                                                                                                                                                                                                                                                                             |
| Replay window     | <p>Replay protection window setting. This output is set to <b>0</b> when replay protection is disabled, and is the size of the replay window, in number of packets, when replay protection is enabled.</p> <p>The size of the replay window is configured using the <b>replay-window-size</b> statement in the connectivity association.</p>                                                                                                                                                                                                                             |

## Sample Output

### show security macsec connections

```

user@host> show security macsec connections
Interface name: xe-0/1/0
 CA name: CA1
 Cipher suite: GCM-AES-128 Encryption: on
 Key server offset: 0 Include SCI: no
 Replay protect: off Replay window: 0

```

## clear security mka statistics

---

|                                 |                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear security mka statistics<br><interface <i>interface-name</i> >                                                                                                                                                                                                      |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D15 for EX Series switches.<br>Command introduced in Junos OS Release 14.1X53-D15 for QFX Series switches.                                                                                                                |
| <b>Description</b>              | <p>Clear—reset to zero (0)—all MACsec Key Agreement (MKA) protocol statistics.</p> <p>You are clearing the statistics that are viewed using the <b>show security mka statistics</b> when you enter this command.</p>                                                     |
| <b>Options</b>                  | <p><b>none</b>—Clear all MKA counters for all interfaces on the switch.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear MKA traffic counters for the specified interface only.</p>                                                                        |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show security mka statistics on page 1230</a></li><li>• <a href="#">show security mka sessions on page 1225</a></li><li>• <a href="#">Understanding Media Access Control Security (MACsec) on page 403</a></li></ul> |

## Sample Output

### clear security mka statistics

```
user@switch> clear security mka statistics
```

## clear security mka statistics (MX Series)

---

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear security mka statistics<br><interface <i>interface-name</i> >                                                                                                                                                  |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                     |
| <b>Description</b>              | <p>Clear—reset to zero (0)—all MACsec Key Agreement (MKA) protocol statistics.</p> <p>You are clearing the statistics that are viewed using the <b>show security mka statistics</b> when you enter this command.</p> |
| <b>Options</b>                  | <p><b>none</b>—Clear all MKA counters for all interfaces on the switch.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Clear MKA traffic counters for the specified interface only.</p>                    |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                |

### Sample Output

#### clear security mka statistics

```
user@switch> clear security mka statistics
```

## clear security pki ca-certificate

---

|                                 |                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear security pki ca-certificate (all   ca-profile <i>ca-profile-name</i> )                                                                                                                                                                                                          |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                           |
| <b>Description</b>              | Delete certificate authority (CA) digital certificates from the router.                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b>all</b>—Delete all CA digital certificates from the router.</p> <p><b>ca-profile <i>ca-profile-name</i></b>—Delete the specified CA profile.</p>                                                                                                                                |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">request security pki ca-certificate enroll on page 1091</a></li> <li>• <a href="#">request security pki ca-certificate load on page 1092</a></li> <li>• <a href="#">show security pki ca-certificate on page 1235</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">clear security pki ca-certificate all on page 1075</a>                                                                                                                                                                                                                    |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                 |

### Sample Output

clear security pki ca-certificate all

```
user@host> clear security pki ca-certificate all
```

## clear security pki crt

---

|                                 |                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear security pki crt (all   ca-profile <i>ca-profile-name</i> )                                                                               |
| <b>Release Information</b>      | Command introduced in Junos 8.1                                                                                                                 |
| <b>Description</b>              | Delete certificate revocation lists (CRLs) from the router.                                                                                     |
| <b>Options</b>                  | <b>all</b> —Delete all CRLs from the router.<br><b>ca-profile <i>ca-profile-name</i></b> —Delete CRLs associated with the specified CA profile. |
| <b>Required Privilege Level</b> | clear                                                                                                                                           |
| <b>List of Sample Output</b>    | <a href="#">clear security pki crt ca-profile all on page 1076</a>                                                                              |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                           |

## Sample Output

### clear security pki crt ca-profile all

```
user@host> clear security pki crt ca-profile all
```

## clear security pki key-pair

---

|                                 |                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear security pki key-pair (all   certificate-id <i>certificate-id-name</i> )                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 8.5.                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Clear public key infrastructure (PKI) key pair information for local digital certificates from the router.                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>all</b>—Delete all local digital certificates, certificate requests, and the corresponding public and private key pairs from the router.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—Delete the specified local digital certificate and corresponding public/private key pair.</p> |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">request security pki local-certificate enroll on page 1098</a></li> <li>• <a href="#">show security pki local-certificate on page 1244</a></li> </ul>                                                                                           |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                     |

## Sample Output

```
user@host> clear security pki key pair
```

## clear security pki local-certificate

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear security pki local-certificate<br><all   certificate-id <i>certificate-id-name</i>   system-generated>                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Delete local digital certificates, certificate requests, and the corresponding public/private key pairs from the router.                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>all</b>—(Optional) Delete all local digital certificates, certificate requests, and the corresponding public and private key pairs from the router.</p> <p><b>certificate-id</b> <i>certificate-id-name</i>—(Optional) Delete the specified local digital certificate and corresponding public and private key pair.</p> <p><b>system-generated</b>—(Optional) Auto-generated self-signed certificate.</p> |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">request security pki local-certificate enroll on page 1098</a></li><li>• <a href="#">show security pki local-certificate on page 1244</a></li></ul>                                                                                                                                                                                                          |
| <b>List of Sample Output</b>    | <a href="#">clear security pki local-certificate all on page 1078</a>                                                                                                                                                                                                                                                                                                                                            |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                                                                                                                                 |

## Sample Output

### clear security pki local-certificate all

```
user@host> clear security pki local-certificate all
```



---

## clear services ipsec-vpn certificates

---

|                                 |                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear services ipsec-vpn certificates (all   service-set <i>service-set</i> )<br><certificate-cache-entry <i>number</i> >                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                   |
| <b>Description</b>              | (Adaptive services interfaces only) Delete digital certificates from the IPsec configuration memory cache. Issuing this command also clears the certificate revocation list (CRL) from the cache along with the certificates. |
| <b>Options</b>                  | <b>all</b> —Delete digital certificates for all service sets.<br><br><b>service-set <i>service-set</i></b> —Delete digital certificates for the specified service set.                                                        |
| <b>Required Privilege Level</b> | clear                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>    | <a href="#">clear services ipsec-vpn certificates all on page 1079</a>                                                                                                                                                        |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                         |

### Sample Output

clear services ipsec-vpn certificates all

```
user@host> clear services ipsec-vpn certificates all
```

## clear services ipsec-vpn ike security-associations

---

|                                 |                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear services ipsec-vpn ike security-associations</code><br><code>&lt;peer-address-name&gt;</code><br><code>&lt;service-set service-set-name&gt;</code>                                                                        |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br><b>service-set</b> option added in Junos OS Release 8.5.                                                                                                                           |
| <b>Description</b>              | (Adaptive services interfaces only) Clear Internet Key Exchange (IKE) security associations.                                                                                                                                          |
| <b>Options</b>                  | <b>peer-address-name</b> —(Optional) Clear only the security association specified by the peer address.<br><br><b>service-set service-set-name</b> —(Optional) Clear only the security association specified by the service-set name. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show services ipsec-vpn ike security-associations on page 1250</a></li></ul>                                                                                                      |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                 |

## Sample Output

### clear services ipsec-vpn ike security-associations

```
user@host> clear services ipsec-vpn ike security-associations
```

## clear services ipsec-vpn ipsec security-associations

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | clear services ipsec-vpn security-associations<br><peer-address-name><br><remote-gateway remote-gateway-address><br><service-set-name><br><tunnel-index tunnel-index-number>                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br><b>remote-gateway</b> , <b>service-set-name</b> , and <b>tunnel-index</b> options added in Junos OS Release 8.4.                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | (Adaptive services interfaces only) Clear IP Security (IPsec) security associations. You can combine the options for greater specificity.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>peer-address-name</b>—(Optional) Clear only the security association specified by the peer address.</p> <p><b>remote-gateway remote-gateway-address</b>—(Optional) Clear only the security association specified by the remote gateway address.</p> <p><b>service-set-name</b>—(Optional) Clear only the security association specified by the service-set name.</p> <p><b>tunnel-index tunnel-index-number</b>—(Optional) Clear only the security association specified by the tunnel index number.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show services ipsec-vpn ipsec security-associations on page 1255</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Sample Output

### clear services ipsec-vpn ipsec security-associations

```
user@host> clear services ipsec-vpn ipsec security-associations
```

## clear services ipsec-vpn ipsec statistics

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>clear services ipsec-vpn ipsec statistics</code><br><code>&lt;remote-gateway address&gt;</code><br><code>&lt;service-set service-set-name&gt;</code>                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 8.1.                                                                                                                                                    |
| <b>Description</b>              | (Adaptive services interface only) Clear IP Security (IPsec) statistics.                                                                                                                       |
| <b>Options</b>                  | <b>remote-gateway address</b> —(Optional) Clear statistics for the specified remote system.<br><b>service-set service-set-name</b> —(Optional) Clear statistics for the specified service set. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show services ipsec-vpn ipsec statistics on page 1261</a></li></ul>                                                                        |
| <b>List of Sample Output</b>    | <a href="#">clear services ipsec-vpn ipsec statistics on page 1082</a>                                                                                                                         |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                          |

## Sample Output

### clear services ipsec-vpn ipsec statistics

```
user@host> clear services ipsec-vpn ipsec statistics
```

## request access-security router-advertisement-guard-block

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | request access-security router-advertisement-guard-block interface ( <i>interface-name</i> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Command introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | <p>Initiate the blocking state on an interface or range of interfaces for stateful IPv6 Router Advertisement (RA) guard. Stateful RA guard learns about legitimate senders of RA messages and stores this information in order to validate senders of subsequent RA messages. For example, an interface that is in the learning state and receives RA messages that are not sent from valid IPv6 routers will dynamically transition to the blocking state. While the interface is in blocking state, all RA messages received on that interface are dropped.</p> <p>You can override the dynamic state transitions by requesting the blocking state on an interface. If you issue the request for the blocking state on an interface, the interface will remain in forwarding state until either the learning or forwarding state is requested on that interface.</p> |
| <b>Options</b>                  | <b>interface</b> <i>interface-name</i> —Initiate the blocking state on the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## request access-security router-advertisement-guard-forward

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | request access-security router-advertisement-guard-forward interface ( <i>interface-name</i> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Command introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Initiate the forwarding state on an interface or range of interfaces for stateful IPv6 Router Advertisement (RA) guard. Stateful RA guard learns about legitimate senders of RA messages and stores this information in order to validate senders of subsequent RA messages. For example, an interface that is in the learning state and receives RA messages sent from legitimate sources will dynamically transition to the forwarding state. While the interface is in forwarding state, all RA messages received on that interface that can be validated against the configured policy are forwarded.</p> <p>You can override the dynamic state transitions by requesting the forwarding state on an interface. If you issue the request for the forwarding state on an interface, the interface will remain in forwarding state until either the learning or blocking state is requested on that interface.</p> |
| <b>Options</b>                  | <b>interface</b> <i>interface-name</i> —Initiate the forwarding state on the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <b>interface</b> —To view this statement in the configuration.<br><b>interface-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## request access-security router-advertisement-guard-learn interface

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request access-security router-advertisement-guard-learn interface <i>interface-name</i> duration <i>seconds</i> (forward   block)</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Command introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Request the learning state on an interface or range of interfaces for stateful IPv6 Router Advertisement (RA) guard. Stateful RA guard learns about legitimate senders of RA messages and stores this information in order to validate senders of subsequent RA messages. For example, an interface that is in the learning state and receives RA messages sent from legitimate sources dynamically transitions to the forwarding state after the learning period ends. While the interface is in forwarding state, all RA messages received on that interface that can be validated against the configured policy are forwarded.</p> <p>Before you can request learning on an interface, you must enable RA guard at the <code>[edit forwarding-options access-security router-advertisement-guard]</code> hierarchy level and configure the <b>stateful</b> option. When you enable stateful RA guard, the default state is <b>Off</b>. An interface in the <b>Off</b> state operates as if RA guard is not available. The learning state can be initiated only by configuring the <b>request access-security router-advertisement-guard-learn</b> command.</p> <p>When you request the learning state, you must configure the duration of the learning period in seconds. This is the amount of time the interface will remain in the learning state before it transitions to another state. RA messages that are received during the learning period can be either forwarded or blocked. Configure the <b>forward</b> option to forward RA messages during the learning period, or configure the <b>block</b> option to block RA messages during the learning period.</p> |
| <b>Options</b>                  | <p><b>interface <i>interface-name</i></b>—Initiate the learning state on the specified interface.</p> <p><b>duration <i>seconds</i></b>—Configure the duration of the learning state in seconds. When the learning period ends, the state dynamically transitions to either the forwarding state or the blocking state.</p> <p><b>forward</b>—Configure the interface to forward RA messages received during the learning period.</p> <p><b>block</b>—Configure the interface to block RA messages received during the learning period.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | <p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring Stateful IPv6 Router Advertisement Guard on Switches on page 330</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>            | This command produces no output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## request ipsec switch

---

|                                 |                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request ipsec switch (interface &lt;es-fpc/pic/port&gt;   security-associations &lt;sa-name&gt;)</code>                                                                                                                                       |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                               |
| <b>Description</b>              | (Encryption interface on M Series, PTX Series, and T Series routers and EX Series switches only) Manually switch from the primary to the backup encryption services interface, or switch from the primary to the backup IP Security (IPsec) tunnel. |
| <b>Options</b>                  | <b>interface &lt;es-fpc/pic/port&gt;</b> —Switch to the backup encryption interface.<br><b>security-associations &lt;sa-name&gt;</b> —Switch to the backup tunnel.                                                                                  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>show ipsec redundancy</i></li></ul>                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">request ipsec switch security-associations on page 1086</a>                                                                                                                                                                             |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                               |


## Sample Output

### request ipsec switch security-associations

```
user@host> request ipsec switch security-associations sa-private
```



## request security certificate enroll (Signed)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | request security certificate enroll filename <i>filename</i> subject <i>subject</i><br>alternative-subject <i>alternative-subject</i> certification-authority <i>certification-authority</i> encoding<br>(binary   pem) key-file <i>key-file</i> domain-name <i>domain-name</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Obtain a signed certificate from a certificate authority (CA). The signed certificate validates the CA and the owner of the certificate. The results are saved in a specified file to the <code>/var/etc/ikecert</code> directory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <div>  <p><b>NOTE:</b> For FIPS mode, the digital security certificates must be compliant with the National Institute of Standards and Technology (NIST) SP 800-131A standard. The <code>request security key-pair</code> command is deprecated and not available with Junos in FIPS mode because it generates RSA and DSA keys with sizes of 512 and 1024 bits that are not compliant with the NIST SP 800-131A standard.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <p><b>filename <i>filename</i></b>—File that stores the certificate.</p> <p><b>subject <i>subject</i></b>—Distinguished name (<b>dn</b>), which consists of a set of components—for example, an organization (<b>o</b>), an organization unit (<b>ou</b>), a country (<b>c</b>), and a locality (<b>l</b>).</p> <p><b>alternative-subject <i>alternative-subject</i></b>—Tunnel source address.</p> <p><b>certification-authority <i>certification-authority</i></b>—Name of the certificate authority profile in the configuration.</p> <p><b>encoding (binary   pem)</b>—File format used for the certificate. The format can be a binary file or privacy-enhanced mail (PEM), an ASCII base64-encoded format. The default format is binary.</p> <p><b>key-file <i>key-file</i></b>—File containing a local private key.</p> <p><b>domain-name <i>domain-name</i></b>—Fully qualified domain name.</p> |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | maintenance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <code>request security certificate enroll filename subject alternative-subject certification-authority key-file domain-name (Signed)</code> on page 1088                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Output Fields** When you enter this command, you are provided feedback on the status of your request.

## Sample Output

request security certificate enroll filename subject alternative-subject certification-authority key-file  
domain-name (Signed)

```
user@host> request security certificate enroll filename host.crt subject c=uk,o=london
alternative-subject 10.50.1.4 certification-authority verisign key-file host-1.prv domain-name
host.example.com
CA name: example.com CA file: ca_verisign
local pub/private key pair: host.prv
subject: c=uk,o=london domain name: host.example.com
alternative subject: 10.50.1.4
Encoding: binary
Certificate enrollment has started. To view the status of your enrollment, check
the key management process (kmd) log file at /var/log/kmd. <-----
```

## request security certificate enroll (Unsigned)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security certificate enroll filename <i>filename</i> ca-file <i>ca-file</i> ca-name <i>ca-name</i> encoding (binary   pem) url <i>url</i></code>                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Obtain a certificate from a certificate authority (CA). The results are saved in a specified file to the <code>/var/etc/ikecert</code> directory.                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>filename <i>filename</i></b>—File that stores the public key certificate.</p> <p><b>ca-file <i>ca-file</i></b>—Name of the certificate authority profile in the configuration.</p> <p><b>ca-name <i>ca-name</i></b>—Name of the certificate authority.</p> <p><b>encoding (binary   pem)</b>—File format used for the certificate. The format can be a binary file or privacy-enhanced mail (PEM), an ASCII base64-encoded format. The default value is <b>binary</b>.</p> <p><b>url <i>url</i></b>—Certificate authority URL.</p> |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>    | <a href="#">request security certificate enroll filename ca-file ca-name url (Unsigned) on page 1089</a>                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Sample Output

### request security certificate enroll filename ca-file ca-name url (Unsigned)


```

user@host> request security certificate enroll filename ca_verisign ca-file verisign ca-name
example.com urlxyzcompany URL
http://<verisign ca-name xyzcompany url>/cgi-bin/pkiclient.exe CA name: example.com
CA file: verisign Encoding: binary
Certificate enrollment has started. To view the status of your enrollment, check
the key management process (kmd) log file at /var/log/kmd. <-----

```

## request security key-pair

---

|                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                    | <code>request security key-pair <i>filename</i></code><br><code>&lt;size <i>key-size</i>&gt;</code><br><code>&lt;type (rsa   dsa)&gt;</code>                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                       | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                                                                                                                                                                                                                                                                                               | (Encryption interface on M Series and T Series routers and EX Series switches only)<br>Generate a public and private key pair for a digital certificate.                                                                                                                                                                                                                                                                                                                                                 |
| <div> <b>NOTE:</b> The <code>request security-certificates</code> command is deprecated and are not available with Junos in FIPS mode because security certificates are not compliant with the NIST SP 800-131A standard.</div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                                                                                                                                                                                                                                                                                                   | <p><b><i>filename</i></b>—Name of a file in which to store the key pair.</p> <p><b><i>size key-size</i></b>—(Optional) Key size, in bits. The key size can be <b>512</b>, <b>1024</b>, or <b>2048</b>. The default value is <b>1024</b>.</p> <p><b><i>type</i></b>—(Optional) Algorithm used to encrypt the key:</p> <ul style="list-style-type: none"><li>• <b>rsa</b>—RSA algorithm. This is the default.</li><li>• <b>dsa</b>—Digital signature algorithm with Secure Hash Algorithm (SHA).</li></ul> |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                  | maintenance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>                                                                                                                                                                                                                                                                                     | <a href="#">request security key-pair on page 1090</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Output Fields</b>                                                                                                                                                                                                                                                                                             | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Sample Output

### request security key-pair

```
user@host> request security key-pair security-key-file
```

## request security pki ca-certificate enroll

|                                 |                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki ca-certificate enroll ca-profile <i>ca-profile-name</i></code>                                                                                                   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                 |
| <b>Description</b>              | Request a digital certificate from a certificate authority (CA) online by using the Simple Certificate Enrollment Protocol (SCEP).                                                          |
| <b>Options</b>                  | <code>ca-profile <i>ca-profile-name</i></code> —CA profile name.                                                                                                                            |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear security pki ca-certificate on page 1075</a></li> <li>• <a href="#">show security pki ca-certificate on page 1235</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">request security pki ca-certificate enroll on page 1091</a>                                                                                                                     |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                       |

## Sample Output

### request security pki ca-certificate enroll

```

user@host> request security pki ca-certificate enroll ca-profile entrust
Received following certificates:
 Certificate: C=us, O=juniper, CN=First Officer
 Fingerprint: 46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f
 Certificate: C=us, O=juniper, CN=First Officer
 Fingerprint: bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17
 Certificate: C=us, O=juniper
 Fingerprint: 00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10
Do you want to load the above CA certificate ? [yes,no] (no) yes

```

## request security pki ca-certificate load

---

|                                 |                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki ca-certificate load ca-profile <i>ca-profile-name</i> filename <i>path/filename</i></code>                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                              |
| <b>Description</b>              | Manually load a certificate authority (CA) digital certificate from a specified location.                                                                                                |
| <b>Options</b>                  | <b>ca-profile <i>ca-profile-name</i></b> —Load the specified CA profile.<br><b>filename <i>path/filename</i></b> —Directory location and filename of the CA digital certificate.         |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">clear security pki ca-certificate on page 1075</a></li><li>• <a href="#">show security pki ca-certificate on page 1235</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">request security pki ca-certificate load on page 1092</a>                                                                                                                    |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                    |

## Sample Output

### request security pki ca-certificate load

```
user@host> request security pki ca-certificate load ca-profile ca-private filename pki-file
```

## request security pki ca-certificate verify

---

|                                 |                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki ca-certificate verify ca-profile <i>ca-profile-name</i></code>   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 8.5.                                                 |
| <b>Description</b>              | Verify the digital certificate installed for the specified certificate authority (CA).      |
| <b>Options</b>                  | <b>ca-profile <i>ca-profile-name</i></b> —Name of the local digital certificate identifier. |
| <b>Required Privilege Level</b> | maintenance                                                                                 |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.       |

### Sample Output

You receive the following response before the certificate revocation list (CRL) is downloaded:

```
request security pki ca-certificate verify ca-profile ca1 (CRL not downloaded)
user@host> request security pki ca-certificate verify ca-profile ca1
```

```
CA certificate ca1: CRL verification in progress. Please check the PKId debug
logs for completion status
```

## request security pki crt load

---

|                                 |                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki crt load ca-profile <i>ca-profile-name</i> filename <i>path/filename</i></code>                                                                                                      |
| <b>Release Information</b>      | Command introduced in Junos OS Release 8.1.                                                                                                                                                                     |
| <b>Description</b>              | Manually install a certificate revocation list (CRL) on the router from a specified location.                                                                                                                   |
| <b>Options</b>                  | <b><code>ca-profile <i>ca-profile-name</i></code></b> —Load the specified certificate authority (CA) profile.<br><b><code>filename <i>path/filename</i></code></b> —Directory location and filename of the CRL. |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">request security pki crt load on page 1094</a>                                                                                                                                                      |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                           |

## Sample Output

### request security pki crt load

```
user@host> request security pki crt load ca-profile ca-private filename pki-file
```



## request security pki generate-certificate-request

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | request security pki generate-certificate-request certificate-id <i>certificate-id-name</i><br>domain-name <i>domain-name</i> subject <i>subject-distinguished-name</i><br><email <i>email-address</i> ><br><filename ( <i>path</i>   terminal)><br><ip-address <i>ip-address</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | Manually generate a local digital certificate request in the Public-Key Cryptography Standards #10 (PKCS-10) format.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>certificate-id</b> <i>certificate-id-name</i>—Name of the local digital certificate and the public/private key pair.</p> <p><b>domain-name</b> <i>domain-name</i>—Fully qualified domain name (FQDN). The FQDN provides the identity of the certificate owner for Internet Key Exchange (IKE) negotiations and provides an alternative to the subject name.</p> <p><b>subject</b> <i>subject-distinguished-name</i>—Distinguished name format that contains the common name, department, company name, state, and country:</p> <ul style="list-style-type: none"> <li>• <b>CN</b>—Common name</li> <li>• <b>OU</b>—Organizational unit name</li> <li>• <b>O</b>—Organization name</li> <li>• <b>ST</b>—State</li> <li>• <b>C</b>—Country</li> </ul> <p><b>email</b> <i>email-address</i>—(Optional) E-mail address of the certificate holder.</p> <p><b>filename</b> (<i>path</i>   terminal)—(Optional) Location where the local digital certificate request should be placed or the login terminal.</p> <p><b>ip-address</b> <i>ip-address</i>—(Optional) IP address of the router.</p> |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear security pki certificate-request on page 1050</a></li> <li>• <a href="#">show security pki certificate-request on page 1239</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>    | <a href="#">request security pki generate-certificate-request on page 1096</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## Sample Output

### request security pki generate-certificate-request

```
user@host> request security pki generate-certificate-request certificate-id local-entrust2
domain-name router2.example.net filename entrust-req2 subject cn=router2.example.net
```

Generated certificate request

-----BEGIN CERTIFICATE REQUEST-----

```
MIIBoTCCAQoCAQAwGjEYMBYGA1UEAxMPdHxLmp1bm1wZXIubmV0MIGfMA0GCSqG
SIb3DQEBAQUAA4GNADCBiQKBgQCiuFk1Qws1Ud+AqN5DDxRs2kVyKEhh9qoVFnz+
Hz4c9vsy3B8E1wTJlkmIt2cB3yifB6zePd+6WYpf57Crwre7YqPkixM31F6z3YjX
H+1BPNbCxNWYvyrnSyVYDbFj8o0Xyqog8ACDfVL2JBWrPNBYy7imq/K9soDBbAs6
5hZqqwIDAQABoEcwRQYJKoZIhvcNAQkOMTgwNjA0BgNVHQ8BAf8EBAMCB4AwJAYD
VR0RAQH/BBowGIIWdHxLmVuZ2xhYi5qdW5pcGVyLm5ldDANBgkqhkiG9w0BAQQF
AA0BgQBc2rq1v5S0QXH7LCb/FdqAL8ZM6GoaN5d6cGwq4bB6a7UQFgtoH406gQ3G
3iH0Zfz4xMIBpJYuGd1dkqgvcDoH3AgTsLkfn7Wi3x5H2qeQVs9bvL4P5nvEZLND
EIMUHwteo1ZCiZ70f09Fer9cXWHSQs1UtXtgPqQJy2xIeImLgw==
```

-----END CERTIFICATE REQUEST-----

Fingerprint:

0d:90:b8:d2:56:74:fc:84:59:62:b9:78:71:9c:e4:9c:54:ba:16:97 (sha1)

1b:08:d4:f7:90:f1:c4:39:08:c9:de:76:00:86:62:b8 (md5)

## request security pki generate-key-pair

---

|                                 |                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki generate-key-pair certificate-id <i>certificate-id-name</i> &lt;size (512   1024   2048)&gt;</code>                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                        |
| <b>Description</b>              | Generate a Public Key Infrastructure (PKI) public and private key pair for a local digital certificate.                                                                                                                                            |
| <b>Options</b>                  | <p><b>certificate-id <i>certificate-id-name</i></b>—Name of the local digital certificate and the public/private key pair.</p> <p><b>size</b>—(Optional) Key pair size. The key pair size can be <b>512</b>, <b>1024</b>, or <b>2048</b> bits.</p> |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>    | <a href="#">request security pki generate-key-pair on page 1097</a>                                                                                                                                                                                |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                              |

### Sample Output

#### request security pki generate-key-pair

```
user@host> request security pki generate-key-pair certificate-id billy size 2048
Generated key pair billy, key size 2048 bits
```

## request security pki local-certificate enroll

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki local-certificate enroll ca-profile <i>ca-profile-name</i><br/>certificate-id <i>certificate-id-name</i> challenge-password <i>password</i> domain-name<br/><i>domain-name</i> subject <i>subject-distinguished-name</i><br/>&lt;email <i>email-address</i>&gt;<br/>&lt;ip-address <i>ip-address</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Request that a certificate authority (CA) enroll and install a local digital certificate online by using the Simple Certificate Enrollment Protocol (SCEP).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>ca-profile</b> <i>ca-profile-name</i>—CA profile name.</p> <p><b>certificate-id</b> <i>certificate-id-name</i>—Name of the local digital certificate and the public/private key pair.</p> <p><b>challenge-password</b> <i>password</i>—Password set by the administrator and normally obtained from the SCEP enrollment webpage of the CA. The password is 16 characters in length.</p> <p><b>domain-name</b> <i>domain-name</i>—Fully qualified domain name (FQDN). The FQDN provides the identity of the certificate owner for Internet Key Exchange (IKE) negotiations and provides an alternative to the subject name.</p> <p><b>subject</b> <i>subject-distinguished-name</i>—Distinguished name format that contains the common name, department, company name, state, and country:</p> <ul style="list-style-type: none"><li>• <b>CN</b>—Common name</li><li>• <b>OU</b>—Organizational unit name</li><li>• <b>O</b>—Organization name</li><li>• <b>ST</b>—State</li><li>• <b>C</b>—Country</li></ul> <p><b>email</b> <i>email-address</i>—(Optional) E-mail address of the certificate holder.</p> <p><b>ip-address</b> <i>ip-address</i>—(Optional) IP address of the router.</p> |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show security pki local-certificate on page 1244</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## Sample Output

```
user@host> request security pki local-certificate enroll certificate-id r3-entrust-scep ca-profile
entrust domain-name router3.example.net subject "CN=router3,OU=Engineering,O=juniper,C=US"
challenge-password 123
```

Certificate enrollment has started. To view the status of your enrollment, check the public key infrastructure log (pkid) log file at /var/log/pkid. Please save the challenge-password for revoking this certificate in future. Note that this password is not stored on the router.

## request security pki local-certificate generate-self-signed

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki local-certificate generate-self-signed certificate-id <i>certificate-id-name</i><br/>domain-name <i>domain-name</i> ip-address <i>ip-address</i> email <i>email-address</i><br/>subject <i>subject-distinguished-name</i></code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Manually generate a self-signed certificate for the given distinguished name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b>certificate-id</b> <i>certificate-id-name</i>—Name of the local digital certificate and the public/private key pair.</p> <p><b>domain-name</b> <i>domain-name</i>—Fully qualified domain name (FQDN). The FQDN provides the identity of the certificate owner for Internet Key Exchange (IKE) negotiations and provides an alternative to the subject name.</p> <p><b>email</b> <i>email-address</i>—E-mail address of the certificate holder.</p> <p><b>ip-address</b> <i>ip-address</i>—IP address of the router.</p> <p><b>subject</b> <i>subject-distinguished-name</i>—Distinguished name format that contains the common name, department, company name, state, and country:</p> <ul style="list-style-type: none"><li>• <b>CN</b>—Common name</li><li>• <b>OU</b>—Organizational unit name</li><li>• <b>O</b>—Organization name</li><li>• <b>ST</b>—State</li><li>• <b>C</b>—Country</li></ul> |
| <b>Required Privilege Level</b> | <p>maintenance</p> <p>security</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Requesting for and Installing a Digital Certificates on Your Router</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

### Sample Output

```
user@host> request security pki local-certificate generate-self-signed certificate-id self-cert
subject cn=abc domain-name example.net email user1@example.net
Self-signed certificate generated and loaded successfully
```

## request security pki local-certificate load

|                                 |                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki local-certificate load certificate-id <i>certificate-id-name</i> filename <i>path</i></code>                                                                                                                                               |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                           |
| <b>Description</b>              | Manually load a local digital certificate from a specified location.                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><b>certificate-id <i>certificate-id-name</i></b>—Name of the public/private key pair mapped to the local digital certificate.</p> <p><b>filename <i>path/filename</i></b>—Directory location and filename of the local digital certificate provided by the CA.</p> |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>    | <a href="#">request security pki local-certificate load on page 1101</a>                                                                                                                                                                                              |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                                                                                                                 |

## Sample Output

### request security pki local-certificate load

```
user@host> request security pki local-certificate load filename /tmp/router2-cert certificate-id
local-entrust2
Local certificate local-entrust2 loaded successfully
```

## request security pki local-certificate verify

---

|                                 |                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request security pki local-certificate verify certificate-id <i>certificate-id-name</i></code>               |
| <b>Release Information</b>      | Command introduced in Junos OS Release 8.5.                                                                        |
| <b>Description</b>              | Verify the validity of the local digital certificate identifier.                                                   |
| <b>Options</b>                  | <code>certificate-id <i>certificate-id-name</i></code> —Display the specified certificate identifier name.         |
| <b>Required Privilege Level</b> | maintenance                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show security pki local-certificate on page 1244</a></li></ul> |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                              |

### Sample Output

You receive the following response before the certificate revocation list (CRL) is downloaded:

```
request security pki local-certificate verify certificate-id bme1 (not downloaded)
user@host> request security pki local-certificate verify certificate-id bme1
```

```
Local certificate bme1: CRL verification in progress. Please check the PKId debug
logs for completion status
```

You receive the following response after the certificate revocation list (CRL) is downloaded:

```
request security pki local-certificate verify certificate bme1 (downloaded)
user@host> request security pki local-certificate verify certificate-id bme1
Local certificate bme1 verification success
```



---

## request system certificate add

---

|                                 |                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>request system certificate add (<i>filename</i>   terminal)</code>                                                                                                         |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.                                                               |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers, PTX Series, and QFX Series switches only) Add a certificate provided by the Juniper Networks certificate authority (CA). |
| <b>Options</b>                  | <b><i>filename</i></b> —Filename (URL, local, or remote).<br><b>terminal</b> —Use login terminal.                                                                                |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">request system certificate add terminal on page 1103</a>                                                                                                             |
| <b>Output Fields</b>            | When you enter this command, you are provided feedback on the status of your request.                                                                                            |

### Sample Output

#### request system certificate add terminal

```
user@host> request system certificate add terminal
```

## show access-security router-advertisement state

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show access-security router-advertisement state</b><br><b>&lt;interface <i>interface-name</i>&gt;</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Command introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Display the IPv6 Router Advertisement (RA) guard state information. Stateful RA guard enables the switch to learn about the sources of RA messages for a certain period of time. When the learning period ends, the switch has a record of which interfaces are attached to links with valid IPv6 routers. If there is no valid IPv6 router attached to the interface, the switch dynamically transitions the interface from the learning state into the blocking state. Subsequent RA messages received after the transition to blocking state are dropped. If there is a valid IPv6 router attached to the interface, the interface transitions to the forwarding state, and subsequent RA messages that can be validated against the configured policy are forwarded. |
| <b>Options</b>                  | <b>interface <i>interface-name</i></b> —(Optional) Display the RA guard entries for the specified interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">show access-security router-advertisement statistics on page 1106</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">show access-security router-advertisement state on page 1105</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>            | <a href="#">Table 40 on page 1104</a> lists the output fields for the <b>show access-security router-advertisement state</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

*Table 40: show access-security router-advertisement state Output Fields*

| Field Name       | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface</b> | Displays the interface on which stateful IPv6 RA guard is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>State</b>     | Displays one of the following states: <ul style="list-style-type: none"> <li><b>OFF</b>—The interface operates as if RA guard is not available.</li> <li><b>BLOCKED</b>—The interface blocks ingress RA messages.</li> <li><b>FORWARDING</b>—The interface forwards ingress RA messages that can be validated against the configured policy.</li> <li><b>LEARNING</b>—The switch is actively acquiring information about the IPv6 routing device connected to the interface.</li> <li><b>TRUSTED</b>—The interface forwards all ingress RA messages without performing policy checks.</li> </ul> |

## Sample Output

### show access-security router-advertisement state

```
user@device> show access-security router-advertisement state
Interface state
ge-0/0/0.0 LEARNING
ge-1/0/0.0 FORWARDING
ge-1/0/0.0 BLOCKED
```

## show access-security router-advertisement statistics

|                                 |                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show access-security router-advertisement statistics</b><br><b>&lt;interface <i>interface-name</i>&gt;</b>                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1X53-D55 for EX3400 switches.<br>Command introduced in Junos OS Release 16.1 for EX Series switches.                                                                                                                                                                                                                                             |
| <b>Description</b>              | Display the IPv6 Router Advertisement (RA) guard entries for received RA messages. RA guard enables a switch to examine incoming RA messages and filter them on the basis of predefined set of criteria. Once the switch has validated that the sender of the RA message is a legitimate IPv6 router, it forwards the RA message to its destination; otherwise, the RA message is dropped. |
| <b>Options</b>                  | <b>interface <i>interface-name</i></b> —(Optional) Display the RA guard entries for the specified interface.                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">clear access-security router-advertisement statistics on page 1051</a></li> </ul>                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show access-security router-advertisement statistics on page 1106</a>                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>            | <a href="#">Table 40 on page 1104</a> lists the output fields for the <b>show access-security router-advertisement statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                         |

*Table 41: show access-security router-advertisement statistics Output Fields*

| Field Name                | Field Description                                           | Level of Output |
|---------------------------|-------------------------------------------------------------|-----------------|
| <b>Interface</b>          | Interface on which the RA packet was received.              | All levels      |
| <b>RA Packets</b>         | Total number of RA packets that were received.              | All levels      |
| <b>RA inspection pass</b> | Total number of RA packets that passed RA guard inspection. | All levels      |
| <b>RA inspection fail</b> | Total number of RA packets that failed RA guard inspection. | All levels      |

## Sample Output

### show access-security router-advertisement statistics

```
user@device> show access-security router-advertisement statistics
```

| Interface   | RA Packets received | RA inspection pass | RA inspection fail |
|-------------|---------------------|--------------------|--------------------|
| ge-0/0/7.0  | 3                   | 2                  | 1                  |
| ge-0/0/15.0 | 8                   | 5                  | 3                  |

## show arp inspection statistics

**Syntax** show arp inspection statistics

**Release Information** Command introduced in Junos OS Release 9.0 for EX Series switches.  
Command introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Display ARP inspection statistics.

**Required Privilege Level** view

**Related Documentation**

- [clear arp inspection statistics on page 1054](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Verifying That DAI Is Working Correctly on page 461](#)

**List of Sample Output** [show arp inspection statistics on page 1108](#)

**Output Fields** [Table 42 on page 1108](#) lists the output fields for the **show arp inspection statistics** command. Output fields are listed in the approximate order in which they appear.

*Table 42: show arp inspection statistics Output Fields*

| Field Name            | Field Description                                            | Level of Output |
|-----------------------|--------------------------------------------------------------|-----------------|
| Interface             | Interface on which ARP inspection has been applied.          | All levels      |
| Packets received      | Total number of packets total that underwent ARP inspection. | All levels      |
| ARP inspection pass   | Total number of packets that passed ARP inspection.          | All levels      |
| ARP inspection failed | Total number of packets that failed ARP inspection.          | All levels      |

## Sample Output

### show arp inspection statistics

```
user@switch> show arp inspection statistics
```

| Interface | Packets received | ARP inspection pass | ARP inspection failed |
|-----------|------------------|---------------------|-----------------------|
| -----     | -----            | -----               | -----                 |
| ge-0/0/0  | 0                | 0                   | 0                     |
| ge-0/0/1  | 0                | 0                   | 0                     |
| ge-0/0/2  | 0                | 0                   | 0                     |
| ge-0/0/3  | 0                | 0                   | 0                     |
| ge-0/0/4  | 0                | 0                   | 0                     |
| ge-0/0/5  | 0                | 0                   | 0                     |

|          |     |     |   |
|----------|-----|-----|---|
| ge-0/0/6 | 0   | 0   | 0 |
| ge-0/0/7 | 703 | 701 | 2 |

## show ddos-protection protocols

---

**Syntax** `show ddos-protection protocols <protocol-group (aggregate | packet-type)>`

**Release Information** Command introduced in Junos OS Release 11.2.  
Command introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.  
Command introduced in Junos OS Release 14.1X53 on QFX Series switches.  
Support for Enhanced Subscriber Management added in Junos OS Release 17.3R1.

**Description** Display DDoS protection configuration and statistics for protocol groups or individual packet types.

**Options** **none**—Display information for all packet types in all protocol groups.

**aggregate**—(Optional) Display DDoS protection information for the aggregate policer. The **aggregate** option is available for all protocol groups.

**packet-type**—(Optional) Display DDoS protection information for the specified packet type in the protocol group. The available packet types vary by protocol group.

On QFX Series switches, only aggregate policers are available for protocol groups that are not in the following list:

- **mcast-snoop**—The following packet types are available for the **mcast-snoop** protocol group:
  - **igmp**—Control packets for IGMP snooping.
  - **mld**—Control packets for MLD snooping.
  - **pim**—Control packets for PIM snooping.
- **radius**—The following packet types are available for the **radius** protocol group:
  - **accounting**—RADIUS accounting packets.
  - **authorization**—RADIUS authorization packets.
  - **server**—RADIUS server traffic.

On MX Series routers, T4000 routers, and EX9200 switches, only aggregate policers are available for protocol groups that are not in the following list:

- **dhcpv4**—The following packet types are available for DHCPv4 traffic:
  - **ack**—DHCPACK packets.
  - **bad-packets**—DHCPv4 packets with bad formats.
  - **bootp**—DHCPBOOTP packets.
  - **decline**—DHCPDECLINE packets.



- **discover**—DHCDISCOVER packets.
- **force-renew**—DHCPFORCERENEW packets.
- **inform**—DHCPINFORM packets.
- **lease-active**—DHCPLEASEACTIVE packets.
- **lease-query**—DHCPLEASEQUERY packets.
- **lease-unassigned**—DHCPLEASEUNASSIGNED packets.
- **lease-unknown**—DHCPLEASEUNKNOWN packets.
- **nak**—DHCPNAK packets.
- **no-message-type**—DHCP packets that are missing the message type.
- **offer**—DHCOFFER packets.
- **release**—DHCPACK packets.
- **renew**—DHCPRENEW packets.
- **request**—DHCPREQUEST packets.
- **unclassified**— All unclassified packets in the protocol group.
- **dhcpv6**—The following packet types are available for DHCPv6 traffic:
  - **advertise**—ADVERTISE packets.
  - **confirm**—CONFIRM packets.
  - **decline**—DECLINE packets.
  - **information-request**—INFORMATION-REQUEST packets.
  - **leasequery**—LEASEQUERY packets.
  - **leasequery-data**—LEASEQUERY-DATA packets.
  - **leasequery-done**—LEASEQUERY-DONE packets.
  - **leasequery-reply**—LEASEQUERY-REPLY packets.
  - **rebind**—REBIND packets.
  - **reconfigure**—RECONFIGURE packets.
  - **relay-forward**—RELAY-FORWARD packets.
  - **relay-reply**—RELAY-REPLY packets.
  - **release**—RELEASE packets.
  - **renew**—RENEW packets.
  - **reply**—REPLY packets.
  - **request**—REQUEST packets.

- **solicit**—SOLICIT packets.
- **unclassified**— All unclassified packets in the protocol group.
- **filter-action**—The following packet types are available for unclassified firewall filter action packets, sent to the host because of reject terms in firewall filters:
  - **filter-v4**—Unclassified IPv4 filter action packets.
  - **filter-v6**—Unclassified IPv6 filter action packets.
  - **other**—All other unclassified filter action packets that are not IPv4 or IPv6.
- **frame-relay**—The following packet types are available for Frame Relay traffic:
  - **frf15**—Multilink frame relay FRF.15 packets.
  - **frf16**—Multilink frame relay FRF.16 packets.
- **ip-fragments**—The following packet types are available for IP fragments:
  - **first-fragment**—First IP fragment.
  - **trail-fragment**—Last IP fragment.
- **ip-options**—The following packet types are available for IP option traffic:
  - **non-v4v6**—Options packets other than IPv4/v6.
  - **router-alert**—Router alert options packets.
  - **unclassified**— All unclassified packets in the protocol group.
- **l2tp**—The following packet types are available for L2TP traffic:
  - **cdn**—Call-Disconnect-Notify message packets.
  - **hello**—Hello message packets.
  - **iccn**—Incoming-Call-Connected message packets.
  - **icrq**—Incoming-Call-Request message packets.
  - **scccn**—Start-Control-Connection-Connected message packets.
  - **sccrq**—Start-Control-Connection-Request message packets.
  - **stopccn**—Stop-Control-Connection-Notification message packets.
  - **unclassified**—All unclassified packets in the protocol group.
- **mcast-snoop**—Control traffic for multicast snooping.
  - **igmp**—Snooped IGMP traffic.
  - **pim**—Snooped PIM control traffic.
- **mlp**—The following MLP packet types are available:

- **add**—Add requests; internal MAC address learning request packets sent to the host.
- **delete**—Delete requests; internal MAC address learning request packets sent to the host.
- **lookup**—Lookup requests; internal MAC address learning request packets sent to the host.
- **unclassified**— All unclassified packets in the protocol group.
- **ndpv6**—The following packet types are available for NDPv6 traffic, except where noted, starting in 14.1R8, 14.2R8, 15.1R5, 15.1F7, and 16.1R1:
  - **invalid-hop-limit**—(Starting in 16.1R2) Invalid hop limit packets. These messages might represent crafted packets in a malicious network-based packet flood.
  - **neighbor-advertisement**—Neighbor advertisement packets. These are messages used for duplicate address detection and to test reachability of neighbors. Neighbor advertisements are sent in response to neighbor solicitation messages.
  - **neighbor-solicitation**—Neighbor solicitation packets. These are messages used for duplicate address detection and to test reachability of neighbors.
  - **redirect**—Redirect packets.
  - **router-advertisement**—Router advertisement packets. These are messages sent to announce the presence of the router, advertise prefixes, assist in address configuration, and share other link information such as MTU size and hop limit. The IPv6 nodes on the link can use this information to configure themselves with an IPv6 address and routing information such as the default gateway.
  - **router-solicitation**—Router solicitation packets. These are messages sent by IPv6 nodes when they come online to solicit immediate router advertisements from the router.
- **ppp**—The following PPP packet types are available:
  - **authentication**—PPP authentication protocol packets.
  - **echo-rep**—LCP echo reply packets.
  - **echo-req**—LCP echo request packets.
  - **ipcp**—IP Control Protocol packets.
  - **ipv6cp**—IPv6 Control Protocol packets.
  - **isis**—IS-IS packets.
  - **lcp**—Link Control Protocol packets.
  - **mlppp-lcp**—MLPPP LCP packets.
  - **mplscp**—MPLS Control Protocol packets.
  - **unclassified**— All unclassified packets in the protocol group.
- **pppoe**—The following PPPoE packet types are available:

- **padi**—PADI packets.
- **padm**—PADM packets.
- **padn**—PADN packets.
- **pado**—PADO packets.
- **padr**—PADR packets.
- **pads**—PADS packets.
- **padt**—PADT packets.
- **radius**—The following RADIUS packet types are available:
  - **accounting**—RADIUS accounting packets.
  - **authorization**—RADIUS authorization packets.
  - **server**—RADIUS server traffic.
  - **unclassified**— All unclassified packets in the protocol group.
- **re-services**—The following packet type is available for Routing Engine-based HTTP redirect IPv4 traffic:
  - **captive-portal**—Routing Engine-based captive portal content delivery packets.
- **re-services-v6**—The following packet type is available for Routing Engine-based HTTP redirect IPv6 traffic:
  - **captive-portal**—Routing Engine-based captive portal content delivery packets.
- **resolve**—The following packet types are available for unclassified resolve packets, which are sent to the host because of a traffic request resolve action:
  - **mcast-v4**—Unclassified IPv4 multicast resolve packets.
  - **mcast-v6**—Unclassified IPv6 multicast resolve packets.
  - **ucast-v4**—Unclassified IPv4 unicast resolve packets.
  - **ucast-v6**—Unclassified IPv6 unicast resolve packets.
  - **other**—All other unclassified resolve packets.
- **sample**—The following sample packet types are available:
  - **host**—Host packets.
  - **pfe**—Packet Forwarding Engine packets.
  - **syslog**—System log message packets.
  - **tap**—TAP packets.
- **tcp-flags**—The following TCP-flagged packet types are available:
  - **established**—TCP packets with ACK or RST flags set.
  - **initial**—TCP packets with SYN flag set and ACK flag not set.

- **unclassified**—TCP packets with flags set any other way than the established and initial packets.
- **unclassified**—The following unclassified packet types are available:
  - **control-layer2**—Unclassified layer 2 control packets.
  - **control-v4**—Unclassified IPv4 control packets.
  - **control-v6**—Unclassified IPv6 control packets.
  - **fw-host**—Unclassified send-to-host firewall packets.
  - **host-route-v4**—Unclassified IPv4 routing protocol and host packets in traffic sent to the router local interface address.
  - **host-route-v6**—Unclassified IPv6 routing protocol and host packets in traffic sent to the router local interface address.
  - **other**—All unclassified packets that do not belong to another type.
- **virtual-chassis**—The following packet types are available for virtual chassis packets:
  - **control-low**—Low-priority control packets.
  - **control-high**—High-priority control packets.
  - **unclassified**— All unclassified packets in the protocol group.
  - **vc-packets**—All exception packets on the virtual chassis link.
  - **vc-ttl-errors**—Virtual chassis TTL error packets.

**protocol-group**—(Optional) Display DDoS protection information for a protocol group. [Table 43 on page 1115](#) lists the protocol groups and the platforms they are supported on.

*Table 43: Supported Protocol Groups*

| Protocol Group                 | Description                 | MX Series Routers, T4000 Routers, EX9200 Switches | QFX Series Switches |
|--------------------------------|-----------------------------|---------------------------------------------------|---------------------|
| <b>all-fiber-channel-enode</b> | Fiber channel ENode traffic | —                                                 | X                   |
| <b>amtv4</b>                   | IPv4 AMT traffic            | X                                                 | —                   |
| <b>amtv6</b>                   | IPv6 AMT traffic            | X                                                 | —                   |
| <b>ancp</b>                    | ANCP traffic                | X                                                 | —                   |
| <b>ancpv6</b>                  | ANCPv6 traffic              | X                                                 | —                   |
| <b>arp</b>                     | ARP traffic                 | X                                                 | X                   |
| <b>arp-snoop</b>               | ARP snooping traffic        | —                                                 | X                   |

Table 43: Supported Protocol Groups (continued)

| Protocol Group  | Description                                                                                               | MX Series Routers, T4000 Routers, EX9200 Switches | QFX Series Switches |
|-----------------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------|
| atm             | ATM traffic                                                                                               | X                                                 | —                   |
| bfd             | Single-hop BFD traffic                                                                                    | X                                                 | X                   |
| bfdv6           | BFDv6 traffic                                                                                             | X                                                 | X                   |
| bgp             | BGP traffic                                                                                               | X                                                 | X                   |
| bgpv6           | BGPv6 traffic                                                                                             | X                                                 | —                   |
| bridge-control  | Bridge Control traffic                                                                                    | —                                                 | X                   |
| control         | Control traffic                                                                                           | X                                                 | —                   |
| demux-autosense | Demux autosensing traffic                                                                                 | X                                                 | —                   |
| dhcpv4          | DHCPv4 traffic                                                                                            | X                                                 | —                   |
| dhcpv6          | DHCPv6 traffic                                                                                            | X                                                 | —                   |
| dhcpv4v6        | DHCPv4 and DHCPv6 traffic                                                                                 | —                                                 | X                   |
| diameter        | Diameter and Gx-Plus traffic                                                                              | X                                                 | X                   |
| dns             | DNS traffic                                                                                               | X                                                 | X                   |
| dtcp            | DTCP traffic                                                                                              | X                                                 | X                   |
| dynamic-vlan    | Dynamic VLAN exception traffic                                                                            | X                                                 | —                   |
| egpv6           | EGPv6 traffic                                                                                             | X                                                 | X                   |
| eoam            | EOAM traffic                                                                                              | X                                                 | —                   |
| esmc            | ESMC traffic                                                                                              | X                                                 | —                   |
| ethernet-tcc    | TCC-encapsulated Ethernet traffic                                                                         | —                                                 | X                   |
| fab-probe       | Fab out probe packets                                                                                     | X                                                 | —                   |
| filter-action   | IPv4 and IPv6 firewall filter action packets sent to the host because of reject terms in firewall filters | X                                                 | —                   |

Table 43: Supported Protocol Groups (continued)

| Protocol Group | Description                                 | MX Series Routers, T4000 Routers, EX9200 Switches | QFX Series Switches |
|----------------|---------------------------------------------|---------------------------------------------------|---------------------|
| frame-relay    | Frame relay traffic                         | X                                                 | —                   |
| ftp            | FTP traffic                                 | X                                                 | X                   |
| ftpv6          | FTIPv6 traffic                              | X                                                 | —                   |
| garp-reply     | Gratuitous ARP reply traffic                | —                                                 | X                   |
| gre            | GRE traffic                                 | X                                                 | X                   |
| icmp           | ICMP traffic                                | X                                                 | X                   |
| igmp           | IGMP traffic                                | X                                                 | X                   |
| igmpv4v6       | IGMP and MLD traffic                        | X                                                 | —                   |
| igmpv6         | MLD traffic                                 | X                                                 | —                   |
| inline-ka      | Inline service interfaces keepalive traffic | X                                                 | —                   |
| inline-svcs    | Inline services traffic                     | X                                                 | —                   |
| ip-fragments   | IP fragments traffic                        | X                                                 | —                   |
| ip-options     | IP traffic with IP packet header options    | X                                                 | X                   |
| isis           | IS-IS traffic                               | X                                                 | X                   |
| iso-tcc        | TCC-encapsulated ISO traffic                | —                                                 | X                   |
| jfm            | JFM traffic                                 | X                                                 | —                   |
| l2tp           | Layer 2 protocol tunneling traffic          | X                                                 | X                   |
| lACP           | LACP traffic                                | X                                                 | X                   |
| ldp            | LDP traffic                                 | X                                                 | X                   |
| ldp-hello      | LDP hello packets                           | —                                                 | X                   |
| ldpv6          | LDPv6 traffic                               | X                                                 | —                   |
| lldp           | LLDP traffic                                | X                                                 | X                   |

Table 43: Supported Protocol Groups (continued)

| Protocol Group  | Description                                | MX Series Routers, T4000 Routers, EX9200 Switches | QFX Series Switches |
|-----------------|--------------------------------------------|---------------------------------------------------|---------------------|
| lmp             | LMP traffic                                | X                                                 | X                   |
| lmpv6           | LMPv6 traffic                              | X                                                 | —                   |
| mac-host        | Layer 2 MAC send-to-host traffic           | X                                                 | —                   |
| martian-address | Martian address                            | —                                                 | —                   |
| mcast-snoop     | Control traffic for multicast snooping     | X                                                 | X                   |
| mld             | MLD traffic                                | —                                                 | X                   |
| mlp             | MLP traffic                                | X                                                 | —                   |
| msdp            | MSDP traffic                               | X                                                 | X                   |
| multihop-bfd    | Multihop BFD traffic                       | —                                                 | X                   |
| mld             | MLD traffic                                | —                                                 | X                   |
| msdpv6          | MSDPv6 traffic                             | X                                                 | —                   |
| multicast-copy  | Host copy traffic due to multicast routing | X                                                 | —                   |
| mvrp            | MVRP traffic                               | X                                                 | —                   |
| ndpv6           | NDPv6 traffic                              | X                                                 | X                   |
| ntp             | NTP traffic                                | X                                                 | X                   |
| oam-cfm         | OAM CFM traffic                            | —                                                 | X                   |
| oam-lfm         | OAM LFM traffic                            | X                                                 | X                   |
| ospf            | OSPF traffic                               | X                                                 | X                   |
| ospf-hello      | OSPF hello packets                         | —                                                 | X                   |
| ospfv3v6        | OSPFv3/IPv6 traffic                        | X                                                 | —                   |
| pfe-alive       | Packet Forwarding Engine keepalive traffic | X                                                 | —                   |



Table 43: Supported Protocol Groups (continued)

| Protocol Group | Description                                                                                             | MX Series Routers, T4000 Routers, EX9200 Switches | QFX Series Switches |
|----------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------|
| pim            | PIM traffic                                                                                             | X                                                 | —                   |
| pim-ctrl       | PIM control packets                                                                                     | —                                                 | X                   |
| pim-data       | PIM data                                                                                                | —                                                 | X                   |
| pimv6          | PIMv6 traffic                                                                                           | X                                                 | —                   |
| pmvrp          | PMVRP traffic                                                                                           | X                                                 | —                   |
| pos            | POS traffic                                                                                             | X                                                 | —                   |
| ppp            | PPP traffic                                                                                             | X                                                 | —                   |
| pppoe          | PPPoE traffic                                                                                           | X                                                 | —                   |
| proto-802-1x   | 802.1X traffic                                                                                          | —                                                 | X                   |
| ptp            | PTP traffic                                                                                             | X                                                 | X                   |
| pvstp          | PVSTP traffic                                                                                           | X                                                 | X                   |
| radius         | RADIUS traffic                                                                                          | X                                                 | X                   |
| re-services    | Captive portal content delivery IPv4 traffic for Routing Engine HTTP redirect                           | X                                                 | —                   |
| re-services-v6 | Captive portal content delivery IPv6 traffic for Routing Engine HTTP redirect                           | X                                                 | —                   |
| redirect       | Traffic that triggers ICMP redirects                                                                    | X                                                 | —                   |
| reject         | Packets rejected by a next-hop forwarding decision                                                      | X                                                 | X                   |
| rejectv6       | IPv6 packets rejected by a next-hop forwarding decision                                                 | X                                                 | —                   |
| resolve        | Unclassified IPv4 and IPv6 resolve packets sent to the host because of a traffic request resolve action | X                                                 | X                   |
| rip            | RIP traffic                                                                                             | X                                                 | X                   |

Table 43: Supported Protocol Groups (continued)

| Protocol Group  | Description                                                                       | MX Series Routers, T4000 Routers, EX9200 Switches | QFX Series Switches |
|-----------------|-----------------------------------------------------------------------------------|---------------------------------------------------|---------------------|
| ripv6           | RIPv6 traffic                                                                     | X                                                 | —                   |
| rsvp            | RSVP traffic                                                                      | X                                                 | X                   |
| rsvppv6         | RSVPPv6 traffic                                                                   | X                                                 | —                   |
| snmp            | SNMP traffic                                                                      | X                                                 | X                   |
| snmpv6          | SNMPv6 traffic                                                                    | X                                                 | —                   |
| ssh             | SSH traffic                                                                       | X                                                 | X                   |
| sshv6           | SSHv6 traffic                                                                     | X                                                 | —                   |
| stp             | STP traffic                                                                       | X                                                 | X                   |
| syslog          | System log messages UDP traffic on port 6333 for the Routing Engine syslog server | X                                                 | —                   |
| tacacs          | TACACS+ traffic                                                                   | --                                                | X                   |
| tcp-flags       | Traffic with TCP flags                                                            | X                                                 | —                   |
| telnet          | Telnet traffic                                                                    | X                                                 | X                   |
| telnetv6        | Telnetv6 traffic                                                                  | X                                                 | —                   |
| ttl             | Time to Live packets                                                              | X                                                 | X                   |
| tunnel-fragment | Tunnel fragments traffic                                                          | X                                                 | —                   |
| tunnel-ka       | Tunnel keepalive traffic                                                          | X                                                 | —                   |
| unclassified    | Unclassified traffic                                                              | X                                                 | —                   |
| virtual-chassis | Virtual chassis traffic                                                           | X                                                 | —                   |
| vrrp            | VRRP traffic                                                                      | X                                                 | X                   |
| vrrpv6          | VRRPv6 traffic                                                                    | X                                                 | —                   |

Required Privilege Level [view](#)

- Related Documentation**
- [clear ddos-protection protocols on page 1056](#)
  - [show ddos-protection protocols culprit-flows on page 973](#)
  - [show ddos-protection protocols flow-detection on page 980](#)
  - [show ddos-protection protocols parameters on page 1131](#)
  - [show ddos-protection protocols statistics on page 1138](#)
  - [show ddos-protection protocols violations on page 1148](#)

- List of Sample Output**
- [show ddos-protection protocols on page 1126](#)
  - [show ddos-protection protocols \(Specific Packet Type with Flow Detection Disabled\) on page 1128](#)
  - [show ddos-protection protocols \(Specific Packet Type with Flow Detection Enabled and Automatic\) on page 1129](#)
  - [show ddos-protection protocols \(Specific Packet Type with Bandwidth Violation\) on page 1129](#)

- Output Fields** Table 44 on page 1121 lists the output fields for the **show ddos-protection protocols** command. Output fields are listed in the approximate order in which they appear.

*Table 44: show ddos-protection protocols Output Fields*

| Field Name                     | Field Description                                                                                             |
|--------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Packet types</b>            | Number of packet types                                                                                        |
| <b>Modified</b>                | Number of packets for which policer values have been modified from the default.                               |
| <b>Received traffic</b>        | Number of traffic flows received.                                                                             |
| <b>Currently violated</b>      | Number of flows that are currently violating the flow bandwidth limit.                                        |
| <b>Currently tracked flows</b> | Number of active flows that are being tracked as culprit flows by flow detection.                             |
| <b>Total detected flows</b>    | Total number of culprit flows that have been detected, including those that have recovered or timed out.      |
| <b>Protocol Group</b>          | Name of protocol group.                                                                                       |
| <b>Packet type</b>             | Name of packet type in protocol group.                                                                        |
| <b>Bandwidth</b>               | Bandwidth policer value; number of packets per second that is allowed before a violation is declared.         |
| <b>Burst</b>                   | Burst policer value; the maximum number of packets that is allowed in a burst before a violation is declared. |

Table 44: *show ddos-protection protocols Output Fields (continued)*

| Field Name       | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Priority         | Priority of the packet type for individual packet policers that enables more important traffic to pass through in the event of traffic congestion: <b>low</b> , <b>medium</b> , or <b>high</b> . Lower priority packets can be dropped when insufficient bandwidth is available.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Recover time     | Time that must pass since the last violation before the traffic flow is considered to have recovered from the attack. A notification is generated when the timer expires.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Enabled          | <p>State of the policer:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The policer is enabled on both the Routing Engine and the FPC (line card). This is the default state.</li> <li>• <b>No</b>—The policer is disabled on both the Routing Engine and the FPC by global configuration. It is not disabled by the packet type level configuration.</li> <li>• <b>No*</b>—The policer is disabled on both the Routing Engine and the FPC. The asterisk (*) indicates that one or both of these instances is disabled at the packet type level; it may also be disabled globally.</li> <li>• <b>Partial</b>—The policer is disabled on either the Routing Engine or the FPC, but not both. It is disabled by global configuration. It is not disabled by the packet type level configuration.</li> <li>• <b>Partial*</b>—The policer is disabled on either the Routing Engine or the FPC, but not both. The asterisk (*) indicates that the instance is disabled by the packet type level configuration; it may also be disabled globally.</li> </ul> <p>Disabling can occur globally for all packet types at the <b>[edit system ddos-protection global]</b> hierarchy level, for a specific packet type at the <b>[edit system ddos-protection protocols protocol-group (aggregate   packet-type)]</b> hierarchy level, or at both levels.</p> |
| Bypass aggregate | <p>State of the bypass aggregate configuration:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The aggregate policer is bypassed.</li> <li>• <b>No</b>—The aggregate policer is enforced.</li> </ul> <p>This field appears only for individual policers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

Table 44: *show ddos-protection protocols Output Fields (continued)*

| Field Name                          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Flow detection configuration</b> | <p>State of flow detection configured on the router:</p> <ul style="list-style-type: none"> <li>Detection mode—Mode of operation for suspicious flow detection: automatic, off, or on.</li> <li>Log flows—State of automatic logging of suspicious traffic flows: on (<b>Yes</b>) or off (<b>No</b>).</li> <li>Timeout flows—State of culprit flow timeout behavior: flow is suppressed for a configured timeout period (<b>Yes</b>) or flow is suppressed until it is no longer in violation (<b>No</b>).</li> <li>Detect time—Time in seconds that must pass before a suspicious flow that has exceeded the bandwidth allowed for the packet type is considered to be a culprit flow.</li> <li>Recover time—Time in seconds that must pass before a culprit flow is considered to have returned to normal. The period starts when the flow drops below the threshold that triggered the last violation.</li> <li>Timeout time—Time in seconds that a culprit flow is suppressed, if timeouts have been enabled.</li> <li>Flow aggregation level configuration—Flow detection mode, flow control mode, and flow bandwidth for traffic at each of the traffic flow aggregation levels: subscriber, logical interface, and physical interface. <ul style="list-style-type: none"> <li>Detection mode—State of flow detection: automatic, off, or on.</li> <li>Control mode—Mode of controlling culprit traffic: dropped, kept, or policed back to within the allowed bandwidth.</li> <li>Flow rate—Bandwidth allowed for the control traffic in packets per second.</li> </ul> </li> </ul> |
| <b>System-wide information</b>      | <p>The following information collected for the router:</p> <ul style="list-style-type: none"> <li>A message indicates whether the policer has been violated.</li> <li>No. of FPCs currently receiving excess traffic—Number of cards that are currently in violation of a policer.</li> <li>No. of FPCs that have received excess traffic—Number of cards that have at some point been in violation of a policer.</li> <li>Violation first detected at—Timestamp of the first violation.</li> <li>Violation last seen at—Timestamp of the last observed violation.</li> <li>Duration of violation—Length of the violation.</li> <li>Number of violations—Number of times the violation has occurred.</li> <li>Received—Number of packets received at all card slots and the Routing Engine.</li> <li>Dropped—Number of packets dropped regardless of where they were dropped.</li> <li>Arrival rate—Current traffic rate for packets arriving from all cards and at the Routing Engine.</li> <li>Max arrival rate—Highest traffic rate for packets arriving from all cards and at the Routing Engine.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 44: show ddos-protection protocols Output Fields (continued)

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Routing Engine information | <p>The following information collected for the Routing Engine:</p> <ul style="list-style-type: none"> <li>• Bandwidth—Maximum number of packets per second that is allowed.</li> <li>• Burst—Maximum number of packets that is allowed in a burst.</li> <li>• State of the policer: <ul style="list-style-type: none"> <li>• <b>enabled</b>—The Routing Engine policer is enabled. This is the default state.</li> <li>• <b>disabled</b>—The Routing Engine policer is disabled globally. It is not disabled by the packet type level configuration.</li> <li>• <b>disabled*</b>—The Routing Engine policer is disabled by the packet type level configuration; it may also be disabled globally.</li> </ul> </li> <li>• A message indicates whether the policer has been violated; the policer might be passed at the individual cards, but the combined rate of packets arriving at the Routing Engine can exceed the configured policer value.</li> <li>• Violation first detected at—Timestamp of the first violation.</li> <li>• Violation last seen at—Timestamp of the last observed violation.</li> <li>• Duration of violation—Length of the violation.</li> <li>• Number of violations—Number of times the violation has occurred.</li> <li>• Received—Number of packets received at the Routing Engine from all cards.</li> <li>• Dropped—Number of packets dropped at the Routing Engine; includes packets dropped by the aggregate policer and by individual protocol policers.</li> <li>• Arrival rate—Current traffic rate for packets arriving at the Routing Engine from all cards.</li> <li>• Max arrival rate—Highest traffic rate for packets arriving at the Routing Engine from all cards.</li> <li>• Dropped by aggregate policer—Number of packets dropped by the aggregate policer.</li> <li>• Dropped by individual policers—Number of packets dropped by individual policer.</li> </ul> |

Table 44: *show ddos-protection protocols Output Fields (continued)*

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FPC slot information</b> | <p>The following information collected for the card in the indicated slot:</p> <ul style="list-style-type: none"> <li>• <b>Bandwidth</b>—Bandwidth scaling percentage and the number of packets per second that is allowed before a violation is declared.</li> <li>• <b>Burst</b>—Burst scaling percentage and the maximum number of packets that is allowed in a burst before a violation is declared.</li> <li>• <b>State of the policer</b>: <ul style="list-style-type: none"> <li>• <b>enabled</b>—The FPC policer is enabled. This is the default state.</li> <li>• <b>disabled</b>—The FPC policer is disabled globally. It is not disabled by the packet type level configuration.</li> <li>• <b>disabled*</b>—The FPC policer is disabled by the packet type level configuration; it may also be disabled globally.</li> </ul> </li> <li>• A message indicates whether the policer has been violated.</li> <li>• <b>Violation first detected at</b>—Timestamp of the first violation.</li> <li>• <b>Violation last seen at</b>—Timestamp of the last observed violation.</li> <li>• <b>Duration of violation</b>—Length of the violation.</li> <li>• <b>Number of violations</b>—Number of times the violation has occurred.</li> <li>• <b>Received</b>—Number of packets received on the line card.</li> <li>• <b>Dropped</b>—Number of packets dropped at the line card; includes packets dropped by the aggregate policer and by individual protocol policers.</li> <li>• <b>Arrival rate</b>—Current traffic rate for packets arriving at the line card.</li> <li>• <b>Max arrival rate</b>—Highest traffic rate for packets arriving at the line card.</li> <li>• <b>Dropped by this policer</b>—Number of packets dropped by the individual policer.</li> <li>• <b>Dropped by aggregate policer</b>—Number of packets dropped by the aggregate policer.</li> </ul> <p><b>NOTE:</b> On MX Series routers with built-in MPCs—the MX5, MX10, MX40, MX80, and MX104 routers—this field actually displays information for tfeb0 because these routers have no Flexible PIC Concentrator (FPC) slots. Instead, the Packet Forwarding Engine has two “pseudo” FPCs (FPC 0 and FPC1).</p> |
| <b>Bypass aggr.</b>         | <p>State of the bypass aggregate configuration:</p> <ul style="list-style-type: none"> <li>• <b>Yes</b>—The aggregate policer configuration is bypassed.</li> <li>• <b>No</b>—The aggregate policer configuration is enforced.</li> </ul> <p>Dashes indicate that the bypass aggregate configuration is not available; this is possible only for aggregate policers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>FPC Mod</b>              | <p>Indicates whether configuration has changed from the default for any line cards.</p> <ul style="list-style-type: none"> <li>• <b>No</b>—The default configuration has not changed from the default for the packet type.</li> <li>• <b>Yes</b>—The default configuration has changed from the default for the packet type</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Op mode</b>              | <p>Mode of operation for suspicious flow detection for the packet type: always-on (<b>on</b>), (<b>auto</b>), or disabled (<b>off</b>).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

Table 44: show ddos-protection protocols Output Fields (continued)

| Field Name                                     | Field Description                                                                                                                                                                                                                     |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Policer BW (pps)</b>                        | Bandwidth policer value; number of packets per second that is allowed before a violation is declared.                                                                                                                                 |
| <b>Aggr level</b><br><b>Op:Fc:Bwidth (pps)</b> | Flow operation mode, flow control mode, and flow bandwidth for traffic of the packet type at each traffic flow aggregation level: subscriber ( <b>sub</b> ), logical interface ( <b>ifl</b> ), and physical interface ( <b>ifd</b> ). |
| <b>Log flow</b>                                | State of automatic logging of suspicious traffic flows for the packet type: on ( <b>Yes</b> ) or off ( <b>No</b> ).                                                                                                                   |
| <b>Time out</b>                                | State of culprit flow timeout behavior for the packet type: flow is suppressed or monitored for a configured timeout period ( <b>Yes</b> ) or flow is suppressed or monitored until it is no longer in violation ( <b>No</b> ).       |

## Sample Output

### show ddos-protection protocols

```
user@host> show ddos-protection protocols
```

```
Packet types: 190, Modified: 0, Received traffic: 12, Currently violated: 3
Currently tracked flows: 0, Total detected flows: 0
* = User configured value
```

```
Protocol Group: IPv4-Unclassified
```

```
Packet type: aggregate (Aggregate for unclassified host-bound IPv4 traffic)
```

```
Aggregate policer configuration:
```

```
Bandwidth: 2000 pps
Burst: 10000 packets
Recover time: 300 seconds
Enabled: Yes
```

```
Flow detection configuration:
```

```
Detection mode: Automatic Detect time: 3 seconds
Log flows: No Recover time: 60 seconds
Timeout flows: No Timeout time: 300 seconds
```

```
Flow aggregation level configuration:
```

| Aggregation level  | Detection mode | Control mode | Flow rate |
|--------------------|----------------|--------------|-----------|
| Subscriber         | Automatic      | Drop         | 10 pps    |
| Logical interface  | Automatic      | Drop         | 10 pps    |
| Physical interface | Automatic      | Drop         | 2000 pps  |

```
System-wide information:
```

```
Aggregate bandwidth is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
```

```
Routing Engine information:
```

```
Bandwidth: 2000 pps, Burst: 10000 packets, enabled
Aggregate policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by individual policers: 0
```

```
FPC slot 1 information:
```

```
Bandwidth: 100% (2000 pps), Burst: 100% (10000 packets), enabled
Aggregate policer is never violated
```



```

Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by individual policers: 0
Dropped by flow suppression: 0

```

...

Protocol Group: PPPoE

Packet type: aggregate (Aggregate for all PPPoE control traffic)

Aggregate policer configuration:

```

Bandwidth: 2000 pps
Burst: 2000 packets
Recover time: 300 seconds
Enabled: Yes

```

Flow detection configuration:

```

Detection mode: Automatic Detect time: 3 seconds
Log flows: No Recover time: 60 seconds
Timeout flows: No Timeout time: 300 seconds

```

Flow aggregation level configuration:

| Aggregation level  | Detection mode | Control mode | Flow rate |
|--------------------|----------------|--------------|-----------|
| Subscriber         | Automatic      | Drop         | 10 pps    |
| Logical interface  | Automatic      | Drop         | 10 pps    |
| Physical interface | Automatic      | Drop         | 2000 pps  |

System-wide information:

```

Aggregate bandwidth is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps

```

Routing Engine information:

```

Bandwidth: 2000 pps, Burst: 2000 packets, enabled
Aggregate policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by individual policers: 0

```

FPC slot 1 information:

```

Bandwidth: 100% (2000 pps), Burst: 100% (2000 packets), enabled
Aggregate policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by individual policers: 0
Dropped by flow suppression: 0

```

Packet type: padi (PPPoE PADI)

Individual policer configuration:

```

Bandwidth: 500 pps
Burst: 500 packets
Priority: Low
Recover time: 300 seconds
Enabled: Yes
Bypass aggregate: No

```

Flow detection configuration:

```

Detection mode: Automatic Detect time: 3 seconds
Log flows: No Recover time: 60 seconds
Timeout flows: No Timeout time: 300 seconds

```

Flow aggregation level configuration:

| Aggregation level  | Detection mode | Control mode | Flow rate |
|--------------------|----------------|--------------|-----------|
| Subscriber         | Automatic      | Drop         | 10 pps    |
| Logical interface  | Automatic      | Drop         | 10 pps    |
| Physical interface | Automatic      | Drop         | 500 pps   |

System-wide information:

```

Bandwidth is never violated

```

```

Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
Bandwidth: 500 pps, Burst: 500 packets, enabled
Policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by aggregate policer: 0
FPC slot 1 information:
Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled
Policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by aggregate policer: 0
Dropped by flow suppression: 0
...

```

### show ddos-protection protocols (Specific Packet Type with Flow Detection Disabled)

```

user@host> show ddos-protection protocols pppoe padi
Currently tracked flows: 0, Total detected flows: 0
* = User configured value

```

Protocol Group: PPPoE

```

Packet type: padi (PPPoE PADI)
Individual policer configuration:
Bandwidth: 500 pps
Burst: 500 packets
Priority: Low
Recover time: 300 seconds
Enabled: Yes
Bypass aggregate: No
Flow detection configuration:
Detection mode: Off* Detect time: 3 seconds
Log flows: No Recover time: 60 seconds
Timeout flows: No Timeout time: 300 seconds
Flow aggregation level configuration:
Aggregation level Detection mode Control mode Flow rate
Subscriber Automatic Drop 10 pps
Logical interface Automatic Drop 10 pps
Physical interface Automatic Drop 500 pps
System-wide information:
Bandwidth is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
Bandwidth: 500 pps, Burst: 500 packets, enabled
Policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by aggregate policer: 0
FPC slot 1 information:
Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled
Policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by aggregate policer: 0
Dropped by flow suppression: 0

```

**show ddos-protection protocols (Specific Packet Type with Flow Detection Enabled and Automatic)**

```

user@host> show ddos-protection protocols pppoe padi
Currently tracked flows: 0, Total detected flows: 0
* = User configured value

Protocol Group: PPPoE

Packet type: padi (PPPoE PADI)
Individual policer configuration:
 Bandwidth: 500 pps
 Burst: 500 packets
 Priority: Low
 Recover time: 300 seconds
 Enabled: Yes
 Bypass aggregate: No
Flow detection configuration:
Detection mode: Automatic Detect time: 3 seconds
Log flows: No Recover time: 60 seconds
Timeout flows: No Timeout time: 300 seconds
Flow aggregation level configuration:
 Aggregation level Detection mode Control mode Flow rate
 Subscriber Automatic Drop 10 pps
 Logical interface Automatic Drop 10 pps
 Physical interface Automatic Drop 500 pps
System-wide information:
 Bandwidth is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
 Bandwidth: 500 pps, Burst: 500 packets, enabled
 Policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled
 Policer is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
 Dropped by flow suppression: 0

```

**show ddos-protection protocols (Specific Packet Type with Bandwidth Violation)**

```

user@host> show ddos-protection protocols bfd
Packet types: 1, Modified: 0, Received traffic: 1, Currently violated: 1
Currently tracked flows: 1, Total detected flows: 1
* = User configured value

```

Protocol Group: BFD

```

Packet type: aggregate (Aggregate for all bfd traffic)
Aggregate policer configuration:
 Bandwidth: 20000 pps
 Burst: 20000 packets
 Recover time: 300 seconds
 Enabled: Yes
Flow detection configuration:
 Detection mode: Automatic Detect time: 3 seconds

```

Log flows: No Recover time: 60 seconds  
Timeout flows: No Timeout time: 300 seconds  
Flow aggregation level configuration:  
Aggregation level Detection mode Control mode Flow rate  
Subscriber Automatic Drop 10 pps  
Logical interface Automatic Drop 10 pps  
Physical interface Automatic Drop 20000 pps

**System-wide information:****Aggregate bandwidth is being violated!****No. of FPCs currently receiving excess traffic: 1****No. of FPCs that have received excess traffic: 1**

Violation first detected at: 2012-10-24 23:40:20 EDT

Violation last seen at: 2012-10-25 10:25:48 EDT

Duration of violation: 10:45:28 Number of violations: 1

Received: 1173471731 Arrival rate: 30304 pps

Dropped: 399135607 Max arrival rate: 30331 pps

## Flow counts:

| Aggregation level | Current | Total detected |
|-------------------|---------|----------------|
| Subscriber        | 1       | 1              |
| Total             | 1       | 1              |

## Routing Engine information:

Bandwidth: 20000 pps, Burst: 20000 packets, enabled

Aggregate policer is never violated

Received: 366831604 Arrival rate: 0 pps

Dropped: 0 Max arrival rate: 9522 pps

Dropped by individual policers: 0

**FPC slot 1 information:****Bandwidth: 100% (20000 pps), Burst: 100% (20000 packets), enabled****Aggregate policer is currently being violated!**

Violation first detected at: 2012-10-24 23:40:21 EDT

Violation last seen at: 2012-10-25 10:25:48 EDT

Duration of violation: 10:45:27 Number of violations: 1

Received: 1173471731 Arrival rate: 30304 pps

Dropped: 399135607 Max arrival rate: 30331 pps

Dropped by individual policers: 0

Dropped by aggregate policer: 398854530

Dropped by flow suppression: 281077

## Flow counts:

| Aggregation level  | Current | Total detected | State  |
|--------------------|---------|----------------|--------|
| Subscriber         | 1       | 1              | Active |
| Logical-interface  | 0       | 0              | Active |
| Physical-interface | 0       | 0              | Active |
| Total              | 1       | 1              |        |

## show ddos-protection protocols parameters

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show ddos-protection protocols &lt;protocol-group&gt; parameters</code><br><code>&lt;brief   detail   terse&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Command introduced in Junos OS Release 11.2.</p> <p>Command introduced in Junos OS Release 12.3R2 on EX Series switches and T4000 routers.</p> <p>Command introduced in Junos OS Release 14.1X53 on QFX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Description</b>              | Display DDoS protection configuration information for all protocol groups or for a particular protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <p><b>none</b>—Display information for all protocol groups.</p> <p><b>brief   detail   terse</b>—(Optional) Display the specified level of output.</p> <ul style="list-style-type: none"> <li><b>brief</b>—Display basic function information.</li> <li><b>detail</b>—Add information to the <b>brief</b> output; it is identical to the output displayed when you choose no option. The <b>brief</b> and <b>detail</b> options display information for all protocol groups, which can be a long list.</li> <li><b>terse</b>—Display the same level of information as the <b>brief</b> option but only for active protocol groups—groups that show traffic in the <b>Received (packets)</b> column.</li> </ul> <p><b>protocol-group</b>—(Optional) Display information for a particular protocol group. See <a href="#">show ddos-protection protocols</a> for a list of available groups.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">clear ddos-protection protocols on page 1056</a></li> <li><a href="#">show ddos-protection protocols on page 1110</a></li> <li><a href="#">show ddos-protection protocols culprit-flows on page 973</a></li> <li><a href="#">show ddos-protection protocols flow-detection on page 980</a></li> <li><a href="#">show ddos-protection protocols statistics on page 1138</a></li> <li><a href="#">show ddos-protection protocols violations on page 1148</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show ddos-protection protocols parameters on page 1133</a><br><a href="#">show ddos-protection protocols parameters brief on page 1134</a><br><a href="#">show ddos-protection protocols dhcpv4 parameters brief on page 1135</a><br><a href="#">show ddos-protection protocols dhcpv4 parameters terse on page 1136</a><br><a href="#">show ddos-protection protocols dhcpv4 parameters on page 1136</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Output Fields** Table 45 on page 1132 lists the output fields for the **show ddos-protection protocols parameters** command. Output fields are listed in the approximate order in which they appear.

*Table 45: show ddos-protection protocols parameters Output Fields*

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                 | Level of Output    |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Protocol Group</b>       | Name of protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels         |
| <b>Packet type</b>          | Name of packet type in protocol group.                                                                                                                                                                                                                                                                                                                                                                                                            | All levels         |
| <b>Bandwidth</b>            | Bandwidth policer value; number of packets per second that is allowed before a violation is declared.<br><br>In the <b>brief</b> output, an asterisk indicates the value has been modified from the default.                                                                                                                                                                                                                                      | All levels         |
| <b>Burst</b>                | Burst policer value; the maximum number of packets that is allowed in a burst before a violation is declared.<br><br>In the <b>brief</b> output, an asterisk indicates the value has been modified from the default.                                                                                                                                                                                                                              | All levels         |
| <b>Priority</b>             | Priority of the packet type in the event of traffic congestion: <b>low</b> , <b>medium</b> , or <b>high</b> . Lower priority packets can be dropped when insufficient bandwidth is available.<br><br>In the <b>brief</b> output, an asterisk indicates the value has been modified from the default.                                                                                                                                              | All levels         |
| <b>Recover time</b>         | Time that must pass since the last violation before the traffic flow is considered to have recovered from the attack. A notification is generated when the timer expires.<br><br>In the <b>brief</b> output, an asterisk indicates the value has been modified from the default.                                                                                                                                                                  | All levels         |
| <b>Enabled</b>              | State of the policer, enabled ( <b>Yes</b> ) or disabled ( <b>No</b> ).                                                                                                                                                                                                                                                                                                                                                                           | <b>detail none</b> |
| <b>Bypass aggregate</b>     | State of the bypass aggregate configuration:<br><ul style="list-style-type: none"><li>• Yes—The aggregate policer is bypassed.</li><li>• No—The aggregate policer is enforced.</li></ul> This field appears only for individual policers.                                                                                                                                                                                                         | <b>detail none</b> |
| <b>FPC slot information</b> | The following configuration information for the card in the indicated slot:<br><ul style="list-style-type: none"><li>• Bandwidth—Bandwidth scale and the number of packets per second that is allowed before a violation is declared</li><li>• Burst—Burst scale and the maximum number of packets that is allowed in a burst before a violation is declared</li><li>• <b>enabled</b> or <b>disabled</b>—State of the line card policer</li></ul> | <b>detail none</b> |

Table 45: *show ddos-protection protocols parameters Output Fields (continued)*

| Field Name                         | Field Description                                                                                                                                                                                                                                                                                                        | Level of Output    |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Number of policers modified</b> | Number of policers that have been changed from the default configuration.<br><br>An asterisk by a particular value indicates that value has been modified.                                                                                                                                                               | <b>brief terse</b> |
| <b>Policer Enabled</b>             | State of the policer, enabled ( <b>Yes</b> ), disabled ( <b>No</b> ), or partially disabled ( <b>part.</b> ); <b>part.</b> indicates that only some of the policer instances are disabled for the policer.                                                                                                               | <b>brief terse</b> |
| <b>Bypass aggr.</b>                | State of the bypass aggregate configuration:<br><br><ul style="list-style-type: none"> <li>• Yes—The aggregate policer is bypassed.</li> <li>• No—The aggregate policer is enforced.</li> </ul> Dashes indicate that the bypass aggregate configuration is not available; this is possible only for aggregate policers.  | <b>brief terse</b> |
| <b>FPC Mod</b>                     | Indicates whether configuration has changed from the default for any line cards.<br><br><ul style="list-style-type: none"> <li>• No—The default configuration has not changed from the default for the packet type.</li> <li>• Yes—The default configuration has changed from the default for the packet type</li> </ul> | <b>brief terse</b> |

## Sample Output

### show ddos-protection protocols parameters

```

user@host> show ddos-protection protocols parameters
Protocol Group: IPv4-Unclassified

Packet type: aggregate (Aggregate for unclassified host-bound IPv4 traffic)
Aggregate policer configuration:
 Bandwidth: 20000 pps
 Burst: 20000 packets
 Priority: medium
 Recover time: 300 seconds
 Enabled: Yes
FPC slot 1 information:
 Bandwidth: 100% (20000 pps), Burst: 100% (20000 packets), enabled

Protocol Group: IPv6-Unclassified

Packet type: aggregate (Aggregate for unclassified host-bound IPv6 traffic)
Aggregate policer configuration:
 Bandwidth: 20000 pps
 Burst: 20000 packets
 Priority: medium
 Recover time: 300 seconds
 Enabled: Yes
FPC slot 1 information:
 Bandwidth: 100% (20000 pps), Burst: 100% (20000 packets), enabled

...

Protocol Group: PPPoE

```

```

Packet type: aggregate (Aggregate for all PPPoE control traffic)
Aggregate policer configuration:
 Bandwidth: 800 pps
 Burst: 2000 packets
 Priority: medium
 Recover time: 300 seconds
 Enabled: Yes
FPC slot 1 information:
 Bandwidth: 100% (800 pps), Burst: 100% (2000 packets), enabled

Packet type: padi (PPPoE PADI)
Individual policer configuration:
 Bandwidth: 500 pps
 Burst: 500 packets
 Priority: low
 Recover time: 300 seconds
 Enabled: Yes
 Bypass aggregate: No
FPC slot 1 information:
 Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled

Packet type: pado (PPPoE PADO)
Individual policer configuration:
 Bandwidth: 0 pps
 Burst: 0 packets
 Priority: low
 Recover time: 300 seconds
 Enabled: Yes
 Bypass aggregate: No
FPC slot 1 information:
 Bandwidth: 100% (0 pps), Burst: 100% (0 packets), enabled

Packet type: padr (PPPoE PADR)
Individual policer configuration:
 Bandwidth: 500 pps
 Burst: 500 packets
 Priority: medium
 Recover time: 300 seconds
 Enabled: Yes
 Bypass aggregate: No
FPC slot 1 information:
 Bandwidth: 100% (500 pps), Burst: 100% (500 packets), enabled

```

### show ddos-protection protocols parameters brief

```

user@host> show ddos-protection protocols parameters brief
Number of policers modified: 3

```

| Protocol group | Packet type | Bandwidth (pps) | Burst (pkts) | Priority | Recover time(sec) | Policer enabled | Bypass aggr. | FPC mod |
|----------------|-------------|-----------------|--------------|----------|-------------------|-----------------|--------------|---------|
| ipv4-uncls     | aggregate   | 20000           | 20000        | medium   | 300               | yes             | --           | no      |
| ipv6-uncls     | aggregate   | 20000           | 20000        | medium   | 300               | yes             | --           | no      |
| dynvlan        | aggregate   | 1000            | 500          | low      | 300               | yes             | --           | no      |
| ppp            | aggregate   | 16000           | 16000        | medium   | 300               | yes             | --           | no      |
| ppp            | unclass     | 1000            | 500          | low      | 300               | yes             | no           | no      |
| ppp            | lcp         | 12000           | 12000        | low      | 300               | yes             | no           | no      |
| ppp            | auth        | 2000            | 2000         | medium   | 300               | yes             | no           | no      |
| ppp            | ipcp        | 2000            | 2000         | high     | 300               | yes             | no           | no      |
| ppp            | ipv6cp      | 2000            | 2000         | high     | 300               | yes             | no           | no      |
| ppp            | mplscp      | 2000            | 2000         | high     | 300               | yes             | no           | no      |
| ppp            | isis        | 2000            | 2000         | high     | 300               | yes             | no           | no      |



|        |            |       |       |        |     |        |    |    |
|--------|------------|-------|-------|--------|-----|--------|----|----|
| pppoe  | aggregate  | 800*  | 2000  | medium | 300 | part.* | -- | no |
| pppoe  | padi       | 500   | 500   | low    | 300 | part.  | no | no |
| pppoe  | pado       | 0     | 0     | low    | 300 | part.  | no | no |
| pppoe  | padr       | 500   | 500   | medium | 300 | part.  | no | no |
| pppoe  | pads       | 0     | 0     | low    | 300 | part.  | no | no |
| pppoe  | padt       | 1000  | 1000  | high   | 300 | part.  | no | no |
| pppoe  | padm       | 0     | 0     | low    | 300 | part.  | no | no |
| pppoe  | padn       | 0     | 0     | low    | 300 | part.  | no | no |
| dhcpv4 | aggregate  | 669*  | 5000  | medium | 300 | yes    | -- | no |
| dhcpv4 | unclass..  | 300   | 150   | low    | 300 | yes    | no | no |
| dhcpv4 | discover   | 100*  | 500   | low    | 300 | yes    | no | no |
| dhcpv4 | offer      | 1000  | 1000  | low    | 300 | yes    | no | no |
| dhcpv4 | request    | 1000  | 1000  | medium | 300 | yes    | no | no |
| dhcpv4 | decline    | 500   | 500   | low    | 300 | yes    | no | no |
| dhcpv4 | ack        | 500   | 500   | medium | 300 | yes    | no | no |
| dhcpv4 | nak        | 500   | 500   | low    | 300 | yes    | no | no |
| dhcpv4 | release    | 2000  | 2000  | high   | 300 | yes    | no | no |
| dhcpv4 | inform     | 500   | 500   | low    | 300 | yes    | no | no |
| dhcpv4 | renew      | 2000  | 2000  | high   | 300 | yes    | no | no |
| dhcpv4 | forcerenew | 2000  | 2000  | high   | 300 | yes    | no | no |
| dhcpv4 | leasequery | 2000  | 2000  | high   | 300 | yes    | no | no |
| dhcpv4 | leaseuna.. | 2000  | 2000  | high   | 300 | yes    | no | no |
| dhcpv4 | leaseunk.. | 2000  | 2000  | high   | 300 | yes    | no | no |
| dhcpv4 | leaseact.. | 2000  | 2000  | high   | 300 | yes    | no | no |
| dhcpv4 | bootp      | 300   | 300   | low    | 300 | yes    | no | no |
| dhcpv4 | no-msgtype | 0     | 0     | low    | 300 | yes    | no | no |
| dhcpv4 | bad-pack.. | 0     | 0     | low    | 300 | yes    | no | no |
| ...    |            |       |       |        |     |        |    |    |
| icmp   | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| igmp   | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| ospf   | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| rsvp   | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| pim    | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| rip    | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| ptp    | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| bfd    | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| lmp    | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| ldp    | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| msdp   | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| bgp    | aggregate  | 20000 | 20000 | low    | 300 | yes    | -- | no |
| vrrp   | aggregate  | 20000 | 20000 | high   | 300 | yes    | -- | no |
| telnet | aggregate  | 20000 | 20000 | low    | 300 | yes    | -- | no |
| ftp    | aggregate  | 20000 | 20000 | low    | 300 | yes    | -- | no |
| ssh    | aggregate  | 20000 | 20000 | low    | 300 | yes    | -- | no |
| snmp   | aggregate  | 20000 | 20000 | low    | 300 | yes    | -- | no |
| ancp   | aggregate  | 20000 | 20000 | low    | 300 | yes    | -- | no |
| ...    |            |       |       |        |     |        |    |    |

### show ddos-protection protocols dhcpv4 parameters brief

```

user@host> show ddos-protection protocols dhcpv4 parameters brief
Number of policers modified: 2
Protocol Packet Bandwidth Burst Priority Recover Policers Bypass FPC
group type (pps) (pkts) time(sec) enabled aggr. mod
dhcpv4 aggregate 669* 5000 medium 300 yes -- no
dhcpv4 unclass.. 300 150 low 300 yes no no
dhcpv4 discover 100* 500 low 300 yes no no
dhcpv4 offer 1000 1000 low 300 yes no no

```

|        |            |      |      |        |     |     |    |    |
|--------|------------|------|------|--------|-----|-----|----|----|
| dhcpv4 | request    | 1000 | 1000 | medium | 300 | yes | no | no |
| dhcpv4 | decline    | 500  | 500  | low    | 300 | yes | no | no |
| dhcpv4 | ack        | 500  | 500  | medium | 300 | yes | no | no |
| dhcpv4 | nak        | 500  | 500  | low    | 300 | yes | no | no |
| dhcpv4 | release    | 2000 | 2000 | high   | 300 | yes | no | no |
| dhcpv4 | inform     | 500  | 500  | low    | 300 | yes | no | no |
| dhcpv4 | renew      | 2000 | 2000 | high   | 300 | yes | no | no |
| dhcpv4 | forcerenew | 2000 | 2000 | high   | 300 | yes | no | no |
| dhcpv4 | leasequery | 2000 | 2000 | high   | 300 | yes | no | no |
| dhcpv4 | leaseuna.. | 2000 | 2000 | high   | 300 | yes | no | no |
| dhcpv4 | leaseunk.. | 2000 | 2000 | high   | 300 | yes | no | no |
| dhcpv4 | leaseact.. | 2000 | 2000 | high   | 300 | yes | no | no |
| dhcpv4 | bootp      | 300  | 300  | low    | 300 | yes | no | no |
| dhcpv4 | no-msgtype | 0    | 0    | low    | 300 | yes | no | no |
| dhcpv4 | bad-pack.. | 0    | 0    | low    | 300 | yes | no | no |

### show ddos-protection protocols dhcpv4 parameters terse

```

user@host> show ddos-protection protocols dhcpv4 parameters terse
Number of policers modified: 2
Protocol Packet Bandwidth Burst Priority Recover Policer Bypass FPC
group type (pps) (pkts) time(sec) enabled aggr. mod
dhcpv4 aggregate 669* 5000 medium 300 yes -- no
dhcpv4 discover 100* 500 low 300 yes no no

```

### show ddos-protection protocols dhcpv4 parameters

```

user@host> show ddos-protection protocols dhcpv4 parameters
Protocol Group: DHCPv4

Packet type: aggregate (aggregate for all DHCPv4 traffic)
Aggregate policer configuration:
 Bandwidth: 669 pps
 Burst: 5000 packets
 Priority: medium
 Recover time: 300 seconds
 Enabled: Yes
FPC slot 1 information:
 Bandwidth: 100% (669 pps), Burst: 100% (5000 packets), enabled

Packet type: unclassified (Unclassified DHCPv4 traffic)
Individual policer configuration:
 Bandwidth: 300 pps
 Burst: 150 packets
 Priority: low
 Recover time: 300 seconds
 Enabled: Yes
 Bypass aggregate: No
FPC slot 1 information:
 Bandwidth: 100% (300 pps), Burst: 100% (150 packets), enabled

Packet type: discover (DHCPv4 DHCPDISCOVER)
Individual policer configuration:
 Bandwidth: 100 pps
 Burst: 500 packets
 Priority: low
 Recover time: 300 seconds
 Enabled: Yes
 Bypass aggregate: No
FPC slot 1 information:

```

Bandwidth: 100% (100 pps), Burst: 100% (500 packets), enabled

Packet type: offer (DHCPv4 DHCPOFFER)

Individual policer configuration:

Bandwidth: 1000 pps  
Burst: 1000 packets  
Priority: low  
Recover time: 300 seconds  
Enabled: Yes  
Bypass aggregate: No

FPC slot 1 information:

Bandwidth: 100% (1000 pps), Burst: 100% (1000 packets), enabled

Packet type: request (DHCPv4 DHCPREQUEST)

Individual policer configuration:

Bandwidth: 1000 pps  
Burst: 1000 packets  
Priority: medium  
Recover time: 300 seconds  
Enabled: Yes  
Bypass aggregate: No

FPC slot 1 information:

Bandwidth: 100% (1000 pps), Burst: 100% (1000 packets), enabled

...

## show ddos-protection protocols statistics

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show ddos-protection protocols</b> < <i>protocol-group</i> > <b>statistics</b><br>< <b>brief</b>   <b>detail</b>   <b>terse</b> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.2.<br>Command introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.<br>Command introduced in Junos OS Release 14.1X53 on QFX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Display traffic statistics and DDoS policer violation statistics for all protocol groups or for a particular protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <b>none</b> —Display information for all protocol groups.<br><br><b>brief</b>   <b>detail</b>   <b>terse</b> —(Optional) Display the specified level of output. <ul style="list-style-type: none"><li>• <b>brief</b>—Display basic function information.</li><li>• <b>detail</b>—Add information to the <b>brief</b> output; it is identical to the output displayed when you choose no option. The <b>brief</b> and <b>detail</b> options display information for all protocol groups, which can be a long list.</li><li>• <b>terse</b>—Display the same level of information as the <b>brief</b> option but only for active protocol groups—groups that show traffic in the <b>Received (packets)</b> column.</li></ul><br><b>protocol-group</b> —(Optional) Display information for a particular protocol group. See <a href="#">show ddos-protection protocols</a> for a list of available groups. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">clear ddos-protection protocols on page 1056</a></li><li>• <a href="#">show ddos-protection protocols on page 1110</a></li><li>• <a href="#">show ddos-protection protocols culprit-flows on page 973</a></li><li>• <a href="#">show ddos-protection protocols flow-detection on page 980</a></li><li>• <a href="#">show ddos-protection protocols parameters on page 1131</a></li><li>• <a href="#">show ddos-protection protocols violations on page 1148</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>    | <a href="#">show ddos-protection protocols statistics on page 1140</a><br><a href="#">show ddos-protection protocols statistics brief on page 1143</a><br><a href="#">show ddos-protection protocols statistics terse on page 1144</a><br><a href="#">show ddos-protection protocols pppoe statistics on page 1145</a><br><a href="#">show ddos-protection protocols pppoe statistics brief on page 1147</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Output Fields** Table 46 on page 1139 lists the output fields for the **show ddos-protection protocols statistics** command. Output fields are listed in the approximate order in which they appear.

*Table 46: show ddos-protection protocols statistics Output Fields*

| Field Name                        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Level of Output    |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Protocol Group</b>             | Name of protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | All levels         |
| <b>Packet type</b>                | Name of packet type in protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | All levels         |
| <b>System-wide information</b>    | <p>The following information collected for the router:</p> <ul style="list-style-type: none"> <li>• A message indicates whether the policer has been violated.</li> <li>• No. of FPCs currently receiving excess traffic—Number of cards that are currently in violation of a policer.</li> <li>• No. of FPCs that have received excess traffic—Number of cards that have at some point been in violation of a policer.</li> <li>• Violation first detected at—Timestamp of the first violation.</li> <li>• Violation last seen at—Timestamp of the last observed violation.</li> <li>• Duration of violation—Length of the violation.</li> <li>• Number of violations—Number of times the violation has occurred.</li> <li>• Received—Number of packets received at all card slots and the Routing Engine.</li> <li>• Dropped—Number of packets dropped regardless of where they were dropped.</li> <li>• Arrival rate—Current traffic rate for packets arriving from all cards and at the Routing Engine.</li> <li>• Max arrival rate—Highest traffic rate for packets arriving from all cards and at the Routing Engine.</li> </ul>                                                                                                                                                                | <b>detail none</b> |
| <b>Routing Engine information</b> | <p>The following information collected for the Routing Engine:</p> <ul style="list-style-type: none"> <li>• A message indicates whether the policer has been violated; the policer might be passed at the individual cards, but the combined rate of packets arriving at the Routing Engine can exceed the configured policer value.</li> <li>• Violation first detected at—Timestamp of the first violation.</li> <li>• Violation last seen at—Timestamp of the last observed violation.</li> <li>• Duration of violation—Length of the violation.</li> <li>• Number of violations—Number of times the violation has occurred.</li> <li>• Received—Number of packets received at the Routing Engine from all cards.</li> <li>• Dropped—Number of packets dropped at the Routing Engine; includes packets dropped by the aggregate policer and by individual protocol policers.</li> <li>• Arrival rate—Current traffic rate for packets arriving at the Routing Engine from all cards.</li> <li>• Max arrival rate—Highest traffic rate for packets arriving at the Routing Engine from all cards.</li> <li>• Dropped by aggregate policer—Number of packets dropped by the aggregate policer.</li> <li>• Dropped by individual policers—Number of packets dropped by individual policer.</li> </ul> | <b>detail none</b> |

Table 46: show ddos-protection protocols statistics Output Fields (continued)

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Level of Output    |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>FPC slot information</b> | <p>The following information collected for the card in the indicated slot:</p> <ul style="list-style-type: none"> <li>• A message indicates whether the policer has been violated</li> <li>• Violation first detected at—Timestamp of the first violation</li> <li>• Violation last seen at—Timestamp of the last observed violation</li> <li>• Duration of violation—Length of the violation</li> <li>• Number of violations—Number of times the violation has occurred</li> <li>• Received—Number of packets received on the line card</li> <li>• Dropped—Number of packets dropped at the line card; includes packets dropped by the aggregate policer and by individual protocol policers</li> <li>• Arrival rate—Current traffic rate for packets arriving at the line card</li> <li>• Max arrival rate—Highest traffic rate for packets arriving at the line card</li> <li>• Dropped by this policer—Number of packets dropped by the individual policer</li> <li>• Dropped by aggregate policer—Number of packets dropped by the aggregate policer</li> </ul> | <b>detail none</b> |
| <b>Received (packets)</b>   | Number of packets of this packet type or protocol group received at all cards and the Routing Engine.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>brief terse</b> |
| <b>Dropped (packets)</b>    | Number of packets dropped for this packet type or protocol group, regardless of where the packets were dropped.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>brief terse</b> |
| <b>Rate (pps)</b>           | Highest observed traffic rate for this packet type or protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>brief terse</b> |
| <b>Violation counts</b>     | Number of violations of the policer bandwidth.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>brief terse</b> |
| <b>State</b>                | <p>Violation state of the packet type:</p> <ul style="list-style-type: none"> <li>• <b>ok</b>—Policer has not been violated for this packet type</li> <li>• <b>viol</b>—Policer has been violated for this packet type</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>brief terse</b> |

## Sample Output

### show ddos-protection protocols statistics

```

user@host> show ddos-protection protocols statistics
Protocol Group: IPv4-Unclassified

Packet type: aggregate
System-wide information:
 Aggregate bandwidth is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
 Aggregate policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by individual policers: 0
FPC slot 1 information:
 Aggregate policer is never violated

```

```

Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Dropped by individual policers: 0

```

#### Protocol Group: IPv6-Unclassified

```

Packet type: aggregate
System-wide information:
 Aggregate bandwidth is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
 Aggregate policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by individual policers: 0
FPC slot 1 information:
 Aggregate policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by individual policers: 0

```

#### Protocol Group: PPPoE

```

Packet type: aggregate
System-wide information:
 Aggregate bandwidth is never violated
 Received: 61961244 Arrival rate: 4000 pps
 Dropped: 0 Max arrival rate: 4002 pps
Routing Engine information:
 Aggregate policer is never violated
 Received: 15488871 Arrival rate: 1001 pps
 Dropped: 0 Max arrival rate: 1011 pps
 Dropped by individual policers: 0
FPC slot 1 information:
 Aggregate policer is never violated
 Received: 61961244 Arrival rate: 4000 pps
 Dropped: 46473017 Max arrival rate: 4002 pps
 Dropped by individual policers: 46473017

```

```

Packet type: padi
System-wide information:
 Bandwidth is being violated!
 No. of FPCs currently receiving excess traffic: 1
 No. of FPCs that have received excess traffic: 1
 Violation first detected at: 2011-04-19 08:23:17 PDT
 Violation last seen at: 2011-04-19 12:41:23 PDT
 Duration of violation: 04:18:06 Number of violations: 1
 Received: 30980622 Arrival rate: 2000 pps
 Dropped: 23236505 Max arrival rate: 2001 pps
Routing Engine information:
 Policer is never violated
 Received: 7744433 Arrival rate: 500 pps
 Dropped: 0 Max arrival rate: 505 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Policer is currently being violated!
 Violation first detected at: 2011-04-19 08:23:17 PDT
 Violation last seen at: 2011-04-19 12:41:23 PDT
 Duration of violation: 04:18:06 Number of violations: 1

```

Received: 30980622                      Arrival rate: 2000 pps  
Dropped: 23236505                      Max arrival rate: 2001 pps  
Dropped by this policer: 23236505  
Dropped by aggregate policer: 0

Packet type: pado

System-wide information:

Bandwidth is never violated

Received: 0                              Arrival rate: 0 pps  
Dropped: 0                              Max arrival rate: 0 pps

Routing Engine information:

Policer is never violated

Received: 0                              Arrival rate: 0 pps  
Dropped: 0                              Max arrival rate: 0 pps  
Dropped by aggregate policer: 0

FPC slot 1 information:

Policer is never violated

Received: 0                              Arrival rate: 0 pps  
Dropped: 0                              Max arrival rate: 0 pps  
Dropped by aggregate policer: 0

Packet type: padr

System-wide information:

Bandwidth is being violated!

No. of FPCs currently receiving excess traffic: 1

No. of FPCs that have received excess traffic: 1

Violation first detected at: 2011-04-19 08:23:17 PDT

Violation last seen at: 2011-04-19 12:43:23 PDT

Duration of violation: 04:20:06 Number of violations: 1

Received: 31220846                      Arrival rate: 2000 pps  
Dropped: 23416690                      Max arrival rate: 2001 pps

Routing Engine information:

Policer is never violated

Received: 7806417                      Arrival rate: 499 pps  
Dropped: 0                              Max arrival rate: 506 pps  
Dropped by aggregate policer: 0

FPC slot 1 information:

Policer is currently being violated!

Violation first detected at: 2011-04-19 08:23:17 PDT

Violation last seen at: 2011-04-19 12:43:23 PDT

Duration of violation: 04:20:06 Number of violations: 1

Received: 31220846                      Arrival rate: 2000 pps  
Dropped: 23416690                      Max arrival rate: 2001 pps  
Dropped by this policer: 23416690  
Dropped by aggregate policer: 0

Packet type: pads

System-wide information:

Bandwidth is never violated

Received: 0                              Arrival rate: 0 pps  
Dropped: 0                              Max arrival rate: 0 pps

Routing Engine information:

Policer is never violated

Received: 0                              Arrival rate: 0 pps  
Dropped: 0                              Max arrival rate: 0 pps  
Dropped by aggregate policer: 0

FPC slot 1 information:

Policer is never violated

Received: 0                              Arrival rate: 0 pps  
Dropped: 0                              Max arrival rate: 0 pps  
Dropped by aggregate policer: 0



```

Packet type: padt
System-wide information:
 Bandwidth is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0

```

```

Packet type: padm
System-wide information:
 Bandwidth is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0

```

```

Packet type: padn
System-wide information:
 Bandwidth is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0

```

...

### show ddos-protection protocols statistics brief

```
user@host> show ddos-protection protocols statistics brief
```

| Protocol group | Packet type | Received (packets) | Dropped (packets) | Rate (pps) | Violation counts | State |
|----------------|-------------|--------------------|-------------------|------------|------------------|-------|
| ipv4-unc1s     | aggregate   | 0                  | 0                 | 0          | 0                | ok    |
| ipv6-unc1s     | aggregate   | 0                  | 0                 | 0          | 0                | ok    |
| dynvlan        | aggregate   | 0                  | 0                 | 0          | 0                | ok    |
| ppp            | aggregate   | 0                  | 0                 | 0          | 0                | ok    |

|         |            |          |          |      |   |      |
|---------|------------|----------|----------|------|---|------|
| ppp     | unclass    | 0        | 0        | 0    | 0 | ok   |
| ppp     | lcp        | 0        | 0        | 0    | 0 | ok   |
| ppp     | auth       | 0        | 0        | 0    | 0 | ok   |
| ppp     | ipcp       | 0        | 0        | 0    | 0 | ok   |
| ppp     | ipv6cp     | 0        | 0        | 0    | 0 | ok   |
| ppp     | mplscp     | 0        | 0        | 0    | 0 | ok   |
| ppp     | isis       | 0        | 0        | 0    | 0 | ok   |
| pppoe   | aggregate  | 61561238 | 0        | 4000 | 0 | ok   |
| pppoe   | padi       | 30780619 | 23086506 | 2000 | 1 | viol |
| pppoe   | pado       | 0        | 0        | 0    | 0 | ok   |
| pppoe   | padr       | 30780619 | 23086499 | 2000 | 1 | viol |
| pppoe   | pads       | 0        | 0        | 0    | 0 | ok   |
| pppoe   | padt       | 0        | 0        | 0    | 0 | ok   |
| pppoe   | padm       | 0        | 0        | 0    | 0 | ok   |
| pppoe   | padn       | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | aggregate  | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | unclass..  | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | discover   | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | offer      | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | request    | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | decline    | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | ack        | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | nak        | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | release    | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | inform     | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | renew      | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | forcerenew | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | leasequery | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | leaseuna.. | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | leaseunk.. | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | leaseact.. | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | bootp      | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | no-msgtype | 0        | 0        | 0    | 0 | ok   |
| dhcipv4 | bad-pack.. | 0        | 0        | 0    | 0 | ok   |

...

|        |           |   |   |   |   |    |
|--------|-----------|---|---|---|---|----|
| icmp   | aggregate | 0 | 0 | 0 | 0 | ok |
| igmp   | aggregate | 0 | 0 | 0 | 0 | ok |
| ospf   | aggregate | 0 | 0 | 0 | 0 | ok |
| rsvp   | aggregate | 0 | 0 | 0 | 0 | ok |
| pim    | aggregate | 0 | 0 | 0 | 0 | ok |
| rip    | aggregate | 0 | 0 | 0 | 0 | ok |
| ptp    | aggregate | 0 | 0 | 0 | 0 | ok |
| bfd    | aggregate | 0 | 0 | 0 | 0 | ok |
| lmp    | aggregate | 0 | 0 | 0 | 0 | ok |
| ldp    | aggregate | 0 | 0 | 0 | 0 | ok |
| msdp   | aggregate | 0 | 0 | 0 | 0 | ok |
| bgp    | aggregate | 0 | 0 | 0 | 0 | ok |
| vrrp   | aggregate | 0 | 0 | 0 | 0 | ok |
| telnet | aggregate | 0 | 0 | 0 | 0 | ok |

...

### show ddos-protection protocols statistics terse

```

user@host> show ddos-protection protocols statistics terse
Protocol Packet Received Dropped Rate Violation State
group type (packets) (packets) (pps) counts
ipv4-uncls aggregate 241 0 0 0 ok

```

|            |           |         |        |   |   |    |
|------------|-----------|---------|--------|---|---|----|
| icmp       | aggregate | 20      | 0      | 0 | 0 | ok |
| igmp       | aggregate | 55      | 0      | 0 | 0 | ok |
| ospf       | aggregate | 956     | 0      | 0 | 0 | ok |
| rsvp       | aggregate | 784     | 0      | 0 | 0 | ok |
| ldp        | aggregate | 2984    | 0      | 0 | 0 | ok |
| bgp        | aggregate | 312     | 0      | 0 | 0 | ok |
| lACP       | aggregate | 1744    | 0      | 0 | 0 | ok |
| stp        | aggregate | 9791    | 0      | 0 | 0 | ok |
| arp        | aggregate | 19      | 0      | 0 | 0 | ok |
| pvstp      | aggregate | 393     | 0      | 0 | 0 | ok |
| mlp        | aggregate | 624774  | 0      | 0 | 0 | ok |
| mlp        | packets   | 1714371 | 223937 | 0 | 3 | ok |
| mcast-copy | aggregate | 3018038 | 0      | 0 | 0 | ok |
| igmp-snoop | aggregate | 43      | 0      | 0 | 0 | ok |
| fw-host    | aggregate | 95547   | 0      | 0 | 0 | ok |
| uncls      | aggregate | 10000   | 0      | 0 | 0 | ok |

### show ddos-protection protocols pppoe statistics

```
user@host> show ddos-protection protocols pppoe statistics
```

Protocol Group: PPPoE

Packet type: aggregate

System-wide information:

Aggregate bandwidth is never violated

Received: 60381200 Arrival rate: 4000 pps

Dropped: 0 Max arrival rate: 4002 pps

Routing Engine information:

Aggregate policer is never violated

Received: 15095242 Arrival rate: 1001 pps

Dropped: 0 Max arrival rate: 1011 pps

Dropped by individual policers: 0

FPC slot 1 information:

Aggregate policer is never violated

Received: 60381200 Arrival rate: 4000 pps

Dropped: 45287921 Max arrival rate: 4002 pps

Dropped by individual policers: 45287921

Packet type: padi

System-wide information:

Bandwidth is being violated!

No. of FPCs currently receiving excess traffic: 1

No. of FPCs that have received excess traffic: 1

Violation first detected at: 2011-04-19 08:23:17 PDT

Violation last seen at: 2011-04-19 12:34:48 PDT

Duration of violation: 04:11:31 Number of violations: 1

Received: 30190600 Arrival rate: 2000 pps

Dropped: 22643960 Max arrival rate: 2001 pps

Routing Engine information:

Policer is never violated

Received: 7547621 Arrival rate: 499 pps

Dropped: 0 Max arrival rate: 505 pps

Dropped by aggregate policer: 0

FPC slot 1 information:

Policer is currently being violated!

Violation first detected at: 2011-04-19 08:23:17 PDT

Violation last seen at: 2011-04-19 12:34:48 PDT

Duration of violation: 04:11:31 Number of violations: 1

Received: 30190600 Arrival rate: 2000 pps

Dropped: 22643960 Max arrival rate: 2001 pps

Dropped by this policer: 22643960

Dropped by aggregate policer: 0

Packet type: pado

System-wide information:

Bandwidth is never violated

Received: 0 Arrival rate: 0 pps

Dropped: 0 Max arrival rate: 0 pps

Routing Engine information:

Policer is never violated

Received: 0 Arrival rate: 0 pps

Dropped: 0 Max arrival rate: 0 pps

Dropped by aggregate policer: 0

FPC slot 1 information:

Policer is never violated

Received: 0 Arrival rate: 0 pps

Dropped: 0 Max arrival rate: 0 pps

Dropped by aggregate policer: 0

Packet type: padr

System-wide information:

Bandwidth is being violated!

No. of FPCs currently receiving excess traffic: 1

No. of FPCs that have received excess traffic: 1

Violation first detected at: 2011-04-19 08:23:17 PDT

Violation last seen at: 2011-04-19 12:34:48 PDT

Duration of violation: 04:11:31 Number of violations: 1

Received: 30190600 Arrival rate: 2000 pps

Dropped: 22643961 Max arrival rate: 2001 pps

Routing Engine information:

Policer is never violated

Received: 7547621 Arrival rate: 501 pps

Dropped: 0 Max arrival rate: 506 pps

Dropped by aggregate policer: 0

FPC slot 1 information:

Policer is currently being violated!

Violation first detected at: 2011-04-19 08:23:17 PDT

Violation last seen at: 2011-04-19 12:34:48 PDT

Duration of violation: 04:11:31 Number of violations: 1

Received: 30190600 Arrival rate: 2000 pps

Dropped: 22643961 Max arrival rate: 2001 pps

Dropped by this policer: 22643961

Dropped by aggregate policer: 0

Packet type: pads

System-wide information:

Bandwidth is never violated

Received: 0 Arrival rate: 0 pps

Dropped: 0 Max arrival rate: 0 pps

Routing Engine information:

Policer is never violated

Received: 0 Arrival rate: 0 pps

Dropped: 0 Max arrival rate: 0 pps

Dropped by aggregate policer: 0

FPC slot 1 information:

Policer is never violated

Received: 0 Arrival rate: 0 pps

Dropped: 0 Max arrival rate: 0 pps

Dropped by aggregate policer: 0

Packet type: padt

System-wide information:

```

Bandwidth is never violated
Received: 0 Arrival rate: 0 pps
Dropped: 0 Max arrival rate: 0 pps
Routing Engine information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0

Packet type: padm
System-wide information:
 Bandwidth is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0

Packet type: padn
System-wide information:
 Bandwidth is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0
FPC slot 1 information:
 Policer is never violated
 Received: 0 Arrival rate: 0 pps
 Dropped: 0 Max arrival rate: 0 pps
 Dropped by aggregate policer: 0

```

### show ddos-protection protocols pppoe statistics brief

```

user@host> show ddos-protection protocols pppoe statistics brief

```

| Protocol | Packet type | Received (packets) | Dropped (packets) | Rate (pps) | Violation counts | State |
|----------|-------------|--------------------|-------------------|------------|------------------|-------|
| pppoe    | aggregate   | 60901227           | 0                 | 4000       | 0                | ok    |
| pppoe    | padi        | 30450613           | 22838981          | 2000       | 1                | viol  |
| pppoe    | pado        | 0                  | 0                 | 0          | 0                | ok    |
| pppoe    | padr        | 30450614           | 22838977          | 2000       | 1                | viol  |
| pppoe    | pads        | 0                  | 0                 | 0          | 0                | ok    |
| pppoe    | padt        | 0                  | 0                 | 0          | 0                | ok    |
| pppoe    | padm        | 0                  | 0                 | 0          | 0                | ok    |
| pppoe    | padn        | 0                  | 0                 | 0          | 0                | ok    |

## show ddos-protection protocols violations

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show ddos-protection protocols</b> <i>&lt;protocol-group&gt;</i> violations                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | <p>Command introduced in Junos OS Release 11.2.</p> <p>Command introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.</p> <p>Command introduced in Junos OS Release 14.1X53 on QFX Series switches.</p>                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Display information about DDoS policer violations for all protocol groups or for a particular protocol group.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b>none</b>—Display information for all protocol groups.</p> <p><b>protocol-group</b>—(Optional) Name of a particular protocol group. See <a href="#">show ddos-protection protocols</a> for a list of available groups.</p>                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear ddos-protection protocols on page 1056</a></li> <li>• <a href="#">show ddos-protection protocols on page 1110</a></li> <li>• <a href="#">show ddos-protection protocols culprit-flows on page 973</a></li> <li>• <a href="#">show ddos-protection protocols flow-detection on page 980</a></li> <li>• <a href="#">show ddos-protection protocols parameters on page 1131</a></li> <li>• <a href="#">show ddos-protection protocols statistics on page 1138</a></li> </ul> |
| <b>List of Sample Output</b>    | <p><a href="#">show ddos-protection protocols violations on page 1149</a></p> <p><a href="#">show ddos-protection protocols lldp violations on page 1149</a></p> <p><a href="#">show ddos-protection protocols pppoe violations on page 1149</a></p>                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>            | <a href="#">Table 47 on page 1148</a> lists the output fields for the <b>show ddos-protection protocols violations</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                              |

Table 47: show ddos-protection protocols violations Output Fields

| Field Name                                     | Field Description                                                                      |
|------------------------------------------------|----------------------------------------------------------------------------------------|
| Number of packet types that are being violated | Number of individual policers and aggregate policers that are currently being violated |
| Protocol Group                                 | Name of protocol group                                                                 |
| Packet type                                    | Name of packet type in protocol group                                                  |

Table 47: show ddos-protection protocols violations Output Fields (continued)

| Field Name                                     | Field Description                                                                  |
|------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Bandwidth (pps)</b>                         | Policer bandwidth                                                                  |
| <b>Arrival rate (pps)</b>                      | Current traffic rate for packets arriving from all cards and at the Routing Engine |
| <b>Peak rate (pps)</b>                         | Highest traffic rate for packets arriving from all cards and at the Routing Engine |
| <b>Policer bandwidth violation detected at</b> | Timestamp of the policer violation                                                 |
| <b>Detected on</b>                             | Slot number of the card on which the violation was detected                        |

## Sample Output

### show ddos-protection protocols violations

```

user@host> show ddos-protection protocols violations
Number of packet types that are being violated: 2
Protocol Packet Bandwidth Arrival Peak Policer bandwidth
group type (pps) rate(pps) rate(pps) violation detected at
pppoe padi 500 2000 2001 2011-04-19 08:23:17 PDT
 Detected on: FPC-1
pppoe padr 500 1999 2001 2011-04-19 08:23:17 PDT
 Detected on: FPC-1

```

### show ddos-protection protocols lldp violations

```

user@host> show ddos-protection protocols lldp violations
Number of packet types that are being violated: 0

```

### show ddos-protection protocols pppoe violations

```

user@host> show ddos-protection protocols pppoe violations
Number of packet types that are being violated: 2
Protocol Packet Bandwidth Arrival Peak Policer bandwidth
group type (pps) rate(pps) rate(pps) violation detected at
pppoe padi 500 2000 2001 2011-04-19 08:23:17 PDT
 Detected on: FPC-1
pppoe padr 500 1999 2001 2011-04-19 08:23:17 PDT
 Detected on: FPC-1

```

## show ddos-protection statistics

**Syntax** `show ddos-protection statistics`

**Release Information** Command introduced in Junos OS Release 11.2.  
Command introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.  
Command introduced in Junos OS Release 14.1X53 on QFX Series switches.

**Description** Display DDoS protection global statistics for bandwidth violations.

**Options** This command has no options.

**Required Privilege Level** view

**Related Documentation**

- [clear ddos-protection protocols on page 1056](#)
- [show ddos-protection protocols on page 1110](#)
- [show ddos-protection version on page 1152](#)

**List of Sample Output** [show ddos-protection statistics on page 1151](#)

**Output Fields** [Table 48 on page 1150](#) lists the output fields for the `show ddos-protection statistics` command. Output fields are listed in the approximate order in which they appear.

*Table 48: show ddos-protection statistics Output Fields*

| Field Name                    | Field Description                                                                                         |
|-------------------------------|-----------------------------------------------------------------------------------------------------------|
| Policing on routing engine    | Shows whether or not policing is enabled on the Routing Engine.                                           |
| Policing on FPC               | Shows whether or not policing is enabled on the line card.                                                |
| Flow detection                | Shows whether or not flow detection is enabled.                                                           |
| Logging                       | Shows whether or not DDoS event logging is enabled.                                                       |
| Policer violation report rate | Shows the violation report rate as a percentage.                                                          |
| Flow report rate              | Shows the flow report rate as a percentage.                                                               |
| Default flow detection mode   | Flow detection and tracking mode configured at the global level for all protocol groups and packet types. |



Table 48: *show ddos-protection statistics* Output Fields (continued)

| Field Name                        | Field Description                                                                                                     |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Default flow level detection mode | Flow detection and tracking mode configured at the flow aggregation level for all protocol groups and packet types.   |
| Default flow level control mode   | Default behavior configured for how traffic in detected flows is controlled for all protocol groups and packet types. |
| Currently violated packet types   | Number of packet types currently experiencing a bandwidth violation.                                                  |
| Packet types have seen violations | Number of packet types that have experienced a bandwidth violation since statistics were cleared.                     |
| Total violation counts            | Total number of bandwidth violations.                                                                                 |

## Sample Output

### show ddos-protection statistics

```

user@host> show ddos-protection statistics
DDOS protection global statistics:
 Policing on routing engine: Yes
 Policing on FPC: Yes
 Flow detection: No
 Logging: Yes
 Policer violation report rate: 100
 Flow report rate: 100
 Default flow detection mode Automatic
 Default flow level detection mode Automatic
 Default flow level control mode Drop
 Currently violated packet types: 2
 Packet types have seen violations: 4
 Total violation counts: 4
 Currently tracked flows: 0
 Total detected flows: 0

```

## show ddos-protection version

**Syntax** `show ddos-protection version`

**Release Information** Command introduced in Junos OS Release 11.2.  
Command introduced in Junos OS Release 12.3R2 on EX9200 switches and T4000 routers.  
Command introduced in Junos OS Release 14.1X53 on QFX Series switches.

**Description** Display the DDoS protection version and the total numbers of protocol groups and packet types that this version can be configured in this version.

**Options** This command has no options.

**Required Privilege Level** view

**Related Documentation**

- [clear ddos-protection protocols on page 1056](#)
- [show ddos-protection protocols on page 1110](#)
- [show ddos-protection statistics on page 1150](#)

**List of Sample Output** [show ddos-protection version on page 1152](#)

**Output Fields** [Table 49 on page 1152](#) lists the output fields for the `show ddos-protection version` command. Output fields are listed in the approximate order in which they appear.

*Table 49: show ddos-protection version Output Fields*

| Field Name                 | Field Description                                                |
|----------------------------|------------------------------------------------------------------|
| Version                    | Version number of the DDoS protection code.                      |
| Total protocol groups      | Number of protocol groups configured with DDoS protection.       |
| Total tracked packet types | Number of protocol packet types configured with DDoS protection. |

## Sample Output

### show ddos-protection version

```
user@host> show ddos-protection version
DDoS protection, Version 1.0
 Total protocol groups = 83
 Total tracked packet types = 154
```



## show dhcp snooping binding

|                                 |                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show dhcp snooping binding</b><br><b>&lt;interface <i>interface-name</i>&gt;</b><br><b>&lt;vlan <i>vlan-name</i>&gt;</b>                                                                                                                                                                    |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                          |
| <b>Description</b>              | Display the DHCP snooping database information.                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <p><b>interface <i>interface-name</i></b>—(Optional) Display the DHCP snooping database information for an interface.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Display the DHCP snooping database information for a VLAN.</p>                                                            |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear dhcp snooping binding on page 1058</a></li> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li> <li>• <a href="#">Verifying That DHCP Snooping Is Working Correctly on page 297</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show dhcp snooping binding on page 1155</a>                                                                                                                                                                                                                                        |
| <b>Output Fields</b>            | <a href="#">Table 50 on page 1154</a> lists the output fields for the <b>show dhcp snooping binding</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                       |

*Table 50: show dhcp snooping binding Output Fields*

| Field Name  | Field Description                                           | Level of Output |
|-------------|-------------------------------------------------------------|-----------------|
| MAC Address | MAC address of the network device; bound to the IP address. | All levels      |
| IP Address  | IP address of the network device; bound to the MAC address. | All levels      |
| Lease       | Lease granted to the IP address.                            | All levels      |
| Type        | How the MAC address was acquired.                           | All levels      |
| VLAN        | VLAN name of the network device whose MAC address is shown. | All levels      |
| Interface   | Interface address (port).                                   | All levels      |

## Sample Output

### show dhcp snooping binding

```
user@switch> show dhcp snooping binding
```

DHCP Snooping Information:

| MAC Address       | IP Address | Lease | Type    | VLAN  | Interface   |
|-------------------|------------|-------|---------|-------|-------------|
| 00:00:01:00:00:03 | 192.0.2.0  | 640   | dynamic | guest | ge-0/0/12.0 |
| 00:00:01:00:00:04 | 192.0.2.1  | 720   | dynamic | guest | ge-0/0/12.0 |
| 00:00:01:00:00:05 | 192.0.2.5  | 800   | dynamic | guest | ge-0/0/13.0 |

## show dhcp snooping statistics

|                                 |                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show dhcp snooping statistics</b>                                                                                                                                                                                                        |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.4 for EX Series switches.                                                                                                                                                                          |
| <b>Description</b>              | Display statistics for read and write operations to the DHCP snooping database.                                                                                                                                                             |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">clear dhcp snooping statistics on page 1059</a></li> <li><a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show dhcp snooping statistics on page 1156</a>                                                                                                                                                                                  |
| <b>Output Fields</b>            | <a href="#">Table 51 on page 1156</a> lists the output fields for the <b>show dhcp snooping statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                 |

*Table 51: show dhcp snooping statistics Output Fields*

| Field Name                  | Field Description                                                                          |
|-----------------------------|--------------------------------------------------------------------------------------------|
| <b>Successful Transfers</b> | Number of entries successfully transferred from memory to the DHCP snooping database.      |
| <b>Successful Reads</b>     | Number of entries successfully read from memory to the DHCP snooping database.             |
| <b>Successful Writes</b>    | Number of entries successfully written from memory to the DHCP snooping database.          |
| <b>Failed Transfers</b>     | Number of entries that failed being transferred from memory to the DHCP snooping database. |
| <b>Failed Reads</b>         | Number of entries that failed being read from memory to the DHCP snooping database.        |
| <b>Failed Writes</b>        | Number of entries that failed being written from memory to the DHCP snooping database.     |

## Sample Output

### show dhcp snooping statistics

```

user@switch> show dhcp snooping statistics
Successful Transfers : 0 Failed Transfers : 21
Successful Reads : 0 Failed Reads : 0
Successful Writes : 0 Failed Writes : 21

```

## show dhcp-security arp inspection statistics

**Syntax** `show dhcp-security arp inspection statistics`

**Release Information** Command introduced in Junos OS Release 13.2X50-D10 for EX Series switches.  
Command introduced in Junos OS Release 14.1 for the MX Series.

**Description** Display Address Resolution Protocol (ARP) inspection statistics.

**Required Privilege Level** view

**Related Documentation**

- [show dhcp-security binding on page 1159](#)
- [clear dhcp-security binding on page 1060](#)
- [clear interfaces statistics](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621](#)
- [Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553](#)
- [Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282](#)

**List of Sample Output** [show dhcp-security arp inspection statistics on page 1158](#)

**Output Fields** [Table 52 on page 1157](#) lists the output fields for the **show dhcp-security arp inspection statistics** command. Output fields are listed in the approximate order in which they appear.

The IP source guard database table shows the untrusted access interfaces in VLANs that have been enabled for IP source guard. The entries include the VLAN 802.1Q tag IDs if there are any, and the IP addresses and MAC addresses that are bound to one another.

*Table 52: show dhcp-security arp inspection statistics Output Fields*

| Field Name          | Field Description                                      | Level of Output |
|---------------------|--------------------------------------------------------|-----------------|
| Interface           | Interface on which ARP inspection has been applied.    | All levels      |
| Packets received    | Total number of packets that underwent ARP inspection. | All levels      |
| ARP inspection pass | Total number of packets that passed ARP inspection.    | All levels      |
| ARP inspection fail | Total number of packets that failed ARP inspection.    | All levels      |

## Sample Output

### show dhcp-security arp inspection statistics

```
user@device> show dhcp-security arp inspection statistics
```

| Interface   | Packets received | ARP inspection pass | ARP inspection fail |
|-------------|------------------|---------------------|---------------------|
| ge-0/0/30.0 | 7                | 7                   | 0                   |
| ge-0/0/4.0  | 3                | 3                   | 0                   |
| ge-0/0/6.0  | 72               | 4                   | 68                  |



## show dhcp-security binding

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>show dhcp-security binding &lt;interface <i>interface-name</i>&gt; &lt;ip-address <i>ip-address</i>&gt; &lt;ip-source-guard <i>ip-sg-name</i>&gt; &lt;statistics&gt; &lt;vlan <i>vlan-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 13.2X50-D10 for EX Series switches.</p> <p>Command introduced in Junos OS Release 14.1 for the MX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Display the DHCP snooping database information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <p><b>interface <i>interface-name</i></b>—(Optional) Display the DHCP snooping database information for an interface.</p> <p><b>ip-address <i>ip-address</i></b>—(Optional) Display the DHCP snooping database information for an IP address.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Display the DHCP snooping database information for a VLAN.</p>                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dhcp-security binding ip-source-guard on page 1162</a></li> <li>• <a href="#">clear dhcp-security binding on page 1060</a></li> <li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621</a></li> <li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553</a></li> <li>• <a href="#">Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282</a></li> </ul> |
| <b>List of Sample Output</b>    | <p><a href="#">show dhcp-security binding on page 1160</a></p> <p><a href="#">show dhcp-security binding interface on page 1160</a></p> <p><a href="#">show dhcp-security binding ip-address on page 1161</a></p> <p><a href="#">show dhcp-security binding vlan on page 1161</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>            | <p><a href="#">Table 53 on page 1160</a> lists the output fields for the <b>show dhcp-security binding</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

Table 53: show dhcp-security binding Output Fields

| Field Name         | Field Description                                                                                                                                                                                                     | Level of Output |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>IP Address</b>  | IP address of the network device; bound to the MAC address.                                                                                                                                                           | All levels      |
| <b>MAC address</b> | MAC address of the network device; bound to the IP address.                                                                                                                                                           | All levels      |
| <b>VLAN</b>        | VLAN name of the network device whose MAC address is shown.                                                                                                                                                           | All levels      |
| <b>Expires</b>     | The time, in seconds, remaining before the lease of the IP address to the MAC address expires. This field is <b>0</b> for static entries.                                                                             | All levels      |
| <b>State</b>       | Specifies whether the IP address is: <ul style="list-style-type: none"> <li><b>BOUND:</b> Leased to the MAC address for a limited period of time.</li> <li><b>STATIC:</b> Attached to a fixed MAC address.</li> </ul> | All levels      |
| <b>Interface</b>   | Interface address (port).                                                                                                                                                                                             | All levels      |

## Sample Output

### show dhcp-security binding

```
user@device> show dhcp-security binding
```

| IP address | MAC address       | Vlan   | Expires | State  | Interface  |
|------------|-------------------|--------|---------|--------|------------|
| 10.1.1.10  | 00:10:00:20:00:01 | vlan20 | 0       | STATIC | ge-0/0/4.0 |
| 10.1.1.18  | 00:10:94:00:00:34 | vlan20 | 86287   | BOUND  | ge-0/0/6.0 |
| 10.1.1.15  | 00:10:94:00:00:55 | vlan20 | 86265   | BOUND  | ge-0/0/4.0 |
| 10.1.1.16  | 00:10:94:00:00:56 | vlan20 | 86265   | BOUND  | ge-0/0/4.0 |
| 10.1.1.19  | 00:10:94:00:00:5b | vlan20 | 86287   | BOUND  | ge-0/0/6.0 |
| 10.1.1.20  | 00:10:94:00:00:5c | vlan20 | 86287   | BOUND  | ge-0/0/6.0 |
| 10.1.1.21  | 00:10:94:00:00:5d | vlan20 | 86287   | BOUND  | ge-0/0/6.0 |
| 10.1.1.17  | 00:10:94:00:00:68 | vlan20 | 86265   | BOUND  | ge-0/0/4.0 |

### show dhcp-security binding interface

```
user@device> show dhcp-security binding interface ge-0/0/6
```

| IP address | MAC address       | Vlan   | Expires | State | Interface  |
|------------|-------------------|--------|---------|-------|------------|
| 10.1.1.18  | 00:10:94:00:00:34 | vlan20 | 86282   | BOUND | ge-0/0/6.0 |
| 10.1.1.19  | 00:10:94:00:00:5b | vlan20 | 86282   | BOUND | ge-0/0/6.0 |
| 10.1.1.20  | 00:10:94:00:00:5c | vlan20 | 86282   | BOUND | ge-0/0/6.0 |

```
10.1.1.21 00:10:94:00:00:5d vlan20 86282 BOUND ge-0/0/6.0
```

### show dhcp-security binding ip-address

```
user@device> show dhcp-security binding ip-address
```

| IP address | MAC address       | Vlan   | Expires | State | Interface  |
|------------|-------------------|--------|---------|-------|------------|
| 10.1.1.18  | 00:10:94:00:00:34 | vlan20 | 86282   | BOUND | ge-0/0/6.0 |

### show dhcp-security binding vlan

```
user@device> show dhcp-security binding vlan vlan20
```

| IIP address | MAC address       | Vlan   | Expires | State | Interface  |
|-------------|-------------------|--------|---------|-------|------------|
| 10.1.1.18   | 00:10:94:00:00:34 | vlan20 | 86282   | BOUND | ge-0/0/6.0 |

## show dhcp-security binding ip-source-guard

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <b>show dhcp-security binding ip-source-guard</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D10 for EX Series switches.<br>Command introduced in Junos OS Release 14.1 for the MX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Display IP source guard database table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dhcp-security binding on page 1159</a></li> <li>• <a href="#">clear dhcp-security binding on page 1060</a></li> <li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection to Protect the Switch from IP Spoofing and ARP Spoofing on page 621</a></li> <li>• <a href="#">Example: Configuring IP Source Guard and Dynamic ARP Inspection on a Specified Bridge Domain to Protect the Devices Against Attacks on page 553</a></li> <li>• <a href="#">Understanding Port Security Features to Protect the Access Ports on Your Device Against the Loss of Information and Productivity on page 282</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show dhcp-security binding ip-source-guard on page 1163</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>            | <p><a href="#">Table 54 on page 1162</a> lists the output fields for the <b>show dhcp-security binding ip-source-guard</b> command. Output fields are listed in the approximate order in which they appear.</p> <p>The IP source guard database table shows the untrusted access interfaces in VLANs that have been enabled for IP source guard. The entries include the IP addresses and MAC addresses that are bound to one another.</p>                                                                                                                                                                                                                                                        |

*Table 54: show dhcp-security binding ip-source-guard Output Fields*

| Field Name         | Field Description                                                                              | Level of Output |
|--------------------|------------------------------------------------------------------------------------------------|-----------------|
| <b>IP Address</b>  | IP address of the network device; bound to the MAC address.                                    | All levels      |
| <b>MAC address</b> | MAC address of the network device; bound to the IP address.                                    | All levels      |
| <b>VLAN</b>        | VLAN name of the network device whose MAC address is shown.                                    | All levels      |
| <b>Expires</b>     | The time, in seconds, remaining before the lease of the IP address to the MAC address expires. | All levels      |

Table 54: show dhcp-security binding ip-source-guard Output Fields (continued)

| Field Name       | Field Description                                                                                                                                                                                                                     | Level of Output |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>State</b>     | Specifies whether the IP address is: <ul style="list-style-type: none"> <li>• <b>BOUND</b>: Temporarily leased to the MAC address for a limited period of time.</li> <li>• <b>STATIC</b>: Attached to a fixed MAC address.</li> </ul> | All levels      |
| <b>Interface</b> | Interface address (port).                                                                                                                                                                                                             | All levels      |

## Sample Output

### show dhcp-security binding ip-source-guard

```
user@device> show dhcp-security binding ip-source-guard
```

| IP address | MAC address       | Vlan   | Expires | State  | Interface  |
|------------|-------------------|--------|---------|--------|------------|
| 10.1.1.10  | 00:10:00:20:00:01 | vlan20 | 0       | STATIC | ge-0/0/4.0 |
| 10.1.1.18  | 00:10:94:00:00:34 | vlan20 | 86276   | BOUND  | ge-0/0/6.0 |
| 10.1.1.15  | 00:10:94:00:00:55 | vlan20 | 86254   | BOUND  | ge-0/0/4.0 |
| 10.1.1.16  | 00:10:94:00:00:56 | vlan20 | 86254   | BOUND  | ge-0/0/4.0 |
| 10.1.1.19  | 00:10:94:00:00:5b | vlan20 | 86276   | BOUND  | ge-0/0/6.0 |
| 10.1.1.20  | 00:10:94:00:00:5c | vlan20 | 86276   | BOUND  | ge-0/0/6.0 |
| 10.1.1.21  | 00:10:94:00:00:5d | vlan20 | 86276   | BOUND  | ge-0/0/6.0 |
| 10.1.1.17  | 00:10:94:00:00:68 | vlan20 | 86254   | BOUND  | ge-0/0/4.0 |

## show dhcp-security ipv6 binding

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show dhcp-security ipv6 binding</code><br><code>&lt;interface <i>interface-name</i>&gt;</code><br><code>&lt;ipv6-address <i>ipv6-address</i>&gt;</code><br><code>&lt;vlan <i>vlan-name</i>&gt;</code>                                                                                                                                                                                                             |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X51-D20 for EX Series switches.<br>Command introduced in Junos OS Release 17.2R1 for the QFX Series.                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Display bindings between IPv6 addresses and MAC addresses (IP-MAC bindings) along with other DHCP lease information, also known as the DHCPv6 binding table or DHCPv6 snooping database.                                                                                                                                                                                                                                |
| <b>Options</b>                  | <b><code>interface <i>interface-name</i></code></b> —(Optional) Display the DHCPv6 snooping table for the specified interface.<br><br><b><code>ipv6-address <i>ipv6-address</i></code></b> —(Optional) Display the DHCPv6 snooping table for the specified IPv6 address.<br><br><b><code>vlan <i>vlan-name</i></code></b> —(Optional) Display the DHCPv6 snooping table for a VLAN.                                     |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dhcp-security ipv6 statistics on page 1166</a></li><li>• <a href="#">clear dhcp-security ipv6 binding on page 1061</a></li><li>• <a href="#">Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626</a></li></ul>                                                                 |
| <b>List of Sample Output</b>    | <a href="#">show dhcp-security ipv6 binding on page 1165</a><br><a href="#">show dhcp-security ipv6 binding interface on page 1165</a>                                                                                                                                                                                                                                                                                  |
| <b>Output Fields</b>            | <p><a href="#">Table 54 on page 1162</a> lists the output fields for the <b>show dhcp-security ipv6 binding</b> command. Output fields are listed in the approximate order in which they appear.</p> <p>The DHCPv6 binding table shows the untrusted access interfaces in VLANs that have been enabled for DHCPv6 snooping. The entries include the IPv6 addresses and MAC addresses that are bound to one another.</p> |

Table 55: show dhcp-security ipv6 binding Output Fields

| Field Name   | Field Description                                                                                                                                                                                                                                                                                                       | Level of Output |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| IPv6 address | IPv6 addresses of the network device; bound to the MAC address. There are two entries added for each client: one with the link-local IPv6 address, which is used by the client for DHCP transactions, and another with the IPv6 address assigned by the server. The link-local address always has the prefix fe80::/10. | All levels      |
| MAC address  | MAC address of the network device; bound to the IPv6 address.                                                                                                                                                                                                                                                           | All levels      |
| VLAN         | VLAN name of the network device whose MAC address is shown.                                                                                                                                                                                                                                                             | All levels      |
| Expires      | The time, in seconds, remaining before the lease of the IPv6 address to the MAC address expires. This field is 0 for static entries.                                                                                                                                                                                    | All levels      |
| State        | Specifies whether the IPv6 address is: <ul style="list-style-type: none"> <li>• <b>BOUND</b>: Temporarily leased to the MAC address for a limited period of time.</li> <li>• <b>STATIC</b>: Attached to a fixed MAC address.</li> </ul>                                                                                 | All levels      |
| Interface    | Interface address (port).                                                                                                                                                                                                                                                                                               | All levels      |

## Sample Output

### show dhcp-security ipv6 binding

```

user@switch> show dhcp-security ipv6 binding
IPv6 address MAC address Vlan Expires State Interface
2001:db8:fe10:: 00:10:94:00:55:0b v1an20 3456 BOUND ge-0/0/1.0
fe80::210:94ff:fe00:1 00:10:94:00:55:0b v1an20 3456 BOUND ge-0/0/1.0
2001:db8:fe12:: 00:10:94:00:00:34 v1an20 3456 BOUND ge-0/0/2.0
fe80::210:94ff:fe00:2 00:10:94:00:00:34 v1an20 3456 BOUND ge-0/0/2.0
2001:db8:fe14:: 00:10:94:00:00:55 v1an20 3456 BOUND ge-0/0/3.0
fe80::210:94ff:fe00:3 00:10:94:00:00:55 v1an20 3456 BOUND ge-0/0/3.0

```

## Sample Output

### show dhcp-security ipv6 binding interface

```

user@switch> show dhcp-security ipv6 binding interface ge-0/0/4.0
IPv6 address MAC address Vlan Expires State Interface
2001:db8:fe16:: 00:10:00:20:00:01 v1an20 0 STATIC ge-0/0/4.0
fe80::210:94ff:fe00:4 00:10:00:20:00:01 v1an20 0 STATIC ge-0/0/4.0

```

## show dhcp-security ipv6 statistics

---

|                                 |                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show dhcp-security ipv6 statistics</code>                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X51-D20 for EX Series switches.                                                                                                                                        |
| <b>Description</b>              | Display DHCPv6 statistics.                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">show dhcp-security ipv6 binding on page 1164</a></li><li>• <a href="#">show dhcp-security neighbor-discovery-inspection statistics on page 1169</a></li></ul> |
| <b>List of Sample Output</b>    | <a href="#">show dhcp-security ipv6 statistics on page 1168</a>                                                                                                                                                   |
| <b>Output Fields</b>            | <a href="#">Table 56 on page 1167</a> lists the output fields for the <code>show dhcp-security ipv6 statistics</code> command. Output fields are listed in the approximate order in which they appear.            |



Table 56: show dhcp-security ipv6 statistics Output Fields

| Field Name      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DHCPv6 messages | <p>Number of DHCPv6 messages exchanged.</p> <ul style="list-style-type: none"> <li>• <b>Total</b>—Total number of DHCPv6 messages exchanged.</li> <li>• <b>Solicit</b>—Number of DHCPv6 messages of type Solicit. A client sends a Solicit message to locate servers.</li> <li>• <b>Advertise</b>—Number of DHCPv6 messages of type Advertise. A server sends an Advertise message, in response to a Solicit message, to indicate that it is available for DHCPv6 service.</li> <li>• <b>Request</b>—Number of DHCPv6 messages of type Request. A client sends a Request message to request configuration parameters from a server.</li> <li>• <b>Reply</b>—Number of DHCPv6 messages of type Reply. A server sends a Reply message in response to a Solicit, Request, Renew, Rebind, Confirm, Information Request, Release, or Decline message.</li> <li>• <b>Confirm</b>—Number of DHCPv6 messages of type Confirm. A client sends a Confirm message to any available server to determine whether the addresses it was assigned are still appropriate for the link to which the client is connected.</li> <li>• <b>Decline</b>—Number of DHCPv6 messages of type Decline. A client sends a Decline message to a server to indicate that one or more of the addresses assigned by the server are already in use on the link to which the client is connected.</li> <li>• <b>Release</b>—Number of DHCPv6 messages of type Release. A client sends a Release message to the server to indicate that the client will no longer use one or more of the assigned addresses.</li> <li>• <b>Renew</b>—Number of DHCPv6 messages of type Renew. A client sends a Renew message to the server to extend the lifetimes on the addresses assigned to the client by that server and to update other configuration parameters received by that server.</li> <li>• <b>Rebind</b>—Number of DHCPv6 messages of type Rebind. A client sends a Rebind message to any available server after receiving no reply to a Renew message.</li> <li>• <b>Relay-forward</b>—Number of DHCPv6 messages of type Relay-forward. A relay agent sends a Relay-forward message to relay messages to servers, either directly or through another relay agent. The received message is encapsulated in an option in the Relay-forward message.</li> <li>• <b>Relay-reply</b>—Number of DHCPv6 messages of type Relay-reply. A server sends a Relay-reply message to a relay agent containing a message that the relay agent delivers to a client.</li> <li>• <b>Information-request</b>—Number of DHCPv6 messages of type Information-request. A client sends an Information-request message to a server to request configuration parameters without the assignment of any IP addresses to the client.</li> <li>• <b>Reconfigure</b>—Number of DHCPv6 messages of type Reconfigure. A server sends a Reconfigure message to a client to inform the client that the server has new or updated configuration parameters, and that the client needs to initiate a Renew/Reply or Information-request/Reply transaction with the server in order to receive the updated information.</li> </ul> |
| Packets dropped | <p>Number of packets not considered for DHCPv6 snooping because of errors.</p> <ul style="list-style-type: none"> <li>• <b>Total</b>—Total number of packets discarded by DHCPv6 snooping.</li> <li>• <b>No configuration</b>—Number of packets discarded because they did not have a valid configuration.</li> <li>• <b>No VLAN</b>—Number of packets discarded because they did not belong to a valid VLAN.</li> <li>• <b>No interface</b>—Number of packets discarded because they did not belong to a valid interface.</li> <li>• <b>Request on trusted port</b>—Number of packets discarded because a Request message was received on a trusted port.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Sample Output

### show dhcp-security ipv6 statistics

```
user@host> show dhcp-security ipv6 statistics
DHCPv6 messages:
 Total 32
 Solicit 1
 Advertise 1
 Request 3
 Reply 5
 Confirm 1
 Decline 2
 Release 9
 Renew 4
 Rebind 2
 Relay forward 1
 Relay reply 1
 Information request 1
 Reconfigure 2

Packets dropped:
 Total 0
 No configuration 0
 No VLAN 0
 No interface 0
 Request on trusted port 0
```

## show dhcp-security neighbor-discovery-inspection statistics

|                                 |                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show dhcp-security neighbor-discovery-inspection statistics<br><interface <i>interface-name</i> >                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X51-D20 for EX Series switches.                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Display IPv6 neighbor discovery inspection statistics to determine whether there is IPv6 address spoofing on the network.                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <b>interface <i>interface-name</i></b> —(Optional) Display neighbor discovery inspection statistics for the specified interface.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show dhcp-security ipv6 binding on page 1164</a></li> <li>• <a href="#">Enabling IPv6 Neighbor Discovery Inspection on page 321</a></li> <li>• <a href="#">Example: Configuring IPv6 Source Guard and Neighbor Discovery Inspection to Protect a Switch from IPv6 Address Spoofing on page 626</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show dhcp-security neighbor-discovery-inspection statistics on page 1169</a><br><a href="#">show dhcp-security neighbor-discovery-inspection statistics interface on page 1170</a>                                                                                                                                                                     |
| <b>Output Fields</b>            | Table 52 on page 1157 lists the output fields for the <b>show dhcp-security neighbor-discovery-inspection statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                          |

Table 57: show dhcp-security neighbor-discovery-inspection statistics Output Fields

| Field Name         | Field Description                                                     | Level of Output |
|--------------------|-----------------------------------------------------------------------|-----------------|
| Interface          | Interface on which neighbor discovery inspection has been applied.    | All levels      |
| Packets received   | Total number of packets that underwent neighbor discovery inspection. | All levels      |
| ND inspection pass | Total number of packets that passed neighbor discovery inspection.    | All levels      |
| ND inspection fail | Total number of packets that failed neighbor discovery inspection.    | All levels      |

## Sample Output

### show dhcp-security neighbor-discovery-inspection statistics

```
user@switch> show dhcp-security neighbor-discovery-inspection statistics
```

| Interface  | ND Packets received | ND inspection pass | ND inspection failed |
|------------|---------------------|--------------------|----------------------|
| ge-0/0/1.0 | 7                   | 5                  | 2                    |
| ge-0/0/2.0 | 10                  | 10                 | 0                    |
| ge-0/0/3.0 | 12                  | 12                 | 0                    |

## Sample Output

### show dhcp-security neighbor-discovery-inspection statistics interface

```
user@switch> show dhcp-security neighbor-discovery-inspection statistics interface ge-0/0/1.0
Interface ND Packets received ND inspection pass ND inspection failed
ge-0/0/1.0 7 5 2
```

## show dhcpv6 snooping binding

|                                 |                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show dhcpv6 snooping binding</code><br><code>&lt;interface <i>interface-name</i>&gt;</code><br><code>&lt;vlan <i>vlan-name</i>&gt;</code>                                                                                                                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                     |
| <b>Description</b>              | Display the DHCPv6 snooping database information.                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>interface <i>interface-name</i></b>—(Optional) Display the DHCPv6 snooping database information for an interface.</p> <p><b>vlan <i>vlan-name</i></b>—(Optional) Display the DHCPv6 snooping database information for a VLAN.</p>                                                        |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear dhcp snooping binding on page 1058</a></li> <li>• <a href="#">Example: Configuring Basic Port Security Features on page 289</a></li> <li>• <a href="#">Verifying That DHCP Snooping Is Working Correctly on page 297</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show dhcpv6 snooping binding on page 1172</a>                                                                                                                                                                                                                                      |
| <b>Output Fields</b>            | <a href="#">Table 50 on page 1154</a> lists the output fields for the <b>show dhcpv6 snooping binding</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                     |

*Table 58: show dhcp snooping binding Output Fields*

| Field Name  | Field Description                                           | Level of Output |
|-------------|-------------------------------------------------------------|-----------------|
| MAC Address | MAC address of the network device; bound to the IP address. | All levels      |
| IP Address  | IP address of the network device; bound to the MAC address. | All levels      |
| Lease       | Lease granted to the IP address.                            | All levels      |
| Type        | How the MAC address was acquired.                           | All levels      |
| VLAN        | VLAN name of the network device whose MAC address is shown. | All levels      |
| Interface   | Interface address (port).                                   | All levels      |

## Sample Output

### show dhcpv6 snooping binding

```
user@switch> show dhcpv6 snooping binding
DHCP Snooping Information:
MAC address IP address Lease (seconds) Type VLAN Interface
00:10:94:00:00:01 2001:db8::10:10 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:01 fe80::210:94ff:fe00:1 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:02 2001:db8::10:11 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:02 fe80::210:94ff:fe00:2 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:03 2001:db8::10:12 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:03 fe80::210:94ff:fe00:3 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:04 2001:db8::10:13 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:04 fe80::210:94ff:fe00:4 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:05 2001:db8::10:14 3599992 dynamic v1 ge-0/0/0.0
00:10:94:00:00:05 fe80::210:94ff:fe00:5 3599992 dynamic v1 ge-0/0/0.0
```

## show dhcpv6 snooping statistics

|                                 |                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show dhcpv6 snooping statistics</code>                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                  |
| <b>Description</b>              | Display statistics for read and write operations performed on the DHCPv6 snooping database.                                                                                                                                                 |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">clear dhcp snooping statistics on page 1059</a></li> <li><a href="#">Understanding DHCP Snooping for Monitoring DHCP Messages Received from Untrusted Devices on page 273</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show dhcpv6 snooping statistics on page 1173</a>                                                                                                                                                                                |
| <b>Output Fields</b>            | <a href="#">Table 51 on page 1156</a> lists the output fields for the <code>show dhcpv6 snooping statistics</code> command. Output fields are listed in the approximate order in which they appear.                                         |

*Table 59: show dhcpv6 snooping statistics Output Fields*

| Field Name           | Field Description                                                                            |
|----------------------|----------------------------------------------------------------------------------------------|
| Successful Transfers | Number of entries successfully transferred from memory to the DHCPv6 snooping database.      |
| Successful Reads     | Number of entries successfully read from memory to the DHCPv6 snooping database.             |
| Successful Writes    | Number of entries successfully written from memory to the DHCPv6 snooping database.          |
| Failed Transfers     | Number of entries that failed being transferred from memory to the DHCPv6 snooping database. |
| Failed Reads         | Number of entries that failed being read from memory to the DHCPv6 snooping database.        |
| Failed Writes        | Number of entries that failed being written from memory to the DHCPv6 snooping database.     |

## Sample Output

### show dhcpv6 snooping statistics

```

user@switch> show dhcpv6 snooping statistics
DHCP Snoop Persistence statistics
Successful Remote Transfers: 0 Failed Remote Transfers: 0
Successful Record Reads : 0 Failed Record Reads : 0
Successful Record Writes : 0 Failed Record Writes : 0

```

## show ethernet-switching table

|                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                                      | <a href="#">Syntax (QFX Series, QFabric, NFX Series and EX4600) on page 1174</a><br><a href="#">Syntax (EX Series) on page 1174</a><br><a href="#">Syntax (EX Series, MX Series and QFX Series) on page 1174</a><br><a href="#">Syntax (SRX Series) on page 1174</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Syntax (QFX Series, QFabric, NFX Series and EX4600)</b> | <pre>show ethernet-switching table &lt;brief   detail   extensive   summary&gt; &lt;interface <i>interface-name</i>&gt; &lt;management-vlan&gt; &lt;sort-by (<i>name</i>   <i>tag</i>)&gt; &lt;vlan <i>vlan-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Syntax (EX Series)</b>                                  | <pre>show ethernet-switching table &lt;brief   detail   extensive   summary&gt; &lt;interface <i>interface-name</i>&gt; &lt;management-vlan&gt; &lt;persistent-mac &lt;interface <i>interface-name</i>&gt;&gt; &lt;sort-by (<i>name</i>   <i>tag</i>)&gt; &lt;vlan <i>vlan-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Syntax (EX Series, MX Series and QFX Series)</b>        | <pre>show ethernet-switching table &lt;brief   count   detail   extensive   summary&gt; &lt;address&gt; &lt;instance <i>instance-name</i>&gt; &lt;interface <i>interface-name</i>&gt; isid <i>isid</i> &lt;logical-system <i>logical-system-name</i>&gt; &lt;persistent-learning (interface <i>interface-name</i>   mac <i>mac-address</i>)&gt; &lt;address&gt; &lt;vlan-id (all-vlan   <i>vlan-id</i>)&gt; &lt;vlan-name (all   <i>vlan-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Syntax (SRX Series)</b>                                 | <pre>show ethernet-switching table (brief   detail   extensive) interface <i>interface-name</i></pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>                                 | <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 9.5 for SRX Series.</p> <p>Options <b>summary</b>, <b>management-vlan</b>, and <b>vlan <i>vlan-name</i></b> introduced in Junos OS Release 9.6 for EX Series switches.</p> <p>Option <b>sort-by</b> and field name <b>tag</b> introduced in Junos OS Release 10.1 for EX Series switches.</p> <p>Command introduced in Junos OS Release 11.1 for the QFX Series.</p> <p>Output for private VLANs introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Option <b>persistent-mac</b> introduced in Junos OS Release 11.4 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.3R2.</p> <p>Command introduced in Junos OS Release 12.3R2 for EX Series switches.</p> <p>Options <b>logical-system</b>, <b>persistent-learning</b>, and <b>summary</b> introduced in Junos OS Release 13.2X50-D10 (ELS).</p> |



- Description** Displays the Ethernet switching table.
- (MX Series routers, EX Series switches only) Displays Layer 2 MAC address information.
- Options** For QFX Series, QFabric, NFX Series and EX4600:
- none**—(Optional) Display brief information about the Ethernet switching table.
- brief | detail | extensive | summary**—(Optional) Display the specified level of output.
- interface *interface-name***—(Optional) Display the Ethernet switching table for a specific interface.
- management-vlan**—(Optional) Display the Ethernet switching table for a management VLAN.
- persistent-mac <interface *interface-name*>**—(Optional) Display the persistent MAC addresses learned for all interfaces or a specified interface. You can use this command to view entries that you want to clear for an interface that you intentionally disabled.
- sort-by (*name* | *tag*)**—(Optional) Display VLANs in ascending order of VLAN IDs or VLAN names.
- vlan *vlan-name***—(Optional) Display the Ethernet switching table for a specific VLAN.
- For EX Series, MX Series and QFX Series:
- none**—Display all learned Layer 2 MAC address information.
- brief | count | detail | extensive | summary**—(Optional) Display the specified level of output.
- address**—(Optional) Display the specified learned Layer 2 MAC address information.
- instance *instance-name***—(Optional) Display learned Layer 2 MAC addresses for the specified routing instance.
- interface *interface-name***—(Optional) Display learned Layer 2 MAC addresses for the specified interface.
- isid *isid***—(Optional) Display learned Layer 2 MAC addresses for the specified ISID.
- logical-system *logical-system-name***—(Optional) Display Ethernet-switching statistics information for the specified logical system.
- persistent-learning (interface *interface-name* | mac *mac-address*)**—(Optional) Display dynamically learned MAC addresses that are retained despite device restarts and interface failures for a specified interface, or information about a specified MAC address.
- vlan-id (all-vlan | *vlan-id*)**—(Optional) Display learned Layer 2 MAC addresses for all VLANs or for the specified VLAN.

**vlan-name (all | *vlan-name*)**—(Optional) Display learned Layer 2 MAC addresses for all VLANs or for the specified VLAN.

For SRX Series:

- **none**—(Optional) Display brief information about the Ethernet switching table.
- **brief | detail | extensive**—(Optional) Display the specified level of output.
- **interface-name**—(Optional) Display the Ethernet switching table for a specific interface.

**Additional Information** When Layer 2 protocol tunneling is enabled, the tunneling MAC address 01:00:0c:cd:cd:d0 is installed in the MAC table. When the Cisco Discovery Protocol (CDP), Spanning Tree Protocol (STP), or VLAN Trunk Protocol (VTP) is configured for Layer 2 protocol tunneling on an interface, the corresponding protocol MAC address is installed in the MAC table.

**Required Privilege Level** view

**Related Documentation**

- *Example: Setting Up Basic Bridging and a VLAN on Switches*
- *Example: Setting Up Bridging with Multiple VLANs*
- *Example: Setting Up Basic Bridging and a VLAN for an EX Series Switch*
- *Example: Setting Up Bridging with Multiple VLANs for EX Series Switches*
- *Example: Setting Up Q-in-Q Tunneling on EX Series Switches*
- [clear ethernet-switching table on page 1068](#)
- *show ethernet-switching mac-learning-log*

**List of Sample Output**

[show ethernet-switching table \(Enhanced Layer 2 Software on QFX Series, QFabric, NFX Series and EX460\) on page 1180](#)  
[show ethernet-switching table \(QFX Series, QFabric, NFX Series and EX460\) on page 1181](#)  
[show ethernet-switching table \(Private VLANs on QFX Series, QFabric, NFX Series and EX460\) on page 1182](#)  
[show ethernet-switching table \(Junos Fusion Data Center with EVPN on QFX Series switches\) on page 1182](#)  
[show ethernet-switching table brief \(QFX Series, QFabric, NFX Series and EX460\) on page 1183](#)  
[show ethernet-switching table detail \(QFX Series, QFabric, NFX Series and EX460\) on page 1184](#)  
[show ethernet-switching table extensive \(QFX Series, QFabric, NFX Series and EX460\) on page 1185](#)  
[show ethernet-switching table interface \(QFX Series, QFabric, NFX Series and EX460\) on page 1187](#)  
[show ethernet-switching table \(EX Series switches\) on page 1187](#)  
[show ethernet-switching table brief \(EX Series switches\) on page 1187](#)  
[show ethernet-switching table detail \(EX Series switches\) on page 1188](#)

[show ethernet-switching table extensive \(EX Series switches\) on page 1189](#)  
[show ethernet-switching table persistent-mac \(EX Series switches\) on page 1189](#)  
[show ethernet-switching table persistent-mac interface ge-0/0/16.0 \(EX Series switches\) on page 1189](#)  
[show ethernet-switching table \(EX Series, MX Series and QFX Series\) on page 1189](#)  
[show ethernet-switching table brief on page 1191](#)  
[show ethernet-switching table count on page 1192](#)  
[show ethernet-switching table extensive on page 1193](#)  
[show ethernet-switching table detail \(SRX Series\) on page 1194](#)  
[show ethernet-switching table extensive \(SRX Series\) on page 1195](#)  
[show ethernet-switching table interface ge-0/0/1 \(SRX Series\) on page 1196](#)

**Output Fields** For QFX Series, QFabric, NFX Series and EX4600:

The following table lists the output fields for the **show ethernet-switching table** command on QFX Series, QFabric, NFX Series and EX4600. Output fields are listed in the approximate order in which they appear.

*Table 60: show ethernet-switching table Output Fields*

| Field Name         | Field Description                                                                                                                                                                                                                                                                                             | Level of Output          |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>VLAN</b>        | Name of a VLAN.                                                                                                                                                                                                                                                                                               | All levels               |
| <b>MAC address</b> | MAC address associated with the VLAN.                                                                                                                                                                                                                                                                         | All levels               |
| <b>Type</b>        | Type of MAC address: <ul style="list-style-type: none"> <li>• <b>static</b>—The MAC address is manually created.</li> <li>• <b>learn</b>—The MAC address is learned dynamically from a packet's source MAC address.</li> <li>• <b>flood</b>—The MAC address is unknown and flooded to all members.</li> </ul> | All levels               |
| <b>Age</b>         | Time remaining before the entry ages out and is removed from the Ethernet switching table.                                                                                                                                                                                                                    | All levels               |
| <b>Interfaces</b>  | Interface associated with learned MAC addresses or with the <b>All-members</b> option (flood entry).                                                                                                                                                                                                          | All levels               |
| <b>Learned</b>     | For learned entries, the time at which the entry was added to the Ethernet switching table.                                                                                                                                                                                                                   | <b>detail, extensive</b> |

For EX Series switches:

The following table lists the output fields for the **show ethernet-switching table** command on EX Series switches. Output fields are listed in the approximate order in which they appear.

Table 61: show ethernet-switching table Output Fields

| Field Name                | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                              | Level of Output                         |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <b>VLAN</b>               | The name of a VLAN.                                                                                                                                                                                                                                                                                                                                                                                                                                            | All levels                              |
| <b>Tag</b>                | The VLAN ID tag name or number.                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>extensive</b>                        |
| <b>MAC or MAC address</b> | The MAC address associated with the VLAN.                                                                                                                                                                                                                                                                                                                                                                                                                      | All levels                              |
| <b>Type</b>               | The type of MAC address. Values are: <ul style="list-style-type: none"> <li>• <b>static</b>—The MAC address is manually created.</li> <li>• <b>learn</b>—The MAC address is learned dynamically from a packet's source MAC address.</li> <li>• <b>flood</b>—The MAC address is unknown and flooded to all members.</li> <li>• <b>persistent</b>—The learned MAC addresses that will persist across restarts of the switch or interface-down events.</li> </ul> | All levels except <b>persistent-mac</b> |
| <b>Type</b>               | The type of MAC address. Values are: <ul style="list-style-type: none"> <li>• <b>installed</b>—addresses that are in the Ethernet switching table.</li> <li>• <b>uninstalled</b>—addresses that could not be installed in the table or were uninstalled in an interface-down event and will be reinstalled in the table when the interface comes back up.</li> </ul>                                                                                           | <b>persistent-mac</b>                   |
| <b>Age</b>                | The time remaining before the entry ages out and is removed from the Ethernet switching table.                                                                                                                                                                                                                                                                                                                                                                 | All levels                              |
| <b>Interfaces</b>         | Interface associated with learned MAC addresses or <b>All-members</b> (flood entry).                                                                                                                                                                                                                                                                                                                                                                           | All levels                              |
| <b>Learned</b>            | For learned entries, the time which the entry was added to the Ethernet switching table.                                                                                                                                                                                                                                                                                                                                                                       | <b>detail, extensive</b>                |
| <b>Nexthop index</b>      | The next-hop index number.                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>detail, extensive</b>                |
| <b>persistent-mac</b>     | <b>installed</b> indicates MAC addresses that are in the Ethernet switching table and <b>uninstalled</b> indicates MAC addresses that could not be installed in the table or were uninstalled in an interface-down event (and will be reinstalled in the table when the interface comes back up).                                                                                                                                                              |                                         |

For EX Series, MX Series and QFX Series:

The table describes the output fields for the **show ethernet-switching table** command on EX Series, MX Series and QFX Series. Output fields are listed in the approximate order in which they appear.

Table 62: show ethernet-switching table Output fields

| Field Name              | Field Description             |
|-------------------------|-------------------------------|
| <b>Routing instance</b> | Name of the routing instance. |
| <b>VLAN name</b>        | Name of the VLAN.             |

Table 62: *show ethernet-switching table* Output fields (continued)

| Field Name         | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAC address        | MAC address or addresses learned on a logical interface.                                                                                                                                                                                                                                                                                                                                                                                   |
| MAC flags          | Status of MAC address learning properties for each interface: <ul style="list-style-type: none"> <li>• <b>S</b>—Static MAC address is configured.</li> <li>• <b>D</b>—Dynamic MAC address is configured.</li> <li>• <b>L</b>—Locally learned MAC address is configured.</li> <li>• <b>SE</b>—MAC accounting is enabled.</li> <li>• <b>NM</b>—Non-configured MAC.</li> <li>• <b>R</b>—Locally learned MAC address is configured.</li> </ul> |
| Age                | This field is not supported.                                                                                                                                                                                                                                                                                                                                                                                                               |
| Logical interface  | Name of the logical interface.                                                                                                                                                                                                                                                                                                                                                                                                             |
| Active source      | IP address of remote entity on which MAC address is learned.                                                                                                                                                                                                                                                                                                                                                                               |
| MAC count          | Number of MAC addresses learned on the specific routing instance or interface.                                                                                                                                                                                                                                                                                                                                                             |
| Learning interface | Name of the logical interface on which the MAC address was learned.                                                                                                                                                                                                                                                                                                                                                                        |
| Learning VLAN      | VLAN ID of the routing instance or VLAN in which the MAC address was learned.                                                                                                                                                                                                                                                                                                                                                              |
| Layer 2 flags      | Debugging flags signifying that the MAC address is present in various lists.                                                                                                                                                                                                                                                                                                                                                               |
| Epoch              | Spanning-tree-protocol epoch number identifying when the MAC address was learned. Used for debugging.                                                                                                                                                                                                                                                                                                                                      |
| Sequence number    | Sequence number assigned to this MAC address. Used for debugging.                                                                                                                                                                                                                                                                                                                                                                          |
| Learning mask      | Mask of the Packet Forwarding Engines where this MAC address was learned. Used for debugging.                                                                                                                                                                                                                                                                                                                                              |
| IPC generation     | Creation time of the logical interface when this MAC address was learned. Used for debugging.                                                                                                                                                                                                                                                                                                                                              |

For SRX Series:

Table 63 on page 1179 lists the output fields for the **show ethernet-switching table** command. Output fields are listed in the approximate order in which they appear.

Table 63: *show ethernet-switching table* Output Fields

| Field Name | Field Description   |
|------------|---------------------|
| VLAN       | The name of a VLAN. |

Table 63: show ethernet-switching table Output Fields (continued)

| Field Name         | Field Description                                                                                                                                                                                                                                                                                  |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MAC address</b> | The MAC address associated with the VLAN.                                                                                                                                                                                                                                                          |
| <b>Type</b>        | The type of MAC address. Values are: <ul style="list-style-type: none"> <li>static—The MAC address is manually created.</li> <li>learn—The MAC address is learned dynamically from a packet's source MAC address.</li> <li>flood—The MAC address is unknown and flooded to all members.</li> </ul> |
| <b>Age</b>         | The time remaining before the entry ages out and is removed from the Ethernet switching table.                                                                                                                                                                                                     |
| <b>Interfaces</b>  | Interface associated with learned MAC addresses or All-members (flood entry).                                                                                                                                                                                                                      |
| <b>Learned</b>     | For learned entries, the time which the entry was added to the Ethernet switching table.                                                                                                                                                                                                           |

## Sample Output

### show ethernet-switching table (Enhanced Layer 2 Software on QFX Series, QFabric, NFX Series and EX460)

```
user@switch> show ethernet-switching table
MAC flags (S - static MAC, D - dynamic MAC, L - locally learned, P - Persistent
static
 SE - statistics enabled, NM - non configured MAC, R - remote PE MAC,
0 - ovsdb MAC)
```

```
Ethernet switching table : 2 entries, 2 learned
```

```
Routing instance : default-switch
```

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| vlan1        | b0:c6:9a:ca:3c:01 | D            | -   | ae1.0                |
| vlan1        | b0:c6:9a:ca:3c:03 | D            | -   | ae1.0                |

```
MAC flags (S - static MAC, D - dynamic MAC, L - locally learned, P - Persistent
static
```

```
 SE - statistics enabled, NM - non configured MAC, R - remote PE MAC,
0 - ovsdb MAC)
```

```
Ethernet switching table : 2 entries, 2 learned
```

```
Routing instance : default-switch
```

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| vlan10       | b0:c6:9a:ca:3c:01 | D            | -   | ae1.0                |
| vlan10       | b0:c6:9a:ca:3c:03 | D            | -   | ae1.0                |

```
MAC flags (S - static MAC, D - dynamic MAC, L - locally learned, P - Persistent
static
```

```
 SE - statistics enabled, NM - non configured MAC, R - remote PE MAC,
```

0 - ovsdb MAC)

Ethernet switching table : 2 entries, 2 learned

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| vlan2        | b0:c6:9a:ca:3c:01 | D            | -   | ae1.0                |
| vlan2        | b0:c6:9a:ca:3c:03 | D            | -   | ae1.0                |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned, P - Persistent static

SE - statistics enabled, NM - non configured MAC, R - remote PE MAC,  
0 - ovsdb MAC)

Ethernet switching table : 2 entries, 2 learned

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| vlan3        | b0:c6:9a:ca:3c:01 | D            | -   | ae1.0                |
| vlan3        | b0:c6:9a:ca:3c:03 | D            | -   | ae1.0                |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned, P - Persistent static

SE - statistics enabled, NM - non configured MAC, R - remote PE MAC,  
0 - ovsdb MAC)

Ethernet switching table : 2 entries, 2 learned

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| vlan4        | b0:c6:9a:ca:3c:01 | D            | -   | ae1.0                |
| vlan4        | b0:c6:9a:ca:3c:03 | D            | -   | ae1.0                |

### show ethernet-switching table (QFX Series, QFabric, NFX Series and EX460)

user@switch> show ethernet-switching table

Ethernet-switching table: 57 entries, 17 learned

| VLAN  | MAC address       | Type   | Age | Interfaces  |
|-------|-------------------|--------|-----|-------------|
| F2    | *                 | Flood  | -   | All-members |
| F2    | 00:00:05:00:00:03 | Learn  | 0   | xe-0/0/44.0 |
| F2    | 00:19:e2:50:7d:e0 | Static | -   | Router      |
| Linux | *                 | Flood  | -   | All-members |
| Linux | 00:19:e2:50:7d:e0 | Static | -   | Router      |
| Linux | 00:30:48:90:54:89 | Learn  | 0   | xe-0/0/47.0 |
| T1    | *                 | Flood  | -   | All-members |
| T1    | 00:00:05:00:00:01 | Learn  | 0   | xe-0/0/46.0 |
| T1    | 00:00:5e:00:01:00 | Static | -   | Router      |
| T1    | 00:19:e2:50:63:e0 | Learn  | 0   | xe-0/0/46.0 |
| T1    | 00:19:e2:50:7d:e0 | Static | -   | Router      |
| T10   | *                 | Flood  | -   | All-members |
| T10   | 00:00:5e:00:01:09 | Static | -   | Router      |
| T10   | 00:19:e2:50:63:e0 | Learn  | 0   | xe-0/0/46.0 |
| T10   | 00:19:e2:50:7d:e0 | Static | -   | Router      |

```

T111 * Flood - All-members
T111 00:19:e2:50:63:e0 Learn 0 xe-0/0/15.0
T111 00:19:e2:50:7d:e0 Static - Router
T111 00:19:e2:50:ac:00 Learn 0 xe-0/0/15.0
T2 * Flood - All-members
T2 00:00:5e:00:01:01 Static - Router
T2 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
T2 00:19:e2:50:7d:e0 Static - Router
T3 * Flood - All-members
T3 00:00:5e:00:01:02 Static - Router
T3 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
T3 00:19:e2:50:7d:e0 Static - Router
T4 * Flood - All-members
T4 00:00:5e:00:01:03 Static - Router
T4 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
[output truncated]

```

### show ethernet-switching table (Private VLANs on QFX Series, QFabric, NFX Series and EX460)

```

user@switch> show ethernet-switching table
Ethernet-switching table: 10 entries, 3 learned
VLAN MAC address Type Age Interfaces
pvlan * Flood - All-members
pvlan 00:10:94:00:00:02 Replicated - xe-0/0/28.0
pvlan 00:10:94:00:00:35 Replicated - xe-0/0/46.0
pvlan 00:10:94:00:00:46 Replicated - xe-0/0/4.0
c2 * Flood - All-members
c2 00:10:94:00:00:02 Learn 0 xe-0/0/28.0
c1 * Flood - All-members
c1 00:10:94:00:00:46 Learn 0 xe-0/0/4.0
__pvlan_pvlan_xe-0/0/46.0__ * Flood - All-members
__pvlan_pvlan_xe-0/0/46.0__ 00:10:94:00:00:35 Learn 0 xe-0/0/46.0

```

### show ethernet-switching table (Junos Fusion Data Center with EVPN on QFX Series switches)

```

user@switch> show ethernet-switching table
MAC flags (S - static MAC, D - dynamic MAC, L - locally learned, P - Persistent
static
 SE - statistics enabled, NM - non configured MAC, R - remote PE MAC,
0 - ovsdb MAC)

Ethernet switching table : 30 entries, 30 learned
Routing instance : default-switch
Vlan MAC MAC Logical Active
name address flags interface source
v100 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v100 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v100 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v101 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v101 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v101 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v102 00:31:46:e8:f9:d6 D vtep.32768

```



```

192.168.2.22
v102 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v102 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v103 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v103 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v103 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v3001 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v3001 28:c0:da:6a:9f:c2 DL ae11.0
v3001 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v3001 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v3002 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v3002 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v3002 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v3003 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v3003 28:c0:da:6a:9f:c2 DL ae11.0
v3003 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v3003 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v3004 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v3004 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v3004 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33
v3005 00:31:46:e8:f9:d6 D vtep.32768
192.168.2.22
v3005 28:c0:da:6a:9f:c2 DL ae11.0
v3005 7c:e2:ca:e2:75:7c D vtep.32771
192.168.4.44
v3005 7c:e2:ca:e4:05:9a D vtep.32770
192.168.3.33

```

### show ethernet-switching table brief (QFX Series, QFabric, NFX Series and EX460)

```

user@switch> show ethernet-switching table brief
Ethernet-switching table: 57 entries, 17 learned
VLAN MAC address Type Age Interfaces
F2 * Flood - All-members
F2 00:00:05:00:00:03 Learn 0 xe-0/0/44.0
F2 00:19:e2:50:7d:e0 Static - Router
Linux * Flood - All-members
Linux 00:19:e2:50:7d:e0 Static - Router
Linux 00:30:48:90:54:89 Learn 0 xe-0/0/47.0
T1 * Flood - All-members
T1 00:00:05:00:00:01 Learn 0 xe-0/0/46.0
T1 00:00:5e:00:01:00 Static - Router
T1 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
T1 00:19:e2:50:7d:e0 Static - Router

```

```

T10 * Flood - All-members
T10 00:00:5e:00:01:09 Static - Router
T10 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
T10 00:19:e2:50:7d:e0 Static - Router
T111 * Flood - All-members
T111 00:19:e2:50:63:e0 Learn 0 xe-0/0/15.0
T111 00:19:e2:50:7d:e0 Static - Router
T111 00:19:e2:50:ac:00 Learn 0 xe-0/0/15.0
T2 * Flood - All-members
T2 00:00:5e:00:01:01 Static - Router
T2 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
T2 00:19:e2:50:7d:e0 Static - Router
T3 * Flood - All-members
T3 00:00:5e:00:01:02 Static - Router
T3 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
T3 00:19:e2:50:7d:e0 Static - Router
T4 * Flood - All-members
T4 00:00:5e:00:01:03 Static - Router
T4 00:19:e2:50:63:e0 Learn 0 xe-0/0/46.0
[output truncated]

```

#### show ethernet-switching table detail (QFX Series, QFabric, NFX Series and EX460)

```

user@switch> show ethernet-switching table detail
Ethernet-switching table: 57 entries, 17 learned
F2, *
 Interface(s): xe-0/0/44.0
 Type: Flood
 Nexthop index: 0

F2, 00:00:05:00:00:03
 Interface(s): xe-0/0/44.0
 Type: Learn, Age: 0, Learned: 2:03:09
 Nexthop index: 0

F2, 00:19:e2:50:7d:e0
 Interface(s): Router
 Type: Static
 Nexthop index: 0

Linux, *
 Interface(s): xe-0/0/47.0
 Type: Flood
 Nexthop index: 0

Linux, 00:19:e2:50:7d:e0
 Interface(s): Router
 Type: Static
 Nexthop index: 0

Linux, 00:30:48:90:54:89
 Interface(s): xe-0/0/47.0
 Type: Learn, Age: 0, Learned: 2:03:08
 Nexthop index: 0

T1, *
 Interface(s): xe-0/0/46.0
 Type: Flood
 Nexthop index: 0

T1, 00:00:05:00:00:01

```

```

Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
Nexthop index: 0

T1, 00:00:5e:00:01:00
Interface(s): Router
Type: Static
Nexthop index: 0

T1, 00:19:e2:50:63:e0
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
Nexthop index: 0

T1, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
Nexthop index: 0

T10, *
Interface(s): xe-0/0/46.0
Type: Flood
Nexthop index: 0

T10, 00:00:5e:00:01:09
Interface(s): Router
Type: Static
Nexthop index: 0

T10, 00:19:e2:50:63:e0
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:08
Nexthop index: 0

T10, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
Nexthop index: 0

T111, *
Interface(s): xe-0/0/15.0
Type: Flood
Nexthop index: 0
[output truncated]

```

### show ethernet-switching table extensive (QFX Series, QFabric, NFX Series and EX460)

```

user@switch> show ethernet-switching table extensive
Ethernet-switching table: 57 entries, 17 learned
F2, *
Interface(s): xe-0/0/44.0
Type: Flood
Nexthop index: 0

F2, 00:00:05:00:00:03
Interface(s): xe-0/0/44.0
Type: Learn, Age: 0, Learned: 2:03:09
Nexthop index: 0

F2, 00:19:e2:50:7d:e0
Interface(s): Router

```

```
Type: Static
Nexthop index: 0

Linux, *
Interface(s): xe-0/0/47.0
Type: Flood
Nexthop index: 0

Linux, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
Nexthop index: 0

Linux, 00:30:48:90:54:89
Interface(s): xe-0/0/47.0
Type: Learn, Age: 0, Learned: 2:03:08
Nexthop index: 0

T1, *
Interface(s): xe-0/0/46.0
Type: Flood
Nexthop index: 0

T1, 00:00:05:00:00:01
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
Nexthop index: 0

T1, 00:00:5e:00:01:00
Interface(s): Router
Type: Static
Nexthop index: 0

T1, 00:19:e2:50:63:e0
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
Nexthop index: 0

T1, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
Nexthop index: 0

T10, *
Interface(s): xe-0/0/46.0
Type: Flood
Nexthop index: 0

T10, 00:00:5e:00:01:09
Interface(s): Router
Type: Static
Nexthop index: 0

T10, 00:19:e2:50:63:e0
Interface(s): xe-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:08
Nexthop index: 0

T10, 00:19:e2:50:7d:e0
Interface(s): Router
Type: Static
```

```

 Nexthop index: 0

T111, *
 Interface(s): xe-0/0/15.0
 Type: Flood
 Nexthop index: 0
[output truncated]

```

### show ethernet-switching table interface (QFX Series, QFabric, NFX Series and EX460)

```

user@switch> show ethernet-switching table interface xe-0/0/1
Ethernet-switching table: 1 unicast entries

```

| VLAN | MAC address       | Type  | Age | Interfaces    |
|------|-------------------|-------|-----|---------------|
| V1   | *                 | Flood |     | - All-members |
| V1   | 00:00:05:00:00:05 | Learn | 0   | xe-0/0/1.0    |

### show ethernet-switching table (EX Series switches)

```

user@switch> show ethernet-switching table
Ethernet-switching table: 57 entries, 15 learned, 2 persistent

```

| VLAN  | MAC address       | Type       | Age | Interfaces    |
|-------|-------------------|------------|-----|---------------|
| F2    | *                 | Flood      |     | - All-members |
| F2    | 00:00:05:00:00:03 | Learn      | 0   | ge-0/0/44.0   |
| F2    | 00:19:e2:50:7d:e0 | Static     |     | - Router      |
| Linux | *                 | Flood      |     | - All-members |
| Linux | 00:19:e2:50:7d:e0 | Static     |     | - Router      |
| Linux | 00:30:48:90:54:89 | Learn      | 0   | ge-0/0/47.0   |
| T1    | *                 | Flood      |     | - All-members |
| T1    | 00:00:05:00:00:01 | Persistent | 0   | ge-0/0/46.0   |
| T1    | 00:00:5e:00:01:00 | Static     |     | - Router      |
| T1    | 00:19:e2:50:63:e0 | Persistent | 0   | ge-0/0/46.0   |
| T1    | 00:19:e2:50:7d:e0 | Static     |     | - Router      |
| T10   | *                 | Flood      |     | - All-members |
| T10   | 00:00:5e:00:01:09 | Static     |     | - Router      |
| T10   | 00:19:e2:50:63:e0 | Learn      | 0   | ge-0/0/46.0   |
| T10   | 00:19:e2:50:7d:e0 | Static     |     | - Router      |
| T111  | *                 | Flood      |     | - All-members |
| T111  | 00:19:e2:50:63:e0 | Learn      | 0   | ge-0/0/15.0   |
| T111  | 00:19:e2:50:7d:e0 | Static     |     | - Router      |
| T111  | 00:19:e2:50:ac:00 | Learn      | 0   | ge-0/0/15.0   |
| T2    | *                 | Flood      |     | - All-members |
| T2    | 00:00:5e:00:01:01 | Static     |     | - Router      |
| T2    | 00:19:e2:50:63:e0 | Learn      | 0   | ge-0/0/46.0   |
| T2    | 00:19:e2:50:7d:e0 | Static     |     | - Router      |
| T3    | *                 | Flood      |     | - All-members |
| T3    | 00:00:5e:00:01:02 | Static     |     | - Router      |
| T3    | 00:19:e2:50:63:e0 | Learn      | 0   | ge-0/0/46.0   |
| T3    | 00:19:e2:50:7d:e0 | Static     |     | - Router      |
| T4    | *                 | Flood      |     | - All-members |
| T4    | 00:00:5e:00:01:03 | Static     |     | - Router      |
| T4    | 00:19:e2:50:63:e0 | Learn      | 0   | ge-0/0/46.0   |

[output truncated]

### show ethernet-switching table brief (EX Series switches)

```

user@switch> show ethernet-switching table brief
Ethernet-switching table: 57 entries, 15 learned, 2 persistent entries

```

| VLAN | MAC address       | Type  | Age | Interfaces    |
|------|-------------------|-------|-----|---------------|
| F2   | *                 | Flood |     | - All-members |
| F2   | 00:00:05:00:00:03 | Learn | 0   | ge-0/0/44.0   |

```

F2 00:19:e2:50:7d:e0 Static - Router
Linux * Flood - All-members
Linux 00:19:e2:50:7d:e0 Static - Router
Linux 00:30:48:90:54:89 Learn 0 ge-0/0/47.0
T1 * Flood - All-members
T1 00:00:05:00:00:01 Persistent 0 ge-0/0/46.0
T1 00:00:5e:00:01:00 Static - Router
T1 00:19:e2:50:63:e0 Persistent 0 ge-0/0/46.0
T1 00:19:e2:50:7d:e0 Static - Router
T10 * Flood - All-members
T10 00:00:5e:00:01:09 Static - Router
T10 00:19:e2:50:63:e0 Learn 0 ge-0/0/46.0
T10 00:19:e2:50:7d:e0 Static - Router
T111 * Flood - All-members
T111 00:19:e2:50:63:e0 Learn 0 ge-0/0/15.0
T111 00:19:e2:50:7d:e0 Static - Router
T111 00:19:e2:50:ac:00 Learn 0 ge-0/0/15.0
T2 * Flood - All-members
T2 00:00:5e:00:01:01 Static - Router
T2 00:19:e2:50:63:e0 Learn 0 ge-0/0/46.0
T2 00:19:e2:50:7d:e0 Static - Router
T3 * Flood - All-members
T3 00:00:5e:00:01:02 Static - Router
T3 00:19:e2:50:63:e0 Learn 0 ge-0/0/46.0
T3 00:19:e2:50:7d:e0 Static - Router
T4 * Flood - All-members
T4 00:00:5e:00:01:03 Static - Router
T4 00:19:e2:50:63:e0 Learn 0 ge-0/0/46.0
[output truncated]

```

### show ethernet-switching table detail (EX Series switches)

```

user@switch> show ethernet-switching table detail
Ethernet-switching table: 5 entries, 2 learned entries
VLAN: default, Tag: 0, MAC: *, Interface: All-members
Interfaces:
 ge-0/0/11.0, ge-0/0/20.0, ge-0/0/30.0, ge-0/0/36.0, ge-0/0/3.0
Type: Flood
Nexthop index: 1307

VLAN: default, Tag: 0, MAC: 00:1f:12:30:b8:83, Interface: ge-0/0/3.0
Type: Learn, Age: 0, Learned: 20:09:26
Nexthop index: 1315

VLAN: v1, Tag: 101, MAC: *, Interface: All-members
Interfaces:
 ge-0/0/31.0
Type: Flood
Nexthop index: 1313

VLAN: v1, Tag: 101, MAC: 00:1f:12:30:b8:89, Interface: ge-0/0/31.0
Type: Learn, Age: 0, Learned: 20:09:25
Nexthop index: 1312

VLAN: v2, Tag: 102, MAC: *, Interface: All-members
Interfaces:
 ae0.0
Type: Flood
Nexthop index: 1317

```

**show ethernet-switching table extensive (EX Series switches)**

```

user@switch> show ethernet-switching table extensive
Ethernet-switching table: 3 entries, 1 learned, 5 persistent entries

VLAN: v1, Tag: 10, MAC: *, Interface: All-members
Interfaces:
 ge-0/0/14.0, ge-0/0/1.0, ge-0/0/2.0, ge-0/0/3.0, ge-0/0/4.0,
 ge-0/0/5.0, ge-0/0/6.0, ge-0/0/7.0, ge-0/0/8.0, ge-0/0/10.0,
 ge-0/0/0.0
Type: Flood
Nexthop index: 567

VLAN: v1, Tag: 10, MAC: 00:21:59:c6:93:22, Interface: Router
Type: Static
Nexthop index: 0

VLAN: v1, Tag: 10, MAC: 00:21:59:c9:9a:4e, Interface: ge-0/0/14.0
Type: Learn, Age: 0, Learned: 18:40:50
Nexthop index: 564

```

**show ethernet-switching table persistent-mac (EX Series switches)**

```

user@switch> show ethernet-switching table persistent-mac
VLAN MAC address Type Interface
default 00:10:94:00:00:02 installed ge-0/0/42.0
default 00:10:94:00:00:03 installed ge-0/0/42.0
default 00:10:94:00:00:04 installed ge-0/0/42.0
default 00:10:94:00:00:05 installed ge-0/0/42.0
default 00:10:94:00:00:06 installed ge-0/0/42.0
default 00:10:94:00:05:02 uninstalled ge-0/0/16.0
default 00:10:94:00:06:03 uninstalled ge-0/0/16.0
default 00:10:94:00:07:04 uninstalled ge-0/0/16.0

```

**show ethernet-switching table persistent-mac interface ge-0/0/16.0 (EX Series switches)**

```

VLAN MAC address Type Interface
default 00:10:94:00:05:02 uninstalled ge-0/0/16.0
default 00:10:94:00:06:03 uninstalled ge-0/0/16.0
default 00:10:94:00:07:04 uninstalled ge-0/0/16.0

```

**show ethernet-switching table (EX Series, MX Series and QFX Series)**

```

user@host> show ethernet-switching table
MAC flags (S - static MAC, D - dynamic MAC, L - locally learned
 SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch
 Vlan MAC MAC Age Logical
 name address flags - interface
 VLAN101 88:e0:f3:bb:07:f0 D - ae20.0

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned
 SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch
 Vlan MAC MAC Age Logical
 name address flags - interface
 VLAN102 88:e0:f3:bb:07:f0 D - ae20.0

```

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| VLAN103      | 88:e0:f3:bb:07:f0 | D            | -   | ae20.0               |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| VLAN104      | 88:e0:f3:bb:07:f0 | D            | -   | ae20.0               |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| VLAN1101     | 00:1f:12:32:f5:c1 | D            | -   | ae0.0                |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| VLAN1102     | 00:1f:12:32:f5:c1 | D            | -   | ae0.0                |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| VLAN1103     | 00:1f:12:32:f5:c1 | D            | -   | ae0.0                |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan<br>name | MAC<br>address    | MAC<br>flags | Age | Logical<br>interface |
|--------------|-------------------|--------------|-----|----------------------|
| VLAN1104     | 00:1f:12:32:f5:c1 | D            | -   | ae0.0                |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan | MAC | MAC | Age | Logical |
|------|-----|-----|-----|---------|
|------|-----|-----|-----|---------|



| name     | address           | flags | interface |
|----------|-------------------|-------|-----------|
| VLAN1105 | 00:1f:12:32:f5:c1 | D     | - ae0.0   |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan     | MAC               | MAC   | Age | Logical   |
|----------|-------------------|-------|-----|-----------|
| name     | address           | flags |     | interface |
| VLAN1106 | 00:1f:12:32:f5:c1 | D     | -   | ae0.0     |

[...output truncated...]

### show ethernet-switching table brief

user@host> show ethernet-switching table brief

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan    | MAC               | MAC   | Age | Logical   |
|---------|-------------------|-------|-----|-----------|
| name    | address           | flags |     | interface |
| VLAN101 | 88:e0:f3:bb:07:f0 | D     | -   | ae20.0    |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan    | MAC               | MAC   | Age | Logical   |
|---------|-------------------|-------|-----|-----------|
| name    | address           | flags |     | interface |
| VLAN102 | 88:e0:f3:bb:07:f0 | D     | -   | ae20.0    |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan    | MAC               | MAC   | Age | Logical   |
|---------|-------------------|-------|-----|-----------|
| name    | address           | flags |     | interface |
| VLAN103 | 88:e0:f3:bb:07:f0 | D     | -   | ae20.0    |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan    | MAC               | MAC   | Age | Logical   |
|---------|-------------------|-------|-----|-----------|
| name    | address           | flags |     | interface |
| VLAN104 | 88:e0:f3:bb:07:f0 | D     | -   | ae20.0    |

MAC flags (S - static MAC, D - dynamic MAC, L - locally learned  
SE - statistics enabled, NM - non configured MAC, R - remote PE MAC)

Routing instance : default-switch

| Vlan     | MAC               | MAC   | Age | Logical   |
|----------|-------------------|-------|-----|-----------|
| name     | address           | flags |     | interface |
| VLAN1101 | 00:1f:12:32:f5:c1 | D     | -   | ae0.0     |

[...output truncated...]

### show ethernet-switching table count

```
user@host> show ethernet-switching table count
0 MAC address learned in routing instance default-switch VLAN VLAN1000
ae26.0:1000

1 MAC address learned in routing instance default-switch VLAN VLAN101
ae20.0:101

MAC address count per learn VLAN within routing instance:
 Learn VLAN ID MAC count Static MAC count
 101 1 0

1 MAC address learned in routing instance default-switch VLAN VLAN102
ae20.0:102

MAC address count per learn VLAN within routing instance:
 Learn VLAN ID MAC count Static MAC count
 102 1 0

1 MAC address learned in routing instance default-switch VLAN VLAN103
ae20.0:103

MAC address count per learn VLAN within routing instance:
 Learn VLAN ID MAC count Static MAC count
 103 1 0

1 MAC address learned in routing instance default-switch VLAN VLAN104
ae20.0:104

MAC address count per learn VLAN within routing instance:
 Learn VLAN ID MAC count Static MAC count
 104 1 0

0 MAC address learned in routing instance default-switch VLAN VLAN105
ae20.0:105

0 MAC address learned in routing instance default-switch VLAN VLAN106
ae20.0:106

0 MAC address learned in routing instance default-switch VLAN VLAN107
ae20.0:107

0 MAC address learned in routing instance default-switch VLAN VLAN108
ae20.0:108

0 MAC address learned in routing instance default-switch VLAN VLAN109
ae20.0:109

0 MAC address learned in routing instance default-switch VLAN VLAN110
ae20.0:110

1 MAC address learned in routing instance default-switch VLAN VLAN1101
ae0.0:1101

MAC address count per learn VLAN within routing instance:
 Learn VLAN ID MAC count Static MAC count
 1101 1 0

1 MAC address learned in routing instance default-switch VLAN VLAN1102
```

```
ae0.0:1102
```

```
MAC address count per learn VLAN within routing instance:
```

```
 Learn VLAN ID MAC count Static MAC count
 1102 1 0
[...output truncated...]
```

### show ethernet-switching table extensive

```
user@host> show ethernet-switching table extensive
```

```
MAC address: 88:e0:f3:bb:07:f0
Routing instance: default-switch
VLAN ID: 101
 Learning interface: ae20.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008
```

```
MAC address: 88:e0:f3:bb:07:f0
Routing instance: default-switch
VLAN ID: 102
 Learning interface: ae20.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008
```

```
MAC address: 88:e0:f3:bb:07:f0
Routing instance: default-switch
VLAN ID: 103
 Learning interface: ae20.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008
```

```
MAC address: 88:e0:f3:bb:07:f0
Routing instance: default-switch
VLAN ID: 104
 Learning interface: ae20.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008
```

```
MAC address: 00:1f:12:32:f5:c1
Routing instance: default-switch
VLAN ID: 1101
 Learning interface: ae0.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008
```

```
MAC address: 00:1f:12:32:f5:c1
Routing instance: default-switch
VLAN ID: 1102
 Learning interface: ae0.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008
```

```
MAC address: 00:1f:12:32:f5:c1
Routing instance: default-switch
```

```
VLAN ID: 1103
 Learning interface: ae0.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008

MAC address: 00:1f:12:32:f5:c1
 Routing instance: default-switch
VLAN ID: 1104
 Learning interface: ae0.0
 Layer 2 flags: in_hash,in_ifd,in_ifl,in_vlan,in_rtt,kernel,in_ifbd
 Epoch: 0 Sequence number: 2
 Learning mask: 0x00000008
```

## Sample Output

### show ethernet-switching table detail (SRX Series)

```
user@host> show ethernet-switching table detail
Ethernet-switching table: 57 entries, 17 learned
F2, *
Interface(s): ge-0/0/44.0
Type: Flood
F2, 00:00:5E:00:53:AC
Interface(s): ge-0/0/44.0
Type: Learn, Age: 0, Learned: 2:03:09
F2, 00:00:5E:00:53:AA
Interface(s): Router
Type: Static
Linux, *
Interface(s): ge-0/0/47.0
Type: Flood
Linux, 00:00:5E:00:53:AB
Interface(s): Router
Type: Static
Linux, 00:00:5E:00:53:AC
Interface(s): ge-0/0/47.0
Type: Learn, Age: 0, Learned: 2:03:08
T1, *
Interface(s): ge-0/0/46.0
Type: Flood
T1, 00:00:5E:00:53:AD
Interface(s): ge-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
T1, 00:00:5E:00:53:AE
Interface(s): Router
Type: Static
T1, 00:00:5E:00:53:AF
Interface(s): ge-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
T1, 00:00:5E:00:53:AG
Interface(s): Router
Type: Static
T10, *
Interface(s): ge-0/0/46.0
Type: Flood
T10, 00:00:5E:00:53:AH
Interface(s): Router
Type: Static
T10, 00:00:5E:00:53:AI
Interface(s): ge-0/0/46.0
```

```
Type: Learn, Age: 0, Learned: 2:03:08
T10, 00:00:5E:00:53:AJ
Interface(s): Router
Type: Static
T111, *
Interface(s): ge-0/0/15.0
Type: Flood
[output truncated]
```

## Sample Output

### show ethernet-switching table extensive (SRX Series)

```
user@host> show ethernet-switching table extensive
Ethernet-switching table: 57 entries, 17 learned
F2, *
Interface(s): ge-0/0/44.0
Type: Flood
F2, 00:00:5E:00:53:AC
Interface(s): ge-0/0/44.0
Type: Learn, Age: 0, Learned: 2:03:09
F2, 00:00:5E:00:53:AA
Interface(s): Router
Type: Static
Linux, *
Interface(s): ge-0/0/47.0
Type: Flood
Linux, 00:00:5E:00:53:AB
Interface(s): Router
Type: Static
Linux, 00:00:5E:00:53:AC
Interface(s): ge-0/0/47.0
Type: Learn, Age: 0, Learned: 2:03:08
T1, *
Interface(s): ge-0/0/46.0
Type: Flood
T1, 00:00:5E:00:53:AD
Interface(s): ge-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
T1, 00:00:5E:00:53:AE
Interface(s): Router
Type: Static
T1, 00:00:5E:00:53:AF
Interface(s): ge-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:07
T1, 00:00:5E:00:53:AG
Interface(s): Router
Type: Static
T10, *
Interface(s): ge-0/0/46.0
Type: Flood
T10, 00:00:5E:00:53:AH
Interface(s): Router
Type: Static
T10, 00:00:5E:00:53:AI
Interface(s): ge-0/0/46.0
Type: Learn, Age: 0, Learned: 2:03:08
T10, 00:00:5E:00:53:AJ
Interface(s): Router
Type: Static
T111, *
```

```
Interface(s): ge-0/0/15.0
Type: Flood
[output truncated]
```

## Sample Output

### show ethernet-switching table interface ge-0/0/1 (SRX Series)

```
user@host> show ethernet-switching table interface ge-0/0/1
Ethernet-switching table: 1 unicast entries
VLAN MAC address Type Age Interfaces
V1 * Flood - All-members
V1 00:00:5E:00:53:AF Learn 0 ge-0/0/1.0
```

## show ike security-associations

|                                 |                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show ike security-associations<br><brief   detail><br><peer-address>                                                                                                                                                                                                        |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.                                                                                                                                                                                                                             |
| <b>Description</b>              | (Encryption interface on M Series and T Series routers only) Display information about Internet Key Exchange (IKE) security associations.                                                                                                                                   |
| <b>Options</b>                  | <p><b>none</b>—Display standard information about all IKE security associations.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>peer-address</b>—(Optional) Display IKE security associations for the specified peer address.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>clear ike security-associations</i></li> </ul>                                                                                                                                                                                  |
| <b>List of Sample Output</b>    | <a href="#">show ike security-associations on page 1200</a><br><a href="#">show ike security-associations detail on page 1200</a>                                                                                                                                           |
| <b>Output Fields</b>            | <p><a href="#">Table 64 on page 1197</a> lists the output fields for the <b>show ike security-associations</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                         |

*Table 64: show ike security-associations Output Fields*

| Field Name              | Field Description                                                                                                                                                                                                                                   | Level of Output |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>IKE peer</b>         | Remote end of the IKE negotiation.                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Role</b>             | Part played in the IKE session. The router triggering the IKE negotiation is the initiator, and the router accepting the first IKE exchange packets is the responder.                                                                               | <b>detail</b>   |
| <b>Remote Address</b>   | Responder's address.                                                                                                                                                                                                                                | none specified  |
| <b>State</b>            | State of the IKE security association: <ul style="list-style-type: none"> <li>• <b>Matured</b>—The IKE security association is established.</li> <li>• <b>Not matured</b>—The IKE security association is in the process of negotiation.</li> </ul> | none specified  |
| <b>Initiator cookie</b> | When the IKE negotiation is triggered, a random number is sent to the remote node.                                                                                                                                                                  | All levels      |

Table 64: show ike security-associations Output Fields (continued)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Level of Output |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Responder cookie</b>      | <p>The remote node generates its own random number and sends it back to the initiator as a verification that the packets were received.</p> <p>Of the numerous security services available, protection against denial of service (DoS) is one of the most difficult to address. A “cookie” or anticlogging token (ACT) is aimed at protecting the computing resources from attack without spending excessive CPU resources to determine the cookie's authenticity. An exchange prior to CPU-intensive public key operations can thwart some DoS attempts (such as simple flooding with invalid IP source addresses).</p>                                                                                                      | All levels      |
| <b>Exchange type</b>         | <p>Specifies the number of messages in an IKE exchange, and the payload types that are contained in each message. Each exchange type provides a particular set of security services, such as anonymity of the participants, perfect forward secrecy of the keying material, and authentication of the participants. Junos OS supports two types of exchanges:</p> <ul style="list-style-type: none"> <li>• <b>Main</b>—The exchange is done with six messages. <b>Main</b> encrypts the payload, protecting the identity of the neighbor.</li> <li>• <b>Aggressive</b>—The exchange is done with three messages. <b>Aggressive</b> does not encrypt the payload, leaving the identity of the neighbor unprotected.</li> </ul> | All Levels      |
| <b>Authentication method</b> | Type of authentication determines which payloads are exchanged and when they are exchanged. The Junos OS supports only <b>pre-shared keys</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail</b>   |
| <b>Local</b>                 | Prefix and port number of the local end.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail</b>   |
| <b>Remote</b>                | Prefix and port number of the remote end.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>detail</b>   |
| <b>Lifetime</b>              | Number of seconds remaining until the IKE security association expires.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail</b>   |
| <b>Algorithms</b>            | <p>Header for the IKE algorithms output.</p> <ul style="list-style-type: none"> <li>• <b>Authentication</b>—Type of authentication algorithm used: <b>md5</b> or <b>sha1</b>.</li> <li>• <b>Encryption</b>—Type of encryption algorithm used: <b>des-cbc</b>, <b>3des-cbc</b>, or <b>None</b>.</li> <li>• <b>Pseudo random function</b>—Function that generates highly unpredictable random numbers: <b>hmac-md5</b> or <b>hmac-sha1</b>.</li> </ul>                                                                                                                                                                                                                                                                          | <b>detail</b>   |
| <b>Traffic statistics</b>    | <p>Number of bytes and packets received and transmitted on the IKE security association.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the IKE security association.</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the IKE security association.</li> </ul>                                                                                                                                                                                                                                                                                                                                       | <b>detail</b>   |



Table 64: show ike security-associations Output Fields (continued)

| Field Name                              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Level of Output |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Flags</b>                            | Notification to the key management process of the status of the IKE negotiation: <ul style="list-style-type: none"> <li>• <b>caller notification sent</b>—Caller program notified about the completion of the IKE negotiation.</li> <li>• <b>waiting for done</b>—Negotiation is done. The library is waiting for the remote end retransmission timers to expire.</li> <li>• <b>waiting for remove</b>—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation.</li> <li>• <b>waiting for policy manager</b>—Negotiation is waiting for a response from the policy manager.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>detail</b>   |
| <b>IPsec security associates</b>        | Number of IPsec security associations created and deleted with this IKE security association.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail</b>   |
| <b>Phase 2 negotiations in progress</b> | Number of phase 2 IKE negotiations in progress and status information: <ul style="list-style-type: none"> <li>• <b>Negotiation type</b>—Type of phase 2 negotiation. The Junos OS currently supports <b>quick mode</b>.</li> <li>• <b>Message ID</b>—Unique identifier for a phase 2 negotiation.</li> <li>• <b>Local identity</b>—Identity of the local phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[O..id-data-len] = iddata-presentation)</i></li> <li>• <b>Remote identity</b>—Identity of the remote phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[O..id-data-len] = iddata-presentation)</i></li> <li>• <b>Flags</b>—Notification to the key management process of the status of the IKE negotiation: <ul style="list-style-type: none"> <li>• <b>caller notification sent</b>—Caller program notified about the completion of the IKE negotiation.</li> <li>• <b>waiting for done</b>—Negotiation is done. The library is waiting for the remote end retransmission timers to expire.</li> <li>• <b>waiting for remove</b>—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation.</li> <li>• <b>waiting for policy manager</b>—Negotiation is waiting for a response from the policy manager.</li> </ul> </li> </ul> | <b>detail</b>   |

## Sample Output

### show ike security-associations

```
user@host> show ike security-associations
Remote Address State Initiator cookie Responder cookie Exchange type
192.0.2.4 Matured 93870456fa000011 723a20713700003e Main
```

### show ike security-associations detail

```
user@host> show ike security-associations detail
IKE peer 192.0.2.4
 Role: Initiator, State: Matured
 Initiator cookie: cf22bd81a7000001, Responder cookie: fe83795c2800002e
 Exchange type: Main, Authentication method: Pre-shared-keys
 Local: 192.0.2.5:500, Remote: 192.0.2.4:500
 Lifetime: Expires in 187 seconds
 Algorithms:
 Authentication : md5
 Encryption : 3des-cbc
 Pseudo random function: hmac-md5
 Traffic statistics:
 Input bytes : 1000
 Output bytes : 1280
 Input packets: 5
 Output packets: 9
 Flags: Caller notification sent
 IPsec security associations: 2 created, 0 deleted
 Phase 2 negotiations in progress: 1

Negotiation type: Quick mode, Role: Initiator, Message ID: 3582889153
 Local: 192.0.2.5:500, Remote: 192.0.2.4:500
 Local identity: ipv4_subnet(tcp:80,[0..7]=10.1.1.0/24)
 Remote identity: ipv4_subnet(tcp:100,[0..7]=10.1.2.0/24)
 Flags: Caller notification sent, Waiting for done
```

## show ipsec certificates

**Syntax**    `show ipsec certificates`  
               `<brief | detail>`  
               `<crl crl-name | serial-number>`

**Release Information**    Command introduced before Junos OS Release 7.4.

**Description**    (Encryption interface on M Series and T Series routers only) Display information about the IPsec certificate database.

**Options**    **none**—Display standard information about all of the entries in the IPsec certificate database.

**brief | detail**—(Optional) Display the specified level of output.

**crl *crl-name* | *serial-number***—(Optional) Display information about the entries on the certificate revocation list (CRL) or for the specified serial number. A CRL is a timestamped list identifying revoked certificates. The CRL is signed by a certificate authority (CA) or CRL issuer and made freely available in a public repository. Each revoked certificate is identified in a CRL by its certificate serial number.

**Required Privilege Level**    view

**Related Documentation**    • *clear ipsec security-associations*

**List of Sample Output**    [show ipsec certificates detail on page 1202](#)

**Output Fields**    [Table 65 on page 1201](#) lists the output fields for the **show ipsec certificates** command. Output fields are listed in the approximate order in which they appear.

*Table 65: show ipsec certificates Output Fields*

| Field Name | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Level of Output |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Database   | Display information about the IPsec certificate database. <ul style="list-style-type: none"> <li>• <b>Total entries</b>—Number of database entries, including entries that are not trusted or that are in the process of being deleted.</li> <li>• <b>Active entries</b>—Number of database entries, excluding entries that are marked as deleted.</li> <li>• <b>Locked entries</b>—Number of statically configured database entries that cannot expire, such as CA certificates that are root or trusted.</li> </ul> | All levels      |
| Subject    | Distinguished name for the certificate for <b>C, O, CN</b> , as described in RFC 3280, <i>Internet x.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile</i> .                                                                                                                                                                                                                                                                                                                    | All levels      |

Table 65: show ipsec certificates Output Fields (continued)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                             | Level of Output |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| ID                           | Identification number of the database entry. ID is generated by the internal certificate database.                                                                                                                                                                                                                                                                                                                                                            | All levels      |
| References                   | Reference number the certificate manager has for the particular entry.                                                                                                                                                                                                                                                                                                                                                                                        | detail          |
| Serial                       | Unique serial number assigned to each certificate by the CA.                                                                                                                                                                                                                                                                                                                                                                                                  | All levels      |
| Flags                        | State of the certificate. <ul style="list-style-type: none"> <li>• <b>Trusted</b>—Passed validity checks.</li> <li>• <b>Not trusted</b>—Failed validity checks.</li> <li>• <b>Root</b>—Entry is locked and may have been learned through IKE or a locally configured CA certificate.</li> <li>• <b>Non-root</b>—Entry is not locked.</li> <li>• <b>Crl-issuer</b>—Entity issues CRLs.</li> <li>• <b>Non-crl-issuer</b>—Entity does not issue CRLs.</li> </ul> | detail          |
| Validity period starts       | Start time that the certificate is valid, in the format <i>yyyy mon dd, hh:mm:ss GMT</i> .                                                                                                                                                                                                                                                                                                                                                                    | detail          |
| Validity period ends         | End time that the certificate is valid, in the format <i>yyyy mon dd, hh:mm:ss GMT</i> .                                                                                                                                                                                                                                                                                                                                                                      | detail          |
| Alternative name information | Auxiliary identity for the certificate: <i>dns-name</i> , <i>email-address</i> , <i>ip-address</i> , or <i>uri</i> (uniform resource identifier).                                                                                                                                                                                                                                                                                                             | detail          |
| Issuer                       | Information about the entity that has signed and issued the CRL as described in RFC 2459, <i>Internet X.509 Public Key Infrastructure Certificate and CRL Profile</i> .                                                                                                                                                                                                                                                                                       | detail          |

## Sample Output

### show ipsec certificates detail

```

user@host> show ipsec certificates detail
Database: Total entries: 3 Active entries: 4 Locked entries: 1
Subject: C=us, O=x
 ID: 5, References: 0, Serial: 22314868
 Flags: Trusted Non-root Crl-issuer
 Validity period starts: 2003 Mar 1st, 01:20:42 GMT
 Validity period ends: 2003 Mar 31st, 01:50:42 GMT
 Alternative name information:
 IP address: 10.20.210.1
 Issuer: C=FI, O=Company-ABC, CN=Company ABC class 2

Subject: C=us, O=x
 ID: 4, References: 0, Serial: 22315496
 Flags: Trusted Non-root Crl-issuer
 Validity period starts: 2003 Mar 1st, 01:21:45 GMT
 Validity period ends: 2003 Mar 31st, 01:51:45 GMT
 Alternative name information:
 IP address: 10.20.210.20
 Issuer: C=FI, O=Company-ABC, CN=Company ABC class 2

```

Subject: C=FI, O=SSH Company-ABC, CN=Company ABC class 2  
ID: 1, References: 1, Serial: 1538512  
Flags: Trusted Root Non-crl-issuer  
Validity period starts: 2001 Aug 1st, 07:08:32 GMT  
Validity period ends: 2004 Aug 1st, 07:08:32 GMT  
Alternative name information:  
Email address: certifier-support@ssh.com  
Issuer: C=FI, O=Company-ABC, CN=Company ABC class 2

## show ipsec security-associations

|                                 |                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show ipsec security-associations<br><brief   detail><br><sa-name>                                                                                                                                                                                        |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.                                                                                                                                                                                                          |
| <b>Description</b>              | Display information about the IPsec security associations applied to the local or transit traffic stream.                                                                                                                                                |
| <b>Options</b>                  | <p><b>none</b>—Display standard information about all IPsec security associations.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>sa-name</b>—(Optional) Display the specified IPsec security association.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">show ipsec security-associations sa-name on page 1206</a><br><a href="#">show ipsec security-associations sa-name detail on page 1206</a>                                                                                                    |
| <b>Output Fields</b>            | Table 66 on page 1204 lists the output fields for the <b>show ipsec security-associations</b> command. Output fields are listed in the approximate order in which they appear.                                                                           |

Table 66: show ipsec security-associations Output Fields

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Level of Output |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Security association</b> | Name of the security association.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels      |
| <b>Interface family</b>     | <p>Status of the interface family of the security association. If the interface family field is absent, it is a transport mode security association. The interface family can have one of three options:</p> <ul style="list-style-type: none"> <li>• <b>Up</b>—The security association is referenced in the interface family and the interface family is up.</li> <li>• <b>Down</b>—The security association is referenced in the interface family and the interface family is down.</li> <li>• <b>No reference</b>—The security association is not referenced in the interface family.</li> </ul> | All levels      |
| <b>Local gateway</b>        | Gateway address of the local system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | All levels      |
| <b>Remote gateway</b>       | Gateway address of the remote system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | All levels      |
| <b>Local identity</b>       | Prefix and port number of the local end                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | All levels      |
| <b>Remote identity</b>      | Prefix and port number of the remote end.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | All levels      |

Table 66: show ipsec security-associations Output Fields (continued)

| Field Name                                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Level of Output |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Direction</b>                             | Direction of the security association: <b>inbound</b> or <b>outbound</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels      |
| <b>SPI</b>                                   | Value of the security parameter index.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | All levels      |
| <b>AUX-SPI</b>                               | Value of the auxiliary security parameter index.<br><br><ul style="list-style-type: none"> <li>When the value is <b>AH</b> or <b>ESP</b>, <b>AUX-SPI</b> is always <b>0</b>.</li> <li>When the value is <b>AH+ESP</b>, <b>AUX-SPI</b> is always a positive integer.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | All levels      |
| <b>State</b>                                 | Status of the security association:<br><br><ul style="list-style-type: none"> <li><b>Installed</b>—The security association is installed in the security association database. (For transport mode security associations, the value of <b>State</b> must always be <b>Installed</b>.)</li> <li><b>Not installed</b>—The security association is not installed in the security association database.</li> </ul>                                                                                                                                                                                                                                                                                                                                                | <b>detail</b>   |
| <b>Mode</b>                                  | Mode of the security association:<br><br><ul style="list-style-type: none"> <li><b>transport</b>—Protects single host-to-host protections.</li> <li><b>tunnel</b>—Protects connections between security gateways.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | All levels      |
| <b>Type</b>                                  | Type of security association:<br><br><ul style="list-style-type: none"> <li><b>manual</b>—Security parameters require no negotiation. They are static, and are configured by the user.</li> <li><b>dynamic</b>—Security parameters are negotiated by the IKE protocol. Dynamic security associations are not supported in transport mode.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                          | All levels      |
| <b>Protocol</b>                              | Protocol supported:<br><br><ul style="list-style-type: none"> <li><b>transport mode</b>—Supports Encapsulation Security Protocol (<b>ESP</b>) or Authentication Header (<b>AH</b>).</li> <li><b>tunnel mode</b>—Supports <b>ESP</b> or <b>AH+ESP</b>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | All levels      |
| <b>Authentication</b>                        | Type of authentication used: <b>hmac-md5-96</b> , <b>hmac-sha1-96</b> , or <b>None</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail</b>   |
| <b>Encryption</b>                            | Type of encryption used: <b>des-cbc</b> , <b>3des-csc</b> , or <b>None</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Soft lifetime</b><br><b>Hard lifetime</b> | ( <b>dynamic</b> output only) Each lifetime of a security association has two display options, hard and soft, one of which must be present for a dynamic security association. The <b>hard lifetime</b> specifies the lifetime of the SA. The <b>soft lifetime</b> , which is derived from the hard lifetime, informs the IPsec key management system that the SA is about to expire. This allows the key management system to negotiate a new SA before the hard lifetime expires.<br><br><ul style="list-style-type: none"> <li><b>Expires in seconds seconds</b>—Number of seconds left until the security association expires.</li> <li><b>Expires in kilobytes kilobytes</b>—Number of kilobytes left until the security association expires.</li> </ul> | <b>detail</b>   |

Table 66: show ipsec security-associations Output Fields (continued)

| Field Name          | Field Description                                                                                                                                                                                                                                                                  | Level of Output |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Anti-replay service | State of the service that prevents packets from being replayed: <b>Enabled</b> or <b>Disabled</b> .                                                                                                                                                                                | detail          |
| Replay window size  | Configured size, in packets, of the antireplay service window: <b>32</b> or <b>64</b> . The antireplay window size protects the receiver against replay attacks by rejecting old or duplicate packets. If the replay window size is <b>0</b> , the antireplay service is disabled. | detail          |

## Sample Output

### show ipsec security-associations sa-name

```

user@host> show ipsec security-associations sa-cosmic brief
Security association: sa-cosmic, Interface family: Up
Local gateway: 192.0.2.1, Remote gateway: 198.51.100.1
Local identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Direction SPI AUX-SPI Mode Type Protocol
inbound 2908734119 0 tunnel dynamic AH
outbound 3494029335 0 tunnel dynamic AH

```

### show ipsec security-associations sa-name detail

```

user@host> show ipsec security-associations sa-cosmic detail
Security association: sa-cosmic, Interface family: Up

Local gateway: 192.0.2.1, Remote gateway: 198.51.100.1
Local identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Direction: inbound, SPI: 2908734119, AUX-SPI: 0, State: Installed
Mode: tunnel, Type: dynamic
Protocol: AH, Authentication: hmac-md5-96, Encryption: None
Soft lifetime: Expired
Hard lifetime: Expires in 120 seconds
Anti-replay service: Disabled

Direction: outbound, SPI: 3494029335, AUX-SPI: 0, State: Installed
Mode: tunnel, Type: dynamic
Protocol: AH, Authentication: hmac-md5-96, Encryption: None
Soft lifetime: Expired
Hard lifetime: Expires in 120 seconds
Anti-replay service: Disabled

```



## show ip-source-guard

**Syntax** `show ip-source-guard`

**Release Information** Command introduced in Junos OS Release 9.2 for EX Series switches.

**Description** Display IP source guard database information.

**Required Privilege Level** view

- Related Documentation**
- [Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN on page 488](#)
  - [Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces on page 478](#)
  - [Verifying That IP Source Guard Is Working Correctly on page 512](#)

**List of Sample Output** [show ip-source-guard on page 1207](#)

**Output Fields** [Table 67 on page 1207](#) lists the output fields for the `show ip-source-guard` command. Output fields are listed in the approximate order in which they appear.

*Table 67: show ip-source-guard Output Fields*

| Field Name  | Field Description                                                                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VLAN        | VLAN on which IP source guard is enabled.                                                                                                                                                                                                        |
| Interface   | Access interface associated with the VLAN in column 1.                                                                                                                                                                                           |
| Tag         | VLAN ID for the VLAN in column 1. Possible values are: <ul style="list-style-type: none"> <li>• 0, indicating the VLAN is not tagged.</li> <li>• 1 – 4093</li> </ul>                                                                             |
| IP Address  | Source IP address for a device connected to the interface in column 2. A value of * (star, or asterisk) indicates that IP source guard is not enabled on this VLAN but the interface is shared with a VLAN that is enabled for IP source guard.  |
| MAC Address | Source MAC address for a device connected to the interface in column 2. A value of * (star, or asterisk) indicates that IP source guard is not enabled on this VLAN but the interface is shared with a VLAN that is enabled for IP source guard. |

## Sample Output

`show ip-source-guard`

```
user@switch> show ip-source-guard
```

## IP source guard information:

| Interface   | Tag | IP Address | MAC Address       | VLAN    |
|-------------|-----|------------|-------------------|---------|
| ge-0/0/12.0 | 0   | 10.10.10.7 | 00:30:48:92:A5:9D | vlan100 |
| ge-0/0/13.0 | 0   | 10.10.10.9 | 00:30:48:8D:01:3D | vlan100 |
| ge-0/0/13.0 | 100 | *          | *                 | voice   |

## show ipv6-source-guard

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show ipv6-source-guard</code>                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Command introduced in Junos OS Release 14.1X53-D10 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | (For non-ELS switches) Display IPv6 source guard database information.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IP Source Guard on a Data VLAN That Shares an Interface with a Voice VLAN on page 488</a></li> <li>• <a href="#">Example: Configuring IP Source Guard with Other EX Series Switch Features to Mitigate Address-Spoofing Attacks on Untrusted Access Interfaces on page 478</a></li> <li>• <a href="#">Verifying That IP Source Guard Is Working Correctly on page 512</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show ipv6-source-guard on page 1209</a>                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Output Fields</b>            | <a href="#">Table 67 on page 1207</a> lists the output fields for the <code>show ipv6-source-guard</code> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                     |

*Table 68: show ipv6-source-guard Output Fields*

| Field Name         | Field Description                                                                                                                                                                                                                         |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>VLAN</b>        | VLAN on which IPv6 source guard is enabled.                                                                                                                                                                                               |
| <b>Interface</b>   | Access interface associated with the VLAN described in row 1.                                                                                                                                                                             |
| <b>Tag</b>         | VLAN ID for the VLAN described in row 1. Possible values are: <ul style="list-style-type: none"> <li>• 0, indicating the VLAN is not tagged.</li> <li>• 1 through 4093</li> </ul>                                                         |
| <b>IP Address</b>  | Source IP address for a device connected to the interface described in row 2. A * (asterisk) indicates that IPv6 source guard is not enabled on this VLAN, but the interface is shared with a VLAN that is enabled for IPv6 source guard. |
| <b>MAC Address</b> | Source MAC address for a device connected to the interface described in row 2. A * (asterisk) indicates that IPv6 source guard is not enabled on this VLAN but the interface is shared with a VLAN that is enabled for IPv6 source guard. |

## Sample Output

### show ipv6-source-guard

```
user@switch> show ipv6-source-guard
```

## IP source guard information:

| Interface  | Tag | IP Address            | MAC Address       | VLAN  |
|------------|-----|-----------------------|-------------------|-------|
| ge-0/0/6.0 | 0   | 2001:db8::10:0:15     | 00:10:94:10:00:01 | vlan1 |
| ge-0/0/6.0 | 0   | fe80::210:94ff:fe10:1 | 00:10:94:10:00:01 | vlan1 |
| ge-0/0/7.0 | 0   | 2001:db8::10:0:14     | 00:10:94:10:00:02 | vlan1 |
| ge-0/0/7.0 | 0   | fe80::210:94ff:fe10:2 | 00:10:94:10:00:02 | vlan1 |

## show neighbor-discovery-inspection statistics

**Syntax** show neighbor-discovery-inspection statistics

**Release Information** Command introduced in Junos OS Release 14.1X53-D10 for EX Series switches.

**Description** Display neighbor discovery inspection statistics.

**Required Privilege Level** view

**Related Documentation**

- [clear arp inspection statistics on page 1054](#)
- [Example: Configuring Basic Port Security Features on page 289](#)
- [Verifying That DAI Is Working Correctly on page 461](#)

**List of Sample Output** [show neighbor-discovery-inspection statistics on page 1211](#)

**Output Fields** [Table 42 on page 1108](#) lists the output fields for the **show neighbor-discovery-inspection statistics** command. Output fields are listed in the approximate order in which they appear.

*Table 69: show neighbor-discovery-inspection statistics Output Fields*

| Field Name           | Field Description                                                           | Level of Output |
|----------------------|-----------------------------------------------------------------------------|-----------------|
| Interface            | Interface on which neighbor discovery inspection has been applied.          | All levels      |
| Packets received     | Total number of packets total that underwent neighbor discovery inspection. | All levels      |
| ND inspection pass   | Total number of packets that passed neighbor discovery inspection.          | All levels      |
| ND inspection failed | Total number of packets that failed neighbor discovery inspection.          | All levels      |

## Sample Output

### show neighbor-discovery-inspection statistics

```

user@switch> show neighbor-discovery-inspection statistics
Interface Packets received ND inspection pass ND inspection failed
ge-0/0/0 5 1 4
ge-0/0/1 0 0 0

```

## show security keychain

|                                 |                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security keychain<br><brief   detail>                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | Command introduced in Junos OS Release 11.2.<br>Statement introduced in Junos OS Release 12.3X50 for the QFX Series.                                                                                                                                                                      |
| <b>Description</b>              | Display information about authentication keychains configured for the Border Gateway Protocol (BGP), the Label Distribution Protocol (LDP) routing protocols, the Bidirectional Forwarding Detection (BFD) protocol, and the Intermediate System-to-Intermediate System (IS-IS) protocol. |
| <b>Options</b>                  | <b>none</b> —Display information about authentication keychains.<br><br><b>brief   detail</b> —(Optional) Display the specified level of output.                                                                                                                                          |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>    | <a href="#">show security keychain brief on page 1214</a><br><a href="#">show security keychain detail on page 1214</a>                                                                                                                                                                   |
| <b>Output Fields</b>            | <a href="#">Table 70 on page 1212</a> describes the output fields for the <b>show security keychain</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                  |

*Table 70: show security keychain Output Fields*

| Field Name        | Field Description                                                                        | Level of Output |
|-------------------|------------------------------------------------------------------------------------------|-----------------|
| keychain          | The name of the keychain in operation.                                                   | All levels      |
| Active-ID Send    | Number of routing protocols packets sent with the active key.                            | All levels      |
| Active-ID Receive | Number of routing protocols packets received with the active key.                        | All levels      |
| Next-ID Send      | Number of routing protocols packets sent with the next key.                              | All levels      |
| Next-ID Receive   | Number of routing protocols packets received with the next key.                          | All levels      |
| Transition        | Amount of time until the current key will be replaced with the next key in the keychain. | All levels      |
| Tolerance         | Configured clock-skew tolerance, in seconds, for accepting keys for a key chain.         | All levels      |
| Id                | Identification number configured for the current key.                                    | <b>detail</b>   |
| Algorithm         | Authentication algorithm configured for the current key.                                 | <b>detail</b>   |

Table 70: show security keychain Output Fields (continued)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Level of Output |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>State</b>      | <p>State of the current key.</p> <p>The value can be:</p> <ul style="list-style-type: none"> <li>• <b>receive</b></li> <li>• <b>send</b></li> <li>• <b>send-receive</b></li> </ul> <p>For the active key, the <b>State</b> can be <b>send-receive</b>, <b>send</b>, or <b>receive</b>. For keys that have a future start time, the <b>State</b> is <b>inactive</b>. Compare the <b>State</b> field to the <b>Mode</b> field.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>detail</b>   |
| <b>Option</b>     | <p>For IS-IS only, the option determines how Junos OS encodes the message authentication code in routing protocol packets.</p> <p>The values can be:</p> <ul style="list-style-type: none"> <li>• <b>basic</b>—Based on RFC 5304.</li> <li>• <b>isis-enhanced</b>—Based on RFC 5310.</li> </ul> <p>The default value is <b>basic</b>. When you configure the <b>isis-enhanced</b> option, Junos OS sends RFC 5310-encoded routing protocol packets and accepts both RFC 5304-encoded and RFC 5310-encoded routing protocol packets that are received from other devices.</p> <p>When you configure <b>basic</b> (or do not include the <b>options</b> statement in the key configuration) Junos OS sends and receives RFC 5304-encoded routing protocols packets, and drops 5310-encoded routing protocol packets that are received from other devices.</p> <p>Because this setting is for IS-IS only, the TCP and the BFD protocol ignore the encoding option configured in the key.</p> | <b>detail</b>   |
| <b>Start-time</b> | Time that the current key became active.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Mode</b>       | <p>Mode of each key (Informational only.)</p> <p>The value can be</p> <ul style="list-style-type: none"> <li>• <b>receive</b></li> <li>• <b>send</b></li> <li>• <b>send-receive</b></li> </ul> <p>The mode of the key is based on the configuration. Suppose you configure two keys, one with a start-time of today and the other with a start-time of next week. For both keys, the <b>Mode</b> can be <b>send-receive</b>, <b>send</b>, or <b>receive</b>, regardless of the configured start-time. Compare the <b>Mode</b> field to the <b>State</b> field.</p>                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>detail</b>   |

## Sample Output

### show security keychain brief

```
user@host> show security keychain brief
keychain Active-ID Next-ID Transition Tolerance
 Send Receive Send Receive
hakr 3 3 1 1 1d 23:58 3600
```

### show security keychain detail

```
user@host> show security keychain detail
keychain Active-ID Next-ID Transition Tolerance
 Send Receive Send Receive
hakr 3 3 1 1 1d 23:58 3600
 Id 3, Algorithm hmac-md5, State send-receive, Option basic
 Start-time Wed Aug 11 16:28:00 2010, Mode send-receive
 Id 1, Algorithm hmac-md5, State inactive, Option basic
 Start-time Fri Aug 20 11:30:57 2010, Mode send-receive
```



## show security macsec connections

|                                 |                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security macsec connections<br><interface <i>interface-name</i> >                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D15 for EX Series switches.<br>Command introduced in Junos OS Release 14.1X53-D15 for QFX Series switches.                                                              |
| <b>Description</b>              | Display the status of the active MACsec connections on the switch.<br><br>This command does not display output when MACsec is enabled using static secure association key (SAK) security mode.                         |
| <b>Options</b>                  | <b>none</b> —Display MACsec connection information for all interfaces on the switch.<br><br><b>interface <i>interface-name</i></b> —(Optional) Display MACsec connection information for the specified interface only. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">show security macsec statistics on page 1220</a></li> </ul>                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show security macsec connections on page 1216</a>                                                                                                                                                          |
| <b>Output Fields</b>            | <a href="#">Table 39 on page 1071</a> lists the output fields for the <b>show security macsec connections</b> command. Output fields are listed in the approximate order in which they appear.                         |

Table 71: show security macsec connections Output Fields

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fields for Interface |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Interface name       | Name of the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CA name              | Name of the connectivity association.<br><br>A connectivity association is named using the <b>connectivity-association</b> statement when you are enabling MACsec.                                                                                                                                                                                                                                                                                     |
| Cipher suite         | Name of the cipher suite used for encryption.                                                                                                                                                                                                                                                                                                                                                                                                          |
| Encryption           | Encryption setting. Encryption is enabled when this output is <b>on</b> and disabled when this output is <b>off</b> .<br><br>The encryption setting is set using the <b>no-encryption</b> statement in the connectivity association when using static connectivity association key (CAK) security mode and is set using the <b>encryption</b> statement in the secure channel when using static secure association key (SAK) or dynamic security mode. |

Table 71: show security macsec connections Output Fields (continued)

| Field Name        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Key server offset | <p>Offset setting.</p> <p>The offset is set using the <b>offset</b> statement when configuring the connectivity association when using static connectivity association key (CAK) or dynamic security mode or the secure channel when using static secure association key (SAK) security mode.</p>                                                                                                                                                                                                                                                                        |
| Include SCI       | <p>SCI tagging. The SCI tag is included on packets in a secure channel when this output is <b>yes</b>, and not included on packets in a secure channel when this output is <b>no</b>.</p> <p>You can enable SCI tagging using the <b>include-sci</b> statement in the connectivity association.</p> <p><b>NOTE:</b> SCI tags are automatically appended to packets leaving a MACsec-enabled interface on an EX4300 switch. The <b>include-sci</b> option is, therefore, not available on EX4300 switches. The output for the <b>Include SCI</b> field is <b>yes</b>.</p> |
| Replay protect    | <p>Replay protection setting. Replay protection is enabled when this output is <b>on</b> and disabled when this output is <b>off</b>.</p> <p>You can enable replay protection using the <b>replay-protect</b> statement in the connectivity association.</p>                                                                                                                                                                                                                                                                                                             |
| Replay window     | <p>Replay protection window setting. This output is set to <b>0</b> when replay protection is disabled, and is the size of the replay window, in number of packets, when replay protection is enabled.</p> <p>The size of the replay window is configured using the <b>replay-window-size</b> statement in the connectivity association.</p>                                                                                                                                                                                                                             |

## Sample Output

### show security macsec connections

```

user@host> show security macsec connections
Interface name: xe-0/1/0
 CA name: CA1
 Cipher suite: GCM-AES-128 Encryption: on
 Key server offset: 0 Include SCI: no
 Replay protect: off Replay window: 0

```

## show security macsec connections (MX Series)

|                                 |                                                                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security macsec connections<br><interface <i>interface-name</i> >                                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers. Support for MPC7E-10G introduced in Junos OS Release 16.1R1 for MX240, MX480, and MX960 routers.                                                                                            |
| <b>Description</b>              | Display the status of the active MACsec connections on the router.                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>none</b>—Display MACsec connection information for all interfaces on the switch.</p> <p><b>interface <i>interface-name</i></b>—(Optional) Display MACsec connection information for the specified interface only.</p>                                                  |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>    | <p><a href="#">show security macsec connections on page 1218</a></p> <p><a href="#">show security macsec connections (MX480 routers with MPC7E-10G) on page 1218</a></p> <p><a href="#">show security macsec connections (MX480 routers with MPC7E-10G) on page 1219</a></p> |
| <b>Output Fields</b>            | <a href="#">Table 39 on page 1071</a> lists the output fields for the <b>show security macsec connections</b> command. Output fields are listed in the approximate order in which they appear.                                                                               |

Table 72: show security macsec connections Output Fields

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fields for Interface |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Interface name       | Name of the interface.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| CA name              | <p>Name of the connectivity association.</p> <p>A connectivity association is named using the <b>connectivity-association</b> statement when you are enabling MACsec.</p>                                                                                                                                                                                                                                                                                    |
| Cipher suite         | Name of the cipher suite used for encryption.                                                                                                                                                                                                                                                                                                                                                                                                                |
| Encryption           | <p>Encryption setting. Encryption is enabled when this output is <b>on</b> and disabled when this output is <b>off</b>.</p> <p>The encryption setting is set using the <b>no-encryption</b> statement in the connectivity association when using static connectivity association key (CAK) security mode and is set using the <b>encryption</b> statement in the secure channel when using static secure association key (SAK) or dynamic security mode.</p> |

Table 72: show security macsec connections Output Fields (continued)

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Key server offset</b> | <p>The offset value in a packet from which encryption can be performed.</p> <p>The offset is set using the <b>offset</b> statement when configuring the connectivity association when using static connectivity association key (CAK) or dynamic security mode or the secure channel when using static secure association key (SAK) security mode.</p>                                                                |
| <b>Include SCI</b>       | <p>SCI tagging. The SCI tag is included on packets in a secure channel when this output is <b>yes</b>, and not included on packets in a secure channel when this output is <b>no</b>. SCI tagging is automatically enabled on MX Series routers.</p> <p>By default, include SCI tag is disabled. You can enable SCI tagging using the <b>include-sci</b> statement in the connectivity association configuration.</p> |
| <b>Replay protect</b>    | <p>By default, replay protection is disabled. Replay protection ensures that a snooped packet is not replayed or a packet number is reused. Replay protection is enabled when this output is <b>on</b> and disabled when this output is <b>off</b>.</p> <p>You can enable replay protection using the <b>replay-protect</b> statement in the connectivity association configuration.</p>                              |
| <b>Replay window</b>     | <p>Number of packets that can be replayed. Must be configured with replay protection. This output is set to <b>0</b> when replay protection is disabled, and is the size of the replay window, in number of packets, when replay protection is enabled.</p> <p>The size of the replay window is configured using the <b>replay-window-size</b> statement in the connectivity association configuration.</p>           |

## Sample Output

### show security macsec connections

```

user@host> show security macsec connections
Interface name: xe-0/1/0
 CA name: CA1
 Cipher suite: GCM-AES-128 Encryption: on
 Key server offset: 0 Include SCI: no
 Replay protect: off Replay window: 0

```

### show security macsec connections (MX480 routers with MPC7E-10G)

```

user@host> show security macsec connections
Interface name: xe-4/0/18
 CA name: ca1
 Cipher suite: GCM-AES-128 Encryption: on
 Key server offset: 30 Include SCI: no
 Replay protect: off Replay window: 0
 Outbound secure channels
 SC Id: 54:1E:56:B4:0D:3A/1
 Outgoing packet number: 11
 Secure associations
 AN: 1 Status: inuse Create time: 1d 17:31:10
 Inbound secure channels
 SC Id: 54:1E:56:B3:CA:A7/1

```

```
Secure associations
AN: 1 Status: inuse Create time: 1d 17:31:10
```

#### show security macsec connections (MX480 routers with MPC7E-10G)

```
user@host> show security macsec connections interface xe-1/0/7
CA name: caae1
Cipher suite: AES_GCM_128 Encryption: off
Key server offset: 0 Include SCI: no
Replay protect: off Replay window: 0
Outbound secure channels
 SC Id: 54:1E:56:B3:CA:9C/1
 Outgoing packet number: 1
 Secure associations
 AN: 0 Status: inuse Create time: 4d 05:56:06
Inbound secure channels
 SC Id: 54:1E:56:B4:0D:2F/1
 Secure associations
 AN: 0 Status: inuse Create time: 4d 05:56:06
```

## show security macsec statistics

**Syntax** show security macsec statistics  
<brief | detail>  
<interface *interface-name*>

**Release Information** Command introduced in Junos OS Release 13.2X50-D15 for EX Series switches.

**Description** Display Media Access Control Security (MACsec) statistics.

This command does not display output when MACsec is enabled using static secure association key (SAK) security mode.

**Options** **none**—Display MACsec statistics in brief form for all interfaces on the switch.

**brief | detail**—(Optional) Display the specified level of output. Using the **brief** option is equivalent to entering the command with no options (the default). The **detail** option displays additional fields that are not visible in the **brief** output.



**NOTE:** The field names that only appear in this command output when you enter the **detail** option are mostly useful for debugging purposes by Juniper Networks support personnel.

**interface *interface-name***—(Optional) Display MACsec statistics for the specified interface only.

**Required Privilege Level** view

**Related Documentation**

- [show security macsec connections on page 1071](#)

**List of Sample Output** [show security macsec statistics interface xe-0/1/0 detail on page 1222](#)

**Output Fields** [Table 73 on page 1220](#) lists the output fields for the **show security macsec statistics** command. Output fields are listed in the approximate order in which they appear.

The field names that appear in this command output only when you enter the **detail** option are mostly useful for debugging purposes by Juniper Networks support personnel. Those field names are, therefore, not included in this table.

*Table 73: show security macsec statistics Output Fields*

| Field Name     | Field Description      | Level of Output |
|----------------|------------------------|-----------------|
| Interface name | Name of the interface. | All levels      |

Table 73: show security macsec statistics Output Fields (continued)

| Field Name                                       | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                 | Level of Output |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Fields for Secure Channel transmitted</b>     |                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |
| <b>Encrypted packets</b>                         | <p>Total number of packets transmitted out of the interface in the secure channel that were secured and encrypted using MACsec.</p> <p>Data packets are sent in the secure channel when MACsec is enabled, and are secured using a secure association key (SAK).</p>                                                                                                                                                              | All levels      |
| <b>Encrypted bytes</b>                           | <p>Total number of bytes transmitted out of the interface in the secure channel that were secured and encrypted using MACsec.</p> <p>Data packets are sent in the secure channel when MACsec is enabled, and are secured using a secure association key (SAK).</p>                                                                                                                                                                | All levels      |
| <b>Protected packets</b>                         | <p>Total number of packets transmitted out of the interface in the secure channel that were secured but not encrypted using MACsec.</p> <p>Data packets are sent in the secure channel when MACsec is enabled, and are secured using a secure association key (SAK).</p>                                                                                                                                                          | All levels      |
| <b>Protected bytes</b>                           | <p>Total number of bytes transmitted out of the interface in the secure channel that were secured but not encrypted using MACsec.</p> <p>Data packets are sent in the secure channel when MACsec is enabled, and are secured using a secure association key (SAK).</p>                                                                                                                                                            | All levels      |
| <b>Fields for Secure Association transmitted</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |
| <b>Encrypted packets</b>                         | <p>Total number of packets transmitted out of the interface in the connectivity association that were secured and encrypted using MACsec.</p> <p>The total includes the data packets transmitted in the secure channel and secured using a SAK and the control packets secured using a connectivity association key (CAK).</p>                                                                                                    | All levels      |
| <b>Protected packets</b>                         | <p>Total number of packets transmitted out of the interface in the connectivity association that were secured but not encrypted using MACsec.</p> <p>The total includes the data packets transmitted in the secure channel and secured using a SAK and the control packets secured using a connectivity association key (CAK).</p>                                                                                                | All levels      |
| <b>Fields for Secure Channel received</b>        |                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |
| <b>Accepted packets</b>                          | <p>The number of received packets that have been accepted by the secure channel on the interface. The secure channel is used to send all data plane traffic on a MACsec-enabled link.</p> <p>A packet is considered accepted for this counter when it has been received by this interface and it has passed the MACsec integrity check.</p> <p>This counter increments for traffic that is and is not encrypted using MACsec.</p> | All levels      |

Table 73: show security macsec statistics Output Fields (continued)

| Field Name                                    | Field Description                                                                                                                                                                                                                                                                                                                                                                                     | Level of Output |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Validated bytes</b>                        | <p>The number of bytes that have been validated by the MACsec integrity check and received on the secure channel on the interface. The secure channel is used to send all data plane traffic on a MACsec-enabled link.</p> <p>This counter does not increment when MACsec encryption is disabled.</p>                                                                                                 | All levels      |
| <b>Decrypted bytes</b>                        | <p>The number of bytes received in the secure channel on the interface that have been decrypted. The secure channel is used to send all data plane traffic on a MACsec-enabled link.</p> <p>An encrypted byte has to be decrypted before it can be received on the receiving interface. The decrypted bytes counter is incremented for received traffic that was encrypted using MACsec.</p>          | All levels      |
| <b>Fields for Secure Association received</b> |                                                                                                                                                                                                                                                                                                                                                                                                       |                 |
| <b>Accepted packets</b>                       | <p>The number of received packets that have been accepted in the connectivity association on the interface. The counter includes all control and data plane traffic accepted on the interface.</p> <p>A packet is considered accepted for this counter when it has been received by this interface and it has passed the MACsec integrity check.</p>                                                  | All levels      |
| <b>Validated bytes</b>                        | <p>The number of bytes that have been validated by the MACsec integrity check and received on the connectivity association on the interface. The counter includes all control and data plane traffic accepted on the interface.</p> <p>This counter does not increment when MACsec encryption is disabled.</p>                                                                                        | All levels      |
| <b>Decrypted bytes</b>                        | <p>The number of bytes received in the connectivity association on the interface that have been decrypted. The counter includes all control and data plane traffic accepted on the interface.</p> <p>An encrypted byte has to be decrypted before it can be received on the receiving interface. The decrypted bytes counter is incremented for received traffic that was encrypted using MACsec.</p> | All levels      |

## Sample Output

### show security macsec statistics interface xe-0/1/0 detail

```

user@host> show security macsec statistics interface xe-0/1/0 detail

Interface name: xe-0/1/0
Secure Channel transmitted
 Encrypted packets: 123858
 Encrypted bytes: 32190903
 Protected packets: 0
 Protected bytes: 0

```



```
Secure Association transmitted
 Encrypted packets: 123858
 Protected packets: 0
Secure Channel received
 Accepted packets: 123877
 Validated bytes: 0
 Decrypted bytes: 32196238
Secure Association received
 Accepted packets: 123877
 Validated bytes: 0
 Decrypted bytes: 32196238
Error and debug
Secure Channel transmitted packets
 Untagged: 0, Too long: 0
Secure Channel received packets
 Control: 0, Tagged miss: 3202804
 Untagged hit: 0, Untagged: 0
 No tag: 0, Bad tag: 0
 Unknown SCI: 0, No SCI: 0
 Control pass: 0, Control drop: 0
 Uncontrol pass: 123877, Uncontrol drop: 0
 Hit dropped: 0, Invalid accept: 0
 Late drop: 0, Delayed accept: 0
 Unchecked: 0, Not valid drop: 0
 Not using SA drop: 0, Unused SA accept: 0
```

## include-sci (MACsec for MX Series)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | include-sci;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit security macsec connectivity-association <i>connectivity-association-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Specifies that the SCI tag should be appended to each packet on a link that has enabled MACsec.</p> <p>SCI tags are automatically appended to packets leaving a MACsec-enabled interface on an MX240, MX480, or MX960 router. This option is, therefore, redundant to be configured.</p> <p>This option is used only when connecting a router to a host device that requires SCI tagging. SCI tags are eight octets long, so appending an SCI tag to all traffic on the link adds a significant amount of unneeded overhead.</p> |
| <b>Default</b>                  | SCI tagging is enabled on MX Series routers that have enabled MACsec using static connectivity association key (CAK) security mode, by default.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | admin—To view this statement in the configuration.<br>admin-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Configuring Media Access Control Security (MACsec) on MX Series Routers</i></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                    |

## show security mka sessions

|                                 |                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security mka sessions<br><interface <i>interface-name</i> >                                                                                                                                                                                         |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                               |
| <b>Description</b>              | Display MACsec Key Agreement (MKA) session information.                                                                                                                                                                                                  |
| <b>Options</b>                  | <ul style="list-style-type: none"> <li><b>interface <i>interface-name</i></b>—(Optional) Display the MKA session information for the specified interface only.</li> </ul>                                                                                |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">show security mka statistics on page 1230</a></li> <li><a href="#">show security macsec connections on page 1071</a></li> <li><a href="#">show security macsec statistics on page 1220</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show security mka sessions on page 1226</a>                                                                                                                                                                                                  |
| <b>Output Fields</b>            | Table 74 on page 1225 lists the output fields for the <b>show security mka sessions</b> command. Output fields are listed in the approximate order in which they appear.                                                                                 |

Table 74: show security mka sessions Output Fields

| Field Name        | Field Description                                                                                                                          |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Interface name    | Name of the interface.                                                                                                                     |
| Member identifier | Name of the member identifier.                                                                                                             |
| CAK name          | Name of the Connectivity Association Key (CAK).<br>The CAK is configured using the <b>cak</b> keyword when configuring the pre-shared key. |
| Transmit interval | The transmit interval.                                                                                                                     |
| Outbound SCI      | Name of the outbound secure channel identifier.                                                                                            |
| Message number    | Number of the last data message.                                                                                                           |
| Key number        | Key number.                                                                                                                                |

Table 74: show security mka sessions Output Fields (continued)

| Field Name           | Field Description                                                                                                                                        |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Key server           | Key server status.<br><br>The switch is the key server when this output is <b>yes</b> . The switch is not the key server when this output is <b>no</b> . |
| Key server priority  | The key server priority.<br><br>The key server priority can be set using the <b>key-server-priority</b> statement.                                       |
| Latest SAK AN        | Name of the latest secure association key (SAK) association number.                                                                                      |
| Latest SAK KI        | Name of the latest secure association key (SAK) key identifier.                                                                                          |
| Fields for Peer list |                                                                                                                                                          |
| Member identifier    | Name of the member identifier.                                                                                                                           |
| Hold time            | Hold time, in seconds.                                                                                                                                   |
| Message number       | Number of the last data message                                                                                                                          |
| SCI                  | Name of the secure channel identifier.                                                                                                                   |
| Lowest acceptable PN | Number of the lowest acceptable packet number (PN).                                                                                                      |

## Sample Output

### show security mka sessions

```
user@host> show security mka sessions
```

```
Interface name: xe-0/1/0
Member identifier: OCCBEE42F8778300F8D0C1DC
CAK name: 1234567890
Transmit interval: 2000(ms)
Outbound SCI: 2C:6B:F5:9D:4B:1B/1
Message number: 1526465 Key number: 0
Key server: no Key server priority: 15
Latest SAK AN: 0 Latest SAK KI: 4F18CE25228178FD15976E4C/1
Previous SAK AN: 0 Previous SAK KI: 000000000000000000000000/0
Peer list
1. Member identifier: 4F18CE25228178FD15976E4C (live)
 Message number: 1526484 Hold time: 14500 (ms)
 SCI: 2C:6B:F5:9D:3A:1B/1
 Lowest acceptable PN: 121198
```

## show security mka sessions (MX Series)

|                                 |                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security mka sessions<br><interface <i>interface-name</i> >                                                                                                                                                                                           |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers. Support for MPC7E-10G introduced in Junos OS Release 16.1R1 for MX240, MX480, and MX960 routers.                                                                          |
| <b>Description</b>              | Display MACsec Key Agreement (MKA) session information for all interfaces. The MKA protocol is responsible for maintaining MACsec on the link, and decides which router on the point-to-point link becomes the key server.                                 |
| <b>Options</b>                  | <ul style="list-style-type: none"> <li>• <b>interface <i>interface-name</i></b>—(Optional) Display the MKA session information for the specified interface only.</li> <li>• <b>none</b>—Display the MKA session information for all interfaces.</li> </ul> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show security mka sessions on page 1228</a><br><a href="#">show security mka sessions (MX480 with MPC7E-10G) on page 1228</a><br><a href="#">show security mka sessions (MX480 with MPC7E-10G) on page 1229</a>                                |
| <b>Output Fields</b>            | Table 74 on page 1225 lists the output fields for the <b>show security mka sessions</b> command. Output fields are listed in the approximate order in which they appear.                                                                                   |

Table 75: show security mka sessions Output Fields

| Field Name        | Field Description                                                                                                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interface name    | Name of the interface.                                                                                                                                                               |
| Member identifier | Name of the member identifier.                                                                                                                                                       |
| CAK name          | Name of the connectivity association key (CAK). The CAK is configured using the <b>cak</b> keyword when configuring the pre-shared key.                                              |
| Transmit interval | The transmit interval. Both ends of the point-to-point link should be configured to the same value. Default value is 2000 seconds. Possible values: 2000 through 10000 milliseconds. |
| Outbound SCI      | Name of the outbound secure channel identifier.                                                                                                                                      |
| Message number    | Number of the last data message.                                                                                                                                                     |
| Key number        | Key number.                                                                                                                                                                          |

Table 75: show security mka sessions Output Fields (continued)

| Field Name           | Field Description                                                                                                                                                                 |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Key server           | Key server status.<br><br>The router is the key server when this output is <b>yes</b> . The router is not the key server when this output is <b>no</b> .                          |
| Key server priority  | Displays the priority of the key server. Lower value indicates higher priority. Use the <b>key-server-priority</b> statement to set the priority. Possible values: 0 through 255. |
| Latest SAK AN        | Name of the latest secure association key (SAK) association number.                                                                                                               |
| Latest SAK KI        | Name of the latest secure association key (SAK) key identifier.                                                                                                                   |
| Fields for Peer list |                                                                                                                                                                                   |
| Member identifier    | Name of the member identifier.                                                                                                                                                    |
| Hold time            | Hold time, in seconds.                                                                                                                                                            |
| Message number       | Number of the last data message                                                                                                                                                   |
| SCI                  | Name of the secure channel identifier.                                                                                                                                            |
| Lowest acceptable PN | Number of the lowest acceptable packet number (PN).                                                                                                                               |

## Sample Output

### show security mka sessions

```

user@host> show security mka sessions

Interface name: xe-0/1/0
 Member identifier: 0CCBEE42F8778300F8D0C1DC
 CAK name: 1234567890
 Transmit interval: 2000(ms)
 Outbound SCI: 2C:6B:F5:9D:4B:1B/1
 Message number: 1526465 Key number: 0
 Key server: no Key server priority: 15
 Latest SAK AN: 0 Latest SAK KI: 4F18CE25228178FD15976E4C/1
 Previous SAK AN: 0 Previous SAK KI: 000000000000000000000000/0
 Peer list
 1. Member identifier: 4F18CE25228178FD15976E4C (live)
 Message number: 1526484 Hold time: 14500 (ms)
 SCI: 2C:6B:F5:9D:3A:1B/1
 Lowest acceptable PN: 121198

```

### show security mka sessions (MX480 with MPC7E-10G)

```

user@host> show security mka sessions
Interface name: xe-4/0/18
 Member identifier: FA606FD4A4C2172F0C9D9C1F
 CAK name: ABCDEF
 Transmit interval: 2000(ms)

```

```

Outbound SCI: 54:1E:56:B4:0D:3A/1
Message number: 72455 Key number: 0
Key server: no Key server priority: 16
Latest SAK AN: 1 Latest SAK KI: 88EC3950C7D598623A406AC8/2
Previous SAK AN: 0 Previous SAK KI: 0000000000000000000000/0
Peer list
1. Member identifier: 88EC3950C7D598623A406AC8 (live)
 Message number: 72552 Hold time: 4500 (ms)
 SCI: 54:1E:56:B3:CA:A7/1
 Lowest acceptable PN: 0

```

#### show security mka sessions (MX480 with MPC7E-10G)

```

user@host> show security mka sessions interface xe-1/0/7
Member identifier: 653D8911B42DAE946993B40F
 CAK name: 1111
 Transmit interval: 2000(ms)
 Outbound SCI: 54:1E:56:B3:CA:9C/1
 Message number: 179139 Key number: 0
 Key server: no Key server priority: 16
 Latest SAK AN: 0 Latest SAK KI: 64EF352178BD1833600338F9/1
 Previous SAK AN: 0 Previous SAK KI: 0000000000000000000000/0
 Peer list
1. Member identifier: 64EF352178BD1833600338F9 (live)
 Message number: 179175 Hold time: 4500 (ms)
 SCI: 54:1E:56:B4:0D:2F/1
 Lowest acceptable PN: 0

```

## show security mka statistics

|                                 |                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security mka statistics<br><interface <i>interface-name</i> >                                                                                                                                                                                     |
| <b>Release Information</b>      | Command introduced in Junos OS Release 13.2X50-D15 for EX Series switches.                                                                                                                                                                             |
| <b>Description</b>              | Display MACsec Key Agreement (MKA) protocol statistics.<br><br>The output for this command does not include statistics for MACsec data traffic. For MACsec data traffic statistics, see <a href="#">show security macsec statistics</a> .              |
| <b>Options</b>                  | <ul style="list-style-type: none"> <li><b>interface <i>interface-name</i></b>—(Optional) Display the MKA information for the specified interface only.</li> </ul>                                                                                      |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">show security mka sessions on page 1225</a></li> <li><a href="#">show security macsec statistics on page 1220</a></li> <li><a href="#">show security macsec connections on page 1071</a></li> </ul> |
| <b>List of Sample Output</b>    | <a href="#">show security mka statistics on page 1231</a>                                                                                                                                                                                              |
| <b>Output Fields</b>            | Table 76 on page 1230 lists the output fields for the <b>show security mka statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                             |

Table 76: show security mka statistics Output Fields

| Field Name               | Field Description                                                                                                                                                                                                                                                                                           |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Received packets         | <p>Number of received MKA control packets.</p> <p>This counter increments for received MKA control packets only. This counter does not increment when data packets are received.</p>                                                                                                                        |
| Transmitted packets      | <p>Number of transmitted MKA packets</p> <p>This counter increments for transmitted MKA control packets only. This counter does not increment when data packets are transmitted.</p>                                                                                                                        |
| Version mismatch packets | Number of version mismatch packets.                                                                                                                                                                                                                                                                         |
| CAK mismatch packets     | <p>Number of Connectivity Association Key (CAK) mismatch packets.</p> <p>This counter increments when the connectivity association key (CAK) and connectivity association key name (CKN), which are user-configured values that have to match to enable MACsec, do not match for an MKA control packet.</p> |



Table 76: show security mka statistics Output Fields (continued)

| Field Name                           | Field Description                                                                                                                                                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ICV mismatch packets                 | Number of ICV mismatched packets.<br><br>This counter increments when the connectivity association key (CAK) value does not match on both ends of a MACsec-secured Ethernet link. |
| Duplicate message identifier packets | Number of duplicate message identifier packets.                                                                                                                                   |
| Duplicate message number packets     | Number of duplicate message number packets.                                                                                                                                       |
| Duplicate address packets            | Number of duplicate source MAC address packets.                                                                                                                                   |
| Invalid destination address packets  | Number of invalid destination MAC address packets.                                                                                                                                |
| Formatting error packets             | Number of formatting error packets.                                                                                                                                               |
| Old Replayed message number packets  | Number of old replayed message number packets.                                                                                                                                    |

## Sample Output

### show security mka statistics

```

user@host> show security mka statistics

Received packets: 1525844
Transmitted packets: 1525841
Version mismatch packets: 0
CAK mismatch packets: 0
ICV mismatch packets: 0
Duplicate message identifier packets: 0
Duplicate message number packets: 0
Duplicate address packets: 0
Invalid destination address packets: 0
Formatting error packets: 0
Old Replayed message number packets: 0

```

## show security mka sessions (MX Series)

|                                 |                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security mka sessions<br><interface <i>interface-name</i> >                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 15.1 for MX240, MX480, and MX960 routers. Support for MPC7E-10G introduced in Junos OS Release 16.1R1 for MX240, MX480, and MX960 routers.                                                                      |
| <b>Description</b>              | Display MACsec Key Agreement (MKA) session information for all interfaces. The MKA protocol is responsible for maintaining MACsec on the link, and decides which router on the point-to-point link becomes the key server.                             |
| <b>Options</b>                  | <ul style="list-style-type: none"> <li><b>interface <i>interface-name</i></b>—(Optional) Display the MKA session information for the specified interface only.</li> <li><b>none</b>—Display the MKA session information for all interfaces.</li> </ul> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                   |
| <b>List of Sample Output</b>    | <a href="#">show security mka sessions on page 1233</a><br><a href="#">show security mka sessions (MX480 with MPC7E-10G) on page 1233</a><br><a href="#">show security mka sessions (MX480 with MPC7E-10G) on page 1234</a>                            |
| <b>Output Fields</b>            | Table 74 on page 1225 lists the output fields for the <b>show security mka sessions</b> command. Output fields are listed in the approximate order in which they appear.                                                                               |

Table 77: show security mka sessions Output Fields

| Field Name        | Field Description                                                                                                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interface name    | Name of the interface.                                                                                                                                                               |
| Member identifier | Name of the member identifier.                                                                                                                                                       |
| CAK name          | Name of the connectivity association key (CAK). The CAK is configured using the <b>cak</b> keyword when configuring the pre-shared key.                                              |
| Transmit interval | The transmit interval. Both ends of the point-to-point link should be configured to the same value. Default value is 2000 seconds. Possible values: 2000 through 10000 milliseconds. |
| Outbound SCI      | Name of the outbound secure channel identifier.                                                                                                                                      |
| Message number    | Number of the last data message.                                                                                                                                                     |
| Key number        | Key number.                                                                                                                                                                          |

Table 77: show security mka sessions Output Fields (continued)

| Field Name           | Field Description                                                                                                                                                                 |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Key server           | Key server status.<br><br>The router is the key server when this output is <b>yes</b> . The router is not the key server when this output is <b>no</b> .                          |
| Key server priority  | Displays the priority of the key server. Lower value indicates higher priority. Use the <b>key-server-priority</b> statement to set the priority. Possible values: 0 through 255. |
| Latest SAK AN        | Name of the latest secure association key (SAK) association number.                                                                                                               |
| Latest SAK KI        | Name of the latest secure association key (SAK) key identifier.                                                                                                                   |
| Fields for Peer list |                                                                                                                                                                                   |
| Member identifier    | Name of the member identifier.                                                                                                                                                    |
| Hold time            | Hold time, in seconds.                                                                                                                                                            |
| Message number       | Number of the last data message                                                                                                                                                   |
| SCI                  | Name of the secure channel identifier.                                                                                                                                            |
| Lowest acceptable PN | Number of the lowest acceptable packet number (PN).                                                                                                                               |

## Sample Output

### show security mka sessions

```

user@host> show security mka sessions

Interface name: xe-0/1/0
Member identifier: 0CCBEE42F8778300F8D0C1DC
CAK name: 1234567890
Transmit interval: 2000(ms)
Outbound SCI: 2C:6B:F5:9D:4B:1B/1
Message number: 1526465 Key number: 0
Key server: no Key server priority: 15
Latest SAK AN: 0 Latest SAK KI: 4F18CE25228178FD15976E4C/1
Previous SAK AN: 0 Previous SAK KI: 000000000000000000000000/0
Peer list
1. Member identifier: 4F18CE25228178FD15976E4C (live)
 Message number: 1526484 Hold time: 14500 (ms)
 SCI: 2C:6B:F5:9D:3A:1B/1
 Lowest acceptable PN: 121198

```

### show security mka sessions (MX480 with MPC7E-10G)

```

user@host> show security mka sessions
Interface name: xe-4/0/18
Member identifier: FA606FD4A4C2172F0C9D9C1F
CAK name: ABCDEF
Transmit interval: 2000(ms)

```

```
Outbound SCI: 54:1E:56:B4:0D:3A/1
Message number: 72455 Key number: 0
Key server: no Key server priority: 16
Latest SAK AN: 1 Latest SAK KI: 88EC3950C7D598623A406AC8/2
Previous SAK AN: 0 Previous SAK KI: 00000000000000000000/0
Peer list
 1. Member identifier: 88EC3950C7D598623A406AC8 (live)
 Message number: 72552 Hold time: 4500 (ms)
 SCI: 54:1E:56:B3:CA:A7/1
 Lowest acceptable PN: 0
```

#### show security mka sessions (MX480 with MPC7E-10G)

```
user@host> show security mka sessions interface xe-1/0/7
Member identifier: 653D8911B42DAE946993B40F
 CAK name: 1111
 Transmit interval: 2000(ms)
 Outbound SCI: 54:1E:56:B3:CA:9C/1
 Message number: 179139 Key number: 0
 Key server: no Key server priority: 16
 Latest SAK AN: 0 Latest SAK KI: 64EF352178BD1833600338F9/1
 Previous SAK AN: 0 Previous SAK KI: 00000000000000000000/0
 Peer list
 1. Member identifier: 64EF352178BD1833600338F9 (live)
 Message number: 179175 Hold time: 4500 (ms)
 SCI: 54:1E:56:B4:0D:2F/1
 Lowest acceptable PN: 0
```

## show security pki ca-certificate

|                                 |                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security pki ca-certificate<br><brief   detail><br><ca-profile <i>ca-profile-name</i> >                                                                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Display information about certificate authority (CA) digital certificates installed in the router.                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>none</b>—(Same as brief) Display information about all CA digital certificates.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>ca-profile <i>ca-profile-name</i></b>—(Optional) Display information about only the specified CA profile.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>    | <a href="#">show security pki ca-certificate on page 1236</a><br><a href="#">show security pki ca-certificate detail on page 1237</a>                                                                                                                                                        |
| <b>Output Fields</b>            | Table 78 on page 1235 lists the output fields for the <b>show security pki ca-certificate</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                               |

Table 78: show security pki ca-certificate Output Fields

| Field Name                    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Level of Output   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Certificate identifier</b> | Name of the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                                    | All levels        |
| <b>Certificate version</b>    | Revision number of the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail</b>     |
| <b>Serial number</b>          | Unique serial number of the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>detail</b>     |
| <b>Issued by</b>              | Authority that issued the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>none brief</b> |
| <b>Issued to</b>              | Device that was issued the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>none brief</b> |
| <b>Issuer</b>                 | <p>Authority that issued the digital certificate, including details of the authority organized using the distinguished name format. Possible subfields are:</p> <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul> | <b>detail</b>     |

Table 78: show security pki ca-certificate Output Fields (continued)

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                    | Level of Output |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Subject</b>              | Details of the digital certificate holder organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the requestor.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul> | <b>detail</b>   |
| <b>Validity</b>             | Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Start time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul>                                                                                                                                                       | All levels      |
| <b>Public key algorithm</b> | Encryption algorithm used with the private key, such as <b>rsaEncryption(1024 bits)</b> .                                                                                                                                                                                                                                                                                                                                            | All levels      |
| <b>Signature algorithm</b>  | Encryption algorithm that the CA used to sign the digital certificate, such as <b>sha1WithRSAEncryption</b> .                                                                                                                                                                                                                                                                                                                        | <b>detail</b>   |
| <b>Fingerprint</b>          | Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.                                                                                                                                                                                                                                                                                                                             | <b>detail</b>   |
| <b>Distribution CRL</b>     | Distinguished name information and the URL for the certificate revocation list (CRL) server.                                                                                                                                                                                                                                                                                                                                         | <b>detail</b>   |
| <b>Use for key</b>          | Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .                                                                                                                                                                                                                                                                                             | <b>detail</b>   |

## Sample Output

### show security pki ca-certificate

```

user@host> show security pki ca-certificate
Certificate identifier: abc
 Issued to: example, Issued by: example
 Validity:
 Not before: 2005 Oct 18th, 23:54:22 GMT
 Not after: 2025 Oct 19th, 00:24:22 GMT
 Public key algorithm: rsaEncryption(1024 bits)

Certificate identifier: entrust
 Issued to: First Officer, Issued by: example
 Validity:
 Not before: 2005 Oct 18th, 23:55:59 GMT
 Not after: 2008 Oct 19th, 00:25:59 GMT
 Public key algorithm: rsaEncryption(1024 bits)

Certificate identifier:abe
 Issued to: First Officer, Issued by: example
 Validity:

```

```

Not before: 2005 Oct 18th, 23:55:59 GMT
Not after: 2008 Oct 19th, 00:25:59 GMT
Public key algorithm: rsaEncryption(1024 bits)

```

### show security pki ca-certificate detail

```

user@host> show security pki ca-certificate detail
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 9235
Issuer:
 Organization: example, Country: us
Subject:
 Organization: example, Country: us
Validity:
 Not before: 2005 Oct 18th, 23:54:22 GMT
 Not after: 2025 Oct 19th, 00:24:22 GMT
Public key algorithm: rsaEncryption(1024 bits)
cb:9e:2d:c0:70:f8:ea:3c:f2:b5:f0:02:48:87:dc:68:99:a3:57:4f
0e:b9:98:0b:95:47:0d:1f:97:7c:53:17:dd:1a:f8:da:e5:08:d1:1c
78:68:1f:2f:72:9f:a2:cf:81:e3:ce:c5:56:89:ce:f0:97:93:fa:36
19:3e:18:7d:8c:9d:21:fe:1f:c3:87:8d:b3:5d:f3:03:66:9d:16:a7
bf:18:3f:f0:7a:80:f0:62:50:43:83:4f:0e:d7:c6:42:48:c0:8a:b2
c7:46:30:38:df:9b:dc:bc:b5:08:7a:f3:cd:64:db:2b:71:67:fe:d8
04:47:08:07:de:17:23:13
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
 00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10 (sha1)
 71:6f:6a:76:17:9b:d6:2a:e7:5a:72:97:82:6d:26:86 (md5)
Distribution CRL:
 C=us, O=example, CN=CRL1
 http://CA-1/CRL/example_us_crlfile.crl
Use for key: CRL signing, Certificate signing
Certificate identifier: entrust
Certificate version: 3
Serial number: 4355 925c
Issuer:
 Organization: example, Country: us
Subject:
 Organization: example, Country: us, Common name: First Officer
Validity:
 Not before: 2005 Oct 18th, 23:55:59 GMT
 Not after: 2008 Oct 19th, 00:25:59 GMT
Public key algorithm: rsaEncryption(1024 bits)
c0:a4:21:32:95:0a:cd:ec:12:03:d1:a2:89:71:8e:ce:4e:a6:f9:2f
1a:9a:13:8c:f6:a0:3d:c9:bd:9d:c2:a0:41:77:99:1b:1e:ed:5b:80
34:46:f8:5b:28:34:38:2e:91:7d:4e:ad:14:86:78:67:e7:02:1d:2e
19:11:b7:fa:0d:ba:64:20:e1:28:4e:3e:bb:6e:64:dc:cd:b1:b4:7a
ca:8f:47:dd:40:69:c2:35:95:ce:b8:85:56:d7:0f:2d:04:4d:5d:d8
42:e1:4f:6b:bf:38:c0:45:1e:9e:f0:b4:7f:74:6f:e9:70:fd:4a:78
da:eb:10:27:bd:46:34:33
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
 bc:78:87:9b:a7:91:13:20:71:db:ac:b5:56:71:42:ad:1a:b6:46:17 (sha1)
 23:79:40:c9:6d:a6:f0:ca:e0:13:30:d4:29:6f:86:79 (md5)
Distribution CRL:
 C=us, O=example, CN=CRL1
 http://CA-1/CRL/example_us_crlfile.crl
Use for key: Key encipherment
Certificate identifier: entrust
Certificate version: 3

```

Serial number: 4355 925b  
Issuer:  
    Organization: example, Country: us  
Subject:  
    Organization: example, Country: us, Common name: First Officer  
Validity:  
    Not before: 2005 Oct 18th, 23:55:59 GMT  
    Not after: 2008 Oct 19th, 00:25:59 GMT  
Public key algorithm: rsaEncryption(1024 bits)  
    ea:75:c4:f3:58:08:ea:65:5c:7e:b3:de:63:0a:cf:cf:ec:9a:82:e2  
    d7:e8:b9:2f:bd:4b:cd:86:2f:f1:dd:d8:a2:95:af:ab:51:a5:49:4e  
    00:10:c6:25:ff:b5:49:6a:99:64:74:69:e5:8c:23:5b:b4:70:62:8e  
    e4:f9:a2:28:d4:54:e2:0b:1f:50:a2:92:cf:6c:8f:ae:10:d4:69:3c  
    90:e2:1f:04:ea:ac:05:9b:3a:93:74:d0:59:24:e9:d2:9d:c2:ef:22  
    b9:32:c7:2c:29:4f:91:cb:5a:26:fe:1d:c0:36:dc:f4:9c:8b:f5:26  
    af:44:bf:53:aa:d4:5f:67  
Signature algorithm: sha1WithRSAEncryption  
Fingerprint:  
    46:71:15:34:f0:a6:41:76:65:81:33:4f:68:47:c4:df:78:b8:e3:3f (sha1)  
    ee:cc:c7:f4:5d:ac:65:33:0a:55:db:59:72:2c:dd:16 (md5)  
Distribution CRL:  
    C=us, O=example, CN=CRL1  
    http://CA-1/CRL/example\_us\_crlfile.crl  
Use for key: Digital signature



## show security pki certificate-request

|                                 |                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security pki certificate-request<br><brief   detail><br><certificate-id <i>certificate-id-name</i> >                                                                                                                                                                                                                             |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Display information about manually generated local digital certificate requests that are stored in the router.                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b>none</b>—(same as brief) Display information about all local digital certificate requests.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—(Optional) Display information about only the specified local digital certificate request</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear security pki certificate-request on page 1050</a></li> </ul>                                                                                                                                                                                                               |
| <b>List of Sample Output</b>    | <a href="#">show security pki certificate-request on page 1240</a><br><a href="#">show security pki certificate-request detail on page 1240</a>                                                                                                                                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 79 on page 1239</a> lists the output fields for the <b>show security pki certificate-request</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                   |

*Table 79: show security pki certificate-request Output Fields*

| Field Name                    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                           | Level of Output   |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Certificate identifier</b> | Name of the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                            | All levels        |
| <b>Certificate version</b>    | Revision number of the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                 | <b>detail</b>     |
| <b>Issued to</b>              | Device that was issued the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                             | <b>none brief</b> |
| <b>Subject</b>                | <p>Details of the digital certificate holder organized using the distinguished name format. Possible subfields are:</p> <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul> | <b>detail</b>     |

Table 79: show security pki certificate-request Output Fields (continued)

| Field Name                            | Field Description                                                                                                                                                                                                                                                        | Level of Output |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Alternate subject</b>              | Domain name or IP address of the device related to the digital certificate.                                                                                                                                                                                              | <b>detail</b>   |
| <b>Validity</b>                       | Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul> | All levels      |
| <b>Public key algorithm</b>           | Encryption algorithm used with the private key, such as <b>rsaEncryption(1024 bits)</b> .                                                                                                                                                                                | All levels      |
| <b>Public key verification status</b> | Public key verification status: <b>Failed</b> or <b>Passed</b> . The <b>detail</b> output also provides the verification hash.                                                                                                                                           | All levels      |
| <b>Fingerprint</b>                    | Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.                                                                                                                                                                 | <b>detail</b>   |
| <b>Use for key</b>                    | Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .                                                                                                                                 | <b>detail</b>   |

## Sample Output

### show security pki certificate-request

```

user@host> show security pki certificate-request
Certificate identifier: local-microsoft-2
Issued to: router2.example.com
Public key algorithm: rsaEncryption(1024 bits)
Public key verification status: Passed

```

### show security pki certificate-request detail

```

user@host> show security pki certificate-request detail
Certificate identifier: local-entrust3
Certificate version: 3
Subject:
 Common name: router3.example.com
 Alternate subject: router3.example.com
 Public key algorithm: rsaEncryption(1024 bits)
 Public key verification status: Passed
 fb:79:df:d4:a9:03:0f:d3:69:7e:c1:e4:27:35:9c:d9:b1:a2:47:78
 d2:6d:f3:e5:f4:68:4f:b3:04:45:88:57:99:82:39:a6:51:9e:5f:42
 23:3f:d7:6e:3d:a5:54:a9:b1:2d:6e:90:dd:12:8a:bf:ef:2b:20:50
 ba:f0:da:d9:0c:ad:5e:d6:c6:98:3a:ae:3f:90:dd:94:78:c1:ea:2e
 7c:f0:2d:d4:79:d4:cd:f0:52:df:5e:72:f2:e7:ae:66:f7:61:f4:bc
 72:57:3e:6c:6d:d3:24:58:8b:f4:ef:da:2a:6a:fa:eb:98:f8:34:84
 79:54:da:4f:d3:6f:52:1f
 Fingerprint:
 7c:e8:f9:45:93:8d:a3:92:7f:18:29:02:f1:c8:e2:85:3d:ad:df:1f (sha1)
 00:4e:df:a0:6b:ad:8c:50:da:7c:a1:cf:5d:37:b0:ea (md5)
 Use for key: Digital signature

```

## show security pki crt

|                                 |                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security pki crt<br><brief   detail><br><ca-profile <i>ca-profile-name</i> >                                                                                                                                                                                             |
| <b>Release Information</b>      | Command introduced in Junos OS Release 8.1.                                                                                                                                                                                                                                   |
| <b>Description</b>              | Display information about the certificate revocation lists (CRLs) that are stored in the router.                                                                                                                                                                              |
| <b>Options</b>                  | <p><b>none</b>—(same as brief) Display information about all CRLs.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>ca-profile <i>ca-profile-name</i></b>—(Optional) Display CRL information about only the specified CA profile.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear security pki crt on page 1076</a></li> </ul>                                                                                                                                                                       |
| <b>List of Sample Output</b>    | <a href="#">show security pki crt on page 1242</a><br><a href="#">show security pki crt detail on page 1242</a>                                                                                                                                                               |
| <b>Output Fields</b>            | <p><a href="#">Table 80 on page 1241</a> shows the output fields for the <b>show security pki crt</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                    |

*Table 80: show security pki crt Output Fields*

| Field Name  | Field Description                                       | Level of Output |
|-------------|---------------------------------------------------------|-----------------|
| CA profile  | Name of the configured CA profile.                      | All levels      |
| CRL version | Revision number of the certificate revocation list.     | All levels      |
| CRL number  | Number of the certificate revocation list               | All levels      |
| CRL Issuer  | Device that was issued the certificate revocation list. | All levels      |

Table 80: show security pki crl Output Fields (continued)

| Field Name             | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                    | Level of Output |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Issuer</b>          | Details of the digital certificate holder organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul> | <b>detail</b>   |
| <b>Effective date</b>  | Date and time the certificate revocation list becomes valid.                                                                                                                                                                                                                                                                                                                                                                         | All levels      |
| <b>Next update</b>     | Date and time the router will download the latest version of the certificate revocation list.                                                                                                                                                                                                                                                                                                                                        | All levels      |
| <b>Revocation List</b> | List of digital certificates that have been revoked before their expiration date. Values are: <ul style="list-style-type: none"> <li>• <b>Serial number</b>—Unique serial number of the digital certificate</li> <li>• <b>Revocation date</b>—Date and time that the digital certificate was revoked.</li> </ul>                                                                                                                     | <b>detail</b>   |

## Sample Output

### show security pki crl

```

user@host> show security pki crl
CA profile entrust
CRL version: V2
CRL number: 24
CRL issuer: C=CA, O=juniper
Effective date: 2006 May 31st, 05:35:25 GMT
Next update: 2006 Jun 1st, 06:35:25 GMT

```

### show security pki crl detail

```

user@host> show security pki crl detail
CA profile: entrust
CRL version: V2
CRL number: 24
Issuer:
Organization: juniper, Country: ca
Validity:
Effective date: 2006 May 31st, 05:35:25 GMT
Next update: 2006 Jun 1st, 06:35:25 GMT
Revocation List:
Serial number Revocation date
4451aca3 2006 May 25th, 09:13:38 GMT
4451aca4 2006 May 25th, 10:11:33 GMT
4451acb4 2006 May 29th, 11:28:54 GMT
4451aceb 2006 May 29th, 11:29:01 GMT
4451acfe 2006 May 29th, 11:29:17 GMT
4451acff 2006 May 31st, 05:29:55 GMT

```



## show security pki local-certificate

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show security pki local-certificate<br><brief   detail><br><certificate-id <i>certificate-id-name</i> ><br><system-generated>                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Display information about the local digital certificates and the corresponding public keys installed in the router.                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p><b>none</b>—(same as brief) Display information about all local digital certificates and corresponding public keys.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>certificate-id <i>certificate-id-name</i></b>—(Optional) Display information about only the specified the local digital certificate and corresponding public keys.</p> <p><b>system-generated</b>—(Optional) Auto-generated self-signed certificate.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">clear security pki local-certificate on page 1078</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>    | <a href="#">show security pki local-certificate on page 1245</a><br><a href="#">show security pki local-certificate detail on page 1246</a>                                                                                                                                                                                                                                                                                                                              |
| <b>Output Fields</b>            | Table 81 on page 1244 lists the output fields for the <b>show security pki local-certificate</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                        |

*Table 81: show security pki local-certificate Output Fields*

| Field Name                    | Field Description                                | Level of Output   |
|-------------------------------|--------------------------------------------------|-------------------|
| <b>Certificate identifier</b> | Name of the digital certificate.                 | All levels        |
| <b>Certificate version</b>    | Revision number of the digital certificate.      | <b>detail</b>     |
| <b>Serial number</b>          | Unique serial number of the digital certificate. | <b>detail</b>     |
| <b>Issued by</b>              | Authority that issued the digital certificate.   | <b>none brief</b> |
| <b>Issued to</b>              | Device that was issued the digital certificate.  | <b>none brief</b> |

Table 81: *show security pki local-certificate* Output Fields (continued)

| Field Name                            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Level of Output |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Issuer</b>                         | Authority that issued the digital certificate, including details of the authority organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul> | <b>detail</b>   |
| <b>Subject</b>                        | Details of the digital certificate holder organized using the distinguished name format. Possible subfields are: <ul style="list-style-type: none"> <li>• <b>Common name</b>—Name of the authority.</li> <li>• <b>Organization</b>—Organization of origin.</li> <li>• <b>Organizational unit</b>—Department within an organization.</li> <li>• <b>State</b>—State of origin.</li> <li>• <b>Country</b>—Country of origin.</li> </ul>                                         | <b>detail</b>   |
| <b>Alternate subject</b>              | Domain name or IP address of the device related to the digital certificate.                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Validity</b>                       | Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Start time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul>                                                                                                                                                                                               | All levels      |
| <b>Public key algorithm</b>           | Encryption algorithm used with the private key, such as <b>rsaEncryption (1024 bits)</b> .                                                                                                                                                                                                                                                                                                                                                                                   | All levels      |
| <b>Public key verification status</b> | Public key verification status: <b>Failed</b> or <b>Passed</b> . The <b>detail</b> output also provides the verification hash.                                                                                                                                                                                                                                                                                                                                               | All levels      |
| <b>Signature algorithm</b>            | Encryption algorithm that the CA used to sign the digital certificate, such as <b>sha1WithRSAEncryption</b> .                                                                                                                                                                                                                                                                                                                                                                | <b>detail</b>   |
| <b>Fingerprint</b>                    | Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.                                                                                                                                                                                                                                                                                                                                                                     | <b>detail</b>   |
| <b>Distribution CRL</b>               | Distinguished name information and URL for the certificate revocation list (CRL) server.                                                                                                                                                                                                                                                                                                                                                                                     | <b>detail</b>   |
| <b>Use for key</b>                    | Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .                                                                                                                                                                                                                                                                                                                                     | <b>detail</b>   |

## Sample Output

### show security pki local-certificate

```
user@host> show security pki local-certificate
```

```
Certificate identifier: local-entrust2
Issued to: router2.example.com, Issued by: juniper
Validity:
 Not before: 2005 Nov 21st, 23:28:22 GMT
 Not after: 2008 Nov 21st, 23:58:22 GMT
Public key algorithm: rsaEncryption(1024 bits)
Public key verification status: Passed
```

#### show security pki local-certificate detail

```
user@host> show security pki local-certificate detail
Certificate identifier: local-entrust3
Certificate version: 3
Serial number: 4355 94f9
Issuer:
 Organization: juniper, Country: us
Subject:
 Organization: juniper, Country: us, Common name: router3.example.com
Alternate subject: router3.example.com
Validity:
 Not before: 2005 Nov 21st, 23:33:58 GMT
 Not after: 2008 Nov 22nd, 00:03:58 GMT
Public key algorithm: rsaEncryption(1024 bits)
Public key verification status: Passed
fb:79:df:d4:a9:03:0f:d3:69:7e:c1:e4:27:35:9c:d9:b1:a2:47:78
d2:6d:f3:e5:f4:68:4f:b3:04:45:88:57:99:82:39:a6:51:9e:5f:42
23:3f:d7:6e:3d:a5:54:a9:b1:2d:6e:90:dd:12:8a:bf:ef:2b:20:50
ba:f0:da:d9:0c:ad:5e:d6:c6:98:3a:ae:3f:90:dd:94:78:c1:ea:2e
7c:f0:2d:d4:79:d4:cd:f0:52:df:5e:72:f2:e7:ae:66:f7:61:f4:bc
72:57:3e:6c:6d:d3:24:58:8b:f4:ef:da:2a:6a:fa:eb:98:f8:34:84
79:54:da:4f:d3:6f:52:1f
Signature algorithm: sha1WithRSAEncryption
Fingerprint:
 61:3a:d0:b4:7a:16:9b:39:ba:81:3f:9d:ab:34:e5:c8:be:3b:a1:6d (sha1)
 60:a0:ff:58:05:4a:65:73:9d:74:3a:e1:83:6f:1b:c8 (md5)
Distribution CRL:
 C=us, O=juniper, CN=CRL1
 http://CA-1/CRL/juniper_us_crlfile.crl
Use for key: Digital signature
```



## show services ipsec-vpn certificates

|                                 |                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show services ipsec-vpn certificates<br><brief   detail><br><service-set <i>service-set</i> >                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Command introduced in Junos OS Release 7.5.                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | (Adaptive services interfaces only) Display local and remote certificates installed in the IPsec configuration memory cache that are used for the IKE negotiation.                                                                                                                                                                                                          |
| <b>Options</b>                  | <p><b>none</b>—(same as brief) Display information about local and remote certificates associated with all service sets.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>service-set <i>service-set</i></b>—(Optional) Display information about local and remote certificates associated with only the specified service set.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>    | <a href="#">show services ipsec-vpn certificates on page 1248</a><br><a href="#">show security ipsec-vpn certificates detail on page 1249</a>                                                                                                                                                                                                                               |
| <b>Output Fields</b>            | Table 82 on page 1247 lists the output fields for the <b>show services ipsec-vpn certificates</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                          |

Table 82: show services ipsec-vpn certificates Output Fields

| Field Name                     | Field Description                                                                                               | Level of Output   |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Service set</b>             | Name of the IPsec service set.                                                                                  | All levels        |
| <b>Total entries</b>           | Number of certificate cache entries.                                                                            | All levels        |
| <b>Certificate cache entry</b> | Identification number of the certificate cache entry.                                                           | All levels        |
| <b>Flags</b>                   | Information about the digital certificate, including whether the certificate is a root certificate and trusted. | none <b>brief</b> |
| <b>Issued to</b>               | Device that was issued the digital certificate.                                                                 | none <b>brief</b> |
| <b>Issued by</b>               | Authority that issued the digital certificate.                                                                  | none <b>brief</b> |
| <b>Certificate version</b>     | Revision number of the digital certificate.                                                                     | <b>detail</b>     |
| <b>Serial number</b>           | Unique serial number of the digital certificate.                                                                | <b>detail</b>     |

Table 82: show services ipsec-vpn certificates Output Fields (continued)

| Field Name                  | Field Description                                                                                                                                                                                                                                                              | Level of Output   |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Alternate subject</b>    | Domain name or IP address of the device related to the digital certificate.                                                                                                                                                                                                    | All levels        |
| <b>Validity</b>             | Time period when the digital certificate is valid. Values are: <ul style="list-style-type: none"> <li>• <b>Not before</b>—Start time when the digital certificate becomes valid.</li> <li>• <b>Not after</b>—End time when the digital certificate becomes invalid.</li> </ul> | none <b>brief</b> |
| <b>Public key algorithm</b> | Specifies the encryption algorithm used with the private key, such as <b>rsaEncryption (1024 bits)</b> .                                                                                                                                                                       | <b>detail</b>     |
| <b>Signature algorithm</b>  | Encryption algorithm that the CA used to sign the digital certificate, such as <b>sha1WithRSAEncryption</b> .                                                                                                                                                                  | <b>detail</b>     |
| <b>Fingerprint</b>          | Secure Hash Algorithm (SHA1) and Message Digest 5 (MD5) hashes used to identify the digital certificate.                                                                                                                                                                       | <b>detail</b>     |
| <b>Distribution CRL</b>     | Distinguished name information and the URL for the certificate revocation list (CRL) server.                                                                                                                                                                                   | <b>detail</b>     |
| <b>Use for key</b>          | Use of the public key, such as <b>Certificate signing</b> , <b>CRL signing</b> , <b>Digital signature</b> , or <b>Key encipherment</b> .                                                                                                                                       | <b>detail</b>     |

## Sample Output

### show services ipsec-vpn certificates

```

user@host> show services ipsec-vpn certificates
Service set: serviceset-dynamic-BiEspsha3des, Total entries: 3
Certificate cache entry: 3
 Flags: Non-root Trusted
 Issued to: router3.example.com, Issued by: juniper
 Alternate subject: router3.example.com
 Validity:
 Not before: 2005 Nov 21st, 23:33:58 GMT
 Not after: 2008 Nov 22nd, 00:03:58 GMT

Certificate cache entry: 2
 Flags: Non-root Trusted
 Issued to: router2.example.com, Issued by: juniper
 Alternate subject: router2.example.com
 Validity:
 Not before: 2005 Nov 21st, 23:28:22 GMT
 Not after: 2008 Nov 21st, 23:58:22 GMT

Certificate cache entry: 1
 Flags: Root Trusted
 Issued to: juniper, Issued by: juniper
 Validity:
 Not before: 2005 Oct 18th, 23:54:22 GMT
 Not after: 2025 Oct 19th, 00:24:22 GMT

```

**show security ipsec-vpn certificates detail**

```

user@host> show services ipsec-vpn certificates detail
Service set: serviceset-dynamic-BiEspsha3des, Total entries: 3
Certificate cache entry: 3
 Certificate version: 3
 Serial number: 4355 94f9
 Alternate subject: router3.example.com
 Public key algorithm: rsaEncryption
 Signature algorithm: sha1WithRSAEncryption
 Fingerprint:
 61:3a:d0:b4:7a:16:9b:39:ba:81:3f:9d:ab:34:e5:c8:be:3b:a1:6d (sha1)
 60:a0:ff:58:05:4a:65:73:9d:74:3a:e1:83:6f:1b:c8 (md5)
 Distribution CRL:
 C=us, O=juniper, CN=CRL1
 http://CA-1/CRL/juniper_us_crlfile.crl
 Use for key: Digital signature

Certificate cache entry: 2
 Certificate version: 3
 Serial number: 4355 94f8
 Alternate subject: router2.example.com
 Public key algorithm: rsaEncryption
 Signature algorithm: sha1WithRSAEncryption
 Fingerprint:
 30:c3:a4:04:da:33:9d:60:23:5a:48:75:48:2c:f0:c6:96:6c:31:fa (sha1)
 9a:a2:ce:ef:7e:10:80:a0:c8:4d:2f:e7:e1:d3:69:9d (md5)
 Distribution CRL:
 C=us, O=juniper, CN=CRL1
 http://CA-1/CRL/juniper_us_crlfile.crl
 Use for key: Digital signature

Certificate cache entry: 1
 Certificate version: 3
 Flags: Root
 Serial number: 4355 9235
 Public key algorithm: rsaEncryption
 Signature algorithm: sha1WithRSAEncryption
 Fingerprint:
 00:8e:6f:58:dd:68:bf:25:0a:e3:f9:17:70:d6:61:f3:53:a7:79:10 (sha1)
 71:6f:6a:76:17:9b:d6:2a:e7:5a:72:97:82:6d:26:86 (md5)
 Distribution CRL:
 C=us, O=juniper, CN=CRL1
 http://CA-1/CRL/juniper_us_crlfile.crl
 Use for key: CRL signing, Certificate signing

```

## show services ipsec-vpn ike security-associations

|                                 |                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show services ipsec-vpn ike security-associations<br><brief   detail><br><peer-address>                                                                                                                                                                                            |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Statistics for Internet Key Exchange (IKE) security associations for each services PIC introduced in Junos OS Release 12.1.                                                                                                     |
| <b>Description</b>              | (Adaptive services interface only) Display information for Internet Key Exchange (IKE) security associations. If no security association is specified, the information for all security associations is displayed.                                                                 |
| <b>Options</b>                  | <b>none</b> —(same as brief) Display standard information for all IPsec security associations.<br><b>brief   detail</b> —(Optional) Display the specified level of output.<br><b>peer-address</b> —(Optional) Display information about a particular security association address. |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                               |
| <b>List of Sample Output</b>    | <a href="#">show services ipsec-vpn ike security-associations on page 1252</a><br><a href="#">show services ipsec-vpn ike security-associations detail on page 1253</a><br><a href="#">show services ipsec-vpn ike security-associations (on ACX500 Routers) on page 1254</a>      |
| <b>Output Fields</b>            | <a href="#">Table 83 on page 1250</a> lists the output fields for the <b>show services ipsec-vpn ike security-associations</b> command. Output fields are listed in the approximate order in which they appear.                                                                    |

*Table 83: show services ipsec-vpn ike security-associations Output Fields*

| Field Name              | Field Description                                                                                                                                                                                                                               | Level of Output |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>IKE peer</b>         | Remote end of the IKE negotiation.                                                                                                                                                                                                              | <b>detail</b>   |
| <b>Role</b>             | Part played in the IKE session. The router triggering the IKE negotiation is the initiator, and the router accepting the first IKE exchange packets is the responder.                                                                           | <b>detail</b>   |
| <b>Remote Address</b>   | Responder's address.                                                                                                                                                                                                                            | none specified  |
| <b>State</b>            | State of the IKE security association: <ul style="list-style-type: none"> <li>• <b>Matured</b>—IKE security association is established.</li> <li>• <b>Not matured</b>—The IKE security association is in the process of negotiation.</li> </ul> | none specified  |
| <b>Initiator cookie</b> | When the IKE negotiation is triggered, a random number is sent to the remote node.                                                                                                                                                              | All levels      |

Table 83: show services ipsec-vpn ike security-associations Output Fields (continued)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Level of Output |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Responder cookie</b>      | <p>The remote node generates its own random number and sends it back to the initiator as a verification that the packets were received.</p> <p>Of the numerous security services available, protection against denial of service (DoS) is one of the most difficult to address. A “cookie” or anticlogging token (ACT) is aimed at protecting the computing resources from attack without spending excessive CPU resources to determine the cookie's authenticity. An exchange prior to CPU-intensive public key operations can thwart some DoS attempts (such as simple flooding with invalid IP source addresses).</p>                                                                                                                                                                              | All levels      |
| <b>Exchange type</b>         | <p>Specifies the number of messages in an IKE exchange, and the payload types that are contained in each message. Each exchange type provides a particular set of security services, such as anonymity of the participants, perfect forward secrecy of the keying material, and authentication of the participants. Junos OS supports two types of exchanges:</p> <ul style="list-style-type: none"> <li>• <b>Main</b>—The exchange is done with six messages. <b>Main</b> encrypts the payload, protecting the identity of the neighbor.</li> <li>• <b>Aggressive</b>—The exchange is done with three messages. <b>Aggressive</b> does not encrypt the payload, leaving the identity of the neighbor unprotected.</li> <li>• <b>IKEv2</b>—The exchange is negotiated using IKE version 2.</li> </ul> | All levels      |
| <b>PIC</b>                   | The services PIC for which the IKE security associations are displayed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | All levels      |
| <b>Authentication method</b> | <p>Authentication method that determines which payloads are exchanged and when they are exchanged. Value can be ECDSA-signatures (256 bit key), ECDSA-signatures (384 bit key), Pre-shared-keys, or RSA-signatures.</p> <p><b>NOTE:</b> In Junos FIPS mode, ECDSA is not supported in Junos OS Release 17.3R1. Starting in Junos OS Release 17.4R1, ECDSA is supported in Junos FIPS mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                        | detail          |
| <b>Local</b>                 | Prefix and port number of the local end.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | detail          |
| <b>Remote</b>                | Prefix and port number of the remote end.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | detail          |
| <b>Lifetime</b>              | Number of seconds remaining until the IKE security association expires.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | detail          |
| <b>Algorithms</b>            | <p>Header for the IKE algorithms output.</p> <ul style="list-style-type: none"> <li>• <b>Authentication</b>—(detail output only) Type of authentication algorithm used: <b>md5</b> or <b>sha1</b></li> <li>• <b>Encryption</b>—(detail output only) Type of encryption algorithm used: <b>des-cbc</b>, <b>3des-cbc</b>, or <b>None</b>.</li> <li>• <b>Pseudo random function</b>—Function that generates highly unpredictable random numbers: <b>hmac-md5</b> or <b>hmac-sha1</b>.</li> </ul>                                                                                                                                                                                                                                                                                                         | detail          |

Table 83: show services ipsec-vpn ike security-associations Output Fields (continued)

| Field Name                              | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Level of Output |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Traffic statistics</b>               | <p>Number of bytes and packets received and transmitted on the IKE security association.</p> <ul style="list-style-type: none"> <li><b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the IKE security association.</li> <li><b>Input packets, Output packets</b>—Number of packets received and transmitted on the IKE security association.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>detail</b>   |
| <b>Flags</b>                            | <p>Notification to the key management process of the status of the IKE negotiation:</p> <ul style="list-style-type: none"> <li><b>caller notification sent</b>—Caller program notified about the completion of the IKE negotiation.</li> <li><b>waiting for done</b>—Negotiation is done. The library is waiting for the remote end retransmission timers to expire.</li> <li><b>waiting for remove</b>—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation.</li> <li><b>waiting for policy manager</b>—Negotiation is waiting for a response from the policy manager.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail</b>   |
| <b>IPsec security associates</b>        | <p>Number of IPsec security associations created and deleted with this IKE security association.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Phase 2 negotiations in progress</b> | <p>Number of phase 2 negotiations in progress and status information:</p> <ul style="list-style-type: none"> <li>Negotiation type—Type of phase 2 negotiation. The Junos OS currently supports <b>quick mode</b>.</li> <li>Message ID—Unique identifier for a phase 2 negotiation.</li> <li>Local identity—Identity of the local phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</i>.</li> <li>Remote identity—Identity of the remote phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</i>.</li> <li>Flags—Notification to the key management process of the status of the IKE negotiation: <ul style="list-style-type: none"> <li><b>caller notification sent</b>—Caller program notified about the completion of the IKE negotiation.</li> <li><b>waiting for done</b>—Negotiation is done. The library is waiting for the remote end retransmission timers to expire.</li> <li><b>waiting for remove</b>—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation.</li> <li><b>waiting for policy manager</b>—Negotiation is waiting for a response from the policy manager.</li> </ul> </li> </ul> | <b>detail</b>   |

## Sample Output

### show services ipsec-vpn ike security-associations

```

user@host> show services ipsec-vpn ike security-associations
Remote Address State Initiator cookie Responder cookie Exchange type

192.0.2.1 Matured 062d291d21275fc7 82ef00e3d1f1c981 Main

```

|               |         |                  |                  |       |
|---------------|---------|------------------|------------------|-------|
| 192.0.2.2     | Matured | cd6d581d7bb1664d | 88a707779f3ad8d1 | Main  |
| 192.0.2.3     | Matured | 86621051e3e78360 | 6bc5cc83fd67baa4 | IKEv2 |
| PIC: sp-0/3/0 |         |                  |                  |       |
| 192.0.2.7     | Matured | 565e2813075e6fdb | 67886757a74edcd6 | IKEv2 |

### show services ipsec-vpn ike security-associations detail

```

user@host> show services ipsec-vpn ike security-associations detail
IKE peer 198.51.100.2
 Role: Responder, State: Matured
 Initiator cookie: d91c9f20f78e1d4e, Responder cookie: 727a04ed8d5021a1
 Exchange type: IKEv2, Authentication method: Pre-shared-keys
 Local: 2013.0.113.2:500, Remote: 198.51.100:500
 Lifetime: Expires in 1357 seconds
 Algorithms:
 Authentication : sha1
 Encryption : 3des-cbc
 Pseudo random function: hmac-sha1
 Traffic statistics:
 Input bytes : 22244
 Output bytes : 22236
 Input packets: 263
 Output packets: 263
 Flags: Caller notification sent
 IPSec security associations: 0 created, 0 deleted
 Phase 2 negotiations in progress: 0

IKE peer 192.0.2.4
 Role: Initiator, State: Matured
 Initiator cookie: cf22bd81a7000001, Responder cookie: fe83795c2800002e
 Exchange type: Main, Authentication method: Pre-shared-keys
 Local: 192.0.2.5:500, Remote: 192.0.2.4:500
 Lifetime: Expires in 187 seconds
 Algorithms:
 Authentication : md5
 Encryption : 3des-cbc
 Pseudo random function: hmac-md5
 Traffic statistics:
 Input bytes : 1000
 Output bytes : 1280
 Input packets: 5
 Output packets: 9
 Flags: Caller notification sent
 IPSec security associations: 2 created, 0 deleted
 Phase 2 negotiations in progress: 1

Negotiation type: Quick mode, Role: Initiator, Message ID: 3582889153
 Local: 192.0.2.5:500, Remote: 192.0.2.4:500
 Local identity: ipv4_subnet(tcp:80,[0..7]=10.1.1.0/24)
 Remote identity: ipv4_subnet(tcp:100,[0..7]=10.1.2.0/24)
 Flags: Caller notification sent, Waiting for done

```

**show services ipsec-vpn ike security-associations (on ACX500 Routers)**

```
user@host> show services ipsec-vpn ike security-associations
```

| Remote Address | State   | Initiator cookie | Responder cookie | Exchange type |
|----------------|---------|------------------|------------------|---------------|
| 192.168.10.130 | Matured | 90864887dfecb178 | 9a2ee2ab786f960d | Main          |
| 192.168.20.130 | Matured | 1dd17732a8c9b13a | b06e5072ac7362bf | Main          |
| 192.0.2.7      | Matured | 565e2813075e6fdb | 67886757a74edcd6 | IKEv2         |



## show services ipsec-vpn ipsec security-associations

|                                 |                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show services ipsec-vpn ipsec security-associations<br><brief   detail   extensive><br><service-set <i>service-set-name</i> >                                                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | (Adaptive services interface only) Display IPsec security associations for the specified service set. If no service set is specified, the security associations for all service sets are displayed.                                                                                                                 |
| <b>Options</b>                  | <p><b>none</b>—Display standard information about IPsec security associations for all service sets.</p> <p><b>brief   detail   extensive</b>—(Optional) Display the specified level of output.</p> <p><b>service-set <i>service-set-name</i></b>—(Optional) Display information about a particular service set.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>    | <a href="#">show services ipsec-vpn ipsec security associations extensive on page 1258</a><br><a href="#">show services ipsec-vpn ipsec security associations detail on page 1259</a><br><a href="#">show services ipsec-vpn ipsec security associations (on ACX500 Routers) on page 1259</a>                       |
| <b>Output Fields</b>            | Table 84 on page 1255 lists the output fields for the <b>show services ipsec-vpn ipsec security-associations</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                   |

Table 84: show services ipsec-vpn ipsec security-associations Output Fields

| Field Name                    | Field Description                                                                                                                               | Level of Output  |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>Service set</b>            | Name of the service set for which the IPsec security associations are defined. If appropriate, includes the outside service interface VRF name. | All levels       |
| <b>Rule</b>                   | Name of the rule set applied to the security association.                                                                                       | detail extensive |
| <b>Term</b>                   | Name of the IPsec term applied to the security association.                                                                                     | detail extensive |
| <b>Tunnel index</b>           | Numeric identifier of the specific IPsec tunnel for the security association.                                                                   | detail extensive |
| <b>Local gateway</b>          | Gateway address of the local system.                                                                                                            | All levels       |
| <b>Remote gateway</b>         | Gateway address of the remote system.                                                                                                           | All levels       |
| <b>IPsec inside interface</b> | Name of the logical interface hosting the IPsec tunnels.                                                                                        | All levels       |

Table 84: show services ipsec-vpn ipsec security-associations Output Fields (continued)

| Field Name                    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Level of Output |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Tunnel MTU</b>             | MTU of the IPsec tunnel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | All levels      |
| <b>Total uptime</b>           | Total amount of time that an IPsec tunnel has been up across security association rekeys.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>detail</b>   |
| <b>Local identity</b>         | <p>Protocol, address or prefix, and port number of the local entity of the IPsec association. The format is <b>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</b>. The protocol is always displayed as any because it is not user-configurable in the IPsec rule. Similarly, the port number field in the output is always displayed as 0 because it is not user-configurable in the IPsec rule. The value of the <b>id-data-len</b> parameter can be one of the following, depending on the address configured in the IPsec rule:</p> <ul style="list-style-type: none"> <li>For an IPv4 address, the length is 4 and the value displayed is 3.</li> <li>For a subnet mask of an IPv4 address, the length is 8 and the value displayed is 7.</li> <li>For a range of IPv4 addresses, the length is 8 and the value displayed is 7.</li> <li>For an IPv6 address prefix, the length is 16 and the value displayed is 15.</li> <li>For a subnet mask of an IPv6 address prefix, the length is 32 and the value displayed is 31.</li> <li>For a range of IPv6 address prefixes, the length is 32 and the value displayed is 31.</li> </ul> <p>The value of the <b>id-data-presentation</b> field denotes the IPv4 address or IPv6 prefix details. If the fully qualified domain name (FQDN) is specified instead of the address for the local peer of the IPsec association, it is displayed instead of the address details.</p>   | All levels      |
| <b>Remote identity</b>        | <p>Protocol, address or prefix, and port number of the remote entity of the IPsec association. The format is <b>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</b>. The protocol is always displayed as any because it is not user-configurable in the IPsec rule. Similarly, the port number field in the output is always displayed as 0 because it is not user-configurable in the IPsec rule. The value of the <b>id-data-len</b> parameter can be one of the following, depending on the address configured in the IPsec rule:</p> <ul style="list-style-type: none"> <li>For an IPv4 address, the length is 4 and the value displayed is 3.</li> <li>For a subnet mask of an IPv4 address, the length is 8 and the value displayed is 7.</li> <li>For a range of IPv4 addresses, the length is 8 and the value displayed is 7.</li> <li>For an IPv6 address prefix, the length is 16 and the value displayed is 15.</li> <li>For a subnet mask of an IPv6 address prefix, the length is 32 and the value displayed is 31.</li> <li>For a range of IPv6 address prefixes, the length is 32 and the value displayed is 31.</li> </ul> <p>The value of the <b>id-data-presentation</b> field denotes the IPv4 address or IPv6 prefix details. If the fully qualified domain name (FQDN) is specified instead of the address for the remote peer of the IPsec association, it is displayed instead of the address details.</p> | All levels      |
| <b>Primary remote gateway</b> | IP address of the configured primary remote peer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | All levels      |

Table 84: show services ipsec-vpn ipsec security-associations Output Fields (continued)

| Field Name                   | Field Description                                                                                                                                                                                                                                                                                                                                                                         | Level of Output  |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>Backup remote gateway</b> | IP address of the configured backup remote peer.                                                                                                                                                                                                                                                                                                                                          | All levels       |
| <b>State</b>                 | State of the primary or backup interface: <b>Active</b> , <b>Offline</b> , or <b>Standby</b> . Both ES PICs are initialized to <b>Offline</b> . For primary and backup peers, <b>State</b> can be <b>Active</b> or <b>Standby</b> . If both peers are in a state of <b>Standby</b> , no connection exists yet between the two peers.                                                      | All levels       |
| <b>Failover counter</b>      | Number of times a PIC switched between primary and backup interfaces, or the number of times the tunnel switched between the primary and remote peers since the software has been activated.                                                                                                                                                                                              | All levels       |
| <b>Direction</b>             | Direction of the security association: <b>inbound</b> or <b>outbound</b> .                                                                                                                                                                                                                                                                                                                | All levels       |
| <b>SPI</b>                   | Value of the security parameter index.                                                                                                                                                                                                                                                                                                                                                    | All levels       |
| <b>AUX-SPI</b>               | Value of the auxiliary security parameter index. <ul style="list-style-type: none"> <li>When the value of <b>Protocol</b> is <b>AH</b> or <b>ESP</b>, <b>AUX-SPI</b> is always 0.</li> <li>When the value of <b>Protocol</b> is <b>AH+ESP</b>, <b>AUX-SPI</b> is always a positive integer.</li> </ul>                                                                                    | All levels       |
| <b>Mode</b>                  | Mode of the security association: <ul style="list-style-type: none"> <li><b>transport</b>—Protects single host-to-host protections.</li> <li><b>tunnel</b>—Protects connections between security gateways.</li> </ul>                                                                                                                                                                     | detail extensive |
| <b>Type</b>                  | Type of security association: <ul style="list-style-type: none"> <li><b>manual</b>—Security parameters require no negotiation. They are static, and are configured by the user.</li> <li><b>dynamic</b>—Security parameters are negotiated by the IKE protocol. Dynamic security associations are not supported in transport mode.</li> </ul>                                             | detail extensive |
| <b>State</b>                 | Status of the security association: <ul style="list-style-type: none"> <li><b>Installed</b>—The security association is installed in the security association database. (For transport mode security associations, the value of State must always be Installed.)</li> <li><b>Not installed</b>—The security association is not installed in the security association database.</li> </ul> | detail extensive |
| <b>Protocol</b>              | Protocol supported: <ul style="list-style-type: none"> <li><b>transport</b> mode supports Encapsulation Security Protocol (<b>ESP</b>) or Authentication Header (<b>AH</b>).</li> <li><b>tunnel</b> mode supports <b>ESP</b> or <b>AH+ESP</b>.</li> </ul>                                                                                                                                 | All levels       |
| <b>Authentication</b>        | Type of authentication used: <b>hmac-md5-96</b> , <b>hmac-sha1-96</b> , or <b>none</b> .                                                                                                                                                                                                                                                                                                  | detail extensive |

Table 84: show services ipsec-vpn ipsec security-associations Output Fields (continued)

| Field Name                                   | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Level of Output         |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Encryption</b>                            | Type of encryption algorithm used: can be <b>3des-cbc</b> , <b>aes-cbc (128 bits)</b> , <b>aes-cbc (192 bits)</b> , <b>aes-cbc (256 bits)</b> , <b>aes-gcm (128 bits)</b> , <b>aes-gcm(192 bits)</b> , <b>aes-gcm (256 bits)</b> , <b>des-cbc</b> , or <b>None</b> .<br><br><b>NOTE:</b> In Junos FIPS mode, AES-GCM is not supported in Junos OS Release 17.3R1. Starting in Junos OS Release 17.4R1, AES-GCM is supported in Junos FIPS mode.                                                                                                                                                                                                                                                                              | <b>detail</b>           |
| <b>Soft lifetime</b><br><b>Hard lifetime</b> | Each lifetime of a security association has two display options, hard and soft, one of which must be present for a dynamic security association. The hard lifetime specifies the lifetime of the SA. The soft lifetime, which is derived from the hard lifetime, informs the IPsec key management system that the SA is about to expire. This information allows the key management system to negotiate a new SA before the hard lifetime expires.<br><br><ul style="list-style-type: none"> <li><b>Expires in seconds seconds</b>—Number of seconds left until the security association expires.</li> <li><b>Expires in kilobytes kilobytes</b>—Number of kilobytes left until the security association expires.</li> </ul> | <b>detail extensive</b> |
| <b>Anti-replay service</b>                   | State of the service that prevents packets from being replayed: <b>Enabled</b> or <b>Disabled</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>SA lifetime</b>                           | Configured hard lifetime (total lifetime), in seconds, for the security association.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>detail</b>           |
| <b>Replay window size</b>                    | Configured size, in packets, of the antireplay service window: <b>32</b> or <b>64</b> . The antireplay window size protects the receiver against replay attacks by rejecting old or duplicate packets. If the replay window size is <b>0</b> , antireplay service is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail</b>           |
| <b>disable-natt</b>                          | Configure to disable NAT-T functionality. By default the NAT-T is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | All levels.             |
| <b>nat-keepalive</b>                         | Specify the interval at which NAT keepalive packets can be sent so that NAT translation continues.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | All levels.             |

## Sample Output

### show services ipsec-vpn ipsec security associations extensive

```

user@host> show services ipsec-vpn ipsec security-associations extensive
Service set: service-set-1
 Rule: _junos_, Term: term-1, Tunnel index: 1
 Local gateway: 192.0.2.2, Remote gateway: 198.51.100.4
 IPSec inside interface: sp-2/0/0.1 Local identity:
 ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
 Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
 Primary remote gateway: 192.0.2.1, State: Standby
 Backup remote gateway: 198.51.100.4, State: Active
 Failover counter: 1

 Direction: inbound, SPI: 3743521590, AUX-SPI: 0
 Mode: tunnel, Type: dynamic, State: Installed

```

Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc  
 Soft lifetime: Expires in 23043 seconds  
 Hard lifetime: Expires in 23178 seconds  
 Anti-replay service: Enabled, Replay window size: 64

Direction: outbound, SPI: 2551045240, AUX-SPI: 0  
 Mode: tunnel, Type: dynamic, State: Installed  
 Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc  
 Soft lifetime: Expires in 23043 seconds  
 Hard lifetime: Expires in 23178 seconds  
 Anti-replay service: Enabled, Replay window size: 64

disable-natt: No, nat-keepalive: 10

### show services ipsec-vpn ipsec security associations detail

user@host> show services ipsec-vpn ipsec security-associations detail  
 Service set: ipsec-sset-0, IKE Routing-instance: default

Rule: ipsec-rule-0, Term: term0, Tunnel index: 1  
 Local gateway: 192.0.2.1, Remote gateway: 192.0.2.2  
 IPSec inside interface: ms-3/0/0.1, Tunnel MTU: 1500  
 UDP encapsulate: Disabled, UDP Destination port: 0  
 Local identity: ipv4\_subnet(any:0,[0..7]=198.51.100.0/16)  
 Remote identity: ipv4\_subnet(any:0,[0..7]=203.0.113.0/16)  
 NATT Detection: Not Detected, NATT keepalive interval: 0  
 Total uptime: 0 days 0 hrs 1 mins 4 secs

Direction: inbound, SPI: 4004530393, AUX-SPI: 0  
 Mode: tunnel, Type: dynamic, State: Installed  
 Protocol: ESP, Authentication: hmac-sha1-96, Encryption: aes-cbc (128 bits)  
 Soft lifetime: Expires in 27885 seconds  
 Hard lifetime: Expires in 28736 seconds  
 Anti-replay service: Enabled, Replay window size: 4096  
 Copy ToS: Enabled  
 Copy TTL: Disabled, TTL value: 64  
 SA lifetime: 28800 seconds

Direction: outbound, SPI: 1323638473, AUX-SPI: 0  
 Mode: tunnel, Type: dynamic, State: Installed  
 Protocol: ESP, Authentication: hmac-sha1-96, Encryption: aes-cbc (128 bits)  
 Soft lifetime: Expires in 27885 seconds  
 Hard lifetime: Expires in 28736 seconds  
 Anti-replay service: Enabled, Replay window size: 4096  
 Copy ToS: Enabled  
 Copy TTL: Disabled, TTL value: 64  
 SA lifetime: 28800 seconds

### show services ipsec-vpn ipsec security associations (on ACX500 Routers)

user@host> show services ipsec-vpn ipsec security-associations

Service set: SS\_1, IKE Routing-instance: Customer-1

Rule: rule\_1, Term: 1, Tunnel index: 2  
 Local gateway: 192.168.1.11, Remote gateway: 192.168.10.130  
 IPSec inside interface: ms-0/2/0.8, Tunnel MTU: 1300  
 UDP encapsulate: Disabled, UDP Destination port: 0

| Direction | SPI        | AUX-SPI | Mode   | Type    | Protocol |
|-----------|------------|---------|--------|---------|----------|
| inbound   | 2204677182 | 0       | tunnel | dynamic | ESP      |

outbound 3015420439 0 tunnel dynamic ESP

Service set: SS\_2, IKE Routing-instance: Customer-1

Rule: Customer-1\_rule\_1, Term: 1, Tunnel index: 1

Local gateway: 192.168.1.12, Remote gateway: 192.168.20.130

IPSec inside interface: ms-0/2/0.7, Tunnel MTU: 1300

UDP encapsulate: Disabled, UDP Destination port: 0

| Direction | SPI        | AUX-SPI | Mode   | Type    | Protocol |
|-----------|------------|---------|--------|---------|----------|
| inbound   | 2093089828 | 0       | tunnel | dynamic | ESP      |
| outbound  | 2160146627 | 0       | tunnel | dynamic | ESP      |

## show services ipsec-vpn ipsec statistics

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show services ipsec-vpn ipsec statistics<br><brief   detail><br><remote-gw remote-peer-address><br><service-set service-set-name>                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>New fields added in Junos OS Release 10.0.                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | (Adaptive services interface only) Display IPsec statistics for the specified service set. If no service set is specified, the statistics for all service sets are displayed.                                                                                                                                                                                                                                     |
| <b>Options</b>                  | <p><b>none</b>—Display standard IPsec statistics for all service sets.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>remote-gw remote-peer-address</b>—(Optional) Display IPsec statistics for an individual IPsec tunnel and an individual remote host.</p> <p><b>service-set service-set-name</b>—(Optional) Display information about a particular service set.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>    | <a href="#">show services ipsec-vpn ipsec statistics detail on page 1263</a><br><a href="#">show services ipsec-vpn ipsec statistics remote-gw on page 1263</a><br><a href="#">show services ipsec-vpn ipsec statistics (on ACX500) on page 1263</a>                                                                                                                                                              |
| <b>Output Fields</b>            | Table 85 on page 1261 lists the output fields for the <b>show services ipsec-vpn ipsec statistics</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                            |

Table 85: show services ipsec-vpn ipsec statistics Output Fields

| Field Name            | Field Description                                                             | Level of Output |
|-----------------------|-------------------------------------------------------------------------------|-----------------|
| <b>PIC</b>            | The physical interface on which the IPsec tunnel is configured.               | All levels      |
| <b>Service set</b>    | Name of the service set for which the IPsec tunnel is defined.                | All levels      |
| <b>Local gateway</b>  | Gateway address of the local system.                                          | All levels      |
| <b>Remote gateway</b> | Gateway address of the remote system.                                         | All levels      |
| <b>Tunnel index</b>   | Numeric identifier of the specific IPsec tunnel for the security association. | All levels      |

Table 85: show services ipsec-vpn ipsec statistics Output Fields (continued)

| Field Name            | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Level of Output |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>ESP statistics</b> | Encapsulation Security Payload (ESP) statistics: <ul style="list-style-type: none"> <li>• <b>Encrypted bytes</b>—Total number of bytes encrypted by the local system across the IPsec tunnel.</li> <li>• <b>Decrypted bytes</b>—Total number of bytes decrypted by the local system across the IPsec tunnel.</li> <li>• <b>Encrypted packets</b>—Total number of packets encrypted by the local system across the IPsec tunnel.</li> <li>• <b>Decrypted packets</b>—Total number of packets decrypted by the local system across the IPsec tunnel.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | All levels      |
| <b>AH Statistics</b>  | Authentication Header statistics: <ul style="list-style-type: none"> <li>• <b>Input bytes</b>—Total number of bytes received by the local system across the IPsec tunnel.</li> <li>• <b>Output bytes</b>—Total number of bytes transmitted by the local system across the IPsec tunnel.</li> <li>• <b>Input packets</b>—Total number of packets received by the local system across the IPsec tunnel.</li> <li>• <b>Output packets</b>—Total number of packets transmitted by the local system across the IPsec tunnel.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | All levels      |
| <b>Errors</b>         | <ul style="list-style-type: none"> <li>• <b>AH authentication failures</b>—Number of authentication header (AH) failures. An AH failure occurs when there is a mismatch of the authentication header in a packet transmitted across an IPsec tunnel.</li> <li>• <b>ESP authentication failures</b>—Number of Encapsulation Security Payload (ESP) failures. An ESP failure occurs when there is an authentication mismatch in ESP packets.</li> <li>• <b>ESP Decryption failures</b>—Number of ESP decryption failures.</li> <li>• <b>Bad headers</b>—Number of invalid headers detected.</li> <li>• <b>Bad trailers</b>—Number of invalid trailers detected.</li> <li>• <b>Replay before window drops</b>—Number of replay errors. A replay error is generated when a duplicate packet is received within the replay window.</li> <li>• <b>Replayed pkts</b>—Number of packets replayed.</li> <li>• <b>IP integrity errors</b>—Number of IP integrity errors.</li> <li>• <b>Exceeds tunnel MTU</b>—Number of times the tunnel maximum transmission unit (MTU) value was exceeded.</li> <li>• <b>Rule lookup failures</b>—Number of rule lookup failures.</li> <li>• <b>No SA errors</b>—Number of errors resulting from a missing security association (SA).</li> <li>• <b>Flow errors</b>—Number of flow errors.</li> <li>• <b>Misc errors</b>—Number of miscellaneous errors.</li> </ul> | All levels      |



## Sample Output

### show services ipsec-vpn ipsec statistics detail

```

user@host> show services ipsec-vpn ipsec statistics
PIC: sp-0/2/0, Service set: ss0

ESP Statistics:
 Encrypted bytes: 0
 Decrypted bytes: 0
 Encrypted packets: 0
 Decrypted packets: 0
AH Statistics:
 Input bytes: 168
 Output bytes: 168
 Input packets: 2
 Output packets: 2
Errors:
 AH authentication failures: 0
 ESP authentication failures: 0
 ESP decryption failures: 0
 Bad headers: 0, Bad trailers: 0
 Replay before window drops: 0, Replayed pkts: 0
 IP integrity errors: 0, Exceeds tunnel MTU: 0
 Rule lookup failures: 0, No SA errors: 0
 Flow errors: 0, Misc errors: 0

```

### show services ipsec-vpn ipsec statistics remote-gw

```

user@host> show services ipsec-vpn ipsec statistics remote-gw 192.0.2.1
PIC: sp-3/1/0, Service set: service-set-2
Local gateway: 198.51.100.1, Remote gateway: 192.0.2.1, Tunnel index: 2
ESP Statistics:
 Encrypted bytes: 0
 Decrypted bytes: 0
 Encrypted packets: 0
 Decrypted packets: 0
AH Statistics:
 Input bytes: 0
 Output bytes: 0
 Input packets: 0
 Output packets: 0
Errors:
 AH authentication failures: 0
 ESP authentication failures: 0
 ESP decryption failures: 0
 Bad headers: 0, Bad trailers: 0
 Replay before window drops: 0, Replayed pkts: 0
 IP integrity errors: 0, Exceeds tunnel MTU: 0
 Rule lookup failures: 0, No SA errors: 0
 Flow errors: 0, Misc errors: 0

```

### show services ipsec-vpn ipsec statistics (on ACX500)

```

user@host> show services ipsec-vpn ipsec statistics

PIC: ms-0/2/0, Service set: SS_1

ESP Statistics:

```

```
Encrypted bytes: 4121664
Decrypted bytes: 151584
Encrypted packets: 64162
Decrypted packets: 1579
AH Statistics:
 Input bytes: 0
 Output bytes: 0
 Input packets: 0
 Output packets: 0
Errors:
 AH authentication failures: 0
 ESP authentication failures: 0
 ESP decryption failures: 0
 Bad headers: 0, Bad trailers: 0
 Replay before window drops: 0, Replayed pkts: 0
 IP integrity errors: 0, Exceeds tunnel MTU: 0
 Rule lookup failures: 3, No SA errors: 0
 Flow errors: 0, Misc errors: 0
```

PIC: ms-0/2/0, Service set: SS\_2

```
ESP Statistics:
 Encrypted bytes: 576
 Decrypted bytes: 576
 Encrypted packets: 6
 Decrypted packets: 6
AH Statistics:
 Input bytes: 0
 Output bytes: 0
 Input packets: 0
 Output packets: 0
Errors:
 AH authentication failures: 0
 ESP authentication failures: 0
 ESP decryption failures: 0
 Bad headers: 0, Bad trailers: 0
 Replay before window drops: 0, Replayed pkts: 0
 IP integrity errors: 0, Exceeds tunnel MTU: 0
 Rule lookup failures: 0, No SA errors: 0
 Flow errors: 0, Misc errors: 0
```

## show system certificate

|                                 |                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show system certificate</code><br><code>&lt;certificate-id&gt;</code>                                                                                                                     |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 11.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.    |
| <b>Description</b>              | (Encryption interface on M Series, T Series routers, QFX Series, and OCX Series switches only) Display installed certificates signed by the Juniper Networks certificate authority.             |
| <b>Options</b>                  | <b>none</b> —Display all installed certificates signed by the Juniper Networks certificate authority.<br><br><b>certificate-id</b> —(Optional) Display the details of a particular certificate. |
| <b>Required Privilege Level</b> | maintenance                                                                                                                                                                                     |
| <b>List of Sample Output</b>    | <a href="#">show system certificate on page 1266</a><br><a href="#">show system certificate (QFX Series) on page 1266</a>                                                                       |
| <b>Output Fields</b>            | <a href="#">Table 86 on page 1265</a> lists the output fields for the <b>show system certificate</b> command. Output fields are listed in the approximate order in which they appear.           |

*Table 86: show system certificate Output Fields*

| Field Name                      | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Certificate identifier</b>   | Unique identifier associated with a certificate. The certificate identifier is the common name of the subject.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Issuer</b><br><b>Subject</b> | Information about the certificate issuer and the distinguished name (DN) of the issuer, respectively: <ul style="list-style-type: none"> <li>• <b>Organization</b>—Name of the owner's organization.</li> <li>• <b>Organizational unit</b>—Name of the owner's department.</li> <li>• <b>Country</b>—Two-character country code in which the owner's system is located.</li> <li>• <b>State</b>—State in the USA in which the owner is using the certificate.</li> <li>• <b>Locality</b>—City in which the owner's system is located.</li> <li>• <b>Common name</b>—Name of the owner of the certificate.</li> <li>• <b>E-mail address</b>—E-mail address of the owner of the certificate.</li> </ul> |
| <b>Validity</b>                 | When a certificate is valid.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Signature algorithm</b>      | Encryption algorithm applied to the installed certificate.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Public key algorithm</b>     | Encryption algorithm applied to the public key.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Sample Output

### show system certificate

```
user@host> show system certificate
Certificate identifier: Dallas-v3
 Issuer:
 Organization: Juniper Networks, Organizational unit: Juniper CA,
 Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas CA,
 E-mail address:ca@example.com
 Subject:
 Organization: Juniper Networks, Organizational unit: Juniper CA,
 Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas-v3,
 E-mail address:ca@example.com
 Validity:
 Not before: Mar 13 03:23:25 2004 GMT
 Not after: Mar 24 03:23:25 2014 GMT
 Signature algorithm: sha1WithRSAEncryption
 Public key algorithm: dsaEncryption
```

### show system certificate (QFX Series)

```
user@host> show system certificate
Certificate identifier: Dallas-v3
 Issuer:
 Organization: Juniper Networks, Organizational unit: Juniper CA,
 Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas CA,
 E-mail address:ca@example.com
 Subject:
 Organization: Juniper Networks, Organizational unit: Juniper CA,
 Country: US, State: CA, Locality: Sunnyvale, Common name: Dallas-v3,
 E-mail address:ca@example.com
 Validity:
 Not before: Mar 13 03:23:25 2004 GMT
 Not after: Mar 24 03:23:25 2014 GMT
 Signature algorithm: sha1WithRSAEncryption
 Public key algorithm: dsaEncryption
```

## show system statistics arp

|                                 |                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | show system statistics arp                                                                                                                                                       |
| <b>Release Information</b>      | Command introduced in Junos OS Release 9.6 for EX Series switches.                                                                                                               |
| <b>Description</b>              | Display system-wide Address Resolution Protocol (ARP) statistics.                                                                                                                |
| <b>Required Privilege Level</b> | view                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring Proxy ARP on an EX Series Switch</i></li> <li>• <i>Verifying That Proxy ARP Is Working Correctly</i></li> </ul> |

## show system statistics arp

```

user@switch> show system statistics arp
arp:
 90060 datagrams received
 34 ARP requests received
 610 ARP replies received
 0 resolution request received
 0 unrestricted proxy requests
 0 restricted proxy requests
 0 received proxy requests
 0 unrestricted proxy requests not proxied
 0 restricted proxy requests not proxied
 0 datagrams with bogus interface
 0 datagrams with incorrect length
 0 datagrams for non-IP protocol
 0 datagrams with unsupported op code
 0 datagrams with bad protocol address length
 0 datagrams with bad hardware address length
 0 datagrams with multicast source address
 0 datagrams with multicast target address
 0 datagrams with my own hardware address
 0 datagrams for an address not on the interface
 0 datagrams with a broadcast source address
 294 datagrams with source address duplicate to mine
 89113 datagrams which were not for me
 0 packets discarded waiting for resolution
 0 packets sent after waiting for resolution
 309 ARP requests sent
 35 ARP replies sent
 0 requests for memory denied
 0 requests dropped on entry
 0 requests dropped during retry
 0 requests dropped due to interface deletion
 0 requests on unnumbered interfaces
 0 new requests on unnumbered interfaces
 0 replies for from unnumbered interfaces
 0 requests on unnumbered interface with non-subnetted donor
 0 replies from unnumbered interface with non-subnetted donor

```

