



Junos[®] OS

Protocol-Independent Routing Properties Configuration Guide

Release
12.1



Published: 2012-08-10

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

Junos® OS Protocol-Independent Routing Properties Configuration Guide

12.1

Copyright © 2012, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	xiii
	Documentation and Release Notes	xiii
	Supported Platforms	xiii
	Using the Examples in This Manual	xiii
	Merging a Full Example	xiv
	Merging a Snippet	xiv
	Documentation Conventions	xv
	Documentation Feedback	xvii
	Requesting Technical Support	xvii
	Self-Help Online Tools and Resources	xvii
	Opening a Case with JTAC	xviii
Part 1	Overview	
Chapter 1	Introduction to Protocol-Independent Routing Properties	3
	Protocol-Independent Routing Properties Overview	3
Part 2	Configuration	
Chapter 2	Routing Tables and Static Routes	7
	Examples: Configuring Static Routes	7
	Understanding Basic Static Routing	7
	Example: Configuring a Basic Set of Static Routes	7
	Example: Configuring IPv6 Static Routes	12
	Example: Configuring Static Routing on Logical Systems	16
	Understanding Basic Static Routing	16
	Example: Configuring Static Routes Between Logical Systems Within the Same Router	16
	Example: Configuring Static Route Preferences and Qualified Next Hops	21
	Understanding Static Route Preferences and Qualified Next Hops	21
	Example: Configuring Static Route Preferences and Qualified Next Hops	22
	Example: Controlling Static Routes in Routing and Forwarding Tables	27
	Understanding Static Route Control in Routing and Forwarding Tables	27
	Route Retention	27
	Readvertisement Prevention	28
	Forced Rejection of Passive Route Traffic	28
	Example: Preventing a Static Route from Being Readvertised	28
	Examples: Creating a Routing Table and Populating It with Routes	34
	Understanding Junos OS Routing Tables	34
	Example: Creating Routing Tables	35
	Example: Importing Direct and Static Routes Into a Routing Instance	37

	Example: Configuring Point-to-Multipoint LSPs with Static Routes	41
	Understanding Point-to-Multipoint LSPs	41
	Point-to-Multipoint LSP Configuration Overview	42
	Example: Configuring an RSVP-Signaled Point-to-Multipoint LSP	42
	Example: Configuring Static Routes for CLNS	60
	Understanding Static Routes for CLNS	60
	Example: Configuring Static Routes for CLNS	61
Chapter 3	Aggregate and Generated Routes	65
	Example: Summarizing Static Routes Through Route Aggregation	65
	Understanding Aggregate Routes	65
	Configuring a Metric Value for Aggregate Routes	68
	Configuring a Preference Value for Aggregate Routes	68
	Configuring the Next Hop for Aggregate Routes	69
	Associating BGP Communities with Aggregate Routes	69
	Associating AS Paths with Aggregate Routes	70
	Including AS Numbers in Aggregate Route Paths	71
	Configuring an OSPF Tag String for Aggregate Routes	72
	Controlling Retention of Inactive Aggregate Routes in the Routing and Forwarding Tables	72
	Example: Summarizing Routes Through Route Aggregation	72
	Example: Conditionally Generating Static Routes	78
	Understanding Conditionally Generated Routes	78
	Example: Configuring a Conditional Default Route Policy	80
Chapter 4	Bidirectional Forwarding Detection for Static Routes	87
	Examples: Configuring BFD for Static Routes	87
	Understanding BFD for Static Routes	87
	Example: Configuring BFD for Static Routes	91
	Example: Enabling BFD on Qualified Next Hops in Static Routes	96
	Example: Configuring BFD Authentication for Static Routes	102
	Understanding BFD Authentication for Static Routes	102
	BFD Authentication Algorithms	103
	Security Authentication Keychains	103
	Strict Versus Loose Authentication	104
	Example: Configuring BFD Authentication for Static Routes	104
Chapter 5	Packet Forwarding Behavior	111
	Example: Enabling Indirect Next Hops on the Packet Forwarding Engine	111
	Understanding Indirect Next Hops	111
	Example: Optimizing Route Reconvergence by Enabling Indirect Next Hops on the Packet Forwarding Engine	112
	Example: Configuring Unicast Reverse-Path-Forwarding Check	121
	Understanding Unicast Reverse Path Forwarding	121
	Example: Configuring Unicast Reverse-Path-Forwarding Check	122
Chapter 6	Martian Addresses	131
	Example: Configuring Martian Addresses	131
	Understanding Martian Addresses	131
	Example: Configuring Martian Addresses	132

Chapter 7	Debugging and Trace Operations	137
	Example: Tracing Global Routing Protocol Operations	137
	Understanding Global Routing Protocol Tracing Operations	137
	Example: Tracing Global Routing Protocol Operations	138
Chapter 8	Configuration Statements	143
	access	143
	access-internal	144
	active	145
	aggregate	146
	as-path	148
	auto-export	150
	autonomous-system	152
	bfd	155
	bfd-liveness-detection	157
	brief	161
	color	161
	community	162
	confederation	164
	destination-networks	165
	disable	165
	discard	166
	dynamic-tunnels	167
	export	168
	export-rib	169
	fate-sharing	170
	filter	171
	flow	172
	forwarding-table	173
	full	173
	generate	174
	graceful-restart	175
	import	176
	import-policy	177
	import-rib	178
	independent-domain	179
	indirect-next-hop	180
	input	181
	install	182
	instance-export	183
	instance-import	183
	interface (Multicast Static Routes)	184
	interface (Multicast Scoping)	185
	interface-routes	186
	lsp-next-hop	188
	martians	189
	maximum-paths	191
	maximum-prefixes	193
	med-igp-update-interval	194

metric	195
metric (Aggregate, Generated, or Static Route)	196
metric (Qualified Next Hop on Static Route)	197
multicast	198
next-hop (Access)	199
next-hop (Access Internal)	199
no-delegate-processing	200
nonstop-routing	201
options	202
p2mp-lsp-next-hop	203
passive	203
policy	204
ppm	206
preference	207
preference (Access)	208
prefix	208
qualified-next-hop	209
qualified-next-hop (Access)	210
qualified-next-hop (Access-Internal)	210
readvertise	211
resolution	212
resolution-ribs	213
resolve	214
restart-duration	215
retain	216
rib (General)	217
rib (Route Resolution)	219
rib-group	220
rib-groups	221
route (Access)	223
route (Access-Internal)	223
route-distinguisher-id	224
route-record	224
router-id	225
routing-options	226
scope	226
source-address	227
source-routing	228
ssm-groups	229
static	230
tag	236
tag (Access)	237
threshold	237
traceoptions	238
tunnel-type	240
unicast-reverse-path	240

Part 3	Administration	
Chapter 9	Operational Commands	243
	show bfd session	244
	show route	251
	show route active-path	256
	show route all	261
	show route best	263
	show route brief	266
	show route detail	268
	show route exact	283
	show route export	285
	show route hidden	287
	show route inactive-path	290
	show route instance	293
	show route label-switched-path	300
	show route martians	302
	show route next-hop	304
	show route protocol	310
	show route resolution	319
	show route summary	322
	show route table	324
	show route terse	333
Part 4	Troubleshooting	
Chapter 10	Routing Protocol Process Memory FAQ	339
	Routing Protocol Process Memory FAQ Overview	339
	Routing Protocol Process Memory FAQs	340
	Routing Protocol Process Memory Utilization FAQs	340
	Interpreting Routing Protocol Process-Related Command Outputs	
	FAQs	342
	Routing Protocol Process Memory Swapping FAQs	345
	Troubleshooting the Routing Protocol Process FAQs	346
Part 5	Index	
	Index	349

List of Figures

Part 2	Configuration	
Chapter 2	Routing Tables and Static Routes	7
	Figure 1: Customer Routes Connected to a Service Provider	8
	Figure 2: Customer Routes Connected to a Service Provider	12
	Figure 3: Static Routes Between Logical Systems	17
	Figure 4: Controlling Static Route Selection	23
	Figure 5: Customer Routes Connected to a Service Provider	29
	Figure 6: Point-to-Multipoint LSPs	41
	Figure 7: RSVP-Signaled Point-to-Multipoint LSP	43
Chapter 3	Aggregate and Generated Routes	65
	Figure 8: Aggregate Route Advertised to an ISP	73
	Figure 9: OSPF with a Conditional Default Route to an ISP	81
Chapter 4	Bidirectional Forwarding Detection for Static Routes	87
	Figure 10: Customer Routes Connected to a Service Provider	92
	Figure 11: BFD Enabled on Qualified Next Hops	97
	Figure 12: Customer Routes Connected to a Service Provider	105
Chapter 5	Packet Forwarding Behavior	111
	Figure 13: Route to Forwarding Next-Hop Bindings	111
	Figure 14: Route to Forwarding Indirect Next-Hop Bindings	112
	Figure 15: Sample Topology for Indirect Next Hops	113
	Figure 16: Unicast RPF Sample Topoolgy	123

List of Tables

	About the Documentation	xiii
	Table 1: Notice Icons	xv
	Table 2: Text and Syntax Conventions	xv
Part 3	Administration	
Chapter 9	Operational Commands	243
	Table 3: show bfd session Output Fields	245
	Table 4: show route Output Fields	251
	Table 5: show route detail Output Fields	268
	Table 6: Next-hop Types Output Field Values	272
	Table 7: State Output Field Values	274
	Table 8: Communities Output Field Values	276
	Table 9: show route export Output Fields	285
	Table 10: show route instance Output Fields	293
	Table 11: show route martians Output Fields	302
	Table 12: show route resolution Output Fields	320
	Table 13: show route summary Output Fields	322
	Table 14: show route terse Output Fields	333
Part 4	Troubleshooting	
Chapter 10	Routing Protocol Process Memory FAQ	339
	Table 15: show system processes extensive Output Fields	343
	Table 16: show task memory Output Fields	344

About the Documentation

- Documentation and Release Notes on page xiii
- Supported Platforms on page xiii
- Using the Examples in This Manual on page xiii
- Documentation Conventions on page xv
- Documentation Feedback on page xvii
- Requesting Technical Support on page xvii

Documentation and Release Notes

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- T Series
- MX Series
- M Series

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the [Junos OS CLI User Guide](#).

Documentation Conventions

Table 1 on page xv defines notice icons used in this guide.

Table 1: Notice Icons





Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page xv defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> show chassis alarms No alarms currently active

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
<i>Italic text like this</i>	<ul style="list-style-type: none"> Introduces or emphasizes important new terms. Identifies book names. Identifies RFC and Internet draft titles. 	<ul style="list-style-type: none"> A policy <i>term</i> is a named structure that defines match conditions and actions. <i>Junos OS System Basics Configuration Guide</i> RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level. The console port is labeled CONSOLE.
< > (angle brackets)	Enclose optional keywords or variables.	stub <default-metric <i>metric</i> >;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast (<i>string1</i> <i>string2</i> <i>string3</i>)
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Enclose a variable for which you can substitute one or more values.	community name members [<i>community-ids</i>]
Indentation and braces ({ })	Identify a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
J-Web GUI Conventions		
Bold text like this	Represents J-Web graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> In the Logical Interfaces box, select All Interfaces. To cancel the configuration, click Cancel.
> (bold right angle bracket)	Separates levels in a hierarchy of J-Web selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to techpubs-comments@juniper.net, or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version (if applicable)

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://www.juniper.net/alerts/>

- Join and participate in the Juniper Networks Community Forum:
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/> .
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html> .

PART 1

Overview

- [Introduction to Protocol-Independent Routing Properties on page 3](#)

CHAPTER 1

Introduction to Protocol-Independent Routing Properties

- [Protocol-Independent Routing Properties Overview on page 3](#)

Protocol-Independent Routing Properties Overview

In Junos OS, routing capabilities and features that are not specific to any particular routing protocol are collectively called protocol-independent routing properties. These features often interact with routing protocols. In many cases, you combine protocol-independent properties and routing policy to achieve a goal. For example, you define a static route using protocol-independent properties, and then, using a routing policy, you can redistribute the static route into a routing protocol, such as BGP, OSPF, or IS-IS.

Protocol-independent routing properties include:

- Static, aggregate, and generated routes
- Bidirectional Forwarding Detection on static routes
- Global preference
- Martian routes
- Routing tables and routing information base (RIB) groups

Related Documentation

- [Examples: Configuring Static Routes on page 7](#)
- [Examples: Creating a Routing Table and Populating It with Routes on page 34](#)

PART 2

Configuration

- [Routing Tables and Static Routes on page 7](#)
- [Aggregate and Generated Routes on page 65](#)
- [Bidirectional Forwarding Detection for Static Routes on page 87](#)
- [Packet Forwarding Behavior on page 111](#)
- [Martian Addresses on page 131](#)
- [Debugging and Trace Operations on page 137](#)
- [Configuration Statements on page 143](#)

CHAPTER 2

Routing Tables and Static Routes

- [Examples: Configuring Static Routes on page 7](#)
- [Example: Configuring Static Routing on Logical Systems on page 16](#)
- [Example: Configuring Static Route Preferences and Qualified Next Hops on page 21](#)
- [Example: Controlling Static Routes in Routing and Forwarding Tables on page 27](#)
- [Examples: Creating a Routing Table and Populating It with Routes on page 34](#)
- [Example: Configuring Point-to-Multipoint LSPs with Static Routes on page 41](#)
- [Example: Configuring Static Routes for CLNS on page 60](#)

Examples: Configuring Static Routes

- [Understanding Basic Static Routing on page 7](#)
- [Example: Configuring a Basic Set of Static Routes on page 7](#)
- [Example: Configuring IPv6 Static Routes on page 12](#)

Understanding Basic Static Routing

Routes that are permanent fixtures in the routing and forwarding tables are often configured as static routes. These routes generally do not change, and often include only one or very few paths to the destination.

To create a static route in the routing table, you must, at minimum, define the route as static and associate a next-hop address with it. The static route in the routing table is inserted into the forwarding table when the next-hop address is reachable. All traffic destined for the static route is transmitted to the next-hop address for transit.

You can specify options that define additional information about static routes that is included with the route when it is installed in the routing table. All static options are optional.

Example: Configuring a Basic Set of Static Routes

This example shows how to configure a basic set of static routes.

- [Requirements on page 8](#)
- [Overview on page 8](#)

- [Configuration on page 8](#)
- [Verification on page 10](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview


There are many practical applications for static routes. Static routing is often used at the network edge to support attachment to stub networks, which, given their single point of entry and egress, are well suited to the simplicity of a static route. In Junos OS, static routes have a global preference of 5. Static routes are activated if the specified next hop is reachable.

In this example, you configure the static route 192.168.47.0/24 from the provider network to the customer network, using the next-hop address of 172.16.1.2. You also configure a static default route of 0.0.0.0/0 from the customer network to the provider network, using a next-hop address of 172.16.1.1.

For demonstration purposes, some loopback interfaces are configured on Device B and Device D. These loopback interfaces provide addresses to ping and thus verify that the static routes are working.

[Figure 1 on page 8](#) shows the sample network.

Figure 1: Customer Routes Connected to a Service Provider

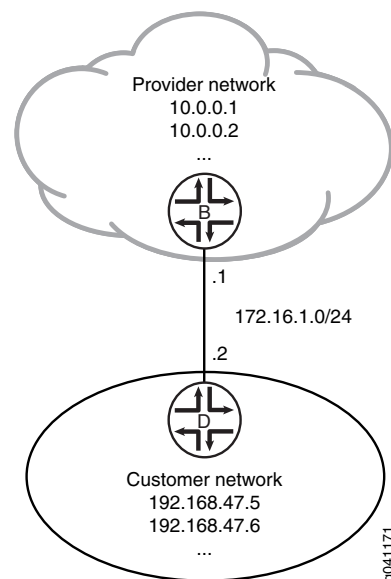

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device B

```

set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2

```

Device D

```

set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#)*.

To configure basic static routes:

1. On Device B, configure the interfaces.

```

[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32

```
2. On Device B, create a static route and set the next-hop address.

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2

```
3. If you are done configuring Device B, commit the configuration.

```

[edit interfaces]
user@B# commit

```
4. On Device D, configure the interfaces.

```

[edit]
user@D# set ge-1/2/0 unit 1 description D->B
user@D# set ge-1/2/0 unit 1 family inet address 172.16.1.2/24
user@D# set lo0 unit 2 family inet address 192.168.47.5/32
user@D# set lo0 unit 2 family inet address 192.168.47.6/32

```
5. On Device D, create a static route and set the next-hop address.

```

[edit routing-options]
user@D# set static route 0.0.0.0/0 next-hop 172.16.1.1

```
6. If you are done configuring Device D, commit the configuration.

```

[edit]
user@D# commit

```

Confirm your configuration by issuing the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Device B `user@B# show interfaces`

```
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}
lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 next-hop 172.16.1.2;
}
```

Device D

```
user@D# show interfaces
ge-1/2/0 {
  unit 1 {
    description D->B;
    family inet {
      address 172.16.1.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.47.5/32;
      address 192.168.47.6/32;
    }
  }
}

user@D# show routing-options
static {
  route 0.0.0.0/0 next-hop 172.16.1.1;
}
```

Verification

Confirm that the configuration is working properly.

- [Checking the Routing Tables on page 10](#)
- [Pinging the Remote Addresses on page 11](#)

Checking the Routing Tables

Purpose Make sure that the static routes appear in the routing tables of Device B and Device D.

Action user@B> show route
 inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
 + = Active Route, - = Last Active, * = Both

```

10.0.0.1/32      *[Direct/0] 00:29:43
                  > via lo0.57
10.0.0.2/32      *[Direct/0] 00:29:43
                  > via lo0.57
172.16.1.0/24    *[Direct/0] 00:34:40
                  > via ge-1/2/0.0
172.16.1.1/32    *[Local/0] 00:34:40
                  Local via ge-1/2/0.0
192.168.47.0/24  *[Static/5] 00:31:23
                  > to 172.16.1.2 via ge-1/2/0.0
  
```

user@D> show route
 inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
 + = Active Route, - = Last Active, * = Both

```

0.0.0.0/0        *[Static/5] 00:31:24
                  > to 172.16.1.1 via ge-1/2/0.1
172.16.1.0/24    *[Direct/0] 00:35:21
                  > via ge-1/2/0.1
172.16.1.2/32    *[Local/0] 00:35:21
                  Local via ge-1/2/0.1
192.168.47.5/32  *[Direct/0] 00:35:22
                  > via lo0.2
192.168.47.6/32  *[Direct/0] 00:35:21
                  > via lo0.2
  
```

Meaning The static routes are in the routing tables.

Pinging the Remote Addresses

Purpose Verify that the static routes are working.

From Device B, ping one of the loopback interface addresses on Device D.

From Device D, ping one of the loopback interface addresses on Device B.

Action user@B> ping 192.168.47.5
 PING 192.168.47.5 (192.168.47.5): 56 data bytes
 64 bytes from 192.168.47.5: icmp_seq=0 ttl=64 time=156.126 ms
 64 bytes from 192.168.47.5: icmp_seq=1 ttl=64 time=120.393 ms
 64 bytes from 192.168.47.5: icmp_seq=2 ttl=64 time=175.361 ms

user@D> ping 10.0.0.1
 PING 10.0.0.1 (10.0.0.1): 56 data bytes
 64 bytes from 10.0.0.1: icmp_seq=0 ttl=64 time=1.315 ms
 64 bytes from 10.0.0.1: icmp_seq=1 ttl=64 time=31.819 ms
 64 bytes from 10.0.0.1: icmp_seq=2 ttl=64 time=1.268 ms

Example: Configuring IPv6 Static Routes

This example shows how to configure static routes when the interfaces have IPv6 addresses.

- [Requirements on page 12](#)
- [Overview on page 12](#)
- [Configuration on page 13](#)
- [Verification on page 15](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview


There are many practical applications for static routes. Static routing is often used at the network edge to support attachment to stub networks, which, given their single point of entry and egress, are well suited to the simplicity of a static route. In Junos OS, static routes have a global preference of 5. Static routes are activated if the specified next hop is reachable.

In this example, you configure a static default route of `::/0`, using a next-hop address `2001:db8:0:1:2a0:a502:0:1da`.

For demonstration purposes, some loopback interfaces are configured on Device A and Device E. These loopback interfaces provide addresses to ping and thus verify that the static routes are working.

[Figure 2 on page 12](#) shows the sample network.

Figure 2: Customer Routes Connected to a Service Provider

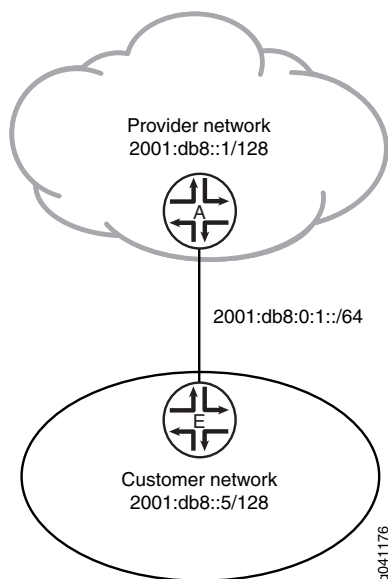

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device A

```
set interfaces fe-1/2/0 unit 1 description to-E
set interfaces fe-1/2/0 unit 1 family inet6 address 2001:db8:0:1:2a0:a502:0:1da/64
set interfaces lo0 unit 1 family inet6 address 2001:db8::1/128 primary
set interfaces lo0 unit 1 family inet6 address 2001:db8::2/128
set interfaces lo0 unit 1 family inet6 address 2001:db8::3/128
set routing-options rib inet6.0 static route 2001:db8::5/128 next-hop
  2001:db8:0:1:2a0:a502:0:19da
```

Device E

```
set interfaces fe-1/2/0 unit 25 description to-A
set interfaces fe-1/2/0 unit 25 family inet6 address 2001:db8:0:1:2a0:a502:0:19da/64
set interfaces lo0 unit 5 family inet6 address 2001:db8::5/128
set routing-options rib inet6.0 static route ::/0 next-hop 2001:db8:0:1:2a0:a502:0:1da
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure basic static routes:

1. On Device A, configure the interfaces.

```
[edit interfaces]
set interfaces fe-1/2/0 unit 1 description to-E
set interfaces fe-1/2/0 unit 1 family inet6 address 2001:db8:0:1:2a0:a502:0:1da/64

set interfaces lo0 unit 1 family inet6 address 2001:db8::1/128 primary
set interfaces lo0 unit 1 family inet6 address 2001:db8::2/128
set interfaces lo0 unit 1 family inet6 address 2001:db8::3/128
```

2. On Device A, create a static route to Device E's loopback address and set the next-hop address.

This ensures that Device A has a route back to Device E.

```
[edit routing-options]
set rib inet6.0 static route 2001:db8::5/128 next-hop 2001:db8:0:1:2a0:a502:0:19da
```

3. If you are done configuring Device A, commit the configuration.

```
[edit interfaces]
user@A# commit
```

4. On Device E, configure the interfaces.

```
[edit]
set interfaces fe-1/2/0 unit 25 description to-A
set interfaces fe-1/2/0 unit 25 family inet6 address 2001:db8:0:1:2a0:a502:0:19da/64
set interfaces lo0 unit 5 family inet6 address 2001:db8::5/128
```

5. On Device E, create a static default route and set the next-hop address.

```
[edit routing-options]
set routing-options rib inet6.0 static route::/0 next-hop 2001:db8:0:1:2a0:a502:0:1da
```

6. If you are done configuring Device E, commit the configuration.

```
[edit]
user@E# commit
```

Confirm your configuration by issuing the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device A user@A# show interfaces
fe-1/2/0 {
  unit 1 {
    description to-E;
    family inet6 {
      address 2001:db8:0:1:2a0:a502:0:1da/64;
    }
  }
}
lo0 {
  unit 1 {
    family inet6 {
      address 2001:db8::1/128 {
        primary;
      }
      address 2001:db8::2/128;
      address 2001:db8::3/128;
    }
  }
}

user@A# show routing-options
rib inet6.0 {
  static {
    route 2001:db8::5/128 next-hop 2001:db8:0:1:2a0:a502:0:19da;
  }
}

Device E user@E# show interfaces
fe-1/2/0 {
  unit 25 {
    description to-A;
    family inet6 {
      address 2001:db8:0:1:2a0:a502:0:19da/64;
    }
  }
}
lo0 {
  unit 5 {
    family inet6 {
      address 2001:db8::5/128;
    }
  }
}
```



```

user@E# show routing-options
rib inet6.0 {
  static {
    route ::/0 next-hop 2001:db8:0:1:2a0:a502:0:1da;
  }
}

```

Verification

Confirm that the configuration is working properly.

- [Checking the Routing Tables on page 15](#)
- [Pinging the Remote Addresses on page 15](#)

Checking the Routing Tables

Purpose Make sure that the static routes appear in the routing tables of Device A and Device E.

Action

```

user@A> show route protocol static
inet6.0: 9 destinations, 9 routes (9 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2001:db8::5/128      *[Static/5] 00:27:46
                    > to 2001:db8:0:1:2a0:a502:0:19da via fe-1/2/0.1

user@E> show route protocol static
inet6.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::/0                *[Static/5] 00:19:11
                    > to 2001:db8:0:1:2a0:a502:0:1da via fe-1/2/0.25

```

Meaning The static routes are in the routing tables.

Pinging the Remote Addresses

Purpose Verify that the static routes are working.

From Device A, ping one of the loopback interface addresses on Device E.

From Device E, ping one of the loopback interface addresses on Device A.

Action

```

user@A> ping 2001:db8::5
PING6(56=40+8+8 bytes) 2001:db8:0:1:2a0:a502:0:1da --> 2001:db8::5
16 bytes from 2001:db8::5, icmp_seq=0 hlim=64 time=1.790 ms
16 bytes from 2001:db8::5, icmp_seq=1 hlim=64 time=1.529 ms
16 bytes from 2001:db8::5, icmp_seq=2 hlim=64 time=1.531 ms

user@E> ping 2001:db8::3
PING6(56=40+8+8 bytes) 2001:db8:0:1:2a0:a502:0:19da --> 2001:db8::3
16 bytes from 2001:db8::3, icmp_seq=0 hlim=64 time=2.146 ms
16 bytes from 2001:db8::3, icmp_seq=1 hlim=64 time=1.964 ms
16 bytes from 2001:db8::3, icmp_seq=2 hlim=64 time=1.550 ms

```

Example: Configuring Static Routing on Logical Systems

- [Understanding Basic Static Routing on page 16](#)
- [Example: Configuring Static Routes Between Logical Systems Within the Same Router on page 16](#)

Understanding Basic Static Routing

Routes that are permanent fixtures in the routing and forwarding tables are often configured as static routes. These routes generally do not change, and often include only one or very few paths to the destination.

To create a static route in the routing table, you must, at minimum, define the route as static and associate a next-hop address with it. The static route in the routing table is inserted into the forwarding table when the next-hop address is reachable. All traffic destined for the static route is transmitted to the next-hop address for transit.

You can specify options that define additional information about static routes that is included with the route when it is installed in the routing table. All static options are optional.

Example: Configuring Static Routes Between Logical Systems Within the Same Router

This example shows how to configure static routes between logical systems. The logical systems are configured in a single physical router and are connected by logical tunnel interfaces.

- [Requirements on page 16](#)
- [Overview on page 16](#)
- [Configuration on page 17](#)
- [Verification on page 20](#)

Requirements


You must connect the logical systems by using logical tunnel (**lt**) interfaces. See [Example: Connecting Logical Systems Within the Same Router Using Logical Tunnel Interfaces](#).

Overview

A static route is a hard-coded path in the device that specifies how the route gets to a certain subnet by using a certain path. Routers that are connected to stub networks are often configured to use static routes. A *stub network* is a network with no knowledge of other networks. Stub networks send non-local traffic by way of a single path, with the network aware only of a default route to non-local destinations. In this example, you configure Logical System LS1 with a static route to the 10.10.10.0/30 network and define the next-hop address as 192.168.10.2. You also configure Logical System LS1 with a static route to the 192.168.10.0/30 network and define a next-hop address of 10.10.10.1.

[Figure 3 on page 17](#) shows the sample network.

Figure 3: Static Routes Between Logical Systems

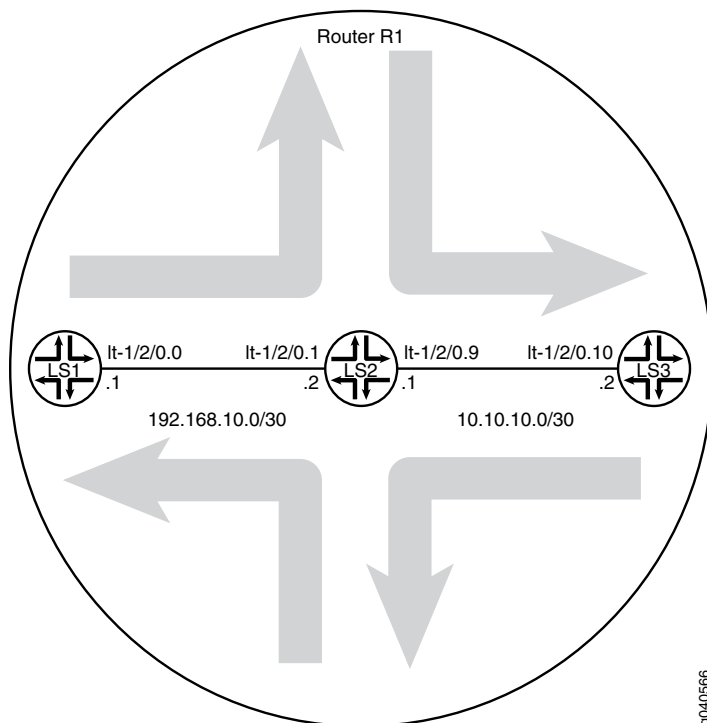

9040566

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set logical-systems LS1 interfaces lt-1/2/0 unit 0 description LS1->LS2
set logical-systems LS1 interfaces lt-1/2/0 unit 0 encapsulation ethernet
set logical-systems LS1 interfaces lt-1/2/0 unit 0 peer-unit 1
set logical-systems LS1 interfaces lt-1/2/0 unit 0 family inet address 192.168.10.1/30
set logical-systems LS2 interfaces lt-1/2/0 unit 1 description LS2->LS1
set logical-systems LS2 interfaces lt-1/2/0 unit 1 encapsulation ethernet
set logical-systems LS2 interfaces lt-1/2/0 unit 1 peer-unit 0
set logical-systems LS2 interfaces lt-1/2/0 unit 1 family inet address 192.168.10.2/30
set logical-systems LS2 interfaces lt-1/2/0 unit 9 description LS2->LS3
set logical-systems LS2 interfaces lt-1/2/0 unit 9 encapsulation ethernet
set logical-systems LS2 interfaces lt-1/2/0 unit 9 peer-unit 10
set logical-systems LS2 interfaces lt-1/2/0 unit 9 family inet address 10.10.10.1/30
set logical-systems LS3 interfaces lt-1/2/0 unit 10 description LS3->LS2
set logical-systems LS3 interfaces lt-1/2/0 unit 10 encapsulation ethernet
set logical-systems LS3 interfaces lt-1/2/0 unit 10 peer-unit 9
set logical-systems LS3 interfaces lt-1/2/0 unit 10 family inet address 10.10.10.2/30
set logical-systems LS1 routing-options static route 10.10.10.0/30 next-hop 192.168.10.2
set logical-systems LS3 routing-options static route 192.168.10.0/30 next-hop 10.10.10.1
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#).

To configure static routes between logical systems:

1. Run the **show interfaces terse** command to verify that the router has a logical tunnel (lt) interface.

```
user@host> show interfaces terse
Interface           Admin Link Proto  Local          Remote
so-0/0/0            up    down
so-0/0/1            up    down
so-0/0/2            up    down
so-0/0/3            up    down
gr-1/2/0            up    up
ip-1/2/0            up    up
lt-1/2/0            up    up
...
```

2. Configure the logical tunnel interface on Logical System LS1 connecting to Logical System LS2.

```
[edit]
user@host# set logical-systems LS1 interfaces lt-1/2/0 unit 0 description LS1->LS2
user@host# set logical-systems LS1 interfaces lt-1/2/0 unit 0 encapsulation ethernet
user@host# set logical-systems LS1 interfaces lt-1/2/0 unit 0 peer-unit 1
user@host# set logical-systems LS1 interfaces lt-1/2/0 unit 0 family inet address
192.168.10.1/30
```

3. Configure the logical tunnel interface on Logical System LS2 connecting to Logical System LS1.

```
[edit]
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 1 description LS2->LS1
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 1 encapsulation ethernet
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 1 peer-unit 0
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 1 family inet address
192.168.10.2/30
```

4. Configure the logical tunnel interface on Logical System LS2 connecting to Logical System LS3.

```
[edit]
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 9 description LS2->LS3
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 9 encapsulation ethernet
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 9 peer-unit 10
user@host# set logical-systems LS2 interfaces lt-1/2/0 unit 9 family inet address
10.10.10.1/30
```

5. Configure the logical tunnel interface on Logical System LS3 connecting to Logical System LS2.

```
[edit]
user@host# set logical-systems LS3 interfaces lt-1/2/0 unit 10 description LS3->LS2
user@host# set logical-systems LS3 interfaces lt-1/2/0 unit 10 encapsulation
ethernet
user@host# set logical-systems LS3 interfaces lt-1/2/0 unit 10 peer-unit 9
```

```
user@host# set logical-systems LS3 interfaces lt-1/2/0 unit 10 family inet address
10.10.10.2/30
```

6. Configure the static route on Logical System LS1 connecting to the 10.10.10.0/30 network.

```
[edit]
user@host# set logical-systems LS1 routing-options static route 10.10.10.0/30
next-hop 192.168.10.2
```

7. Configure the static route on Logical System LS3 connecting to the 192.168.10.0/30 network.

```
[edit]
user@host# set logical-systems LS3 routing-options static route 192.168.10.0/30
next-hop 10.10.10.1
```

8. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

Confirm your configuration by issuing the **show logical-systems** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show logical-systems
LS1 {
  interfaces {
    lt-1/2/0 {
      unit 0 {
        description LS1->LS2;
        encapsulation ethernet;
        peer-unit 1;
        family inet {
          address 192.168.10.1/30;
        }
      }
    }
  }
  routing-options {
    static {
      route 10.10.10.0/30 next-hop 192.168.10.2;
    }
  }
}
LS2 {
  interfaces {
    lt-1/2/0 {
      unit 1 {
        description LS2->LS1;
        encapsulation ethernet;
        peer-unit 0;
        family inet {
          address 192.168.10.2/30;
        }
      }
    }
  }
}
```

```
        unit 9 {
          description LS2->LS3;
          encapsulation ethernet;
          peer-unit 10;
          family inet {
            address 10.10.10.1/30;
          }
        }
      }
    }
  }
LS3 {
  interfaces {
    lt-1/2/0 {
      unit 10 {
        description LS3->LS2;
        encapsulation ethernet;
        peer-unit 9;
        family inet {
          address 10.10.10.2/30;
        }
      }
    }
  }
  routing-options {
    static {
      route 192.168.10.0/30 next-hop 10.10.10.1;
    }
  }
}
```

Verification

Confirm that the configuration is working properly.

- [Verifying That the Logical Systems Are Up on page 20](#)
- [Verifying Connectivity Between the Logical Systems on page 20](#)

Verifying That the Logical Systems Are Up

Purpose Make sure that the interfaces are properly configured.

Action user@host> show interfaces terse

Interface	Admin	Link	Proto	Local	Remote
...					
lt-1/2/0	up	up			
lt-1/2/0.0	up	up	inet	192.168.10.1/30	
lt-1/2/0.1	up	up	inet	192.168.10.2/30	
lt-1/2/0.9	up	up	inet	10.10.10.1/30	
lt-1/2/0.10	up	up	inet	10.10.10.2/30	
...					

Verifying Connectivity Between the Logical Systems

Purpose Make sure that the static routes appear in the routing tables of Logical Systems LS1 and LS3. Also, make sure that the logical systems can ping each other.

```

Action user@host> show route logical-system LS1
inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30      *[Static/5] 18:43:25
                  > to 192.168.10.2 via lt-1/2/0.0
192.168.10.0/30   *[Direct/0] 18:43:25
                  > via lt-1/2/0.0
192.168.10.1/32   *[Local/0] 18:43:25
                  Local via lt-1/2/0.0

user@host> show route logical-system LS3
inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.10.10.0/30      *[Direct/0] 23:11:21
                  > via lt-1/2/0.10
10.10.10.2/32      *[Local/0] 23:11:21
                  Local via lt-1/2/0.10
192.168.10.0/30    *[Static/5] 00:23:31
                  > to 10.10.10.1 via lt-1/2/0.10

```

From LS1, Ping LS3

```

user@host> set cli logical-system LS1

user@host:LS1> ping 10.10.10.2
PING 10.10.10.2 (10.10.10.2): 56 data bytes
64 bytes from 10.10.10.2: icmp_seq=0 ttl=63 time=1.263 ms
64 bytes from 10.10.10.2: icmp_seq=1 ttl=63 time=1.086 ms
64 bytes from 10.10.10.2: icmp_seq=2 ttl=63 time=1.077 ms

```

From LS3, Ping LS1

```

user@host> set cli logical-system LS3

user@host:LS3> ping 192.168.10.1
PING 192.168.10.1 (192.168.10.1): 56 data bytes
64 bytes from 192.168.10.1: icmp_seq=0 ttl=63 time=10.781 ms
64 bytes from 192.168.10.1: icmp_seq=1 ttl=63 time=1.167 ms
64 bytes from 192.168.10.1: icmp_seq=2 ttl=63 time=1.152 ms

```

Related Documentation

- [Introduction to Logical Systems](#)

Example: Configuring Static Route Preferences and Qualified Next Hops

- [Understanding Static Route Preferences and Qualified Next Hops on page 21](#)
- [Example: Configuring Static Route Preferences and Qualified Next Hops on page 22](#)

Understanding Static Route Preferences and Qualified Next Hops

A static route destination address can have multiple next hops associated with it. In this case, multiple routes are inserted into the routing table, and route selection must occur. Because the primary criterion for route selection is the route preference, you can control the routes that are used as the primary route for a particular destination by setting the route preference associated with a particular next hop. The routes with a lower route preference are always used to route traffic. When you do not set a preferred route, traffic is alternated between routes in round-robin fashion.

In general, the default properties assigned to a static route apply to all the next-hop addresses configured for the static route. If, however, you want to configure two possible next-hop addresses for a particular route and have them treated differently, you can define one as a qualified next hop.

Qualified next hops allow you to associate one or more properties with a particular next-hop address. You can set an overall preference for a particular static route and then specify a different preference for the qualified next hop. For example, suppose two next-hop addresses (10.10.10.10 and 10.10.10.7) are associated with the static route 192.168.47.5/32. A general preference is assigned to the entire static route, and then a different preference is assigned to only the qualified next-hop address 10.10.10.7. For example:

```
route 192.168.47.5/32 {  
  next-hop 10.10.10.10;  
  qualified-next-hop 10.10.10.7 {  
    preference 2;  
  }  
  preference 6;  
}
```

In this example, the qualified next hop 10.10.10.7 is assigned the preference 2, and the next-hop 10.10.10.10 is assigned the preference 6.



NOTE: The preference and metric options only apply to the qualified next hops. The qualified next-hop preference and metric override the route preference and metric (for that specific qualified next hop), similar to how the route preference overrides the default preference and metric (for that specific route).

Example: Configuring Static Route Preferences and Qualified Next Hops

This example shows how to control static route selection.

- [Requirements on page 22](#)
- [Overview on page 22](#)
- [Configuration on page 23](#)
- [Verification on page 26](#)


Requirements

In this example, no special configuration beyond device initialization is required.

Overview

In this example, the static route 192.168.47.0/24 has two possible next hops. Because one link has higher bandwidth, this link is the preferred path. To enforce this preference, the **qualified-next-hop** statement is included in the configuration on both devices. See [Figure 4 on page 23](#).

Figure 4: Controlling Static Route Selection

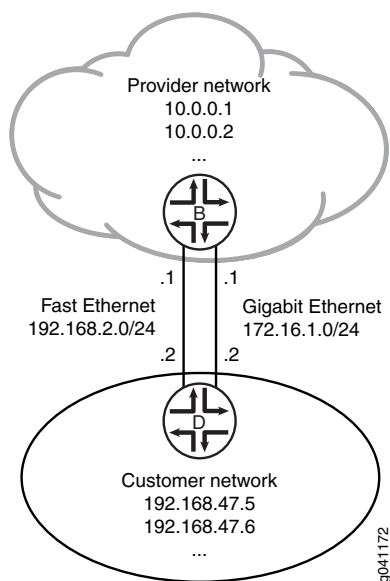

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device B

```

set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces fe-1/2/1 unit 2 description secondary-B->D
set interfaces fe-1/2/1 unit 2 family inet address 192.168.2.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 qualified-next-hop 192.168.2.2 preference 25

```

Device D

```

set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces fe-1/2/1 unit 3 description secondary-D->B
set interfaces fe-1/2/1 unit 3 family inet address 192.168.2.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 qualified-next-hop 192.168.2.1 preference 25

```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To control static route selection:

1. On Device B, configure the interfaces.

```
[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# set fe-1/2/1 unit 2 description secondary-B->D
user@B# set fe-1/2/1 unit 2 family inet address 192.168.2.1/24
user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32
```

2. On Device B, configure a static route to the customer network.

```
[edit routing-options static route 192.168.47.0/24]
user@B# set next-hop 172.16.1.2
```

3. On Device B, configure a backup route to the customer network.

```
[edit routing options static route 192.168.47.0/24]
user@B# set qualified-next-hop 192.168.2.2 preference 25
```

4. On Device D, configure the interfaces.

```
[edit interfaces]
user@D# set ge-1/2/0 unit 1 description D->B
user@D# set ge-1/2/0 unit 1 family inet address 172.16.1.2/24
user@D# set fe-1/2/1 unit 3 description secondary-D->B
user@D# set fe-1/2/1 unit 3 family inet address 192.168.2.2/24
user@D# set lo0 unit 2 family inet address 192.168.47.5/32
user@D# set lo0 unit 2 family inet address 192.168.47.6/32
```

5. On Device D, configure a static default route to external networks.

```
[edit routing options static route 0.0.0.0/0]
user@D# set next-hop 172.16.1.1
```

6. On Device D, configure a backup static default route to external networks.

```
[edit routing options static route 0.0.0.0/0]
user@D# set qualified-next-hop 192.168.2.1 preference 25
```

Results Confirm your configuration by issuing the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
      address 172.16.1.1/24;
    }
  }
}
fe-1/2/1 {
  unit 2 {
    description secondary-B->D;
    family inet {
      address 192.168.2.1/24;
    }
  }
}
```

```

lo0 {
  unit 57 {
    family inet {
      address 10.0.0.1/32;
      address 10.0.0.2/32;
    }
  }
}

user@B# show routing-options
static {
  route 192.168.47.0/24 {
    next-hop 172.16.1.2;
    qualified-next-hop 192.168.2.2 {
      preference 25;
    }
  }
}

user@D# show interfaces
ge-1/2/0 {
  unit 1 {
    description D->B;
    family inet {
      address 172.16.1.2/24;
    }
  }
}
fe-1/2/1 {
  unit 3 {
    description secondary-D->B;
    family inet {
      address 192.168.2.2/24;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 192.168.47.5/32;
      address 192.168.47.6/32;
    }
  }
}

user@D# show routing-options
static {
  route 0.0.0.0/0 {
    next-hop 172.16.1.1;
    qualified-next-hop 192.168.2.1 {
      preference 25;
    }
  }
}

```

If you are done configuring the devices, enter **commit** from configuration mode on both devices.

Verification

Confirm that the configuration is working properly.

- [Checking the Routing Tables on page 26](#)
- [Pinging the Remote Addresses on page 26](#)
- [Making Sure That the Backup Route Becomes the Active Route on page 27](#)

Checking the Routing Tables

Purpose Make sure that the static routes appear in the routing tables of Device B and Device D.

Action

```
user@B> show route protocol static
inet.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.47.0/24    *[Static/5] 02:02:03
                  > to 172.16.1.2 via ge-1/2/0.0
                  [Static/25] 01:58:21
                  > to 192.168.2.2 via fe-1/2/1.2

user@D> show route protocol static
inet.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0         *[Static/5] 02:02:12
                  > to 172.16.1.1 via ge-1/2/0.1
                  [Static/25] 01:58:31
                  > to 192.168.2.1 via fe-1/2/1.3
```

Meaning The asterisks (*) in the routing tables show the active routes. The backup routes are listed next.

Pinging the Remote Addresses

Purpose Verify that the static routes are working.

From Device B, ping one of the loopback interface addresses on Device D.

From Device D, ping one of the loopback interface addresses on Device B.

Action

```
user@B> ping 192.168.47.5
PING 192.168.47.5 (192.168.47.5): 56 data bytes
64 bytes from 192.168.47.5: icmp_seq=0 ttl=64 time=156.126 ms
64 bytes from 192.168.47.5: icmp_seq=1 ttl=64 time=120.393 ms
64 bytes from 192.168.47.5: icmp_seq=2 ttl=64 time=175.361 ms

user@D> ping 10.0.0.1
PING 10.0.0.1 (10.0.0.1): 56 data bytes
64 bytes from 10.0.0.1: icmp_seq=0 ttl=64 time=1.315 ms
64 bytes from 10.0.0.1: icmp_seq=1 ttl=64 time=31.819 ms
64 bytes from 10.0.0.1: icmp_seq=2 ttl=64 time=1.268 ms
```

Making Sure That the Backup Route Becomes the Active Route

Purpose If the primary route becomes unusable, make sure that the backup secondary route becomes active.

Action

1. Disable the active route by deactivating the ge-1/2/0.0 interface on Device B.

```
user@B# deactivate interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# commit
```
2. Check Device B's routing table.

```
user@B> show route protocol static
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.47.0/24    *[Static/25] 02:06:24
                  > to 192.168.2.2 via fe-1/2/1.2
```

Meaning The backup route has become the active route.

Related Documentation

- [Examples: Configuring Static Routes on page 7](#)
- [Example: Configuring Static Routing on Logical Systems on page 16](#)

Example: Controlling Static Routes in Routing and Forwarding Tables

- [Understanding Static Route Control in Routing and Forwarding Tables on page 27](#)
- [Example: Preventing a Static Route from Being Readvertised on page 28](#)

Understanding Static Route Control in Routing and Forwarding Tables

You can control the importation of static routes into the routing and forwarding tables in a number of ways. Primary ways include assigning one or more of the following attributes to the route:

- **retain**—Keeps the route in the forwarding table after the routing process shuts down or the device reboots.
- **no-readvertise**—Prevents the route from being readvertised to other routing protocols.
- **passive**—Rejects traffic destined for the route.

This topic includes the following sections:

- [Route Retention on page 27](#)
- [Readvertisement Prevention on page 28](#)
- [Forced Rejection of Passive Route Traffic on page 28](#)

Route Retention

By default, static routes are not retained in the forwarding table when the routing process shuts down. When the routing process starts up again, any routes configured as static

routes must be added to the forwarding table again. To avoid this latency, routes can be flagged as **retain**, so that they are kept in the forwarding table even after the routing process shuts down. Retention ensures that the routes are always in the forwarding table, even immediately after a system reboot.

Readvertisement Prevention

Static routes are eligible for readvertisement by other routing protocols by default. In a stub area where you might not want to readvertise these static routes under any circumstances, you can flag the static routes as **no-readvertise**.

Forced Rejection of Passive Route Traffic

Generally, only active routes are included in the routing and forwarding tables. If a static route's next-hop address is unreachable, the route is marked **passive**, and it is not included in the routing or forwarding tables. To force a route to be included in the routing tables regardless of next-hop reachability, you can flag the route as **passive**. If a route is flagged **passive** and its next-hop address is unreachable, the route is included in the routing table, and all traffic destined for the route is rejected.

Example: Preventing a Static Route from Being Readvertised

This example shows how to prevent a static route from being readvertised into OSPF, thereby preventing the route from appearing in the routing and forwarding tables.

- [Requirements on page 28](#)
- [Overview on page 28](#)
- [Configuration on page 29](#)
- [Verification on page 33](#)

Requirements


In this example, no special configuration beyond device initialization is required.

Overview

This example shows how to configure a routing policy that readvertises static routes into OSPF, with the exception of one static route that is not readvertised because it is tagged with the **no-readvertise** statement.

[Figure 5 on page 29](#) shows the sample network.

Figure 5: Customer Routes Connected to a Service Provider

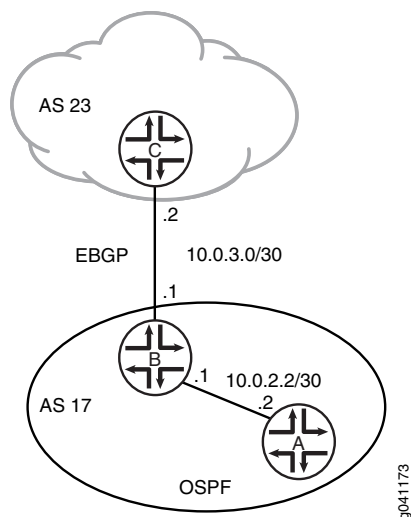

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device A
set interfaces fe-1/2/0 unit 4 description A->B
set interfaces fe-1/2/0 unit 4 family inet address 10.0.2.2/30
set protocols ospf area 0.0.0.0 interface fe-1/2/0.4

Device B
set interfaces fe-1/2/0 unit 3 description B->A
set interfaces fe-1/2/0 unit 3 family inet address 10.0.2.1/30
set interfaces fe-1/2/1 unit 6 description B->C
set interfaces fe-1/2/1 unit 6 family inet address 10.0.3.1/30
set protocols bgp group ext type external
set protocols bgp group ext peer-as 23
set protocols bgp group ext neighbor 10.0.3.2
set protocols ospf export send-static
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set policy-options policy-statement send-static from protocol static
set policy-options policy-statement send-static then accept
set routing-options static route 0.0.0.0/0 next-hop 10.0.3.2
set routing-options static route 192.168.0.0/24 next-hop 10.0.3.2
set routing-options static route 192.168.0.0/24 no-readvertise
set routing-options autonomous-system 17

Device C
set interfaces fe-1/2/0 unit 7 description B->C
set interfaces fe-1/2/0 unit 7 family inet address 10.0.3.2/30
set interfaces lo0 unit 5 family inet address 192.168.0.1/32
set protocols bgp group ext type external
set protocols bgp group ext peer-as 17
set protocols bgp group ext neighbor 10.0.3.1
set routing-options autonomous-system 23

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#).

To configure Device A:

1. Configure the interface to Device B.

```
[edit interfaces fe-1/2/0 unit 4]
user@A# set description A->B
user@A# set family inet address 10.0.2.2/30
```
2. Configure OSPF to form an OSPF peer relationship with Device B.

```
[edit protocols ospf area 0.0.0.0]
user@A# set interface fe-1/2/0.4
```

Step-by-Step Procedure To configure Device B:

1. Configure the interfaces to Device A and Device C.

```
[edit interfaces]
user@B# set fe-1/2/0 unit 3 description B->A
user@B# set fe-1/2/0 unit 3 family inet address 10.0.2.1/30
user@B# set fe-1/2/1 unit 6 description B->C
user@B# set fe-1/2/1 unit 6 family inet address 10.0.3.1/30
```
2. Configure one or more static routes and the autonomous system (AS) number.

```
[edit routing-options]
user@B# set static route 0.0.0.0/0 next-hop 10.0.3.2
user@B# set static route 192.168.0.0/24 next-hop 10.0.3.2
user@B# set autonomous-system 17
```
3. Configure the routing policy.

This policy exports static routes from the routing table into OSPF.

```
[edit policy-options policy-statement send-static]
user@B# set from protocol static
user@B# set then accept
```
4. Include the **no-readvertise** statement to prevent the 192.168.0.0/24 route from being exported into OSPF.

```
[edit routing-options]
user@B# set static route 192.168.0.0/24 no-readvertise
```
5. Configure the routing protocols.

The BGP configuration forms an external BGP (EBGP) peer relationship with Device C.

The OSPF configuration forms an OSPF peer relationship with Device A and applies the **send-static** routing policy.

```
[edit protocols]
user@B# set bgp group ext type external
user@B# set bgp group ext peer-as 23
user@B# set bgp group ext neighbor 10.0.3.2
```



```

user@B# set ospf export send-static
user@B# set ospf area 0.0.0.0 interface fe-1/2/0.3

```

Step-by-Step Procedure

To configure Device C:

1. Create the interface to Device B, and configure the loopback interface.

```

[edit interfaces ]
user@C# set fe-1/2/0 unit 7 description B->C
user@C# set fe-1/2/0 unit 7 family inet address 10.0.3.2/30
user@C# set lo0 unit 5 family inet address 192.168.0.1/32

```

2. Configure the EBGP peering session with Device B.

```

[edit protocols bgp group ext]
user@C# set type external
user@C# set peer-as 17
user@C# set neighbor 10.0.3.1

```

3. Configure the AS number.

```

[edit routing-options]
user@C# set autonomous-system 23

```

Results Confirm your configuration by issuing the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Device A

```

user@A# show interfaces
fe-1/2/0 {
  unit 4 {
    description A->B;
    family inet {
      address 10.0.2.2/30;
    }
  }
}

user@A# show protocols
ospf {
  area 0.0.0.0 {
    interface fe-1/2/0.4;
  }
}

```

Device B

```

user@B# show interfaces
interfaces {
  fe-1/2/0 {
    unit 3 {
      description B->A;
      family inet {
        address 10.0.2.1/30;
      }
    }
  }
  fe-1/2/1 {
    unit 6 {

```

```
        description B->C;
        family inet {
            address 10.0.3.1/30;
        }
    }
}

user@B# show policy-options
policy-statement send-static {
    from protocol static;
    then accept;
}

user@B# show protocols
bgp {
    group ext {
        type external;
        peer-as 23;
        neighbor 10.0.3.2;
    }
}
ospf {
    export send-static;
    area 0.0.0.0 {
        interface fe-1/2/0.3;
    }
}

user@B# show routing-options
static {
    route 0.0.0.0/0 next-hop 10.0.3.2;
    route 192.168.0.0/24 {
        next-hop 10.0.3.2;
        no-readvertise;
    }
}
autonomous-system 17;
```

Device C

```
user@C# show interfaces
fe-1/2/0 {
    unit 7 {
        description B->C;
        family inet {
            address 10.0.3.2/30;
        }
    }
}
lo0 {
    unit 5 {
        family inet {
            address 192.168.0.1/32;
        }
    }
}

user@C# show protocols
```

```

bgp {
  group ext {
    type external;
    peer-as 17;
    neighbor 10.0.3.1;
  }
}

user@C# show routing-options
autonomous-system 23;

```

If you are done configuring the devices, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

Checking the Routing Table

Purpose Make sure that the **no-readvertise** statement is working.

- Action** 1. On Device A, run the **show route protocol ospf** command to make sure that the 192.168.0.0/24 route does not appear in Device A's routing table.

```

user@A> show route protocols ospf
inet.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[OSPF/150] 00:03:15, metric 0, tag 0
                  > to 10.0.2.1 via fe-1/2/0.4
224.0.0.5/32      *[OSPF/10] 00:04:07, metric 1
                  MultiRecv

```

2. On Device B, deactivate the **no-readvertise** statement.

```

user@B# deactivate routing-options static route 192.168.0.0/24 no-readvertise

```

3. On Device A, rerun the **show route protocol ospf** command to make sure that the 192.168.0.0/24 route appears in Device A's routing table.

```

user@A> show route protocols ospf
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[OSPF/150] 00:04:24, metric 0, tag 0
                  > to 10.0.2.1 via fe-1/2/0.4
192.168.0.0/24    *[OSPF/150] 00:00:15, metric 0, tag 0
                  > to 10.0.2.1 via fe-1/2/0.4
224.0.0.5/32      *[OSPF/10] 00:05:16, metric 1
                  MultiRecv

```

Meaning The **no-readvertise** statement is working as expected.

- Related Documentation**
- [Examples: Configuring Static Routes on page 7](#)
 - [Example: Configuring Static Routing on Logical Systems on page 16](#)
 - [Example: Configuring Static Route Preferences and Qualified Next Hops on page 21](#)

Examples: Creating a Routing Table and Populating It with Routes

- [Understanding Junos OS Routing Tables on page 34](#)
- [Example: Creating Routing Tables on page 35](#)
- [Example: Importing Direct and Static Routes Into a Routing Instance on page 37](#)

Understanding Junos OS Routing Tables

Junos OS automatically creates and maintains several routing tables. Each routing table is used for a specific purpose. In addition to these automatically created routing tables, you can create your own routing tables.

Each routing table populates a portion of the forwarding table. Thus, the forwarding table is partitioned based on routing tables. This allows for specific forwarding behavior for each routing table. For example, for VPNs, each VPN-based routing table has its own VPN-specific partition in the forwarding table.

It is common for the routing software to maintain unicast routes and multicast routes in different routing tables. You also might have policy considerations that would lead you to create separate routing tables to manage the propagation of routing information.

Creating routing tables is optional. If you do not create any, Junos OS uses its default routing tables, which are as follows:

- **inet.0**—For IP version 4 (IPv4) unicast routes. This table stores interface local and direct routes, static routes, and dynamically learned routes.
- **inet.1**—For the IPv4 multicast forwarding cache. This table stores the IPv4 (S,G) group entries that are dynamically created as a result of join state information.
- **inet.2**—For subsequent address family indicator (SAFI) 2 routes, when multiprotocol BGP (MBGP) is enabled. This table stores unicast routes that are used for multicast reverse-path-forwarding (RPF) lookup. The routes in this table can be used by the Distance Vector Multicast Routing Protocol (DVMRP), which requires a specific RPF table. In contrast, Protocol Independent Multicast (PIM) does not need this table because it can perform RPF checks against the inet.0 table. You can import routes from inet.0 into inet.2 using routing information base (RIB) groups, or install routes directly into inet.2 from a multicast routing protocol.
- **inet.3**—For IPv4 MPLS. This table stores the egress address of an MPLS label-switched path (LSP), the LSP name, and the outgoing interface name. This routing table is used only when the local device is the ingress node to an LSP.
- **inet6.0**—For IP version 6 (IPv6) unicast routes. This table stores interface local and direct routes, static routes, and dynamically learned routes.
- **instance-name.inet.0**—If you configure a routing instance, Junos OS creates the default unicast routing table **instance-name.inet.0**.
- **instance-name.inetflow.0**—If you configure a flow route, Junos OS creates the flow routing table **instance-name.inetflow.0**.

- **bgp.l2vpn.0**—For Layer 2 VPN routes learned from BGP. This table stores routes learned from other provider edge (PE) routers. The Layer 2 routing information is copied into Layer 2 VPN routing and forwarding instances (VRFs) based on target communities.
- **bgp.l3vpn.0**—For Layer 3 VPN routes learned from BGP. This table stores routes learned from other PE routers. Routes in this table are copied into a Layer 3 VRF when there is a matching route table.
- **mpls.0**—For MPLS label switching operations. This table is used when the local device is a transit router.
- **iso.0**—For IS-IS routes. When you are using IS-IS to support IP routing, this table contains only the local device's network entity title (NET).
- **juniper_private**—For Junos OS to communicate internally between the Routing Engine and PIC hardware.

Example: Creating Routing Tables

This example shows how to create a custom routing table.

- [Requirements on page 35](#)
- [Overview on page 35](#)
- [Configuration on page 36](#)
- [Verification on page 36](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview

Creating routing tables is optional. You might have policy considerations that would lead you to create separate routing tables to manage the propagation of routing information. This capability is rarely used, but it is demonstrated here for completeness.

If you do not create any routing tables, Junos OS uses its default routing tables.



NOTE: If you want to add static, aggregate, generated, or martian routes only to the default IPv4 unicast routing table (**inet.0**), you do not have to create any routing tables because, by default, these routes are added to **inet.0**. You can add these routes by including the **static**, **aggregate**, **generate**, and **martians** statements.

To explicitly create a routing table, include the **rib** statement and child statements under the **rib** statement.

The routing table name, **routing-table-name**, includes the protocol family, optionally followed by a period and a number. The protocol family can be **inet** for the IPv4 family, **inet6** for the IPv6 family, or **iso** for the International Standards Organization (ISO) protocol family. The number represents the routing instance. The first instance is 0.

This example shows how to configure a custom IPv4 routing table called `inet.14`. The example also shows how to populate the routing table with a single static route.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options rib inet.14 static route 10.2.0.0/16 discard
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the Junos OS CLI User Guide*.

To create a routing table:

1. Configure the routing table.

```
[edit routing-options]  
user@host# set rib inet.14 static route 10.2.0.0/16 discard
```
2. If you are done configuring the device, commit the configuration.

```
[edit]  
user@host# commit
```

Confirm your configuration by issuing the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options  
rib inet.14 {  
  static {  
    route 10.2.0.0/16 discard;  
  }  
}
```

Verification

Confirm that the configuration is working properly.

Checking the Routing Table

Purpose Make sure that the static route appears in the custom routing table.

Action

```
user@host> show route table inet.14  
inet.14: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)  
Restart Complete  
+ = Active Route, - = Last Active, * = Both  
  
10.2.0.0/16          *[Static/5] 00:00:09  
                    Discard
```

Meaning The static route is in the custom routing table.

Example: Importing Direct and Static Routes Into a Routing Instance

This example shows how to populate the routing table that is created when you configure a virtual router.

- [Requirements on page 37](#)
- [Overview on page 37](#)
- [Configuration on page 37](#)
- [Verification on page 40](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview

You can install routes into more than one routing table. For example, you might want a simple configuration that allows you to install a static route into the default routing table **inet.0**, as well as a second routing table **vpna.inet.0**. Instead of configuring the same static route for each routing table, you can use routing table groups to insert the route into multiple tables. To create a routing table group, include the **rib-groups** statement.

This example shows how to export static routes, direct routes, and local routes from the default IPv4 unicast routing table (**inet.0**) and import them into the IPv4 unicast routing table of a virtual router called **vpna** (**vpna.inet.0**).



NOTE: To explicitly create a routing table, include the **rib** statement. In this case, you do not need to use the **rib** statement because when you configure a routing instance, Junos OS automatically creates the routing table **instance-name.inet.0**.

In this example, Device A and Device B are directly connected to each other. Device A also has a virtual router configured called **vpna**. Device A's **inet.0** routing table has direct and local routes (also known as interface routes). These routes are imported into **vpna**'s **inet.0** routing table (**vpna.inet.0**). Device A also has a static route configured. This static route is also imported into **vpna.inet.0**.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
Device A    set interfaces fe-1/2/0 unit 4 description A->B
            set interfaces fe-1/2/0 unit 4 family inet address 10.0.2.2/30
            set interfaces lo0 unit 1 family inet address 1.1.1.1/32
            set routing-instances vpna instance-type virtual-router
            set routing-options interface-routes rib-group inet group1
            set routing-options static rib-group group1
```

```
set routing-options static route 192.168.1.0/24 discard
set routing-options rib-groups group1 import-rib inet.0
set routing-options rib-groups group1 import-rib vpn.0
```

Device B

```
set interfaces fe-1/2/0 unit 3 description B->A
set interfaces fe-1/2/0 unit 3 family inet address 10.0.2.1/30
set interfaces lo0 unit 2 family inet address 2.2.2.2/32
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#)*.

To configure this example:

1. Configure the routing instance.

```
[edit routing-instances]
user@A# set routing-instances vpn instance-type virtual-router
```

2. Configure the interfaces.

```
[edit interfaces]
user@A# set interfaces fe-1/2/0 unit 4 description A->B
user@A# set interfaces fe-1/2/0 unit 4 family inet address 10.0.2.2/30
user@A# set interfaces lo0 unit 1 family inet address 1.1.1.1/32
```

3. Configure one or more static routes.

```
[edit routing-options]
user@A# set routing-options static route 192.168.1.0/24 discard
```

4. Include the direct and local routes in a routing table group called group1.

The **interface-routes** statement specifies the direct and local routes to match against.

```
[edit routing-options]
user@A# set routing-options interface-routes rib-group inet group1
```

5. Include all static routes in the group1 routing table group.

The **static** statement specifies the protocol (static) to match against.

```
[edit routing-options]
user@A# set routing-options static rib-group group1
```

6. Configure the primary routing table for group1.

The primary routing table determines the address family of the routing table group. To configure an IPv4 group, specify **inet.0** as the primary table. To configure an IPv6 group, specify **inet6.0** as the primary routing table.

```
[edit routing-options]
user@A# set routing-options rib-groups group1 import-rib inet.0
```

7. Configure the secondary routing table for group1.

```
[edit routing-options]
user@A# set routing-options rib-groups group1 import-rib vpn.0
```

8. If you are done configuring the device, commit the configuration.


```
[edit routing-options]
user@A# commit
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure Device B:

1. Configure the interfaces.

```
[edit interfaces]
user@B# set fe-1/2/0 unit 3 description B->A
user@B# set fe-1/2/0 unit 3 family inet address 10.0.2.1/30

user@B# set lo0 unit 2 family inet address 2.2.2.2/32
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@B# commit
```

Confirm your configuration by issuing the **show interfaces**, **show routing-instances**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@A# show interfaces
fe-1/2/0 {
  unit 4 {
    description A->B;
    family inet {
      address 10.0.2.2/30;
    }
  }
}
lo0 {
  unit 1 {
    family inet {
      address 1.1.1.1/32;
    }
  }
}

user@A# show routing-instances
vpna {
  instance-type virtual-router;
}

user@A# show routing-options
interface-routes {
  rib-group inet group1;
}
static {
  rib-group group1;
  route 192.168.1.0/24 discard;
}
```

```
rib-groups {
  group1 {
    import-rib [ inet.0 vpna.inet.0 ];
  }
}

user@B# show interfaces
fe-1/2/0 {
  unit 3 {
    description B->A;
    family inet {
      address 10.0.2.1/30;
    }
  }
}
lo0 {
  unit 2 {
    family inet {
      address 2.2.2.2/32;
    }
  }
}
```

Verification

Confirm that the configuration is working properly.

Checking the Routing Tables

Purpose Make sure that the expected routes appear in the routing tables.

Action user@A> show route table inet.0

```
inet.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
1.1.1.1/32      *[Direct/0] 02:51:24
                 > via lo0.1
10.0.2.0/30     *[Direct/0] 03:19:06
                 > via fe-1/2/0.4
10.0.2.2/32     *[Local/0] 03:19:07
                 Local via fe-1/2/0.4
192.168.1.0/24  *[Static/5] 00:44:21
                 Discard
```

user@A> show route table vpna.inet.0

```
vpna.inet.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
1.1.1.1/32      *[Direct/0] 02:35:39
                 > via lo0.1
10.0.2.0/30     *[Direct/0] 02:35:39
                 > via fe-1/2/0.4
10.0.2.2/32     *[Local/0] 02:35:39
                 Local via fe-1/2/0.4
```

```
192.168.1.0/24      *[Static/5] 00:44:28
                    Discard
```

Meaning The static route and the interface routes appear in both routing tables.

Related Documentation

- [Examples: Configuring Static Routes on page 7](#)

Example: Configuring Point-to-Multipoint LSPs with Static Routes


- [Understanding Point-to-Multipoint LSPs on page 41](#)
- [Point-to-Multipoint LSP Configuration Overview on page 42](#)
- [Example: Configuring an RSVP-Signaled Point-to-Multipoint LSP on page 42](#)

Understanding Point-to-Multipoint LSPs

A point-to-multipoint MPLS label-switched path (LSP) is an LDP-signaled or RSVP-signaled LSP with a single source and multiple destinations. By taking advantage of the MPLS packet replication capability of the network, point-to-multipoint LSPs avoid unnecessary packet replication at the inbound (ingress) router. Packet replication takes place only when packets are forwarded to two or more different destinations requiring different network paths.

This process is illustrated in [Figure 6 on page 41](#). Device PE1 is configured with a point-to-multipoint LSP to Routers PE2, PE3, and PE4. When Device PE1 sends a packet on the point-to-multipoint LSP to Routers P1 and P2, Device P1 replicates the packet and forwards it to Routers PE2 and PE3. Device P2 sends the packet to Device PE4.

Figure 6: Point-to-Multipoint LSPs

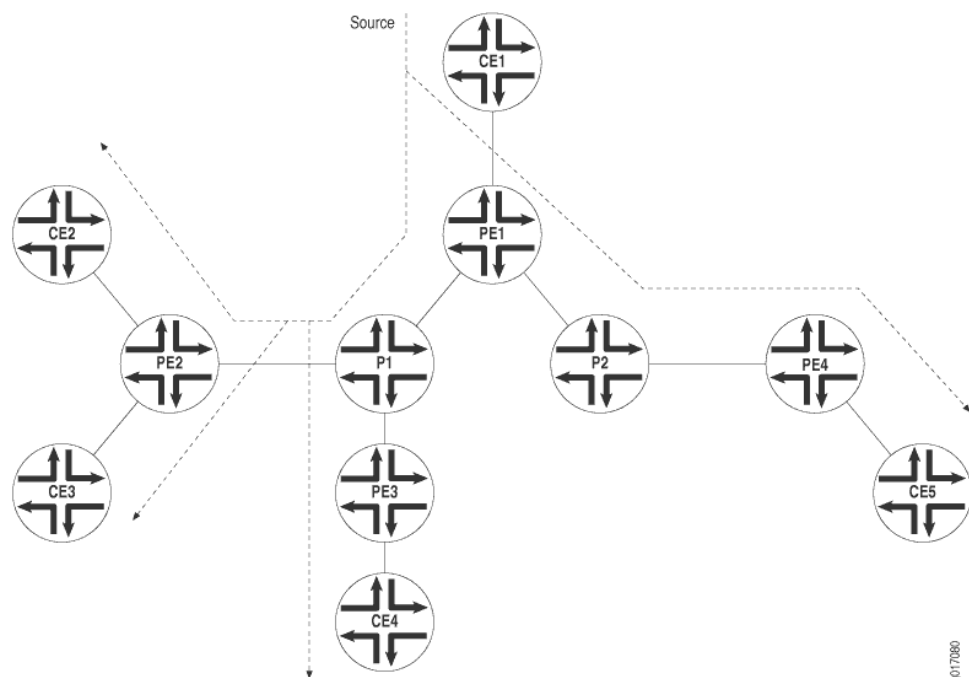

Following are some of the properties of point-to-multipoint LSPs:

- A point-to-multipoint LSP allows you to use MPLS for point-to-multipoint data distribution. This functionality is similar to that provided by IP multicast.
- You can add and remove branch LSPs from a main point-to-multipoint LSP without disrupting traffic. The unaffected parts of the point-to-multipoint LSP continue to function normally.
- You can configure a node to be both a transit and an outbound (egress) router for different branch LSPs of the same point-to-multipoint LSP.
- You can enable link protection on a point-to-multipoint LSP. Link protection can provide a bypass LSP for each of the branch LSPs that make up the point-to-multipoint LSP. If any primary paths fail, traffic can be quickly switched to the bypass.
- You can configure subpaths either statically or dynamically.
- You can enable graceful restart on point-to-multipoint LSPs.

Point-to-Multipoint LSP Configuration Overview

To set up a point-to-multipoint LSP:

1. Configure the primary LSP from the ingress router and the branch LSPs that carry traffic to the egress routers.
2. Specify a pathname on the primary LSP and this same path name on each branch LSP.



NOTE: By default, the branch LSPs are dynamically signaled by means of Constrained Shortest Path First (CSPF) and require no configuration. You can alternatively configure the branch LSPs as static paths.

Example: Configuring an RSVP-Signaled Point-to-Multipoint LSP

This example shows how to configure a collection of paths to create an RSVP-signaled point-to-multipoint label-switched path (LSP).

- [Requirements on page 42](#)
- [Overview on page 42](#)
- [Configuration on page 43](#)
- [Verification on page 59](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview

In this example, multiple routing devices serve as the transit, branch, and leaf nodes of a single point-to-multipoint LSP. On the provider edge (PE), Device PE1 is the ingress

node. The branches go from PE1 to PE2, PE1 to PE3, and PE1 to PE4. Static unicast routes on the ingress node (PE1) point to the egress nodes.

This example also demonstrates static routes with a next hop that is a point-to-multipoint LSP, using the `p2mp-lsp-next-hop` statement. This is useful when implementing filter-based forwarding.




NOTE: Another option is to use the `lsp-next-hop` statement to configure a regular point-to-point LSP to be the next hop. Though not shown in this example, you can optionally assign an independent preference and metric to the next hop.

Topology Diagram

Figure 7 on page 43 shows the topology used in this example.

Figure 7: RSVP-Signaled Point-to-Multipoint LSP

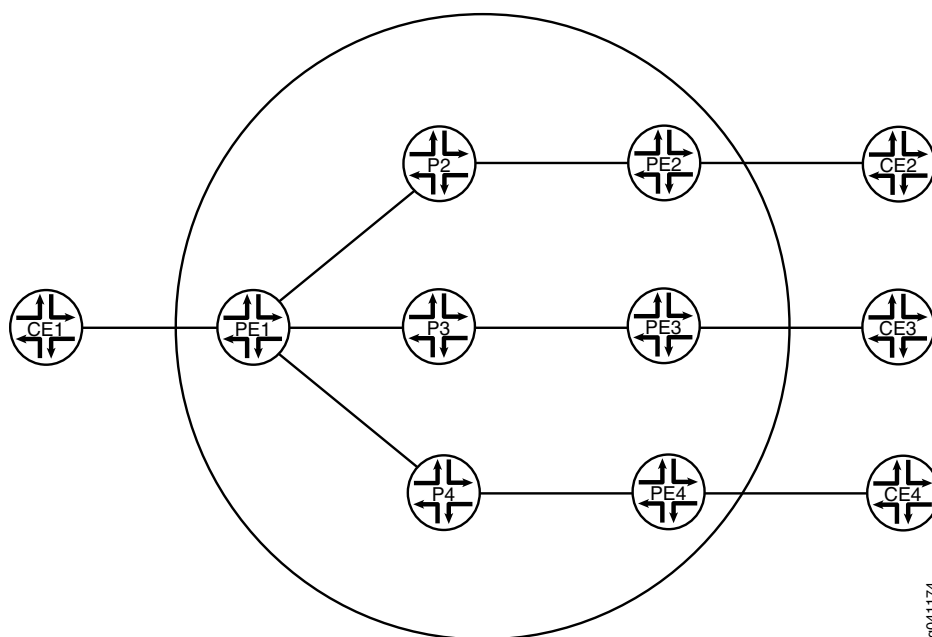

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device PE1

```
set interfaces ge-2/0/2 unit 0 description PE1-to-CE1
set interfaces ge-2/0/2 unit 0 family inet address 10.0.244.10/30
set interfaces fe-2/0/10 unit 1 description PE1-to-P2
set interfaces fe-2/0/10 unit 1 family inet address 2.2.2.1/24
set interfaces fe-2/0/10 unit 1 family mpls
set interfaces fe-2/0/9 unit 8 description PE1-to-P3
```

```
set interfaces fe-2/0/9 unit 8 family inet address 6.6.6.1/24
set interfaces fe-2/0/9 unit 8 family mpls
set interfaces fe-2/0/8 unit 9 description PE1-to-P4
set interfaces fe-2/0/8 unit 9 family inet address 3.3.3.1/24
set interfaces fe-2/0/8 unit 9 family mpls
set interfaces lo0 unit 1 family inet address 100.10.10.10/32
set protocols rsvp interface fe-2/0/10.1
set protocols rsvp interface fe-2/0/9.8
set protocols rsvp interface fe-2/0/8.9
set protocols rsvp interface lo0.1
set protocols mpls traffic-engineering bgp-igp
set protocols mpls label-switched-path PE1-PE2 to 100.50.50.50
set protocols mpls label-switched-path PE1-PE2 link-protection
set protocols mpls label-switched-path PE1-PE2 p2mp p2mp1
set protocols mpls label-switched-path PE1-PE3 to 100.70.70.70
set protocols mpls label-switched-path PE1-PE3 link-protection
set protocols mpls label-switched-path PE1-PE3 p2mp p2mp1
set protocols mpls label-switched-path PE1-PE4 to 100.40.40.40
set protocols mpls label-switched-path PE1-PE4 link-protection
set protocols mpls label-switched-path PE1-PE4 p2mp p2mp1
set protocols mpls interface fe-2/0/10.1
set protocols mpls interface fe-2/0/9.8
set protocols mpls interface fe-2/0/8.9
set protocols mpls interface lo0.1
set protocols ospf traffic-engineering
set protocols ospf area 0.0.0.0 interface ge-2/0/2.0
set protocols ospf area 0.0.0.0 interface fe-2/0/10.1
set protocols ospf area 0.0.0.0 interface fe-2/0/9.8
set protocols ospf area 0.0.0.0 interface fe-2/0/8.9
set protocols ospf area 0.0.0.0 interface lo0.1
set routing-options static route 5.5.5.0/24 p2mp-lsp-next-hop p2mp1
set routing-options static route 7.7.7.0/24 p2mp-lsp-next-hop p2mp1
set routing-options static route 4.4.4.0/24 p2mp-lsp-next-hop p2mp1
set routing-options router-id 100.10.10.10
```

Device CE1	<pre>set interfaces ge-1/3/2 unit 0 family inet address 10.0.244.9/30 set interfaces ge-1/3/2 unit 0 description CE1-to-PE1 set routing-options static route 10.0.104.8/30 next-hop 10.0.244.10 set routing-options static route 10.0.134.8/30 next-hop 10.0.244.10 set routing-options static route 10.0.224.8/30 next-hop 10.0.244.10</pre>
Device CE2	<pre>set interfaces ge-1/3/3 unit 0 family inet address 10.0.224.9/30 set interfaces ge-1/3/3 unit 0 description CE2-to-PE2 set routing-options static route 10.0.244.8/30 next-hop 10.0.224.10</pre>
Device CE3	<pre>set interfaces ge-2/0/1 unit 0 family inet address 10.0.134.9/30 set interfaces ge-2/0/1 unit 0 description CE3-to-PE3 set routing-options static route 10.0.244.8/30 next-hop 10.0.134.10</pre>
Device CE4	<pre>set interfaces ge-3/1/3 unit 0 family inet address 10.0.104.10/30 set interfaces ge-3/1/3 unit 0 description CE4-to-PE4 set routing-options static route 10.0.244.8/30 next-hop 10.0.104.9</pre>

*Configuring the Ingress Label-Switched Router (LSR) (Device PE1)***Step-by-Step
Procedure**

To configure Device PE1:

1. Configure the interfaces, interface encapsulation, and protocol families.

```
[edit interfaces]
user@PE1# set ge-2/0/2 unit 0 description PE1-to-CE1
user@PE1# set ge-2/0/2 unit 0 family inet address 10.0.244.10/30
user@PE1# set fe-2/0/10 unit 1 description PE1-to-P2
user@PE1# set fe-2/0/10 unit 1 family inet address 2.2.2.1/24
user@PE1# set fe-2/0/10 unit 1 family mpls
user@PE1# set fe-2/0/9 unit 8 description PE1-to-P3
user@PE1# set fe-2/0/9 unit 8 family inet address 6.6.6.1/24
user@PE1# set fe-2/0/9 unit 8 family mpls
user@PE1# set fe-2/0/8 unit 9 description PE1-to-P4
user@PE1# set fe-2/0/8 unit 9 family inet address 3.3.3.1/24
user@PE1# set fe-2/0/8 unit 9 family mpls
user@PE1# set lo0 unit 1 family inet address 100.10.10.10/32
```

2. Enable RSVP, MPLS, and OSPF on the interfaces.

```
[edit protocols]
user@PE1# set rsvp interface fe-2/0/10.1
user@PE1# set rsvp interface fe-2/0/9.8
user@PE1# set rsvp interface fe-2/0/8.9
user@PE1# set rsvp interface lo0.1
user@PE1# set mpls interface fe-2/0/10.1
user@PE1# set mpls interface fe-2/0/9.8
user@PE1# set mpls interface fe-2/0/8.9
user@PE1# set mpls interface lo0.1
user@PE1# set ospf area 0.0.0.0 interface ge-2/0/2.0
user@PE1# set ospf area 0.0.0.0 interface fe-2/0/10.1
user@PE1# set ospf area 0.0.0.0 interface fe-2/0/9.8
user@PE1# set ospf area 0.0.0.0 interface fe-2/0/8.9
user@PE1# set ospf area 0.0.0.0 interface lo0.1
```

3. Configure the MPLS point-to-multipoint LSPs.

```
[edit protocols]
user@PE1# set mpls label-switched-path PE1-PE2 to 100.50.50.50
user@PE1# set mpls label-switched-path PE1-PE2 p2mp p2mp1
user@PE1# set mpls label-switched-path PE1-PE3 to 100.70.70.70
user@PE1# set mpls label-switched-path PE1-PE3 p2mp p2mp1
user@PE1# set mpls label-switched-path PE1-PE4 to 100.40.40.40
user@PE1# set mpls label-switched-path PE1-PE4 p2mp p2mp1
```

4. (Optional) Enable link protection on the LSPs.

Link protection helps to ensure that traffic sent over a specific interface to a neighboring router can continue to reach the router if that interface fails.

```
[edit protocols]
user@PE1# set mpls label-switched-path PE1-PE2 link-protection
user@PE1# set mpls label-switched-path PE1-PE3 link-protection
user@PE1# set mpls label-switched-path PE1-PE4 link-protection
```

5. Enable MPLS to perform traffic engineering for OSPF.

```
[edit protocols]
user@PE1# set mpls traffic-engineering bgp-igp
```

This causes the ingress routes to be installed in the `inet.0` routing table. By default, MPLS performs traffic engineering for BGP only. You need to enable MPLS traffic engineering on the ingress LSR only.

6. Enable traffic engineering for OSPF.

```
[edit protocols]
user@PE1# set ospf traffic-engineering
```

This causes the shortest-path first (SPF) algorithm to take into account the LSPs configured under MPLS.

7. Configure the router ID.

```
[edit routing-options]
user@PE1# set router-id 100.10.10.10
```

8. Configure static IP unicast routes with the point-to-multipoint LSP name as the next hop for each route.

```
[edit routing-options]
user@PE1# set static route 5.5.5.0/24 p2mp-lsp-next-hop p2mp1
user@PE1# set static route 7.7.7.0/24 p2mp-lsp-next-hop p2mp1
user@PE1# set static route 4.4.4.0/24 p2mp-lsp-next-hop p2mp1
```

9. If you are done configuring the device, commit the configuration.

```
[edit]
user@PE1# commit
```

Configuring the Transit and Egress LSRs (Devices P2, P3, P4, PE2, PE3, and PE4)

Step-by-Step Procedure

To configure the transit and egress LSRs:

1. Configure the interfaces, interface encapsulation, and protocol families.

```
[edit]
user@P2# set interfaces fe-2/0/10 unit 2 description P2-to-PE1
user@P2# set interfaces fe-2/0/10 unit 2 family inet address 2.2.2.2/24
user@P2# set interfaces fe-2/0/10 unit 2 family mpls
user@P2# set interfaces fe-2/0/9 unit 10 description P2-to-PE2
user@P2# set interfaces fe-2/0/9 unit 10 family inet address 5.5.5.1/24
user@P2# set interfaces fe-2/0/9 unit 10 family mpls
user@P2# set interfaces lo0 unit 2 family inet address 100.20.20.20/32

user@PE2# set interfaces ge-2/0/3 unit 0 description PE2-to-CE2
user@PE2# set interfaces ge-2/0/3 unit 0 family inet address 10.0.224.10/30
user@PE2# set interfaces fe-2/0/10 unit 5 description PE2-to-P2
user@PE2# set interfaces fe-2/0/10 unit 5 family inet address 5.5.5.2/24
user@PE2# set interfaces fe-2/0/10 unit 5 family mpls
user@PE2# set interfaces lo0 unit 5 family inet address 100.50.50.50/32

user@P3# set interfaces fe-2/0/10 unit 6 description P3-to-PE1
```



```

user@P3# set interfaces fe-2/0/10 unit 6 family inet address 6.6.6.2/24
user@P3# set interfaces fe-2/0/10 unit 6 family mpls
user@P3# set interfaces fe-2/0/9 unit 11 description P3-to-PE3
user@P3# set interfaces fe-2/0/9 unit 11 family inet address 7.7.7.1/24
user@P3# set interfaces fe-2/0/9 unit 11 family mpls
user@P3# set interfaces lo0 unit 6 family inet address 100.60.60.60/32

```

```

user@PE3# set interfaces ge-2/0/1 unit 0 description PE3-to-CE3
user@PE3# set interfaces ge-2/0/1 unit 0 family inet address 10.0.134.10/30
user@PE3# set interfaces fe-2/0/10 unit 7 description PE3-to-P3
user@PE3# set interfaces fe-2/0/10 unit 7 family inet address 7.7.7.2/24
user@PE3# set interfaces fe-2/0/10 unit 7 family mpls
user@PE3# set interfaces lo0 unit 7 family inet address 100.70.70.70/32

```

```

user@P4# set interfaces fe-2/0/10 unit 3 description P4-to-PE1
user@P4# set interfaces fe-2/0/10 unit 3 family inet address 3.3.3.2/24
user@P4# set interfaces fe-2/0/10 unit 3 family mpls
user@P4# set interfaces fe-2/0/9 unit 12 description P4-to-PE4
user@P4# set interfaces fe-2/0/9 unit 12 family inet address 4.4.4.1/24
user@P4# set interfaces fe-2/0/9 unit 12 family mpls
user@P4# set interfaces lo0 unit 3 family inet address 100.30.30.30/32

```

```

user@PE4# set interfaces ge-2/0/0 unit 0 description PE4-to-CE4
user@PE4# set interfaces ge-2/0/0 unit 0 family inet address 10.0.104.9/30
user@PE4# set interfaces fe-2/0/10 unit 4 description PE4-to-P4
user@PE4# set interfaces fe-2/0/10 unit 4 family inet address 4.4.4.2/24
user@PE4# set interfaces fe-2/0/10 unit 4 family mpls
user@PE4# set interfaces lo0 unit 4 family inet address 100.40.40.40/32

```

2. Enable RSVP, MPLS, and OSPF on the interfaces.

```

[edit]
user@P2# set protocols rsvp interface fe-2/0/10.2
user@P2# set protocols rsvp interface fe-2/0/9.10
user@P2# set protocols rsvp interface lo0.2
user@P2# set protocols mpls interface fe-2/0/10.2
user@P2# set protocols mpls interface fe-2/0/9.10
user@P2# set protocols mpls interface lo0.2
user@P2# set protocols ospf area 0.0.0.0 interface fe-2/0/10.2
user@P2# set protocols ospf area 0.0.0.0 interface fe-2/0/9.10
user@P2# set protocols ospf area 0.0.0.0 interface lo0.2

user@PE2# set protocols rsvp interface fe-2/0/10.5
user@PE2# set protocols rsvp interface lo0.5
user@PE2# set protocols mpls interface fe-2/0/10.5
user@PE2# set protocols mpls interface lo0.5
user@PE2# set protocols ospf area 0.0.0.0 interface ge-2/0/3.0
user@PE2# set protocols ospf area 0.0.0.0 interface fe-2/0/10.5
user@PE2# set protocols ospf area 0.0.0.0 interface lo0.5

user@P3# set protocols rsvp interface fe-2/0/10.6
user@P3# set protocols rsvp interface fe-2/0/9.11
user@P3# set protocols rsvp interface lo0.6
user@P3# set protocols mpls interface fe-2/0/10.6

```

```
user@P3# set protocols mpls interface fe-2/0/9.11
user@P3# set protocols mpls interface lo0.6
user@P3# set protocols ospf area 0.0.0.0 interface fe-2/0/10.6
user@P3# set protocols ospf area 0.0.0.0 interface fe-2/0/9.11
user@P3# set protocols ospf area 0.0.0.0 interface lo0.6
```

```
user@PE3# set protocols rsvp interface fe-2/0/10.7
user@PE3# set protocols rsvp interface lo0.7
user@PE3# set protocols mpls interface fe-2/0/10.7
user@PE3# set protocols mpls interface lo0.7
user@PE3# set protocols ospf area 0.0.0.0 interface ge-2/0/1.0
user@PE3# set protocols ospf area 0.0.0.0 interface fe-2/0/10.7
user@PE3# set protocols ospf area 0.0.0.0 interface lo0.7
```

```
user@P4# set protocols rsvp interface fe-2/0/10.3
user@P4# set protocols rsvp interface fe-2/0/9.12
user@P4# set protocols rsvp interface lo0.3
user@P4# set protocols mpls interface fe-2/0/10.3
user@P4# set protocols mpls interface fe-2/0/9.12
user@P4# set protocols mpls interface lo0.3
user@P4# set protocols ospf area 0.0.0.0 interface fe-2/0/10.3
user@P4# set protocols ospf area 0.0.0.0 interface fe-2/0/9.12
user@P4# set protocols ospf area 0.0.0.0 interface lo0.3
```

```
user@PE4# set protocols rsvp interface fe-2/0/10.4
user@PE4# set protocols rsvp interface lo0.4
user@PE4# set protocols mpls interface fe-2/0/10.4
user@PE4# set protocols mpls interface lo0.4
user@PE4# set protocols ospf area 0.0.0.0 interface ge-2/0/0.0
user@PE4# set protocols ospf area 0.0.0.0 interface fe-2/0/10.4
user@PE4# set protocols ospf area 0.0.0.0 interface lo0.4
```

3. Enable traffic engineering for OSPF.

```
[edit]
user@P2# set protocols ospf traffic-engineering

user@P2# set protocols ospf traffic-engineering

user@P3# set protocols ospf traffic-engineering

user@PE2# set protocols ospf traffic-engineering

user@PE3# set protocols ospf traffic-engineering

user@PE4# set protocols ospf traffic-engineering
```

This causes the shortest-path first (SPF) algorithm to take into account the LSPs configured under MPLS.

4. Configure the router IDs.

```
[edit]
user@P2# set routing-options router-id 100.20.20.20
```

```
user@P3# set routing-options router-id 100.60.60.60
```

```
user@P4# set routing-options router-id 100.30.30.30
```

```
user@PE2# set routing-options router-id 100.50.50.50
```

```
user@PE3# set routing-options router-id 100.70.70.70
```

```
user@PE4# set routing-options router-id 100.40.40.40
```

5. If you are done configuring the devices, commit the configuration.

```
[edit]
user@host# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device PE1 user@PE1# show interfaces
ge-2/0/2 {
  unit 0 {
    description R1-to-CE1;
    family inet {
      address 10.0.244.10/30;
    }
  }
}
fe-2/0/10 {
  unit 1 {
    description PE1-to-P2;
    family inet {
      address 2.2.2.1/24;
    }
    family mpls;
  }
}
fe-2/0/9 {
  unit 8 {
    description PE1-to-P2;
    family inet {
      address 6.6.6.1/24;
    }
    family mpls;
  }
}
fe-2/0/8 {
  unit 9 {
    description PE1-to-P3;
    family inet {
      address 3.3.3.1/24;
    }
    family mpls;
  }
}
```

```
}
lo0 {
  unit 1 {
    family inet {
      address 100.10.10.10/32;
    }
  }
}

user@PE1# show protocols
rsvp {
  interface fe-2/0/10.1;
  interface fe-2/0/9.8;
  interface fe-2/0/8.9;
  interface lo0.1;
}
mpls {
  traffic-engineering bgp-igp;
  label-switched-path PE1-to-PE2 {
    to 100.50.50.50;
    link-protection;
    p2mp p2mp1;
  }
  label-switched-path PE1-to-PE3 {
    to 100.70.70.70;
    link-protection;
    p2mp p2mp1;
  }
  label-switched-path PE1-to-PE4 {
    to 100.40.40.40;
    link-protection;
    p2mp p2mp1;
  }
  interface fe-2/0/10.1;
  interface fe-2/0/9.8;
  interface fe-2/0/8.9;
  interface lo0.1;
}
ospf {
  traffic-engineering;
  area 0.0.0.0 {
    interface ge-2/0/2.0;
    interface fe-2/0/10.1;
    interface fe-2/0/9.8;
    interface fe-2/0/8.9;
    interface lo0.1;
  }
}

user@PE1# show routing-options
static {
  route 5.5.5.0/24 {
    p2mp-lsp-next-hop p2mp1;
  }
  route 7.7.7.0/24 {
    p2mp-lsp-next-hop p2mp1;
  }
}
```

```

    }
    route 4.4.4.0/24 {
        p2mp-lsp-next-hop p2mp1;
    }
}
router-id 100.10.10.10;

Device P2 user@P2# show interfaces
fe-2/0/10 {
    unit 2 {
        description P2-to-PE1;
        family inet {
            address 2.2.2.2/24;
        }
        family mpls;
    }
fe-2/0/9 {
    unit 10 {
        description P2-to-PE2;
        family inet {
            address 5.5.5.1/24;
        }
        family mpls;
    }
}
lo0 {
    unit 2 {
        family inet {
            address 100.20.20.20/32;
        }
    }
}

user@P2# show protocols
rsvp {
    interface fe-2/0/10.2;
    interface fe-2/0/9.10;
    interface lo0.2;
}
mpls {
    interface fe-2/0/10.2;
    interface fe-2/0/9.10;
    interface lo0.2;
}
ospf {
    traffic-engineering;
    area 0.0.0.0 {
        interface fe-2/0/10.2;
        interface fe-2/0/9.10;
        interface lo0.2;
    }
}

user@P2# show routing-options
router-id 100.20.20.20;

Device P3 user@P3# show interfaces

```

```
fe-2/0/10 {
  unit 6 {
    description P3-to-PE1;
    family inet {
      address 6.6.6.2/24;
    }
    family mpls;
  }
}
fe-2/0/9 {
  unit 11 {
    description P3-to-PE3;
    family inet {
      address 7.7.7.1/24;
    }
    family mpls;
  }
}
lo0 {
  unit 6 {
    family inet {
      address 100.60.60.60/32;
    }
  }
}
```

user@P3# show protocols

```
rsvp {
  interface fe-2/0/10.6;
  interface fe-2/0/9.11;
  interface lo0.6;
}
mpls {
  interface fe-2/0/10.6;
  interface fe-2/0/9.11;
  interface lo0.6;
}
ospf {
  traffic-engineering;
  area 0.0.0.0 {
    interface fe-2/0/10.6;
    interface fe-2/0/9.11;
    interface lo0.6;
  }
}
```

user@P2# show routing-options
router-id 100.60.60.60;

Device P4

```
user@P4# show interfaces
fe-2/0/10 {
  unit 3 {
    description P4-to-PE1;
    family inet {
      address 3.3.3.2/24;
    }
  }
}
```

```

        family mpls;
    }
}
fe-2/0/9 {
    unit 12 {
        description P4-to-PE4;
        family inet {
            address 4.4.4.1/24;
        }
        family mpls;
    }
}
lo0 {
    unit 3 {
        family inet {
            address 100.30.30.30/32;
        }
    }
}

```

user@P4# show protocols

```

rsvp {
    interface fe-2/0/10.3;
    interface fe-2/0/9.12;
    interface lo0.3;
}
mpls {
    interface fe-2/0/10.3;
    interface fe-2/0/9.12;
    interface lo0.3;
}
ospf {
    traffic-engineering;
    area 0.0.0.0 {
        interface fe-2/0/10.3;
        interface fe-2/0/9.12;
        interface lo0.3;
    }
}

```

user@P3# show routing-options

```
router-id 100.30.30.30;
```

Device PE2

user@PE2# show interfaces

```

ge-2/0/3 {
    unit 0 {
        description PE2-to-CE2;
        family inet {
            address 10.0.224.10/30;
        }
    }
}
fe-2/0/10 {
    unit 5 {
        description PE2-to-P2;
        family inet {

```

```
        address 5.5.5.2/24;
    }
    family mpls;
}
}
lo0 {
    unit 5 {
        family inet {
            address 100.50.50.50/32;
        }
    }
}
}
```

user@PE2# show protocols

```
rsvp {
    interface fe-2/0/10.5;
    interface lo0.5;
}
mpls {
    interface fe-2/0/10.5;
    interface lo0.5;
}
ospf {
    traffic-engineering;
    area 0.0.0.0 {
        interface ge-2/0/3.0;
        interface fe-2/0/10.5;
        interface lo0.5;
    }
}
```

user@PE2# show routing-options
router-id 100.50.50.50;

Device PE3

user@PE3# show interfaces

```
ge-2/0/1 {
    unit 0 {
        description PE3-to-CE3;
        family inet {
            address 10.0.134.10/30;
        }
    }
}
fe-2/0/10 {
    unit 7 {
        description PE3-to-P3;
        family inet {
            address 7.7.7.2/24;
        }
        family mpls;
    }
}
lo0 {
    unit 7 {
        family inet {
```



```

        address 100.70.70.70/32;
    }
}
}

```

```

user@PE3# show protocols
rsvp {
    interface fe-2/0/10.7;
    interface lo0.7;
}
mpls {
    interface fe-2/0/10.7;
    interface lo0.7;
}
ospf {
    traffic-engineering;
    area 0.0.0.0 {
        interface ge-2/0/1.0;
        interface fe-2/0/10.7;
        interface lo0.7;
    }
}

```

```

user@PE3# show routing-options
router-id 100.70.70.70;

```

Device PE4

```

user@PE4# show interfaces
ge-2/0/0 {
    unit 0 {
        description PE4-to-CE4;
        family inet {
            address 10.0.104.9/30;
        }
    }
}
fe-2/0/10 {
    unit 4 {
        description PE4-to-P4;
        family inet {
            address 4.4.4.2/24;
        }
        family mpls;
    }
}
lo0 {
    unit 4 {
        family inet {
            address 100.40.40.40/32;
        }
    }
}
}

```

```

user@PE4# show protocols
rsvp {

```

```
interface fe-2/0/10.4;
interface lo0.4;
}
mpls {
  interface fe-2/0/10.4;
  interface lo0.4;
}
ospf {
  traffic-engineering;
  area 0.0.0.0 {
    interface ge-2/0/0.0;
    interface fe-2/0/10.4;
    interface lo0.4;
  }
}

user@PE4# show routing-options
router-id 100.40.40.40;
```

Configuring Device CE1

Step-by-Step Procedure

To configure Device CE1:

1. Configure an interface to Device PE1.

```
[edit interfaces]
user@CE1# set ge-1/3/2 unit 0 family inet address 10.0.244.9/30
user@CE1# set ge-1/3/2 unit 0 description CE1-to-PE1
```

2. Configure static routes from Device CE1 to the three other customer networks, with Device PE1 as the next hop.

```
[edit routing-options]
user@CE1# set static route 10.0.104.8/30 next-hop 10.0.244.10
user@CE1# set static route 10.0.134.8/30 next-hop 10.0.244.10
user@CE1# set static route 10.0.224.8/30 next-hop 10.0.244.10
```

3. If you are done configuring the device, commit the configuration.

```
[edit]
user@CE1# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE1# show interfaces
ge-1/3/2 {
  unit 0 {
    family inet {
      address 10.0.244.9/30;
      description CE1-to-PE1;
    }
  }
}

user@CE1# show routing-options
```

```
static {
  route 10.0.104.8/30 next-hop 10.0.244.10;
  route 10.0.134.8/30 next-hop 10.0.244.10;
  route 10.0.224.8/30 next-hop 10.0.244.10;
}
```

Configuring Device CE2

Step-by-Step Procedure

To configure Device CE2:

1. Configure an interface to Device PE2.

[edit interfaces]
user@CE2# set ge-1/3/3 unit 0 family inet address 10.0.224.9/30
user@CE2# set ge-1/3/3 unit 0 description CE2-to-PE2
2. Configure a static route from Device CE2 to CE1, with Device PE2 as the next hop.

[edit routing-options]
user@CE2# set static route 10.0.244.8/30 next-hop 10.0.224.10
3. If you are done configuring the device, commit the configuration.

[edit]
user@CE2# commit

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE2# show interfaces
ge-1/3/3 {
  unit 0 {
    family inet {
      address 10.0.224.9/30;
      description CE2-to-PE2;
    }
  }
}

user@CE2# show routing-options
static {
  route 10.0.244.8/30 next-hop 10.0.224.10;
}
```

Configuring Device CE3

Step-by-Step Procedure

To configure Device CE3:

1. Configure an interface to Device PE3.

[edit interfaces]
user@CE3# set ge-2/0/1 unit 0 family inet address 10.0.134.9/30
user@CE3# set ge-2/0/1 unit 0 description CE3-to-PE3
2. Configure a static route from Device CE3 to CE1, with Device PE3 as the next hop.

[edit routing-options]

```
user@CE3# set static route 10.0.244.8/30 next-hop 10.0.134.10
```

3. If you are done configuring the device, commit the configuration.

```
[edit]  
user@CE3# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE3# show interfaces  
ge-2/0/1 {  
  unit 0 {  
    family inet {  
      address 10.0.134.9/30;  
      description CE3-to-PE3;  
    }  
  }  
}  
  
user@CE3# show routing-options  
static {  
  route 10.0.244.8/30 next-hop 10.0.134.10;  
}
```

Configuring Device CE4

Step-by-Step Procedure To configure Device CE4:

1. Configure an interface to Device PE4.

```
[edit interfaces]  
user@CE4# set ge-3/1/3 unit 0 family inet address 10.0.104.10/30  
user@CE4# set ge-3/1/3 unit 0 description CE4-to-PE4
```

2. Configure a static route from Device CE4 to CE1, with Device PE4 as the next hop.

```
[edit routing-options]  
user@CE4# set static route 10.0.244.8/30 next-hop 10.0.104.9
```

3. If you are done configuring the device, commit the configuration.

```
[edit]  
user@CE4# commit
```

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE4# show interfaces  
ge-3/1/3 {  
  unit 0 {  
    family inet {  
      address 10.0.104.10/30;  
      description CE4-to-PE4;  
    }  
  }  
}
```

```

    }
}

user@CE4# show routing-options
static {
    route 10.0.244.8/30 next-hop 10.0.104.9;
}

```

Verification

Confirm that the configuration is working properly.

- [Verifying Connectivity on page 59](#)
- [Verifying the State of the Point-to-Multipoint LSP on page 60](#)
- [Checking the Forwarding Table on page 60](#)

Verifying Connectivity

Purpose Make sure that the devices can ping each other.

Action Run the **ping** command from CE1 to the interface on CE2 connecting to PE2.

```

user@CE1> ping 10.0.224.9
PING 10.0.224.9 (10.0.224.9): 56 data bytes
64 bytes from 10.0.224.9: icmp_seq=0 ttl=61 time=1.387 ms
64 bytes from 10.0.224.9: icmp_seq=1 ttl=61 time=1.394 ms
64 bytes from 10.0.224.9: icmp_seq=2 ttl=61 time=1.506 ms
^C
--- 10.0.224.9 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.387/1.429/1.506/0.055 ms

```

Run the **ping** command from CE1 to the interface on CE3 connecting to PE3.

```

user@CE1> ping 10.0.134.9
PING 10.0.134.9 (10.0.134.9): 56 data bytes
64 bytes from 10.0.134.9: icmp_seq=0 ttl=61 time=1.068 ms
64 bytes from 10.0.134.9: icmp_seq=1 ttl=61 time=1.062 ms
64 bytes from 10.0.134.9: icmp_seq=2 ttl=61 time=1.053 ms
^C
--- 10.0.134.9 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.053/1.061/1.068/0.006 ms

```

Run the **ping** command from CE1 to the interface on CE4 connecting to PE4.

```

user@CE1> ping 10.0.104.10
PING 10.0.104.10 (10.0.104.10): 56 data bytes
64 bytes from 10.0.104.10: icmp_seq=0 ttl=61 time=1.079 ms
64 bytes from 10.0.104.10: icmp_seq=1 ttl=61 time=1.048 ms
64 bytes from 10.0.104.10: icmp_seq=2 ttl=61 time=1.070 ms
^C
--- 10.0.104.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.048/1.066/1.079/0.013 ms

```

Verifying the State of the Point-to-Multipoint LSP

Purpose Make sure that the ingress, transit, and egress LSRs are in the Up state.

Action Run the `show mpls lsp p2mp` command on all of the LSRs. Only the ingress LSP is shown here.

```
user@PE1> show mpls lsp p2mp
Ingress LSP: 1 sessions
P2MP name: p2mp1, P2MP branch count: 3
To          From          State Rt P    ActivePath    LSPname
100.40.40.40 100.10.10.10 Up    0 *           PE1-PE4
100.70.70.70 100.10.10.10 Up    0 *           PE1-PE3
100.50.50.50 100.10.10.10 Up    0 *           PE1-PE2
Total 3 displayed, Up 3, Down 0
...
```

Checking the Forwarding Table

Purpose Make sure that the routes are set up as expected by running the `show route forwarding-table` command. Only the routes to the remote customer networks are shown here.

```
user@PE1> show route forwarding-table
Routing table: default.inet
Internet:
Destination          Type RtRef Next hop          Type Index NhRef Netif
...
10.0.104.8/30         user    0 3.3.3.2          ucst  1006   6 fe-2/0/8.9
10.0.134.8/30         user    0 6.6.6.2          ucst  1010   6 fe-2/0/9.8
10.0.224.8/30         user    0 2.2.2.2          ucst  1008   6 fe-2/0/10.1
...
```

Related Documentation

- [RSVP Signaling Protocol](#)
- [Example: Configuring RSVP-Signaled Point-to-Multipoint LSPs on Logical Systems](#)

Example: Configuring Static Routes for CLNS

- [Understanding Static Routes for CLNS on page 60](#)
- [Example: Configuring Static Routes for CLNS on page 61](#)

Understanding Static Routes for CLNS

The Connectionless Network Service (CLNS) is an ISO Layer 3 protocol that uses network service access point (NSAP) reachability information instead of IPv4 or IPv6 prefixes.

You can configure static routes to exchange CLNS routes within a CLNS island. A *CLNS island* is typically an IS-IS level 1 area that is part of a single IGP routing domain. An island can contain more than one area. CLNS islands can be connected by VPNs.

Example: Configuring Static Routes for CLNS

This example shows how to configure static routes for CLNS.

- [Requirements on page 61](#)
- [Overview on page 61](#)
- [Configuration on page 61](#)
- [Verification on page 62](#)

Requirements

Before you begin, configure the network interfaces. See the *Junos OS Interfaces Configuration Guide for Security Devices*.

Overview

In this example, you configure static routes for CLNS. In the absence of an interior gateway protocol (IGP) on a certain link, a routing device might need to be configured with static routes for CLNS prefixes to be reachable by way of that link. This might be useful, for example, at an autonomous system (AS) boundary.

When you configure static routes for CLNS, consider the following tasks:

- Specify the **iso.0** routing table option to configure a primary instance CLNS static route.
- Specify the **instance-name.iso.0** routing table option to configure a CLNS static route for a particular routing instance.
- Specify the **route nsap-prefix** statement to configure the destination for the CLNS static route.
- Specify the **next-hop (interface-name | iso-net)** statement to configure the next hop, specified as an ISO network entity title (NET) or interface name.
- Include the **qualified-next-hop (interface-name | iso-net)** statement to configure a secondary backup next hop, specified as an ISO network entity title or interface name.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options rib iso.0 static iso-route 47.0005.80ff.f800.0000.ffff.ffff/152 next-hop
  47.0005.80ff.f800.0000.0108.0001.1921.6800.4212
set routing-options rib iso.0 static iso-route
  47.0005.80ff.f800.0000.0108.0001.1921.6800.4212/152 next-hop t1-0/2/2.0
set routing-options rib iso.0 static iso-route 47.0005.80ff.f800.0000.0000.0000/152
  qualified-next-hop 47.0005.80ff.f800.0000.0108.0001.1921.6800.4002 preference
  20
set routing-options rib iso.0 static iso-route 47.0005.80ff.f800.0000.0000.0000/152
  qualified-next-hop 47.0005.80ff.f800.0000.0108.0001.1921.6800.4002 metric 10
```

Step-by-Step Procedure To configure static routes for CLNS:

1. Configure the routes.

```
[edit routing-options rib iso.0 static]
user@host# set iso-route 47.0005.80ff.f800.0000.ffff.ffff/152 next-hop
47.0005.80ff.f800.0000.0108.0001.1921.6800.4212
user@host# set iso-route 47.0005.80ff.f800.0000.0108.0001.1921.6800.4212/152
next-hop t1-0/2/2.0
user@host# set iso-route 47.0005.80ff.f800.0000.0000.0000/152 qualified-next-hop
47.0005.80ff.f800.0000.0108.0001.1921.6800.4002 preference 20
user@host# set iso-route 47.0005.80ff.f800.0000.0000.0000/152 qualified-next-hop
47.0005.80ff.f800.0000.0108.0001.1921.6800.4002 metric 10
```

2. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

Results Confirm your configuration by issuing the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options
rib iso.0 {
  static {
    iso-route 47.0005.80ff.f800.0000.ffff.ffff/152 next-hop
      47.0005.80ff.f800.0000.0108.0001.1921.6800.4212;
    iso-route 47.0005.80ff.f800.0000.0108.0001.1921.6800.4212/152 next-hop t1-0/2/2.0;
    iso-route 47.0005.80ff.f800.0000.0000.0000/152 {
      qualified-next-hop 47.0005.80ff.f800.0000.0108.0001.1921.6800.4002 {
        preference 20;
        metric 10;
      }
    }
  }
}
```

Verification

Confirm that the configuration is working properly.

Checking the Routing Table

Purpose Make sure that the expected routes appear in the routing table.

Action user@host> show route table iso.0

```
iso.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

47.0005.80ff.f800.0000.0108.0001.1921.6800.4212/152
    *[Static/5] 00:00:25
    > via t1-0/2/2.0
47.0005.80ff.f800.0000.0000.0000/152
    *[Static/20] 00:04:01, metric 10, metric2 10
    > to #75 0.12.0.34.0.56 via fe-0/0/1.0
```



```
47.0005.80ff.f800.0000.ffff.ffff/104
    *[Static/5] 00:04:01, metric2 0
    > via t1-0/2/2.0
```

Meaning The static routes appear in the routing table.

CHAPTER 3

Aggregate and Generated Routes

- [Example: Summarizing Static Routes Through Route Aggregation on page 65](#)
- [Example: Conditionally Generating Static Routes on page 78](#)

Example: Summarizing Static Routes Through Route Aggregation

- [Understanding Aggregate Routes on page 65](#)
- [Example: Summarizing Routes Through Route Aggregation on page 72](#)

Understanding Aggregate Routes

Route aggregation allows you to combine groups of routes with common addresses into a single entry in the routing table. This decreases the size of the routing table as well as the number of route advertisements sent by the routing device.

An aggregate route becomes active when it has one or more *contributing routes*. A contributing route is an active route that is a more specific match for the aggregate destination. For example, for the aggregate destination **128.100.0.0/16**, routes to **128.100.192.0/19** and **128.100.67.0/24** are contributing routes, but routes to **128.0.0.0/8** and **128.0.0.0/16** are not.

A route can contribute only to a single aggregate route. However, an active aggregate route can recursively contribute to a less specific matching aggregate route. For example, an aggregate route to the destination **128.100.0.0/16** can contribute to an aggregate route to **128.96.0.0/13**.

When an aggregate route becomes active, it is installed in the routing table with the following information:

- Reject next hop—If a more-specific packet does not match a more-specific route, the packet is rejected and an ICMP unreachable message is sent to the packet's originator.
- Metric value as configured with the **aggregate** statement.
- Preference value that results from the policy filter on the primary contributor, if a filter is specified.
- AS path as configured in the **aggregate** statement, if any. Otherwise, the path is computed by aggregating the paths of all contributing routes.
- Community as configured in the **aggregate** statement, if any is specified.



NOTE: You can configure only one aggregate route for each destination prefix.

To configure aggregate routes in the default routing table (**inet.0**), include the **aggregate** statement:

```
aggregate {
  defaults {
    ... aggregate-options ...
  }
  route destination-prefix {
    policy policy-name;
    ... aggregate-options ...
  }
}
```

To configure aggregate routes in one of the other routing tables, or to explicitly configure aggregate routes in the default routing table (**inet.0**), include the **aggregate** statement:

```
rib routing-table-name {
  aggregate {
    defaults {
      ... aggregate-options ...
    }
    route destination-prefix {
      policy policy-name;
      ... aggregate-options ...
    }
  }
}
```



NOTE: You cannot configure aggregate routes for the IPv4 multicast routing table (**inet.1**) nor the IPv6 multicast routing table (**inet6.1**).

The **aggregate** statement consists of two parts:

- **defaults**—(Optional) Here you specify global aggregate route options. These are treated as global defaults and apply to all the aggregate routes you configure in the **aggregate** statement.
- **route**—Here you configure individual aggregate routes. In this part of the **aggregate** statement, you optionally can configure aggregate route options. These options apply to the individual destination only and override any options you configured in the **defaults** part of the **aggregate** statement.

When you configure an individual aggregate route in the **route** part of the **aggregate** statement, specify the destination of the route (in **route destination-prefix**) in one of the following ways:

- **network/mask-length**, where **network** is the network portion of the IP address and **mask-length** is the destination prefix length.
- **default** if this is the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.

After you have configured aggregate routes, you can have a protocol advertise the routes by configuring a policy that is then exported by a routing protocol.

You can associate a routing policy when configuring an aggregate route's destination prefix in the **routes** part of the **aggregate** statement. Doing so provides the equivalent of an import routing policy filter for the destination prefix. That is, each potential contributor to an aggregate route, along with any aggregate options, is passed through the policy filter. The policy then can accept or reject the route as a contributor to the aggregate route and, if the contributor is accepted, the policy can modify the default preferences.

The following algorithm is used to compare two aggregate contributing routes in order to determine which one is the primary or preferred contributor:

1. Compare the protocol's **preferences** of the contributing routes. The lower the preference, the better the route. This is similar to the comparison that is done while determining the best route for the routing table.
2. Compare the protocol's **preferences2** of the contributing routes. The lower preference2 value is better. If only one route has **preferences2**, then this route is preferred.
3. The preference values are the same. Proceed with a numerical comparison of the prefix values.
 - a. The primary contributor is the numerically smallest prefix value.
 - b. If the two prefixes are numerically equal, the primary contributor is the route that has the smallest prefix length value.
4. At this point, the two routes are the same. The primary contributor does not change. An additional next hop is available for the existing primary contributor.

A rejected contributor still can contribute to a less specific aggregate route. If you do not specify a policy filter, all candidate routes contribute to an aggregate route.

To associate a routing policy with an aggregate route, include the **policy** statement when configuring the route:

```
aggregate (defaults | route) {
  policy policy-name;
}
```

In the **defaults** and **route** parts of the **aggregate** statement, you can specify **aggregate-options**, which define additional information about aggregate routes that is included with the route when it is installed in the routing table. All aggregate options are optional. Aggregate options that you specify in the **defaults** part of the **aggregate** statement are treated as global defaults and apply to all the aggregate routes you configure in the **aggregate** statement. Aggregate options that you specify in the **route**

part of the **aggregate** statement override any global aggregate options and apply to that destination only.

To configure aggregate route options, include one or more of them in the **defaults** or **route** part of the **aggregate** statement:

```
[edit]
routing-options {
  aggregate {
    (defaults | route) {
      (active | passive);
      as-path <as-path> <origin (egp | igp | incomplete)> <atomic-aggregate> <aggregator
        as-number in-address>;
      community [ community-ids ];
      discard;
      (brief | full);
      (metric | metric2 | metric3 | metric4) metric <type type>;
      (preference | preference2 | color | color2) preference <type type>;
      tag string;
    }
  }
}
```

Configuring a Metric Value for Aggregate Routes

You can specify up to four metric values, starting with **metric** (for the first metric value) and continuing with **metric2**, **metric3**, and **metric4** by including one or more of the following statements:

```
aggregate (defaults | route) {
  (metric | metric2 | metric3 | metric4) metric <type type>;
}
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

In the **type** option, you can specify the type of route.

Configuring a Preference Value for Aggregate Routes

By default, aggregate routes have a preference value of 130. If the routing table contains a dynamic route to a destination that has a better (lower) preference value than this, the dynamic route is chosen as the active route and is installed in the forwarding table.

To modify the default preference value, specify a primary preference value (**preference**). You also can specify secondary preference value (**preference2**); and colors, which are even finer-grained preference values (**color** and **color2**). To do this, include one or more of the following statements:

```
aggregate (defaults | route) {
  (preference | preference2 | color | color2) preference <type type>;
}
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

The preference value can be a number in the range from 0 through 4,294,967,295 ($2^{32} - 1$) with a lower number indicating a more preferred route. For more information about preference values, see Route Preferences Overview.

In the **type** option, you can specify the type of route.

Configuring the Next Hop for Aggregate Routes

By default, when aggregate routes are installed in the routing table, the next hop is configured as a reject route. That is, the packet is rejected and an ICMP unreachable message is sent to the packet's originator.

When you configure an individual route in the **route** part of the **aggregate** statement, or when you configure the defaults for aggregate routes, you can specify a discard next hop. This means that if a more specific packet does not match a more specific route, the packet is rejected and a reject route for this destination is installed in the routing table, but ICMP unreachable messages are not sent.

Being able to discard next hops allows you to originate a summary route, which can be advertised through dynamic routing protocols, and allows you to discard received traffic that does not match a more specific route than the summary route. To discard next hops, include the **discard** option:

discard;

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Associating BGP Communities with Aggregate Routes

By default, no BGP community information is associated with aggregate routes. To associate community information with the routes, include the **community** option:

```
aggregate (defaults | route) {
  community [ community-ids ];
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement. **community-value** is the community identifier and can be a number in the range from 0 through 65,535.

community-ids is one or more community identifiers for either communities or extended communities.

The format for community identifiers is:

as-number:community-value

as-number is the AS number and can be a value in the range from 1 through 65,534.

You also can specify **community-ids** for communities as one of the following well-known community names, which are defined in RFC 1997:

- **no-export**—Routes containing this community name are not advertised outside a BGP confederation boundary.

- **no-advertise**—Routes containing this community name are not advertised to other BGP peers.
- **no-export-subconfed**—Routes containing this community name are not advertised to external BGP peers, including peers in other members' ASs inside a BGP confederation.

You can explicitly exclude BGP community information with an aggregate route using the **none** option. Include **none** when configuring an individual route in the **route** portion of the **aggregate** statement to override a **community** option specified in the **defaults** portion of the statement.



NOTE: Extended community attributes are not supported at the [edit routing-options] hierarchy level. You must configure extended communities at the [edit policy-options] hierarchy level. For information about configuring extended communities information, see the “Configuring the Extended Communities Attribute” section in the *Junos OS Policy Framework Configuration Guide*. For information about configuring 4-byte AS numbers and extended communities, see Configuring 4-Byte AS Numbers and BGP Extended Community Attributes in the *Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview*.

Associating AS Paths with Aggregate Routes

By default, the AS path for aggregate routes is built from the component routes. To manually specify the AS path and associate AS path information with the routes, include the **as-path** option:

```
aggregate (defaults | route) {  
  as-path <as-path> <origin (egp | igp | incomplete)> <atomic-aggregate> <aggregator  
    as-number in-address>;  
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

as-path is the AS path to include with the route. It can include a combination of individual AS path numbers and AS sets. Enclose sets in brackets ([]). The first AS number in the path represents the AS immediately adjacent to the local AS. Each subsequent number represents an AS that is progressively farther from the local AS, heading toward the origin of the path.



NOTE: In Junos OS Release 9.1 and later, the numeric AS range is extended to provide BGP support for 4-byte AS numbers, as defined in RFC 4893, *BGP Support for Four-octet AS Number Space*. For the AS number, you can configure a value from 1 through 4,294,967,295. All releases of Junos OS support 2-byte AS numbers. The 2-byte AS number range is 1 through 65,535 (this is a subset of the 4-byte range).

In Junos OS Release 9.2 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: *<16-bit high-order value in decimal>.<16-bit low-order value in decimal>*. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format. You can specify a value in the range from 0.0 through 65535.65535 in AS-dot notation format.

You also can specify the AS path using the BGP origin attribute, which indicates the origin of the AS path information:

- **egp**—Path information originated in another AS.
- **igp**—Path information originated within the local AS.
- **incomplete**—Path information was learned by some other means.

To attach the BGP **ATOMIC_AGGREGATE** path attribute to the aggregate route, specify the **atomic-aggregate** option. This path attribute indicates that the local system selected a less specific route rather than a more specific route.

To attach the BGP **AGGREGATOR** path attribute to the aggregate route, specify the **aggregator** option. When using this option, you must specify the last AS number that formed the aggregate route (encoded as two octets), followed by the IP address of the BGP system that formed the aggregate route.

Including AS Numbers in Aggregate Route Paths

By default, all AS numbers from all contributing paths are included in the aggregate route's path. To include only the longest common leading sequences from the contributing AS paths, include the **brief** option when configuring the route. If doing this results in AS numbers being omitted from the aggregate route, the BGP **ATOMIC_ATTRIBUTE** path attribute is included with the aggregate route.

```
aggregate (defaults | route) {
  brief;
}
```

To explicitly have all AS numbers from all contributing paths be included in the aggregate route's path, include the **full** option when configuring routes. Include this option when configuring an individual route in the **route** portion of the **aggregate** statement to override a **retain** option specified in the **defaults** portion of the statement.

```
aggregate (defaults | route) {
  full;
}
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

Configuring an OSPF Tag String for Aggregate Routes

By default, no OSPF tag strings are associated with aggregate routes. You can specify an OSPF tag string by including the **tag** option:

```
aggregate (defaults | route) {  
    tag string;  
}
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

Controlling Retention of Inactive Aggregate Routes in the Routing and Forwarding Tables

Static routes are only removed from the routing table if the next hop becomes unreachable, which happens if there are no contributing routes. To have an aggregate route remain continually installed in the routing and forwarding tables, include the **passive** option when configuring the route:

```
aggregate (defaults | route) {  
    passive;  
}
```

Routes that have been configured to remain continually installed in the routing and forwarding tables are marked with **reject** next hops when they are inactive.

To explicitly remove aggregate routes when they become inactive, include the **active** option when configuring routes. Include this option when configuring an individual route in the **route** portion of the **aggregate** statement to override a **passive** option specified in the **defaults** portion of the statement.

```
aggregate (defaults | route) {  
    active;  
}
```

Example: Summarizing Routes Through Route Aggregation

This example shows how to summarize routes by configuring aggregate routes.

- [Requirements on page 72](#)
- [Overview on page 73](#)
- [Configuration on page 73](#)
- [Verification on page 78](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

In this example, Device R1 is connected to customer networks 10.200.1.0/24 and 10.200.2.0/24. For demonstration purposes, these routes are represented in this example as loopback interfaces on Device R1.

Device R2 has static routes configured to reach Device R1's customer networks. Device R2 also has a routing policy configured to advertise all static routes to its neighbors in autonomous system (AS) 65001.


Device R3 is in AS 65001 and receives the static routes from Device R2. When Device R3 sends information about these routes to Device ISP, the information is summarized as a single aggregate route. The aggregate route is 10.200.0.0/16.

Device ISP injects a default route into AS 65001, and Device R3 advertises the default route.

This example shows the configuration for all of the devices and the step-by-step configuration on Device R3.

Figure 8 on page 73 shows the sample network.

Figure 8: Aggregate Route Advertised to an ISP

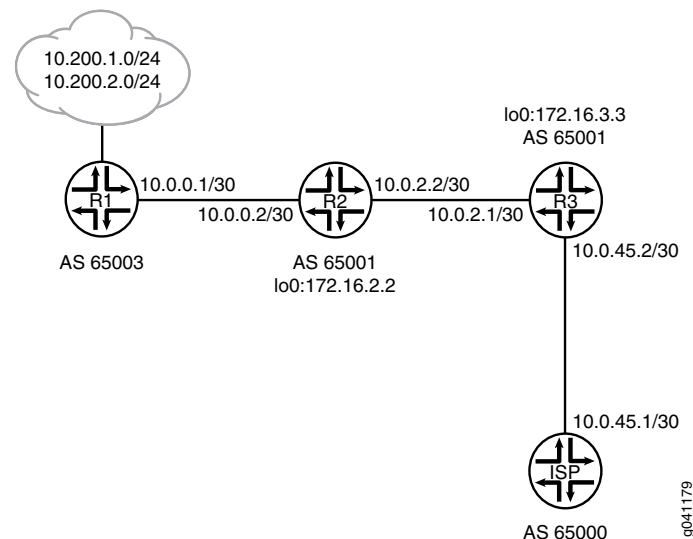

Configuration

CLI Quick Configuration	To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.
Device R1	<pre> set interfaces ge-1/2/0 unit 2 description R1->R2 set interfaces ge-1/2/0 unit 2 family inet address 10.0.0.1/30 set interfaces lo0 unit 1 family inet address 10.200.1.1/32 set interfaces lo0 unit 1 family inet address 10.200.2.2/32 </pre>

```
set protocols bgp group ext type external
set protocols bgp group ext peer-as 65001
set protocols bgp group ext neighbor 10.0.0.2
set protocols ospf area 0.0.0.0 interface ge-1/2/0.2
set routing-options autonomous-system 65003
```

Device R2

```
set interfaces ge-1/2/0 unit 1 description R2->R1
set interfaces ge-1/2/0 unit 1 family inet address 10.0.0.2/30
set interfaces ge-1/2/1 unit 4 description R2->R3
set interfaces ge-1/2/1 unit 4 family inet address 10.0.2.2/30
set interfaces lo0 unit 2 family inet address 172.16.2.2/32
set protocols bgp group int type internal
set protocols bgp group int local-address 172.16.2.2
set protocols bgp group int export send-customer-routes
set protocols bgp group int neighbor 172.16.3.3
set protocols bgp group ext type external
set protocols bgp group ext peer-as 65003
set protocols bgp group ext neighbor 10.0.0.1
set protocols ospf area 0.0.0.0 interface ge-1/2/0.1
set protocols ospf area 0.0.0.0 interface ge-1/2/1.4
set protocols ospf area 0.0.0.0 interface lo0.2 passive
set policy-options policy-statement send-customer-routes from protocol static
set policy-options policy-statement send-customer-routes then accept
set routing-options static route 10.200.1.0/24 next-hop 10.0.0.1
set routing-options static route 10.200.2.0/24 next-hop 10.0.0.1
set routing-options autonomous-system 65001
```

Device R3

```
set interfaces ge-1/2/0 unit 3 description R3->R2
set interfaces ge-1/2/0 unit 3 family inet address 10.0.2.1/30
set interfaces ge-1/2/1 unit 6 description R3->ISP
set interfaces ge-1/2/1 unit 6 family inet address 10.0.45.2/30
set interfaces lo0 unit 3 family inet address 172.16.3.3/32
set protocols bgp group ext type external
set protocols bgp group ext export send-aggregate
set protocols bgp group ext peer-as 65000
set protocols bgp group ext neighbor 10.0.45.1
set protocols bgp group int type internal
set protocols bgp group int local-address 172.16.3.3
set protocols bgp group int neighbor 172.16.2.2
set protocols ospf export send-default
set protocols ospf area 0.0.0.0 interface ge-1/2/0.3
set protocols ospf area 0.0.0.0 interface lo0.3 passive
set policy-options policy-statement send-aggregate term 1 from protocol aggregate
set policy-options policy-statement send-aggregate term 1 then accept
set policy-options policy-statement send-aggregate term suppress-specific-routes from
  route-filter 10.200.0.0/16 longer
set policy-options policy-statement send-aggregate term suppress-specific-routes then
  reject
set policy-options policy-statement send-default from route-filter 0.0.0.0/0 exact
set policy-options policy-statement send-default then accept
set routing-options aggregate route 10.200.0.0/16
set routing-options autonomous-system 65001
```

Device ISP

```
set interfaces ge-1/2/0 unit 7 family inet address 10.0.45.1/30
set protocols bgp group ext type external
```

```

set protocols bgp group ext export advertise-default
set protocols bgp group ext peer-as 65001
set protocols bgp group ext neighbor 10.0.45.2
set policy-options policy-statement advertise-default term 1 from route-filter 0.0.0.0/0
  exact
set policy-options policy-statement advertise-default term 1 then accept
set routing-options static route 0.0.0.0/0 discard
set routing-options autonomous-system 65000

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#)*.

To configure Device R3:

1. Configure the interfaces.

```

[edit interfaces]
user@R3# set ge-1/2/0 unit 3 description R3->R2
user@R3# set ge-1/2/0 unit 3 family inet address 10.0.2.1/30

user@R3# set ge-1/2/1 unit 6 description R3->ISP
user@R3# set ge-1/2/1 unit 6 family inet address 10.0.45.2/30

user@R3# set lo0 unit 3 family inet address 172.16.3.3/32

```

2. Configure the AS number.

```

[edit routing-options]
user@R3# set autonomous-system 65001

```

3. Configure the BGP session with the ISP device.

```

[edit protocols bgp group ext]
user@R3# set type external
user@R3# set peer-as 65000
user@R3# set neighbor 10.0.45.1

```

4. Configure the BGP session with Device R2.

```

[edit protocols bgp group int]
user@R3# set type internal
user@R3# set local-address 172.16.3.3
user@R3# set neighbor 172.16.2.2

```

5. Configure OSPF.

```

[edit protocols ospf area 0.0.0.0]
user@R3# set interface ge-1/2/0.3
user@R3# set interface lo0.3 passive

```

6. Configure the aggregate route.

```

[edit routing-options]
user@R3# set aggregate route 10.200.0.0/16

```

7. Configure the routing policy to advertise the aggregate route.

The first term in this policy advertises the aggregate route. The second term prevents more specific routes from being advertised.

```
[edit policy-options policy-statement send-aggregate]
user@R3# set term 1 from protocol aggregate
user@R3# set term 1 then accept
user@R3# set term suppress-specific-routes from route-filter 10.200.0.0/16 longer
user@R3# set term suppress-specific-routes then reject
```

8. Apply the aggregate route policy to the external BGP session with Device ISP.

```
[edit protocols bgp group ext]
user@R3# set export send-aggregate
```

9. Configure the routing policy to advertise the default route from Device ISP.

```
[edit policy-options policy-statement send-default]
user@R3# set from route-filter 0.0.0.0/0 exact
user@R3# set then accept
```

10. Apply the default routing policy to OSPF.

```
[edit protocols ospf]
user@R3# set export send-default
```

11. If you are done configuring the device, commit the configuration.

```
[edit]
user@R3# commit
```

Confirm your configuration by issuing the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show interfaces
ge-1/2/0 {
  unit 3 {
    description R3->R2;
    family inet {
      address 10.0.2.1/30;
    }
  }
}
ge-1/2/1 {
  unit 6 {
    description R3->ISP;
    family inet {
      address 10.0.45.2/30;
    }
  }
}
lo0 {
  unit 3 {
    family inet {
      address 172.16.3.3/32;
    }
  }
}
```

```
    }  
  }  
}  
user@R3# show protocols  
bgp {  
  group ext {  
    type external;  
    export send-aggregate;  
    peer-as 65000;  
    neighbor 10.0.45.1;  
  }  
  group int {  
    type internal;  
    local-address 172.16.3.3;  
    neighbor 172.16.2.2;  
  }  
}  
ospf {  
  export send-default;  
  area 0.0.0.0 {  
    interface ge-1/2/0.3;  
    interface lo0.3 {  
      passive;  
    }  
  }  
}  
user@R3# show policy-options  
policy-statement send-aggregate {  
  term 1 {  
    from protocol aggregate;  
    then accept;  
  }  
  term suppress-specific-routes {  
    from {  
      route-filter 10.200.0.0/16 longer;  
    }  
    then reject;  
  }  
}  
policy-statement send-default {  
  from {  
    route-filter 0.0.0.0/0 exact;  
  }  
  then accept;  
}  
user@R3# show routing-options  
aggregate {  
  route 10.200.0.0/16;  
}  
autonomous-system 65001;
```

Verification

Confirm that the configuration is working properly.

- [Verifying That Device R3 Has the Expected Routes on page 78](#)
- [Verifying That Device R3 Advertises the Aggregate Route to Device ISP on page 78](#)

Verifying That Device R3 Has the Expected Routes

Purpose Make sure that Device R3 has the specific static routes.

Action user@R3>show route terse protocol bgp

```
inet.0: 12 destinations, 12 routes (12 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

A Destination	P Prf	Metric 1	Metric 2	Next hop	AS path
* 0.0.0.0/0	B 170	100		>10.0.45.1	65000 I
* 10.200.1.0/24	B 170	100		>10.0.2.2	I
* 10.200.2.0/24	B 170	100		>10.0.2.2	I

Meaning The output shows that Device R3 has the specific routes to the 10.200.1.0/24 and 10.200.2.0/24 networks.

Verifying That Device R3 Advertises the Aggregate Route to Device ISP

Purpose Make sure that Device R3 does not send the specific static routes and only sends the summarized aggregate route.

Action user@R3>show route advertising-protocol bgp 10.0.45.1

```
inet.0: 12 destinations, 12 routes (12 active, 0 holddown, 0 hidden)
  Prefix                Nexthop        MED      Lc1pref  AS path
* 10.200.0.0/16         Self                    0          I
```

Meaning The output shows that Device R3 sends only the summarized route to Device ISP.

Related Documentation • [Example: Conditionally Generating Static Routes on page 78](#)

Example: Conditionally Generating Static Routes

- [Understanding Conditionally Generated Routes on page 78](#)
- [Example: Configuring a Conditional Default Route Policy on page 80](#)

Understanding Conditionally Generated Routes

Generated routes are used as the *route of last resort*. A packet is forwarded to the route of last resort when the routing tables have no information about how to reach that packet's destination. One use of route generation is to generate a default route to use if the routing table contains a route from a peer on a neighboring backbone.

A generated route becomes active when it has one or more *contributing routes*. A contributing route is an active route that is a more specific match for the generated destination. For example, for the destination 128.100.0.0/16, routes to 128.100.192.0/19 and 128.100.67.0/24 are contributing routes, but routes to 128.0.0.0/8, 128.0.0.0/16, and 128.100.0.0/16 are not.

A route can contribute only to a single generated route. However, an active generated route can recursively contribute to a less specific matching generated route. For example, a generated route to the destination 128.100.0.0/16 can contribute to a generated route to 128.96.0.0/13.

By default, when generated routes are installed in the routing table, the next hop is chosen from the primary contributing route.



NOTE: You can configure only one generated route for each destination prefix.

To configure generated routes in the default routing table (**inet.0**), include the **generate** statement:

```
generate {
  (defaults | route destination ) {
    (active | passive);
    as-path <as-path> <origin (egp | igp | incomplete)> <atomic-aggregate> <aggregator
      as-number in-address>;
    community [ community-ids ];
    discard;
    (brief | full);
    (metric | metric2 | metric3 | metric4) metric <type type>;
    policy policy-name;
    (preference | preference2 | color | color2) preference <type type>;
    tag string;
  }
}
```



NOTE: You cannot configure generated routes for the IPv4 multicast routing table (**inet.1**) or the IPv6 multicast routing table (**inet6.1**).

The **generate** statement consists of two parts:

- **defaults**—Here you specify global generated route options. These are treated as global defaults and apply to all the generated routes you configure in the **generate** statement. This part of the **generate** statement is optional.
- **route**—Here you configure individual generated routes. In this part of the **generate** statement, you optionally can configure generated route options. These options apply to the individual destination only and override any options you configured in the **defaults** part of the **generate** statement.

Example: Configuring a Conditional Default Route Policy

This example shows how to configure a conditional default route on one routing device and redistribute the default route into OSPF.

- [Requirements on page 80](#)
- [Overview on page 80](#)
- [Configuration on page 81](#)
- [Verification on page 84](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

In this example, OSPF area 0 contains three routing devices. Device R3 has a BGP session with an external peer, for example, an Internet Service Provider (ISP).


To propagate a static route into BGP, this example includes the **discard** statement when defining the route. The ISP injects a default static route into BGP, which provides the customer network with a default static route to reach external networks. The static route has a discard next hop. This means that if a packet does not match a more specific route, the packet is rejected and a reject route for this destination is installed in the routing table, but Internet Control Message Protocol (ICMP) unreachable messages are not sent. The discard next hop allows you to originate a summary route, which can be advertised through dynamic routing protocols.

Device R3 exports the default route into OSPF. The route policy on Device R3 is conditional such that if the connection to the ISP goes down, the default route is no longer exported into OSPF because it is no longer active in the routing table. This policy prevents packets from being silently dropped without notification (also known as blackholing).

This example shows the configuration for all of the devices and the step-by-step configuration on Device R3.

[Figure 9 on page 81](#) shows the sample network.

Figure 9: OSPF with a Conditional Default Route to an ISP

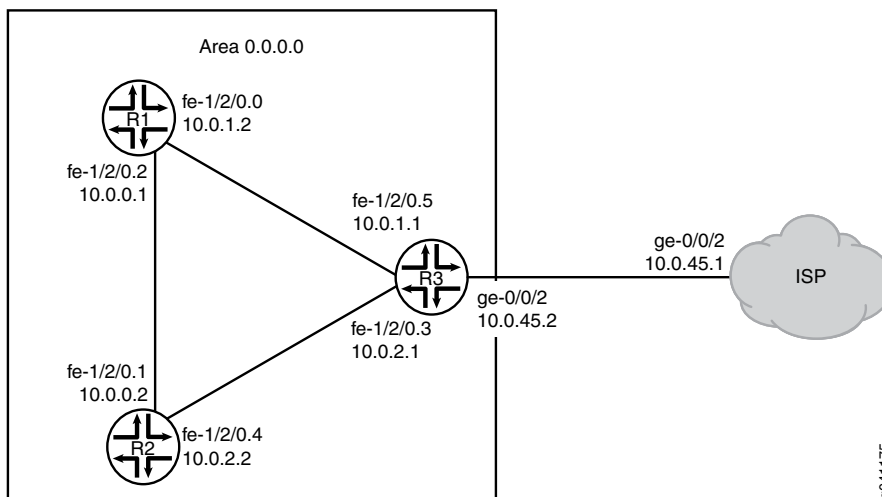

9041175

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```

set interfaces fe-1/2/0 unit 0 description R1->R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.1.2/30
set interfaces fe-1/2/1 unit 2 description R1->R2
set interfaces fe-1/2/1 unit 2 family inet address 10.0.0.1/30
set protocols ospf area 0.0.0.0 interface fe-1/2/0.0
set protocols ospf area 0.0.0.0 interface fe-1/2/1.2

```

Device R2

```

set interfaces fe-1/2/0 unit 1 description R2->R1
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 4 description R2->R3
set interfaces fe-1/2/1 unit 4 family inet address 10.0.2.2/30
set protocols ospf area 0.0.0.0 interface fe-1/2/0.1
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4

```

Device R3

```

set interfaces fe-1/2/0 unit 3 description R3->R2
set interfaces fe-1/2/0 unit 3 family inet address 10.0.2.1/30
set interfaces fe-1/2/1 unit 5 description R3->R1
set interfaces fe-1/2/1 unit 5 family inet address 10.0.1.1/30
set interfaces ge-0/0/2 unit 0 description R3->ISP
set interfaces ge-0/0/2 unit 0 family inet address 10.0.45.2/30
set protocols bgp group ext type external
set protocols bgp group ext peer-as 65000
set protocols bgp group ext neighbor 10.0.45.1
set protocols ospf export gendefault
set protocols ospf area 0.0.0.0 interface fe-1/2/1.4
set protocols ospf area 0.0.0.0 interface fe-1/2/0.3
set policy-options policy-statement gendefault term upstreamroutes from protocol bgp

```

```
set policy-options policy-statement gendefault term upstreamroutes from as-path
  upstream
set policy-options policy-statement gendefault term upstreamroutes from route-filter
  0.0.0.0/0 upto /16
set policy-options policy-statement gendefault term upstreamroutes then next-hop
  10.0.45.1
set policy-options policy-statement gendefault term upstreamroutes then accept
set policy-options policy-statement gendefault term end then reject
set policy-options as-path upstream "^65000 "
set routing-options generate route 0.0.0.0/0 policy gendefault
set routing-options autonomous-system 65001
```

Device ISP

```
set interfaces ge-0/0/2 unit 0 family inet address 10.0.45.1/30
set protocols bgp group ext type external
set protocols bgp group ext export advertise-default
set protocols bgp group ext peer-as 65001
set protocols bgp group ext neighbor 10.0.45.2
set policy-options policy-statement advertise-default term 1 from route-filter 0.0.0.0/0
  exact
set policy-options policy-statement advertise-default term 1 then accept
set routing-options static route 0.0.0.0/0 discard
set routing-options autonomous-system 65000
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#)*.

To configure Device R3:

1. Configure the interfaces.

```
[edit interfaces]
user@R3# set fe-1/2/0 unit 3 description R3->R2
user@R3# set fe-1/2/0 unit 3 family inet address 10.0.2.1/30
user@R3# set fe-1/2/1 unit 5 description R3->R1
user@R3# set fe-1/2/1 unit 5 family inet address 10.0.1.1/30
user@R3# set ge-0/0/2 unit 0 description R3->ISP
user@R3# set ge-0/0/2 unit 0 family inet address 10.0.45.2/30
```

2. Configure the autonomous system (AS) number.

```
[edit routing-options]
user@R3# set autonomous-system 65001
```

3. Configure the BGP session with the ISP device.

```
[edit protocols bgp group ext]
user@R3# set type external
user@R3# set peer-as 65000
user@R3# set neighbor 10.0.45.1
```

4. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@R3# set interface fe-1/2/1.4
user@R3# set interface fe-1/2/0.3
```

5. Configure the routing policy.

```
[edit policy-options policy-statement gendefault]
user@R3# set term upstreamroutes from protocol bgp
user@R3# set term upstreamroutes from as-path upstream
user@R3# set term upstreamroutes from route-filter 0.0.0.0/0 upto /16
user@R3# set term upstreamroutes then next-hop 10.0.45.1
user@R3# set term upstreamroutes then accept
```

```
user@R3# set term end then reject
```

```
[edit policy-options]
user@R3# set as-path upstream "^65000 "
```

6. Configure the generated route, associating the routing policy with the generated route.

```
[edit routing-options]
user@R3# set generate route 0.0.0.0/0 policy gendefault
```

7. Apply the export policy to OSPF.

```
[edit protocols ospf]
user@R3# set export gendefault
```

8. If you are done configuring the device, commit the configuration.

```
[edit]
user@R3# commit
```

Confirm your configuration by issuing the **show** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R3# show
interfaces {
  fe-1/2/0 {
    unit 3 {
      description R3->R2;
      family inet {
        address 10.0.2.1/30;
      }
    }
  }
  fe-1/2/1 {
    unit 5 {
      description R3->R1;
      family inet {
        address 10.0.1.1/30;
      }
    }
  }
  ge-1/2/0 {
    unit 0 {
      description R3->ISP;
      family inet {
```

```
        address 10.0.45.2/30;
    }
}
}
protocols {
    bgp {
        group ext {
            type external;
            peer-as 65000;
            neighbor 10.0.45.1;
        }
    }
    ospf {
        export gendefault;
        area 0.0.0.0 {
            interface fe-1/2/1.4;
            interface fe-1/2/0.3;
        }
    }
}
policy-options {
    policy-statement gendefault {
        term upstreamroutes {
            from {
                protocol bgp;
                as-path upstream;
                route-filter 0.0.0.0/0 upto /16;
            }
            then {
                next-hop 10.0.45.1;
                accept;
            }
        }
        term end {
            then reject;
        }
    }
    as-path upstream "^65000 ";
}
routing-options {
    generate {
        route 0.0.0.0/0 policy gendefault;
    }
    autonomous-system 65001;
}
```

Verification

Confirm that the configuration is working properly.

- [Verifying That the Route to the ISP Is Working on page 85](#)
- [Verifying That the Static Route Is Redistributed on page 85](#)
- [Testing the Policy Condition on page 86](#)

Verifying That the Route to the ISP Is Working

Purpose Make sure connectivity is established between Device R3 and the ISP's router.

Action user@R3> ping 10.0.45.1
 PING 10.0.45.1 (10.0.45.1): 56 data bytes
 64 bytes from 10.0.45.1: icmp_seq=0 ttl=64 time=1.185 ms
 64 bytes from 10.0.45.1: icmp_seq=1 ttl=64 time=1.199 ms
 64 bytes from 10.0.45.1: icmp_seq=2 ttl=64 time=1.186 ms

Meaning The ping command confirms reachability.

Verifying That the Static Route Is Redistributed

Purpose Make sure that the BGP policy is redistributing the static route into Device R3's routing table. Also make sure that the OSPF policy is redistributing the static route into the routing tables of Device R1 and Device R2.

Action user@R3> show route protocol bgp

```
inet.0: 9 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[BGP/170] 00:00:25, localpref 100
                   AS path: 65000 I
                   > to 10.0.45.1 via ge-0/0/2.6
```

user@R1> show route protocol ospf

```
inet.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[OSPF/150] 00:03:58, metric 0, tag 0
                   > to 10.0.1.1 via fe-1/2/0.0
10.0.2.0/30        *[OSPF/10] 03:37:45, metric 2
                   to 10.0.1.1 via fe-1/2/0.0
                   > to 10.0.0.2 via fe-1/2/1.2
224.0.0.5/32       *[OSPF/10] 03:38:41, metric 1
                   MultiRecv
```

user@R2> show route protocol ospf

```
inet.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          *[OSPF/150] 00:04:04, metric 0, tag 0
                   > to 10.0.2.1 via fe-1/2/1.4
10.0.1.0/30        *[OSPF/10] 03:37:46, metric 2
                   to 10.0.0.1 via fe-1/2/0.1
                   > to 10.0.2.1 via fe-1/2/1.4
224.0.0.5/32       *[OSPF/10] 03:38:47, metric 1
                   MultiRecv
```

Meaning The routing tables contain the default 0.0.0.0/0 route. If Device R1 and Device R2 receive packets destined for networks not specified in their routing tables, those packets will be sent to Device R3 for further processing. If Device R3 receives packets destined for

networks not specified in its routing table, those packets will be sent to the ISP for further processing.

Testing the Policy Condition

Purpose Deactivate the interface to make sure that the route is removed from the routing tables if the external network becomes unreachable.

Action user@R3> deactivate interfaces ge-0/0/2 unit 0 family inet address 10.0.45.2/30
user@R3> commit

user@R1> show route protocol ospf

```
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
10.0.2.0/30          *[OSPF/10] 03:41:48, metric 2
                     to 10.0.1.1 via fe-1/2/0.0
                     > to 10.0.0.2 via fe-1/2/1.2
224.0.0.5/32         *[OSPF/10] 03:42:44, metric 1
                     MultiRecv
```

user@R2> show route protocol ospf

```
inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
10.0.1.0/30          *[OSPF/10] 03:42:10, metric 2
                     to 10.0.0.1 via fe-1/2/0.1
                     > to 10.0.2.1 via fe-1/2/1.4
224.0.0.5/32         *[OSPF/10] 03:43:11, metric 1
                     MultiRecv
```

Meaning The routing tables on Device R1 and Device R2 do not contain the default 0.0.0.0/0 route. This verifies that the default route is no longer present in the OSPF domain. To reactivate the ge-0/0/2.6 interface, issue the **activate interfaces ge-0/0/2 unit 0 family inet address 10.0.45.2/30** configuration mode command.

Related Documentation

- [Example: Summarizing Static Routes Through Route Aggregation on page 65](#)

CHAPTER 4

Bidirectional Forwarding Detection for Static Routes

- [Examples: Configuring BFD for Static Routes on page 87](#)
- [Example: Configuring BFD Authentication for Static Routes on page 102](#)

Examples: Configuring BFD for Static Routes

- [Understanding BFD for Static Routes on page 87](#)
- [Example: Configuring BFD for Static Routes on page 91](#)
- [Example: Enabling BFD on Qualified Next Hops in Static Routes on page 96](#)

Understanding BFD for Static Routes

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchanges BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the static route failure detection mechanisms, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

By default, BFD is supported on single-hop static routes. In Junos OS Release 8.2 and later, BFD also supports multihop static routes.

To enable failure detection, include the **bfd-liveness-detection** statement in the static route configuration.

In Junos OS Release 9.1 and later, the BFD protocol is supported for IPv6 static routes. Global unicast and link-local IPv6 addresses are supported for static routes. The BFD protocol is not supported on multicast or anycast IPv6 addresses. For IPv6, the BFD protocol supports only static routes and only in Junos OS Release 9.3 and later. IPv6 for BFD is not supported for any other protocol.

To configure the BFD protocol for IPv6 static routes, include the **bfd-liveness-detection** statement at the **[edit routing-options rib inet6.0 static route destination-prefix]** hierarchy level.

In Junos OS Release 8.5 and later, you can configure a hold-down interval to specify how long the BFD session must remain up before a state change notification is sent.

To specify the hold-down interval, include the **holddown-interval** statement in the BFD configuration.

You can configure a number in the range from 0 through 255,000 milliseconds. The default is 0. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.



NOTE: If a single BFD session includes multiple static routes, the hold-down interval with the highest value is used.

To specify the minimum transmit and receive intervals for failure detection, include the **minimum-interval** statement in the BFD configuration.

This value represents both the minimum interval after which the local routing device transmits hello packets and the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.



NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

To specify the minimum receive interval for failure detection, include the **minimum-receive-interval** statement in the BFD configuration. This value represents the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the number of hello packets not received by the neighbor that causes the originating interface to be declared down, include the **multiplier** statement in the BFD configuration.

The default value is 3. You can configure a number in the range from 1 through 255.

To specify a threshold for detecting the adaptation of the detection time, include the **threshold** statement in the BFD configuration.

When the BFD session detection time adapts to a value equal to or higher than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the **minimum-interval** or the **minimum-receive-interval** value. The threshold must be a higher value than the multiplier for either of these configured values. For example if the **minimum-receive-interval** is 300 ms and the **multiplier** is 3, the total detection time is 900 ms. Therefore, the detection time threshold must have a value higher than 900.

To specify the minimum transmit interval for failure detection, include the **transmit-interval** **minimum-interval** statement in the BFD configuration.

This value represents the minimum interval after which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.

To specify the threshold for the adaptation of the transmit interval, include the **transmit-interval threshold** statement in the BFD configuration.

The threshold value must be greater than the transmit interval. When the BFD session transmit time adapts to a value greater than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the value for the **minimum-interval** or the **minimum-receive-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level. The threshold must be a higher value than the multiplier for either of these configured values.

To specify the BFD version, include the **version** statement in the BFD configuration. The default is to have the version detected automatically.

To include an IP address for the next hop of the BFD session, include the **neighbor** statement in the BFD configuration.



NOTE: You must configure the **neighbor** statement if the next hop specified is an interface name. If you specify an IP address as the next hop, that address is used as the neighbor address for the BFD session.

In Junos OS Release 9.0 and later, you can configure BFD sessions not to adapt to changing network conditions.

To disable BFD adaptation, include the **no-adaptation** statement in the BFD configuration.



NOTE: We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation in your network.



NOTE: If BFD is configured only on one end of a static route, the route is removed from the routing table. BFD establishes a session when BFD is configured on both ends of the static route.

BFD is not supported on ISO address families in static routes. BFD does support IS-IS.

If you configure graceful Routing Engine switchover (GRES) at the same time as BFD, GRES does not preserve the BFD state information during a failover.

Junos OS also supports BFD over multihop static routes. For example, you can configure BFD over a Layer 3 path to provide path integrity over that path. You can limit the number of hops by specifying the time to live (TTL).

To configure BFD over multihop static routes, include the following statements:

```
static route destination-prefix {
  bfd-liveness-detection {
    local-address ip-address;
    minimum-receive-ttl number;
  }
}
```

To specify the source address for the multihop static route and to enable multihop BFD support, include the **local-address** statement.

To specify the number of hops, include the **minimum-receive-ttl** statement. You must configure this statement for a multihop BFD session. You can configure a value in the range from 1 through 255. It is optional for a single-hop BFD session. If you configure the **minimum-receive-ttl** statement for a single-hop session, the value must be 255.

Example: Configuring BFD for Static Routes

This example shows how to configure Bidirectional Forwarding Detection (BFD) for static routes.

- [Requirements on page 91](#)
- [Overview on page 91](#)
- [Configuration on page 92](#)
- [Verification on page 95](#)

Requirements

In this example, no special configuration beyond device initialization is required.

Overview


There are many practical applications for static routes. Static routing is often used at the network edge to support attachment to stub networks, which, given their single point of entry and egress, are well suited to the simplicity of a static route. In Junos OS, static routes have a global preference of 5. Static routes are activated if the specified next hop is reachable.

In this example, you configure the static route 192.168.47.0/24 from the provider network to the customer network, using the next-hop address of 172.16.1.2. You also configure a static default route of 0.0.0.0/0 from the customer network to the provider network, using a next-hop address of 172.16.1.1.

For demonstration purposes, some loopback interfaces are configured on Device B and Device D. These loopback interfaces provide addresses to ping and thus verify that the static routes are working.

[Figure 10 on page 92](#) shows the sample network.

Figure 10: Customer Routes Connected to a Service Provider

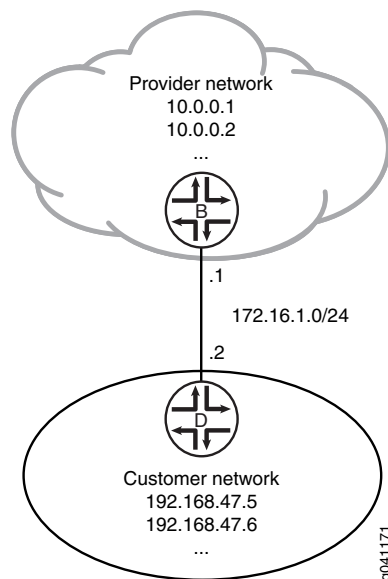

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device B

```
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval 1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

Device D

```
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the *Junos OS CLI User Guide*.

To configure BFD for static routes:

1. On Device B, configure the interfaces.

- ```
[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32
```
2. On Device B, create a static route and set the next-hop address.
 

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2
```
  3. On Device B, configure BFD for the static route.
 

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval 1000
```
  4. On Device B, configure tracing operations for BFD.
 

```
[edit protocols]
user@B# set bfd traceoptions file bfd-trace
user@B# set bfd traceoptions flag all
```
  5. If you are done configuring Device B, commit the configuration.
 

```
[edit]
user@B# commit
```
  6. On Device D, configure the interfaces.
 

```
[edit interfaces]
user@D# set ge-1/2/0 unit 1 description D->B
user@D# set ge-1/2/0 unit 1 family inet address 172.16.1.2/24
user@D# set lo0 unit 2 family inet address 192.168.47.5/32
user@D# set lo0 unit 2 family inet address 192.168.47.6/32
```
  7. On Device D, create a static route and set the next-hop address.
 

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 next-hop 172.16.1.1
```
  8. On Device D, configure BFD for the static route.
 

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
```
  9. On Device D, configure tracing operations for BFD.
 

```
[edit protocols]
user@D# set bfd traceoptions file bfd-trace
user@D# set bfd traceoptions flag all
```
  10. If you are done configuring Device D, commit the configuration.
 

```
[edit]
user@D# commit
```

Confirm your configuration by issuing the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

**Device B**     user@B# show interfaces

```
ge-1/2/0 {
 unit 0 {
 description B->D;
 family inet {
 address 172.16.1.1/24;
 }
 }
}
lo0 {
 unit 57 {
 family inet {
 address 10.0.0.1/32;
 address 10.0.0.2/32;
 }
 }
}
```

user@D# show protocols

```
bfd {
 traceoptions {
 file bfd-trace;
 flag all;
 }
}
```

user@B# show routing-options

```
static {
 route 192.168.47.0/24 {
 next-hop 172.16.1.2;
 bfd-liveness-detection {
 minimum-interval 1000;
 }
 }
}
```

Device D

user@D# show interfaces

```
ge-1/2/0 {
 unit 1 {
 description D->B;
 family inet {
 address 172.16.1.2/24;
 }
 }
}
lo0 {
 unit 2 {
 family inet {
 address 192.168.47.5/32;
 address 192.168.47.6/32;
 }
 }
}
```

user@D# show routing-options

```
static {
 route 0.0.0.0/0 {
```



```

 next-hop 172.16.1.1;
 bfd-liveness-detection {
 minimum-interval 1000;
 }
}
}

```

## Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 95](#)
- [Viewing Detailed BFD Events on page 96](#)

### Verifying That BFD Sessions Are Up

**Purpose** Verify that the BFD sessions are up, and view details about the BFD sessions.

**Action** From operational mode, enter the `show bfd session extensive` command.

```
user@B> show bfd session extensive
```

| Address    | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|------------|-------|------------|-------------|-------------------|------------|
| 172.16.1.2 | Up    | lt-1/2/0.0 | 3.000       | 1.000             | 3          |

Client Static, TX interval 1.000, RX interval 1.000  
 Session up time 00:14:30  
 Local diagnostic None, remote diagnostic None  
 Remote state Up, version 1  
 Replicated, routing table index 172  
 Min async interval 1.000, min slow interval 1.000  
 Adaptive async TX interval 1.000, RX interval 1.000  
 Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3  
 Remote min TX interval 1.000, min RX interval 1.000, multiplier 3  
 Local discriminator 2, remote discriminator 1  
 Echo mode disabled/inactive

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```
user@D> show bfd session extensive
```

| Address    | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|------------|-------|------------|-------------|-------------------|------------|
| 172.16.1.1 | Up    | lt-1/2/0.1 | 3.000       | 1.000             | 3          |

Client Static, TX interval 1.000, RX interval 1.000  
 Session up time 00:14:35  
 Local diagnostic None, remote diagnostic None  
 Remote state Up, version 1  
 Replicated, routing table index 170  
 Min async interval 1.000, min slow interval 1.000  
 Adaptive async TX interval 1.000, RX interval 1.000  
 Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3  
 Remote min TX interval 1.000, min RX interval 1.000, multiplier 3  
 Local discriminator 1, remote discriminator 2  
 Echo mode disabled/inactive

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** The TX interval 1.000, RX interval 1.000 output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the **bfd-liveness-detection** statement.

#### *Viewing Detailed BFD Events*

**Purpose** View the contents of the BFD trace file to assist in troubleshooting, if needed.

**Action** From operational mode, enter the **file show /var/log/bfd-trace** command.

```
user@B> file show /var/log/bfd-trace
Nov 23 14:26:55 Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 72
Nov 23 14:26:55 PPM Trace: BFD periodic xmit rt tbl index 172
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 108:
Nov 23 14:26:55 IfIndex (3) len 4: 0
Nov 23 14:26:55 Protocol (1) len 1: BFD
Nov 23 14:26:55 Data (9) len 83: (hex) 70 70 6d 64 5f 62 66 64 5f 73 65 6e 64
6d 73 67 20 3a 20
Nov 23 14:26:55 PPM Trace: ppmd_bfd_sendmsg : socket 12 len 24, ifl 78 src
172.16.1.1 dst 172.16.1.2 errno 65
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 93:
Nov 23 14:26:55 IfIndex (3) len 4: 0
Nov 23 14:26:55 Protocol (1) len 1: BFD
Nov 23 14:26:55 Data (9) len 68: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 74
```

**Meaning** BFD messages are being written to the trace file.

### Example: Enabling BFD on Qualified Next Hops in Static Routes

This example shows how to configure a static route with multiple possible next hops. Each next hop has Bidirectional Forwarding Detection (BFD) enabled.

- [Requirements on page 96](#)
- [Overview on page 96](#)
- [Configuration on page 97](#)
- [Verification on page 100](#)

---

#### Requirements

In this example, no special configuration beyond device initialization is required.

---

#### Overview


In this example, Device B has the static route **192.168.47.0/24** with two possible next hops. The two next hops are defined using two **qualified-next-hop** statements. Each next hop has BFD enabled.

BFD is also enabled on Device D because BFD must be enabled on both ends of the connection.

A next hop is included in the routing table if the BFD session is up. The next hop is removed from the routing table if the BFD session is down.

See [Figure 11 on page 97](#).

**Figure 11: BFD Enabled on Qualified Next Hops**

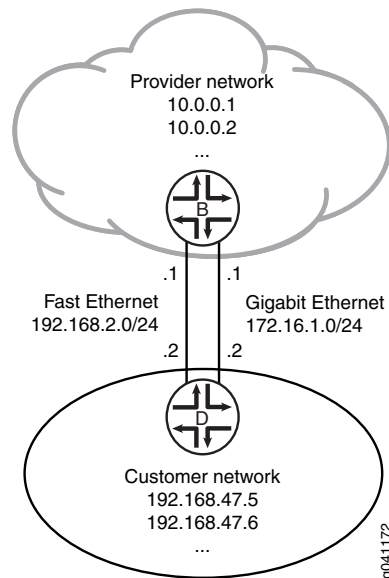

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device B**

```

set interfaces fe-0/1/0 unit 2 description secondary-B->D
set interfaces fe-0/1/0 unit 2 family inet address 192.168.2.1/24
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set routing-options static route 192.168.47.0/24 qualified-next-hop 192.168.2.2
 bfd-liveness-detection minimum-interval 60
set routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2
 bfd-liveness-detection minimum-interval 60

```

**Device D**

```

set interfaces fe-0/1/0 unit 3 description secondary-D->B
set interfaces fe-0/1/0 unit 3 family inet address 192.168.2.2/24
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set routing-options static route 0.0.0.0/0 qualified-next-hop 192.168.2.1
set routing-options static route 0.0.0.0/0 qualified-next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 60

```

**Step-by-Step Procedure** The following example requires that you navigate various levels in the configuration hierarchy. For instructions on how to do that, see Using the CLI Editor in Configuration Mode in the *Junos OS CLI User Guide*.

To configure a static route with two possible next hops, both with BFD enabled:

1. On Device B, configure the interfaces.

```
[edit interfaces fe-0/1/0]
user@B# set unit 2 description secondary-B->D
user@B# set unit 2 family inet address 192.168.2.1/24
```

```
[edit interfaces ge-1/2/0]
user@B# set unit 0 description B->D
user@B# set unit 0 family inet address 172.16.1.1/24
```

2. On Device B, configure the static route with two next hops, both with BFD enabled.

```
[edit routing-options static route 192.168.47.0/24]
user@B# set qualified-next-hop 192.168.2.2 bfd-liveness-detection minimum-interval
60
user@B# set qualified-next-hop 172.16.1.2 bfd-liveness-detection minimum-interval
60
```

3. On Device D, configure the interfaces.

```
[edit interfaces fe-0/1/0]
user@D# set unit 3 description secondary-D->B
user@D# set unit 3 family inet address 192.168.2.2/24
```

```
[edit interfaces ge-1/2/0]
user@D# set unit 1 description D->B
user@D# set unit 1 family inet address 172.16.1.2/24
```

4. On Device D, configure a BFD-enabled default static route with two next hops to the provider network.

In this case, BFD is enabled on the route, not on the next hops.

```
[edit routing-options static route 0.0.0.0/0]
user@D# set qualified-next-hop 192.168.2.1
user@D# set qualified-next-hop 172.16.1.1
user@D# set bfd-liveness-detection minimum-interval 60
```

**Results** Confirm your configuration by issuing the **show interfaces** and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@B# show interfaces
fe-0/1/0 {
 unit 2 {
 description secondary-B->D;
 family inet {
 address 192.168.2.1/24;
 }
 }
}
```

```

ge-1/2/0 {
 unit 0 {
 description B->D;
 family inet {
 address 172.16.1.1/24;
 }
 }
}

user@B# show routing-options
static {
 route 192.168.47.0/24 {
 qualified-next-hop 192.168.2.2 {
 bfd-liveness-detection {
 minimum-interval 60;
 }
 }
 qualified-next-hop 172.16.1.2 {
 bfd-liveness-detection {
 minimum-interval 60;
 }
 }
 }
}

user@D# show interfaces
fe-0/1/0 {
 unit 3 {
 description secondary-D->B;
 family inet {
 address 192.168.2.2/24;
 }
 }
}
ge-1/2/0 {
 unit 1 {
 description D->B;
 family inet {
 address 172.16.1.2/24;
 }
 }
}

user@D# show routing-options
static {
 route 0.0.0.0/0 {
 qualified-next-hop 192.168.2.1;
 qualified-next-hop 172.16.1.1;
 bfd-liveness-detection {
 minimum-interval 60;
 }
 }
}

```

If you are done configuring the devices, enter **commit** from configuration mode.

## Verification

---

Confirm that the configuration is working properly.

- [Checking the Routing Tables on page 100](#)
- [Verifying the BFD Sessions on page 100](#)
- [Removing BFD from Device D on page 100](#)
- [Removing BFD from One Next Hop on page 101](#)

### *Checking the Routing Tables*

**Purpose** Make sure that the static route appears in the routing table on Device B with two possible next hops.

**Action**

```
user@B> show route 192.168.47.0 extensive
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
192.168.47.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.47.0/24 -> {192.168.2.2}
 *Static Preference: 5
 Next hop type: Router
 Address: 0x9334010
 Next-hop reference count: 1
 Next hop: 172.16.1.2 via ge-1/2/0.0
 Next hop: 192.168.2.2 via fe-0/1/0.2, selected
 State: <Active Int Ext>
 Age: 9
 Task: RT
 Announcement bits (1): 3-KRT
 AS path: I
```

**Meaning** Both next hops are listed. The next hop 192.168.2.2 is the selected route.

### *Verifying the BFD Sessions*

**Purpose** Make sure that the BFD sessions are up.

**Action**

```
user@B> show bfd session
```

| Address     | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-------------|-------|------------|-------------|-------------------|------------|
| 172.16.1.2  | Up    | ge-1/2/0.0 | 0.720       | 0.240             | 3          |
| 192.168.2.2 | Up    | fe-0/1/0.2 | 0.720       | 0.240             | 3          |

2 sessions, 2 clients  
Cumulative transmit rate 8.3 pps, cumulative receive rate 8.3 pps

**Meaning** The output shows that the BFD sessions are up.

### *Removing BFD from Device D*

**Purpose** Demonstrate what happens when the BFD session is down for both next hops.

**Action** 1. Deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Rerun the **show bfd session** command on Device B.

```
user@B> show bfd session
```

| Address     | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-------------|-------|------------|-------------|-------------------|------------|
| 172.16.1.2  | Down  | ge-1/2/0.0 | 3.000       | 1.000             | 3          |
| 192.168.2.2 | Down  | fe-0/1/0.2 | 3.000       | 1.000             | 3          |

```
2 sessions, 2 clients
```

```
Cumulative transmit rate 2.0 pps, cumulative receive rate 2.0 pps
```

3. Rerun the **show route 192.168.47.0** command on Device B.

```
user@B> show route 192.168.47.0
```

**Meaning** As expected, when the BFD sessions are down, the static route is removed from the routing table.

### *Removing BFD from One Next Hop*

**Purpose** Demonstrate what happens when only one next hop has BFD enabled.

- Action** 1. If it is not already deactivated, deactivate BFD on Device D.

```
[edit routing-options static route 0.0.0.0/0]
user@D# deactivate bfd-liveness-detection
user@D# commit
```

2. Deactivate BFD on one of the next hops on Device B.

```
[edit routing-options static route 192.168.47.0/24 qualified-next-hop 172.16.1.2]
user@B# deactivate bfd-liveness-detection
user@B# commit
```

3. Rerun the **show bfd session** command on Device B.

```
user@B> show bfd session
```

| Address     | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-------------|-------|------------|-------------|-------------------|------------|
| 192.168.2.2 | Down  | fe-0/1/0.2 | 3.000       | 1.000             | 3          |

4. Rerun the **show route 192.168.47.0 extensive** command on Device B.

```
user@B> show route 192.168.47.0 extensive
```

```
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
```

```
192.168.47.0/24 (1 entry, 1 announced)
```

```
TSI:
```

```
KRT in-kernel 192.168.47.0/24 -> {172.16.1.2}
```

```
*Static Preference: 5
```

```
Next hop type: Router, Next hop index: 624
```

```
Address: 0x92f0178
```

```
Next-hop reference count: 3
```

```
Next hop: 172.16.1.2 via ge-1/2/0.0, selected
```

```
State: <Active Int Ext>
```

Age: 2:36  
Task: RT  
Announcement bits (1): 3-KRT  
AS path: I

**Meaning** As expected, the BFD session is down for the 192.168.2.2 next hop. The 172.16.1.2 next hop remains in the routing table, and the route remains active, because BFD is not a condition for this next hop to remain valid.

- Related Documentation**
- [Example: Configuring BFD Authentication for Static Routes on page 102](#)
  - Example: Configuring BFD for OSPF
  - Example: Configuring BFD for BGP
  - Example: Configuring BFD for IS-IS
  - Configuring PIM and the Bidirectional Forwarding Detection (BFD) Protocol

---

## Example: Configuring BFD Authentication for Static Routes

---

- [Understanding BFD Authentication for Static Routes on page 102](#)
- [Example: Configuring BFD Authentication for Static Routes on page 104](#)

### Understanding BFD Authentication for Static Routes

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when you run BFD over Network Layer protocols, the risk of service attacks can be significant.



**NOTE:** We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels.

Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IPv4 and IPv6 static routes. BFD authentication is not supported on MPLS OAM sessions. BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 103](#)
- [Security Authentication Keychains on page 103](#)
- [Strict Versus Loose Authentication on page 104](#)



## BFD Authentication Algorithms

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords can be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

## Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session,

and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

---

### Strict Versus Loose Authentication

By default, strict authentication is enabled, and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

## Example: Configuring BFD Authentication for Static Routes

This example shows how to configure Bidirectional Forwarding Detection (BFD) authentication for static routes.

- [Requirements on page 104](#)
- [Overview on page 104](#)
- [Configuration on page 105](#)
- [Verification on page 108](#)

---

### Requirements

Junos OS Release 9.6 or later (Canda and United States version).

BFD authentication is only supported in the Canada and United States version of the Junos OS image and is not available in the export version.

---

### Overview

You can configure authentication for BFD sessions running over IPv4 and IPv6 static routes. Routing instances and logical systems are also supported.

The following steps are needed to configure authentication on a BFD session:

1. Specify the BFD authentication algorithm for the static route.
2. Associate the authentication keychain with the static route.
3. Configure the related security authentication keychain. This must be configured on the main router.



**TIP:** We recommend that you specify loose authentication checking if you are transitioning from nonauthenticated sessions to authenticated sessions.


[edit]

```
user@host> set routing-options static route ipv4 bfd-liveness-detection
authentication loose-check
```

---

Figure 12 on page 105 shows the sample network.

Figure 12: Customer Routes Connected to a Service Provider

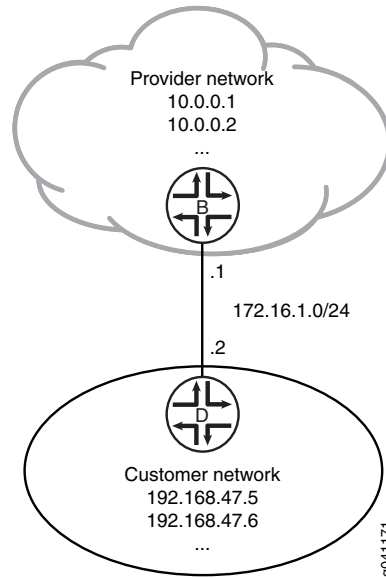

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device B**

```

set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval 1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication key-chain bfd-kc4
set routing-options static route 192.168.47.0/24 bfd-liveness-detection authentication algorithm keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret "9JhZHmn6Ap0In/9ApOcSs24oaZikPfT3wY24ZG.mz36AtOIEyMWxSrlKvM-dbs2aDkP5FtOIQFclev7N"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time "2011-1-1.12:00:00 -0800"

```

**Device D**

```

set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000

```

```

set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication key-chain
 bfd-kc4
set routing-options static route 0.0.0.0/0 bfd-liveness-detection authentication algorithm
 keyed-sha-1
set security authentication-key-chains key-chain bfd-kc4 key 5 secret
 "9JhZHmn6Ap0In/9ApOcSs24oaZikPft3wY24ZG.mz36AtOIeyMWxSrlKvM-dbs2a
 DkP5FtOIQFclev7N"
set security authentication-key-chains key-chain bfd-kc4 key 5 start-time
 "2011-1-1.12:00:00 -0800"

```

### Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#)*.

To configure BFD for static routes:

1. On Device B, configure the interfaces.

```

[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24

user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32

```

2. On Device B, create a static route and set the next-hop address.

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2

```

3. On Device B, configure BFD for the static route.

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval
 1000

```

4. On Device B, specify the algorithm (**keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**, or **simple-password**) to use for BFD authentication on the static route.

```

[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
 algorithm keyed-sha-1

```



**NOTE:** Nonstop active routing (NSR) is not supported with the **meticulous-keyed-md5** and **meticulous-keyed-sha-1** authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

5. On Device B, specify the keychain to be used to associate BFD sessions on the specified route with the unique security authentication keychain attributes.

This should match the keychain name configured at the **[edit security authentication key-chains]** hierarchy level.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection authentication
key-chain bfd-kc4
```

6. On Device B, specify the unique security authentication information for BFD sessions:

- The matching keychain name as specified in Step 5.
- At least one key, a unique integer between 0 and 63. Creating multiple keys allows multiple clients to use the BFD session.
- The secret data used to allow access to the session.
- The time at which the authentication key becomes active, in the format *yyyy-mm-dd.hh:mm:ss*.

```
[edit security authentication-key-chains key-chain bfd-kc4]
user@B# set key 5 secret
"9JhZHmn6Ap0In/9ApOcSs24oaZikPfT3wY24ZG.mz36AtOIeyMWxSrlKvM-dbs2a
DkP5Ft0IQFclev7N"
user@B# set key 5 start-time "2011-1-1.12:00:00 -0800"
```

7. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

8. Repeat the configuration on Device D.

The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

Confirm your configuration by issuing the **show interfaces**, **show routing-options**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device B user@B# show interfaces
ge-1/2/0 {
 unit 0 {
 description B->D;
 family inet {
 address 172.16.1.1/24;
 }
 }
}
lo0 {
 unit 57 {
 family inet {
 address 10.0.0.1/32;
 address 10.0.0.2/32;
 }
 }
}

user@B# show routing-options
static {
```

```

route 192.168.47.0/24 {
 next-hop 172.16.1.2;
 bfd-liveness-detection {
 minimum-interval 1000;
 authentication {
 key-chain bfd-kc4;
 algorithm keyed-sha-1;
 }
 }
}

user@B# show security
authentication-key-chains {
 key-chain bfd-kc4 {
 key 5 {
 secret
 "9JhZHmn6Ap0In/9ApOcSs24oaZikPft3wY24ZG.mz36AtOIEyMWxSrlKvM-dbs2a
 DkP5FtOIQFclev7N"; ## SECRET-DATA
 start-time "2011-1-1.12:00:00 -0800";
 }
 }
}

```

### Verification

Confirm that the configuration is working properly.

- [Verifying That BFD Sessions Are Up on page 108](#)
- [Viewing Details About the BFD Session on page 108](#)
- [Viewing Extensive BFD Session Information on page 109](#)

#### *Verifying That BFD Sessions Are Up*

**Purpose** Verify that the BFD sessions are up.

**Action** From operational mode, enter the `show bfd session` command.

```
user@B> show bfd session
```

| Address    | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|------------|-------|------------|-------------|-------------------|------------|
| 172.16.1.2 | Up    | ge-1/2/0.0 | 3.000       | 1.000             | 3          |

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** The command output shows that the BFD session is up.

#### *Viewing Details About the BFD Session*

**Purpose** View details about the BFD sessions and make sure that authentication is configured.

**Action** From operational mode, enter the `show bfd session detail` command.

```
user@B> show bfd session detail
```

| Address    | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|------------|-------|------------|-------------|-------------------|------------|
| 172.16.1.2 | Up    | ge-1/2/0.0 | 3.000       | 1.000             | 3          |

Client Static, TX interval 1.000, RX interval 1.000, **Authenticate**  
 Session up time 00:53:58  
 Local diagnostic NbrSignal, remote diagnostic None  
 Remote state Up, version 1  
 Logical system 9, routing table index 22

1 sessions, 1 clients  
 Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured.

### *Viewing Extensive BFD Session Information*

**Purpose** View more detailed information about the BFD sessions.

**Action** From operational mode, enter the [show bfd session extensive](#) command.

```
user@B> show bfd session extensive
```

| Address    | State | Interface  | Time  | Interval | Multiplier |
|------------|-------|------------|-------|----------|------------|
| 172.16.1.2 | Up    | ge-1/2/0.0 | 3.000 | 1.000    | 3          |

Client Static, TX interval 1.000, RX interval 1.000, **Authenticate**  
 keychain bfd-kc4, algo keyed-sha-1, mode strict  
 Session up time 01:39:45  
 Local diagnostic NbrSignal, remote diagnostic None  
 Remote state Up, version 1  
 Logical system 9, routing table index 22  
 Min async interval 1.000, min slow interval 1.000  
 Adaptive async TX interval 1.000, RX interval 1.000  
 Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3  
 Remote min TX interval 1.000, min RX interval 1.000, multiplier 3  
 Local discriminator 3, remote discriminator 4  
 Echo mode disabled/inactive  
 Authentication enabled/active, keychain bfd-kc4, algo keyed-sha-1, mode strict

1 sessions, 1 clients  
 Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** In the command output, **Authenticate** is displayed to indicate that BFD authentication is configured. The output for the **extensive** command provides the keychain name, the authentication algorithm, and the mode for each client in the session.

**Related Documentation**

- [Examples: Configuring BFD for Static Routes on page 87](#)





# Packet Forwarding Behavior

- [Example: Enabling Indirect Next Hops on the Packet Forwarding Engine on page 111](#)
- [Example: Configuring Unicast Reverse-Path-Forwarding Check on page 121](#)

## Example: Enabling Indirect Next Hops on the Packet Forwarding Engine

- [Understanding Indirect Next Hops on page 111](#)
- [Example: Optimizing Route Reconvergence by Enabling Indirect Next Hops on the Packet Forwarding Engine on page 112](#)


### Understanding Indirect Next Hops

Junos OS supports the concept of an indirect next hop for all routing protocols that support indirectly connected next hops, also known as third-party next hops.

Because routing protocols such as internal BGP (IBGP) can send routing information about indirectly connected routes, Junos OS relies on routes from intra-AS routing protocols (OSPF, IS-IS, RIP, and static) to resolve the best directly connected next hop. The Routing Engine performs route resolution to determine the best directly connected next hop and installs the route to the Packet Forwarding Engine.

By default, Junos OS does not maintain the route for indirect next hop to forwarding next-hop binding on the Packet Forwarding Engine forwarding table. As a result, when a rerouting event occurs, potentially thousands of route to forwarding next-hop bindings must be updated, which increases the route convergence time. [Figure 13 on page 111](#) illustrates the route to forwarding next-hop bindings with indirect next hop disabled.


**Figure 13: Route to Forwarding Next-Hop Bindings**

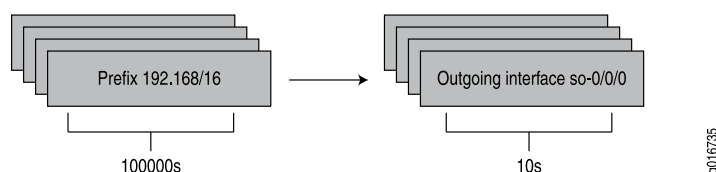

You can enable Junos OS to maintain the indirect next hop to forwarding next-hop binding on the Packet Forwarding Engine forwarding table. As a result, fewer route to forwarding next-hop bindings need to be updated, which improves the route convergence time.

[Figure 14 on page 112](#) illustrates the route to forwarding next-hop bindings with indirect next hop enabled.

Figure 14: Route to Forwarding Indirect Next-Hop Bindings

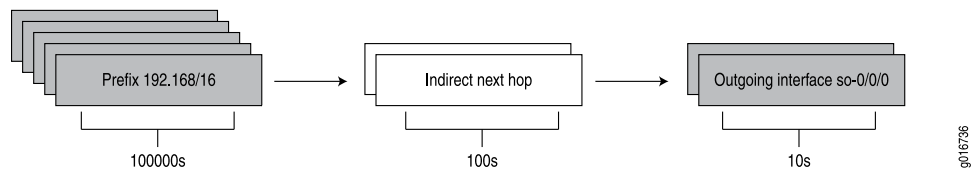

### Example: Optimizing Route Reconvergence by Enabling Indirect Next Hops on the Packet Forwarding Engine

This example shows how to use indirect next hops to promote faster network convergence (for example, in BGP networks) by decreasing the number of forwarding table changes required when a change in the network topology occurs.

- [Requirements on page 112](#)
- [Overview on page 112](#)
- [Configuration on page 113](#)
- [Verification on page 120](#)

#### Requirements


No special configuration beyond device initialization is required before configuring this example.

#### Overview

In this example, several devices are connected over unequal-cost paths. From Device R1 to Device R2, the path through Device R3 has a higher IGP metric than the path through Device R4. Device R1 has an internal BGP connection to Device R2. Device R0 injects multiple routes into the network, and Device R1 advertises those routes to Device R2. Because Device R2 is not directly connected to Device R1, Device R2's forwarding table contains indirect next hops. An interior gateway protocol, in this case OSPF, is running on the internal links among Devices R1, R2, R3, and R4. Each router is advertising its loopback interface IPv4 address.

On Device R2, the `indirect-next-hop` statement enables Junos OS to maintain the indirect next hop to forwarding next-hop binding on the Packet Forwarding Engine forwarding table. As a result, fewer route to forwarding next-hop bindings need to be updated, which improves the route convergence time if a path fails.

[Figure 15 on page 113](#) shows the sample network.

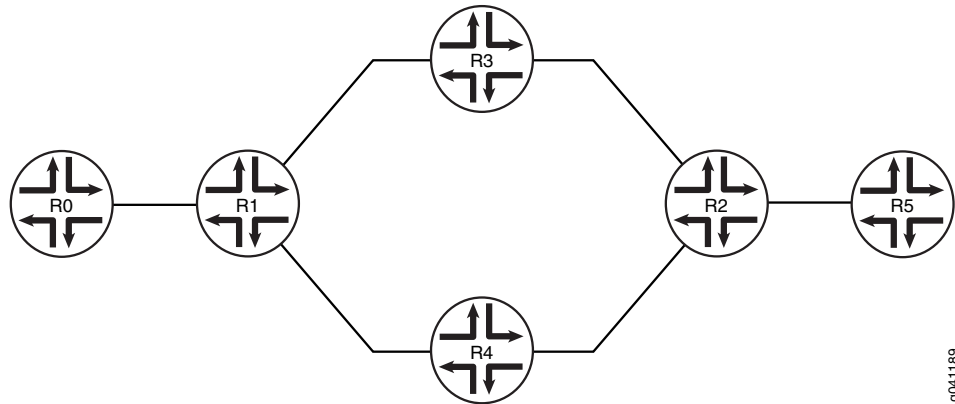

9041189

The “CLI Quick Configuration” on page 113 section shows the full configuration on all of the devices in Figure 15 on page 113. Otherwise, the example focuses on Device R0, Device R1, and Device R2.

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device R0
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces lo0 unit 1 family inet address 1.1.0.1/32
set interfaces lo0 unit 1 family inet address 1.1.0.2/32
set interfaces lo0 unit 1 family inet address 1.1.0.3/32
set interfaces lo0 unit 1 family inet address 1.1.0.4/32
set interfaces lo0 unit 1 family inet address 1.1.0.5/32
set interfaces lo0 unit 1 family inet address 1.1.0.6/32
set interfaces lo0 unit 1 family inet address 1.1.0.7/32
set interfaces lo0 unit 1 family inet address 1.1.0.8/32
set interfaces lo0 unit 1 family inet address 1.1.0.9/32
set routing-options static route 0.0.0.0/0 next-hop 10.0.0.2

Device R1
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set interfaces fe-1/2/2 unit 9 family inet address 10.0.0.9/30
set interfaces lo0 unit 2 family inet address 1.1.1.1/32
set protocols bgp export send-local
set protocols bgp export send-static
set protocols bgp group int type internal
set protocols bgp group int local-address 1.1.1.1
set protocols bgp group int neighbor 2.2.2.2
set protocols ospf area 0.0.0.0 interface fe-1/2/1.5
set protocols ospf area 0.0.0.0 interface fe-1/2/2.9
set protocols ospf area 0.0.0.0 interface lo0.2
set policy-options policy-statement send-local from protocol local
set policy-options policy-statement send-local from protocol direct
set policy-options policy-statement send-local then accept
set policy-options policy-statement send-static from protocol static
set policy-options policy-statement send-static then accept
set routing-options static route 1.1.0.2/32 next-hop 10.0.0.1

```

```
set routing-options static route 1.1.0.1/32 next-hop 10.0.0.1
set routing-options static route 1.1.0.3/32 next-hop 10.0.0.1
set routing-options static route 1.1.0.4/32 next-hop 10.0.0.1
set routing-options static route 1.1.0.5/32 next-hop 10.0.0.1
set routing-options static route 1.1.0.6/32 next-hop 10.0.0.1
set routing-options static route 1.1.0.7/32 next-hop 10.0.0.1
set routing-options static route 1.1.0.8/32 next-hop 10.0.0.1
set routing-options static route 1.1.0.9/32 next-hop 10.0.0.1
set routing-options autonomous-system 65500
```

**Device R2**

```
set interfaces fe-1/2/0 unit 14 family inet address 10.0.0.14/30
set interfaces fe-1/2/1 unit 18 family inet address 10.0.0.18/30
set interfaces fe-1/2/2 unit 21 family inet
set interfaces lo0 unit 3 family inet address 2.2.2.2/32
set protocols bgp export send-local
set protocols bgp group int type internal
set protocols bgp group int local-address 2.2.2.2
set protocols bgp group int family inet unicast
set protocols bgp group int family inet-vpn unicast
set protocols bgp group int neighbor 1.1.1.1
set protocols ospf area 0.0.0.0 interface fe-1/2/0.14
set protocols ospf area 0.0.0.0 interface fe-1/2/1.18
set protocols ospf area 0.0.0.0 interface lo0.3
set policy-options policy-statement send-local from protocol local
set policy-options policy-statement send-local from protocol direct
set policy-options policy-statement send-local then accept
set routing-options autonomous-system 65500
set routing-options forwarding-table indirect-next-hop
```

**Device R3**

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set interfaces fe-1/2/1 unit 13 family inet address 10.0.0.13/30
set interfaces lo0 unit 4 family inet address 3.3.3.3/32
set protocols ospf area 0.0.0.0 interface fe-1/2/0.6 metric 5000
set protocols ospf area 0.0.0.0 interface fe-1/2/1.13 metric 5000
set protocols ospf area 0.0.0.0 interface lo0.4
```

**Device R4**

```
set interfaces fe-1/2/0 unit 10 family inet address 10.0.0.10/30
set interfaces fe-1/2/1 unit 17 family inet address 10.0.0.17/30
set interfaces lo0 unit 5 family inet address 4.4.4.4/32
set protocols ospf area 0.0.0.0 interface fe-1/2/0.10
set protocols ospf area 0.0.0.0 interface fe-1/2/1.17
set protocols ospf area 0.0.0.0 interface lo0.5
```

**Device R5**

```
set interfaces fe-1/2/0 unit 22 family inet address 10.0.0.22/30
set interfaces lo0 unit 6 family inet address 5.5.5.5/32
```

**Configuring Device R0**

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the *Junos OS CLI User Guide*.

To configure Device R0:

1. Configure the interfaces, including multiple routes that can be injected into the network for demonstration purposes.

```
[edit interfaces]
user@R0# set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
```

```
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.1/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.2/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.3/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.4/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.5/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.6/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.7/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.8/32
user@R0# set interfaces lo0 unit 1 family inet address 1.1.0.9/32
```

2. Configure a static default route for network reachability.

```
[edit routing-options]
user@R0# set routing-options static route 0.0.0.0/0 next-hop 10.0.0.2
```

3. If you are done configuring the device, commit the configuration.

```
[edit]
user@R0# commit
```

**Configuring Device R1**

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the *Junos OS CLI User Guide*.

To configure Device R1:

1. Configure the interfaces, including multiple routes that can be injected into the network for demonstration purposes.

```
[edit interfaces]
user@R1# set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
user@R1# set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
user@R1# set interfaces fe-1/2/2 unit 9 family inet address 10.0.0.9/30
```

```
user@R1# set interfaces lo0 unit 2 family inet address 1.1.1.1/32
```

2. Configure BGP.

```
[edit routing-options]
user@R1# set protocols bgp export send-local
```

```
user@R1# set protocols bgp export send-static
user@R1# set protocols bgp group int type internal
user@R1# set protocols bgp group int local-address 1.1.1.1
user@R1# set protocols bgp group int neighbor 2.2.2.2
```

3. Configure OSPF.

```
[edit protocols]
user@R1# set protocols ospf area 0.0.0.0 interface fe-1/2/1.5
user@R1# set protocols ospf area 0.0.0.0 interface fe-1/2/2.9
user@R1# set protocols ospf area 0.0.0.0 interface lo0.2
```

4. Configure the routing policies.

```
user@R1# set policy-options policy-statement send-local from protocol local
user@R1# set policy-options policy-statement send-local from protocol direct
user@R1# set policy-options policy-statement send-local then accept
```

```
user@R1# set policy-options policy-statement send-static from protocol static
user@R1# set policy-options policy-statement send-static then accept
```

5. Configure a set of static routes to the set of interfaces configured on Device R0.

```
user@R1# set routing-options static route 1.1.0.2/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.1/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.3/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.4/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.5/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.6/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.7/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.8/32 next-hop 10.0.0.1
user@R1# set routing-options static route 1.1.0.9/32 next-hop 10.0.0.1
```

6. Configure the autonomous system (AS) identifier.

```
user@R1# set routing-options autonomous-system 65500
```

7. If you are done configuring the device, commit the configuration.

```
[edit]
user@R1# commit
```

### ***Configuring Device R2***

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure Device R2:

1. Configure the interfaces, including multiple routes that can be injected into the network for demonstration purposes.

```
[edit interfaces]
user@R2# set interfaces fe-1/2/0 unit 14 family inet address 10.0.0.14/30
user@R2# set interfaces fe-1/2/1 unit 18 family inet address 10.0.0.18/30
user@R2# set interfaces fe-1/2/2 unit 21 family inet address 10.0.0.21/30;
```

```
user@R2# set interfaces lo0 unit 3 family inet address 2.2.2.2/32
```

2. Configure BGP.

```
[edit routing-options]
user@R2# set protocols bgp export send-local
user@R2# set protocols bgp group int type internal
user@R2# set protocols bgp group int local-address 2.2.2.2
user@R2# set protocols bgp group int family inet unicast
user@R2# set protocols bgp group int family inet-vpn unicast
user@R2# set protocols bgp group int neighbor 1.1.1.1
```

3. Configure OSPF.

```
[edit protocols]
user@R2# set protocols ospf area 0.0.0.0 interface fe-1/2/0.14
user@R2# set protocols ospf area 0.0.0.0 interface fe-1/2/1.18
user@R2# set protocols ospf area 0.0.0.0 interface lo0.3
```

4. Configure the routing policies.

```
user@R2# set policy-options policy-statement send-local from protocol local
user@R2# set policy-options policy-statement send-local from protocol direct
user@R2# set policy-options policy-statement send-local then accept
```

5. Configure the AS identifier.

```
user@R2# set routing-options autonomous-system 65500
```

6. Enable indirect next hops in the forwarding plane.

```
user@R2# set routing-options forwarding-table indirect-next-hop
```

7. If you are done configuring the device, commit the configuration.

```
[edit]
user@R2# commit
```

Confirm your configuration by issuing the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device R0 user@R0# show interfaces
fe-1/2/0 {
 unit 1 {
 family inet {
 address 10.0.0.1/30;
 }
 }
}
lo0 {
 unit 1 {
 family inet {
 address 1.1.0.1/32;
 address 1.1.0.2/32;
 address 1.1.0.3/32;
 address 1.1.0.4/32;
 address 1.1.0.5/32;
 address 1.1.0.6/32;
```

```
 address 1.1.0.7/32;
 address 1.1.0.8/32;
 address 1.1.0.9/32;
 }
}

user@R0# show routing-options
static {
 route 0.0.0.0/0 next-hop 10.0.0.2;
}

Device R1 user@R1# show interfaces
fe-1/2/0 {
 unit 2 {
 family inet {
 address 10.0.0.2/30;
 }
 }
}
fe-1/2/1 {
 unit 5 {
 family inet {
 address 10.0.0.5/30;
 }
 }
}
fe-1/2/2 {
 unit 9 {
 family inet {
 address 10.0.0.9/30;
 }
 }
}
lo0 {
 unit 2 {
 family inet {
 address 1.1.1.1/32;
 }
 }
}

user@R1# show protocols
bgp {
 export [send-local send-static];
 group int {
 type internal;
 local-address 1.1.1.1;
 neighbor 2.2.2.2;
 }
}
ospf {
 area 0.0.0.0 {
 interface fe-1/2/1.5;
 interface fe-1/2/2.9;
 interface lo0.2;
```



```

 }
 }

user@R1# show policy-options
policy-statement send-local {
 from protocol [local direct];
 then accept;
}
policy-statement send-static {
 from protocol static;
 then accept;
}

user@R1# show routing-options
static {
 route 1.1.0.2/32 next-hop 10.0.0.1;
 route 1.1.0.1/32 next-hop 10.0.0.1;
 route 1.1.0.3/32 next-hop 10.0.0.1;
 route 1.1.0.4/32 next-hop 10.0.0.1;
 route 1.1.0.5/32 next-hop 10.0.0.1;
 route 1.1.0.6/32 next-hop 10.0.0.1;
 route 1.1.0.7/32 next-hop 10.0.0.1;
 route 1.1.0.8/32 next-hop 10.0.0.1;
 route 1.1.0.9/32 next-hop 10.0.0.1;
}
autonomous-system 65500;

```

**Device R2**

```

user@R2# show interfaces
fe-1/2/0 {
 unit 14 {
 family inet {
 address 10.0.0.14/30;
 }
 }
}
fe-1/2/1 {
 unit 18 {
 family inet {
 address 10.0.0.18/30;
 }
 }
}
fe-1/2/2 {
 unit 21 {
 family inet {
 address 10.0.0.21/30;
 }
 }
}
lo0 {
 unit 3 {
 family inet {
 address 2.2.2.2/32;
 }
 }
}

```

```
user@R2# show protocols
bgp {
 export send-local;
 group int {
 type internal;
 local-address 2.2.2.2;
 family inet {
 unicast;
 }
 family inet-vpn {
 unicast;
 }
 neighbor 1.1.1.1;
 }
}
ospf {
 area 0.0.0.0 {
 interface fe-1/2/0.14;
 interface fe-1/2/1.18;
 interface lo0.3;
 }
}

user@R2# show policy-options
policy-statement send-local {
 from protocol [local direct];
 then accept;
}

user@R2# show routing-options
autonomous-system 65500;
forwarding-table {
 indirect-next-hop;
}
```

Configure Device R3, Device R4, and Device R5, as shown in [“CLI Quick Configuration” on page 113](#).

---

### Verification

Confirm that the configuration is working properly.

#### *Verifying That the Routes Have the Expected Indirect-Next-Hop Flag*

**Purpose** Make sure that Device R2 is configured to maintain the indirect next hop to forwarding next-hop binding on the Packet Forwarding Engine forwarding table.

**Action** user@R2> show krt indirect-next-hop

```
Indirect Nexthop:
Index: 262143 Protocol next-hop address: 1.1.1.1
 RIB Table: inet.0
 Policy Version: 0 References: 4
 Locks: 2 0x9290488
 Flags: 0x1
 Ref RIB Table: unknown
 Next hop: 10.0.0.17 via fe-1/2/1.18
Indirect Nexthop:
```

```

Index: 262142 Protocol next-hop address: 10.0.0.1
RIB Table: inet.0
Policy Version: 0 References: 9
Locks: 2 0x9290570
Flags: 0x1
Ref RIB Table: unknown
Next hop: 10.0.0.17 via fe-1/2/1.18

```

**Meaning** The 0x1 flag in the output indicates that Device R2 is configured to maintain the indirect next hop to forwarding next-hop binding on the Packet Forwarding Engine forwarding table. When the **indirect-next-hop** statement is deleted or deactivated, this flag changes to 0x0.



**NOTE:** The `show krt indirect-next-hop` command is hidden and is therefore undocumented. The `show krt indirect-next-hop` command is shown here because this is the only command that verifies the indirect next-hop feature. The best verification method is, of course, monitoring network performance during reconvergence after a path failure.

**Related Documentation**

- [Example: Controlling Static Routes in Routing and Forwarding Tables on page 27](#)

## Example: Configuring Unicast Reverse-Path-Forwarding Check

- [Understanding Unicast Reverse Path Forwarding on page 121](#)
- [Example: Configuring Unicast Reverse-Path-Forwarding Check on page 122](#)

### Understanding Unicast Reverse Path Forwarding

IP spoofing can occur during a denial-of-service (DoS) attack. IP spoofing allows an intruder to pass IP packets to a destination as genuine traffic, when in fact the packets are not actually meant for the destination. This type of spoofing is harmful because it consumes the destination's resources.

A unicast reverse-path-forwarding (RPF) check is a tool to reduce forwarding of IP packets that might be spoofing an address. A unicast RPF check performs a route table lookup on an IP packet's source address, and checks the incoming interface. The router determines whether the packet is arriving from a path that the sender would use to reach the destination. If the packet is from a valid path, the router forwards the packet to the destination address. If it is not from a valid path, the router discards the packet. Unicast RPF is supported for the IPv4 and IPv6 protocol families, as well as for the virtual private network (VPN) address family.



**NOTE:** Reverse path forwarding is not supported on the interfaces you configure as tunnel sources. This affects only the transit packets exiting the tunnel.

## Example: Configuring Unicast Reverse-Path-Forwarding Check

Unicast reverse path forwarding (RPF) helps protect against DoS and DDoS attacks by verifying the unicast source address of each packet that arrives on an ingress interface where unicast RPF is enabled.

This example shows how to help defend ingress interfaces against denial-of-service (DoS) and distributed denial-of-service (DDoS) attacks by configuring unicast RPF to filter incoming traffic.

- [Requirements on page 122](#)
- [Overview on page 122](#)
- [Configuration on page 123](#)
- [Verification on page 128](#)

---

### Requirements

In this example, no special configuration beyond device initialization is required.

---

### Overview

Large amounts of unauthorized traffic such as attempts to flood a network with fake (bogus) service requests in a DoS attack can consume network resources and deny service to legitimate users. One way to help prevent DoS and DDoS attacks is to verify that incoming traffic originates from legitimate network sources.


Unicast RPF helps ensure that a traffic source is legitimate (authorized) by comparing the source address of each packet that arrives on an interface to the forwarding table entry for its source address. If the device uses the same interface that the packet arrived on to reply to the packet's source, this verifies that the packet originated from an authorized source, and the device forwards the packet. If the device does not use the same interface that the packet arrived on to reply to the packet's source, the packet might have originated from an unauthorized source, and the device discards the packet.

In this example, Device B has unicast RPF configured. Device A is using OSPF to advertise a prefix for the link that connects to Device D. OSPF is enabled on the links between Device B and Device C and the links between Device A and Device C, but not on the links between Device A and Device B. Therefore, Device B learns about the route to Device D through Device C.

This example also includes a fail filter. When a packet fails the unicast RPF check, the fail filter is evaluated to determine if the packet should be accepted anyway. The fail filter in this example allows Device B's interfaces to accept Dynamic Host Configuration Protocol (DHCP) packets. The filter accepts all packets with a source address of 0.0.0.0 and a destination address of 255.255.255.255.

[Figure 16 on page 123](#) shows the sample network.

Figure 16: Unicast RPF Sample Topology

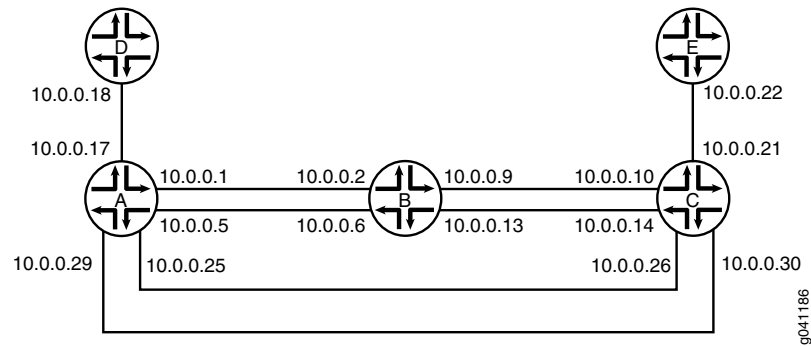

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device A**

```

set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set interfaces fe-0/0/2 unit 5 family inet address 10.0.0.5/30
set interfaces fe-0/0/1 unit 17 family inet address 10.0.0.17/30
set interfaces fe-0/1/1 unit 25 family inet address 10.0.0.25/30
set interfaces fe-1/1/1 unit 29 family inet address 10.0.0.29/30
set protocols ospf export send-direct
set protocols ospf area 0.0.0.0 interface fe-0/1/1.25
set protocols ospf area 0.0.0.0 interface fe-1/1/1.29
set policy-options policy-statement send-direct from protocol direct
set policy-options policy-statement send-direct from route-filter 10.0.0.16/30 exact
set policy-options policy-statement send-direct then accept

```

**Device B**

```

set interfaces fe-1/2/0 unit 2 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/1/1 unit 6 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-1/1/1 unit 6 family inet address 10.0.0.6/30
set interfaces fe-0/1/1 unit 9 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-0/1/1 unit 9 family inet address 10.0.0.9/30
set interfaces fe-0/1/0 unit 13 family inet rpf-check fail-filter rpf-special-case-dhcp
set interfaces fe-0/1/0 unit 13 family inet address 10.0.0.13/30
set protocols ospf area 0.0.0.0 interface fe-0/1/1.9
set protocols ospf area 0.0.0.0 interface fe-0/1/0.13
set routing-options forwarding-table unicast-reverse-path active-paths
set firewall filter rpf-special-case-dhcp term allow-dhcp from source-address 0.0.0.0/32
set firewall filter rpf-special-case-dhcp term allow-dhcp then count rpf-dhcp-traffic
set firewall filter rpf-special-case-dhcp term allow-dhcp then accept
set firewall filter rpf-special-case-dhcp term default then log
set firewall filter rpf-special-case-dhcp term default then reject

```

**Device C**

```

set interfaces fe-1/2/0 unit 10 family inet address 10.0.0.10/30
set interfaces fe-0/0/2 unit 14 family inet address 10.0.0.14/30
set interfaces fe-1/0/2 unit 21 family inet address 10.0.0.21/30
set interfaces fe-1/2/2 unit 26 family inet address 10.0.0.26/30
set interfaces fe-1/2/1 unit 30 family inet address 10.0.0.30/30

```

```
set protocols ospf area 0.0.0.0 interface fe-1/2/0.10
set protocols ospf area 0.0.0.0 interface fe-0/0/2.14
set protocols ospf area 0.0.0.0 interface fe-1/2/2.26
set protocols ospf area 0.0.0.0 interface fe-1/2/1.30
```

Device D     set interfaces fe-1/2/0 unit 18 family inet address 10.0.0.18/30

Device E     set interfaces fe-1/2/0 unit 22 family inet address 10.0.0.22/30

### *Configuring Device A*

**Step-by-Step Procedure**     The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the [Junos OS CLI User Guide](#).

To configure Device A:

1.   Configure the interfaces.  
  
      [edit interfaces]  
      user@A# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30  
  
      user@A# set fe-0/0/2 unit 5 family inet address 10.0.0.5/30  
  
      user@A# set fe-0/0/1 unit 17 family inet address 10.0.0.17/30  
  
      user@A# set fe-0/1/1 unit 25 family inet address 10.0.0.25/30  
  
      user@A# set fe-1/1/1 unit 29 family inet address 10.0.0.29/30
2.   Configure OSPF.  
  
      [edit protocols ospf]  
      user@A# set export send-direct  
      user@A# set area 0.0.0.0 interface fe-0/1/1.25  
      user@A# set area 0.0.0.0 interface fe-1/1/1.29
3.   Configure the routing policy.  
  
      [edit policy-options policy-statement send-direct]  
      user@A# set from protocol direct  
      user@A# set from route-filter 10.0.0.16/30 exact  
      user@A# set then accept
4.   If you are done configuring Device A, commit the configuration.  
  
      [edit]  
      user@A# commit

**Configuring Device B**

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the *Junos OS CLI User Guide*.

To configure Device B:

1. Configure the interfaces.
 

```
[edit interfaces]
user@B# set fe-1/2/0 unit 2 family inet address 10.0.0.2/30

user@B# set fe-1/1/1 unit 6 family inet address 10.0.0.6/30

user@B# set fe-0/1/1 unit 9 family inet address 10.0.0.9/30

user@B# set fe-0/1/0 unit 13 family inet address 10.0.0.13/30
```
2. Configure OSPF.
 

```
[edit protocols ospf area 0.0.0.0]
user@B# set interface fe-0/1/1.9
user@B# set interface fe-0/1/0.13
```
3. Configure unicast RPF, and apply the optional fail filter.
 

```
[edit interfaces]
user@B# set fe-1/2/0 unit 2 family inet rpf-check fail-filter rpf-special-case-dhcp

user@B# set fe-1/1/1 unit 6 family inet rpf-check fail-filter rpf-special-case-dhcp

user@B# set fe-0/1/1 unit 9 family inet rpf-check fail-filter rpf-special-case-dhcp

user@B# set fe-0/1/0 unit 13 family inet rpf-check fail-filter rpf-special-case-dhcp
```
4. (Optional) Configure the fail filter that gets evaluated if a packet fails the RPF check.
 

```
[edit firewall filter rpf-special-case-dhcp]
user@B# set term allow-dhcp from source-address 0.0.0.0/32
user@B# set term allow-dhcp then count rpf-dhcp-traffic
user@B# set term allow-dhcp then accept
user@B# set term default then log
user@B# set term default then reject
```
5. (Optional) Configure only active paths to be considered in the RPF check.
 

This is the default behavior.

```
[edit routing-options forwarding-table]
user@B# set unicast-reverse-path active-paths
```
6. If you are done configuring Device B, commit the configuration.
 

```
[edit]
user@B# commit
```

Confirm your configuration by issuing the **show firewall**, **show interfaces**, **show protocols**, **show routing-options**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device A user@A# show interfaces
fe-1/2/0 {
 unit 1 {
 family inet {
 address 10.0.0.1/30;
 }
 }
}
fe-0/0/2 {
 unit 5 {
 family inet {
 address 10.0.0.5/30;
 }
 }
}
fe-0/0/1 {
 unit 17 {
 family inet {
 address 10.0.0.17/30;
 }
 }
}
fe-0/1/1 {
 unit 25 {
 family inet {
 address 10.0.0.25/30;
 }
 }
}
fe-1/1/1 {
 unit 29 {
 family inet {
 address 10.0.0.29/30;
 }
 }
}

user@A# show protocols
ospf {
 export send-direct;
 area 0.0.0.0 {
 interface fe-0/1/1.25;
 interface fe-1/1/1.29;
 }
}

user@A# show policy-options
policy-statement send-direct {
 from {
 protocol direct;
 route-filter 10.0.0.16/30 exact;
 }
}
```



```

 }
 then accept;
 }

Device B user@B# show firewall
filter rpf-special-case-dhcp {
 term allow-dhcp {
 from {
 source-address {
 0.0.0.0/32;
 }
 }
 then {
 count rpf-dhcp-traffic;
 accept;
 }
 }
 term default {
 then {
 log;
 reject;
 }
 }
}
user@B# show interfaces
fe-1/2/0 {
 unit 2 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.2/30;
 }
 }
}
fe-1/1/1 {
 unit 6 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.6/30;
 }
 }
}
fe-0/1/1 {
 unit 9 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.9/30;
 }
 }
}
fe-0/1/0 {
 unit 13 {
 family inet {
 rpf-check fail-filter rpf-special-case-dhcp;
 address 10.0.0.13/30;
 }
 }
}

```

```
}

user@B# show protocols
ospf {
 area 0.0.0.0 {
 interface fe-0/1/1.9;
 interface fe-0/1/0.13;
 }
}

user@B# show routing-options
forwarding-table {
 unicast-reverse-path active-paths;
}
```

Enter the configurations on Device C, Device D, and Device E, as shown in [“CLI Quick Configuration” on page 123](#).

---

### Verification

Confirm that the configuration is working properly.

- [Confirm That Unicast RPF Is Enabled on page 128](#)
- [Confirm That the Source Addresses Are Blocked on page 129](#)
- [Confirm That the Source Addresses Are Unblocked on page 129](#)

#### *Confirm That Unicast RPF Is Enabled*

**Purpose** Make sure that the interfaces on Device B have unicast RPF enabled.

**Action** user@B> show interfaces fe-0/1/0.13 extensive

```
Logical interface fe-0/1/0.13 (Index 73) (SNMP ifIndex 553) (Generation 208)
Flags: SNMP-Traps 0x4000 Encapsulation: ENET2
Traffic statistics:
 Input bytes : 999390
 Output bytes : 1230122
 Input packets: 12563
 Output packets: 12613
Local statistics:
 Input bytes : 998994
 Output bytes : 1230122
 Input packets: 12563
 Output packets: 12613
Transit statistics:
 Input bytes : 396 0 bps
 Output bytes : 0 0 bps
 Input packets: 0 0 pps
 Output packets: 0 0 pps
Protocol inet, MTU: 1500, Generation: 289, Route table: 22
Flags: Sendbcst-pkt-to-re, uRPF
RPF Failures: Packets: 0, Bytes: 0
Addresses, Flags: Is-Preferred Is-Primary
Destination: 10.0.0.12/30, Local: 10.0.0.13, Broadcast: 10.0.0.15,
Generation: 241
```

**Meaning** The uRPF flag confirms that unicast RPF is enabled on this interface.

***Confirm That the Source Addresses Are Blocked***

**Purpose** Use the **ping** command to make sure that Device B blocks traffic from unexpected source addresses.

**Action** From Device A, ping Device B's interfaces, using 10.0.0.17 as the source address.

```
user@A> ping 10.0.0.6 source 10.0.0.17
PING 10.0.0.6 (10.0.0.6): 56 data bytes
^C
--- 10.0.0.6 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss
```

**Meaning** As expected, the ping operation fails.

***Confirm That the Source Addresses Are Unblocked***

**Purpose** Use the **ping** command to make sure that Device B does not block traffic when the RPF check is deactivated.

**Action**

1. Deactivate the RPF check on one of the interfaces.
2. Rerun the ping operation.

```
user@B> deactivate interfaces fe-1/1/1.6 family inet rpf-check

user@A> ping 10.0.0.6 source 10.0.0.17
PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: icmp_seq=0 ttl=63 time=1.316 ms
64 bytes from 10.0.0.2: icmp_seq=1 ttl=63 time=1.263 ms
^C
--- 10.0.0.2 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.263/1.289/1.316/0.027 ms
```

**Meaning** As expected, the ping operation succeeds.

**Related Documentation**

- [Example: Enabling Indirect Next Hops on the Packet Forwarding Engine on page 111](#)



## CHAPTER 6

# Martian Addresses

- [Example: Configuring Martian Addresses on page 131](#)

## Example: Configuring Martian Addresses

---

- [Understanding Martian Addresses on page 131](#)
- [Example: Configuring Martian Addresses on page 132](#)

## Understanding Martian Addresses

Martian addresses are host or network addresses about which all routing information is ignored. When received by the routing device, these routes are ignored. They commonly are sent by improperly configured systems on the network and have destination addresses that are obviously invalid.

In IPv6, the loopback address and the multicast resolve and discard routes are the default martian addresses.

In Junos OS Release 10.4R5 and later, the reserved IPv6 multicast address space (ff00::/8 and ff02::/16) is added to the list of martian addresses.

In Junos OS Release 9.6 and later, you can configure Class E addresses on interfaces. Class E addresses are treated like any other unicast address for the purpose of forwarding. To allow Class E addresses to be configured on interfaces, you must remove the Class E prefix from the list of martian addresses. To remove the Class E prefix from the list of martian addresses include the **martians 240/4 orlonger allow** statement at the **[edit routing-options]** hierarchy level.

To view the default and configured martian routes, run the **show route martians** command.

### IPv4 Martian Addresses

```
user@host> show route martians table inet.

inet.0:
 0.0.0.0/0 exact -- allowed
 0.0.0.0/8 orlonger -- disallowed
 127.0.0.0/8 orlonger -- disallowed
 192.0.0.0/24 orlonger -- disallowed
 240.0.0.0/4 orlonger -- disallowed
 224.0.0.0/4 exact -- disallowed
 224.0.0.0/24 exact -- disallowed

inet.1:
```

```
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- disallowed

inet.2:
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- disallowed
224.0.0.0/4 exact -- disallowed
224.0.0.0/24 exact -- disallowed

inet.3:
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- disallowed
224.0.0.0/4 exact -- disallowed
224.0.0.0/24 exact -- disallowed
```

**IPv6 Martian Addresses**

```
user@host> show route martians table inet6
inet6.0:
::1/128 exact -- disallowed
ff00::/8 exact -- disallowed
ff02::/16 exact -- disallowed

inet6.1:
::1/128 exact -- disallowed

inet6.2:
::1/128 exact -- disallowed
ff00::/8 exact -- disallowed
ff02::/16 exact -- disallowed

inet6.3:
::1/128 exact -- disallowed
ff00::/8 exact -- disallowed
ff02::/16 exact -- disallowed
```

## Example: Configuring Martian Addresses

This example shows how to remove the Class E prefix from the list of martian addresses.

- [Requirements on page 132](#)
- [Overview on page 133](#)
- [Configuration on page 133](#)
- [Verification on page 134](#)

### Requirements

---

No special configuration beyond device initialization is required before configuring this example.

## Overview

In this example, Junos OS defaults are modified to allow the 240.0.0.0/4 address block. This block of addresses is known as the experimental Class E addresses. In Junos OS Release 9.6 and later, you can configure Class E addresses on interfaces and use them for forwarding traffic. However, to do this, you must first allow routing on this address block.

This example also shows how to modify the martian addresses in the IPv6 routing table, **inet6.0**.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options rib inet.1 martians 240.0.0.0/4 orlonger allow
set routing-options rib inet6.0 martians fd00::/8 orlonger
set routing-options rib inet.3 martians 240.0.0.0/4 orlonger allow
set routing-options rib inet.2 martians 240.0.0.0/4 orlonger allow
set routing-options martians 240.0.0.0/4 orlonger allow
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see Using the CLI Editor in Configuration Mode in the *Junos OS CLI User Guide*.

To configure martian routes:

1. Allow Class C addresses in the default unicast routing table.  

```
[edit routing-options]
user@host# set martians 240.0.0.0/4 orlonger allow
```
2. Allow Class C addresses in the routing table that is used for the IPv4 multicast forwarding cache.  

```
[edit routing-options]
user@host# set rib inet.1 martians 240.0.0.0/4 orlonger allow
```
3. Allow Class C addresses in the routing table that is used for multicast reverse path forwarding (RPF) lookup.  

```
[edit routing-options]
user@host# set rib inet.2 martians 240.0.0.0/4 orlonger allow
```
4. Allow Class C addresses in the routing table that stores MPLS LSP information.  

```
[edit routing-options]
user@host# set rib inet.3 martians 240.0.0.0/4 orlonger allow
```
5. Add a disallowed martian route to the IPv6 unicast routing table.  

```
[edit routing-options]
user@host# set rib inet6.0 martians fd00::/8 orlonger
```

6. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

Confirm your configuration by issuing the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show routing-options
rib inet.1 {
 martians {
 240.0.0.0/4 orlonger allow;
 }
}
rib inet6.0 {
 martians {
 fd00::/8 orlonger;
 }
}
rib inet.3 {
 martians {
 240.0.0.0/4 orlonger allow;
 }
}
rib inet.2 {
 martians {
 240.0.0.0/4 orlonger allow;
 }
}
martians {
 240.0.0.0/4 orlonger allow;
}
```

---

## Verification

Confirm that the configuration is working properly.

- [Verifying That the 240.0.0.0/4 Routes Are Now Accepted on page 134](#)
- [Verifying That the fd00::/8 Routes Are Now Rejected on page 135](#)

### *Verifying That the 240.0.0.0/4 Routes Are Now Accepted*

**Purpose** Make sure that the 240.0.0.0/4 route appears in the routing tables as allowed.

```
Action user@host> show route martians table inet.
inet.0:
 0.0.0.0/0 exact -- allowed
 0.0.0.0/8 orlonger -- disallowed
 127.0.0.0/8 orlonger -- disallowed
 192.0.0.0/24 orlonger -- disallowed
 240.0.0.0/4 orlonger -- allowed
 224.0.0.0/4 exact -- disallowed
 224.0.0.0/24 exact -- disallowed

inet.1:
```



```

0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- allowed

inet.2:
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- allowed
224.0.0.0/4 exact -- disallowed
224.0.0.0/24 exact -- disallowed

inet.3:
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- allowed
224.0.0.0/4 exact -- disallowed
224.0.0.0/24 exact -- disallowed

```

**Meaning** The output shows that the 240.0.0.0/4 route is allowed.

#### *Verifying That the fd00::/8 Routes Are Now Rejected*

**Purpose** Make sure that the fd00::/8 route appears in the IPv6 unicast routing table as disallowed.

```

Action user@host> show route martians table inet6.0
inet6.0:
::1/128 exact -- disallowed
ff00::/8 exact -- disallowed
ff02::/16 exact -- disallowed
fd00::/8 orlonger -- disallowed

```

**Meaning** The output shows that the fd00::/8 route is disallowed.

**Related Documentation**

- [Examples: Creating a Routing Table and Populating It with Routes on page 34](#)
- [Example: Controlling Static Routes in Routing and Forwarding Tables on page 27](#)



## CHAPTER 7

# Debugging and Trace Operations

- [Example: Tracing Global Routing Protocol Operations on page 137](#)

### Example: Tracing Global Routing Protocol Operations

---

- [Understanding Global Routing Protocol Tracing Operations on page 137](#)
- [Example: Tracing Global Routing Protocol Operations on page 138](#)

### Understanding Global Routing Protocol Tracing Operations

Global routing protocol tracing operations track all general routing operations and record them in a log file. To set protocol-specific tracing operations and to modify the global tracing operations for an individual protocol, configure tracing for that protocol.

Using the **traceoptions** statement, you can specify the following global routing protocol tracing flags:

- **all**—All tracing operations
- **condition-manager**—Condition manager events
- **config-internal**—Configuration internals
- **general**—All normal operations and routing table changes (a combination of the normal and route trace operations)
- **graceful-restart**—Graceful restart operations
- **normal**—All normal operations
- **nsr-synchronization**—Nonstop routing synchronization events
- **parse**—Configuration parsing
- **policy**—Policy operations and actions
- **regex-parse**—Regular expression parsing
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage



**NOTE:** Use the **all** flag with caution. This flag might cause the CPU to become very busy.

---

## Example: Tracing Global Routing Protocol Operations

This example shows how to list and view files that are created when you enable global routing trace operations.

- [Requirements on page 138](#)
- [Overview on page 138](#)
- [Configuration on page 139](#)
- [Verification on page 141](#)

---

### Requirements

You must have the **view** privilege.

---

### Overview

To configure global routing protocol tracing, include the **traceoptions** statement at the **[edit routing-options]** hierarchy level:

```
traceoptions {
 file filename <files number> <size size> <world-readable | no-world-readable>;
 flag flag <disable>;
}
```

The flags in a **traceoptions flag** statement are identifiers. When you use the **set** command to configure a flag, any flags that might already be set are not modified. In the following example, setting the **timer** tracing flag has no effect on the already configured **task** flag. Use the **delete** command to delete a particular flag.

```
[edit routing-options traceoptions]
user@host# show
flag task;
user@host# set traceoptions flag timer
user@host# show
flag task;
flag timer;
user@host# delete traceoptions flag task
user@host# show
flag timer;
```

This example shows how to configure and view a trace file that tracks changes in the routing table. The steps can be adapted to apply to trace operations for any Junos OS hierarchy level that supports trace operations.



**TIP:** To view a list of hierarchy levels that support tracing operations, enter the **help apropos traceoptions** command in configuration mode.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set routing-options traceoptions file routing-table-changes
set routing-options traceoptions file size 10m
set routing-options traceoptions file files 10
set routing-options traceoptions flag route
set routing-options static route 1.1.1.2/32 next-hop 10.0.45.6
```

## Configuring Trace Operations

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode in the Junos OS CLI User Guide*.

To configure the trace operations:

1. Configure trace operations.

```
[edit routing-options traceoptions]
user@host# set file routing-table-changes
user@host# set file size 10m
user@host# set file files 10
user@host# set flag route
```

2. Configure a static route to cause a change in the routing table.

```
[edit routing-options static]
user@host# set route 1.1.1.2/32 next-hop 10.0.45.6
```

3. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

## Viewing the Trace File

**Step-by-Step Procedure** To view the trace file:

1. In operational mode, list the log files on the system.

```
user@host> file list /var/log
/var/log:
...
routing-table-changes
...
```

2. View the contents of the **routing-table-changes** file.

```
user@host> file show /var/log/routing-table-changes
Dec 15 11:09:29 trace_on: Tracing to "/var/log/routing-table-changes" started
Dec 15 11:09:29.496507
Dec 15 11:09:29.496507 Tracing flags enabled: route
Dec 15 11:09:29.496507
```

```

Dec 15 11:09:29.533203 inet_routerid_notify: Router ID: 192.168.4.1
Dec 15 11:09:29.533334 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.533381 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.533420 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.534915 inet_routerid_notify: Router ID: 192.168.4.1
Dec 15 11:09:29.542934 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.549253 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.556878 inet_routerid_notify: No Router ID assigned
Dec 15 11:09:29.582990 rt_static_reinit: examined 3 static nexthops, 0
unreferenced
Dec 15 11:09:29.589920
Dec 15 11:09:29.589920 task_reconfigure reinitializing done
...

```

3. Filter the output of the log file.

```

user@host> file show /var/log/routing-table-changes | match 1.1.1.2
Dec 15 11:15:30.780314 ADD 1.1.1.2/32 nhid 0 gw 10.0.45.6
 Static pref 5/0 metric at-0/2/0.0 <ctive Int Ext>
Dec 15 11:15:30.782276 KRT Request: send len 216 v104 seq 0 ADD route/user
af 2 table 0 infot 0 addr 1.1.1.2 nhop-type unicast nhindex 663

```

4. View the tracing operations in real time by running the **monitor start** command with an optional **match** condition.

```

user@host> monitor start routing-table-changes | match 1.1.1.2
Aug 10 19:21:40.773467 BGP RECV 0.0.0.0/0
Aug 10 19:21:40.773685 bgp_rcv_nlri: 0.0.0.0/0
Aug 10 19:21:40.773778 bgp_rcv_nlri: 0.0.0.0/0 belongs to meshgroup
Aug 10 19:21:40.773832 bgp_rcv_nlri: 0.0.0.0/0 qualified bnp->ribact 0x0
12afcb 0x0

```

5. Deactivate the static route.

```

user@host# deactivate routing-options static route 1.1.1.2/32
user@host# commit

*** routing-table-changes ***
Dec 15 11:42:59.355557 CHANGE 1.1.1.2/32 nhid 663 gw 10.0.45.6
 Static pref 5/0 metric at-0/2/0.0 <Delete Int Ext>
Dec 15 11:42:59.426887 KRT Request: send len 216 v104 seq 0 DELETE route/user
af 2 table 0 infot 0 addr 1.1.1.2 nhop-type discard filtidx 0
Dec 15 11:42:59.427366 RELEASE 1.1.1.2/32 nhid 663 gw 10.0.45.6
 Static pref 5/0 metric at-0/2/0.0 <Release Delete Int Ext>

```

6. Halt the **monitor** command by pressing Enter and typing **monitor stop**.

```

[Enter]
user@host> monitor stop

```

7. When you are finished troubleshooting, consider deactivating trace logging to avoid any unnecessary impact to system resources.

When configuration is deactivated, it appears in the configuration with the **inactive** tag.

```

[edit routing-options]
user@host# deactivate traceoptions
user@host# commit

[edit routing-options]
user@host# show

inactive: traceoptions {

```

```

 file routing-table-changes size 10m files 10;
 flag route;
 }
 static {
 inactive: route 1.1.1.2/32 next-hop 10.0.45.6;
 }
}

```

8. To reactivate trace operations, use the **activate** configuration-mode statement.

```

[edit routing-options]
user@host# activate traceoptions
user@host# commit

```

From configuration mode, confirm your configuration by entering the **show routing-options** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@host# show routing-options
traceoptions {
 file routing-table-changes size 10m files 10;
 flag route;
}
static {
 route 1.1.1.2/32 next-hop 10.0.45.6;
}

```

### Verification

Confirm that the configuration is working properly.

#### *Verifying That the Trace Log File Is Operating*

**Purpose** Make sure that events are being written to the log file.

**Action** user@host> show log routing-table-changes  
Dec 15 11:09:29 trace\_on: Tracing to "/var/log/routing-table-changes" started

**Related Documentation**

- Example: Configuring BGP Trace Operations





## CHAPTER 8

# Configuration Statements

### access

---

**Syntax**    access {  
              route *ip-prefix*</prefix-length> {  
                  metric *route-cost*;  
                  next-hop *next-hop*;  
                  preference (Access) *route-distance*;  
                  qualified-next-hop *next-hop*;  
                  tag *tag-number*  
              }

**Hierarchy Level**    [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
                          [edit logical-systems *logical-system-name* routing-options],  
                          [edit routing-instances *routing-instance-name* routing-options],  
                          [edit routing-options]

**Release Information**    Statement introduced in Junos OS Release 10.1.

**Description**    Configure access routes.  
  
                  The remaining statements are explained separately.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                  routing-control—To add this statement to the configuration.

**Related Documentation**    • [Examples: Configuring Static Routes on page 7](#)

## access-internal

---

|                                 |                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>access-internal {<br/>    route <i>ip-prefix</i> &lt;/prefix-length&gt; {<br/>        next-hop <i>next-hop</i>;<br/>        qualified-next-hop <i>next-hop</i><br/>    }<br/>}</pre>                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options]                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure parameters for internal access routes.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Importing and Exporting Access and Access-Internal Routes in a Routing Policy</li><li>• Configuring Dynamic Access-Internal Routes for DHCP Subscriber Management</li><li>• Configuring Dynamic Access-Internal Routes for PPP Subscriber Management</li></ul> |

## active

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (active   passive);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Determine whether static, aggregate, or generated routes are removed from the routing and forwarding tables when they become inactive. Static routes are only removed from the routing table if the next hop becomes unreachable. This can occur if the local or neighbor interface goes down. Routes that have been configured to remain continually installed in the routing and forwarding tables are marked with <b>reject</b> next hops when they are inactive.</p> <ul style="list-style-type: none"> <li>• <b>active</b>—Remove a route from the routing and forwarding tables when it becomes inactive.</li> <li>• <b>passive</b>—Have a route remain continually installed in the routing and forwarding tables even when it becomes inactive.</li> </ul> <p>Include the <b>active</b> statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>passive</b> option specified in the <b>defaults</b> portion of the statement.</p>                                                                                                                                                                                                                                                                                                                                        |
| <b>Default</b>                  | active                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> <li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li> <li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## aggregate

---

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre>aggregate {   defaults {     ... aggregate-options ...   }   route destination-prefix {     policy policy-name;     ... aggregate-options ...   } }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Hierarchy Level     | <pre>[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options], [edit logical-systems logical-system-name routing-instances routing-instance-name routing-options rib routing-table-name], [edit logical-systems logical-system-name routing-options], [edit logical-systems logical-system-name routing-options rib routing-table-name], [edit routing-instances routing-instance-name routing-options], [edit routing-instances routing-instance-name routing-options rib routing-table-name], [edit routing-options], [edit routing-options rib routing-table-name]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Release Information | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description         | Configure aggregate routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Options             | <p><b>aggregate-options</b>—Additional information about aggregate routes that is included with the route when it is installed in the routing table. Specify zero or more of the following options in <b>aggregate-options</b>. Each option is explained separately.</p> <ul style="list-style-type: none"><li>• (active   passive);</li><li>• as-path &lt;as-path&gt; &lt;origin (egp   igp   incomplete)&gt; &lt;atomic-aggregate&gt; &lt;aggregator as-number ip-address&gt;;</li><li>• (brief   full);</li><li>• community [ community-ids ];</li><li>• discard;</li><li>• (metric   metric2   metric3   metric4) value &lt;type type&gt;;</li><li>• (preference   preference2   color   color2) preference &lt;type type&gt;;</li><li>• tag string;</li></ul> <p><b>defaults</b>—Specify global aggregate route options. These options only set default attributes inherited by all newly created aggregate routes. These are treated as global defaults and apply to all the aggregate routes you configure in the <b>aggregate</b> statement. This part of the <b>aggregate</b> statement is optional.</p> |

**route *destination-prefix***—Configure a nondefault aggregate route:

- **default**—For the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.
- ***destination-prefix/prefix-length***—***destination-prefix*** is the network portion of the IP address, and ***prefix-length*** is the destination prefix length.

The **policy** statement is explained separately.

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                    |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li></ul> |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|

## as-path

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>as-path &lt;as-path&gt; &lt;aggregator as-number ip-address&gt; &lt;atomic-aggregate&gt; &lt;origin (egp   igp   incomplete)&gt;;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>         | <p>Associate BGP autonomous system (AS) path information with a static, aggregate, or generated route.</p> <p>In Junos OS Release 9.1 and later, the numeric range for the AS number is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.2 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <i>&lt;16-bit high-order value in decimal&gt;.&lt;16-bit low-order value in decimal&gt;</i>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format. You can specify a value in the range from 0.0 through 65535.65535 in AS-dot notation format.</p>                                                                                                                  |
| <b>Default</b>             | No AS path information is associated with static routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>             | <p><b>aggregator</b>—(Optional) Attach the BGP <b>aggregator</b> path attribute to the aggregate route. You must specify the last AS number that formed the aggregate route (encoded as two octets) for <b>as-number</b>, followed by the IP address of the BGP system that formed the aggregate route for <b>ip-address</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

**as-path**—(Optional) AS path to include with the route. It can include a combination of individual AS path numbers and AS sets. Enclose sets in brackets ( [ ] ). The first AS number in the path represents the AS immediately adjacent to the local AS. Each subsequent number represents an AS that is progressively farther from the local AS, heading toward the origin of the path. You cannot specify a regular expression for **as-path**. You must use a complete, valid AS path.

**atomic-aggregate**—(Optional) Attach the BGP **atomic-aggregate** path attribute to the aggregate route. This path attribute indicates that the local system selected a less specific route instead of a more specific route.

**origin egp**—(Optional) BGP origin attribute that indicates that the path information originated in another AS.

**origin igp**—(Optional) BGP origin attribute that indicates that the path information originated within the local AS.

**origin incomplete**—(Optional) BGP origin attribute that indicates that the path information was learned by some other means.

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li><li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li><li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li><li>• Understanding a 4-Byte Capable Router AS Path Through a 2-Byte Capable Domain in the <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li></ul> |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## auto-export

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> auto-export {   (disable   enable);   family {     inet {       multicast {         (disable   enable);         rib-group <i>rib-group</i>;       }       unicast {         (disable   enable);         rib-group <i>rib-group</i>;       }     }     <b>traceoptions</b> {       file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;       flag <i>flag</i> &lt;<i>flag-modifier</i>&gt; &lt;disable&gt;;     }   } } </pre>                                                                                              |
| <b>Hierarchy Level</b>     | <pre> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options], [edit logical-systems <i>logical-system-name</i> routing-options], [edit routing-instances <i>routing-instance-name</i> routing-options], [edit routing-options] </pre>                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>         | <p>Export routes between routing instances.</p> <p>This statement enables you to leak routes between VPN routing and forwarding (VRF) instances that are locally configured on a provider edge (PE) router. Auto export is always applied on the local PE router, because it applies to only local prefix leaking by evaluating the export policy of each VRF and determining which route targets can be leaked. The standard VRF import and export policies affect remote PE prefix leaking.</p> <p>You can use this statement as an alternative to using the VRF import and export policies.</p> |
| <b>Options</b>             | <p><b>(disable   enable)</b>—Disable or enable auto-export.</p> <p><b>Default:</b> Enable</p> <p><b>family</b>—Address family.</p> <p><b>inet</b>—IP version 4 (IPv4) address family.</p> <p><b>multicast</b>—Multicast routing information.</p> <p><b>unicast</b>—Unicast routing information.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                      |



|                              |                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege</b>    | routing—To view this statement in the configuration.                                                                                                |
| <b>Level</b>                 | routing-control—To add this statement to the configuration.                                                                                         |
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• Example: Configuring and Verifying the Auto Export Feature</li><li>• Auto Export Feature Overview</li></ul> |

## autonomous-system

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>autonomous-system <i>autonomous-system</i> &lt;asdot-notation&gt; &lt;loops <i>number</i>&gt; {<br/>    <i>independent-domain</i> &lt;no-attrset&gt;;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>     | <pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i><br/>    routing-options],<br/>[edit logical-systems <i>logical-system-name</i> routing-options],<br/>[edit routing-instances <i>routing-instance-name</i> routing-options],<br/>[edit routing-options]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>asdot-notation</b> option introduced in Junos OS Release 9.3.</p> <p><b>asdot-notation</b> option introduced in Junos OS Release 9.3 for EX Series switches.</p> <p><b>no-attrset</b> option introduced in Junos OS Release 10.4.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>         | <p>Specify the routing device's AS number.</p> <p>An autonomous system (AS) is a set of routing devices that are under a single technical administration and that generally use a single interior gateway protocol (IGP) and metrics to propagate routing information within the set of routing devices. An AS appears to other ASs to have a single, coherent interior routing plan and presents a consistent picture of what destinations are reachable through it. ASs are identified by a number that is assigned by the Network Information Center (NIC) in the United States (<a href="http://www.isi.edu">http://www.isi.edu</a>).</p> <p>If you are using BGP on the routing device, you must configure an AS number.</p> <p>The AS path attribute is modified when a route is advertised to an EBGp peer. Each time a route is advertised to an EBGp peer, the local routing device prepends its AS number to the existing path attribute, and a value of 1 is added to the AS number.</p> <p>In Junos OS Release 9.1 and later, the numeric range is extended to provide BGP support for 4-byte AS numbers as defined in RFC 4893, <i>BGP Support for Four-octet AS Number Space</i>. RFC 4893 introduces two new optional transitive BGP attributes, AS4_PATH and AS4_AGGREGATOR. These new attributes are used to propagate 4-byte AS path information across BGP speakers that do not support 4-byte AS numbers. RFC 4893 also introduces a reserved, well-known, 2-byte AS number, AS 23456. This reserved AS number is called AS_TRANS in RFC 4893. All releases of Junos OS support 2-byte AS numbers.</p> <p>In Junos OS Release 9.3 and later, you can also configure a 4-byte AS number using the AS-dot notation format of two integer values joined by a period: <i>&lt;16-bit high-order value in decimal&gt;.&lt;16-bit low-order value in decimal&gt;</i>. For example, the 4-byte AS number of 65,546 in plain-number format is represented as 1.10 in the AS-dot notation format.</p> |
| <b>Options</b>             | <p><b><i>autonomous-system</i></b>—AS number. Use a number assigned to you by the NIC.</p> <p><b>Range:</b> 1 through 4,294,967,295 (<math>2^{32} - 1</math>) in plain-number format for 4-byte AS numbers</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

In this example, the 4-byte AS number 65,546 is represented in plain-number format:

```
[edit]
routing-options {
 autonomous-system 65546;
}
```

**Range:** 0.0 through 65535.65535 in AS-dot notation format for 4-byte numbers

In this example, 1.10 is the AS-dot notation format for 65,546:

```
[edit]
routing-options {
 autonomous-system 1.10;
}
```

**Range:** 1 through 65,535 in plain-number format for 2-byte AS numbers (this is a subset of the 4-byte range)

In this example, the 2-byte AS number 60,000 is represented in plain-number format:

```
[edit]
routing-options {
 autonomous-system 60000;
}
```

**asdot-notation**—(Optional) Display the configured 4-byte autonomous system number in the AS-dot notation format.

**Default:** Even if a 4-byte AS number is configured in the AS-dot notation format, the default is to display the AS number in the plain-number format.

**loops number**—(Optional) Specify the number of times detection of the AS number in the AS\_PATH attribute causes the route to be discarded or hidden. For example, if you configure **loops 1**, the route is hidden if the AS number is detected in the path one or more times. This is the default behavior. If you configure **loops 2**, the route is hidden if the AS number is detected in the path two or more times.

**Range:** 1 through 10

**Default:** 1



**NOTE:** When you specify the same AS number in more than one routing instance on the local routing device, you must configure the same number of loops for the AS number in each instance. For example, if you configure a value of 3 for the **loops** statement in a VRF routing instance that uses the same AS number as that of the master instance, you must also configure a value of 3 loops for the AS number in the master instance.

Use the **independent-domain** option if the **loops** statement must be enabled only on a subset of routing instances.

The remaining statement is explained separately.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Examples: Configuring External BGP Peering</li><li>• Examples: Configuring Internal BGP Peering</li><li>• 4-Byte Autonomous System Numbers Overview in the <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li><li>• Juniper Networks Implementation of 4-Byte Autonomous System Numbers in the <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li><li>• Configuring 4-Byte Autonomous System Numbers in the <i>Using 4-Byte Autonomous System Numbers in BGP Networks Technology Overview</i></li></ul> |

## bfd

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> bfd {   traceoptions {     file <i>filename</i> &lt;files <i>number</i>&gt; &lt;match <i>regular-expression</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable         no-world-readable&gt;;     flag <i>flag</i> &lt;<i>flag-modifier</i>&gt; &lt;disable&gt;;   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols],<br/> [edit protocols],<br/> [edit routing-instances <i>routing-instance-name</i> protocols]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>         | Configure trace options for Bidirectional Forwarding Protocol (BFD) traffic.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>             | If you do not include this statement, no BFD tracing operations are performed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>             | <p><b>disable</b>—(Optional) Disable the BFD tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name in quotation marks. All files are placed in the <b>/var/log</b> directory. We recommend that you place global routing protocol tracing output in the <b>routing-log</b> file.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 2 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. These are the BFD protocol tracing options:</p> <ul style="list-style-type: none"> <li>• <b>adjacency</b>—Trace adjacency messages.</li> <li>• <b>all</b>—Trace all options for BFD.</li> <li>• <b>error</b>—Trace all errors.</li> <li>• <b>event</b>—Trace all events.</li> <li>• <b>issu</b>—Trace in-service software upgrade (ISSU) packet activity.</li> </ul> |

- **nsr-packet**—Trace non-stop-routing (NSR) packet activity.
- **nsr-synchronization**—Trace NSR synchronization events.
- **packet**—Trace all packets.
- **pipe**—Trace pipe messages.
- **pipe-detail**—Trace pipe messages in detail.
- **ppm-packet**—Trace packet activity by periodic packet management (PPM).
- **state**—Trace state transitions.
- **timer**—Trace timer processing.

**match *regular-expression***—(Optional) Regular expression for lines to be logged.

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size *size***—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file.0***. When the trace file again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

|                                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing and trace—To view this statement in the configuration.                                                          |
|                                 | routing-control and trace-control—To add this statement to the configuration.                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes on page 91</a></li></ul> |

## bfd-liveness-detection

**Syntax** `bfd-liveness-detection {`  
     `authentication {`  
         `algorithm` *algorithm-name*;  
         `key-chain` *key-chain-name*;  
         `loose-check`;  
     `}`  
     `detection-time {`  
         `threshold` *milliseconds*;  
     `}`  
     `holddown-interval` *milliseconds*;  
     `local-address` *ip-address*;  
     `minimum-interval` *milliseconds*;  
     `minimum-receive-interval` *milliseconds*;  
     `minimum-receive-ttl` *number*;  
     `multiplier` *number*;  
     `neighbor` *address*;  
     `no-adaptation`;  
     `transmit-interval {`  
         `minimum-interval` *milliseconds*;  
         `threshold` *milliseconds*;  
     `}`  
     `version` (1 | automatic);  
`}`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options static route *destination-prefix*],  
 [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],  
 [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* static route *destination-prefix*],  
 [edit logical-systems *logical-system-name* routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],  
 [edit logical-systems *logical-system-name* routing-options static route *destination-prefix*],  
 [edit logical-systems *logical-system-name* routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],  
 [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix*],  
 [edit routing-instances *routing-instance-name* routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],  
 [edit routing-instances *routing-instance-name* routing-options static route *destination-prefix*],  
 [edit routing-instances *routing-instance-name* routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],  
 [edit routing-options rib *routing-table-name* static route *destination-prefix*],  
 [edit routing-options rib *routing-table-name* static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)],  
 [edit routing-options static route *destination-prefix*],

[edit routing-options static route *destination-prefix* qualified-next-hop (*interface-name* | *address*)]

- Release Information** Statement introduced before Junos OS Release 7.4.  
**detection-time threshold** and **transmit-interval threshold** options introduced in Junos OS Release 8.2.  
**local-address** statement introduced in Junos OS Release 8.2.  
**minimum-receive-ttl** statement introduced in Junos OS Release 8.2.  
Support for logical routers introduced in Junos OS Release 8.3.  
**holddown-interval** statement introduced in Junos OS Release 8.5.  
**no-adaptation** statement introduced in Junos OS Release 9.0.  
Support for IPv6 static routes introduced in Junos OS Release 9.1.  
**authentication algorithm**, **authentication key-chain**, and **authentication loose-check** statements introduced in Junos OS Release 9.6.  
Statement introduced in Junos OS Release 12.1 for the QFX Series.
- Description** Configure bidirectional failure detection timers and authentication criteria for static routes.



- Options**    **authentication algorithm** *algorithm-name*—Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, or **meticulous-keyed-sha-1**.
- authentication key-chain** *key-chain-name*—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.
- authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.
- detection-time threshold** *milliseconds*—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.
- holddown-interval** *milliseconds*—Configure an interval specifying how long a BFD session must remain up before a state change notification is sent. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.  
**Range:** 0 through 255,000  
**Default:** 0
- local-address** *ip-address*—Enable a multihop BFD session and configure the source address for the BFD session.
- minimum-interval** *milliseconds*—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.  
**Range:** 1 through 255,000
- minimum-receive-interval** *milliseconds*—Configure the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route destination-prefix bfd-liveness-detection]** hierarchy level.  
**Range:** 1 through 255,000
- minimum-receive-ttl** *number*—Configure the time to live (TTL) for the multihop BFD session.  
**Range:** 1 through 255  
**Default:** 255
- multiplier** *number*—Configure number of hello packets not received by the neighbor that causes the originating interface to be declared down.  
**Range:** 1 through 255  
**Default:** 3

**neighbor *address***—Configure a next-hop address for the BFD session for a next hop specified as an interface name.

**no-adaptation**—Specify for BFD sessions not to adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold *milliseconds***—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295

**transmit-interval minimum-interval *milliseconds***—Configure the minimum interval at which the routing device transmits hello packets to a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version).

**Default:** automatic

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|

|                              |                                                                                                                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring BFD for Static Routes on page 91</a></li><li>• <a href="#">Example: Configuring BFD Authentication for Static Routes on page 104</a></li></ul> |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## brief

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (brief   full);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Configure all AS numbers from all contributing paths to be included in the aggregate or generated route's path.</p> <ul style="list-style-type: none"> <li>• <b>brief</b>—Include only the longest common leading sequences from the contributing AS paths. If this results in AS numbers being omitted from the aggregate route, the BGP <b>ATOMIC_ATTRIBUTE</b> path attribute is included with the aggregate route.</li> <li>• <b>full</b>—Include all AS numbers from all contributing paths in the aggregate or generated route's path. Include this option when configuring an individual route in the <b>route</b> portion of the <b>generate</b> statement to override a <b>retain</b> option specified in the <b>defaults</b> portion of the statement.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Default</b>                  | full                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li> <li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li> <li>• <a href="#">aggregate on page 146</a></li> <li>• <a href="#">generate on page 174</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## color

See [preference](#)

## community

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>community ([ <i>community-ids</i> ]   no-advertise   no-export   no-export-subconfed   none);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>   <b>static</b>) (defaults   route)]</p>                                                                                                     |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>         | Associate BGP community information with a static, aggregate, or generated route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>             | No BGP community information is associated with static routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>             | <p><b><i>community-ids</i></b>—One or more community identifiers. The <b><i>community-ids</i></b> format varies according to the type of attribute that you use.</p> <p>The BGP community attribute format is <b><i>as-number:community-value</i></b>:</p> <ul style="list-style-type: none"> <li>• <b><i>as-number</i></b>—AS number of the community member. It can be a value from 1 through 65,535. The AS number can be a decimal or hexadecimal value.</li> <li>• <b><i>community-value</i></b>—Identifier of the community member. It can be a number from 0 through 65,535.</li> </ul> <p>For more information about BGP community attributes, see the “Configuring the Extended Communities Attribute” section in the <a href="#">Junos OS Policy Framework Configuration Guide</a>.</p> <p>For specifying the BGP community attribute only, you also can specify <b><i>community-ids</i></b> as one of the following well-known community names defined in RFC 1997:</p> <ul style="list-style-type: none"> <li>• <b>no-advertise</b>—Routes containing this community name are not advertised to other BGP peers.</li> <li>• <b>no-export</b>—Routes containing this community name are not advertised outside a BGP confederation boundary.</li> <li>• <b>no-export-subconfed</b>—Routes containing this community name are not advertised to external BGP peers, including peers in other members’ ASs inside a BGP confederation.</li> </ul> |



**NOTE:** Extended community attributes are not supported at the [edit routing-options] hierarchy level. You must configure extended communities at the [edit policy-options] hierarchy level. For information about configuring extended communities, see the *Junos OS Policy Framework Configuration Guide*.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li><li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li><li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li><li>• <a href="#">aggregate on page 146</a></li><li>• <a href="#">generate on page 174</a></li><li>• <a href="#">static on page 230</a></li></ul> |

## confederation

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>confederation <i>confederation-autonomous-system</i> members [ <i>autonomous-systems</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Specify the routing device's confederation AS number.</p> <p>If you administer multiple ASs that contain a very large number of BGP systems, you can group them into one or more <i>confederations</i>. Each confederation is identified by its own AS number, which is called a <i>confederation AS number</i>. To external ASs, a confederation appears to be a single AS. Thus, the internal topology of the ASs making up the confederation is hidden.</p> <p>The BGP path attributes <b>NEXT_HOP</b>, <b>LOCAL_PREF</b>, and <b>MULTI_EXIT_DISC</b>, which normally are restricted to a single AS, are allowed to be propagated throughout the ASs that are members of the same confederation.</p> <p>Because each confederation is treated as if it were a single AS, you can apply the same routing policy to all the ASs that make up the confederation.</p> <p>Grouping ASs into confederations reduces the number of BGP connections required to interconnect ASs.</p> <p>If you are using BGP, you can enable the local routing device to participate as a member of an AS confederation. To do this, include the <b>confederation</b> statement.</p> <p>Specify the AS confederation identifier, along with the peer AS numbers that are members of the confederation.</p> <p>Note that peer adjacencies do not form if two BGP neighbors disagree about whether an adjacency falls within a particular confederation.</p> |
| <b>Options</b>                  | <p><b><i>autonomous-systems</i></b>—AS numbers of the confederation members.<br/><b>Range:</b> 1 through 65,535</p> <p><b><i>confederation-autonomous-system</i></b>—Confederation AS number. Use one of the numbers assigned to you by the NIC.<br/><b>Range:</b> 1 through 65,535</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Example: Configuring BGP Confederations</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |


## destination-networks

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>destination-networks <i>prefix</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify the IPv4 prefix range for the destination network. Only tunnels within the specified IPv4 prefix range can be created.                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <i>prefix</i> —Destination prefix of the network.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring GRE Tunnels for Layer 3 VPNs</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                  |

## disable

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>disable;</code>                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> graceful-restart],<br>[edit logical-systems <i>logical-system-name</i> <a href="#">routing-options</a> graceful-restart],<br>[edit routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> graceful-restart],<br>[edit <a href="#">routing-options</a> graceful-restart] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Disable graceful restart.                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><a href="#">Junos OS High Availability Configuration Guide</a></li> </ul>                                                                                                                                                                                                                                                                                                                |

## discard

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | discard;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>) (defaults   route)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.</p> <p>To propagate static routes into the routing protocols, include the <b>discard</b> statement when you define the route, along with a routing policy.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                 | <div>  <p><b>NOTE:</b> In other vendors' software, a common way to propagate static routes into routing protocols is to configure the routes so that the next-hop routing device is the loopback address (commonly, 127.0.0.1). However, configuring static routes in this way (by including a statement such as <code>route <i>address/mask-length</i> next-hop 127.0.0.1</code>) does not propagate the static routes, because the forwarding table ignores static routes whose next-hop routing device is the loopback address.</p> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Default</b>                  | When an aggregate route becomes active, it is installed in the routing table with a reject next hop, which means that ICMP unreachable messages are sent.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li> <li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li> <li>• <a href="#">aggregate on page 146</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



- [generate on page 174](#)

## dynamic-tunnels

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | dynamic-tunnels <i>tunnel-name</i> {<br><a href="#">destination-networks</a> <i>prefix</i> ;<br><a href="#">source-address</a> <i>address</i> ;<br><a href="#">tunnel-type</a> <i>type-of-tunnel</i> ;<br>}                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> ],<br>[edit logical-systems <i>logical-system-name</i> <a href="#">routing-options</a> ],<br>[edit routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> ],<br>[edit <a href="#">routing-options</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Configure a dynamic tunnel between two PE routers.                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <i>tunnel-name</i> —Name of the dynamic tunnel.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring GRE Tunnels for Layer 3 VPNs</a></li> </ul>                                                                                                                                                                                                                                                    |

## export

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>export [ <i>policy-name</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <a href="#">forwarding-table</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">forwarding-table</a> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">forwarding-table</a> ],<br>[edit routing-options <a href="#">forwarding-table</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                      |
| <b>Description</b>              | Apply one or more policies to routes being exported from the routing table into the forwarding table.                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <i>policy-name</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Example: Load Balancing BGP Traffic</li><li><a href="#">Junos OS Policy Framework Configuration Guide</a></li></ul>                                                                                                                                                                                                                                                                           |

## export-rib

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>export-rib <i>routing-table-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib-groups</b> <i>group-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i> ],<br>[edit routing-options <b>rib-groups</b> <i>group-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Specify the name of the routing table from which Junos OS should export routing information.                                                                                                                                                                                                                                                                                                                                                    |
| <b>Options</b>                  | <i>routing-table-name</i> —Routing table group name.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li> <li><a href="#">import-rib on page 178</a></li> <li><a href="#">passive on page 203</a></li> </ul>                                                                                                                                                                                                             |

## fate-sharing

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>fate-sharing {<br/>    cost <i>value</i>;<br/>    from <i>address</i> &lt;to <i>address</i>&gt;;<br/>    group <i>group-name</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options]                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Specify a backup path in case the primary path becomes unusable.</p> <p>You specify one or more objects within a group. The objects can be a LAN interface, a router ID, or a point-to-point link. Sequence is insignificant.</p> <p>Changing the fate-sharing database does not affect existing established LSPs until the next CSPF reoptimization. The fate-sharing database does affect fast-reroute detour path computations.</p>                                                                                                                        |
| <b>Options</b>                  | <p><b>group <i>group-name</i></b>—Each fate-sharing group must have a name, which can be up to 32 characters long and can contain letters, digits, periods (.) and hyphens (-). You can define up to 512 groups.</p> <p><b>cost <i>value</i></b>—Cost assigned to the group.<br/><b>Range:</b> 1 through 65,535<br/><b>Default:</b> 1</p> <p><b>from <i>address</i></b>—Address of ingress routing device.</p> <p><b>to <i>address</i></b>—Address of egress routing device. For point-to-point link objects, you must specify both a from and a to address.</p> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Junos OS MPLS Applications Configuration Guide</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

---

## filter

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>filter {<br/>    input <i>filter-name</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> ],<br>[edit routing-options rib <i>routing-table-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Specify the name of the routing table from which Junos OS should export routing information.                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <b>input <i>filter-name</i></b> —Forwarding table filter name.                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Forwarding Table Filters</li><li>Applying Filters to Forwarding Tables</li></ul>                                                                                                                                                                                                                                                                                      |

## flow

---

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax                   | <pre>flow {<br/>  route <i>name</i> {<br/>    match {<br/>      <i>match-conditions</i>;<br/>    }<br/>    term-order (legacy   standard);<br/>    then {<br/>      <i>actions</i>;<br/>    }<br/>  }<br/>  validation {<br/>    <i>traceoptions</i> {<br/>      file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;<br/>      flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;;<br/>    }<br/>  }<br/>}</pre>                                                                                                                                                                                                                |
| Hierarchy Level          | [edit routing-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Release Information      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>term-order</b> statement introduced in Junos OS Release 10.0</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Description              | Configure a flow route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Default                  | <b>legacy</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Options                  | <p><b>actions</b>—An action to take if conditions match.</p> <p><b>match-conditions</b>—Match packets to these conditions.</p> <p><b>route name</b>—Name of the flow route.</p> <p><b>standard</b>—Specify to use version 7 or later of the flow-specification algorithm.</p> <p><b>term-order (legacy   standard)</b>—Specify the version of the flow-specification algorithm.</p> <ul style="list-style-type: none"><li>• <b>legacy</b>—Use version 6 of the flow-specification algorithm.</li><li>• <b>standard</b>—Use version 7 of the flow-specification algorithm.</li></ul> <p><b>then</b>—Actions to take on matching packets.</p> <p>The remaining statements are explained separately.</p> |
| Required Privilege Level | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

- Related Documentation**
- Example: Configuring Flow Routes

## forwarding-table

---

|                                 |                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>forwarding-table {   export [ <i>policy-name</i> ];   (indirect-next-hop   no-indirect-next-hop);   unicast-reverse-path (active-paths   feasible-paths); }</pre>                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-options]                                                                                                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series. |
| <b>Description</b>              | Configure information about the routing device's forwarding table.<br><br>The remaining statements are explained separately.                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Load Balancing BGP Traffic</li> </ul>                                                                                                        |

## full

---

See [brief](#)

## generate

---

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax              | <pre>generate {<br/>  defaults {<br/>    generate-options;<br/>  }<br/>  route destination-prefix {<br/>    policy policy-name;<br/>    generate-options;<br/>  }<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Hierarchy Level     | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i> ],<br>[edit routing-options],<br>[edit routing-options <b>rib</b> <i>routing-table-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Release Information | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description         | Configure generated routes, which are used as routes of last resort.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Options             | <p><b>defaults</b>—(Optional) Specify global generated route options. These options only set default attributes inherited by all newly created generated routes. These are treated as global defaults and apply to all the generated routes you configure in the <b>generate</b> statement.</p> <p><b>generate-options</b>—Additional information about generated routes, which is included with the route when it is installed in the routing table. Specify zero or more of the following options in <b>generate-options</b>. Each option is explained separately.</p> <ul style="list-style-type: none"><li>• (<b>active</b>   <b>passive</b>);</li><li>• <b>as-path</b> <i>&lt;as-path&gt;</i> <i>&lt;origin (egp   igp   incomplete)&gt;</i> <i>&lt;atomic-aggregate&gt;</i> <i>&lt;aggregator as-number in-address&gt;</i>;</li><li>• (<b>brief</b>   <b>full</b>);</li><li>• <b>community</b> [ <i>community-ids</i> ];</li><li>• <b>discard</b>;</li><li>• (<b>metric</b>   <i>metric2</i>   <i>metric3</i>   <i>metric4</i>) <i>value</i> <i>&lt;type type&gt;</i>;</li><li>• (<b>preference</b>   <i>preference2</i>   <b>color</b>   <i>color2</i>) <i>preference</i> <i>&lt;type type&gt;</i>;</li><li>• <b>tag</b> <i>string</i>;</li></ul> <p><b>route destination-prefix</b>—Configure a non-default generated route:</p> <ul style="list-style-type: none"><li>• <b>default</b>—For the default route to the destination. This is equivalent to specifying an IP address of 0.0.0.0/0.</li></ul> |



- *destination-prefix/prefix-length—/destination-prefix* is the network portion of the IP address, and *prefix-length* is the destination prefix length.

The [policy](#) statement is explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Conditionally Generating Static Routes on page 78](#)

## graceful-restart

**Syntax** graceful-restart {  
    disable;  
    restart-duration *seconds*;  
}

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* [routing-options](#)],  
[edit logical-systems *logical-system-name* [routing-options](#)],  
[edit routing-instances *routing-instance-name* [routing-options](#)],  
[edit [routing-options](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.

**Description** Configure graceful restart.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Junos OS High Availability Configuration Guide](#)

## import

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution <a href="#">rib</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-options resolution <a href="#">rib</a> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options resolution <a href="#">rib</a> ],<br>[edit routing-options resolution <a href="#">rib</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                              |
| <b>Description</b>              | Specify one or more import policies to use for route resolution.                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Configuring Route Resolution on PE Routers</li></ul>                                                                                                                                                                                                                                                                                                                       |

## import-policy

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>import-policy [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</p> <p>[edit routing-options <b>rib-groups</b> <i>group-name</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                  |
| <b>Description</b>         | Apply one or more policies to routes imported into the routing table group. The <b>import-policy</b> statement complements the <b>import-rib</b> statement and cannot be used unless you first specify the routing tables to which routes are being imported.                                                                                                                                                                                                  |




**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.


|                                 |                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li> <li>• <a href="#">export-rib on page 169</a></li> <li>• <a href="#">passive on page 203</a></li> </ul> |

## import-rib

---


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>import-rib [ <i>routing-table-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib-groups</b> <i>group-name</i>],</code><br><code>[edit routing-options <b>rib-groups</b> <i>group-name</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>Specify the name of the routing table into which Junos OS should import routing information. The first routing table name you enter is the primary routing table. Any additional names you enter identify secondary routing tables. When a protocol imports routes, it imports them into the primary and any secondary routing tables. If the primary route is deleted, the secondary route also is deleted. For IPv4 import routing tables, the primary routing table must be <b>inet.0</b> or <b>routing-instance-name.inet.0</b>. For IPv6 import routing tables, the primary routing table must be <b>inet6.0</b>.</p> <p>In Junos OS Release 9.5 and later, you can configure an IPv4 import routing table that includes both IPv4 and IPv6 routing tables. Including both types of routing tables permits you, for example, to populate an IPv6 routing table with IPv6 addresses that are compatible with IPv4. In releases prior to Junos OS Release 9.5, you could configure an import routing table with only either IPv4 or IPv6 routing tables.</p> |
|                                 | <div><p><b>NOTE:</b> On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                  | <b><i>routing-table-names</i></b> —Name of one or more routing tables.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <b>routing</b> —To view this statement in the configuration.<br><b>routing-control</b> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</li><li>• <a href="#">export-rib on page 169</a></li><li>• <a href="#">passive on page 203</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## independent-domain

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>independent-domain &lt;no-attrset&gt;;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options autonomous-system <i>autonomous-system</i> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options autonomous-system <i>autonomous-system</i> ]                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br><b>no-attrset</b> option introduced in Junos OS Release 10.4.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Configure an independent AS domain.</p> <p>The independent domain uses transitive path attribute 128 (attribute set) messages to tunnel the independent domain's BGP attributes through the internal BGP (IBGP) core.</p> <div>  <p><b>NOTE:</b> In Junos OS Release 10.3 and later, if BGP receives attribute 128 and you have not configured an independent domain in any routing instance, BGP treats the received attribute 128 as an unknown attribute.</p> </div> |
| <b>Options</b>                  | <b>no-attrset</b> —(Optional) Disables attribute set messages on the independent AS domain.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• OBSOLETE - Configuring Independent AS Domains</li> <li>• Disabling Attribute Set Messages on Independent AS Domains for BGP Loop Detection</li> <li>• Configuring Layer 3 VPNs to Carry IBGP Traffic</li> <li>• <a href="#">autonomous-system on page 152</a></li> </ul>                                                                                                                                                                                                                                           |

## indirect-next-hop

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (indirect-next-hop   no-indirect-next-hop);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options <a href="#">forwarding-table</a> ],<br>[edit routing-options <a href="#">forwarding-table</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | Enable indirectly connected next hops for route convergence. This statement is implemented on the Packet Forward Engine to speed up forwarding information base (FIB) updates. Configuring this statement significantly speeds convergence times. The only downside of configuring this statement is that some additional FIB memory overhead is required. Unless routes have an extremely high number of next hops, this increased memory usage should not be noticeable.                                                                                                                                                                                                         |
|                                 | <div> <b>NOTE:</b><ul style="list-style-type: none"><li>When virtual private LAN service (VPLS) is configured on the routing device, the indirect-next-hop statement is configurable at the [edit routing-options forwarding-table] hierarchy level. However, this configuration is not applicable to indirect nexthops specific to VPLS routing instances.</li><li>By default, the Junos Trio Modular Port Concentrator (MPC) chipset on MX Series routers is enabled with indirectly connected next hops, and this cannot be disabled using the no-indirect-next-hop statement.</li></ul></div> |
| <b>Default</b>                  | Disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <b>indirect-next-hop</b> —Enable indirectly connected next hops.<br><b>no-indirect-next-hop</b> —Explicitly disable indirect next hops.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Example: Optimizing Route Reconvergence by Enabling Indirect Next Hops on the Packet Forwarding Engine on page 112</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

---

## input

---

|                                 |                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>input <i>filter-name</i>;</code>                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> filter],<br>[edit routing-options rib <i>routing-table-name</i> filter] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                      |
| <b>Description</b>              | Specify the name of the input filter.                                                                                                                                  |
| <b>Options</b>                  | <i>filter-name</i> —Name of the input filter.                                                                                                                          |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Configuring Forwarding Table Filters</li><li>• Applying Filters to Forwarding Tables</li></ul>                                 |

## install

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (install   no-install);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>static</b> (defaults   route)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],<br>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],<br>[edit logical-systems <i>logical-system-name</i> routing-options <b>static</b> (defaults   route)],<br>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],<br>[edit routing-instances <i>routing-instance-name</i> routing-options <b>static</b> (defaults   route)],<br>[edit routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)]<br>[edit routing-options <b>static</b> (defaults   route)] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | Configure whether Junos OS installs all static routes into the forwarding table. Even if you configure a route so it is not installed in the forwarding table, the route is still eligible to be exported from the routing table to other protocols.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <b>install</b> —Explicitly install all static routes into the forwarding table. Include this statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>no-install</b> option specified in the <b>defaults</b> portion of the statement.<br><br><b>no-install</b> —Do not install the route into the forwarding table, even if it is the route with the lowest preference.<br><br><b>Default:</b> install                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li><li>• <a href="#">static on page 230</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



## instance-export

---

|                                 |                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>instance-export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                   |
| <b>Description</b>              | Apply one or more policies to routes being exported from a routing instance.                                                                                                                                                                                                                |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more export policies.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Configuring and Verifying the Auto Export Feature</li> <li>• <a href="#">Junos OS Policy Framework Configuration Guide</a></li> </ul>                                                                                                     |

## instance-import

---


|                                 |                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>instance-import [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                   |
| <b>Description</b>              | Apply one or more policies to routes being imported into a routing instance.                                                                                                                                                                                                                |
| <b>Options</b>                  | <i>policy-names</i> —Name of one or more import policies.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Example: Configuring and Verifying the Auto Export Feature</li> <li>• <a href="#">Junos OS Policy Framework Configuration Guide</a></li> </ul>                                                                                                     |

## interface (Multicast Static Routes)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>interface <i>interface-names</i> {<br/>    disable;<br/>    maximum-bandwidth <i>bps</i>;<br/>    no-qos-adjust;<br/>    reverse-oif-mapping {<br/>        no-qos-adjust;<br/>    }<br/>    subscriber-leave-timer <i>seconds</i>;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i><br/>  routing-options <a href="#">multicast</a>],<br/>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">multicast</a>],<br/>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">multicast</a>],<br/>[edit routing-options <a href="#">multicast</a>]</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>              | <p>Enable multicast traffic on an interface.</p> <p>By default, multicast packets are forwarded by enabling Protocol Independent Multicast (PIM) on an interface. PIM adds multicast routes into the routing table.</p> <p>You can also configure multicast packets to be forwarded over a static route, such as a static route associated with an LSP next hop. Multicast packets are accepted on an interface and forwarded over a static route in the forwarding table. This is useful when you want to enable multicast traffic on a specific interface without configuring PIM on the interface.</p> <p>You cannot enable multicast traffic on an interface and configure PIM on the same interface simultaneously.</p> <p>Static routes must be configured before you can enable multicast on an interface. Configuring the <b>interface</b> statement alone does not install any routes into the routing table. This feature relies on the static route configuration.</p> |
| <b>Options</b>                  | <p><b><i>interface-names</i></b>—Name of one or more interfaces on which to enable multicast traffic.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Defining Interface Bandwidth Maximums</li><li>• Example: Configuring Multicast with Subscriber VLANs</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## interface (Multicast Scoping)

|                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                           | <code>interface [ <i>interface-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                  | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">scope</a> <i>scope-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">scope</a> <i>scope-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">scope</a> <i>scope-name</i>],</p> <p>[edit routing-options multicast <a href="#">scope</a> <i>scope-name</i>]</p> |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                              | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                      | Configure the set of interfaces for multicast scoping.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                          | <p><b><i>interface-names</i></b>—Names of the interfaces on which to configure scoping. Specify the full interface name, including the physical and logical address components. To configure all interfaces, you can specify all.</p>                                                                                                                                                                                                                                                                                  |
| <div>  <p><b>NOTE:</b> You cannot apply a scoping policy to a specific routing instance. All scoping policies are applied to all routing instances. However, you can apply the <code>scope</code> statement to a specific routing instance.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                         | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Examples: Configuring Administrative Scoping</li> <li><a href="#">multicast on page 198</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                          |

## interface-routes

**Syntax**

```
interface-routes {
 family (inet | inet6) {
 export {
 lan;
 point-to-point;
 }
 }
 rib-group group-name;
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.

**Description** Associate a routing table group with the routing device's interfaces, and specify routing table groups into which interface routes are imported.

By default, IPv4 interface routes (also called direct routes) are imported into routing table **inet.0**, and IPv6 interface routes are imported into routing table **inet6.0**. If you are configuring alternate routing tables for use by some routing protocols, it might be necessary to import the interface routes into the alternate routing tables. To define the routing tables into which interface routes are imported, you create a routing table group and associate it with the routing device's interfaces.

To create the routing table groups, include the **passive** statement at the **[edit routing-options]** hierarchy level.

If you have configured a routing table, configure the OSPF primary instance at the **[edit protocols ospf]** hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group.

To export local routes, include the **export** statement.

To export LAN routes, include the **lan** option. To export point-to-point routes, include the **point-to-point** option.

Only local routes on point-to-point interfaces configured with a destination address are exportable.

**Options**    **inet**—Specify the IPv4 address family.

**inet6**—Specify the IPv6 address family.

**lan**—Export LAN routes.

**point-to-point**—Export point-to-point routes.

              The remaining statements are explained separately.


**Required Privilege**    routing—To view this statement in the configuration.

**Level**                routing-control—To add this statement to the configuration.

- Related Documentation**
- [Example: Importing Direct and Static Routes Into a Routing Instance on page 37](#)
  - Example: Configuring Multiple Routing Instances of OSPF
  - [passive on page 203](#)

## **lsp-next-hop**

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>lsp-next-hop <i>lsp-name</i> {<br/>    <b>metric</b> <i>metric</i>;<br/>    <b>preference</b> <i>preference</i>;<br/>}</code>                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <b>routing-options static</b> route <i>destination-prefix</i> ],<br>[edit logical-systems <i>logical-system-name</i> <b>routing-options static</b> route <i>destination-prefix</i> ],<br>[edit routing-instances <i>routing-instance-name</i> <b>routing-options static</b> route <i>destination-prefix</i> ]<br>[edit <b>routing-options static</b> route <i>destination-prefix</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Specify an LSP as the next hop for a static route, and configure an independent metric or preference on that next-hop LSP.                                                                                                                                                                                                                                                                                                                                                             |
|                                 | <div><p><b>NOTE:</b> The preference and metric configured by means of the <code>lsp-next-hop</code> statement only apply to the LSP next hops. The LSP next-hop preference and metric override the route preference and metric (for that specific LSP next hop), similar to how the route preference overrides the default preference and metric (for that specific route).</p></div>                 |
| <b>Options</b>                  | <p><i>lsp-name</i>—Name of the next-hop LSP.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring an RSVP-Signaled Point-to-Multipoint LSP on page 42</a></li></ul>                                                                                                                                                                                                                                                                                                                                             |

## martians

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>martians {     destination-prefix match-type &lt;allow&gt;; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>rib</b> <i>routing-table-name</i>],</p> <p>[edit routing-options],</p> <p>[edit routing-options <b>rib</b> <i>routing-table-name</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Configure martian addresses.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>allow</b>—(Optional) Explicitly allow a subset of a range of addresses that has been disallowed. The <b>allow</b> option is the only supported action.</p> <p><b>destination-prefix</b>—Destination route you are configuring:</p> <ul style="list-style-type: none"> <li><b>destination-prefix/prefix-length—destination-prefix</b> is the network portion of the IP address, and <b>prefix-length</b> is the destination prefix length.</li> <li><b>default</b>—Default route to use when routing packets do not match a network or host in the routing table. This is equivalent to specifying the IP address <b>0.0.0.0/0</b>.</li> </ul> <p><b>match-type</b>—Criteria that the destination must match:</p> <ul style="list-style-type: none"> <li><b>exact</b>—Exactly match the route's mask length.</li> <li><b>longer</b>—The route's mask length is greater than the specified mask length.</li> <li><b>orlonger</b>—The route's mask length is equal to or greater than the specified mask length.</li> <li><b>through destination-prefix</b>—The route matches the first prefix, the route matches the second prefix for the number of bits in the route, and the number of bits in the route is less than or equal to the number of bits in the second prefix.</li> <li><b>upto prefix-length</b>—The route's mask length falls between the two destination prefix lengths, inclusive.</li> </ul> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

- Related Documentation**
- [Example: Configuring Martian Addresses on page 132](#)



## maximum-paths

|                            |                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>maximum-paths <i>path-limit</i> &lt;log-interval <i>seconds</i>&gt; &lt;log-only   threshold <i>value</i>&gt;;</code>                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options] |
| <b>Release Information</b> | Statement introduced in Junos OS Release 8.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                  |
| <b>Description</b>         | Configure a limit for the number of routes installed in a routing table based upon the route path.                                                                                                                                                                                          |



**NOTE:** The `maximum-paths` statement is similar to the `maximum-prefixes` statement. The `maximum-prefixes` statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:

```
OSPF 10.10.10.0/24
ISIS 10.10.10.0/24
```

These are two routes, but only one destination (prefix). The `maximum-paths` limit applies the total number of routes (two). The `maximum-prefixes` limit applies to the total number of unique prefixes (one).

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b> | <p><code>log-interval <i>seconds</i></code>—(Optional) Minimum time interval (in seconds) between log messages.</p> <p><b>Range:</b> 5 through 86,400</p> <p><code>log-only</code>—(Optional) Sets the route limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.</p> <p><code><i>path-limit</i></code>—Maximum number of routes. If this limit is reached, a warning is triggered and additional routes are rejected.</p> <p><b>Range:</b> 1 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> No default</p> <p><code>threshold <i>value</i></code>—(Optional) Percentage of the maximum number of routes that starts triggering a warning. You can configure a percentage of the <code><i>path-limit</i></code> value that starts triggering the warnings.</p> <p><b>Range:</b> 1 through 100</p> |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



NOTE: When the number of routes reaches the threshold value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the *path-limit* value, then additional routes are rejected.

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• OBSOLETE - Configuring Route Limits for Routing Tables</li></ul>            |

## maximum-prefixes

|                            |                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>maximum-prefixes <i>prefix-limit</i> &lt;log-interval <i>seconds</i>&gt; &lt;log-only   threshold <i>value</i>&gt;;</code>                                                                                                                                                            |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options] |
| <b>Release Information</b> | Statement introduced in Junos OS Release 8.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                  |
| <b>Description</b>         | Configure a limit for the number of routes installed in a routing table based upon the route prefix.                                                                                                                                                                                        |



**NOTE:** The `maximum-prefixes` statement is similar to the `maximum-paths` statement. The `maximum-prefixes` statement limits the number of unique destinations in a routing instance. For example, suppose a routing instance has the following routes:

```
OSPF 10.10.10.0/24
ISIS 10.10.10.0/24
```

These are two routes, but only one destination (prefix). The `maximum-paths` limit applies the total number of routes (two). The `maximum-prefixes` limit applies to the total number of unique prefixes (one).

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Options</b> | <p><code>log-interval <i>seconds</i></code>—(Optional) Minimum time interval (in seconds) between log messages.<br/> <b>Range:</b> 5 through 86,400</p> <p><code>log-only</code>—(Optional) Sets the prefix limit as an advisory limit. An advisory limit triggers only a warning, and additional routes are not rejected.</p> <p><code><i>prefix-limit</i></code>—Maximum number of route prefixes. If this limit is reached, a warning is triggered and any additional routes are rejected.<br/> <b>Range:</b> 1 through 4,294,967,295<br/> <b>Default:</b> No default</p> <p><code>threshold <i>value</i></code>—(Optional) Percentage of the maximum number of prefixes that starts triggering a warning. You can configure a percentage of the <code><i>prefix-limit</i></code> value that starts triggering the warnings.<br/> <b>Range:</b> 1 through 100</p> |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



**NOTE:** When the number of routes reaches the **threshold** value, routes are still installed into the routing table while warning messages are sent. When the number of routes reaches the **prefix-limit** value, then additional routes are rejected.

---

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- OBSOLETE - Configuring Route Limits for Routing Tables

---

## med-igp-update-interval

---

**Syntax** med-igp-update-interval *minutes*;

**Hierarchy Level** [edit routing-options]

**Release Information** Statement introduced in Junos OS Release 9.0  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure a timer for how long to delay updates for the multiple exit discriminator (MED) path attribute for BGP groups and peers configured with the **metric-out igp offset delay-med-update** statement. The timer delays MED updates for the interval configured unless the MED is lower than the previously advertised attribute or another attribute associated with the route has changed or if the BGP peer is responding to a refresh route request.

**Options** *minutes*—Interval to delay MED updates.  
**Range:** 10 through 600  
**Default:** 10 minutes

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Associating the MED Path Attribute with the IGP Metric and Delaying MED Updates
- metric-out

## metric

---

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>metric route-cost;</code>                                                                                     |
| <b>Hierarchy Level</b>          | [edit routing-options access route <i>ip-prefix</i> </prefix-length>]                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                      |
| <b>Description</b>              | Configure the cost for an access route.                                                                             |
| <b>Options</b>                  | <i>route-cost</i> —Specific cost you want to assign to the access route.                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li></ul>     |

## metric (Aggregate, Generated, or Static Route)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (metric   metric2   metric3   metric4) <i>metric</i> <type <i>type</i> >;                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options ( <a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a> ) (defaults   route)],<br>[edit routing-options ( <a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a> ) (defaults   route)]                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify the metric value for an aggregate, generated, or static route. You can specify up to four metric values, starting with <b>metric</b> (for the first metric value) and continuing with <b>metric2</b> , <b>metric3</b> , and <b>metric4</b> .                                                                                                                                                                                     |
| <b>Options</b>                  | <b>metric</b> —Metric value.<br><b>Range:</b> 0 through 4,294,967,295 ( $2^{32} - 1$ )<br><br><b>type type</b> —(Optional) Type of route.<br><br>When routes are exported to OSPF, type 1 routes are advertised in type 1 externals, and routes of any other type are advertised in type 2 externals. Note that if a qualified-next-hop metric value is configured, this value overrides the route metric.<br><b>Range:</b> 1 through 16 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Summarizing Static Routes Through Route Aggregation on page 65</a></li><li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li><li>• <a href="#">aggregate on page 146</a></li><li>• <a href="#">generate on page 174</a></li><li>• <a href="#">static on page 230</a></li></ul>                                                               |

## metric (Qualified Next Hop on Static Route)

|                                 |                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>metric <i>metric</i>;</code>                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options <b>static</b> route <i>destination-prefix</i> <b>qualified-next-hop</b> ],<br>[edit routing-options <b>static</b> route <i>destination-prefix</i> <b>qualified-next-hop</b> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                      |
| <b>Description</b>              | Metric value for a static route.                                                                                                                                                                                                               |
| <b>Options</b>                  | <b>metric</b> —Metric value.<br><b>Range:</b> 0 through 4,294,967,295 ( $2^{32} - 1$ )                                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">qualified-next-hop on page 209</a></li> <li>• <a href="#">static on page 230</a></li> </ul>                                                                                               |

## multicast

```
Syntax multicast {
 forwarding-cache {
 threshold suppress value <reuse value>;
 }
 interface interface-name {
 enable;
 }
 scope scope-name {
 interface [interface-names];
 prefix destination-prefix;
 }
 ssm-groups {
 address;
 }
 }
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure generic multicast properties.



**NOTE:** You cannot apply a scoping policy to a specific routing instance. All scoping policies are applied to all routing instances. However, you can apply the `scope` statement to a specific routing instance.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Examples: Configuring Administrative Scoping
- Example: Configuring Source-Specific Multicast Groups with Any-Source Override
- Examples: Configuring the Multicast Forwarding Cache
- [Junos OS Multicast Protocols Configuration Guide](#)
- ([indirect-next-hop on page 180](#) | no-indirect-next-hop)



## next-hop (Access)

---

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>next-hop <i>next-hop</i>;</code>                                                                              |
| <b>Hierarchy Level</b>          | [edit routing-options access route <i>ip-prefix</i> </prefix-length>]                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                      |
| <b>Description</b>              | Configure the next-hop address for an access route. Access routes are typically unnumbered interfaces.              |
| <b>Options</b>                  | <i>next-hop</i> —Specific next-hop address you want to assign to the access route.                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> </ul>   |


## next-hop (Access Internal)

---

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>next-hop <i>next-hop</i>;</code>                                                                              |
| <b>Hierarchy Level</b>          | [edit routing-options access-internal route <i>ip-prefix</i> </prefix-length>]                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                      |
| <b>Description</b>              | Configure the next-hop address for an internal access route. Access routes are typically unnumbered interfaces.     |
| <b>Options</b>                  | <i>next-hop</i> —Specific next-hop address you want to assign to the internal access route.                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> </ul>   |

## no-delegate-processing

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-delegate-processing;                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit routing-options ppm]                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Disable distributed periodic packet management (PPM) processing and run all PPM processing on the Routing Engine.</p> <p>PPM processing cannot be completely disabled on EX Series switches. You can only configure whether PPM processing is distributed between the access ports (EX3200 and EX4200 switches) or the line cards (EX8200 switches) and the Routing Engine or is handled just on the Routing Engine.</p> |
|                                 | <div><p><b>BEST PRACTICE:</b> Generally, you should only disable distributed PPM if Juniper Networks Customer Service advised you to do so. You should only disable distributed PPM if you have a compelling reason to disable it.</p></div>                                                                                               |
| <b>Default</b>                  | Distributed PPM processing is enabled.                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</li></ul>                                                                                                                                                                                                                                                                                   |

---

## nonstop-routing

---

|                                 |                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | nonstop-routing;                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.4.                                                                                                                                                                                                                                               |
| <b>Description</b>              | For routing platforms with two Routing Engines, configure a master Routing Engine to switch over gracefully to a backup Routing Engine to preserve routing protocol information.                                                                                                            |
| <b>Default</b>                  | disabled                                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Nonstop Active Routing</li><li><a href="#">Junos OS High Availability Configuration Guide</a></li></ul>                                                                                                                                   |

## options

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>options {<br/>    syslog (level <i>level</i>   upto level <i>level</i>);<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure the types of system logging messages sent about the routing protocols process to the system message logging file. These messages are also displayed on the system console. You can log messages at a particular level, or up to and including a particular level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><b>level <i>level</i></b>—Severity of the message. It can be one or more of the following levels, in order of decreasing urgency:</p> <ul style="list-style-type: none"><li>• <b>alert</b>—Conditions that should be corrected immediately, such as a corrupted system database.</li><li>• <b>critical</b>—Critical conditions, such as hard drive errors.</li><li>• <b>debug</b>—Software debugging messages.</li><li>• <b>emergency</b>—Panic or other conditions that cause the system to become unusable.</li><li>• <b>error</b>—Standard error conditions.</li><li>• <b>info</b>—Informational messages.</li><li>• <b>notice</b>—Conditions that are not error conditions, but might warrant special handling.</li><li>• <b>warning</b>—System warning messages.</li></ul> <p><b>upto level <i>level</i></b>—Log all messages up to a particular level.</p> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <b>syslog</b> in the <a href="#">Junos OS System Basics Configuration Guide</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## p2mp-lsp-next-hop

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>p2mp-lsp-next-hop {<br/>    metric <i>metric</i>;<br/>    preference <i>preference</i>;<br/>}</code>                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <b>routing-options static</b> route <i>destination-prefix</i> ],<br>[edit logical-systems <i>logical-system-name</i> <b>routing-options static</b> route <i>destination-prefix</i> ],<br>[edit routing-instances <i>routing-instance-name</i> <b>routing-options static</b> route <i>destination-prefix</i> ].<br>[edit <b>routing-options static</b> route <i>destination-prefix</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Specify a point-to-multipoint LSP as the next hop for a static route, and configure an independent metric or preference on that next-hop LSP.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring an RSVP-Signaled Point-to-Multipoint LSP on page 42</a></li> <li>• <a href="#">Example: Configuring an RSVP-Signaled Point-to-Multipoint LSP on Logical Systems</a></li> </ul>                                                                                                                                                                                                                                |

## passive

---

See [active](#)

## policy

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>policy <i>policy-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-options (<b>aggregate</b>   <b>generate</b>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<b>aggregate</b>   <b>generate</b>) (defaults   route)]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>         | <p>Associate a routing policy when configuring an aggregate or generated route's destination prefix in the <b>routes</b> part of the <b>aggregate</b> or <b>generate</b> statement. This provides the equivalent of an import routing policy filter for the destination prefix. That is, each potential contributor to an aggregate route, along with any aggregate options, is passed through the policy filter. The policy then can accept or reject the route as a contributor to the aggregate route.</p> <p>If the contributor is accepted, the policy can modify the default preferences. The contributor with the numerically smallest prefix becomes the most preferred, or <i>primary</i>, contributor. A rejected contributor still can contribute to a less specific aggregate route. If you do not specify a policy filter, all candidate routes contribute to an aggregate route.</p> <p>The following algorithm is used to compare two generated contributing routes in order to determine which one is the primary or preferred contributor:</p> <ol style="list-style-type: none"> <li>1. Compare the protocol's <b>preference</b> of the contributing routes. The lower the preference, the better the route. This is similar to the comparison that is done while determining the best route for the routing table.</li> <li>2. Compare the protocol's <b>preference2</b> of the contributing routes. The lower <b>preference2</b> value is better. If only one route has <b>preference2</b>, then this route is preferred.</li> <li>3. The preference values are the same. Proceed with a numerical comparison of the prefixes' values. <ol style="list-style-type: none"> <li>a. The primary contributor is the numerically smallest prefix value.</li> <li>b. If the two prefixes are numerically equal, the primary contributor is the route that has the smallest prefix length value.</li> </ol> </li> </ol> |

At this point, the two routes are the same. The primary contributor does not change. An additional next hop is available for the existing primary contributor.

A rejected contributor still can contribute to less specific generated route. If you do not specify a policy filter, all candidate routes contribute to a generated route.

**Options**    *policy-name*—Name of a routing policy.

**Required Privilege**    routing—To view this statement in the configuration.  
**Level**    routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Summarizing Routes Through Route Aggregation on page 72](#)
- [Example: Conditionally Generating Static Routes on page 78](#)
- [aggregate on page 146](#)
- [generate on page 174](#)

## ppm

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ppm {<br/>    no-delegate-processing;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-options]                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.2.<br>Statement introduced in Junos OS Release 10.2 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.<br><b>no-delegate-processing</b> statement introduced in Junos OS Release 9.4.<br><b>no-delegate-processing</b> statement introduced in Junos OS Release 10.2 for EX Series switches.                                                                          |
| <b>Description</b>              | (M120, M320, MX Series, T Series, TX Matrix routers, M7i and M10i routers with Enhanced CFEB [CFEB-E], EX Series switches, and QFX Series only) Disable distributed periodic packet management (PPM) to the Packet Forwarding Engine (on routers), to access ports (on EX3200 and EX4200 switches, and QFX Series), or to line cards (on EX6200 and EX8200 switches).<br><br>After you disable PPM, PPM processing continues to run on the Routing Engine. |
| <b>Default</b>                  | Distributed PPM processing is enabled for all protocols that use PPM.                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <b>no-delegate-processing</b> —Disable PPM to the Packet Forwarding Engine, access ports, or line cards. Distributed PPM is enabled by default.                                                                                                                                                                                                                                                                                                            |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring Distributed Periodic Packet Management on an EX Series Switch (CLI Procedure)</li><li>Configuring Distributed Periodic Packet Management</li></ul>                                                                                                                                                                                                                                                       |



## preference

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ( <i>preference</i>   <i>preference2</i>   <i>color</i>   <i>color2</i> ) <i>preference</i> <type type>;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Preference value for a static, aggregate, or generated route. You also can specify a secondary preference value (<b>preference2</b>), as well as colors, which are even finer-grained preference values (<b>color</b> and <b>color2</b>).</p> <p>If the Junos OS routing table contains a dynamic route to a destination that has a better (lower) preference value than the static, aggregate, or generated route, the dynamic route is chosen as the active route and is installed in the forwarding table.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <p><b>preference</b>—Preference value. A lower number indicates a more preferred route.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 5 (for static routes), 130 (for aggregate and generated routes)</p> <p><b>type type</b>—(Optional) Type of route.</p> <p><b>Range:</b> 1 through 16</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> <li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li> <li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li> <li>• <a href="#">aggregate on page 146</a></li> <li>• <a href="#">generate on page 174</a></li> <li>• <a href="#">static on page 230</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## preference (Access)

---

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>preference route-distance;</code>                                                                             |
| <b>Hierarchy Level</b>          | [edit routing-options access route <i>ip-prefix</i> </prefix-length>]                                               |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                      |
| <b>Description</b>              | Configure the distance for an access route.                                                                         |
| <b>Options</b>                  | <i>route-distance</i> —Specific distance you want to assign to the access route.                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li></ul>     |

## prefix

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>prefix destination-prefix;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">scope</a> <i>scope-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-options multicast <a href="#">scope</a> <i>scope-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options multicast <a href="#">scope</a> <i>scope-name</i> ],<br>[edit routing-options multicast <a href="#">scope</a> <i>scope-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Configure the prefix for multicast scopes.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <i>destination-prefix</i> —Address range for the multicast scope.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Administrative Scoping</a></li><li>• <a href="#">multicast on page 198</a></li></ul>                                                                                                                                                                                                                                                                                                                                          |

## qualified-next-hop

**Syntax** `qualified-next-hop (address | interface-name) {  
     bfd-liveness-detection {  
         authentication {  
             algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 | meticulous-keyed-sha-1 |  
             simple-password);  
             key-chain key-chain-name;  
             loose-check;  
         }  
         detection-time {  
             threshold milliseconds;  
         }  
         holddown-interval milliseconds;  
         minimum-interval milliseconds;  
         minimum-receive-interval milliseconds;  
         multiplier number;  
         no-adaptation;  
         transmit-interval {  
             minimum-interval milliseconds;  
             threshold milliseconds;  
         }  
         version (1 | automatic);  
     }  
     interface interface-name;  
     metric metric;  
     preference preference;  
}`

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options static route *destination-prefix*],  
 [edit logical-systems *logical-system-name* routing-options rib inet6.0 static route *destination-prefix*],  
 [edit logical-systems *logical-system-name* routing-options static route *destination-prefix*],  
 [edit routing-instances *routing-instance-name* routing-options static route *destination-prefix*],  
 [edit routing-options rib inet6.0 static route *destination-prefix*],  
 [edit routing-options static route *destination-prefix*]

**Release Information** Statement introduced before Junos OS Release 7.4.  
 Statement introduced in Junos OS Release 9.0 for EX Series switches.  
 Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Configure a static route with multiple possible next hops, each of which can have its own preference value, IGP metric that is used when the route is exported into an IGP, and Bidirectional Forwarding Detection (BFD) settings. If multiple links are operational, the one with the most preferred next hop is used. The most preferred next hop is the one with the lowest preference value.

**Options** *address*—IPv4, IPv6, or ISO network address of the next hop.

*interface-name*—Name of the interface on which to configure an independent metric or preference for a static route. To configure an unnumbered Ethernet interface as the

next-hop interface for a static route, specify **qualified-next-hop** *interface-name*, where *interface-name* is the name of the IPv4 or IPv6 unnumbered Ethernet interface.

The remaining statements are explained separately.

|                                 |                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Static Route Preferences and Qualified Next Hops on page 21</a></li><li>• <a href="#">Example: Enabling BFD on Qualified Next Hops in Static Routes on page 96</a></li></ul> |

---

## qualified-next-hop (Access)

---

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>qualified-next-hop <i>next-hop</i>;</code>                                                                    |
| <b>Hierarchy Level</b>          | [edit routing-options access route <i>ip-prefix</i> </ <i>prefix-length</i> >]                                      |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                      |
| <b>Description</b>              | Configure the qualified next-hop address for an access route.                                                       |
| <b>Options</b>                  | <i>next-hop</i> —Specific qualified next-hop address you want to assign to the access route.                        |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li></ul>     |

---

## qualified-next-hop (Access-Internal)

---

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>qualified-next-hop <i>next-hop</i>;</code>                                                                    |
| <b>Hierarchy Level</b>          | [edit routing-options access-internal route <i>ip-prefix</i> </ <i>prefix-length</i> >]                             |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                      |
| <b>Description</b>              | Configure the qualified next-hop address for an internal access route.                                              |
| <b>Options</b>                  | <i>next-hop</i> —Specific qualified next-hop address you want to assign to the internal access route.               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li></ul>     |

## readvertise

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (readvertise   no-readvertise);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>static</b> (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>static</b> (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>static</b> (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],</p> <p>[edit routing-options <b>static</b> (defaults   route)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure whether static routes are eligible to be readvertised by routing protocols:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>                  | Static routes are eligible to be readvertised (that is, exported from the routing table into dynamic routing protocols) if a policy to do so is configured. To mark an IPv4 static route as being ineligible for readvertisement, include the <b>no-readvertise</b> statement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b>readvertise</b>—Readvertise static routes. Include the <b>readvertise</b> statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>no-readvertise</b> option specified in the <b>defaults</b> portion of the statement.</p> <p><b>no-readvertise</b>—Mark a static route as being ineligible for readvertisement. Include the <b>no-readvertise</b> option when configuring the route.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Controlling Static Routes in Routing and Forwarding Tables on page 27</a></li> <li>• <a href="#">static on page 230</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## resolution

---

|                                 |                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>resolution {<br/>    rib <i>routing-table-name</i> {<br/>        import [ <i>policy-names</i> ];<br/>        resolution-ribs [ <i>routing-table-names</i> ];<br/>    }<br/>}</pre>                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                              |
| <b>Description</b>              | Configure route resolution.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Configuring Route Resolution on PE Routers</li></ul>                                                                                                                                                                                       |

## resolution-ribs

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>resolution-ribs [ <i>routing-table-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options resolution <a href="#">rib</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-options resolution <a href="#">rib</a> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options resolution <a href="#">rib</a> ],<br>[edit routing-options resolution <a href="#">rib</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                              |
| <b>Description</b>              | Specify one or more routing tables to use for route resolution.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Options</b>                  | <i>routing-table-names</i> —Name of one or more routing tables.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring Route Resolution on PE Routers</li> </ul>                                                                                                                                                                                                                                                                                                                       |

## resolve

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | resolve;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>static</b> (defaults   route)],<br>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],<br>[edit logical-systems <i>logical-system-name</i> routing-options <b>static</b> (defaults   route)],<br>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],<br>[edit routing-instances <i>routing-instance-name</i> routing-options <b>static</b> (defaults   route)],<br>[edit routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)],<br>[edit routing-options <b>static</b> (defaults   route)] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | Statically configure routes to be resolved to a next hop that is not directly connected. The route is resolved through the <b>inet.0</b> and <b>inet.3</b> routing tables.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Default</b>                  | Static routes can point only to a directly connected next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">static on page 230</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



## restart-duration

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>restart-duration <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols (isis   ospf   ospf3   pim) graceful-restart],<br/> [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3   pim) graceful-restart],<br/> [edit protocols (esis   isis   ospf   ospf3   pim) graceful-restart],<br/> [edit routing-instances <i>routing-instance-name</i> protocols (ospf   ospf3   pim) graceful-restart],<br/> [edit routing-options graceful-restart]</p>                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Configure the duration of the graceful restart period globally. Additionally, you can individually configure the duration of the graceful restart period for the End System-to-Intermediate System (ES-IS), Intermediate System-to-Intermediate System (IS-IS), Open Shortest Path First (OSPF), and OSPFv3 protocols and for Protocol Independent Multicast (PIM) sparse mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b><i>seconds</i></b>—Time for the graceful restart period.</p> <p><b>Range:</b></p> <p>The range of values varies according to whether the graceful restart period is being set globally or for a particular protocol:</p> <ul style="list-style-type: none"> <li>• <b>[edit routing-options graceful-restart]</b> (global setting)—120 through 900</li> <li>• ES-IS—30 through 300</li> <li>• IS-IS—30 through 300</li> <li>• OSPF/OSPFv3—1 through 3600</li> <li>• PIM—30 through 300</li> </ul> <p><b>Default:</b></p> <p>The default value varies according to whether the graceful restart period is being set globally or for a particular protocol:</p> <ul style="list-style-type: none"> <li>• <b>[edit routing-options graceful-restart]</b> (global setting)—300</li> <li>• ES-IS—180</li> <li>• IS-IS—210</li> <li>• OSPF/OSPFv3—180</li> <li>• PIM—60</li> </ul> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• Enabling Graceful Restart</li> <li>• Configuring Routing Protocols Graceful Restart</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

- [Configuring Graceful Restart for MPLS-Related Protocols](#)
- [Configuring VPN Graceful Restart](#)
- [Configuring Logical System Graceful Restart](#)
- [Graceful Restart Configuration Statements](#)

---

## retain

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | (no-retain   retain);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <pre>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i>   routing-options <b>static</b> (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> <b>static</b>   (defaults   route)], [edit logical-systems <i>logical-system-name</i> routing-options <b>static</b> (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> <b>static</b>   (defaults   route)], [edit routing-instances <i>routing-instance-name</i> routing-options <b>static</b> (defaults   route)], [edit routing-options rib <i>routing-table-name</i> <b>static</b> (defaults   route)], [edit routing-options <b>static</b> (defaults   route)]</pre> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | Configure statically configured routes to be deleted from or retained in the forwarding table when the routing protocol process shuts down normally:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Default</b>                  | Statically configured routes are deleted from the forwarding table when the routing protocol process shuts down normally. Doing this greatly reduces the time required to restart a system that has a large number of routes in its routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <p><b>no-retain</b>—Delete statically configured routes from the forwarding table when the routing protocol process shuts down normally. To explicitly specify that routes be deleted from the forwarding table, include the <b>no-retain</b> statement. Include this statement when configuring an individual route in the <b>route</b> portion of the <b>static</b> statement to override a <b>retain</b> option specified in the <b>defaults</b> portion of the statement.</p> <p><b>retain</b>—Have a static route remain in the forwarding table when the routing protocol process shuts down normally. Doing this greatly reduces the time required to restart a system that has a large number of routes in its routing table.</p>                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li><li>• <a href="#">static on page 230</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## rib (General)

```
Syntax rib routing-table-name {
 aggregate {
 defaults {
 ... aggregate-options ...
 }
 route destination-prefix {
 policy policy-name;
 ... aggregate-options ...
 }
 }
 generate {
 defaults {
 generate-options;
 }
 route destination-prefix {
 policy policy-name;
 generate-options;
 }
 }
 martians {
 destination-prefix match-type <allow>;
 }
 }
 static {
 defaults {
 static-options;
 }
 rib-group group-name;
 route destination-prefix {
 next-hop;
 static-options;
 }
 }
}
```

**Hierarchy Level** [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* routing-options],  
[edit logical-systems *logical-system-name* routing-options],  
[edit routing-instances *routing-instance-name* routing-options],  
[edit routing-options]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 11.3 for the QFX Series.

**Description** Create a routing table.

Explicitly creating a routing table with ***routing-table-name*** is optional if you are not adding any static, martian, aggregate, or generated routes to the routing table and if you also are creating a routing table group.



NOTE: The IPv4 multicast routing table (inet.1) and the IPv6 multicast routing table (inet6.1) are not supported for this statement.

**Default** If you do not specify a routing table name with the *routing-table-name* option, the software uses the default routing tables, which are **inet.0** for unicast routes and **inet.1** for the multicast cache.

**Options** *routing-table-name*—Name of the routing table, in the following format:  
*protocol [.identifier]*.

In a routing instance, the routing table name must include the routing instance name.

For example, if the routing instance name is **link0**, the routing table name might be **link0.inet6.0**.

- *protocol* is the protocol family. It can be **inet6** for the IPv6 family, **inet** for the IPv4 family, **iso** for the ISO protocol family, or *instance-name.iso.0* for an ISO routing instance.
- *identifier* is a positive integer that specifies the instance of the routing table.

**Default:** inet.0

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Creating Routing Tables on page 35](#)
- [passive on page 203](#)

## rib (Route Resolution)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> rib <i>routing-table-name</i> {     <b>import</b> [ <i>policy-names</i> ];     <b>resolution-ribs</b> [ <i>routing-table-names</i> ]; } </pre>                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>resolution</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <b>resolution</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <b>resolution</b>],</p> <p>[edit routing-options <b>resolution</b>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                          |
| <b>Description</b>              | <p>Specify a routing table name for route resolution.</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring Route Resolution on PE Routers</li> </ul>                                                                                                                                                                                                                                                                                  |

## rib-group

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>rib-group <i>group-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <a href="#">interface-routes</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">interface-routes</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> static],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-options static],</code><br><code>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">interface-routes</a>],</code><br><code>[edit routing-options <a href="#">interface-routes</a>],</code><br><code>[edit routing-options rib <i>routing-table-name</i> static],</code><br><code>[edit routing-options static]</code> |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>              | Configure which routing table groups interface routes are imported into.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                  | <b><i>group-name</i></b> —Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens. It generally does not make sense to specify more than a single routing table group.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Importing Direct and Static Routes Into a Routing Instance on page 37</a></li><li>• <a href="#">Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</a></li><li>• <a href="#">interface-routes on page 186</a></li><li>• <a href="#">rib-groups on page 221</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## rib-groups

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> rib-groups {   group-name {     export-rib group-name;     import-policy [ policy-names ];     import-rib [ group-names ];   } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description</b>         | <p>Group one or more routing tables to form a routing table group. A routing protocol can import routes into all the routing tables in the group and can export routes from a single routing table.</p> <p>Each routing table group must contain one or more routing tables that Junos OS uses when importing routes (specified in the <b>import-rib</b> statement) and optionally can contain one routing table group that Junos OS uses when exporting routes to the routing protocols (specified in the <b>export-rib</b> statement).</p> <p>The first routing table you specify is the <i>primary routing table</i>, and any additional routing tables are the <i>secondary routing tables</i>.</p> <p>The primary routing table determines the address family of the routing table group. To configure an IP version 4 (IPv4) routing table group, specify <b>inet.0</b> as the primary routing table. To configure an IP version 6 (IPv6) routing table group, specify <b>inet6.0</b> as the primary routing table. If you configure an IPv6 routing table group, the primary and all secondary routing tables must be IPv6 routing tables (<b>inet6.x</b>).</p> <p>In Junos OS Release 9.5 and later, you can include both IPv4 and IPv6 routing tables in an IPv4 import routing table group using the <b>import-rib</b> statement. In releases prior to Junos OS Release 9.5, you can only include either IPv4 or IPv6 routing tables in the same <b>import-rib</b> statement. The ability to configure an import routing table group with both IPv4 and IPv6 routing tables enables you, for example, to populate the <b>inet6.3</b> routing table with IPv6 addresses that are compatible with IPv4. Specify <b>inet.0</b> as the primary routing table, and specify <b>inet6.3</b> as a secondary routing table.</p> |



**NOTE:** On EX Series switches, only dynamically learned routes can be imported from one routing table group to another.



**NOTE:** If you configure an import routing table group that includes both IPv4 and IPv6 routing tables, any corresponding export routing table group must include only IPv4 routing tables.

If you have configured a routing table, configure the OSPF primary instance at the **[edit protocols ospf]** hierarchy level with the statements needed for your network so that routes are installed in **inet.0** and in the forwarding table. Make sure to include the routing table group. For more information, see Example: Configuring Multiple Routing Instances of OSPF.

After specifying the routing table from which to import routes, you can apply one or more policies to control which routes are installed in the routing table group. To apply a policy to routes being imported into the routing table group, include the **import-policy** statement.

**Options** *group-name*—Name of the routing table group. The name must start with a letter and can include letters, numbers, and hyphens.

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- Example: Exporting Specific Routes from One Routing Table Into Another Routing Table
- [rib-group on page 220](#)



## route (Access)

---

|                                 |                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>route <i>ip-prefix</i>&lt;/prefix-length&gt; {     <i>metric</i> <i>route-cost</i>;     <i>next-hop</i> <i>next-hop</i>;     <i>preference</i> <i>route-distance</i>;     <i>qualified-next-hop</i> <i>next-hop</i>;     <i>tag</i> <i>tag-number</i>; }</pre> |
| <b>Hierarchy Level</b>          | [edit routing-options access]                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                                                                                                                                                                      |
| <b>Description</b>              | Configure the parameters for access routes.                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><i>ip-prefix</i>&lt;/prefix-length&gt;—Specific route prefix that you want to assign to the access route.</p> <p>The remaining statements are explained separately.</p>                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> </ul>                                                                                                                                                   |

## route (Access-Internal)

---

|                                 |                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>route <i>ip-prefix</i>&lt;/prefix-length&gt; {     <i>next-hop</i> <i>next-hop</i>;     <i>qualified-next-hop</i> <i>next-hop</i>; }</pre>                                     |
| <b>Hierarchy Level</b>          | [edit routing-options access-internal]                                                                                                                                              |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                                                                                      |
| <b>Description</b>              | Configure the parameters for internal access routes.                                                                                                                                |
| <b>Options</b>                  | <p><i>ip-prefix</i>&lt;/prefix-length&gt;—Specific route prefix that you want to assign to the internal access route.</p> <p>The remaining statements are explained separately.</p> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> </ul>                                                                   |

## route-distinguisher-id

---


|                                 |                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>route-distinguisher-id address;</code>                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                   |
| <b>Description</b>              | Configure a route distinguisher identifier for a routing instance, specifying an IP address. If a route distinguisher is configured for a particular routing instance, that value supersedes the route distinguisher configured by this statement.                                          |
| <b>Options</b>                  | <i>address</i> —IP address.                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Example: Configuring BGP Route Target Filtering for VPNs</li></ul>                                                                                                                                                                                  |

## route-record

---

|                                 |                                                                                                                                                                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>route-record;</code>                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit routing-options]                                                                                                                                      |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                    |
| <b>Description</b>              | Export the AS path and routing information to the traffic sampling process.<br><br>Before you can perform flow aggregation, the routing protocol process must export the AS path and routing information to the sampling process. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• Enabling Flow Aggregation</li><li>• <a href="#">Junos OS Services Interfaces Configuration Guide</a></li></ul>                                                                            |

## router-id

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>router-id address;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-options]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | <p>Specify the routing device's IP address.</p> <p>The router identifier is used by BGP and OSPF to identify the routing device from which a packet originated. The router identifier usually is the IP address of the local routing device. If you do not configure a router identifier, the IP address of the first interface to come online is used. This is usually the loopback interface. Otherwise, the first hardware interface with an IP address is used.</p> <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;"> <p> <b>NOTE:</b> We strongly recommend that you configure the router identifier under the [edit routing-options] hierarchy level to avoid unpredictable behavior if the interface address on a loopback interface changes.</p> </div> |
| <b>Options</b>                  | <p><b>address</b>—IP address of the routing device.</p> <p><b>Default:</b> Address of the first interface encountered by Junos OS</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Examples: Configuring External BGP Peering</li> <li>Examples: Configuring Internal BGP Peering</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## routing-options

---

|                                 |                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | routing-options { ... }                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | [edit],<br>[edit logical-systems <i>logical-system-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                      |
| <b>Description</b>              | Configure protocol-independent routing properties.                                                                                                                                                                             |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Protocol-Independent Routing Properties Configuration Statements</li></ul>                                                                                                               |

## scope

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | scope <i>scope-name</i> {<br><b>interface</b> [ <i>interface-names</i> ];<br><b>prefix</b> <i>destination-prefix</i> ;<br>}                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>multicast</b> ],<br>[edit logical-systems <i>logical-system-name</i> routing-options <b>multicast</b> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options <b>multicast</b> ],<br>[edit routing-options <b>multicast</b> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                           |
| <b>Description</b>              | Configure the set of interfaces for multicast scoping.                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <b><i>scope-name</i></b> —Name of the multicast scope.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Examples: Configuring Administrative Scoping</li><li><b>multicast on page 198</b></li></ul>                                                                                                                                                                                                                                   |


## source-address

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>source-address <i>address</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <b>routing-options</b> dynamic-tunnels <i>tunnel-name</i> ,<br>[edit logical-systems <i>logical-system-name</i> <b>routing-options</b> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> <b>routing-options</b> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit <b>routing-options</b> dynamic-tunnels <i>tunnel-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Specify the source address for the generic routing encapsulation (GRE) tunnels. The source address specifies the address used as the source for the local tunnel endpoint. This address can be any local address on the router, typically the router ID or the loopback address.                                                                                                                                                                                       |
| <b>Options</b>                  | <b><i>address</i></b> —Name of the source address.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Configuring GRE Tunnels for Layer 3 VPNs</li> </ul>                                                                                                                                                                                                                                                                                                                                                                             |

## source-routing

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | source-routing {<br>(ip   ipv6)<br>}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit routing-options]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement for IPv6 introduced in Junos OS Release 8.2.<br>Statement for IPv4 introduced in Junos OS Release 8.5.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Enable source routing.</p> <p>Source routing allows a sender of a packet to partially or completely specify the route the packet takes through the network. In contrast, in non-source routing protocols, routers in the network determine the path based on the packet's destination.</p> <div><p><b>NOTE:</b> We recommend that you not use source routing. Instead, we recommend that you use policy-based routing or filter-based forwarding to route packets based on source addresses.</p></div> |
| <b>Default</b>                  | Disabled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Example: Configuring Filter-Based Forwarding on the Source Address</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## ssm-groups

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>ssm-groups {     address; }</pre>                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <a href="#">multicast</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options <a href="#">multicast</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">multicast</a>],</p> <p>[edit routing-options <a href="#">multicast</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Configure additional source-specific multicast (SSM) groups.</p> <p>IGMPv3 supports SSM groups. By utilizing inclusion lists, only sources that are specified send to the SSM group. By default, the SSM group multicast address is limited to the IP address range <b>232.0.0.0</b> to <b>232.255.255.255</b>. You can configure additional SSM groups. Shared tree delivery is prohibited on SSM groups.</p>      |
| <b>Options</b>                  | <p><b>address</b>—Address range of the additional SSM group.</p>                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>Example: Configuring Source-Specific Multicast Groups with Any-Source Override</li> <li><a href="#">multicast on page 198</a></li> </ul>                                                                                                                                                                                                                                        |

## static

---

```
Syntax static {
 defaults {
 static-options;
 }
 rib-group group-name;
 route destination-prefix {
 bfd-liveness-detection {
 authentication {
 algorithm algorithm-name;
 key-chain key-chain-name;
 loose-check;
 }
 detection-time {
 threshold milliseconds;
 }
 local-address ip-address;
 minimum-interval milliseconds;
 minimum-receive-interval milliseconds;
 minimum-receive-ttl number;
 multiplier number;
 neighbor address;
 no-adaptation;
 transmit-interval {
 threshold milliseconds;
 minimum-interval milliseconds;
 }
 version (1 | automatic);
 }
 next-hop address;
 next-hop options;
 qualified-next-hop address {
 bfd-liveness-detection {
 authentication {
 algorithm (keyed-md5 | keyed-sha-1 | meticulous-keyed-md5 |
 meticulous-keyed-sha-1 | simple-password);
 key-chain key-chain-name;
 loose-check;
 }
 detection-time {
 threshold milliseconds;
 }
 holddown-interval milliseconds;
 minimum-interval milliseconds;
 minimum-receive-interval milliseconds;
 multiplier number;
 no-adaptation;
 transmit-interval {
 minimum-interval milliseconds;
 threshold milliseconds;
 }
 version (1 | automatic);
 }
 }
 }
}
```



```

 metric metric;
 preference preference;
 }
 static-options;
}

```

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options],<br>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> routing-options],<br>[edit routing-options],<br>[edit routing-options rib <i>routing-table-name</i> ] |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Support for BFD authentication introduced in Junos 9.6.<br>Support for BFD authentication introduced in Junos 9.6 for EX Series switches.                                                                                                                                                                                     |
| <b>Description</b>         | Configure static routes to be installed in the routing table. You can specify any number of routes within a single <b>static</b> statement, and you can specify any number of <b>static</b> options in the configuration.                                                                                                                                                                                                                                  |

**Options defaults**—(Optional) Specify global static route options. These options only set default attributes inherited by all newly created static routes. These are treated as global defaults and apply to all the static routes you configure in the **static** statement.



**NOTE:** Specifying the global static route options does not create default routes. These options only set default attributes inherited by all newly created static routes.

**route**—Configure individual static routes. In this part of the **static** statement, you optionally can configure static route options. These options apply to the individual destination only and override any options you configured in the **defaults** part of the **static** statement.

- **destination-prefix/prefix-length—destination-prefix** is the network portion of the IP address, and **prefix-length** is the destination prefix length.

When you configure an individual static route in the **route** part of the **static** statement, specify the destination of the route (in **route destination-prefix**) in one of the following ways:

- **network/mask-length**, where **network** is the network portion of the IP address and **mask-length** is the destination prefix length.
- **default** if this is the default route to the destination. This is equivalent to specifying an IP address of **0.0.0.0/0**.



**NOTE:** IPv4 packets with a destination of 0.0.0.0 (the obsoleted limited broadcast address) and IPv6 packets with a destination of 0::0 are discarded by default. To forward traffic destined to these addresses, you can add a static route to 0.0.0.0/32 for IPv4 or 0::0/128 for IPv6.

- **nsap-prefix—nsap-prefix** is the network service access point (NSAP) address for ISO.
- **next-hop address**—Reach the next-hop routing device by specifying an IP address, an interface name, or an ISO network entity title (NET).

IPv4 or IPv6 address of the next hop to the destination, specified as:

- IPv4 or IPv6 address of the next hop
- Interface name (for point-to-point interfaces only)
- **address** or **interface-name** to specify an IP address of a multipoint interface or an interface name of a point-to-point interface.



**NOTE:** If an interface becomes unavailable, all configured static routes on that interface are withdrawn from the routing table.



**NOTE:** Load balancing is not supported on management and internal Ethernet (fxo) interfaces because this type of interface cannot handle the routing process. On fxp interfaces, you cannot configure multiple next hops and enable load balancing.

**next-hop options**—Additional information for how to manage forwarding of packets to the next hop.

- **discard**—Do not forward packets addressed to this destination. Instead, drop the packets, do not send ICMP (or ICMPv6) unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.
- **iso-net**—Reach the next-hop routing device by specifying an ISO NSAP.

- **next-table *routing-table-name***—Name of the next routing table to the destination.

If you use the **next-table** action, the configuration must include a term qualifier that specifies a different table than the one specified in the **next-table** action. In other words, the term qualifier in the **from** statement must exclude the table in the **next-table** action. In the following example, the first term contains **rib vrf-customer2.inet.0** as a matching condition. The action specifies a next-hop in a different routing table, **vrf-customer1.inet.0**. The second term does the opposite by using **rib vrf-customer1.inet.0** in the match condition and **vrf-customer2.inet.0** in the **next-table** action.

```
term 1 {
 from {
 protocol bgp;
 rib vrf-customer2.inet.0;
 community customer;
 }
 then {
 next-hop next-table vrf-customer1.inet.0;
 }
}
term 2 {
 from {
 protocol bgp;
 rib vrf-customer1.inet.0;
 community customer;
 }
 then {
 next-hop next-table vrf-customer2.inet.0;
 }
}
```



**NOTE:** Within a routing instance, you cannot configure a static route with the **next-table inet.0** statement if any static route in the main routing instance is already configured with the **next-table** statement to point to the **inet.0** routing table of the routing instance. For example, if you configure on the main routing instance a static route 192.168.88.88/32 with the **next-table test.inet.0** statement and the routing instance **test** is also configured with a static route 192.168.88.88/32 with the **next-table inet.0** statement, the commit operation fails. Instead, you must configure a routing table group both on the main instance and on the routing instance, which enables you to install the static route into both routing tables.

- **receive**—Install a route for this next-hop destination into the routing table.

The **receive** option forces the packet to be sent to the Routing Engine.

The **receive** option can be useful in the following cases:

- For receiving MPLS packets destined to a VRF instance's loopback address
- For receiving packets on a link's subnet address, with zeros in the host portion of the address
- **reject**—Do not forward packets addressed to this destination. Instead, drop the packets, send ICMP (or ICMPv6) unreachable messages to the packets' originators, and install a reject route for this destination into the routing table.

**static-options**—(Optional under **route**) Additional information about static routes, which is included with the route when it is installed in the routing table.

You can specify one or more of the following in **static-options**. Each of the options is explained separately.

- (**active** | **passive**);
- **as-path** <as-path> <origin (egp | igp | incomplete)> <atomic-aggregate> <aggregator as-number in-address>;
- **community** [ *community-ids* ];
- (**install** | **no-install**);
- (**metric** | **metric2** | **metric3** | **metric4**) *value* <type type>;
- (**preference** | **preference2** | **color** | **color2**) *preference* <type type>;
- (**readvertise** | **no-readvertise**);
- (**resolve** | **no-resolve**);
- (**retain** | **no-retain**);
- **tag** *string*;

The remaining statements are explained separately.

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | • <a href="#">Examples: Configuring Static Routes on page 7</a>                                                     |

## tag

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>tag string;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options <a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-options (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)],</p> <p>[edit routing-options rib <i>routing-table-name</i> (<a href="#">aggregate</a>   <a href="#">generate</a>   <a href="#">static</a>) (defaults   route)]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>              | Associate an OSPF tag with a static, aggregate, or generated route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | No OSPF tag strings are associated with static routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <i>string</i> —OSPF tag string.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> <li>• <a href="#">Example: Summarizing Routes Through Route Aggregation on page 72</a></li> <li>• <a href="#">Example: Conditionally Generating Static Routes on page 78</a></li> <li>• <a href="#">aggregate on page 146</a></li> <li>• <a href="#">generate on page 174</a></li> <li>• <a href="#">static on page 230</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## tag (Access)

---

|                                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>tag tag-number;</code>                                                                                            |
| <b>Hierarchy Level</b>          | [edit routing-options access route <i>ip-prefix</i> </prefix-length>]                                                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 10.1.                                                                          |
| <b>Description</b>              | Configure a tag for an access route.                                                                                    |
| <b>Options</b>                  | <b>tag-number</b> —Tag number for the access route.                                                                     |
| <b>Required Privilege Level</b> | interface—To view this statement in the configuration.<br>interface-control—To add this statement to the configuration. |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring Static Routes on page 7</a></li> </ul>       |

## threshold

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>threshold suppress value &lt;reuse value&gt;;</code>                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options <b>multicast</b> forwarding-cache],<br>[edit logical-systems <i>logical-system-name</i> routing-options <b>multicast</b> forwarding-cache],<br>[edit routing-instances <i>routing-instance-name</i> routing-options <b>multicast</b> forwarding-cache],<br>[edit routing-options <b>multicast</b> forwarding-cache]                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.2 for EX Series switches.<br>Statement introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                        |
| <b>Description</b>              | Configure the suppression and reuse thresholds for multicast forwarding cache limits.                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <b>reuse value</b> —(Optional) Value at which to begin creating new multicast forwarding cache entries. If configured, this number should be less than the <b>suppress</b> value.<br><b>Range:</b> 1 through 200,000<br><br><b>suppress value</b> —Value at which to begin suppressing new multicast forwarding cache entries. This value is mandatory. This number should be greater than the <b>reuse</b> value.<br><b>Range:</b> 1 through 200,000 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Examples: Configuring the Multicast Forwarding Cache</a></li> </ul>                                                                                                                                                                                                                                                                                                                              |

## traceoptions

---

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {<br/>    file <i>filename</i> &lt;files <i>number</i>&gt; &lt;size <i>size</i>&gt; &lt;world-readable   no-world-readable&gt;;<br/>    flag <i>flag</i> &lt;disable&gt;;<br/>}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-options multicast],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options],</p> <p>[edit routing-instances <i>routing-instance-name</i> routing-options multicast],</p> <p>[edit routing-options],</p> <p>[edit routing-options flow],</p> <p>[edit routing-options multicast]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 11.3 for the QFX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>         | <p>Define tracing operations that track all routing protocol functionality in the routing device.</p> <p>To specify more than one tracing operation, include multiple <b>flag</b> statements.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Default</b>             | If you do not include this statement, no global tracing operations are performed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Options</b>             | <p><b>Values:</b></p> <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>filename</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory <b>/var/log</b>. We recommend that you place global routing protocol tracing output in the file <b>routing-log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 10 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one tracing operation, include multiple <b>flag</b> statements. These are the global routing protocol tracing options:</p> |



- **all**—All tracing operations
- **condition-manager**—Condition-manager events
- **config-internal**—Configuration internals
- **general**—All normal operations and routing table changes (a combination of the **normal** and **route** trace operations)
- **graceful-restart**—Graceful restart operations
- **normal**—All normal operations
- **nsr-synchronization**—Nonstop active routing synchronization
- **parse**—Configuration parsing
- **policy**—Routing policy operations and actions
- **regex-parse**—Regular-expression parsing
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

**no-world-readable**—(Optional) Prevent any user from reading the log file.

**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

|                                 |                                                                               |
|---------------------------------|-------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing and trace—To view this statement in the configuration.                |
|                                 | routing-control and trace-control—To add this statement to the configuration. |

|                              |                                                                                   |
|------------------------------|-----------------------------------------------------------------------------------|
| <b>Related Documentation</b> | • <a href="#">Example: Tracing Global Routing Protocol Operations on page 138</a> |
|------------------------------|-----------------------------------------------------------------------------------|

## tunnel-type

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>tunnel-type type;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ],<br>[edit <a href="#">routing-options</a> dynamic-tunnels <i>tunnel-name</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify the type of tunnel to be dynamically created. The only valid value is <b>gre</b> (for Generic Routing Encapsulation [GRE] tunnels).                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <b>type</b> —Tunnel type.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>Configuring GRE Tunnels for Layer 3 VPNs</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                    |

## unicast-reverse-path

---

|                                 |                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>unicast-reverse-path (active-paths   feasible-paths);</code>                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> routing-options <a href="#">forwarding-table</a> ],<br>[edit routing-instances <i>routing-instance-name</i> instance-type <i>name</i> routing-options <a href="#">forwarding-table</a> ],<br>[edit routing-options <a href="#">forwarding-table</a> ]                          |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Support for routing instances added in Junos OS Release 8.3.                                                                                                                                                                                                               |
| <b>Description</b>              | Control the operation of unicast reverse-path-forwarding check. This statement enables the RPF check to be used when routing is asymmetrical.                                                                                                                                                                                   |
| <b>Options</b>                  | <b>active-paths</b> —Consider only active paths during the unicast reverse-path check.<br><b>feasible-paths</b> —Consider all feasible paths during the unicast reverse-path check.<br><b>Default:</b> If you omit the <b>unicast-reverse-path</b> statement, only the active paths to a particular destination are considered. |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li><a href="#">Example: Configuring Unicast Reverse-Path-Forwarding Check on page 122</a></li><li><a href="#">Junos OS Network Interfaces Configuration Guide</a></li></ul>                                                                                                                  |

## PART 3

# Administration

- [Operational Commands on page 243](#)



## CHAPTER 9

# Operational Commands

## show bfd session

---

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | <code>show bfd session</code><br><code>&lt;brief   detail   extensive   summary&gt;</code><br><code>&lt;address <i>address</i>&gt;</code><br><code>&lt;discriminator <i>discriminator</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code><br><code>&lt;prefix <i>address</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Syntax (EX Series Switch and QFX Series)</b> | <code>show bfd session</code><br><code>&lt;brief   detail   extensive   summary&gt;</code><br><code>&lt;address <i>address</i>&gt;</code><br><code>&lt;discriminator <i>discriminator</i>&gt;</code><br><code>&lt;prefix <i>address</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Options <b>discriminator</b> and <b>address</b> introduced in Junos OS Release 8.2.<br>Option <b>prefix</b> introduced in Junos OS Release 9.0.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>                              | Display information about active Bidirectional Forwarding Detection (BFD) sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                                  | <b>none</b> —(Same as <b>brief</b> ) Display information about active BFD sessions.<br><br><b>brief   detail   extensive   summary</b> —(Optional) Display the specified level of output.<br><br><b>address <i>address</i></b> —(Optional) Display information about the BFD session for the specified neighbor address.<br><br><b>discriminator <i>discriminator</i></b> —(Optional) Display information about the BFD session using the specified local discriminator.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b>prefix <i>address</i></b> —(Optional) Display information about all of the BFD sessions for the specified LDP forwarding equivalence class (FEC). |
| <b>Required Privilege Level</b>                 | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>                    | <ul style="list-style-type: none"><li>• clear bfd session</li><li>• <a href="#">Examples: Configuring BFD for Static Routes on page 87</a></li><li>• Example: Configuring BFD for OSPF</li><li>• Example: Configuring BFD for BGP</li><li>• Configuring PIM and the Bidirectional Forwarding Detection (BFD) Protocol</li><li>• Example: Configuring BFD for IS-IS</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                      |

**List of Sample Output**

- [show bfd session on page 248](#)
- [show bfd session brief on page 248](#)
- [show bfd session detail on page 248](#)
- [show bfd session detail \(with Authentication\) on page 248](#)
- [show bfd session address extensive on page 249](#)
- [show bfd session extensive on page 249](#)
- [show bfd session extensive \(with Authentication\) on page 250](#)
- [show bfd session summary on page 250](#)

**Output Fields** [Table 3 on page 245](#) describes the output fields for the **show bfd session** command. Output fields are listed in the approximate order in which they appear.

**Table 3: show bfd session Output Fields**

| Field Name               | Field Description                                                                                                                                                                                                                                                                               | Level of Output                       |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| <b>Address</b>           | Address on which the BFD session is active.                                                                                                                                                                                                                                                     | <b>brief detail extensive</b><br>none |
| <b>State</b>             | State of the BFD session: <b>Up</b> , <b>Down</b> , <b>Init</b> (initializing), or <b>Failing</b> .                                                                                                                                                                                             | <b>brief detail extensive</b><br>none |
| <b>Interface</b>         | Interface on which the BFD session is active.                                                                                                                                                                                                                                                   | <b>brief detail extensive</b><br>none |
| <b>Detect Time</b>       | Negotiated time interval, in seconds, used to detect BFD control packets.                                                                                                                                                                                                                       | <b>brief detail extensive</b><br>none |
| <b>Transmit Interval</b> | Time interval, in seconds, used by the transmitting system to send BFD control packets.                                                                                                                                                                                                         | <b>brief detail extensive</b><br>none |
| <b>Multiplier</b>        | Negotiated multiplier by which the time interval is multiplied to determine the detection time for the transmitting system.                                                                                                                                                                     | <b>detail extensive</b>               |
| <b>Session up time</b>   | How long a BFD session has been established.                                                                                                                                                                                                                                                    | <b>detail extensive</b>               |
| <b>Client</b>            | Protocol for which the BFD session is active: <b>ISIS</b> , <b>OSPF</b> , or <b>Static</b> .                                                                                                                                                                                                    | <b>detail extensive</b>               |
| <b>TX interval</b>       | Time interval, in seconds, used by the host system to transmit BFD control packets.                                                                                                                                                                                                             | <b>brief detail extensive</b><br>none |
| <b>RX interval</b>       | Time interval, in seconds, used by the host system to receive BFD control packets.                                                                                                                                                                                                              | <b>brief detail extensive</b><br>none |
| <b>Authenticate</b>      | Indicates that BFD authentication is configured.                                                                                                                                                                                                                                                | <b>detail extensive</b>               |
| <b>keychain</b>          | Name of the security authentication keychain being used by a specific client.<br><br>BFD authentication information for a client is provided in a single line and includes the <b>keychain</b> , <b>algo</b> , and <b>mode</b> parameters. Multiple clients can be configured on a BFD session. | <b>extensive</b>                      |

Table 3: show bfd session Output Fields (*continued*)

| Field Name                        | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Level of Output         |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>algo</b>                       | <p>BFD authentication algorithm being used for a specific client: <b>keyed-md5</b>, <b>keyed-sha-1</b>, <b>meticulous-keyed-md5</b>, <b>meticulous-keyed-sha-1</b>, or <b>simple-password</b>.</p> <p>BFD authentication information for a client is provided in a single line and includes the <b>keychain</b>, <b>algo</b>, and <b>mode</b> parameters. Multiple clients can be configured on a BFD session.</p>                                                                                                           | <b>extensive</b>        |
| <b>mode</b>                       | <p>Level of BFD authentication enforcement being used by a specific client: <b>strict</b> or <b>loose</b>. Strict enforcement indicates that authentication is configured at both ends of the session (the default). Loose enforcement indicates that one end of the session might not be authenticated.</p> <p>BFD authentication information for a client is provided in a single line and includes the <b>keychain</b>, <b>algo</b>, and <b>mode</b> parameters. Multiple clients can be configured on a BFD session.</p> | <b>extensive</b>        |
| <b>Local diagnostic</b>           | Local diagnostic information about failing BFD sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>detail extensive</b> |
| <b>Remote diagnostic</b>          | Remote diagnostic information about failing BFD sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>detail extensive</b> |
| <b>Remote state</b>               | Reports whether the remote system's BFD packets have been received and whether the remote system is receiving transmitted control packets.                                                                                                                                                                                                                                                                                                                                                                                   | <b>detail extensive</b> |
| <b>Version</b>                    | BFD version: <b>0</b> or <b>1</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>extensive</b>        |
| <b>Replicated</b>                 | The <b>replicated</b> flag appears when nonstop routing is configured and the BFD session has been replicated to the backup Routing Engine.                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail extensive</b> |
| <b>Min async interval</b>         | Minimum amount of time, in seconds, between asynchronous control packet transmissions across the BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                | <b>extensive</b>        |
| <b>Min slow interval</b>          | Minimum amount of time, in seconds, between synchronous control packet transmissions across the BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>extensive</b>        |
| <b>Adaptive async TX interval</b> | Transmission interval being used because of adaptation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>extensive</b>        |
| <b>RX interval</b>                | Minimum required receive interval.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>extensive</b>        |
| <b>Local min TX interval</b>      | Minimum amount of time, in seconds, between control packet transmissions on the local system.                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>extensive</b>        |
| <b>Local min RX interval</b>      | Minimum amount of time, in seconds, between control packet detections on the local system.                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>extensive</b>        |
| <b>Remote min TX interval</b>     | Minimum amount of time, in seconds, between control packet transmissions on the remote system.                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>extensive</b>        |
| <b>Remote min RX interval</b>     | Minimum amount of time, in seconds, between control packet detections on the remote system.                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>extensive</b>        |



Table 3: show bfd session Output Fields (*continued*)

| Field Name                          | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Level of Output |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Threshold transmission interval     | Threshold for notification if the transmission interval increases.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | extensive       |
| Threshold for detection time        | Threshold for notification if the detection time increases.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | extensive       |
| Local discriminator                 | Authentication code used by the local system to identify that BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | extensive       |
| Remote discriminator                | Authentication code used by the remote system to identify that BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | extensive       |
| Echo mode                           | Information about the state of echo transmissions on the BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | extensive       |
| Prefix                              | LDP FEC address associated with the BFD session.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | All levels      |
| Egress, Destination                 | Displays the LDP FEC destination address. This field is displayed only on a router at the egress of an LDP FEC, where the BFD session has an LDP Operation, Administration, and Maintenance (OAM) client.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | All levels      |
| Remote is control-plane independent | <p>The BFD session on the remote peer is running on its Packet Forwarding Engine. In this case, when the remote node undergoes a graceful restart, the local peer can help the remote peer with the graceful restart.</p> <p>The following BFD sessions are not distributed to the Packet Forwarding Engine: multihop sessions, tunnel-encapsulated sessions, and sessions over aggregated Ethernet and integrated routing and bridging (IRB) interfaces.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | extensive       |
| Authentication                      | <p>Summary status of BFD authentication:</p> <ul style="list-style-type: none"> <li>• <b>status</b>—<b>enabled/active</b> indicates authentication is configured and active. <b>enabled/inactive</b> indicates authentication is configured but not active. This only occurs when the remote end of the session does not support authentication and loose checking is configured.</li> <li>• <b>keychain</b>—Name of the security authentication keychain associated with the specified BFD session.</li> <li>• <b>algo</b>—BFD authentication algorithm being used: <b>keyed-md5</b>, <b>keyed-sha-1</b>, <b>meticulous-keyed-md5</b>, <b>meticulous-keyed-sha-1</b>, or <b>simple-password</b>.</li> <li>• <b>mode</b>—Level of BFD authentication enforcement: <b>strict</b> or <b>loose</b>. Strict enforcement indicates authentication is configured at both ends of the session (the default). Loose enforcement indicates that one end of the session might not be authenticated.</li> </ul> <p>This information is only shown if BFD authentication is configured.</p> | extensive       |
| sessions                            | Total number of active BFD sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | All levels      |
| clients                             | Total number of clients that are hosting active BFD sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | All levels      |
| Cumulative transmit rate            | Total number of BFD control packets transmitted per second on all active sessions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | All levels      |

Table 3: show bfd session Output Fields (*continued*)

| Field Name              | Field Description                                                               | Level of Output |
|-------------------------|---------------------------------------------------------------------------------|-----------------|
| Cumulative receive rate | Total number of BFD control packets received per second on all active sessions. | All levels      |
| Multi-hop, min-recv-TTL | Minimum time to live (TTL) accepted if the session is configured for multihop.  | extensive       |
| route table             | Route table used if the session is configured for multihop.                     | extensive       |
| local address           | Local address of the source used if the session is configured for multihop.     | extensive       |

## Sample Output

```

show bfd session user@host> show bfd session

Address State Interface Detect Time Transmit Interval Multiplier
10.9.1.33 Up so-7/1/0.0 0.600 0.200 3
10.9.1.29 Up ge-4/0/0.0 0.600 0.200 3

2 sessions, 2 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

```

**show bfd session brief** The output for the **show bfd session brief** command is identical to that for the **show bfd session** command. For sample output, see [show bfd session on page 248](#).

```

show bfd session user@host> show bfd session detail
detail
Address State Interface Detect Time Transmit Interval Multiplier
10.9.1.33 Up so-7/1/0.0 0.600 0.200 3
Client OSPF, TX interval 0.200, RX interval 0.200, multiplier 3
Session up time 3d 00:34
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated
10.9.1.29 Up ge-4/0/0.0 0.600 0.200 3
Client ISIS L2, TX interval 0.200, RX interval 0.200, multiplier 3
Session up time 3d 00:29, previous down time 00:00:01
Local diagnostic NbrSignal, remote diagnostic AdminDown
Remote state Up, version 1

2 sessions, 2 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

```

```

show bfd session user@host> show bfd session detail
detail (with
Authentication)
Address State Interface Detect Time Transmit Interval Multiplier
10.9.1.33 Up so-7/1/0.0 0.600 0.200 3
Client OSPF, TX interval 0.200, RX interval 0.200, multiplier 3, Authenticate
Session up time 3d 00:34
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated
10.9.1.29 Up ge-4/0/0.0 0.600 0.200 3

```

```

Client ISIS L2, TX interval 0.200, RX interval 0.200, multiplier 3
Session up time 3d 00:29, previous down time 00:00:01
Local diagnostic NbrSignal, remote diagnostic AdminDown
Remote state Up, version 1

```

```

2 sessions, 2 clients
Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

```

**show bfd session  
address extensive**

user@host> show bfd session 10.255.245.212 extensive

| Address        | State | Interface | Detect Time | Transmit Interval | Multiplier |
|----------------|-------|-----------|-------------|-------------------|------------|
| 10.255.245.212 | Up    |           | 1.200       | 0.400             | 3          |

```

Client Static, TX interval 0.400, RX interval 0.400, multiplier 3
Session up time 00:17:03, previous down time 00:00:14
Local diagnostic CtlExpire, remote diagnostic NbrSignal
Remote state Up, version 1
Replicated
Min async interval 0.400, min slow interval 1.000
Adaptive async tx interval 0.400, rx interval 0.400
Local min tx interval 0.400, min rx interval 0.400, multiplier 3
Remote min tx interval 0.400, min rx interval 0.400, multiplier 3
Threshold transmission interval 0.000, Threshold for detection time 0.000
Local discriminator 6, remote discriminator 16
Echo mode disabled/inactive
Multi-hop, min-recv-TTL 255, route-table 0, local-address 10.255.245.205

```

```

1 sessions, 1 clients
Cumulative transmit rate 2.5 pps, cumulative receive rate 2.5 pps

```

**show bfd session  
extensive**

user@host> show bfd session extensive

| Address   | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|-----------|-------|------------|-------------|-------------------|------------|
| 10.9.1.33 | Up    | so-7/1/0.0 | 0.600       | 0.200             | 3          |
| 10.9.1.29 | Up    | ge-4/0/0.0 | 0.600       | 0.200             | 3          |

```

Client OSPF, TX interval 0.200, RX interval 0.200, multiplier 3
Session up time 3d 00:34
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated
Min async interval 0.200, min slow interval 1.000
Adaptive async tx interval 0.200, rx interval 0.200
Local min tx interval 0.200, min rx interval 0.200, multiplier 3
Remote min tx interval 0.100, min rx interval 0.100, multiplier 3
Threshold transmission interval 0.000, Threshold for detection time 0.000
Local discriminator 11, remote discriminator 80
Echo mode disabled/inactive

Client ISIS L2, TX interval 0.200, RX interval 0.200, multiplier 3
Session up time 3d 00:30, previous down time 00:00:01
Local diagnostic NbrSignal, remote diagnostic AdminDown
Remote state Up, version 1
Replicated
Min async interval 0.200, min slow interval 1.000
Adaptive async tx interval 0.200, rx interval 0.200
Local min tx interval 0.200, min rx interval 0.200, multiplier 3
Remote min tx interval 0.200, min rx interval 0.200, multiplier 3
Threshold transmission interval 0.000, Threshold for detection time 0.000
Local discriminator 12, remote discriminator 11
Echo mode disabled/inactive
Remote is control-plane independent

```

2 sessions, 2 clients

Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

**show bfd session  
extensive (with  
Authentication)**

user@host> show bfd session extensive

| Address        | State | Interface  | Detect<br>Time | Transmit<br>Interval | Multiplier |
|----------------|-------|------------|----------------|----------------------|------------|
| 192.168.208.26 | Up    | so-1/0/0.0 | 2.400          | 0.800                | 10         |

Client Static, TX interval 0.600, RX interval 0.600, **Authenticate**  
**keychain bfd, algo keyed-md5, mode loose**  
Session up time 00:18:07  
Local diagnostic None, remote diagnostic NbrSignal  
Remote state Up, version 1  
Replicated  
Min async interval 0.600, min slow interval 1.000  
Adaptive async TX interval 0.600, RX interval 0.600  
Local min TX interval 0.600, minimum RX interval 0.600, multiplier 10  
Remote min TX interval 0.800, min RX interval 0.800, multiplier 3  
Local discriminator 2, remote discriminator 3  
Echo mode disabled/inactive  
**Authentication enabled/active, keychain bfd, algo keyed-md5, mode loose**

1 sessions, 1 clients

Cumulative transmit rate 1.2 pps, cumulative receive rate 1.2 pps

**show bfd session  
summary**

user@host> show bfd session summary

2 sessions, 2 clients

Cumulative transmit rate 10.0 pps, cumulative receive rate 10.0 pps

## show route

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <pre>show route &lt;all&gt; &lt;destination-prefix&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;private&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax (EX Series Switches)</b> | <pre>show route &lt;all&gt; &lt;destination-prefix&gt; &lt;private&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>private</b> option introduced in Junos OS Release 9.5.</p> <p><b>private</b> option introduced in Junos OS Release 9.5 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                 | Display the active entries in the routing tables.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                     | <p><b>none</b>—Display brief information about all active entries in the routing tables.</p> <p><b>all</b>—(Optional) Display information about all routing tables, including private, or internal, routing tables.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>private</b>—(Optional) Display information only about all private, or internal, routing tables.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>       | <p><a href="#">show route on page 253</a></p> <p><a href="#">show route destination-prefix on page 254</a></p> <p><a href="#">show route extensive on page 254</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Output Fields</b>               | Table 4 on page 251 describes the output fields for the <b>show route</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

Table 4: show route Output Fields

| Field Name                 | Field Description                                                       |
|----------------------------|-------------------------------------------------------------------------|
| <i>routing-table-name</i>  | Name of the routing table (for example, <b>inet.0</b> ).                |
| <i>number destinations</i> | Number of destinations for which there are routes in the routing table. |

Table 4: show route Output Fields (*continued*)

| Field Name                                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>number routes</i>                        | <p>Number of routes in the routing table and total number of routes in the following states:</p> <ul style="list-style-type: none"> <li>• <b>active</b> (routes that are active).</li> <li>• <b>holddown</b> (routes that are in the pending state before being declared inactive). A holddown route was once the active route and is no longer the active route. The route is in the holddown state because a protocol still has interest in the route, meaning that the interest bit is set. A protocol might have its interest bit set on the previously active route because the protocol is still advertising the route. The route will be deleted after all protocols withdraw their advertisement of the route and remove their interest bit. A persistent holddown state often means that the interested protocol is not releasing its interest bit properly.</li> </ul> <p>However, if you have configured advertisement of multiple routes (with the <b>add-path</b> or <b>advertise-inactive</b> statement), the holddown bit is most likely set because BGP is advertising the route as an active route. In this case, you can ignore the holddown state because nothing is wrong.</p> <ul style="list-style-type: none"> <li>• <b>hidden</b> (routes that are not used because of a routing policy).</li> </ul> |
| <i>destination-prefix</i>                   | <p>Route destination (for example:10.0.0.1/24). Sometimes the route information is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96): <ul style="list-style-type: none"> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport.</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> </li> </ul>                                                                                                                                                                      |
| [ <i>protocol, preference</i> ]             | <p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>                                                                                                                                                                                                                               |
| <i>weeks:days<br/>hours:minutes:seconds</i> | How long the route been known (for example, 2w4d 13:11:14, or 2 weeks, 4 days, 13 hours, 11 minutes, and 14 seconds).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <i>metric</i>                               | Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 4: show route Output Fields (*continued*)

| Field Name       | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>localpref</b> | Local preference value included in the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>from</b>      | Interface from which the route was received.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>AS path</b>   | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the local AS number associated with the AS path if more than one AS number is configured on the routing device, or if AS path prepending is configured.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> |
| <b>to</b>        | Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>via</b>       | <p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> <li>• <b>lsp-path-name</b>—Name of the LSP used to reach the next hop.</li> <li>• <b>label-action</b>—MPLS label and operation occurring at the next hop. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).</li> </ul>    |

## Sample Output

```

show route user@host> show route
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
0.0.0.0/0 *[Static/5] 1w5d 20:30:29
 Discard
10.255.245.51/32 *[Direct/0] 2w4d 13:11:14
 > via lo0.0

```

```

172.16.0.0/12 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0
192.168.0.0/18 *[Static/5] 1w5d 20:30:29
 > to 192.168.167.254 via fxp0.0
192.168.40.0/22 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0
192.168.64.0/18 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0
192.168.164.0/22 *[Direct/0] 2w4d 13:11:14
 > via fxp0.0
192.168.164.51/32 *[Local/0] 2w4d 13:11:14
 Local via fxp0.0
207.17.136.192/32 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0

green.inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
100.101.0.0/16 *[Direct/0] 1w5d 20:30:28
 > via fe-0/0/3.0
100.101.2.3/32 *[Local/0] 1w5d 20:30:28
 Local via fe-0/0/3.0
224.0.0.5/32 *[OSPF/10] 1w5d 20:30:29, metric 1
 MultiRecv

red.inet.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.10.10.10/32 *[Direct/0] 01:08:46
 > via lo0.1
10.255.245.212/32 *[BGP/170] 00:01:40, localpref 100, from 10.255.245.204
 AS path: 300 I
 > to 100.1.2.2 via ge-1/1/0.0, label-switched-path to_fix
10.255.245.213/32 *[BGP/170] 00:40:47, localpref 100
 AS path: 100 I
 > to 100.1.1.1 via so-0/0/1.0

```

**show route  
destination-prefix**

```

user@host> show route 172.16.0.0/12

inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

172.16.0.0/12 *[Static/5] 2w4d 12:54:27
 > to 192.168.167.254 via fxp0.0

```

**show route extensive**

```

user@host> show route extensive

inet.0: 335844 destinations, 335845 routes (335395 active, 0 holddown, 450 hidden)
1.9.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 1.9.0.0/16 -> {indirect(342)}
Page 0 idx 1 Type 1 val db31a80
 Nexthop: Self
 AS path: [69] 10458 14203 2914 4788 4788 I
 Communities: 2914:410 2914:2403 2914:3400
Path 1.9.0.0 from 192.168.69.71 Vector len 4. Val: 1
 *BGP Preference: 170/-101
 Next hop type: Indirect
 Next-hop reference count: 1006553
 Source: 192.168.69.71
 Next hop type: Router, Next hop index: 324
 Next hop: 192.168.167.254 via fxp0.0, selected
 Protocol next hop: 192.168.69.71
 Indirect next hop: 8e166c0 342

```



```
1
State: <Active Ext>
Local AS: 69 Peer AS: 10458
Age: 6d 10:58:10 Metric2: 0
Task: BGP_10458.192.168.69.71+179
Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree

AS path: 10458 14203 2914 4788 4788 I
Communities: 2914:410 2914:2403 2914:3400
Accepted
Localpref: 100
Router ID: 207.17.136.192
Indirect next hops: 1
 Protocol next hop: 192.168.69.71
 Indirect next hop: 8e166c0 342
 Indirect path forwarding next hops: 1
 Next hop type: Router
 Next hop: 192.168.167.254 via fxp0.0
192.168.0.0/16 Originating RIB: inet.0
 Node path count: 1
 Forwarding nexthops: 1
 Nexthop: 192.168.167.254 via fxp0.0
```

## show route active-path

|                                    |                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route active-path<br><brief   detail   extensive   terse><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                              |
| <b>Syntax (EX Series Switches)</b> | show route active-path<br><brief   detail   extensive   terse>                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>         | Command introduced in Junos OS Release 8.0.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                   |
| <b>Description</b>                 | Display all active routes for destinations. An active route is a route that is selected as the best path. Inactive routes are not displayed.                                                                                                                                                                                                                                        |
| <b>Options</b>                     | <p><b>none</b>—Display all active routes.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>       | <a href="#">show route active-path on page 256</a><br><a href="#">show route active-path brief on page 257</a><br><a href="#">show route active-path detail on page 257</a><br><a href="#">show route active-path extensive on page 258</a><br><a href="#">show route active-path terse on page 259</a>                                                                             |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                      |

## Sample Output

```

user@host> show route active-path

inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.255.70.19/32 * [Direct/0] 21:33:52
 > via lo0.0
10.255.71.50/32 * [IS-IS/15] 00:18:13, metric 10
 > to 100.1.2.1 via so-2/1/3.0
100.1.2.0/24 * [Direct/0] 00:18:36
 > via so-2/1/3.0
100.1.2.2/32 * [Local/0] 00:18:41
 Local via so-2/1/3.0
192.168.64.0/21 * [Direct/0] 21:33:52
 > via fxp0.0

```

```
192.168.70.19/32 *[Local/0] 21:33:52
 Local via fxp0.0
```

**show route active-path brief** The output for the **show route active-path brief** command is identical to that for the **show route active-path** command. For sample output, see [show route active-path on page 256](#).

**show route active-path detail** user@host> show route active-path detail

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)

10.255.70.19/32 (1 entry, 1 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 3
 Next hop: via lo0.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 21:37:10
 Task: IF
 Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

10.255.71.50/32 (1 entry, 1 announced)
 *IS-IS Preference: 15
 Level: 1
 Next hop type: Router, Next hop index: 397
 Next-hop reference count: 4
 Next hop: 100.1.2.1 via so-2/1/3.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 21:31 Metric: 10
 Task: IS-IS
 Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
 AS path: I

100.1.2.0/24 (1 entry, 1 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 3
 Next hop: via so-2/1/3.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 21:54
 Task: IF
 Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

100.1.2.2/32 (1 entry, 1 announced)
 *Local Preference: 0
 Next hop type: Local
 Next-hop reference count: 11
 Interface: so-2/1/3.0
 State: <Active NoReadvrt Int>
 Local AS: 200
 Age: 21:59
 Task: IF
 Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
```

```

AS path: I

192.168.64.0/21 (1 entry, 1 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 3
 Next hop: via fxp0.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 21:37:10
 Task: IF
 Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

192.168.70.19/32 (1 entry, 1 announced)
 *Local Preference: 0
 Next hop type: Local
 Next-hop reference count: 11
 Interface: fxp0.0
 State: <Active NoReadvrt Int>
 Local AS: 200
 Age: 21:37:10
 Task: IF
 Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

show route active-path extensive user@host> show route active-path extensive
extensive
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
10.255.70.19/32 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 3
 Next hop: via lo0.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 21:39:47
 Task: IF
 Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

10.255.71.50/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.255.71.50/32 -> {100.1.2.1}
IS-IS level 2, LSP fragment 0
 *IS-IS Preference: 15
 Level: 1
 Next hop type: Router, Next hop index: 397
 Next-hop reference count: 4
 Next hop: 100.1.2.1 via so-2/1/3.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 24:08 Metric: 10
 Task: IS-IS
 Announcement bits (4): 0-KRT 2-IS-IS 5-Resolve tree 2 6-Resolve
tree 3
 AS path: I

```

```

100.1.2.0/24 (1 entry, 1 announced)
TSI:
IS-IS level 1, LSP fragment 0
IS-IS level 2, LSP fragment 0
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 3
 Next hop: via so-2/1/3.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 24:31
 Task: IF
 Announcement bits (3): 2-IS-IS 5-Resolve tree 2 6-Resolve tree 3

 AS path: I

100.1.2.2/32 (1 entry, 1 announced)
 *Local Preference: 0
 Next hop type: Local
 Next-hop reference count: 11
 Interface: so-2/1/3.0
 State: <Active NoReadvrt Int>
 Local AS: 200
 Age: 24:36
 Task: IF
 Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

192.168.64.0/21 (1 entry, 1 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 3
 Next hop: via fxp0.0, selected
 State: <Active Int>
 Local AS: 200
 Age: 21:39:47
 Task: IF
 Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

192.168.70.19/32 (1 entry, 1 announced)
 *Local Preference: 0
 Next hop type: Local
 Next-hop reference count: 11
 Interface: fxp0.0
 State: <Active NoReadvrt Int>
 Local AS: 200
 Age: 21:39:47
 Task: IF
 Announcement bits (2): 5-Resolve tree 2 6-Resolve tree 3
 AS path: I

```

#### show route active-path terse

```
user@host> show route active-path terse
```

```
inet.0: 7 destinations, 7 routes (6 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
```

| A Destination     | P Prf | Metric 1 | Metric 2 | Next hop | AS path |
|-------------------|-------|----------|----------|----------|---------|
| * 10.255.70.19/32 | D 0   |          |          | >100.0   |         |

```

* 10.255.71.50/32 I 15 10 >100.1.2.1
* 100.1.2.0/24 D 0 >so-2/1/3.0
* 100.1.2.2/32 L 0 Local
* 192.168.64.0/21 D 0 >fxp0.0
* 192.168.70.19/32 L 0 Local

```

## show route all

|                                    |                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <code>show route all</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                                                                |
| <b>Syntax (EX Series Switches)</b> | <code>show route all</code>                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                |
| <b>Description</b>                 | Display information about all routes in all routing tables, including private, or internal, tables.                                                                                                                                                                                                                                  |
| <b>Options</b>                     | <b>none</b> —Display information about all routes in all routing tables, including private, or internal, tables.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.                                                        |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                 |
| <b>List of Sample Output</b>       | <a href="#">show route all on page 261</a>                                                                                                                                                                                                                                                                                           |
| <b>Output Fields</b>               | In Junos OS Release 9.5 and later, only the output fields for the <b>show route all</b> command display all routing tables, including private, or hidden, routing tables. The output field table of the <b>show route</b> command does not display entries for private, or hidden, routing tables in Junos OS Release 9.5 and later. |

## Sample Output

**show route all** The following example displays a snippet of output from the **show route** command and then displays the same snippet of output from the **show route all** command:

```
user@host> show route
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0 *[MPLS/0] 2d 02:24:39, metric 1
 Receive
1 *[MPLS/0] 2d 02:24:39, metric 1
 Receive
2 *[MPLS/0] 2d 02:24:39, metric 1
 Receive
800017 *[VPLS/7] 1d 14:00:16
 > via vt-3/2/0.32769, Pop
800018 *[VPLS/7] 1d 14:00:26
 > via vt-3/2/0.32772, Pop

user@host> show route all
mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
0 *[MPLS/0] 2d 02:19:12, metric 1
```

```

1 Receive
 *[MPLS/0] 2d 02:19:12, metric 1
 Receive
2 *[MPLS/0] 2d 02:19:12, metric 1
 Receive
800017 *[VPLS/7] 1d 13:54:49
 > via vt-3/2/0.32769, Pop
800018 *[VPLS/7] 1d 13:54:59
 > via vt-3/2/0.32772, Pop
vt-3/2/0.32769 [VPLS/7] 1d 13:54:49
 Unusable
vt-3/2/0.32772 [VPLS/7] 1d 13:54:59
 Unusable
```



## show route best

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <code>show route best <i>destination-prefix</i></code><br><brief   detail   extensive   terse><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                   |
| <b>Syntax (EX Series Switches)</b> | <code>show route best <i>destination-prefix</i></code><br><brief   detail   extensive   terse>                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                 | Display the route in the routing table that is the best route to the specified address or range of addresses. The best route is the longest matching route.                                                                                                                                                                                                                                              |
| <b>Options</b>                     | <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.<br><br><b><i>destination-prefix</i></b> —Address or range of addresses.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>       | <a href="#">show route best on page 263</a><br><a href="#">show route best detail on page 264</a><br><a href="#">show route best extensive on page 264</a><br><a href="#">show route best terse on page 265</a>                                                                                                                                                                                          |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                                           |

## Sample Output

```

user@host> show route best 10.255.70.103
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32 *[OSPF/10] 1d 13:19:20, metric 2
 > to 10.31.1.6 via ge-3/1/0.0
 via so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.255.70.103/32 *[RSVP/7] 1d 13:20:13, metric 2
 > via so-0/3/0.0, label-switched-path green-r1-r3

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.0.0.0/8 *[Direct/0] 2d 01:43:34

```

```

> via fxp2.0
[Direct/0] 2d 01:43:34
> via fxp1.0

```

```

show route best detail user@host> show route best 10.255.70.103 detail
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
 *OSPF Preference: 10
 Next-hop reference count: 9
 Next hop: 10.31.1.6 via ge-3/1/0.0, selected
 Next hop: via so-0/3/0.0
 State: <Active Int>
 Local AS: 69
 Age: 1d 13:20:06 Metric: 2
 Area: 0.0.0.0
 Task: OSPF
 Announcement bits (2): 0-KRT 3-Resolve tree 2
 AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
10.255.70.103/32 (1 entry, 1 announced)
 State: <FlashAll>
 *RSVP Preference: 7
 Next-hop reference count: 5
 Next hop: via so-0/3/0.0 weight 0x1, selected
 Label-switched-path green-r1-r3
 Label operation: Push 100016
 State: <Active Int>
 Local AS: 69
 Age: 1d 13:20:59 Metric: 2
 Task: RSVP
 Announcement bits (1): 1-Resolve tree 2
 AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
10.0.0.0/8 (2 entries, 0 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via fxp2.0, selected
 State: <Active Int>
 Age: 2d 1:44:20
 Task: IF
 AS path: I
 Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via fxp1.0, selected
 State: <NotBest Int>
 Inactive reason: No difference
 Age: 2d 1:44:20
 Task: IF
 AS path: I

```

**show route best extensive** The output for the **show route best extensive** command is identical to that for the **show route best detail** command. For sample output, see [show route best detail on page 264](#).

```

show route best terse user@host> show route best 10.255.70.103 terse
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
* 10.255.70.103/32 0 10 2 >10.31.1.6
 so-0/3/0.0

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
* 10.255.70.103/32 R 7 2 >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
* 10.0.0.0/8 D 0 0 >fxp2.0
 D 0 0 >fxp1.0

```

## show route brief

|                                    |                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route brief<br><destination-prefix><br><logical-system (all   logical-system-name)>                                                                                                                                                                                                                                                     |
| <b>Syntax (EX Series Switches)</b> | show route brief<br><destination-prefix>                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                        |
| <b>Description</b>                 | Display brief information about the active entries in the routing tables.                                                                                                                                                                                                                                                                    |
| <b>Options</b>                     | <p><b>none</b>—Display all active entries in the routing table.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>       | <a href="#">show route brief on page 266</a>                                                                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>               | For information about output fields, see the Output Field table of the <a href="#">show route</a> command.                                                                                                                                                                                                                                   |

## Sample Output

```

user@host> show route brief
inet.0: 10 destinations, 10 routes (9 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0 *[Static/5] 1w5d 20:30:29
 Discard
10.255.245.51/32 *[Direct/0] 2w4d 13:11:14
 > via lo0.0
172.16.0.0/12 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0
192.168.0.0/18 *[Static/5] 1w5d 20:30:29
 > to 192.168.167.254 via fxp0.0
192.168.40.0/22 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0
192.168.64.0/18 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0
192.168.164.0/22 *[Direct/0] 2w4d 13:11:14
 > via fxp0.0
192.168.164.51/32 *[Local/0] 2w4d 13:11:14
 Local via fxp0.0
207.17.136.192/32 *[Static/5] 2w4d 13:11:14
 > to 192.168.167.254 via fxp0.0

```

```
green.inet.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
100.101.0.0/16 *[Direct/0] 1w5d 20:30:28
 > via fe-0/0/3.0
100.101.2.3/32 *[Local/0] 1w5d 20:30:28
 Local via fe-0/0/3.0
224.0.0.5/32 *[OSPF/10] 1w5d 20:30:29, metric 1
 MultiRecv
```

## show route detail

|                                    |                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route detail<br><destination-prefix><br><logical-system (all   logical-system-name)>                                                                                                                                                                                                                                                                   |
| <b>Syntax (EX Series Switches)</b> | show route detail<br><destination-prefix>                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                       |
| <b>Description</b>                 | Display detailed information about the active entries in the routing tables.                                                                                                                                                                                                                                                                                |
| <b>Options</b>                     | <p><b>none</b>—Display all active entries in the routing table on all systems.</p> <p><b>destination-prefix</b>—(Optional) Display active entries for the specified address or range of addresses.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>       | <a href="#">show route detail on page 277</a><br><a href="#">show route detail (with BGP Multipath) on page 282</a>                                                                                                                                                                                                                                         |
| <b>Output Fields</b>               | <a href="#">Table 5 on page 268</a> describes the output fields for the <b>show route detail</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                           |

**Table 5: show route detail Output Fields**

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                               |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>routing-table-name</i>  | Name of the routing table (for example, <b>inet.0</b> ).                                                                                                                                                                                                                                                                                                        |
| <i>number destinations</i> | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                                         |
| <i>number routes</i>       | Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li><b>active</b> (routes that are active)</li> <li><b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li><b>hidden</b> (routes that are not used because of a routing policy)</li> </ul> |

Table 5: show route detail Output Fields (*continued*)

| Field Name                                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>route-destination</i><br>(entry, announced) | <p>Route destination (for example:10.0.0.1/24). The <b>entry</b> value is the number of routes for this destination, and the <b>announced</b> value is the number of routes being announced for this destination. Sometimes the route destination is presented in another format, such as:</p> <ul style="list-style-type: none"> <li>• <b>MPLS-label</b> (for example, 80001).</li> <li>• <b>interface-name</b> (for example, ge-1/0/2).</li> <li>• <b>neighbor-address:control-word-status:encapsulation type:vc-id:source</b> (Layer 2 circuit only; for example, 10.1.1.195:NoCtrlWord:1:1:Local/96).</li> <li>• <b>neighbor-address</b>—Address of the neighbor.</li> <li>• <b>control-word-status</b>—Whether the use of the control word has been negotiated for this virtual circuit: <b>NoCtrlWord</b> or <b>CtrlWord</b>.</li> <li>• <b>encapsulation type</b>—Type of encapsulation, represented by a number: (1) Frame Relay DLCI, (2) ATM AAL5 VCC transport, (3) ATM transparent cell transport, (4) Ethernet, (5) VLAN Ethernet, (6) HDLC, (7) PPP, (8) ATM VCC cell transport, (10) ATM VPC cell transport</li> <li>• <b>vc-id</b>—Virtual circuit identifier.</li> <li>• <b>source</b>—Source of the advertisement: <b>Local</b> or <b>Remote</b>.</li> </ul> |
| label stacking                                 | <p>(Next-to-the-last-hop routing device for MPLS only) Depth of the MPLS label stack, where the label-popping operation is needed to remove one or more labels from the top of the stack. A pair of routes is displayed, because the pop operation is performed only when the stack depth is two or more labels.</p> <ul style="list-style-type: none"> <li>• <b>S=0 route</b> indicates that a packet with an incoming label stack depth of 2 or more exits this routing device with one fewer label (the label-popping operation is performed).</li> <li>• If there is no <b>S=</b> information, the route is a normal MPLS route, which has a stack depth of 1 (the label-popping operation is not performed).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| [ <i>protocol, preference</i> ]                | <p>Protocol from which the route was learned and the preference value for the route.</p> <ul style="list-style-type: none"> <li>• <b>+—</b>A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>- —</b>A hyphen indicates the last active route.</li> <li>• <b>*—</b>An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul> <p>In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value.</p>                                                                                                                                                                                |
| Level                                          | <p>(IS-IS only). In IS-IS, a single AS can be divided into smaller groups called areas. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring Level 1 and Level 2 intermediate systems. Level 1 systems route within an area; when the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Route Distinguisher                            | IP subnet augmented with a 64-bit prefix.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Next-hop type                                  | Type of next hop. For a description of possible values for this field, see <a href="#">Table 6 on page 272</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Table 5: show route detail Output Fields (*continued*)

| Field Name                                           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Next-hop reference count</b>                      | Number of references made to the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Flood nexthop branches exceed maximum message</b> | Indicates that the number of flood next-hop branches exceeded the system limit of 32 branches, and only a subset of the flood next-hop branches were installed in the kernel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Source</b>                                        | IP address of the route source.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Next hop</b>                                      | Network layer address of the directly reachable neighboring system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>via</b>                                           | <p>Interface used to reach the next hop. If there is more than one interface available to the next hop, the name of the interface that is actually used is followed by the word <b>Selected</b>. This field can also contain the following information:</p> <ul style="list-style-type: none"> <li>• <b>Weight</b>—Value used to distinguish primary, secondary, and fast reroute backup routes. Weight information is available when MPLS label-switched path (LSP) link protection, node-link protection, or fast reroute is enabled, or when the standby state is enabled for secondary paths. A lower weight value is preferred. Among routes with the same weight value, load balancing is possible.</li> <li>• <b>Balance</b>—Balance coefficient indicating how traffic of unequal cost is distributed among next hops when a routing device is performing unequal-cost load balancing. This information is available when you enable BGP multipath load balancing.</li> </ul> |
| <b>Label-switched-path<br/>lsp-path-name</b>         | Name of the LSP used to reach the next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Label operation</b>                               | MPLS label and operation occurring at this routing device. The operation can be <b>pop</b> (where a label is removed from the top of the stack), <b>push</b> (where another label is added to the label stack), or <b>swap</b> (where a label is replaced by another label).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Interface</b>                                     | (Local only) Local interface name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Protocol next hop</b>                             | Network layer address of the remote routing device that advertised the prefix. This address is used to derive a forwarding next hop.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Indirect next hop</b>                             | Index designation used to specify the mapping between protocol next hops, tags, kernel export policy, and the forwarding next hops.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>State</b>                                         | State of the route (a route can be in more than one state). See <a href="#">Table 7 on page 274</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Local AS</b>                                      | AS number of the local routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Age</b>                                           | How long the route has been known.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>AIGP</b>                                          | Accumulated interior gateway protocol (AIGP) BGP attribute.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Metricn</b>                                       | Cost value of the indicated route. For routes within an AS, the cost is determined by IGP and the individual protocol metrics. For external routes, destinations, or routing domains, the cost is determined by a preference value.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



Table 5: show route detail Output Fields (*continued*)

| Field Name                     | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MED-plus-IGP</b>            | Metric value for BGP path selection to which the IGP cost to the next-hop destination has been added.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>TTL-Action</b>              | <p>For MPLS LSPs, state of the TTL propagation attribute. Can be enabled or disabled for all RSVP-signaled and LDP-signaled LSPs or for specific VRF routing instances.</p> <p>For sample output, see <a href="#">show route table</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Task</b>                    | Name of the protocol that has added the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Announcement bits</b>       | List of protocols that announce this route. <b>n-Resolve inet</b> indicates that the route is used for route resolution for next hops found in the routing table. <b>n</b> is an index used by Juniper Networks customer support only.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>AS path</b>                 | <p>AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated:</p> <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul> <p>When AS path numbers are included in the route, the format is as follows:</p> <ul style="list-style-type: none"> <li>• <b>[ ]</b>—Brackets enclose the number that precedes the AS path. This number represents the number of ASs present in the AS path, when calculated as defined in RFC 4271. This value is used in the AS-path merge process, as defined in RFC 4893.</li> <li>• <b>[ ]</b>—If more than one AS number is configured on the routing device, or if AS path prepending is configured, brackets enclose the local AS number associated with the AS path.</li> <li>• <b>{ }</b>—Braces enclose AS sets, which are groups of AS numbers in which the order does not matter. A set commonly results from route aggregation. The numbers in each AS set are displayed in ascending order.</li> <li>• <b>( )</b>—Parentheses enclose a confederation.</li> <li>• <b>( [ ] )</b>—Parentheses and brackets enclose a confederation set.</li> </ul> <p><b>NOTE:</b> In Junos OS Release 10.3 and later, the AS path field displays an unrecognized attribute and associated hexadecimal value if BGP receives attribute 128 (attribute set) and you have not configured an independent domain in any routing instance.</p> |
| <b>VC Label</b>                | MPLS label assigned to the Layer 2 circuit virtual connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>MTU</b>                     | Maximum transmission unit (MTU) of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>VLAN ID</b>                 | VLAN identifier of the Layer 2 circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Prefixes bound to route</b> | Forwarding Equivalent Class (FEC) bound to this route. Applicable only to routes installed by LDP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Communities</b>             | Community path attribute for the route. See <a href="#">Table 8 on page 276</a> for all possible values for this field.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Layer2-info: encaps</b>     | Layer 2 encapsulation (for example, VPLS).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>control flags</b>           | Control flags: <b>none</b> or <b>Site Down</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

Table 5: show route detail Output Fields (*continued*)

| Field Name                       | Field Description                                                                                                                                                      |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>mtu</b>                       | Maximum transmission unit (MTU) information.                                                                                                                           |
| <b>Label-Base, range</b>         | First label in a block of labels and label block size. A remote PE routing device uses this first label when sending traffic toward the advertising PE routing device. |
| <b>status vector</b>             | Layer 2 VPN and VPLS network layer reachability information (NLRI).                                                                                                    |
| <b>Accepted Multipath</b>        | Current active path when BGP multipath is configured.                                                                                                                  |
| <b>Accepted MultipathContrib</b> | Path currently contributing to BGP multipath.                                                                                                                          |
| <b>Localpref</b>                 | Local preference value included in the route.                                                                                                                          |
| <b>Router ID</b>                 | BGP router ID as advertised by the neighbor in the open message.                                                                                                       |
| <b>Primary Routing Table</b>     | In a routing table group, the name of the primary routing table in which the route resides.                                                                            |
| <b>Secondary Tables</b>          | In a routing table group, the name of one or more secondary tables in which the route resides.                                                                         |

[Table 6 on page 272](#) describes all possible values for the **Next-hop Types** output field.

Table 6: Next-hop Types Output Field Values

| Next-Hop Type            | Description                                                                                                                                                                                                                       |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Broadcast (bcast)</b> | Broadcast next hop.                                                                                                                                                                                                               |
| <b>Deny</b>              | Deny next hop.                                                                                                                                                                                                                    |
| <b>Discard</b>           | Discard next hop.                                                                                                                                                                                                                 |
| <b>Flood</b>             | Flood next hop. Consists of components called branches, up to a maximum of 32 branches. Each flood next-hop branch sends a copy of the traffic to the forwarding interface. Used by P2MP RSVP, P2MP LDP, P2MP CCC, and multicast. |
| <b>Hold</b>              | Next hop is waiting to be resolved into a unicast or multicast type.                                                                                                                                                              |
| <b>Indexed (idxd)</b>    | Indexed next hop.                                                                                                                                                                                                                 |
| <b>Indirect (indr)</b>   | Used with applications that have a protocol next hop address that is remote. You are likely to see this next-hop type for internal BGP (IBGP) routes when the BGP next hop is a BGP neighbor that is not directly connected.      |

Table 6: Next-hop Types Output Field Values (*continued*)

| Next-Hop Type                   | Description                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface</b>                | Used for a network address assigned to an interface. Unlike the <b>router</b> next hop, the <b>interface</b> next hop does not reference any specific node on the network.                                                                                                                                                                                                                                 |
| <b>Local (locl)</b>             | Local address on an interface. This next-hop type causes packets with this destination address to be received locally.                                                                                                                                                                                                                                                                                     |
| <b>Multicast (mcst)</b>         | Wire multicast next hop (limited to the LAN).                                                                                                                                                                                                                                                                                                                                                              |
| <b>Multicast discard (mdsc)</b> | Multicast discard.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Multicast group (mgrp)</b>   | Multicast group member.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Receive (recv)</b>           | Receive.                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Reject (rjct)</b>            | Discard. An ICMP unreachable message was sent.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Resolve (rslv)</b>           | Resolving next hop.                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Routed multicast (mcrt)</b>  | Regular multicast next hop.                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Router</b>                   | <p>A specific node or set of nodes to which the routing device forwards packets that match the route prefix.</p> <p>To qualify as next-hop type router, the route must meet the following criteria:</p> <ul style="list-style-type: none"> <li>• Must not be a direct or local subnet for the routing device.</li> <li>• Must have a next hop that is directly connected to the routing device.</li> </ul> |
| <b>Table</b>                    | Routing table next hop.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Unicast (ucst)</b>           | Unicast.                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Unilist (ulst)</b>           | List of unicast next hops. A packet sent to this next hop goes to any next hop in the list.                                                                                                                                                                                                                                                                                                                |

Table 7 on page 274 describes all possible values for the **State** output field. A route can be in more than one state (for example, <Active NoReadvrt Int Ext>).

**Table 7: State Output Field Values**

| Value                                       | Description                                                                                                                                                                          |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accounting                                  | Route needs accounting.                                                                                                                                                              |
| Active                                      | Route is active.                                                                                                                                                                     |
| Always Compare MED                          | Path with a lower multiple exit discriminator (MED) is available.                                                                                                                    |
| AS path                                     | Shorter AS path is available.                                                                                                                                                        |
| Clone                                       | Route is a clone.                                                                                                                                                                    |
| Cisco Non-deterministic MED selection       | Cisco nondeterministic MED is enabled and a path with a lower MED is available.                                                                                                      |
| Cluster list length                         | Length of cluster list sent by the route reflector.                                                                                                                                  |
| Delete                                      | Route has been deleted.                                                                                                                                                              |
| Ex                                          | Exterior route.                                                                                                                                                                      |
| Ext                                         | BGP route received from an external BGP neighbor.                                                                                                                                    |
| FlashAll                                    | Forces all protocols to be notified of a change to any route, active or inactive, for a prefix. When not set, protocols are informed of a prefix only when the active route changes. |
| Hidden                                      | Route not used because of routing policy.                                                                                                                                            |
| IfCheck                                     | Route needs forwarding RPF check.                                                                                                                                                    |
| IGP metric                                  | Path through next hop with lower IGP metric is available.                                                                                                                            |
| Inactive reason                             | Flags for this route, which was not selected as best for a particular destination.                                                                                                   |
| Initial                                     | Route being added.                                                                                                                                                                   |
| Int                                         | Interior route.                                                                                                                                                                      |
| Int Ext                                     | BGP route received from an internal BGP peer or a BGP confederation peer.                                                                                                            |
| Interior > Exterior > Exterior via Interior | Direct, static, IGP, or EBGp path is available.                                                                                                                                      |

Table 7: State Output Field Values (*continued*)

| Value                                 | Description                                                                                                                                                                                                                       |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Local Preference</b>               | Path with a higher local preference value is available.                                                                                                                                                                           |
| <b>Martian</b>                        | Route is a martian (ignored because it is obviously invalid).                                                                                                                                                                     |
| <b>MartianOK</b>                      | Route exempt from martian filtering.                                                                                                                                                                                              |
| <b>Next hop address</b>               | Path with lower metric next hop is available.                                                                                                                                                                                     |
| <b>No difference</b>                  | Path from neighbor with lower IP address is available.                                                                                                                                                                            |
| <b>NoReadvrt</b>                      | Route not to be advertised.                                                                                                                                                                                                       |
| <b>NotBest</b>                        | Route not chosen because it does not have the lowest MED.                                                                                                                                                                         |
| <b>Not Best in its group</b>          | Incoming BGP AS is not the best of a group (only one AS can be the best).                                                                                                                                                         |
| <b>NotInstall</b>                     | Route not to be installed in the forwarding table.                                                                                                                                                                                |
| <b>Number of gateways</b>             | Path with a greater number of next hops is available.                                                                                                                                                                             |
| <b>Origin</b>                         | Path with a lower origin code is available.                                                                                                                                                                                       |
| <b>Pending</b>                        | Route pending because of a hold-down configured on another route.                                                                                                                                                                 |
| <b>Release</b>                        | Route scheduled for release.                                                                                                                                                                                                      |
| <b>RIB preference</b>                 | Route from a higher-numbered routing table is available.                                                                                                                                                                          |
| <b>Route Distinguisher</b>            | 64-bit prefix added to IP subnets to make them unique.                                                                                                                                                                            |
| <b>Route Metric or MED comparison</b> | Route with a lower metric or MED is available.                                                                                                                                                                                    |
| <b>Route Preference</b>               | Route with lower preference value is available                                                                                                                                                                                    |
| <b>Router ID</b>                      | Path through a neighbor with lower ID is available.                                                                                                                                                                               |
| <b>Secondary</b>                      | Route not a primary route.                                                                                                                                                                                                        |
| <b>Unusable path</b>                  | Path is not usable because of one of the following conditions: <ul style="list-style-type: none"> <li>• The route is damped.</li> <li>• The route is rejected by an import policy.</li> <li>• The route is unresolved.</li> </ul> |
| <b>Update source</b>                  | Last tiebreaker is the lowest IP address value.                                                                                                                                                                                   |

Table 8 on page 276 describes the possible values for the **Communities** output field.

**Table 8: Communities Output Field Values**

| Value                                                   | Description                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>area-number</i>                                      | 4 bytes, encoding a 32-bit area number. For AS-external routes, the value is 0. A nonzero value identifies the route as internal to the OSPF domain, and as within the identified area. Area numbers are relative to a particular OSPF domain.                                        |
| <i>bandwidth: local AS number:link-bandwidth-number</i> | Link-bandwidth community value used for unequal-cost load balancing. When BGP has several candidate paths available for multipath purposes, it does not perform unequal-cost load balancing according to the link-bandwidth community unless all candidate paths have this attribute. |
| <i>domain-id</i>                                        | Unique configurable number that identifies the OSPF domain.                                                                                                                                                                                                                           |
| <i>domain-id-vendor</i>                                 | Unique configurable number that further identifies the OSPF domain.                                                                                                                                                                                                                   |
| <i>link-bandwidth-number</i>                            | Link-bandwidth number: from 0 through 4,294,967,295 (bytes per second).                                                                                                                                                                                                               |
| <i>local AS number</i>                                  | Local AS number: from 1 through 65,535.                                                                                                                                                                                                                                               |
| <i>options</i>                                          | 1 byte. Currently this is only used if the route type is 5 or 7. Setting the least significant bit in the field indicates that the route carries a type 2 metric.                                                                                                                     |
| <i>origin</i>                                           | (Used with VPNs) Identifies where the route came from.                                                                                                                                                                                                                                |
| <i>ospf-route-type</i>                                  | 1 byte, encoded as 1 or 2 for intra-area routes (depending on whether the route came from a type 1 or a type 2 LSA); 3 for summary routes; 5 for external routes (area number must be 0); 7 for NSSA routes; or 129 for sham link endpoint addresses.                                 |
| <i>rte-type</i>                                         | Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x0306. The format is <i>area-number:ospf-route-type:options</i> .                                                                                  |
| <i>route-type-vendor</i>                                | Displays the area number, OSPF route type, and option of the route. This is configured using the BGP extended community attribute 0x8000. The format is <i>area-number:ospf-route-type:options</i> .                                                                                  |
| <i>target</i>                                           | Defines which VPN the route participates in; <i>target</i> has the format <i>32-bit IP address:16-bit number</i> . For example, 10.19.0.0:100.                                                                                                                                        |
| <i>unknown IANA</i>                                     | Incoming IANA codes with a value between 0x1 and 0x7fff. This code of the BGP extended community attribute is accepted, but it is not recognized.                                                                                                                                     |
| <i>unknown OSPF vendor community</i>                    | Incoming IANA codes with a value above 0x8000. This code of the BGP extended community attribute is accepted, but it is not recognized.                                                                                                                                               |

## Sample Output

```

show route detail user@host> show route detail

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 29
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 1:31:43
 Task: RT
 Announcement bits (2): 0-KRT 3-Resolve tree 2
 AS path: I

10.31.1.0/30 (2 entries, 1 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 2
 Next hop: via so-0/3/0.0, selected
 State: <Active Int>
 Local AS: 69
 Age: 1:30:17
 Task: IF
 Announcement bits (1): 3-Resolve tree 2
 AS path: I
 OSPF Preference: 10
 Next-hop reference count: 1
 Next hop: via so-0/3/0.0, selected
 State: <Int>
 Inactive reason: Route Preference
 Local AS: 69
 Age: 1:30:17 Metric: 1
 Area: 0.0.0.0
 Task: OSPF
 AS path: I

10.31.1.1/32 (1 entry, 1 announced)
 *Local Preference: 0
 Next hop type: Local
 Next-hop reference count: 7
 Interface: so-0/3/0.0
 State: <Active NoReadvrt Int>
 Local AS: 69
 Age: 1:30:20
 Task: IF
 Announcement bits (1): 3-Resolve tree 2
 AS path: I

...

```

```
10.31.2.0/30 (1 entry, 1 announced)
 *OSPF Preference: 10
 Next-hop reference count: 9
 Next hop: via so-0/3/0.0
 Next hop: 10.31.1.6 via ge-3/1/0.0, selected
 State: <Active Int>
 Local AS: 69
 Age: 1:29:56 Metric: 2
 Area: 0.0.0.0
 Task: OSPF
 Announcement bits (2): 0-KRT 3-Resolve tree 2
 AS path: I

...

224.0.0.2/32 (1 entry, 1 announced)
 *PIM Preference: 0
 Next-hop reference count: 18
 State: <Active NoReadvrt Int>
 Local AS: 69
 Age: 1:31:45
 Task: PIM Recv
 Announcement bits (2): 0-KRT 3-Resolve tree 2
 AS path: I

...

224.0.0.22/32 (1 entry, 1 announced)
 *IGMP Preference: 0
 Next-hop reference count: 18
 State: <Active NoReadvrt Int>
 Local AS: 69
 Age: 1:31:43
 Task: IGMP
 Announcement bits (2): 0-KRT 3-Resolve tree 2
 AS path: I

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.255.70.103/32 (1 entry, 1 announced)
 State: <FlashAll>
 *RSVP Preference: 7
 Next-hop reference count: 6
 Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
 Label-switched-path green-r1-r3
 Label operation: Push 100096
 State: <Active Int>
 Local AS: 69
 Age: 1:25:49 Metric: 2
 Task: RSVP
 Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
 AS path: I

10.255.71.238/32 (1 entry, 1 announced)
 State: <FlashAll>
 *RSVP Preference: 7
 Next-hop reference count: 6
 Next hop: via so-0/3/0.0 weight 0x1, selected
 Label-switched-path green-r1-r2
 State: <Active Int>
 Local AS: 69
```



```

Age: 1:25:49 Metric: 1
Task: RSVP
Announcement bits (2): 1-Resolve tree 1 2-Resolve tree 2
AS path: I

private__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

47.0005.80ff.f800.0000.0108.0001.0102.5507.1052/152 (1 entry, 0 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via lo0.0, selected
 State: <Active Int>
 Local AS: 69
 Age: 1:31:44
 Task: IF
 AS path: I

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
0 (1 entry, 1 announced)
 *MPLS Preference: 0
 Next hop type: Receive
 Next-hop reference count: 6
 State: <Active Int>
 Local AS: 69
 Age: 1:31:45 Metric: 1
 Task: MPLS
 Announcement bits (1): 0-KRT
 AS path: I

...

mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
299776 (1 entry, 1 announced)
TSI:
KRT in-kernel 299776 /52 -> {Flood}
 *RSVP Preference: 7
 Next hop type: Flood
 Next-hop reference count: 130
 Flood nexthop branches exceed maximum
 Address: 0x8ea65d0

...

800010 (1 entry, 1 announced)
 *VPLS Preference: 7
 Next-hop reference count: 2
 Next hop: via vt-3/2/0.32769, selected
 Label operation: Pop
 State: <Active Int>
 Age: 1:29:30
 Task: Common L2 VC
 Announcement bits (1): 0-KRT
 AS path: I

vt-3/2/0.32769 (1 entry, 1 announced)
 *VPLS Preference: 7
 Next-hop reference count: 2
 Next hop: 10.31.1.6 via ge-3/1/0.0 weight 0x1, selected
 Label-switched-path green-r1-r3

```

```
Label operation: Push 800012, Push 100096(top)
Protocol next hop: 10.255.70.103
Push 800012
Indirect next hop: 87272e4 1048574
State: <Active Int>
Age: 1:29:30 Metric2: 2
Task: Common L2 VC
Announcement bits (2): 0-KRT 1-Common L2 VC
AS path: I
Communities: target:11111:1 Layer2-info: encaps:VPLS,
control flags:, mtu: 0

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

abcd::10:255:71:52/128 (1 entry, 0 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via lo0.0, selected
 State: <Active Int>
 Local AS: 69
 Age: 1:31:44
 Task: IF
 AS path: I

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via lo0.0, selected
 State: <Active NoReadvrt Int>
 Local AS: 69
 Age: 1:31:44
 Task: IF
 AS path: I

ff02::2/128 (1 entry, 1 announced)
 *PIM Preference: 0
 Next-hop reference count: 18
 State: <Active NoReadvrt Int>
 Local AS: 69
 Age: 1:31:45
 Task: PIM Recv6
 Announcement bits (1): 0-KRT
 AS path: I

ff02::d/128 (1 entry, 1 announced)
 *PIM Preference: 0
 Next-hop reference count: 18
 State: <Active NoReadvrt Int>
 Local AS: 69
 Age: 1:31:45
 Task: PIM Recv6
 Announcement bits (1): 0-KRT
 AS path: I

ff02::16/128 (1 entry, 1 announced)
 *MLD Preference: 0
 Next-hop reference count: 18
 State: <Active NoReadvrt Int>
 Local AS: 69
```

```

Age: 1:31:43
Task: MLD
Announcement bits (1): 0-KRT
AS path: I

private.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

fe80::280:42ff:fe10:f179/128 (1 entry, 0 announced)
 *Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via lo0.16385, selected
 State: <Active NoReadvrt Int>
 Age: 1:31:44
 Task: IF
 AS path: I

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)

10.255.70.103:1:3:1/96 (1 entry, 1 announced)
 *BGP Preference: 170/-101
 Route Distinguisher: 10.255.70.103:1
 Next-hop reference count: 7
 Source: 10.255.70.103
 Protocol next hop: 10.255.70.103
 Indirect next hop: 2 no-forward
 State: <Secondary Active Int Ext>
 Local AS: 69 Peer AS: 69
 Age: 1:25:49 Metric2: 1
 AIGP 210
 Task: BGP_69.10.255.70.103+179
 Announcement bits (1): 0-green-l2vpn
 AS path: I
 Communities: target:11111:1 Layer2-info: encaps:VPLS,
 control flags:, mtu: 0
 Label-base: 800008, range: 8
 Localpref: 100
 Router ID: 10.255.70.103
 Primary Routing Table bgp.l2vpn.0

10.255.71.52:1:1:1/96 (1 entry, 1 announced)
 *L2VPN Preference: 170/-1
 Next-hop reference count: 5
 Protocol next hop: 10.255.71.52
 Indirect next hop: 0 -
 State: <Active Int Ext>
 Age: 1:31:40 Metric2: 1
 Task: green-l2vpn
 Announcement bits (1): 1-BGP.0.0.0.0+179
 AS path: I
 Communities: Layer2-info: encaps:VPLS, control flags:Site-Down,
 mtu: 0
 Label-base: 800016, range: 8, status-vector: 0x9F

10.255.71.52:1:5:1/96 (1 entry, 1 announced)
 *L2VPN Preference: 170/-101
 Next-hop reference count: 5
 Protocol next hop: 10.255.71.52
 Indirect next hop: 0 -
 State: <Active Int Ext>
 Age: 1:31:40 Metric2: 1

```

```

Task: green-l2vpn
Announcement bits (1): 1-BGP.0.0.0+179
AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:, mtu: 0
Label-base: 800008, range: 8, status-vector: 0x9F

```

```
...
```

```

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
 *L2CKT Preference: 7
 Next hop: via so-1/1/2.0 weight 1, selected
 Label-switched-path my-lsp
 Label operation: Push 100000[0]
 Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
 State: <Active Int>
 Local AS: 99
 Age: 10:21
 Task: l2 circuit
 Announcement bits (1): 0-LDP
 AS path: I
 VC Label 100000, MTU 1500, VLAN ID 512

```

**show route detail (with  
BGP Multipath)**

```

user@host> show route detail
10.1.1.8/30 (2 entries, 1 announced)
 *BGP Preference: 170/-101
 Next hop type: Router, Next hop index: 262142
 Address: 0x901a010
 Next-hop reference count: 2
 Source: 10.1.1.2
 Next hop: 10.1.1.2 via lt-0/3/0.1, selected
 Next hop: 10.1.1.6 via lt-0/3/0.5
 State: <Active Ext>
 Local AS: 1 Peer AS: 2
 Age: 5:04:43
 Task: BGP_2.10.1.1.2+59955
 Announcement bits (1): 0-KRT
 AS path: 2 I
 Accepted Multipath
 Localpref: 100
 Router ID: 1.1.1.2
 BGP Preference: 170/-101
 Next hop type: Router, Next hop index: 678
 Address: 0x8f97520
 Next-hop reference count: 9
 Source: 10.1.1.6
 Next hop: 10.1.1.6 via lt-0/3/0.5, selected
 State: <NotBest Ext>
 Inactive reason: Not Best in its group - Active preferred
 Local AS: 1 Peer AS: 2
 Age: 5:04:43
 Task: BGP_2.10.1.1.6+58198
 AS path: 2 I
 Accepted MultipathContrib
 Localpref: 100
 Router ID: 1.1.1.3

```

## show route exact

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <code>show route exact <i>destination-prefix</i></code><br><brief   detail   extensive   terse><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                  |
| <b>Syntax (EX Series Switches)</b> | <code>show route exact <i>destination-prefix</i></code><br><brief   detail   extensive   terse>                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                    |
| <b>Description</b>                 | Display only the routes that exactly match the specified address or range of addresses.                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                     | <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.<br><br><b><i>destination-prefix</i></b> —Address or range of addresses.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>List of Sample Output</b>       | <a href="#">show route exact on page 283</a><br><a href="#">show route exact detail on page 283</a><br><a href="#">show route exact extensive on page 284</a><br><a href="#">show route exact terse on page 284</a>                                                                                                                                                                                      |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                                           |

## Sample Output

|                                |                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>show route exact</b>        | <pre> user@host&gt; show route exact 207.17.136.0/24  inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden) Restart Complete + = Active Route, - = Last Active, * = Both 207.17.136.0/24    *[Static/5] 2d 03:30:22                   &gt; to 192.168.71.254 via fxp0.0 </pre>                                                                                                 |
| <b>show route exact detail</b> | <pre> user@host&gt; show route exact 207.17.136.0/24 detail  inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden) Restart Complete 207.17.136.0/24 (1 entry, 1 announced)     *Static Preference: 5         Next-hop reference count: 29         Next hop: 192.168.71.254 via fxp0.0, selected         State: &lt;Active NoReadvrt Int Ext&gt;         Local AS:    69 </pre> |

```
Age: 2d 3:30:26
Task: RT
Announcement bits (2): 0-KRT 3-Resolve tree 2
AS path: I
```

```
show route exact extensive user@host> show route exact 207.17.136.0/24 extensive
extensive inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
*Static Preference: 5
Next-hop reference count: 29
Next hop: 192.168.71.254 via fxp0.0, selected
State: <Active NoReadvrt Int Ext>
Local AS: 69
Age: 1:25:18
Task: RT
Announcement bits (2): 0-KRT 3-Resolve tree 2
AS path: I
```

```
show route exact terse user@host> show route exact 207.17.136.0/24 terse

inet.0: 22 destinations, 23 routes (21 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both
A Destination P Prf Metric 1 Metric 2 Next hop AS path
* 207.17.136.0/24 S 5 >192.168.71.254
```

## show route export

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route export<br><brief   detail><br><instance <instance-name>   routing-table-name><br><logical-system (all   logical-system-name)>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Syntax (EX Series Switches)</b> | show route export<br><brief   detail><br><instance <instance-name>   routing-table-name>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>                 | Display policy-based route export information. Policy-based export simplifies the process of exchanging route information between routing instances.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                     | <p><b>none</b>—(Same as <b>brief</b>.) Display standard information about policy-based export for all instances and routing tables on all systems.</p> <p><b>brief   detail</b>—(Optional) Display the specified level of output.</p> <p><b>instance &lt;instance-name&gt;</b>—(Optional) Display a particular routing instance for which policy-based export is currently enabled.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>routing-table-name</b>—(Optional) Display information about policy-based export for all routing tables whose name begins with this string (for example, <b>inet.0</b> and <b>inet6.0</b> are both displayed when you run the <b>show route export inet</b> command).</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>List of Sample Output</b>       | <a href="#">show route export on page 286</a><br><a href="#">show route export detail on page 286</a><br><a href="#">show route export instance detail on page 286</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Output Fields</b>               | Table 9 on page 285 lists the output fields for the <b>show route export</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Table 9: show route export Output Fields

| Field Name                        | Field Description                                                                                                                                           | Level of Output   |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Table</b> or <b>table-name</b> | Name of the routing tables that either import or export routes.                                                                                             | All levels        |
| <b>Routes</b>                     | Number of routes exported from this table into other tables. If a particular route is exported to different tables, the counter will only increment by one. | <b>brief</b> none |
| <b>Export</b>                     | Whether the table is currently exporting routes to other tables: <b>Y</b> or <b>N</b> (Yes or No).                                                          | <b>brief</b> none |

Table 9: show route export Output Fields (*continued*)

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                           | Level of Output |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Import</b>        | Tables currently importing routes from the originator table. (Not displayed for tables that are not exporting any routes.)                                                                                                                                                                                                                                                  | <b>detail</b>   |
| <b>Flags</b>         | ( <b>instance</b> keyword only) Flags for this feature on this instance: <ul style="list-style-type: none"> <li><b>config auto-policy</b>—The policy was deduced from the configured IGP export policies.</li> <li><b>cleanup</b>—Configuration information for this instance is no longer valid.</li> <li><b>config</b>—The instance was explicitly configured.</li> </ul> | <b>detail</b>   |
| <b>Options</b>       | ( <b>instance</b> keyword only) Configured option displays the type of routing tables the feature handles: <ul style="list-style-type: none"> <li><b>unicast</b>—Indicates <i>instance.inet.0</i>.</li> <li><b>multicast</b>—Indicates <i>instance.inet.2</i>.</li> <li><b>unicast multicast</b>—Indicates <i>instance.inet.0</i> and <i>instance.inet.2</i>.</li> </ul>    | <b>detail</b>   |
| <b>Import policy</b> | ( <b>instance</b> keyword only) Policy that <b>route export</b> uses to construct the import-export matrix. Not displayed if the instance type is <b>vrf</b> .                                                                                                                                                                                                              | <b>detail</b>   |
| <b>Instance</b>      | ( <b>instance</b> keyword only) Name of the routing instance.                                                                                                                                                                                                                                                                                                               | <b>detail</b>   |
| <b>Type</b>          | ( <b>instance</b> keyword only) Type of routing instance: <b>forwarding</b> , <b>non-forwarding</b> , or <b>vrf</b> .                                                                                                                                                                                                                                                       | <b>detail</b>   |

## Sample Output

```

show route export user@host> show route export
Table Export Routes
inet.0 N 0
black.inet.0 Y 3
red.inet.0 Y 4

show route export user@host> show route export detail
detail inet.0 Routes: 0
 black.inet.0 Routes: 3
 Import: [inet.0]
 red.inet.0 Routes: 4
 Import: [inet.0]

show route export user@host> show route export instance detail
instance detail Instance: master Type: forwarding
 Flags: <config auto-policy> Options: <unicast multicast>
 Import policy: [(ospf-master-from-red || isis-master-from-black)]
 Instance: black Type: non-forwarding
 Instance: red Type: non-forwarding

```



## show route hidden

|                                 |                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>show route hidden</code><br><code>&lt;brief   detail   extensive   terse&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                   |
| <b>Release Information</b>      | Command introduced before Junos OS Release 7.4.                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Display only hidden route information. A hidden route is unusable, even if it is the best path.                                                                                                                                                                                                                                       |
| <b>Options</b>                  | <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>    | <a href="#">show route hidden on page 287</a><br><a href="#">show route hidden detail on page 288</a><br><a href="#">show route hidden extensive on page 288</a><br><a href="#">show route hidden terse on page 288</a>                                                                                                               |
| <b>Output Fields</b>            | For information about output fields, see the output field table for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                         |

## Sample Output

```

user@host> show route hidden
inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
127.0.0.1/32 [Direct/0] 04:26:38
 > via lo0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
10.5.5.5/32 [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
 AS path: 100 I
 Unusable
10.12.1.0/24 [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
 AS path: 100 I
 Unusable
10.12.80.4/30 [BGP/170] 03:44:10, localpref 100, from 10.4.4.4
 AS path: I
 Unusable
...

```

**show route hidden detail**

```

user@host> show route hidden detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
127.0.0.1/32 (1 entry, 0 announced)
 Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via lo0.0, selected
 State: <Hidden Martian Int>
 Local AS: 1
 Age: 4:27:37
 Task: IF
 AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.5.5.5/32 (1 entry, 0 announced)
 BGP Preference: 170/-101
 Route Distinguisher: 10.4.4.4:4
 Next hop type: Unusable
 Next-hop reference count: 6
 State: <Secondary Hidden Int Ext>
 Local AS: 1 Peer AS: 1
 Age: 3:45:09
 Task: BGP_1.10.4.4.4+2493
 AS path: 100 I
 Communities: target:1:999
 VPN Label: 100064
 Localpref: 100
 Router ID: 10.4.4.4
 Primary Routing Table bgp.13vpn.0

...

```

**show route hidden extensive** The output for the **show route hidden extensive** command is identical to that of the **show route hidden detail** command. For sample output, see [show route hidden detail on page 288](#).

**show route hidden terse**

```

user@host> show route hidden terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
127.0.0.1/32 D 0 >lo0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
10.5.5.5/32 B 170 100 Unusable 100 I
10.12.1.0/24 B 170 100 Unusable 100 I

```

```

10.12.80.4/30 B 170 100 Unusable I

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
10.4.4.4:4:10.5.5.5/32
 B 170 100 Unusable 100 I
10.4.4.4:4:10.12.1.0/24
 B 170 100 Unusable 100 I
10.4.4.4:4:10.12.80.4/30
 B 170 100 Unusable I

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

## show route inactive-path

|                                    |                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route inactive-path<br><brief   detail   extensive   terse><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                              |
| <b>Syntax (EX Series Switches)</b> | show route inactive-path<br><brief   detail   extensive   terse>                                                                                                                                                                                                                                                                                                                      |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                 |
| <b>Description</b>                 | Display routes for destinations that have no active route. An inactive route is a route that was not selected as the best path.                                                                                                                                                                                                                                                       |
| <b>Options</b>                     | <p><b>none</b>—Display all inactive routes.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>       | <a href="#">show route inactive-path on page 290</a><br><a href="#">show route inactive-path detail on page 291</a><br><a href="#">show route inactive-path extensive on page 292</a><br><a href="#">show route inactive-path terse on page 292</a>                                                                                                                                   |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                        |

## Sample Output

```

show route inactive-path user@host> show route inactive-path

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.12.100.12/30 [OSPF/10] 03:57:28, metric 1
> via so-0/3/0.0

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.0.0/8 [Direct/0] 04:39:56
> via fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

```

```

+ = Active Route, - = Last Active, * = Both

10.12.80.0/30 [BGP/170] 04:38:17, localpref 100
 AS path: 100 I
 > to 10.12.80.1 via ge-6/3/2.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.l3vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1__inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

show route user@host> show route inactive-path detail
inactive-path detail

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete

10.12.100.12/30 (2 entries, 1 announced)
 OSPF Preference: 10
 Next-hop reference count: 1
 Next hop: via so-0/3/0.0, selected
 State: <Int>
 Inactive reason: Route Preference
 Local AS: 1
 Age: 3:58:24 Metric: 1
 Area: 0.0.0.0
 Task: OSPF
 AS path: I

private1__inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

10.0.0.0/8 (2 entries, 0 announced)
 Direct Preference: 0
 Next hop type: Interface
 Next-hop reference count: 1
 Next hop: via fxp1.0, selected
 State: <NotBest Int>
 Inactive reason: No difference
 Age: 4:40:52
 Task: IF
 AS path: I

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete

10.12.80.0/30 (2 entries, 1 announced)
 BGP Preference: 170/-101
 Next-hop reference count: 6
 Source: 10.12.80.1
 Next hop: 10.12.80.1 via ge-6/3/2.0, selected
 State: <Ext>
 Inactive reason: Route Preference
 Peer AS: 100

```

```

Age: 4:39:13
Task: BGP_100.10.12.80.1+179
AS path: 100 I
Localpref: 100
Router ID: 10.0.0.0

```

**show route inactive-path extensive** The output for the **show route inactive-path extensive** command is identical to that of the **show route inactive-path detail** command. For sample output, see [show route inactive-path detail on page 291](#).

**show route inactive-path terse**

```

user@host> show route inactive-path terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
 10.12.100.12/30 0 10 1 >so-0/3/0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
 10.0.0.0/8 D 0 0 >fxp1.0

red.inet.0: 6 destinations, 8 routes (4 active, 0 holddown, 3 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
 10.12.80.0/30 B 170 100 >10.12.80.1 100 I

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

bgp.13vpn.0: 3 destinations, 3 routes (0 active, 0 holddown, 3 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

## show route instance

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                   | show route instance<br><brief   detail   summary><br><instance-name><br><logical-system (all   <i>logical-system-name</i> )><br><operational>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Syntax (EX Series Switch and QFX Series)</b> | show route instance<br><brief   detail   summary><br><instance-name><br><operational>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>                      | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 11.3 for the QFX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>                              | Display routing instance information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                                  | <p><b>none</b>—(Same as <b>brief</b>) Display standard information about all routing instances.</p> <p><b>brief   detail   summary</b>—(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to <b>brief</b>. (These options are not available with the <b>operational</b> keyword.)</p> <p><b>instance-name</b>—(Optional) Display information for all routing instances whose name begins with this string (for example, <b>cust1</b>, <b>cust11</b>, and <b>cust111</b> are all displayed when you run the <b>show route instance cust1</b> command).</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>operational</b>—(Optional) Display operational routing instances.</p> |
| <b>Required Privilege Level</b>                 | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>                    | <a href="#">show route instance on page 294</a><br><a href="#">show route instance detail (Graceful Restart Complete) on page 295</a><br><a href="#">show route instance detail (Graceful Restart Incomplete) on page 296</a><br><a href="#">show route instance detail (VPLS Routing Instance) on page 298</a><br><a href="#">show route instance operational on page 298</a><br><a href="#">show route instance summary on page 299</a>                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Output Fields</b>                            | Table 10 on page 293 lists the output fields for the <b>show route instance</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

Table 10: show route instance Output Fields

| Field Name                       | Field Description             | Level of Output |
|----------------------------------|-------------------------------|-----------------|
| Instance or <i>instance-name</i> | Name of the routing instance. | All levels      |

Table 10: show route instance Output Fields (*continued*)

| Field Name                           | Field Description                                                                                                                                                                                                                                                  | Level of Output           |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>Operational Routing Instances</b> | ( <b>operational</b> keyword only) Names of all operational routing instances.                                                                                                                                                                                     | —                         |
| <b>Type</b>                          | Type of routing instance: <b>forwarding</b> , <b>l2vpn</b> , <b>no-forwarding</b> , <b>vpls</b> , <b>virtual-router</b> , or <b>vrf</b> .                                                                                                                          | All levels                |
| <b>State</b>                         | State of the routing instance: <b>active</b> or <b>inactive</b> .                                                                                                                                                                                                  | <b>brief detail none</b>  |
| <b>Interfaces</b>                    | Name of interfaces belonging to this routing instance.                                                                                                                                                                                                             | <b>brief detail none</b>  |
| <b>Restart State</b>                 | Status of graceful restart for this instance: <b>Pending</b> or <b>Complete</b> .                                                                                                                                                                                  | <b>detail</b>             |
| <b>Path selection timeout</b>        | Maximum amount of time, in seconds, remaining until graceful restart is declared complete. The default is <b>300</b> .                                                                                                                                             | <b>detail</b>             |
| <b>Tables</b>                        | Tables (and number of routes) associated with this routing instance.                                                                                                                                                                                               | <b>brief detail none</b>  |
| <b>Route-distinguisher</b>           | Unique route distinguisher associated with this routing instance.                                                                                                                                                                                                  | <b>detail</b>             |
| <b>Vrf-import</b>                    | VPN routing and forwarding instance import policy name.                                                                                                                                                                                                            | <b>detail</b>             |
| <b>Vrf-export</b>                    | VPN routing and forwarding instance export policy name.                                                                                                                                                                                                            | <b>detail</b>             |
| <b>Vrf-import-target</b>             | VPN routing and forwarding instance import target community name.                                                                                                                                                                                                  | <b>detail</b>             |
| <b>Vrf-export-target</b>             | VPN routing and forwarding instance export target community name.                                                                                                                                                                                                  | <b>detail</b>             |
| <b>Fast-reroute-priority</b>         | Fast reroute priority setting for a VPLS routing instance: <b>high</b> , <b>medium</b> , or <b>low</b> . The default is <b>low</b> .                                                                                                                               | <b>detail</b>             |
| <b>Restart State</b>                 | Restart state: <ul style="list-style-type: none"> <li><b>Pending:protocol-name</b>—List of protocols that have not yet completed graceful restart for this routing table.</li> <li><b>Complete</b>—All protocols have restarted for this routing table.</li> </ul> | <b>detail</b>             |
| <b>Primary rib</b>                   | Primary table for this routing instance.                                                                                                                                                                                                                           | <b>brief none summary</b> |
| <b>Active/holddown/hidden</b>        | Number of active, hold-down, and hidden routes.                                                                                                                                                                                                                    | All levels                |

## Sample Output

```

show route instance user@host> show route instance
Instance Type
Primary RIB
master forwarding
inet.0 16/0/1
iso.0 1/0/0
mpls.0 0/0/0
inet6.0 2/0/0

```



```

12circuit.0 0/0/0
__juniper_private1__ forwarding
__juniper_private1__.inet.0 12/0/0
__juniper_private1__.inet6.0 1/0/0

show route instance detail (Graceful Restart Complete)
user@host> show route instance detail
master:
 Router ID: 10.255.14.176
 Type: forwarding State: Active
 Restart State: Complete Path selection timeout: 300
 Tables:
 inet.0 : 17 routes (15 active, 0 holddown, 1 hidden)
 Restart Complete
 inet.3 : 2 routes (2 active, 0 holddown, 0 hidden)
 Restart Complete
 iso.0 : 1 routes (1 active, 0 holddown, 0 hidden)
 Restart Complete
 mpls.0 : 19 routes (19 active, 0 holddown, 0 hidden)
 Restart Complete
 bgp.l3vpn.0 : 10 routes (10 active, 0 holddown, 0 hidden)
 Restart Complete
 inet6.0 : 2 routes (2 active, 0 holddown, 0 hidden)
 Restart Complete
 bgp.l2vpn.0 : 1 routes (1 active, 0 holddown, 0 hidden)
 Restart Complete
 BGP-INET:
 Router ID: 10.69.103.1
 Type: vrf State: Active
 Restart State: Complete Path selection timeout: 300
 Interfaces:
 t3-0/0/0.103
 Route-distinguisher: 10.255.14.176:103
 Vrf-import: [BGP-INET-import]
 Vrf-export: [BGP-INET-export]
 Tables:
 BGP-INET.inet.0 : 4 routes (4 active, 0 holddown, 0 hidden)
 Restart Complete
 BGP-L:
 Router ID: 10.69.104.1
 Type: vrf State: Active
 Restart State: Complete Path selection timeout: 300
 Interfaces:
 t3-0/0/0.104
 Route-distinguisher: 10.255.14.176:104
 Vrf-import: [BGP-L-import]
 Vrf-export: [BGP-L-export]
 Tables:
 BGP-L.inet.0 : 4 routes (4 active, 0 holddown, 0 hidden)
 Restart Complete
 BGP-L.mpls.0 : 3 routes (3 active, 0 holddown, 0 hidden)
 Restart Complete
 L2VPN:
 Router ID: 0.0.0.0
 Type: l2vpn State: Active
 Restart State: Complete Path selection timeout: 300
 Interfaces:
 t3-0/0/0.512
 Route-distinguisher: 10.255.14.176:512
 Vrf-import: [L2VPN-import]
 Vrf-export: [L2VPN-export]
 Tables:

```

```

L2VPN.l2vpn.0 : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
LDP:
Router ID: 10.69.105.1
Type: vrf State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
 t3-0/0/0.105
Route-distinguisher: 10.255.14.176:105
Vrf-import: [LDP-import]
Vrf-export: [LDP-export]
Tables:
 LDP.inet.0 : 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
OSPF:
Router ID: 10.69.101.1
Type: vrf State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
 t3-0/0/0.101
Route-distinguisher: 10.255.14.176:101
Vrf-import: [OSPF-import]
Vrf-export: [OSPF-export]
Vrf-import-target: [target:11111
Tables:
 OSPF.inet.0 : 8 routes (7 active, 0 holddown, 0 hidden)
Restart Complete
RIP:
Router ID: 10.69.102.1
Type: vrf State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
 t3-0/0/0.102
Route-distinguisher: 10.255.14.176:102
Vrf-import: [RIP-import]
Vrf-export: [RIP-export]
Tables:
 RIP.inet.0 : 6 routes (6 active, 0 holddown, 0 hidden)
Restart Complete
STATIC:
Router ID: 10.69.100.1
Type: vrf State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
 t3-0/0/0.100
Route-distinguisher: 10.255.14.176:100
Vrf-import: [STATIC-import]
Vrf-export: [STATIC-export]
Tables:
 STATIC.inet.0 : 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```

**show route instance  
detail (Graceful  
Restart Incomplete)**

```

user@host> show route instance detail
master:
Router ID: 10.255.14.176
Type: forwarding State: Active
Restart State: Pending Path selection timeout: 300
Tables:
 inet.0 : 17 routes (15 active, 1 holddown, 1 hidden)
Restart Pending: OSPF LDP
 inet.3 : 2 routes (2 active, 0 holddown, 0 hidden)

```

```

Restart Pending: OSPF LDP
iso.0 : 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
mpls.0 : 23 routes (23 active, 0 holddown, 0 hidden)
Restart Pending: LDP VPN
bgp.l3vpn.0 : 10 routes (10 active, 0 holddown, 0 hidden)
Restart Pending: BGP VPN
inet6.0 : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
bgp.l2vpn.0 : 1 routes (1 active, 0 holddown, 0 hidden)
Restart Pending: BGP VPN
BGP-INET:
 Router ID: 10.69.103.1
 Type: vrf State: Active
 Restart State: Pending Path selection timeout: 300
 Interfaces:
 t3-0/0/0.103
 Route-distinguisher: 10.255.14.176:103
 Vrf-import: [BGP-INET-import]
 Vrf-export: [BGP-INET-export]
 Tables:
 BGP-INET.inet.0 : 6 routes (5 active, 0 holddown, 0 hidden)
 Restart Pending: VPN
BGP-L:
 Router ID: 10.69.104.1
 Type: vrf State: Active
 Restart State: Pending Path selection timeout: 300
 Interfaces:
 t3-0/0/0.104
 Route-distinguisher: 10.255.14.176:104
 Vrf-import: [BGP-L-import]
 Vrf-export: [BGP-L-export]
 Tables:
 BGP-L.inet.0 : 6 routes (5 active, 0 holddown, 0 hidden)
 Restart Pending: VPN
 BGP-L.mpls.0 : 2 routes (2 active, 0 holddown, 0 hidden)
 Restart Pending: VPN
L2VPN:
 Router ID: 0.0.0.0
 Type: l2vpn State: Active
 Restart State: Pending Path selection timeout: 300
 Interfaces:
 t3-0/0/0.512
 Route-distinguisher: 10.255.14.176:512
 Vrf-import: [L2VPN-import]
 Vrf-export: [L2VPN-export]
 Tables:
 L2VPN.l2vpn.0 : 2 routes (2 active, 0 holddown, 0 hidden)
 Restart Pending: VPN L2VPN
LDP:
 Router ID: 10.69.105.1
 Type: vrf State: Active
 Restart State: Pending Path selection timeout: 300
 Interfaces:
 t3-0/0/0.105
 Route-distinguisher: 10.255.14.176:105
 Vrf-import: [LDP-import]
 Vrf-export: [LDP-export]
 Tables:
 LDP.inet.0 : 5 routes (4 active, 1 holddown, 0 hidden)
 Restart Pending: OSPF LDP VPN

```

```

OSPF:
 Router ID: 10.69.101.1
 Type: vrf State: Active
 Restart State: Pending Path selection timeout: 300
 Interfaces:
 t3-0/0/0.101
 Route-distinguisher: 10.255.14.176:101
 Vrf-import: [OSPF-import]
 Vrf-export: [OSPF-export]
 Tables:
 OSPF.inet.0 : 8 routes (7 active, 1 holddown, 0 hidden)
 Restart Pending: OSPF VPN

RIP:
 Router ID: 10.69.102.1
 Type: vrf State: Active
 Restart State: Pending Path selection timeout: 300
 Interfaces:
 t3-0/0/0.102
 Route-distinguisher: 10.255.14.176:102
 Vrf-import: [RIP-import]
 Vrf-export: [RIP-export]
 Tables:
 RIP.inet.0 : 8 routes (6 active, 2 holddown, 0 hidden)
 Restart Pending: RIP VPN

STATIC:
 Router ID: 10.69.100.1
 Type: vrf State: Active
 Restart State: Pending Path selection timeout: 300
 Interfaces:
 t3-0/0/0.100
 Route-distinguisher: 10.255.14.176:100
 Vrf-import: [STATIC-import]
 Vrf-export: [STATIC-export]
 Tables:
 STATIC.inet.0 : 4 routes (4 active, 0 holddown, 0 hidden)
 Restart Pending: VPN

show route instance detail (VPLS Routing Instance)
user@host> show route instance detail test-vpls
test-vpls:
 Router ID: 0.0.0.0
 Type: vpls State: Active
 Interfaces:
 lsi.1048833
 lsi.1048832
 fe-0/1/0.513
 Route-distinguisher: 10.255.37.65:1
 Vrf-import: [__vrf-import-test-vpls-internal__]
 Vrf-export: [__vrf-export-test-vpls-internal__]
 Vrf-import-target: [target:300:1]
 Vrf-export-target: [target:300:1]
 Fast-reroute-priority: high
 Tables:
 test-vpls.l2vpn.0 : 3 routes (3 active, 0 holddown, 0 hidden)

show route instance operational
user@host> show route instance operational
Operational Routing Instances:

master
default

```

```

show route instance summary
user@host> show route instance summary

```

| Instance | Type       | Primary rib      | Active/holdown/hidden |
|----------|------------|------------------|-----------------------|
| master   | forwarding | inet.0           | 15/0/1                |
|          |            | iso.0            | 1/0/0                 |
|          |            | mpls.0           | 35/0/0                |
|          |            | l3vpn.0          | 0/0/0                 |
|          |            | inet6.0          | 2/0/0                 |
|          |            | l2vpn.0          | 0/0/0                 |
|          |            | l2circuit.0      | 0/0/0                 |
| BGP-INET | vrf        | BGP-INET.inet.0  | 5/0/0                 |
|          |            | BGP-INET.iso.0   | 0/0/0                 |
|          |            | BGP-INET.inet6.0 | 0/0/0                 |
| BGP-L    | vrf        | BGP-L.inet.0     | 5/0/0                 |
|          |            | BGP-L.iso.0      | 0/0/0                 |
|          |            | BGP-L.mpls.0     | 4/0/0                 |
|          |            | BGP-L.inet6.0    | 0/0/0                 |
| L2VPN    | l2vpn      | L2VPN.inet.0     | 0/0/0                 |
|          |            | L2VPN.iso.0      | 0/0/0                 |
|          |            | L2VPN.inet6.0    | 0/0/0                 |
|          |            | L2VPN.l2vpn.0    | 2/0/0                 |
| LDP      | vrf        | LDP.inet.0       | 4/0/0                 |
|          |            | LDP.iso.0        | 0/0/0                 |
|          |            | LDP.mpls.0       | 0/0/0                 |
|          |            | LDP.inet6.0      | 0/0/0                 |
|          |            | LDP.l2circuit.0  | 0/0/0                 |
| OSPF     | vrf        | OSPF.inet.0      | 7/0/0                 |
|          |            | OSPF.iso.0       | 0/0/0                 |
|          |            | OSPF.inet6.0     | 0/0/0                 |
| RIP      | vrf        | RIP.inet.0       | 6/0/0                 |
|          |            | RIP.iso.0        | 0/0/0                 |
|          |            | RIP.inet6.0      | 0/0/0                 |
| STATIC   | vrf        | STATIC.inet.0    | 4/0/0                 |
|          |            | STATIC.iso.0     | 0/0/0                 |
|          |            | STATIC.inet6.0   | 0/0/0                 |

## show route label-switched-path

|                                    |                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <code>show route label-switched-path <i>path-name</i></code><br><brief   detail   extensive   terse><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                               |
| <b>Syntax (EX Series Switches)</b> | <code>show route label-switched-path <i>path-name</i></code><br><brief   detail   extensive   terse>                                                                                                                                                                                                       |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.5 for EX Series switches.                                                                                                                                                                                      |
| <b>Description</b>                 | Display the routes used in an MPLS label-switched path (LSP).                                                                                                                                                                                                                                              |
| <b>Options</b>                     | <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output.<br><br><b><i>path-name</i></b> —LSP tunnel name.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>       | <a href="#">show route label-switched-path on page 300</a>                                                                                                                                                                                                                                                 |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                             |

## Sample Output

```

show route label-switched-path user@host> show route label-switched-path sf-to-ny
inet.0: 29 destinations, 29 routes (29 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1.1.1.1/32 [MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
3.3.3.3/32 *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

inet.3: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

2.2.2.2/32 *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
4.4.4.4/32 *[MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path abc
> to 111.222.1.9 via s0-0/0/0, label-switched-path xyz
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny
111.222.1.9/32 [MPLS/7] 00:00:06, metric 0
> to 111.222.1.9 via s0-0/0/0, label-switched-path sf-to-ny

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```
mpls.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

## show route martians

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route martians<br><logical-system (all   <i>logical-system-name</i> )><br><table <i>routing-table-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Syntax (EX Series Switches)</b> | show route martians<br><table <i>routing-table-name</i> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>                 | Display the martian (invalid and ignored) entries associated with each routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                     | <p><b>none</b>—Display standard information about route martians for all routing tables.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>table <i>routing-table-name</i></b>—(Optional) Display information about route martians for all routing tables whose name begins with this string (for example, <b>inet.0</b> and <b>inet6.0</b> are both displayed when you run the <b>show route martians table inet</b> command).</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li><a href="#">Example: Configuring Martian Addresses on page 131</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>       | <a href="#">show route martians on page 302</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Output Fields</b>               | <a href="#">Table 11 on page 302</a> lists the output fields for the <b>show route martians</b> command. Output fields are listed in the approximate order in which they appear                                                                                                                                                                                                                                                                                                                                                                         |

**Table 11: show route martians Output Fields**

| Field Name                | Field Description                                           |
|---------------------------|-------------------------------------------------------------|
| <i>table-name</i>         | Name of the route table in which the route martians reside. |
| <i>destination-prefix</i> | Route destination.                                          |
| <i>match value</i>        | Route match parameter.                                      |
| <i>status</i>             | Status of the route: <b>allowed</b> or <b>disallowed</b> .  |

## Sample Output

```
show route martians user@host> show route martians
inet.0:
 0.0.0.0/0 exact -- allowed
```



```
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- disallowed
224.0.0.0/4 exact -- disallowed
224.0.0.0/24 exact -- disallowed

inet.1:
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- disallowed

inet.2:
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- disallowed
224.0.0.0/4 exact -- disallowed
224.0.0.0/24 exact -- disallowed

inet.3:
0.0.0.0/0 exact -- allowed
0.0.0.0/8 orlonger -- disallowed
127.0.0.0/8 orlonger -- disallowed
192.0.0.0/24 orlonger -- disallowed
240.0.0.0/4 orlonger -- disallowed
224.0.0.0/4 exact -- disallowed
224.0.0.0/24 exact -- disallowed

...

inet6.0:
::1/128 exact -- disallowed
ff00::/8 exact -- disallowed
ff02::/16 exact -- disallowed

inet6.1:
::1/128 exact -- disallowed

inet6.2:
::1/128 exact -- disallowed
ff00::/8 exact -- disallowed
ff02::/16 exact -- disallowed

inet6.3:
::1/128 exact -- disallowed
ff00::/8 exact -- disallowed
ff02::/16 exact -- disallowed

...
```

## show route next-hop

|                                    |                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <code>show route next-hop <i>next-hop</i></code><br><brief   detail   extensive   terse><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                           |
| <b>Syntax (EX Series Switches)</b> | <code>show route next-hop <i>next-hop</i></code><br><brief   detail   extensive   terse>                                                                                                                                                                                                                   |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                      |
| <b>Description</b>                 | Display the entries in the routing table that are being sent to the specified next-hop address.                                                                                                                                                                                                            |
| <b>Options</b>                     | <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b><i>next-hop</i></b> —Next-hop address. |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>       | <a href="#">show route next-hop on page 304</a><br><a href="#">show route next-hop detail on page 305</a><br><a href="#">show route next-hop extensive on page 306</a><br><a href="#">show route next-hop terse on page 308</a>                                                                            |
| <b>Output Fields</b>               | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                             |

## Sample Output

```

show route next-hop user@host> show route next-hop 192.168.71.254

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

10.10.0.0/16 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
10.209.0.0/16 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
172.16.0.0/12 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
192.168.0.0/16 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
192.168.102.0/23 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0
207.17.136.0/24 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0

```

```

207.17.136.192/32 *[Static/5] 06:26:25
> to 192.168.71.254 via fxp0.0

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

**show route next-hop  
detail**

```

user@host> show route next-hop 192.168.71.254 detail

inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
Restart Complete
10.10.0.0/16 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 36
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 1
 Age: 6:27:41
 Task: RT
 Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
 AS path: I

10.209.0.0/16 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 36
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 1
 Age: 6:27:41
 Task: RT
 Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
 AS path: I

172.16.0.0/12 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 36
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 1
 Age: 6:27:41
 Task: RT
 Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
 AS path: I

192.168.0.0/16 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 36
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>

```

```

Local AS: 1
Age: 6:27:41
Task: RT
Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
AS path: I

192.168.102.0/23 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 36
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 1
 Age: 6:27:41
 Task: RT
 Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
 AS path: I

207.17.136.0/24 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 36
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 1
 Age: 6:27:41
 Task: RT
 Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
 AS path: I

207.17.136.192/32 (1 entry, 1 announced)
 *Static Preference: 5
 Next-hop reference count: 36
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 1
 Age: 6:27:41
 Task: RT
 Announcement bits (3): 0-KRT 3-Resolve tree 1 5-Resolve tree 2
 AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

show route next-hop extensive user@host> show route next-hop 192.168.71.254 extensive
extensive
inet.0: 18 destinations, 18 routes (17 active, 0 holddown, 1 hidden)
10.10.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.10.0.0/16 -> {192.168.71.254}

```

```

*Static Preference: 5
 Next-hop reference count: 22
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 2:02:28
 Task: RT
 Announcement bits (1): 0-KRT
 AS path: I

10.209.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 10.209.0.0/16 -> {192.168.71.254}
*Static Preference: 5
 Next-hop reference count: 22
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 2:02:28
 Task: RT
 Announcement bits (1): 0-KRT
 AS path: I

172.16.0.0/12 (1 entry, 1 announced)
TSI:
KRT in-kernel 172.16.0.0/12 -> {192.168.71.254}
*Static Preference: 5
 Next-hop reference count: 22
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 2:02:28
 Task: RT
 Announcement bits (1): 0-KRT
 AS path: I

192.168.0.0/16 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.0.0/16 -> {192.168.71.254}
*Static Preference: 5
 Next-hop reference count: 22
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 2:02:28
 Task: RT
 Announcement bits (1): 0-KRT
 AS path: I

192.168.102.0/23 (1 entry, 1 announced)
TSI:
KRT in-kernel 192.168.102.0/23 -> {192.168.71.254}
*Static Preference: 5
 Next-hop reference count: 22
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 2:02:28
 Task: RT
 Announcement bits (1): 0-KRT
 AS path: I

```

```

207.17.136.0/24 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.0/24 -> {192.168.71.254}
 *Static Preference: 5
 Next-hop reference count: 22
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 2:02:28
 Task: RT
 Announcement bits (1): 0-KRT
 AS path: I

207.17.136.192/32 (1 entry, 1 announced)
TSI:
KRT in-kernel 207.17.136.192/32 -> {192.168.71.254}
 *Static Preference: 5
 Next-hop reference count: 22
 Next hop: 192.168.71.254 via fxp0.0, selected
 State: <Active NoReadvrt Int Ext>
 Local AS: 69
 Age: 2:02:28
 Task: RT
 Announcement bits (1): 0-KRT
 AS path: I

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)

private1___.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

green.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

red.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

#### show route next-hop terse

```

user@host> show route next-hop 192.168.71.254 terse

inet.0: 25 destinations, 26 routes (24 active, 0 holddown, 1 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
* 10.10.0.0/16 S 5 >192.168.71.254
* 10.209.0.0/16 S 5 >192.168.71.254
* 172.16.0.0/12 S 5 >192.168.71.254
* 192.168.0.0/16 S 5 >192.168.71.254
* 192.168.102.0/23 S 5 >192.168.71.254
* 207.17.136.0/24 S 5 >192.168.71.254
* 207.17.136.192/32 S 5 >192.168.71.254

private1___.inet.0: 2 destinations, 3 routes (2 active, 0 holddown, 0 hidden)

red.inet.0: 4 destinations, 5 routes (4 active, 0 holddown, 0 hidden)
Restart Complete

```

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)  
Restart Complete

mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)  
Restart Complete

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)  
Restart Complete

private1\_\_\_.inet6.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

## show route protocol

---

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <code>show route protocol <i>protocol</i></code><br><code>&lt;brief   detail   extensive   terse&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Syntax (EX Series Switches)</b> | <code>show route protocol <i>protocol</i></code><br><code>&lt;brief   detail   extensive   terse&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Options <b>ospf2</b> and <b>ospf3</b> introduced in Junos OS Release 9.2.<br>Options <b>ospf2</b> and <b>ospf3</b> introduced in Junos OS Release 9.2 for EX Series switches.<br>Option <b>flow</b> introduced in Junos OS Release 10.0.<br>Option <b>flow</b> introduced in Junos OS Release 10.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                 | Display the route entries in the routing table that were learned from a particular protocol.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                     | <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output. If you do not specify a level of output, the system defaults to brief.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b><i>protocol</i></b> —Protocol from which the route was learned: <ul style="list-style-type: none"><li>• <b>access</b>—Access route for use by DHCP application</li><li>• <b>access-internal</b>—Access-internal route for use by DHCP application</li><li>• <b>aggregate</b>—Locally generated aggregate route</li><li>• <b>atmvpn</b>—Asynchronous Transfer Mode virtual private network</li><li>• <b>bgp</b>—Border Gateway Protocol</li><li>• <b>ccc</b>—Circuit cross-connect</li><li>• <b>direct</b>—Directly connected route</li><li>• <b>dvmrp</b>—Distance Vector Multicast Routing Protocol</li><li>• <b>esis</b>—End System-to-Intermediate System</li><li>• <b>flow</b>—Locally defined flow-specification route.</li><li>• <b>isis</b>—Intermediate System-to-Intermediate System</li><li>• <b>ldp</b>—Label Distribution Protocol</li><li>• <b>l2circuit</b>—Layer 2 circuit</li><li>• <b>l2vpn</b>—Layer 2 virtual private network</li><li>• <b>local</b>—Local address</li><li>• <b>mpls</b>—Multiprotocol Label Switching</li></ul> |



- **msdp**—Multicast Source Discovery Protocol
- **ospf**—Open Shortest Path First versions 2 and 3
- **ospf2**—Open Shortest Path First version 2 only
- **ospf3**—Open Shortest Path First version 3 only
- **pim**—Protocol Independent Multicast
- **rip**—Routing Information Protocol
- **ripng**—Routing Information Protocol next generation
- **rsvp**—Resource Reservation Protocol
- **rtarget**—Local route target virtual private network
- **static**—Statically defined route
- **tunnel**—Dynamic tunnel
- **vpn**—Virtual private network



**NOTE:** EX Series switches run a subset of these protocols. See the switch CLI for details.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>List of Sample Output</b>    | <a href="#">show route protocol access on page 312</a><br><a href="#">show route protocol access-internal extensive on page 312</a><br><a href="#">show route protocol bgp on page 312</a><br><a href="#">show route protocol bgp detail on page 312</a><br><a href="#">show route protocol bgp extensive on page 313</a><br><a href="#">show route protocol bgp terse on page 313</a><br><a href="#">show route protocol direct on page 313</a><br><a href="#">show route protocol l2circuit detail on page 314</a><br><a href="#">show route protocol l2vpn extensive on page 315</a><br><a href="#">show route protocol ldp on page 315</a><br><a href="#">show route protocol ldp extensive on page 316</a><br><a href="#">show route protocol ospf (Layer 3 VPN) on page 317</a><br><a href="#">show route protocol ospf detail on page 317</a><br><a href="#">show route protocol rip on page 317</a><br><a href="#">show route protocol rip detail on page 318</a><br><a href="#">show route protocol ripng table inet6 on page 318</a> |
| <b>Output Fields</b>            | For information about output fields, see the output field tables for the <a href="#">show route</a> command, the <a href="#">show route detail</a> command, the <a href="#">show route extensive</a> command, or the <a href="#">show route terse</a> command.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Sample Output

```

show route protocol access user@host> show route protocol access
 inet.0: 30380 destinations, 30382 routes (30379 active, 0 holddown, 1 hidden)
 + = Active Route, - = Last Active, * = Both

 13.160.0.3/32 *[Access/13] 00:00:09
 > to 13.160.0.2 via fe-0/0/0.0
 13.160.0.4/32 *[Access/13] 00:00:09
 > to 13.160.0.2 via fe-0/0/0.0
 13.160.0.5/32 *[Access/13] 00:00:09
 > to 13.160.0.2 via fe-0/0/0.0

show route protocol access-internal extensive
 user@host> show route protocol access-internal 13.160.0.19 extensive
 inet.0: 100020 destinations, 100022 routes (100019 active, 0 holddown, 1 hidden)
 13.160.0.19/32 (1 entry, 1 announced)
 TSI:
 KRT in-kerne1 13.160.0.19/32 -> {13.160.0.2}
 *Access-internal Preference: 12
 Next-hop reference count: 200000
 Next hop: 13.160.0.2 via fe-0/0/0.0, selected
 State: <Active Int>
 Age: 36
 Task: RPD Unix Domain Server./var/run/rpd_serv.local
 Announcement bits (1): 0-KRT
 AS path: I

show route protocol bgp user@host> show route protocol bgp 192.168.64.0/21
 inet.0: 335832 destinations, 335833 routes (335383 active, 0 holddown, 450 hidden)
 + = Active Route, - = Last Active, * = Both

 192.168.64.0/21 *[BGP/170] 6d 10:41:16, localpref 100, from 192.168.69.71
 AS path: 10458 14203 2914 4788 4788 I
 > to 192.168.167.254 via fxp0.0

show route protocol bgp detail
 user@host> show route protocol bgp 66.117.63.0/24 exact detail
 inet.0: 335805 destinations, 335806 routes (335356 active, 0 holddown, 450 hidden)
 66.117.63.0/24 (1 entry, 1 announced)
 *BGP Preference: 170/-101
 Next hop type: Indirect
 Next-hop reference count: 1006436
 Source: 192.168.69.71
 Next hop type: Router, Next hop index: 324
 Next hop: 192.168.167.254 via fxp0.0, selected
 Protocol next hop: 192.168.69.71
 Indirect next hop: 8e166c0 342
 State: <Active Ext>
 Local AS: 69 Peer AS: 10458
 Age: 6d 10:42:42 Metric2: 0
 Task: BGP_10458.192.168.69.71+179
 Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree
 1
 AS path: 10458 14203 2914 4788 4788 I
 Communities: 2914:410 2914:2403 2914:3400
 Accepted
 Localpref: 100
 Router ID: 207.17.136.192

```

```

show route protocol bgp extensive user@host> show route protocol bgp 192.168.64.0/21 extensive
inet.0: 335827 destinations, 335828 routes (335378 active, 0 holddown, 450 hidden)
192.168.64.0/21 (1 entry, 1 announced)
TSI:
KRT in-kernel 1.9.0.0/16 -> {indirect(342)}
Page 0 idx 1 Type 1 val db31a80
 Nexthop: Self
 AS path: [69] 10458 14203 2914 4788 4788 I
 Communities: 2914:410 2914:2403 2914:3400
Path 1.9.0.0 from 192.168.69.71 Vector len 4. Val: 1
 *BGP Preference: 170/-101
 Next hop type: Indirect
 Next-hop reference count: 1006502
 Source: 192.168.69.71
 Next hop type: Router, Next hop index: 324
 Next hop: 192.168.167.254 via fxp0.0, selected
 Protocol next hop: 192.168.69.71
 Indirect next hop: 8e166c0 342
 State: <Active Ext>
 Local AS: 69 Peer AS: 10458
 Age: 6d 10:44:45 Metric2: 0
 Task: BGP_10458.192.168.69.71+179
 Announcement bits (3): 0-KRT 2-BGP RT Background 3-Resolve tree
1
 AS path: 10458 14203 2914 4788 4788 I
 Communities: 2914:410 2914:2403 2914:3400
 Accepted
 Localpref: 100
 Router ID: 207.17.136.192
 Indirect next hops: 1
 Protocol next hop: 192.168.69.71
 Indirect next hop: 8e166c0 342
 Indirect path forwarding next hops: 1
 Next hop type: Router
 Next hop: 192.168.167.254 via fxp0.0
 192.168.0.0/16 Originating RIB: inet.0
 Node path count: 1
 Forwarding nexthops: 1
 Nexthop: 192.168.167.254 via fxp0.0

show route protocol bgp terse user@host> show route protocol bgp 192.168.64.0/21 terse
inet.0: 24 destinations, 32 routes (23 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
192.168.64.0/21 B 170 100 >100.1.3.2 10023 21 I

show route protocol direct user@host> show route protocol direct
inet.0: 335843 destinations, 335844 routes (335394 active, 0 holddown, 450 hidden)
+ = Active Route, - = Last Active, * = Both

8.8.8.0/24 *[Direct/0] 17w0d 10:31:49
> via fe-1/3/1.0
10.255.165.1/32 *[Direct/0] 25w4d 04:13:18
> via lo0.0
30.30.30.0/24 *[Direct/0] 17w0d 23:06:26
> via fe-1/3/2.0

```

```

192.168.164.0/22 *[Direct/0] 25w4d 04:13:20
 > via fxp0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

47.0005.80ff.f800.0000.0108.0001.0102.5516.5001/152
 *[Direct/0] 25w4d 04:13:21
 > via lo0.0

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

abcd::10:255:165:1/128
 *[Direct/0] 25w4d 04:13:21
 > via lo0.0
fe80::2a0:a5ff:fe12:ad7/128
 *[Direct/0] 25w4d 04:13:21
 > via lo0.0

show route protocol user@host> show route protocol l2circuit detail
l2circuit detail
mpls.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
100000 (1 entry, 1 announced)
 *L2CKT Preference: 7
 Next hop: via ge-2/0/0.0, selected
 Label operation: Pop Offset: 4
 State: <Active Int>
 Local AS: 99
 Age: 9:52
 Task: Common L2 VC
 Announcement bits (1): 0-KRT
 AS path: I

ge-2/0/0.0 (1 entry, 1 announced)
 *L2CKT Preference: 7
 Next hop: via so-1/1/2.0 weight 1, selected
 Label-switched-path my-lsp
 Label operation: Push 100000, Push 100000(top)[0] Offset: -4
 Protocol next hop: 10.245.255.63
 Push 100000 Offset: -4
 Indirect next hop: 86af0c0 298
 State: <Active Int>
 Local AS: 99
 Age: 9:52
 Task: Common L2 VC
 Announcement bits (2): 0-KRT 1-Common L2 VC
 AS path: I

l2circuit.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

10.245.255.63:CtrlWord:4:3:Local/96 (1 entry, 1 announced)
 *L2CKT Preference: 7
 Next hop: via so-1/1/2.0 weight 1, selected
 Label-switched-path my-lsp
 Label operation: Push 100000[0]
 Protocol next hop: 10.245.255.63 Indirect next hop: 86af000 296
 State: <Active Int>
 Local AS: 99
 Age: 10:21
 Task: l2 circuit

```

```

Announcement bits (1): 0-LDP
AS path: I
VC Label 100000, MTU 1500, VLAN ID 512

```

```

show route protocol l2vpn extensive user@host> show route protocol l2vpn extensive

inet.0: 14 destinations, 15 routes (13 active, 0 holddown, 1 hidden)

inet.3: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

mpls.0: 7 destinations, 7 routes (7 active, 0 holddown, 0 hidden)
800001 (1 entry, 1 announced)
TSI:
KRT in-kernel 800001 /36 -> {so-0/0/0.0}
 *L2VPN Preference: 7
 Next hop: via so-0/0/0.0 weight 49087 balance 97%, selected
 Label operation: Pop Offset: 4
 State: <Active Int>
 Local AS: 69
 Age: 7:48
 Task: Common L2 VC
 Announcement bits (1): 0-KRT
 AS path: I

so-0/0/0.0 (1 entry, 1 announced)
TSI:
KRT in-kernel so-0/0/0.0 /16 -> {indirect(288)}
 *L2VPN Preference: 7
 Next hop: via so-0/0/1.0, selected
 Label operation: Push 800000 Offset: -4
 Protocol next hop: 10.255.14.220
 Push 800000 Offset: -4
 Indirect next hop: 85142a0 288
 State: <Active Int>
 Local AS: 69
 Age: 7:48
 Task: Common L2 VC
 Announcement bits (2): 0-KRT 1-Common L2 VC
 AS path: I
 Communities: target:69:1 Layer2-info: encaps:PPP,
 control flags:2, mtu: 0

```

```

show route protocol ldp user@host> show route protocol ldp

inet.0: 12 destinations, 13 routes (12 active, 0 holddown, 0 hidden)

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.16.1/32 *[LDP/9] 1d 23:03:35, metric 1
 > via t1-4/0/0.0, Push 100000
192.168.17.1/32 *[LDP/9] 1d 23:03:35, metric 1
 > via t1-4/0/0.0

private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

100064 *[LDP/9] 1d 23:03:35, metric 1

```

```

 > via t1-4/0/0.0, Pop
100064(S=0) *[LDP/9] 1d 23:03:35, metric 1
 > via t1-4/0/0.0, Pop
100080 *[LDP/9] 1d 23:03:35, metric 1
 > via t1-4/0/0.0, Swap 100000

show route protocol user@host> show route protocol ldp extensive
ldp extensive 192.168.16.1/32 (1 entry, 1 announced)
 State: <FlashAll>
 *LDP Preference: 9
 Next-hop reference count: 3
 Next hop: via t1-4/0/0.0, selected
 Label operation: Push 100000
 State: <Active Int>
 Local AS: 65500
 Age: 1d 23:03:58 Metric: 1
 Task: LDP
 Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
 AS path: I

 192.168.17.1/32 (1 entry, 1 announced)
 State: <FlashAll>
 *LDP Preference: 9
 Next-hop reference count: 3
 Next hop: via t1-4/0/0.0, selected
 State: <Active Int>
 Local AS: 65500
 Age: 1d 23:03:58 Metric: 1
 Task: LDP
 Announcement bits (2): 0-Resolve tree 1 2-Resolve tree 2
 AS path: I

private1___.inet.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)

mpls.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)

100064 (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /36 -> {t1-4/0/0.0}
 *LDP Preference: 9
 Next-hop reference count: 2
 Next hop: via t1-4/0/0.0, selected
 State: <Active Int>
 Local AS: 65500
 Age: 1d 23:03:58 Metric: 1
 Task: LDP
 Announcement bits (1): 0-KRT
 AS path: I
 Prefixes bound to route: 192.168.17.1/32

100064(S=0) (1 entry, 1 announced)
TSI:
KRT in-kernel 100064 /40 -> {t1-4/0/0.0}
 *LDP Preference: 9
 Next-hop reference count: 2
 Next hop: via t1-4/0/0.0, selected
 Label operation: Pop
 State: <Active Int>
 Local AS: 65500
 Age: 1d 23:03:58 Metric: 1
 Task: LDP

```

```
Announcement bits (1): 0-KRT
AS path: I
```

```
100080 (1 entry, 1 announced)
TSI:
KRT in-kernel 100080 /36 -> {t1-4/0/0.0}
 *LDP Preference: 9
 Next-hop reference count: 2
 Next hop: via t1-4/0/0.0, selected
 Label operation: Swap 100000
 State: <Active Int>
 Local AS: 65500
 Age: 1d 23:03:58 Metric: 1
 Task: LDP
 Announcement bits (1): 0-KRT
 AS path: I
 Prefixes bound to route: 192.168.16.1/32
```

### show route protocol ospf (Layer 3 VPN)

```
user@host> show route protocol ospf
inet.0: 40 destinations, 40 routes (39 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.4/30 *[OSPF/10] 00:05:18, metric 4
 > via t3-3/2/0.0
10.39.1.8/30 [OSPF/10] 00:05:18, metric 2
 > via t3-3/2/0.0
10.255.14.171/32 *[OSPF/10] 00:05:18, metric 4
 > via t3-3/2/0.0
10.255.14.179/32 *[OSPF/10] 00:05:18, metric 2
 > via t3-3/2/0.0
224.0.0.5/32 *[OSPF/10] 20:25:55, metric 1

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30 [OSPF/10] 00:05:43, metric 1
 > via so-0/2/2.0
10.255.14.173/32 *[OSPF/10] 00:05:43, metric 1
 > via so-0/2/2.0
224.0.0.5/32 *[OSPF/10] 20:26:20, metric 1
```

### show route protocol ospf detail

```
user@host> show route protocol ospf detail
VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.16/30 (2 entries, 0 announced)
 OSPF Preference: 10
 Nexthop: via so-0/2/2.0, selected
 State: <Int>
 Inactive reason: Route Preference
 Age: 6:25 Metric: 1
 Area: 0.0.0.0
 Task: VPN-AB-OSPF
 AS path: I
 Communities: Route-Type:0.0.0.0:1:0

...
```

**show route protocol rip**    user@host> show route protocol rip

```

inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 *[RIP/100] 20:24:34, metric 2
 > to 10.39.1.22 via t3-0/2/2.0
224.0.0.9/32 *[RIP/100] 00:03:59, metric 1

```

**show route protocol rip  
detail**

```

user@host> show route protocol rip detail
inet.0: 26 destinations, 27 routes (25 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

VPN-AB.inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.255.14.177/32 (1 entry, 1 announced)
 *RIP Preference: 100
 Nexthop: 10.39.1.22 via t3-0/2/2.0, selected
 State: <Active Int>
 Age: 20:25:02 Metric: 2
 Task: VPN-AB-RIPv2
 Announcement bits (2): 0-KRT 2-BGP.0.0.0.0+179
 AS path: I
 Route learned from 10.39.1.22 expires in 96 seconds

```

**show route protocol  
ripng table inet6**

```

user@host> show route protocol ripng table inet6
inet6.0: 4215 destinations, 4215 routes (4214 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

1111::1/128 *[RIPng/100] 02:13:33, metric 2
 > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::2/128 *[RIPng/100] 02:13:33, metric 2
 > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::3/128 *[RIPng/100] 02:13:33, metric 2
 > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::4/128 *[RIPng/100] 02:13:33, metric 2
 > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::5/128 *[RIPng/100] 02:13:33, metric 2
 > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0
1111::6/128 *[RIPng/100] 02:13:33, metric 2
 > to fe80::2a0:a5ff:fe3d:56 via t3-0/2/0.0

```



## show route resolution

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <pre>show route resolution &lt;brief   detail   extensive   summary&gt; &lt;index <i>index</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;prefix&gt; &lt;table <i>routing-table-name</i>&gt; &lt;unresolved&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Syntax (EX Series Switches)</b> | <pre>show route resolution &lt;brief   detail   extensive   summary&gt; &lt;index <i>index</i>&gt; &lt;prefix&gt; &lt;table <i>routing-table-name</i>&gt; &lt;unresolved&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>         | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>                 | <p>Display the entries in the next-hop resolution database. This database provides for recursive resolution of next hops through other prefixes in the routing table.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                     | <p><b>none</b>—Display standard information about all entries in the next-hop resolution database.</p> <p><b>brief   detail   extensive   summary</b>—(Optional) Display the specified level of output.</p> <p><b>index <i>index</i></b>—(Optional) Show the index of the resolution tree.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>prefix <i>network/destination-prefix</i></b>—(Optional) Display database entries for the specified address.</p> <p><b>table <i>routing-table-name</i></b>—(Optional) Display information about a particular routing table (for example, <b>inet.0</b>) where policy-based export is currently enabled.</p> <p><b>unresolved</b>—(Optional) Display routes that could not be resolved.</p> |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"> <li>Example: Configuring Route Resolution on PE Routers</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>       | <p><a href="#">show route resolution detail on page 320</a></p> <p><a href="#">show route resolution summary on page 321</a></p> <p><a href="#">show route resolution unresolved on page 321</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Output Fields** Table 12 on page 320 describes the output fields for the **show route resolution** command. Output fields are listed in the approximate order in which they appear.

**Table 12: show route resolution Output Fields**

| Field Name                         | Field Description                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>routing-table-name</i>          | Name of the routing table whose prefixes are resolved using the entries in the route resolution database. For routing table groups, this is the name of the primary routing table whose prefixes are resolved using the entries in the route resolution database.                                                                                     |
| <b>Tree index</b>                  | Tree index identifier.                                                                                                                                                                                                                                                                                                                                |
| <b>Nodes</b>                       | Number of nodes in the tree.                                                                                                                                                                                                                                                                                                                          |
| <b>Reference count</b>             | Number of references made to the next hop.                                                                                                                                                                                                                                                                                                            |
| <b>Contributing routing tables</b> | Routing tables used for next-hop resolution.                                                                                                                                                                                                                                                                                                          |
| <b>Originating RIB</b>             | Name of the routing table whose active route was used to determine the forwarding next-hop entry in the resolution database. For example, in the case of <b>inet.0</b> resolving through <b>inet.0</b> and <b>inet.3</b> , this field indicates which routing table, <b>inet.0</b> or <b>inet.3</b> , provided the best path for a particular prefix. |
| <b>Metric</b>                      | Metric associated with the forwarding next hop.                                                                                                                                                                                                                                                                                                       |
| <b>Node path count</b>             | Number of nodes in the path.                                                                                                                                                                                                                                                                                                                          |
| <b>Forwarding next hops</b>        | Number of forwarding next hops. The forwarding next hop is the network layer address of the directly reachable neighboring system (if applicable) and the interface used to reach it.                                                                                                                                                                 |

## Sample Output

```

user@host> show route resolution detail
show route resolution detail
Tree Index: 1, Nodes 0, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 2, Nodes 23, Reference Count 1
Contributing routing tables: inet.0 inet.3
10.10.0.0/16 Originating RIB: inet.0
 Node path count: 1
 Forwarding nexthops: 1
10.31.1.0/30 Originating RIB: inet.0
 Node path count: 1
 Forwarding nexthops: 1
10.31.1.1/32 Originating RIB: inet.0
 Node path count: 1
 Forwarding nexthops: 0
10.31.1.4/30 Originating RIB: inet.0
 Node path count: 1
 Forwarding nexthops: 1
10.31.1.5/32 Originating RIB: inet.0
 Node path count: 1

```

```

Forwarding nexthops: 0
10.31.2.0/30 Originating RIB: inet.0
Metric: 2 Node path count: 1
Forwarding nexthops: 2
10.31.11.0/24 Originating RIB: inet.0
Node path count: 1
Forwarding nexthops: 1

```

```

show route resolution summary user@host> show route resolution summary
Tree Index: 1, Nodes 24, Reference Count 1
Contributing routing tables: :voice.inet.0 :voice.inet.3
Tree Index: 2, Nodes 2, Reference Count 1
Contributing routing tables: inet.3
Tree Index: 3, Nodes 43, Reference Count 1
Contributing routing tables: inet.0 inet.3

```

```

show route resolution unresolved user@host> show route resolution unresolved
Tree Index 1
vt-3/2/0.32769.0 /16
Protocol Nexthop: 10.255.71.238 Push 800000
Indirect nexthop: 0 -
vt-3/2/0.32772.0 /16
Protocol Nexthop: 10.255.70.103 Push 800008
Indirect nexthop: 0 -
Tree Index 2

```

## show route summary

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route summary<br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Syntax (EX Series Switches)</b> | show route summary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Description</b>                 | Display summary statistics about the entries in the routing table.<br><br>CPU utilization might increase while the device learns routes. We recommend that you use the <b>show route summary</b> command after the device learns and enters the routes into the routing table. Depending on the size of your network, this might take several minutes. If you receive a “timeout communicating with routing daemon” error when using the <b>show route summary</b> command, wait several minutes before attempting to use the command again. This is not a critical system error, but you might experience a delay in using the command-line interface (CLI). |
| <b>Options</b>                     | <b>none</b> —Display summary statistics about the entries in the routing table.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>List of Sample Output</b>       | <a href="#">show route summary on page 323</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Output Fields</b>               | <a href="#">Table 13 on page 322</a> lists the output fields for the <b>show route summary</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**Table 13: show route summary Output Fields**

| Field Name                | Field Description                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>routing-table-name</i> | Name of the routing table (for example, <b>inet.0</b> ).                                                                                                                                                                                                                                                                                |
| <b>destinations</b>       | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                 |
| <b>routes</b>             | Number of routes in the routing table: <ul style="list-style-type: none"> <li><b>active</b>—Number of routes that are active.</li> <li><b>holddown</b>—Number of routes that are in the hold-down state before being declared inactive.</li> <li><b>hidden</b>—Number of routes that are not used because of routing policy.</li> </ul> |
| <b>Direct</b>             | Routes on the directly connected network.                                                                                                                                                                                                                                                                                               |
| <b>Local</b>              | Local routes.                                                                                                                                                                                                                                                                                                                           |

Table 13: show route summary Output Fields (*continued*)

| Field Name           | Field Description                                                                           |
|----------------------|---------------------------------------------------------------------------------------------|
| <i>protocol-name</i> | Name of the protocol from which the route was learned. For example, OSPF, RSVP, and Static. |

## Sample Output

```

show route summary user@host> show route summary
Autonomous system number: 69
Router ID: 10.255.71.52
Maximum-ECMP: 32
inet.0: 24 destinations, 25 routes (23 active, 0 holddown, 1 hidden)
Restart Complete
 Direct: 6 routes, 5 active
 Local: 4 routes, 4 active
 OSPF: 5 routes, 4 active
 Static: 7 routes, 7 active
 IGMP: 1 routes, 1 active
 PIM: 2 routes, 2 active

inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
 RSVP: 2 routes, 2 active

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
 Direct: 1 routes, 1 active

mpls.0: 7 destinations, 7 routes (5 active, 0 holddown, 2 hidden)
Restart Complete
 MPLS: 3 routes, 3 active
 VPLS: 4 routes, 2 active

inet6.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
Restart Complete
 Direct: 2 routes, 2 active
 PIM: 2 routes, 2 active
 MLD: 1 routes, 1 active

green.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
 BGP: 2 routes, 2 active
 L2VPN: 2 routes, 2 active

red.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
Restart Complete
 BGP: 2 routes, 2 active
 L2VPN: 1 routes, 1 active

bgp.l2vpn.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
 BGP: 4 routes, 4 active

```

## show route table

---

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | <code>show route table <i>routing-table-name</i></code><br><brief   detail   extensive   terse><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Syntax (EX Series Switches)</b> | <code>show route table <i>routing-table-name</i></code><br><brief   detail   extensive   terse>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>                 | Display the route entries in a particular routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                     | <b>brief   detail   extensive   terse</b> —(Optional) Display the specified level of output.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system.<br><br><b><i>routing-table-name</i></b> —Display route entries for all routing tables whose name begins with this string (for example, <b>inet.0</b> and <b>inet6.0</b> are both displayed when you run the <b>show route table inet</b> command).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>       | <ul style="list-style-type: none"><li>• <a href="#">show route summary on page 322</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>       | <a href="#">show route table bgp.l2.vpn on page 325</a><br><a href="#">show route table bgp.l3vpn.0 on page 325</a><br><a href="#">show route table bgp.l3vpn.0 detail on page 325</a><br><a href="#">show route table inet.0 on page 326</a><br><a href="#">show route table inet6.0 on page 327</a><br><a href="#">show route table inet6.3 on page 327</a><br><a href="#">show route table l2circuit.0 on page 327</a><br><a href="#">show route table mpls on page 328</a><br><a href="#">show route table mpls extensive on page 328</a><br><a href="#">show route table mpls.0 on page 328</a><br><a href="#">show route table mpls.0 (RSVP Route—Transit LSP) on page 329</a><br><a href="#">show route table vpls_1 detail on page 329</a><br><a href="#">show route table vpn-a on page 329</a><br><a href="#">show route table vpn-a.mdt.0 on page 330</a><br><a href="#">show route table VPN-AB.inet.0 on page 330</a><br><a href="#">show route table VPN_blue.mvpn-inet6.0 on page 330</a><br><a href="#">show route table VPN-A detail on page 331</a><br><a href="#">show route table inetflow detail on page 331</a> |

**Output Fields** For information about output fields, see the output field tables for the [show route](#) command, the [show route detail](#) command, the [show route extensive](#) command, or the [show route terse](#) command.

## Sample Output

```

show route table user@host> show route table bgp.l2vpn
bgp.l2vpn bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
 + = Active Route, - = Last Active, * = Both

192.168.24.1:1:4:1/96
 *[BGP/170] 01:08:58, localpref 100, from 192.168.24.1
 AS path: I
 > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am

show route table user@host> show route table bgp.l3vpn.0
bgp.l3vpn.0 bgp.l3vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
 + = Active Route, - = Last Active, * = Both

10.255.71.15:100:10.255.71.17/32
 *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
 AS path: I
 > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.15:200:10.255.71.18/32
 *[BGP/170] 00:03:59, MED 1, localpref 100, from
10.255.71.15
 AS path: I
 > via so-2/1/0.0, Push 100021, Push 100011(top)

show route table user@host> show route table bgp.l3vpn.0 detail
bgp.l3vpn.0 detail bgp.l3vpn.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)

10.255.245.12:1:4.0.0.0/8 (1 entry, 1 announced)
 *BGP Preference: 170/-101
 Route Distinguisher: 10.255.245.12:1
 Source: 10.255.245.12
 Next hop: 192.168.208.66 via fe-0/0/0.0, selected
 Label operation: Push 182449
 Protocol next hop: 10.255.245.12
 Push 182449
 Indirect next hop: 863a630 297
 State: <Active Int Ext>
 Local AS: 35 Peer AS: 35
 Age: 12:19 Metric2: 1
 Task: BGP_35.10.255.245.12+179
 Announcement bits (1): 0-BGP.0.0.0.0+179
 AS path: 30 10458 14203 2914 3356 I (Atomic) Aggregator: 3356 4.68.0.11

 Communities: 2914:420 target:11111:1 origin:56:78
 VPN Label: 182449
 Localpref: 100
 Router ID: 10.255.245.12

10.255.245.12:1:4.17.225.0/24 (1 entry, 1 announced)
 *BGP Preference: 170/-101
 Route Distinguisher: 10.255.245.12:1
 Source: 10.255.245.12
 Next hop: 192.168.208.66 via fe-0/0/0.0, selected

```

```

Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 863a8f0 305
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496 6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100
Router ID: 10.255.245.12

10.255.245.12:1:4.17.226.0/23 (1 entry, 1 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.245.12:1
Source: 10.255.245.12
Next hop: 192.168.208.66 via fe-0/0/0.0, selected
Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 86bd210 330
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100
Router ID: 10.255.245.12

10.255.245.12:1:4.17.251.0/24 (1 entry, 1 announced)
*BGP Preference: 170/-101
Route Distinguisher: 10.255.245.12:1
Source: 10.255.245.12
Next hop: 192.168.208.66 via fe-0/0/0.0, selected
Label operation: Push 182465
Protocol next hop: 10.255.245.12
Push 182465
Indirect next hop: 86bd210 330
State: <Active Int Ext>
Local AS: 35 Peer AS: 35
Age: 12:19 Metric2: 1
Task: BGP_35.10.255.245.12+179
Announcement bits (1): 0-BGP.0.0.0.0+179
AS path: 30 10458 14203 2914 11853 11853 11853 6496 6496 6496 6496 6496
6496 I
Communities: 2914:410 target:12:34 target:11111:1 origin:12:34
VPN Label: 182465
Localpref: 100

```

```

show route table inet.0 user@host> show route table inet.0
inet.0: 12 destinations, 12 routes (11 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

```



```

0.0.0.0/0 *[Static/5] 00:51:57
 > to 111.222.5.254 via fxp0.0
1.0.0.1/32 *[Direct/0] 00:51:58
 > via at-5/3/0.0
1.0.0.2/32 *[Local/0] 00:51:58
 Local
12.12.12.21/32 *[Local/0] 00:51:57
 Reject
13.13.13.13/32 *[Direct/0] 00:51:58
 > via t3-5/2/1.0
13.13.13.14/32 *[Local/0] 00:51:58
 Local
13.13.13.21/32 *[Local/0] 00:51:58
 Local
13.13.13.22/32 *[Direct/0] 00:33:59
 > via t3-5/2/0.0
127.0.0.1/32 [Direct/0] 00:51:58
 > via lo0.0
111.222.5.0/24 *[Direct/0] 00:51:58
 > via fxp0.0
111.222.5.81/32 *[Local/0] 00:51:58
 Local

```

```

show route table inet6.0 user@host> show route table inet6.0
inet6.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Route, * = Both

fec0:0:0:3::/64 *[Direct/0] 00:01:34
>via fe-0/1/0.0

fec0:0:0:3::/128 *[Local/0] 00:01:34
>Local

fec0:0:0:4::/64 *[Static/5] 00:01:34
>to fec0:0:0:3::ffff via fe-0/1/0.0

```

```

show route table inet6.3 user@router> show route table inet6.3
inet6.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

::10.255.245.195/128
 *[LDP/9] 00:00:22, metric 1
 > via so-1/0/0.0
::10.255.245.196/128
 *[LDP/9] 00:00:08, metric 1
 > via so-1/0/0.0, Push 100008

```

```

show route table l2circuit.0 user@host> show route table l2circuit.0
l2circuit.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.1.1.195:NoCtrlWord:1:1:Local/96
 *[L2CKT/7] 00:50:47
 > via so-0/1/2.0, Push 100049
 via so-0/1/3.0, Push 100049
10.1.1.195:NoCtrlWord:1:1:Remote/96
 *[LDP/9] 00:50:14
 Discard
10.1.1.195:CtrlWord:1:2:Local/96

```

```

 *[L2CKT/7] 00:50:47
 > via so-0/1/2.0, Push 100049
 via so-0/1/3.0, Push 100049
10.1.1.195:CtrlWord:1:2:Remote/96
 *[LDP/9] 00:50:14
 Discard

```

**show route table mpls** user@host> show route table mpls  
 mpls.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)  
 + = Active Route, - = Last Active, \* = Both

```

0 *[MPLS/0] 00:13:55, metric 1
 Receive
1 *[MPLS/0] 00:13:55, metric 1
 Receive
2 *[MPLS/0] 00:13:55, metric 1
 Receive
1024 *[VPN/0] 00:04:18
 to table red.inet.0, Pop

```

**show route table mpls extensive** user@host> show route table mpls extensive  
 100000 (1 entry, 1 announced)  
 TSI:  
 KRT in-kernel 100000 /36 -> {so-1/0/0.0}  
     \*LDP Preference: 9  
         Next hop: via so-1/0/0.0, selected  
         Pop  
         State: <Active Int>  
         Age: 29:50 Metric: 1  
         Task: LDP  
         Announcement bits (1): 0-KRT  
         AS path: I  
         Prefixes bound to route: 10.0.0.194/32

**show route table mpls.0** user@host> show route table mpls.0  
 mpls.0: 11 destinations, 11 routes (11 active, 0 holddown, 0 hidden)  
 + = Active Route, - = Last Active, \* = Both

```

0 *[MPLS/0] 00:45:09, metric 1
 Receive
1 *[MPLS/0] 00:45:09, metric 1
 Receive
2 *[MPLS/0] 00:45:09, metric 1
 Receive
100000 *[L2VPN/7] 00:43:04
 > via so-0/1/0.1, Pop
100001 *[L2VPN/7] 00:43:03
 > via so-0/1/0.2, Pop Offset: 4
100002 *[LDP/9] 00:43:22, metric 1
 via so-0/1/2.0, Pop
 > via so-0/1/3.0, Pop
100002(S=0) *[LDP/9] 00:43:22, metric 1
 via so-0/1/2.0, Pop
 > via so-0/1/3.0, Pop
100003 *[LDP/9] 00:43:22, metric 1
 > via so-0/1/2.0, Swap 100002
 via so-0/1/3.0, Swap 100002
100004 *[LDP/9] 00:43:16, metric 1
 via so-0/1/2.0, Swap 100049
 > via so-0/1/3.0, Swap 100049

```

```

so-0/1/0.1 *[L2VPN/7] 00:43:04
 > via so-0/1/2.0, Push 100001, Push 100049(top)
 via so-0/1/3.0, Push 100001, Push 100049(top)
so-0/1/0.2 *[L2VPN/7] 00:43:03
 > via so-0/1/2.0, Push 100000, Push 100049(top) Offset: -4
 > via so-0/1/3.0, Push 100000, Push 100049(top) Offset: -4

show route table mpls.0 (RSVP
Route—Transit LSP) user@host> show route table mpls.0
mpls.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

0 *[MPLS/0] 00:37:31, metric 1
 Receive
1 *[MPLS/0] 00:37:31, metric 1
 Receive
2 *[MPLS/0] 00:37:31, metric 1
 Receive
13 *[MPLS/0] 00:37:31, metric 1
 Receive
300352 *[RSVP/7/1] 00:08:00, metric 1
 > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300352(S=0) *[RSVP/7/1] 00:08:00, metric 1
 > to 8.64.0.106 via ge-1/0/1.0, label-switched-path lsp1_p2p
300384 *[RSVP/7/2] 00:05:20, metric 1
 > to 8.64.1.106 via ge-1/0/0.0, Pop
300384(S=0) *[RSVP/7/2] 00:05:20, metric 1
 > to 8.64.1.106 via ge-1/0/0.0, Pop

show route table vpls_1 detail user@host> show route table vpls_1 detail
vpls_1.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

1.1.1.11:1000:1:1/96 (1 entry, 1 announced)
*L2VPN Preference: 170/-1
Receive table: vpls_1.l2vpn.0
Next-hop reference count: 2
State: <Active Int Ext>
Age: 4:29:47 Metric2: 1
Task: vpls_1-l2vpn
Announcement bits (1): 1-BGP.0.0.0+179
AS path: I
Communities: Layer2-info: encaps:VPLS, control flags:Site-Down
Label-base: 800000, range: 8, status-vector: 0xFF

show route table vpn-a user@host> show route table vpn-a
vpn-a.l2vpn.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)

+ = Active Route, - = Last Active, * = Both
192.168.16.1:1:1/96
 *[VPN/7] 05:48:27
 Discard
192.168.24.1:1:2:1/96
 *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1
 AS path: I
 > to 10.0.16.2 via fe-0/0/1.0, label-switched-path am
192.168.24.1:1:3:1/96
 *[BGP/170] 00:02:53, localpref 100, from 192.168.24.1

```

```

AS path: I
> to 10.0.16.2 via fe-0/0/1.0, label-switched-path am

show route table vpn-a.mdt.0
user@host> show route table vpn-a.mdt.0
vpn-a.mdt.0: 3 destinations, 3 routes (3 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:1:0:10.255.14.216:232.1.1.1/144
 *[MVPN/70] 01:23:05, metric2 1
 Indirect
1:1:1:10.255.14.218:232.1.1.1/144
 *[BGP/170] 00:57:49, localpref 100, from 10.255.14.218
 AS path: I
 > via so-0/0/0.0, label-switched-path r0e-to-r1
1:1:2:10.255.14.217:232.1.1.1/144
 *[BGP/170] 00:57:49, localpref 100, from 10.255.14.217
 AS path: I
 > via so-0/0/1.0, label-switched-path r0-to-r2

show route table VPN-AB.inet.0
user@host> show route table VPN-AB.inet.0
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.39.1.0/30 *[OSPF/10] 00:07:24, metric 1
 > via so-7/3/1.0
10.39.1.4/30 *[Direct/0] 00:08:42
 > via so-5/1/0.0
10.39.1.6/32 *[Local/0] 00:08:46
 Local
10.255.71.16/32 *[Static/5] 00:07:24
 > via so-2/0/0.0
10.255.71.17/32 *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
 AS path: I
 > via so-2/1/0.0, Push 100020, Push 100011(top)
10.255.71.18/32 *[BGP/170] 00:07:24, MED 1, localpref 100, from
10.255.71.15
 AS path: I
 > via so-2/1/0.0, Push 100021, Push 100011(top)
10.255.245.245/32 *[BGP/170] 00:08:35, localpref 100
 AS path: 2 I
 > to 10.39.1.5 via so-5/1/0.0
10.255.245.246/32 *[OSPF/10] 00:07:24, metric 1
 > via so-7/3/1.0

show route table VPN_blue.mvpn-inet6.0
user@host> show route table VPN_blue.mvpn-inet6.0
vpn_blue.mvpn-inet6.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

1:10.255.2.202:65535:10.255.2.202/432
 *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
 AS path: I
 > via so-0/1/3.0
1:10.255.2.203:65535:10.255.2.203/432
 *[BGP/170] 00:02:37, localpref 100, from 10.255.2.203
 AS path: I
 > via so-0/1/0.0
1:10.255.2.204:65535:10.255.2.204/432
 *[MVPN/70] 00:57:23, metric2 1
 Indirect

```

```

5:10.255.2.202:65535:128:::192.168.90.2:128:ffff::1/432
 *[BGP/170] 00:02:37, localpref 100, from 10.255.2.202
 AS path: I
 > via so-0/1/3.0
6:10.255.2.203:65535:65000:128:::10.12.53.12:128:ffff::1/432
 *[PIM/105] 00:02:37
 Multicast (IPv6)
7:10.255.2.202:65535:65000:128:::192.168.90.2:128:ffff::1/432
 *[MVPN/70] 00:02:37, metric2 1
 Indirect

```

```

show route table VPN-A detail
VPN-A detail
user@host> show route table VPN-A detail
VPN-AB.inet.0: 8 destinations, 8 routes (8 active, 0 holddown, 0 hidden)
10.255.179.9/32 (1 entry, 1 announced)
 *BGP Preference: 170/-101
 Route Distinguisher: 10.255.179.13:200
 Next hop type: Indirect
 Next-hop reference count: 5
 Source: 10.255.179.13
 Next hop type: Router, Next hop index: 732
 Next hop: 10.39.1.14 via fe-0/3/0.0, selected
 Label operation: Push 299824, Push 299824(top)
 Protocol next hop: 10.255.179.13
 Push 299824
 Indirect next hop: 8f275a0 1048574
 State: (Secondary Active Int Ext)
 Local AS: 1 Peer AS: 1
 Age: 3:41:06 Metric: 1 Metric2: 1
 Task: BGP_1.10.255.179.13+64309
 Announcement bits (2): 0-KRT 1-BGP RT Background
 AS path: I
 Communities: target:1:200 rte-type:0.0.0.0:1:0
 Import Accepted
 VPN Label: 299824 TTL Action: vrf-ttl-propagate
 Localpref: 100
 Router ID: 10.255.179.13
 Primary Routing Table bgp.13vpn.0

```

```


show route table inetflow detail
inetflow detail
user@host> show route table inetflow detail
inetflow.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
10.12.44.1,*/48 (1 entry, 1 announced)
 *BGP Preference: 170/-101
 Next-hop reference count: 2
 State: **Active Ext>
 Local AS: 65002 Peer AS: 65000
 Age: 4
 Task: BGP_65000.10.12.99.5+3792
 Announcement bits (1): 0-Flow
 AS path: 65000 I
 Communities: traffic-rate:0:0
 Validation state: Accept, Originator: 10.12.99.5
 Via: 10.12.44.0/24, Active
 Localpref: 100
 Router ID: 10.255.71.161

10.12.56.1,*/48 (1 entry, 1 announced)
 *Flow Preference: 5
 Next-hop reference count: 2
 State: **Active>
 Local AS: 65002
 Age: 6:30

```

Task: RT Flow  
Announcement bits (2): 0-Flow 1-BGP.0.0.0.0+179  
AS path: I  
Communities: 1:1

## show route terse

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                      | show route terse<br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                                                                                                          |
| <b>Syntax (EX Series Switches)</b> | show route terse                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>         | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                             |
| <b>Description</b>                 | Display a high-level summary of the routes in the routing table.                                                                                                                                                                                                                                                                                                                                                  |
|                                    | <div>  <p><b>NOTE:</b> For BGP routes, the <b>show route terse</b> command displays the local preference attribute and MED instead of metric1 and metric2 values. This is mostly due to historical reasons.<br/>To display the metric1 and metric2 value of a BGP route, use the <b>show route extensive</b> command.</p> </div> |
| <b>Options</b>                     | <p><b>none</b>—Display a high-level summary of the routes in the routing table.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                                                                                                                                                                   |
| <b>Required Privilege Level</b>    | view                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>List of Sample Output</b>       | <a href="#">show route terse on page 335</a>                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Output Fields</b>               | <a href="#">Table 14 on page 333</a> describes the output fields for the <b>show route terse</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                 |

**Table 14: show route terse Output Fields**

| Field Name                 | Field Description                                                                                                                                                                                                                                                                                                                                               |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>routing-table-name</i>  | Name of the routing table (for example, <i>inet.0</i> ).                                                                                                                                                                                                                                                                                                        |
| <i>number destinations</i> | Number of destinations for which there are routes in the routing table.                                                                                                                                                                                                                                                                                         |
| <i>number routes</i>       | Number of routes in the routing table and total number of routes in the following states: <ul style="list-style-type: none"> <li><b>active</b> (routes that are active)</li> <li><b>holddown</b> (routes that are in the pending state before being declared inactive)</li> <li><b>hidden</b> (routes that are not used because of a routing policy)</li> </ul> |

Table 14: show route terse Output Fields (*continued*)

| Field Name         | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>route key</b>   | Key for the state of the route: <ul style="list-style-type: none"> <li>• <b>+</b>—A plus sign indicates the active route, which is the route installed from the routing table into the forwarding table.</li> <li>• <b>-</b>—A hyphen indicates the last active route.</li> <li>• <b>*</b>—An asterisk indicates that the route is both the active and the last active route. An asterisk before a <b>to</b> line indicates the best subpath to the route.</li> </ul>                                                                                                                   |
| <b>A</b>           | Active route. An asterisk (*) indicates this is the active route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Destination</b> | Destination of the route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>P</b>           | Protocol through which the route was learned: <ul style="list-style-type: none"> <li>• <b>A</b>—Aggregate</li> <li>• <b>B</b>—BGP</li> <li>• <b>C</b>—CCC</li> <li>• <b>D</b>—Direct</li> <li>• <b>G</b>—GMPLS</li> <li>• <b>I</b>—IS-IS</li> <li>• <b>L</b>—L2CKT, L2VPN, LDP, Local</li> <li>• <b>K</b>—Kernel</li> <li>• <b>M</b>—MPLS, MSDP</li> <li>• <b>O</b>—OSPF</li> <li>• <b>P</b>—PIM</li> <li>• <b>R</b>—RIP, RIPng</li> <li>• <b>S</b>—Static</li> <li>• <b>T</b>—Tunnel</li> </ul>                                                                                        |
| <b>Prf</b>         | Preference value of the route. In every routing metric except for the BGP <b>LocalPref</b> attribute, a lesser value is preferred. In order to use common comparison routines, Junos OS stores the 1's complement of the <b>LocalPref</b> value in the <b>Preference2</b> field. For example, if the <b>LocalPref</b> value for Route 1 is 100, the <b>Preference2</b> value is -101. If the <b>LocalPref</b> value for Route 2 is 155, the <b>Preference2</b> value is -156. Route 2 is preferred because it has a higher <b>LocalPref</b> value and a lower <b>Preference2</b> value. |
| <b>Metric 1</b>    | First metric value in the route. For routes learned from BGP, this is the MED metric.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Metric 2</b>    | Second metric value in the route. For routes learned from BGP, this is the IGP metric.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Next hop</b>    | Next hop to the destination. An angle bracket (>) indicates that the route is the selected route.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>AS path</b>     | AS path through which the route was learned. The letters at the end of the AS path indicate the path origin, providing an indication of the state of the route at the point at which the AS path originated: <ul style="list-style-type: none"> <li>• <b>I</b>—IGP.</li> <li>• <b>E</b>—EGP.</li> <li>• <b>?</b>—Incomplete; typically, the AS path was aggregated.</li> </ul>                                                                                                                                                                                                          |



## Sample Output

```

show route terse user@host> show route terse
inet.0: 12 destinations, 12 routes (11 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

A Destination P Prf Metric 1 Metric 2 Next hop AS path
* 0.0.0.0/0 S 5
* 1.0.0.1/32 D 0
* 1.0.0.2/32 L 0
* 12.12.12.21/32 L 0
* 13.13.13.13/32 D 0
* 13.13.13.14/32 L 0
* 13.13.13.21/32 L 0
* 13.13.13.22/32 D 0
 127.0.0.1/32 D 0
* 111.222.5.0/24 D 0
* 111.222.5.81/32 L 0
* 224.0.0.5/32 O 10 1 MultiRecv

```



## PART 4

# Troubleshooting

- [Routing Protocol Process Memory FAQ on page 339](#)



# Routing Protocol Process Memory FAQ

- [Routing Protocol Process Memory FAQ Overview on page 339](#)
- [Routing Protocol Process Memory FAQs on page 340](#)

## Routing Protocol Process Memory FAQ Overview

---

The Juniper Networks Junos operating system (Junos OS) is based on the FreeBSD Unix operating system. The open source software is modified and hardened to operate in the device's specialized environment. For example, some executables have been deleted while other utilities have been de-emphasized. Additionally, certain software processes have been added to enhance the routing functionality. The result of this transformation is the kernel, the heart of the Junos OS software.

The kernel is responsible for generating multiple processes that perform the actual functions of the device. Each process operates in its own protected memory space, providing isolation between the processes and resiliency in the event of a process failure. This is important in a core routing platform because a single process failure does not cause the entire device to cease functioning.

Some of the common software processes include the routing protocol process (rpd) that controls the device's protocols, the device control process (dcd) that controls the device's interfaces, the management process (mgd) that controls user access to the device, the chassis process (chassisd) that controls the device's properties itself, and the Packet Forwarding Engine process (pfed) that controls the communication between the device's Packet Forwarding Engine and the Routing Engine. Besides the above processes, there are other specialized processes that support additional functionality, such as the Simple Network Management Protocol (SNMP), Virtual Router Redundancy Protocol (VRRP), and Class of Service (CoS).

The routing protocol process is a software process within the Routing Engine software that controls the routing protocols that run on the device. Its functionality includes all protocol messages, routing table updates, and implementation of routing policies.

The routing protocol process starts all configured routing protocols and handles all routing messages. It maintains one or more routing tables, which consolidate the routing information learned from all routing protocols. From this routing information, the routing protocol process determines the active routes to network destinations and installs these routes into the Routing Engine's forwarding table. Finally, it implements the routing policy, which allows you to control the routing information that is transferred between the routing

protocols and the routing table. Using the routing policy, you can filter and limit the transfer of information as well as set properties associated with specific routes.

**Related Documentation**

- [Routing Protocol Process Memory FAQs on page 340](#)

## Routing Protocol Process Memory FAQs

---

The following sections present the most frequently asked questions and answers related to the routing protocol process memory utilization, operation, interpretation of related command outputs, and troubleshooting the software process.

### Routing Protocol Process Memory Utilization FAQs

This section presents frequently asked questions and answers related to the memory usage of the routing protocol process.

#### Why does the routing protocol process use excessive memory?

The routing protocol process uses hundreds of megabytes of RAM in the Routing Engine to store information needed for the operation of routing and related protocols, such as BGP, OSPF, ISIS, RSVP, LDP, and MPLS. Such huge consumption of memory is common for the process, as the information it stores includes routes, next hops, interfaces, routing policies, labels, and label-switched paths (LSPs). Because access to the RAM memory is much faster than access to the hard disk, most of the routing protocol process information is stored in the RAM memory instead of using the hard disk space. This ensures that the performance of the routing protocol process is maximized.

#### How can I check the amount of memory the routing protocol process is using?

You can check the routing protocol process memory usage by entering the **show system processes** and the **show task memory** Junos OS command-line interface (CLI) operational mode commands.

The **show system processes** command displays information about software processes that are running on the device. You can check the routing protocol process memory usage by using the **show system processes** command with the **extensive** option.

The **show task memory** command displays a report generated by the routing protocol process on the memory utilization for routing protocol tasks on the Routing Engine. Although the report generated by the routing protocol process is on its own memory usage, it does not display all the memory used by the process. The value reported by the routing protocol process does not account for the memory used for the **TEXT** and **STACK** segments, or the memory used by the process's internal memory manager. The **show task memory** command also does not include the memory which has been deactivated by the routing protocol process, although some or all of that deactivated memory has not actually been freed by the kernel.

For more information about checking the routing protocol process memory usage, see [Check Routing Protocol Process \(rpd\) Memory Usage](#) in the *Junos OS Baseline Network Operations Guide*.

For more information about the `show system processes` command and the `show task memory` command, see the [Junos OS System Basics and Services Command Reference](#).

**I just deleted many routes from the routing protocol process. Why is the routing protocol process still using so much memory?**

The **show system processes extensive** command displays a **RES** value measured in kilobytes. This value represents the amount of process memory resident in the physical memory. This is also known as RSS or Resident Set Size. Any amount of memory deactivated by the process might still be considered part of the **RES** value. Generally, the kernel defers the actual freeing of deactivated memory until there is a memory shortage. This can lead to large discrepancies between the values reported by the routing protocol process and the kernel, even after the routing protocol process has deactivated a large amount of memory.

## Interpreting Routing Protocol Process-Related Command Outputs FAQs

This section presents frequently asked questions and answers about the routing protocol process-related Junos OS CLI command outputs that are used to display the memory usage of the routing protocol process.

**How do I interpret memory numbers displayed in the show system processes extensive command output?**

The **show system processes extensive** command displays exhaustive system process information about software processes that are running on the device. This command is equivalent to the UNIX **top** command. However, the UNIX **top** command shows real-time memory usage, with the memory values constantly changing, while the **show system processes extensive** command provides a snapshot of memory usage in a given moment.

To check overall CPU and memory usage, enter the **show system processes extensive** command. Refer to [Table 15 on page 343](#) for information about the **show system processes extensive** command output fields.

```
user@host> show system processes extensive
last pid: 544; load averages: 0.00, 0.00, 0.00 18:30:33
37 processes: 1 running, 36 sleeping

Mem: 25M Active, 3968K Inact, 19M Wired, 184K Cache, 8346K Buf, 202M Free
Swap: 528M Total, 64K Used, 528M Free
 PID USERNAME PRI NICE SIZE RES STATE TIME WCPU CPU COMMAND
 544 root 30 0 604K 768K RUN 0:00 0.00% 0.00% top
 3 root 28 0 0K 12K psleep 0:00 0.00% 0.00% vmdaemon
 4 root 28 0 0K 12K update 0:03 0.00% 0.00% update
 528 aviva 18 0 660K 948K pause 0:00 0.00% 0.00% tcsh
 204 root 18 0 300K 544K pause 0:00 0.00% 0.00% csh
 131 root 18 0 332K 532K pause 0:00 0.00% 0.00% cron
 186 root 18 0 196K 68K pause 0:00 0.00% 0.00% watchdog
 27 root 10 0 512M 16288K mfsidl 0:00 0.00% 0.00% mount_mfs
 1 root 10 0 620K 344K wait 0:00 0.00% 0.00% init
 304 root 3 0 884K 900K ttyin 0:00 0.00% 0.00% bash
 200 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 203 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 202 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 201 root 3 0 180K 540K ttyin 0:00 0.00% 0.00% getty
 194 root 2 0 2248K 1640K select 0:11 0.00% 0.00% rpd
 205 root 2 0 964K 800K select 0:12 0.00% 0.00% tnp.chassisd
 189 root 2 -12 352K 740K select 0:03 0.00% 0.00% xntpd
 114 root 2 0 296K 612K select 0:00 0.00% 0.00% amd
```



```

188 root 2 0 780K 600K select 0:00 0.00% 0.00% dcd
527 root 2 0 176K 580K select 0:00 0.00% 0.00% rlogind
195 root 2 0 212K 552K select 0:00 0.00% 0.00% inetd
187 root 2 0 192K 532K select 0:00 0.00% 0.00% tnetd
 83 root 2 0 188K 520K select 0:00 0.00% 0.00% syslogd
538 root 2 0 1324K 516K select 0:00 0.00% 0.00% mgd
 99 daemon 2 0 176K 492K select 0:00 0.00% 0.00% portmap
163 root 2 0 572K 420K select 0:00 0.00% 0.00% nsrexecd
192 root 2 0 560K 400K select 0:10 0.00% 0.00% snmpd
191 root 2 0 1284K 376K select 0:00 0.00% 0.00% mgd
537 aviva 2 0 636K 364K select 0:00 0.00% 0.00% cli
193 root 2 0 312K 204K select 0:07 0.00% 0.00% mib2d
 5 root 2 0 0K 12K pfesel 0:00 0.00% 0.00% if_pfe
 2 root -18 0 0K 12K psleep 0:00 0.00% 0.00% pagedaemon
 0 root -18 0 0K 0K sched 0:00 0.00% 0.00% swapper

```

Table 15 on page 343 describes the output fields that represent the memory values for the **show system processes extensive** command. Output fields are listed in the approximate order in which they appear.

**Table 15: show system processes extensive Output Fields**

| Field Name    | Field Description                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mem</b>    | Information about physical and virtual memory allocation.                                                                                                                                                                                                                                                                                                                                                         |
| <b>Active</b> | Memory allocated and actively used by the process.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Inact</b>  | Memory allocated but not recently used, or memory deactivated by the processes. Inactive memory remains mapped in the address space of one or more processes and, therefore, counts toward the RSS value of those processes.                                                                                                                                                                                      |
| <b>Wired</b>  | Memory that is not eligible to be swapped, usually used for in-kernel memory structure, memory physically locked by a process, or both.                                                                                                                                                                                                                                                                           |
| <b>Cache</b>  | Freed memory that is no longer associated with any process but still has valid contents that correspond to some file system blocks. Cache pages can be reclaimed as is when the corresponding file system blocks are accessed again. However, when the system is under memory pressure, the contents of Cache pages could be erased by the kernel and the pages reused to service any memory allocation requests. |
| <b>Buf</b>    | Size of the virtual memory buffer used to hold data recently called from the disk.                                                                                                                                                                                                                                                                                                                                |
| <b>Free</b>   | Free memory that is neither associated with any process nor contains any valid contents.                                                                                                                                                                                                                                                                                                                          |
| <b>Swap</b>   | Information about swap memory. <ul style="list-style-type: none"> <li>• Total—Total space on the swap device.</li> <li>• Used—Memory swapped to disk.</li> <li>• Free—Unused space available on the swap device.</li> </ul>                                                                                                                                                                                       |

The rest of the command output displays information about the memory usage of each process. The **SIZE** field indicates the size of the virtual address space, and the **RES** field indicates the amount of the process in physical memory, which is also known as RSS or Resident Set Size. For more information, see the **show system processes** command in the *Junos OS System Basics and Services Command Reference*.

### What is the difference between Active and Inact memory that is displayed by the show system processes extensive command?

When the system is under memory pressure, the pageout process can free up memory from the **Inact** and, if necessary, **Active** pools after first preserving the contents of those pages on the swap device or backing file systems if necessary. When the pageout process runs, it scans memory to see which pages are good candidates to be unmapped and freed up. Thus, the distinction between **Active** and **Inact** memory is only used by the pageout process to determine which pool of pages to free first at the time of a memory shortage.

The pageout process first scans the **Inact** list and checks whether the pages on this list have been accessed since the time they have been listed here. The pages that have been accessed are moved from the **Inact** list to the **Active** list. On the other hand, pages that have not been accessed become prime candidates to be freed by the pageout process. If the pageout process cannot produce enough free pages from the **Inact** list, pages from the **Active** list are freed up.

Because the pageout process runs only when the system is under memory pressure, the pages on the **Inact** list remain untouched – even if they have not been accessed recently – when the amount of **Free** memory is adequate.

### How do I interpret memory numbers displayed in the show task memory command output?

The **show task memory** command provides a comprehensive picture of the memory utilization for routing protocol tasks on the Routing Engine. The routing protocol process is the main task that uses Routing Engine memory.

To check routing process memory usage, enter the **show task memory** command.

```
user@host> show task memory
Memory Size (kB) %Available When
Currently In Use: 29417 3% now
Maximum Ever Used: 33882 4% 00/02/11 22:07:03
Available: 756281 100% now
```

[Table 16 on page 344](#) describes the output fields for the **show task memory** command. Output fields are listed in the approximate order in which they appear.

**Table 16: show task memory Output Fields**

| Field Name               | Field Description                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------------------------|
| Memory Currently In Use  | Memory currently in use. Dynamically allocated memory plus the <b>DATA</b> segment memory in kilobytes. |
| Memory Maximum Ever Used | Maximum memory ever used.                                                                               |
| Memory Available         | Memory currently available.                                                                             |

The **show task memory** command does not display all the memory used by the routing protocol process. This value does not account for the memory used for the **TEXT** and

**STACK** segments, or the memory used by the routing protocol process's internal memory manager. The **show task memory** command also does not include the memory which has been deactivated by the routing protocol process, although some or all of that deactivated memory has not actually been freed by the kernel.

#### **Why is the Memory Currently In Use value less than the RES value?**

The **show task memory** command displays a **Memory Currently In Use** value measured in kilobytes. This value is the dynamically allocated memory plus the **DATA** segment memory. The **show system processes extensive** command displays a **RES** value measured in kilobytes. This value represents the amount of process memory resident in the physical memory. This is also known as RSS or Resident Set Size.

The **Memory Currently In Use** value does not account for all of the memory that the routing protocol process uses. This value does not include the memory used for the **TEXT** and the **STACK** segments, and a small percentage of memory used by the routing protocol process's internal memory manager. The **show task memory** command also does not include the memory which has been deactivated by the routing protocol process, although some or all of that deactivated memory has not actually been freed by the kernel.

Any amount of memory deactivated by the routing protocol process might still be considered part of the **RES** value. Generally, the kernel defers the actual freeing of deactivated memory until there is a memory shortage. This can lead to large discrepancies between the **Memory Currently In Use** value and the **RES** value.

### **Routing Protocol Process Memory Swapping FAQs**

This section presents frequently asked questions and answers related to the memory swapping of the routing protocol process from the Routing Engine memory to the hard disk memory.

#### **Why does the system start swapping when I try to perform a core dump using the request system core-dumps command?**

The **request system core-dumps** command displays a list of system core files created when the device has failed. This command can be useful for diagnostic purposes. Each list item includes the file permissions, number of links, owner, group, size, modification date, path, and filename. You can use the **core-filename** option and the **core-file-info**, **brief**, and **detail** options to display more information about the specified core dump files.

You can use the **request system core-dumps** command to perform a non-fatal core dump without aborting the routing protocol process. To do this, the routing protocol process is forked, generating a second copy, and then aborted. This process can double the memory consumed by the two copies of the routing protocol process, pushing the system into swap.

#### **Why does the show system processes extensive command show that memory is swapped to disk even though there is plenty of free memory?**

Memory can remain swapped out indefinitely if it is not accessed again. Therefore, the **show system processes extensive** command shows that memory is swapped to disk even though there is plenty of free memory. Such a situation is not unusual.

## Troubleshooting the Routing Protocol Process FAQs

This section presents frequently asked questions and answers related to a shortage of memory and memory leakage by the routing protocol process.

### What does the RPD\_OS\_MEMHIGH message mean?

The **RPD\_OS\_MEMHIGH** message is written into the system message file if the routing protocol process is running out of memory. This message alerts you that the routing protocol process is using the indicated amount and percentage of Routing Engine memory, which is considered excessive. This message is generated either because the routing protocol process is leaking memory or the use of system resources is excessive, perhaps because routing filters are not configured properly or the configured network topology is very complex.

When the memory utilization for the routing protocol process is using all available Routing Engine DRAM memory or reaches the maximum memory limit, a message of the following form is written every minute in the syslog message file:

**RPD\_OS\_MEMHIGH:** Using 188830 KB of memory, 100 percent of available

This message includes the amount (in kilobytes), the percentage, or both of the available memory in use.

This message should not appear under normal conditions, as any further memory allocations usually require a portion of existing memory to be written to swap. As a recommended solution, increase the amount of RAM in the Routing Engine. For more information, see <http://kb.juniper.net/InfoCenter/index?page=content&id=KB14186>.

### What can I do when there is a memory shortage even after a swap?

We do not recommend that the system operate in this state, notwithstanding the existence of swap. The protocols that run in the routing protocol process usually have a real-time requirement that cannot reliably withstand the latency of being swapped to hard disk. If the memory shortage has not resulted from a memory leak, then either a reduction in the memory usage or an upgrade to a higher memory-capacity Routing Engine is required.

### What is the task\_timer?

The source of a routing protocol process memory leak can usually be identified by dumping the timers for each task. You can use the **show task *task-name*** command to display routing protocol tasks on the Routing Engine. Tasks can be baseline tasks performed regardless of the device's configuration, and other tasks that depend on the device configuration.

For more information, see the show task command in the *Junos OS System Basics and Services Command Reference*.

#### Related Documentation

- [Routing Protocol Process Memory FAQ Overview on page 339](#)

## PART 5

# Index

- [Index on page 349](#)



# Index

## Symbols

|                                              |     |
|----------------------------------------------|-----|
| #, comments in configuration statements..... | xvi |
| ( ), in syntax descriptions.....             | xvi |
| < >, in syntax descriptions.....             | xvi |
| [ ], in configuration statements.....        | xvi |
| { }, in configuration statements.....        | xvi |
| (pipe), in syntax descriptions.....          | xvi |

## A

|                                            |          |
|--------------------------------------------|----------|
| access option                              |          |
| show route protocol command.....           | 310      |
| access statement.....                      | 143      |
| access-internal option                     |          |
| show route protocol command.....           | 310      |
| access-internal statement.....             | 144      |
| active aggregate routes.....               | 65       |
| active routes, versus passive routes.....  | 28       |
| active statement                           |          |
| aggregate routes.....                      | 145      |
| usage guidelines.....                      | 72       |
| generated routes.....                      | 145      |
| static routes.....                         | 145      |
| aggregate routes.....                      | 65, 146  |
| aggregate statement.....                   | 146      |
| usage guidelines.....                      | 65       |
| aggregator statement.....                  | 148      |
| alert (system logging severity level)..... | 202      |
| all (tracing flag).....                    | 238      |
| as-path statement.....                     | 148      |
| aggregate routes                           |          |
| usage guidelines.....                      | 70       |
| ASs                                        |          |
| configuring.....                           | 152      |
| paths                                      |          |
| aggregate routes.....                      | 70, 148  |
| generated routes.....                      | 148, 162 |
| static routes.....                         | 148      |
| authentication configuration               |          |
| BFD.....                                   | 104      |
| auto-export                                |          |
| routing instance.....                      | 150      |

|                                  |     |
|----------------------------------|-----|
| auto-export statement.....       | 150 |
| autonomous-system statement..... | 152 |

## B

|                                          |     |
|------------------------------------------|-----|
| best routes, displaying.....             | 263 |
| BFD                                      |     |
| authentication configuration.....        | 104 |
| protocol.....                            | 87  |
| sessions                                 |     |
| displaying.....                          | 244 |
| traceoptions statement                   |     |
| usage guidelines.....                    | 91  |
| bfd statement.....                       | 155 |
| bfd-liveness-detection statement         |     |
| static routes.....                       | 157 |
| usage guidelines.....                    | 87  |
| usage guidelines.....                    | 96  |
| BGP                                      |     |
| communities                              |     |
| aggregate routes.....                    | 69  |
| confederations.....                      | 164 |
| router identifier.....                   | 225 |
| braces, in configuration statements..... | xvi |
| brackets                                 |     |
| angle, in syntax descriptions.....       | xvi |
| square, in configuration statements..... | xvi |
| brief statement.....                     | 161 |
| aggregate routes                         |     |
| usage guidelines.....                    | 71  |

## C

|                                            |         |
|--------------------------------------------|---------|
| CLNS (Connectionless Network Service) VPNs |         |
| static routes (without IS-IS).....         | 61      |
| color statement                            |         |
| aggregate routes.....                      | 207     |
| usage guidelines.....                      | 68      |
| generated routes.....                      | 207     |
| static routes.....                         | 207     |
| comments, in configuration statements..... | xvi     |
| communities                                |         |
| aggregate routes.....                      | 69, 162 |
| static routes.....                         | 162     |
| community statement                        |         |
| aggregate routes.....                      | 162     |
| usage guidelines.....                      | 69      |
| generated routes.....                      | 162     |
| static routes.....                         | 162     |
| confederation statement.....               | 164     |
| confederations.....                        | 164     |

|                                                |      |                                           |                      |
|------------------------------------------------|------|-------------------------------------------|----------------------|
| config-internal (tracing flag).....            | 238  | export statement                          |                      |
| contributing routes                            |      | forwarding table.....                     | 168                  |
| aggregate routes.....                          | 65   | usage guidelines.....                     | 37                   |
| generated routes.....                          | 78   | export-rib statement.....                 | 169                  |
| conventions                                    |      | <b>F</b>                                  |                      |
| text and syntax.....                           | xv   | fate-sharing statement.....               | 170                  |
| critical (system logging severity level).....  | 202  | filter statement.....                     | 171                  |
| curly braces, in configuration statements..... | xvi  | flash (tracing flag).....                 | 238                  |
| customer support.....                          | xvii | flow routes.....                          | 172                  |
| contacting JTAC.....                           | xvii | flow statement.....                       | 172                  |
| <b>D</b>                                       |      | font conventions.....                     | xv                   |
| debug (system logging severity level).....     | 202  | forwarding table                          |                      |
| default route                                  |      | aggregate routes.....                     | 71, 72, 161          |
| conditionalizing.....                          | 80   | controlling static routes in.....         | 27, 28               |
| defaults statement                             |      | generated routes.....                     | 161                  |
| aggregate statement.....                       | 146  | policy, routing.....                      | 168                  |
| usage guidelines.....                          | 65   | static routes.....                        | 7, 72, 145, 182, 216 |
| generate statement.....                        | 174  | forwarding-table statement.....           | 173                  |
| usage guidelines.....                          | 78   | full statement.....                       | 161                  |
| static statement.....                          | 230  | aggregate routes                          |                      |
| usage guidelines.....                          | 7    | usage guidelines.....                     | 71                   |
| destination-networks statement.....            | 165  | <b>G</b>                                  |                      |
| detection-time statement                       |      | general (tracing flag).....               | 238                  |
| BFD.....                                       | 157  | generate statement.....                   | 174                  |
| disable statement                              |      | usage guidelines.....                     | 78, 80               |
| auto-export.....                               | 150  | generated routes.....                     | 174                  |
| BFD traceoption.....                           | 155  | <b>H</b>                                  |                      |
| traceoption.....                               | 238  | hidden routes, displaying.....            | 287                  |
| discard statement                              |      | holddown-interval statement               |                      |
| aggregate routes.....                          | 166  | BFD                                       |                      |
| generated routes.....                          | 166  | static routes.....                        | 157                  |
| discard statement, in static statement         |      | <b>I</b>                                  |                      |
| usage guidelines.....                          | 7    | import statement                          |                      |
| documentation                                  |      | route resolution.....                     | 176                  |
| comments on.....                               | xvii | import-policy statement.....              | 177                  |
| dynamic tunnels.....                           | 167  | import-rib statement.....                 | 178                  |
| source.....                                    | 227  | independent-domain statement.....         | 179                  |
| dynamic-tunnels statement.....                 | 167  | indirect next hop.....                    | 112, 180             |
| <b>E</b>                                       |      | indirect-next-hop statement.....          | 180                  |
| emergency (system logging severity level)..... | 202  | usage guidelines.....                     | 112                  |
| enable statement                               |      | inet.2 routing table.....                 | 34                   |
| routing options.....                           | 184  | inet6.0 routing table.....                | 34                   |
| error (system logging severity level).....     | 202  | info (system logging severity level)..... | 202                  |
| Ethernet interfaces, unnumbered                |      | input statement.....                      | 181                  |
| as next-hop interface for static routes.....   | 22   | install statement.....                    | 182                  |
| export route information, displaying.....      | 285  |                                           |                      |



- instance-export statement.....183
- instance-import statement.....183
- interface statement
  - multicast scoping.....185
  - multicast via static routes.....184
  - static routes
    - usage guidelines.....22
- interface-routes statement.....186
  - usage guidelines.....37
- invalid routes, displaying.....302
- IPv6
  - static routes.....12
- K**
- kernel (tracing flag).....238
- L**
- last resort, route of generated routes See generated routes
- local-address statement
  - BFD.....157
  - usage guidelines.....87
- logging
  - routing protocol process.....202
- logical systems
  - configuring static routes on.....16
- lsp-next-hop statement.....188
- lsp-next-hop, static routes.....188, 203
- LSPs
  - MPLS, fate-sharing.....170
- M**
- mac-limit statement.....200
- manuals
  - comments on.....xvii
- martian addresses.....132, 189
- martians statement.....189
- martians, displaying.....302
- maximum-paths statement.....191
- maximum-prefixes statement.....193
- med-igp-update-interval statement.....194
- metric statement.....195
  - aggregate routes.....196
    - usage guidelines.....68
  - CLNS
    - usage guidelines.....61
  - generated routes.....196
  - qualified next hop.....197
    - usage guidelines.....22
  - static routes.....196
- minimum-interval statement
  - BFD.....157
  - usage guidelines.....87
- minimum-receive-interval statement
  - BFD.....157
  - usage guidelines.....87
- minimum-receive-ttl statement
  - BFD.....157
  - BFD (static routes)
    - usage guidelines.....87
- MP-BGP.....34
- multicast statement.....198
- multiplier statement
  - BFD.....157
  - usage guidelines.....87
- N**
- next hop
  - qualified, for static routes.....21
- next hops
  - resolution database, displaying.....319
  - routes sent to, displaying.....304
- next-hop statement.....199
  - CLNS
    - usage guidelines.....61
- next-table statement
  - usage guidelines.....7
- no-adaptation statement
  - BFD.....157
  - BFD (static routes)
    - usage guidelines.....87
- no-delegate-processing statement
  - periodic packet management.....206
- no-indirect-next-hop statement
  - usage guidelines.....112
- no-install statement.....182
- no-readvertise statement.....211
  - usage guidelines.....28
- no-retain statement.....216
- nonstop-routing statement.....201
- normal (tracing flag).....238
- notice (system logging severity level).....202
- NSAPs (network service access points)
  - sample configurations.....61

**O**

options statement.....202

**OSPF**

default route policy.....80

router identifier.....225

**tags**

aggregate routes.....72, 236

generated routes.....236

static routes.....236

**P**

p2mp-lsp-next-hop statement.....203

**RSVP**

usage guidelines.....42

parentheses, in syntax descriptions.....xvi

parse (tracing flag).....238

passive routes, rejection, in static routing.....28

**passive statement**

aggregate routes.....145

usage guidelines.....72

generated routes.....145

static routes.....145

permanent routes, adding.....7, 16

**point-to-multipoint LSPs**

with RSVP signaling.....42

policy (tracing flag).....238

**policy statement**

aggregate routes.....204

usage guidelines.....72

generated routes.....204

**policy, routing**

aggregate routes.....72

forwarding table.....168

routing instance.....183

ppm statement.....206

**preference statement**

access route.....208

aggregate routes.....207

usage guidelines.....68

**CLNS static routes**

usage guidelines.....61

generated routes.....207

static routes.....207

usage guidelines.....22

**preferences**

aggregate routes.....68, 207

for static routes.....21

static routes.....22, 207

prefix statement.....208

**Q**

qualified-next-hop statement.....209

access.....210

access internal.....210

**CLNS**

usage guidelines.....61

usage guidelines.....22, 96

**R**

readvertise statement.....211

usage guidelines.....28

receive routes.....7

**receive statement****static routes**

usage guidelines.....7

regex-parse (tracing flag).....238

reject option to static statement.....230

usage guidelines.....7

resolution statement.....212

resolution-ribs statement.....213

resolve statement.....214

restart-duration statement.....215

retain statement.....216

**rib statement**

route resolution.....219

routing tables.....217

usage guidelines.....35, 37

rib-group statement.....220

usage guidelines.....37

rib-groups statement.....221

RIB-groups, static routes.....37

**route****aggregate statement**

usage guidelines.....65

**generate statement**

usage guidelines.....78, 80

static statement.....230

**route (tracing flag)**

routing.....238

route distinguisher.....224

**route limit, configuring**

paths.....191

prefix.....193

route of last resort See generated routes

route recording.....224

**route selection**

static routes, defining.....22, 96

- route statement.....223
    - access.....143
    - access-internal.....144
    - aggregate statement.....146
    - generate statement.....174
    - metric.....195
    - next-hop.....199
    - preference.....208
    - qualified-next-hop.....210
    - route
      - access.....223
      - access-internal.....223
      - static statement
        - usage guidelines.....7, 12
      - tag.....237
  - route, displaying
    - next-hop.....304
  - route-distinguisher-id statement.....224
  - route-record statement.....224
  - router identifier.....225
  - router-id statement.....225
  - routes
    - aggregate *See* aggregate routes
    - contributing.....65, 78
    - static *See* static routes
  - routes, displaying
    - active.....251
    - active path.....256
    - all.....261
    - best.....263
    - brief information.....266
    - detailed information.....268
    - hidden.....287
    - in a specific routing table.....324
    - inactive path.....290
    - instances.....293
    - learned from a specific protocol.....310
    - LSP.....300
    - martian.....302
    - matching the specified address.....283
    - next-hop resolution.....319
    - policy-based route export.....285
    - summary statistics.....322
    - terse.....333
  - routing
    - static *See* static routing
  - routing instance
    - for CLNS static routes (without IS-IS).....61
  - routing instances
    - router identifier.....224
  - routing protocol process memory
    - faq.....340
  - routing solutions
    - static route control techniques.....27
  - routing table
    - controlling static routes in.....27, 28
  - routing tables
    - creating.....35, 217
    - default.....34
    - default unicast.....34
    - export local routes.....37
    - flow routes.....34
    - group.....37, 169, 171, 178, 220, 221
    - import policy.....177
    - inet.2.....34
    - inet6.0.....34
    - instance-name.inet.0.....34
    - instance-name.inetflow.0.....34
    - policy, routing.....183
    - populating.....37
  - routing-options statement.....226
  - rpd
    - faq.....340
  - rpd memory
    - utilization.....340
  - RSVP
    - for point-to-multipoint LSPs.....42
- ## S
- scope statement.....226
  - show bfd session command.....244
  - show route active-path command.....256
  - show route all command.....261
  - show route best command.....263
  - show route brief command.....266
  - show route command.....251
  - show route detail command.....268
  - show route exact command.....283
  - show route export command.....285
  - show route hidden command.....287
  - show route inactive-path command.....290
  - show route instance command.....293
  - show route label-switched-path command.....300
  - show route martians command.....302
  - show route next-hop command.....304
  - show route protocol command.....310
  - show route resolution command.....319

|                                                 |            |                                              |          |
|-------------------------------------------------|------------|----------------------------------------------|----------|
| show route summary command.....                 | 322        | traceoptions statement                       |          |
| show route table command.....                   | 324        | BFD.....                                     | 155      |
| show route terse command.....                   | 333        | usage guidelines.....                        | 91       |
| source-address statement.....                   | 227        | routing protocols.....                       | 238      |
| source-routing statement.....                   | 228        | description.....                             | 138      |
| ssm-groups statement.....                       | 229        | tracing flags                                |          |
| state (tracing flag)                            |            | all.....                                     | 238      |
| routing protocols.....                          | 238        | config-internal.....                         | 238      |
| static route                                    |            | flash.....                                   | 238      |
| configuring a default.....                      | 80         | general.....                                 | 238      |
| static routes.....                              | 7, 12, 230 | kernel.....                                  | 238      |
| BFD.....                                        | 87, 157    | normal.....                                  | 238      |
| CLNS VPNs (without IS-IS).....                  | 61         | parse.....                                   | 238      |
| configuring basic routes (configuration         |            | policy.....                                  | 238      |
| editor).....                                    | 7          | regex-parse.....                             | 238      |
| configuring on logical systems.....             | 16         | route                                        |          |
| controlling.....                                | 27         | routing.....                                 | 238      |
| controlling in routing and forwarding           |            | state                                        |          |
| tables.....                                     | 28         | routing protocols.....                       | 238      |
| defining route selection.....                   | 22, 96     | task.....                                    | 238      |
| IPv6.....                                       | 12         | timer.....                                   | 238      |
| preferences.....                                | 21         | tracing operations                           |          |
| preventing readvertisement.....                 | 28         | routing protocols.....                       | 138, 238 |
| qualified next hops.....                        | 21         | traffic-engineering statement                |          |
| rejecting passive traffic.....                  | 28         | usage guidelines.....                        | 42       |
| route retention.....                            | 27         | transmit-interval statement                  |          |
| static routing                                  |            | BFD.....                                     | 157      |
| overview.....                                   | 7, 16      | tunnel-type statement.....                   | 240      |
| <i>See also</i> static routes                   |            |                                              |          |
| static statement.....                           | 230        | <b>U</b>                                     |          |
| usage guidelines.....                           | 7, 12      | unicast reverse path check.....              | 240      |
| support, technical <i>See</i> technical support |            | unicast RPF                                  |          |
| syntax conventions.....                         | xv         | example configuration.....                   | 122      |
| syslog statement                                |            | fail filters.....                            | 122      |
| routing options.....                            | 202        | unicast-reverse-path statement.....          | 240      |
| system log messages                             |            | usage guidelines.....                        | 122      |
| routing protocol process.....                   | 202        | unnumbered SONET/SDH interfaces              |          |
|                                                 |            | as next-hop interface for static routes..... | 22       |
| <b>T</b>                                        |            | <b>V</b>                                     |          |
| tag statement.....                              | 236, 237   | verification                                 |          |
| aggregate routes                                |            | aggregate route.....                         | 78, 120  |
| usage guidelines.....                           | 72         | CLNS static routes.....                      | 62       |
| task (tracing flag).....                        | 238        | martian routes.....                          | 134      |
| technical support                               |            | network interfaces.....                      | 59       |
| contacting JTAC.....                            | xvii       | OSPF policy.....                             | 84       |
| threshold statement.....                        | 237        | routing table groups.....                    | 40       |
| timer (tracing flag).....                       | 238        |                                              |          |
| topology                                        |            |                                              |          |
| point-to-multipoint LSPs.....                   | 41         |                                              |          |

|                                              |                                           |
|----------------------------------------------|-------------------------------------------|
| static                                       |                                           |
| route.....                                   | 10, 15, 20, 26, 33, 36, 95, 100, 108, 128 |
| tracing.....                                 | 141                                       |
| version statement                            |                                           |
| BFD.....                                     | 157                                       |
| usage guidelines.....                        | 87                                        |
| <br>W                                        |                                           |
| warning (system logging severity level)..... | 202                                       |

