

## Flow Collection



---

Published: 2013-02-15

Juniper Networks, Inc.  
1194 North Mathilda Avenue  
Sunnyvale, California 94089  
USA  
408-745-2000  
www.juniper.net

This product includes the Envoy SNMP Engine, developed by Epilogue Technology, an Integrated Systems Company. Copyright © 1986-1997, Epilogue Technology Corporation. All rights reserved. This program and its documentation were developed at private expense, and no part of them is in the public domain.

This product includes memory allocation software developed by Mark Moraes, copyright © 1988, 1989, 1993, University of Toronto.

This product includes FreeBSD software developed by the University of California, Berkeley, and its contributors. All of the documentation and software included in the 4.4BSD and 4.4BSD-Lite Releases is copyrighted by the Regents of the University of California. Copyright © 1979, 1980, 1983, 1986, 1988, 1989, 1991, 1992, 1993, 1994. The Regents of the University of California. All rights reserved.

GateD software copyright © 1995, the Regents of the University. All rights reserved. Gate Daemon was originated and developed through release 3.0 by Cornell University and its collaborators. Gated is based on Kirton's EGP, UC Berkeley's routing daemon (routed), and DCN's HELLO routing protocol. Development of Gated has been supported in part by the National Science Foundation. Portions of the GateD software copyright © 1988, Regents of the University of California. All rights reserved. Portions of the GateD software copyright © 1991, D. L. S. Associates.

This product includes software developed by Maker Communications, Inc., copyright © 1996, 1997, Maker Communications, Inc.

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Products made or sold by Juniper Networks or components thereof might be covered by one or more of the following patents that are owned by or licensed to Juniper Networks: U.S. Patent Nos. 5,473,599, 5,905,725, 5,909,440, 6,192,051, 6,333,650, 6,359,479, 6,406,312, 6,429,706, 6,459,579, 6,493,347, 6,538,518, 6,538,899, 6,552,918, 6,567,902, 6,578,186, and 6,590,785.

#### *Flow Collection*

Copyright © 2013, Juniper Networks, Inc.  
All rights reserved.

The information in this document is current as of the date on the title page.

#### YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

#### END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

# Table of Contents

	About the Documentation . . . . .	ix
	Documentation and Release Notes . . . . .	ix
	Supported Platforms . . . . .	ix
	Using the Examples in This Manual . . . . .	ix
	Merging a Full Example . . . . .	x
	Merging a Snippet . . . . .	x
	Documentation Conventions . . . . .	xi
	Documentation Feedback . . . . .	xiii
	Requesting Technical Support . . . . .	xiii
	Self-Help Online Tools and Resources . . . . .	xiii
	Opening a Case with JTAC . . . . .	xiv
<b>Part 1</b>	<b>Configuration</b>	
<b>Chapter 1</b>	<b>Configuration Tasks . . . . .</b>	<b>3</b>
	Configuring Flow Collection . . . . .	3
	Configuring Destination FTP Servers for Flow Records . . . . .	3
	Configuring a Packet Analyzer . . . . .	4
	Configuring File Formats . . . . .	4
	Configuring Interface Mappings . . . . .	5
	Configuring Transfer Logs . . . . .	5
	Configuring Retry Attempts . . . . .	6
	Sending cflowd Records to Flow Collector Interfaces . . . . .	6
	Configuring Flow Collection Mode and Interfaces on Services PICs . . . . .	6
<b>Chapter 2</b>	<b>Example . . . . .</b>	<b>9</b>
	Example: Configuring Flow Collection . . . . .	9
<b>Chapter 3</b>	<b>Configuration Statements . . . . .</b>	<b>17</b>
	analyzer-address . . . . .	17
	analyzer-id . . . . .	17
	archive-sites . . . . .	18
	collector . . . . .	18
	data-format . . . . .	19
	destinations . . . . .	19
	filename-prefix . . . . .	20
	file-specification (File Format) . . . . .	20
	file-specification (Interface Mapping) . . . . .	21
	flow-collector . . . . .	22
	ftp (Flow Collector Files) . . . . .	24
	ftp (Transfer Log Files) . . . . .	25
	interface-map . . . . .	25

	maximum-age .....	26
	name-format .....	27
	password (Flow Collector File Servers) .....	28
	password (Transfer Log File Servers) .....	28
	retry (Services Flow Collector) .....	29
	retry-delay .....	29
	transfer .....	30
	transfer-log-archive .....	30
	username (Services) .....	31
	variant .....	31
<b>Part 2</b>	<b>Administration</b>	
<b>Chapter 4</b>	<b>Flow Collection Operational Mode Commands .....</b>	<b>35</b>
	clear services flow-collector statistics .....	36
	request services flow-collector change-destination primary interface .....	37
	request services flow-collector change-destination secondary interface .....	38
	request services flow-collector test-file-transfer .....	39
	show services flow-collector file interface .....	40
	show services flow-collector input interface .....	42
	show services flow-collector interface .....	44
<b>Chapter 5</b>	<b>Flow Collector Interface Operational Mode Commands .....</b>	<b>51</b>
	show interfaces (Flow Collector) .....	52
<b>Part 3</b>	<b>Index</b>	
	Index .....	61

# List of Figures

Part 1	Configuration	
Chapter 2	Example .....	9
	Figure 1: Flow Collector Interface Topology Diagram .....	9



# List of Tables

	<b>About the Documentation . . . . .</b>	<b>ix</b>
	Table 1: Notice Icons . . . . .	xi
	Table 2: Text and Syntax Conventions . . . . .	xi
<b>Part 2</b>	<b>Administration</b>	
<b>Chapter 4</b>	<b>Flow Collection Operational Mode Commands . . . . .</b>	<b>35</b>
	Table 3: show services flow-collector file interface Output Fields . . . . .	40
	Table 4: show services flow-collector input interface Output Fields . . . . .	42
	Table 5: show services flow-collector interface Output Fields . . . . .	44
<b>Chapter 5</b>	<b>Flow Collector Interface Operational Mode Commands . . . . .</b>	<b>51</b>
	Table 6: Flow Collector Show interfaces Output Fields . . . . .	52





# About the Documentation

- Documentation and Release Notes on page ix
- Supported Platforms on page ix
- Using the Examples in This Manual on page ix
- Documentation Conventions on page xi
- Documentation Feedback on page xiii
- Requesting Technical Support on page xiii

## Documentation and Release Notes

---

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

## Supported Platforms

---

For the features described in this document, the following platforms are supported:

- M Series
- T Series

## Using the Examples in This Manual

---

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

## Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

## Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the CLI User Guide.

## Documentation Conventions

Table 1 on page xi defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.

Table 2 on page xi defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
<b>Bold text like this</b>	Represents text that you type.	To enter configuration mode, type the <b>configure</b> command:  user@host> <b>configure</b>
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> <b>show chassis alarms</b>  No alarms currently active

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
<i>Italic text like this</i>	<ul style="list-style-type: none"> <li>Introduces or emphasizes important new terms.</li> <li>Identifies book names.</li> <li>Identifies RFC and Internet draft titles.</li> </ul>	<ul style="list-style-type: none"> <li>A policy <i>term</i> is a named structure that defines match conditions and actions.</li> <li><i>Junos OS System Basics Configuration Guide</i></li> <li>RFC 1997, <i>BGP Communities Attribute</i></li> </ul>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name:  [edit] root@# <b>set system domain-name</b> <i>domain-name</i>
<b>Text like this</b>	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> <li>To configure a stub area, include the <b>stub</b> statement at the [edit protocols ospf area area-id] hierarchy level.</li> <li>The console port is labeled <b>CONSOLE</b>.</li> </ul>
< > (angle brackets)	Enclose optional keywords or variables.	<b>stub &lt;default-metric metric&gt;;</b>
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	<b>broadcast   multicast</b>  <i>(string1   string2   string3)</i>
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	<b>rsvp { # Required for dynamic MPLS only</b>
[ ] (square brackets)	Enclose a variable for which you can substitute one or more values.	<b>community name members [ community-ids ]</b>
Indentation and braces ( { } )	Identify a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
<b>J-Web GUI Conventions</b>		
<b>Bold text like this</b>	Represents J-Web graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> <li>In the Logical Interfaces box, select <b>All Interfaces</b>.</li> <li>To cancel the configuration, click <b>Cancel</b>.</li> </ul>
> (bold right angle bracket)	Separates levels in a hierarchy of J-Web selections.	In the configuration editor hierarchy, select <b>Protocols&gt;Ospf</b> .

## Documentation Feedback

---

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can send your comments to [techpubs-comments@juniper.net](mailto:techpubs-comments@juniper.net), or fill out the documentation feedback form at <https://www.juniper.net/cgi-bin/docbugreport/>. If you are using e-mail, be sure to include the following information with your comments:

- Document or topic name
- URL or page number
- Software release version (if applicable)

## Requesting Technical Support

---

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or JNASC support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

## Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <https://www.juniper.net/alerts/>

- Join and participate in the Juniper Networks Community Forum:  
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

## Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

## PART 1

# Configuration

- [Configuration Tasks on page 3](#)
- [Example on page 9](#)
- [Configuration Statements on page 17](#)





## CHAPTER 1

# Configuration Tasks

- [Configuring Flow Collection on page 3](#)
- [Sending cflowd Records to Flow Collector Interfaces on page 6](#)
- [Configuring Flow Collection Mode and Interfaces on Services PICs on page 6](#)

## Configuring Flow Collection

---

This section describes the following tasks for configuring flow collection:

- [Configuring Destination FTP Servers for Flow Records on page 3](#)
- [Configuring a Packet Analyzer on page 4](#)
- [Configuring File Formats on page 4](#)
- [Configuring Interface Mappings on page 5](#)
- [Configuring Transfer Logs on page 5](#)
- [Configuring Retry Attempts on page 6](#)

## Configuring Destination FTP Servers for Flow Records

Flow collection destinations are where the compressed ASCII data files are sent after the cflowd records are collected and processed. To specify the destination FTP server, include the **destinations** statement at the **[edit services flow-collector]** hierarchy level. You can specify up to two FTP server destinations and include the password for each configured server. If two FTP servers are configured, the first server in the configuration is the primary server and the second is a backup server.

To configure a destination for flow collection files, include the **destinations** statement at the **[edit services flow-collector]** hierarchy level:

```
[edit services flow-collector]
destinations {
  ftp:url {
    password "password";
  }
}
```

To specify the destination FTP server, include the **ftp:url** statement. The value **url** is the FTP server address for the primary flow collection destination and can include macros.

When you include macros in the **ftp:url** statement, a directory can be created only for a single level. For example, the path **ftp://10.2.2.2/%m/%Y** expands to **ftp://10.2.2.2/01/2005**, and the software attempts to create the directory **01/2005** on the destination FTP server. If the **01/** directory already exists on the destination FTP server, the software creates the **/2005/ directory** one level down. If the **01/** directory does not exist on the destination FTP server, the software cannot create the **/2005/ directory**, and the FTP server destination will fail. For more information about macros, see [ftp](#).

To specify the FTP server password, include the **password "password"** statement. The password must be enclosed in quotation marks. You can specify up to two destination FTP servers. The first destination specified is considered the primary destination.

## Configuring a Packet Analyzer

You can specify values for the IP address and identifier of a packet analyzer to which the flow collector interface sends traffic for analysis. The values you specify here override any default values configured elsewhere.

To configure an IP address and identifier for the packet analyzer, include the **analyzer-address** and **analyzer-id** statements at the **[edit services flow-collector]** hierarchy level:

```
[edit services flow-collector]
analyzer-address address;
analyzer-id name;
```

## Configuring File Formats

You configure data file formats, name formats, and transfer characteristics for the flow collection files. File records are sent to the destination FTP server when the timer expires or when a preset number of records are received, whichever comes first.

To configure the flow collection file format, include the **file-specification** statement at the **[edit services flow-collector]** hierarchy level:

```
[edit services flow-collector]
file-specification {
  variant variant-number {
    data-format format;
    name-format format;
    transfer {
      record-level number;
      timeout seconds;
    }
  }
}
```

To set the data file format, include the **data-format** statement. To set the file name format, include the **name-format** statement. To set the export timer and file size thresholds, include the **transfer** statement and specify values for the **timeout** and **record-level** options.

For example, you can specify the name format as follows:

```
[edit services flow-collector file-specification variant variant-number]
name-format "cFlowd-py69Ni69-0-%D_%T-%I_%N.bcp.bi.gz";
```

In this example, **cFlowd-py69Ni69-0** is the static portion used verbatim, **%D** is the date in YYYYMMDD format, **%T** is the time in HHMMSS format, **%I** is the value of **ifAlias**, **%N** is the generation number, and **bcp.bi.gz** is a user-configured string. A number of macros are supported for expressing the date and time information in different ways; for a complete list, see the summary section for [name-format](#).

## Configuring Interface Mappings

You can match an input interface with a flow collector interface and apply the preset file specifications to the input interface.

To configure an interface mapping, include the **interface-map** statement at the **[edit services flow-collector]** hierarchy level:

```
[edit services flow-collector]
interface-map {
  collector interface-name;
  file-specification variant-number;
  interface-name {
    collector interface-name;
    file-specification variant-number;
  }
}
```

To configure the default flow collector and file specifications for all input interfaces, include the **file-specification** and **collector** statements at the **[edit services flow-collector interface-map]** hierarchy level. To override the default settings and apply flow collector and file specifications to a specific input interface, include the **file-specification** and **collector** statements at the **[edit services flow-collector interface-map *interface-name*]** hierarchy level.

## Configuring Transfer Logs

You can configure the filename, export interval, maximum size, and destination FTP server for log files containing the transfer activity history for a flow collector interface.

To configure a transfer log, include the **transfer-log-archive** statement at the **[edit services flow-collector]** hierarchy level:

```
[edit services flow-collector]
transfer-log-archive {
  archive-sites {
    ftp:url {
      password "password";
      username username;
    }
  }
  filename-prefix prefix;
  maximum-age minutes;
}
```

To configure the destination for archiving files, include the **archive-sites** statement. Specify the filename as follows:

```
[edit services flow-collector transfer-log]
filename "cFlowd-py69Ni69-0-%D_%T";
```

where **cFlowd-py69Ni69-0** is the static portion used verbatim, **%D** is the date in YYYYMMDD format, and **%T** is the time in HHMMSS format.

You can optionally include the following statements:

- **filename-prefix**—Sets a standard prefix for all the logged files.
- **maximum-age**—Specifies the duration a file remains on the server. The range is 1 through 360 minutes.

## Configuring Retry Attempts

You can specify values for situations in which the flow collector interface needs more than one attempt to transfer log files to the FTP server:

- Maximum number of retry attempts
- Amount of time the flow collector interface waits between successive retries

To configure retry settings, include the **retry** and **retry-delay** statements at the **[edit services flow-collector]** hierarchy level:

```
retry number;
retry-delay seconds;
```

The **retry** value can be from 0 through 10. The **retry-delay** value can be from 0 through 60 seconds.

## Sending cflowd Records to Flow Collector Interfaces

---

To specify a flow collector interface as the destination for cflowd records coming from a services PIC, include the **collector-pic** statement at the **[edit forwarding-options monitoring group-name family inet output flow-export-destination]** hierarchy level:

```
[edit forwarding-options monitoring group-name family inet output flow-export-destination]
collector-pic;
```

You can select either the flow collector interface or a cflowd server as the destination for cflowd records, but not both at the same time.

## Configuring Flow Collection Mode and Interfaces on Services PICs

---

You can select the services PIC to run in either flow collection mode or monitoring mode, but not both.

To set the services PIC to run in flow collection mode, include the **flow-collector** statement at the **[edit chassis fpc slot-number pic pic-number monitoring-services application]** hierarchy level:

```
[edit chassis fpc slot-number pic pic-number monitoring-services application]  
flow-collector;
```

For further information on configuring chassis properties, see the Junos OS System Basics Configuration Guide.

To specify flow collection interfaces, you configure the **cp** interface at the **[edit interfaces]** hierarchy level:

```
[edit interfaces]  
cp-fpc/pic/port {  
  ...  
}
```



## CHAPTER 2


# Example

- [Example: Configuring Flow Collection on page 9](#)

### Example: Configuring Flow Collection

Figure 1 on page 9 shows the path traveled by monitored traffic as it passes through the router. Packets arrive at input interfaces **so-0/1/0**, **so-3/0/0**, and **so-3/1/0**. The raw packets are directed into a filter-based forwarding routing instance and processed into cflowd records by the monitoring services interfaces **mo-7/1/0**, **mo-7/2/0**, and **mo-7/3/0**. The cflowd records are compressed into files at the flow collector interfaces **cp-6/0/0** and **cp-7/0/0** and sent to the FTP server for analysis. Finally, a mandatory class-of-service (CoS) configuration is applied to export channels 0 and 1 on the flow collector interfaces to manage the outgoing processed files.

Figure 1: Flow Collector Interface Topology Diagram

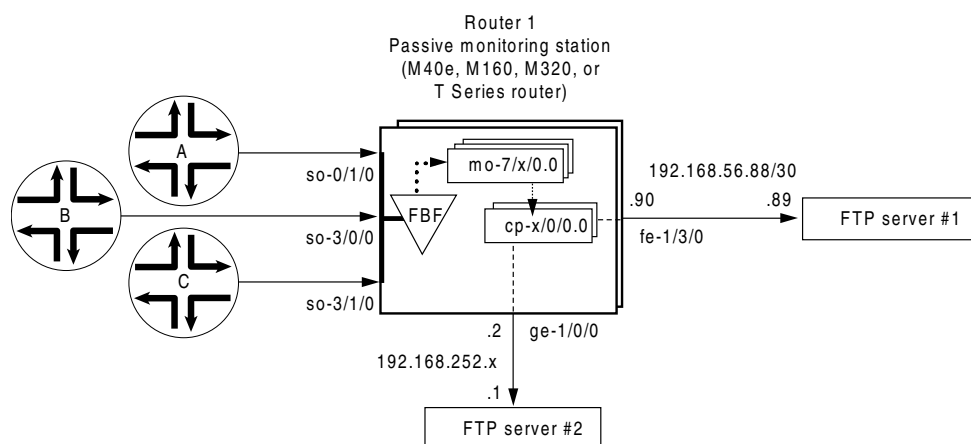

- ..... Monitored traffic is converted into cflowd records by the Monitoring Services interfaces
- ..... cflowd records are delivered to the flow collector interfaces
- Processed files are sent from the flow collector interfaces to the FTP servers

9003250

```
[edit]
chassis {
  fpc 6 {
    pic 0 {
      monitoring-services {
        application flow-collector; # This converts a Monitoring Services II or
```

```

                                # Multiservices 400 PIC into a flow collector interface.
                                }
                                }
                                }
                                fpc 7 {
                                pic 0 {
                                monitoring-services {
                                application flow-collector; # This converts a Monitoring Services II or
                                # Multiservices 400 PIC into a flow collector interface.
                                }
                                }
                                }
                                }
                                }
                                interfaces {
                                cp-6/0/0 {
                                unit 0 { # Logical interface .0 on a flow collector interface is export
                                family inet { # channel 0 and sends records to the FTP server.
                                filter {
                                output cp-ftp; # Apply the CoS filter here.
                                }
                                address 10.0.0.1/32 {
                                destination 10.0.0.2;
                                }
                                }
                                }
                                unit 1 { # Logical interface .1 on a flow collector interface is export
                                family inet { # channel 1 and sends records to the FTP server.
                                filter {
                                output cp-ftp; # Apply the CoS filter here.
                                }
                                address 10.1.1.1/32 {
                                destination 10.1.1.2;
                                }
                                }
                                }
                                unit 2 { # Logical interface .2 on a flow collector interface is the flow
                                family inet { # receive channel that communicates with the Routing Engine.
                                address 10.2.2.1/32 { # Do not apply a CoS filter on logical interface .2.
                                destination 10.2.2.2;
                                }
                                }
                                }
                                }
                                }
                                cp-7/0/0 {
                                unit 0 { # Logical interface .0 on a flow collector interface is export
                                family inet { # channel 0 and sends records to the FTP server.
                                filter {
                                output cp-ftp; # Apply the CoS filter here.
                                }
                                address 10.3.3.1/32 {
                                destination 10.3.3.2;
                                }
                                }
                                }
                                unit 1 { # Logical interface .1 on a flow collector interface is export
                                family inet { # channel 1 and sends records to the FTP server.

```



```

        filter {
            output cp-ftp;# Apply the CoS filter here.
        }
        address 10.4.4.1/32 {
            destination 10.4.4.2;
        }
    }
}
unit 2 {# Logical interface .2 on a flow collector interface is the flow
    family inet {# receive channel that communicates with the Routing Engine.
        address 10.5.5.1/32 {# Do not apply a CoS filter on logical interface .2.
            destination 10.5.5.2;
        }
    }
}
}
fe-1/3/0 { # This is the exit interface leading to the first FTP server.
    unit 0 {
        family inet {
            address 192.168.56.90/30;
        }
    }
}
ge-1/0/0 { # This is the exit interface leading to the second FTP server.
    unit 0 {
        family inet {
            address 192.168.252.2/24;
        }
    }
}
mo-7/1/0 { # This is the first interface that creates cflowd records.
    unit 0 {
        family inet;
    }
}
mo-7/2/0 { # This is the second interface that creates cflowd records.
    unit 0 {
        family inet;
    }
}
mo-7/3/0 { # This is the third interface that creates cflowd records.
    unit 0 {
        family inet;
    }
}
so-0/1/0 { # This is the first input interface that receives traffic to be monitored.
    encapsulation ppp;
    unit 0 {
        passive-monitor-mode; # This allows the interface to be passively monitored.
        family inet {
            filter {
                input catch; # The filter-based forwarding filter is applied here.
            }
        }
    }
}
}

```

```
so-3/0/0 { # This is the second interface that receives traffic to be monitored.
  encapsulation ppp;
  unit 0 {
    passive-monitor-mode; # This allows the interface to be passively monitored.
    family inet {
      filter {
        input catch; # The filter-based forwarding filter is applied here.
      }
    }
  }
}

so-3/1/0 { # This is the third interface that receives traffic to be monitored.
  encapsulation ppp;
  unit 0 {
    passive-monitor-mode; # This allows the interface to be passively monitored.
    family inet {
      filter {
        input catch; # The filter-based forwarding filter is applied here.
      }
    }
  }
}

forwarding-options {
  monitoring group1 { # Always define your monitoring group here.
    family inet {
      output {
        export-format cflowd-version-5;
        flow-active-timeout 60;
        flow-inactive-timeout 15;
        flow-export-destination collector-pic; # Sends records to the flow collector.
        interface mo-7/1/0.0 {
          source-address 192.168.252.2;
        }
        interface mo-7/2/0.0 {
          source-address 192.168.252.2;
        }
        interface mo-7/3/0.0 {
          source-address 192.168.252.2;
        }
      }
    }
  }
}

firewall {
  family inet {
    filter cp-ftp { # This filter provides CoS for flow collector interface traffic.
      term t1 {
        then forwarding-class expedited-forwarding;
      }
    }
  }
}

filter catch { # This firewall filter sends incoming traffic into the
  interface-specific; # filter-based forwarding routing instance.
  term def {
    then {
      count counter;
      routing-instance fbf_instance;
    }
  }
}
```

```

    }
  }
}
routing-options {
  interface-routes {
    rib-group inet common;
  }
  rib-groups {
    common {
      import-rib [inet.0 fbf_instance.inet.0];
    }
  }
  forwarding-table {
    export pplb;
  }
}
policy-options {
  policy-statement pplb {
    then {
      load-balance per-packet;
    }
  }
}
routing-instances {
  fbf_instance { # This instance sends traffic to the monitoring services interface.
    instance-type forwarding;
    routing-options {
      static {
        route 0.0.0.0/0 next-hop mo-7/1/0.0;
      }
    }
  }
}
class-of-service { # A class-of-service configuration for the flow collector interface
  interfaces { # is required for flow collector services.
    cp-6/0/0 {
      scheduler-map cp-map;
    }
    cp-7/0/0 {
      scheduler-map cp-map;
    }
  }
}
scheduler-maps {
  cp-map {
    forwarding-class best-effort scheduler Q0;
    forwarding-class expedited-forwarding scheduler Q1;
    forwarding-class network-control scheduler Q3;
  }
}
schedulers {
  Q0 {
    transmit-rate remainder;
    buffer-size percent 90;
  }
}

```

```

Q1 {
    transmit-rate percent 5;
    buffer-size percent 5;
    priority strict-high;
}
Q3 {
    transmit-rate percent 5;
    buffer-size percent 5;
}
}
services {
    flow-collector { # Define properties for flow collector interfaces here.
        analyzer-address 10.10.10.1; # This is the IP address of the analyzer.
        analyzer-id server1; # This helps to identify the analyzer.
        retry 3; # Maximum number of attempts by the PIC to send a file transfer log.
        retry-delay 30; # The time interval between attempts to send a file transfer log.
        destinations { # This defines the FTP servers that receive flow collector output.
            "ftp://user@192.168.56.89//tmp/collect1/" { # The primary FTP server.
                password "$9$IXJK8xN-w2oZdbZDHmF30O1"; # SECRET-DATA
            }
            "ftp://user@192.168.252.1//tmp/collect2/" { # The secondary FTP server.
                password "$9$elbvL7-dsgaGVwGjkP3nOBI"; # SECRET-DATA
            }
        }
    }
    file-specification { # Define sets of flow collector characteristics here.
        def-spec {
            name-format "default-allInt-0-%D_%T-%l_%N.bcp.bi.gz";
            data-format flow-compressed; # The default compressed output format.
        } # When no overrides are specified, a collector uses default transfer values.
        f1 {
            name-format "cFlowd-py69Ni69-0-%D_%T-%l_%N.bcp.bi.gz";
            data-format flow-compressed; # The default compressed output format.
            transfer timeout 1800 record-level 1000000; # Here are configured values.
        }
    }
    interface-map { # Allows you to map interfaces to flow collector interfaces.
        file-specification def-spec; # Flows generated for default traffic are sent to the
        collector cp-7/0/0; # default flow collector interface "cp-7/0/0".
        so-0/1/0.0 { # Flows generated for the so-0/1/0 interface are sent
            collector cp-6/0/0; # to cp-6/0/0, and the file-specification used is
        } # "default."
        so-3/0/0.0 { # Flows generated for the so-3/0/0 interface are sent
            file-specification f1; # to cp-6/0/0, and the file-specification used is "f1."
            collector cp-6/0/0;
        }
        so-3/1/0.0; # Because no settings are defined, flows generated for this
    } # interface use interface cp-7/0/0 and the default file specification.
    transfer-log-archive { # Sends flow collector interface log files to an FTP server.
        filename-prefix so_3_0_0_log;
        maximum-age 15;
        archive-sites {
            "ftp://user@192.168.56.89//tmp/transfers/" {
                password "$9$IFaEyevMXNVsWLsgaU.m6/C";
            }
        }
    }
}
]

```

```
}  
}
```



## CHAPTER 3

# Configuration Statements

### analyzer-address

---

<b>Syntax</b>	<code>analyzer-address <i>address</i>;</code>
<b>Hierarchy Level</b>	[edit services flow-collector]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure an IP address for the packet analyzer that overrides the default value.
<b>Options</b>	<i>address</i> —IP address for packet analyzer.
<b>Usage Guidelines</b>	See <a href="#">“Configuring a Packet Analyzer” on page 4.</a>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

### analyzer-id

---

<b>Syntax</b>	<code>analyzer-id <i>name</i>;</code>
<b>Hierarchy Level</b>	[edit services flow-collector]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure an identifier for the packet analyzer that overrides the default value.
<b>Options</b>	<i>name</i> —Identifier for packet analyzer.
<b>Usage Guidelines</b>	See <a href="#">“Configuring a Packet Analyzer” on page 4.</a>
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## archive-sites

---

<b>Syntax</b>	<pre>archive-sites {     ftp:url {         password "password";         username username;     } }</pre>
<b>Hierarchy Level</b>	[edit services flow-collector <a href="#">transfer-log-archive</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the destination for transfer logs.
<b>Options</b>	The statements are explained separately.
<b>Usage Guidelines</b>	See <a href="#">“Configuring Transfer Logs” on page 5</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration.

## collector

---

<b>Syntax</b>	<pre>collector interface-name;</pre>
<b>Hierarchy Level</b>	[edit services flow-collector interface-map]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the default flow collector interface for interface mapping.
<b>Options</b>	<b>collector interface-name</b> —Default flow collector interface.
<b>Usage Guidelines</b>	See <a href="#">“Configuring Interface Mappings” on page 5</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## data-format

---

<b>Syntax</b>	<code>data-format <i>format</i>;</code>
<b>Hierarchy Level</b>	[edit services flow-collector file-specification variant <i>variant-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the data format for a specific file format variant.
<b>Options</b>	<i>format</i> —Data format. Specify <b>flow-compressed</b> as the data format.
<b>Usage Guidelines</b>	See <a href="#">“Configuring File Formats” on page 4</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## destinations

---

<b>Syntax</b>	<pre>destinations {   ftp:url {     password "<i>password</i>";   } }</pre>
<b>Hierarchy Level</b>	[edit services flow-collector]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the primary and secondary destination FTP servers.
<b>Options</b>	The statements are explained separately.
<b>Usage Guidelines</b>	See <a href="#">“Configuring Destination FTP Servers for Flow Records” on page 3</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## filename-prefix

---

<b>Syntax</b>	<code>filename-prefix <i>prefix</i>;</code>
<b>Hierarchy Level</b>	[edit services flow-collector transfer-log-archive]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the filename prefix for log files.
<b>Options</b>	<i>prefix</i> —Filename identifier.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring Transfer Logs</a> ” on page 5.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## file-specification (File Format)

---

<b>Syntax</b>	<pre>file-specification {   variant <i>variant-number</i> {     data-format <i>format</i>;     name-format <i>format</i>;     transfer {       record-level <i>number</i>;       timeout <i>seconds</i>;     }   } }</pre>
<b>Hierarchy Level</b>	[edit services flow-collector]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the file format for the flow collection files.
<b>Options</b>	The statements are explained separately.
<b>Usage Guidelines</b>	See “ <a href="#">Configuring File Formats</a> ” on page 4.
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## file-specification (Interface Mapping)

---

<b>Syntax</b>	file-specification { variant <i>variant-number</i> ; }
<b>Hierarchy Level</b>	[edit services flow-collector interface-map]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the default file specification for interface mapping.
<b>Options</b>	<b>variant</b> <i>variant-number</i> —Default file format variant.
<b>Usage Guidelines</b>	See <a href="#">“Configuring Interface Mappings” on page 5</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## flow-collector

---

```
Syntax  flow-collector {
        analyzer-address address;
        analyzer-id name;
        destinations {
            ftp:url {
                password "password";
            }
        }
        file-specification {
            variant variant-number {
                data-format format;
                name-format format;
                transfer {
                    record-level number;
                    timeout seconds;
                }
            }
        }
        interface-map {
            collector interface-name;
            file-specification variant-number;
            interface-name {
                collector interface-name;
                file-specification variant-number;
            }
        }
        retry number;
        retry-delay seconds;
        transfer-log-archive {
            archive-sites {
                ftp:url {
                    password "password";
                    username username;
                }
            }
            filename-prefix prefix;
            maximum-age minutes;
        }
    }
```

**Hierarchy Level** [edit services]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Define the flow collection.

**Options** The statements are explained separately.

**Usage Guidelines** See the topics in Flow Collection.

<b>Required Privilege</b>	interface—To view this statement in the configuration.
<b>Level</b>	interface-control—To add this statement to the configuration.

## ftp (Flow Collector Files)

---

<b>Syntax</b>	<code>ftp:url;</code>
<b>Hierarchy Level</b>	[edit services flow-collector destination]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the primary and secondary destination FTP server addresses.
<b>Options</b>	<p><b>url</b>—FTP server address. The URL can include the following macros, typed in braces:</p> <ul style="list-style-type: none"><li>• <b>{%D}</b>—Date</li><li>• <b>{%T}</b>—Time when the file is created</li><li>• <b>{%I}</b>—Description string for the logical interface configured using the <b>collector interface-name</b> statement at the [edit services flow-collector interface-map] hierarchy</li><li>• <b>{%N}</b>—Unique, sequential number for each new file created</li><li>• <b>{am_pm}</b>—AM or PM</li><li>• <b>{date}</b>—Current date using the <b>{year}</b> <b>{month}</b> <b>{day}</b> macros</li><li>• <b>{day}</b>—From 01 through 31</li><li>• <b>{day_abbrev}</b>—Sun through Sat</li><li>• <b>{day_full}</b>—Sunday through Saturday</li><li>• <b>{generation number}</b>—Unique, sequential number for each new file created</li><li>• <b>{hour_12}</b>—From 01 through 12</li><li>• <b>{hour_24}</b>—From 00 through 23</li><li>• <b>{ifalias}</b>—Description string for the logical interface configured using the <b>collector</b> statement at the [edit services flow-collector interface-map] hierarchy</li><li>• <b>{minute}</b>—From 00 through 59</li><li>• <b>{month}</b>—From 01 through 12</li><li>• <b>{month_abbrev}</b>—Jan through Dec</li><li>• <b>{month_full}</b>—January through December</li><li>• <b>{num_zone}</b>—From -2359 to +2359; this macro is not supported</li><li>• <b>{second}</b>—From 00 through 60</li><li>• <b>{time}</b>—Time the file is created, using the <b>{hour_24}</b> <b>{minute}</b> <b>{second}</b> macros</li><li>• <b>{time_zone}</b>—Time zone code name of the locale; for example, <b>gmt</b> (this macro is not supported).</li><li>• <b>{year}</b>—In the format YYYY; for example, 1970</li></ul>

- {year\_abbrev}—From 00 through 99

**Usage Guidelines** See “[Configuring Destination FTP Servers for Flow Records](#)” on page 3.

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

## ftp (Transfer Log Files)

**Syntax** `ftp:url;`

**Hierarchy Level** [edit services flow-collector [transfer-log-archive archive-sites](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Specify the primary and secondary destination FTP server addresses.

**Options** *url*—FTP server address.

**Usage Guidelines** See “[Configuring Transfer Logs](#)” on page 5.

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

## interface-map

**Syntax**

```
interface-map {
  collector interface-name;
  file-specification variant-number;
  interface-name {
    collector interface-name;
    file-specification variant-number;
  }
}
```

**Hierarchy Level** [edit services flow-collector]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Match an input interface with a flow collector interface and apply the preset file specifications to the input interface.

**Options** The statements are explained separately.

**Usage Guidelines** See “[Configuring Interface Mappings](#)” on page 5.

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

## maximum-age

---

<b>Syntax</b>	maximum-age <i>minutes</i> ;
<b>Hierarchy Level</b>	[edit services flow-collector <a href="#">transfer-log-archive</a> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Maximum age of transfer log file.
<b>Options</b>	<b>maximum-age <i>minutes</i></b> —Transfer log file age. <b>Range:</b> 1 through 360
<b>Usage Guidelines</b>	See <a href="#">“Configuring Transfer Logs” on page 5</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## name-format

<b>Syntax</b>	<code>name-format "format";</code>
<b>Hierarchy Level</b>	[edit services flow-collector file-specification variant <i>variant-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the name format for a specific file format. The files may include supported macros. Use macros to organize files on the external machine to which they are exported from the collector PIC.
<b>Options</b>	<p><b>format</b>—Specify the filename format, within quotation marks. The name format can include the following macros, typed in braces:</p> <ul style="list-style-type: none"> <li>• <b>{%D}</b>—Date</li> <li>• <b>{%T}</b>—Time when the file is created</li> <li>• <b>{%I}</b>—Description string for the logical interface configured using the <b>collector</b> statement at the [edit services flow-collector interface-map] hierarchy level</li> <li>• <b>{%N}</b>—Unique, sequential number for each new file created</li> <li>• <b>{am_pm}</b>—AM or PM</li> <li>• <b>{date}</b>—Current date using the {year} {month} {day} macros</li> <li>• <b>{day}</b>—From 01 through 31</li> <li>• <b>{day_abbrev}</b>—Sun through Sat</li> <li>• <b>{day_full}</b>—Sunday through Saturday</li> <li>• <b>{generation number}</b>—Unique, sequential number for each new file created</li> <li>• <b>{hour_12}</b>—From 01 through 12</li> <li>• <b>{hour_24}</b>—From 00 through 23</li> <li>• <b>{ifalias}</b>—Description string for the logical interface configured using the <b>collector</b> statement at the [edit services flow-collector interface-map] hierarchy level</li> <li>• <b>{minute}</b>—From 00 through 59</li> <li>• <b>{month}</b>—From 01 through 12</li> <li>• <b>{month_abbrev}</b>—Jan through Dec</li> <li>• <b>{month_full}</b>—January through December</li> <li>• <b>{num_zone}</b>—From -2359 through +2359; this macro is not supported</li> <li>• <b>{second}</b>—From 00 through 60</li> <li>• <b>{time}</b>—Time the file is created, using the {hour_24} {minute} {second} macros</li> <li>• <b>{time_zone}</b>—Time zone code name of the locale; for example, <b>gmt</b> (this macro is not supported).</li> </ul>

- **{year}**—In the format YYYY; for example, 1970
- **{year\_abbr}**—From 00 through 99

**Usage Guidelines** See [“Configuring File Formats” on page 4.](#)

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

---

## password (Flow Collector File Servers)

---

**Syntax** password "*password*";

**Hierarchy Level** [edit services flow-collector destination ftp:url]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Specify the primary and secondary destination FTP server password.

**Options** *password*—FTP server password.

**Usage Guidelines** See [“Configuring Destination FTP Servers for Flow Records” on page 3.](#)

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

---

## password (Transfer Log File Servers)

---

**Syntax** password "*password*";

**Hierarchy Level** [edit services flow-collector transfer-log-archive archive-sites]

**Release Information** Statement introduced before Junos OS Release 7.4.

**Description** Specify the primary and secondary destination FTP server password.

**Options** *password*—FTP server password.

**Usage Guidelines** See [“Configuring Transfer Logs” on page 5.](#)

**Required Privilege** interface—To view this statement in the configuration.  
**Level** interface-control—To add this statement to the configuration.

## retry (Services Flow Collector)

---

<b>Syntax</b>	<code>retry <i>number</i>;</code>
<b>Hierarchy Level</b>	[edit services flow-collector]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the maximum number of attempts the flow collector interface will make to transfer log files to the FTP server.
<b>Options</b>	<i>number</i> —Maximum number of transfer retry attempts. <b>Range:</b> 0 through 10
<b>Usage Guidelines</b>	See <a href="#">“Configuring Retry Attempts” on page 6</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## retry-delay

---

<b>Syntax</b>	<code>retry-delay <i>seconds</i>;</code>
<b>Hierarchy Level</b>	[edit services flow-collector]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the amount of time the flow collector interface waits between retry attempts.
<b>Options</b>	<i>seconds</i> —Amount of time between transfer retry attempts. <b>Range:</b> 0 through 60
<b>Usage Guidelines</b>	See <a href="#">“Configuring Retry Attempts” on page 6</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## transfer

---

<b>Syntax</b>	<pre>transfer {     record-level <i>number</i>;     timeout <i>seconds</i>; }</pre>
<b>Hierarchy Level</b>	[edit services flow-collector file-specification variant <i>variant-number</i> ]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify when to send the flow collection file. The file is sent when either of the two conditions is met.
<b>Options</b>	<b>record-level <i>number</i></b> —Number of flow collection files collected.  <b>timeout <i>seconds</i></b> —Timeout duration.
<b>Usage Guidelines</b>	See <a href="#">“Configuring File Formats” on page 4</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## transfer-log-archive

---

<b>Syntax</b>	<pre>transfer-log-archive {     archive-sites {         ftp:<i>url</i> {             password "<i>password</i>";             username <i>username</i>;         }     }     filename-prefix <i>prefix</i>;     maximum-age <i>minutes</i>; }</pre>
<b>Hierarchy Level</b>	[edit services flow-collector]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure the filename prefix, maximum age, and destination FTP server for log files containing the transfer activity history for a flow collector interface.
<b>Options</b>	The statements are explained separately.
<b>Usage Guidelines</b>	See <a href="#">“Configuring Transfer Logs” on page 5</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## username (Services)

---

<b>Syntax</b>	<code>username <i>user-name</i>;</code>
<b>Hierarchy Level</b>	[edit services flow-collector transfer-log-archive archive-sites]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Specify the username for the transfer log server.
<b>Options</b>	<i>username</i> —FTP server username.
<b>Usage Guidelines</b>	See <a href="#">“Configuring Transfer Logs” on page 5</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

## variant

---

<b>Syntax</b>	<pre> variant <i>variant-number</i> {   data-format <i>format</i>;   name-format <i>format</i>;   transfer {     record-level <i>number</i>;     timeout <i>seconds</i>;   } } </pre>
<b>Hierarchy Level</b>	[edit services flow-collector file-specification]
<b>Release Information</b>	Statement introduced before Junos OS Release 7.4.
<b>Description</b>	Configure a variant of the file format.
<b>Options</b>	The statements are explained separately.
<b>Usage Guidelines</b>	See <a href="#">“Configuring File Formats” on page 4</a> .
<b>Required Privilege Level</b>	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.



## PART 2

# Administration

- [Flow Collection Operational Mode Commands on page 35](#)
- [Flow Collector Interface Operational Mode Commands on page 51](#)





## CHAPTER 4

# Flow Collection Operational Mode Commands

## clear services flow-collector statistics

---

<b>Syntax</b>	clear services flow-collector statistics (all   interface <i>interface-name</i> )
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M40e, M160, and M320 routers and T Series routers only) Clear statistics for one flow collector interface or for all flow collector interfaces.
<b>Options</b>	<b>all</b> —Clear statistics for all configured flow collector interfaces.  <b>interface <i>interface-name</i></b> —Clear statistics for the specified flow collector interface ( <i>cp-fpc/pic/port</i> ).
<b>Required Privilege Level</b>	network
<b>List of Sample Output</b>	<a href="#">clear services flow-collector statistics on page 36</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<code>clear services flow-collector statistics</code>	<pre>user@host&gt; clear services flow-collector statistics interface cp-5/0/0 Flow collector interface: cp-5/0/0 Interface state: Collecting flows Statistics cleared successfully</pre>
---	---

## request services flow-collector change-destination primary interface

<b>Syntax</b>	request services flow-collector change-destination primary interface <i>cp-fpc/pic/port</i> <clear-files> <clear-logs> <immediately   gracefully>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M40e, M160, and M320 routers and T Series routers only) Switch to the primary File Transfer Protocol (FTP) server that is configured as a flow collector.
<b>Options</b>	<p><b>none</b>—Switch to the primary FTP server.</p> <p><b>cp-fpc/pic/port</b>—Specify the flow collector interface name for the primary destination.</p> <p><b>clear-files</b>—(Optional) Request clearing of existing data files in the FTP wait queue when the switch takes place.</p> <p><b>clear-logs</b>—(Optional) Request clearing of existing logs when the switch takes place.</p> <p><b>immediately   gracefully</b>—(Optional) Specify whether you want the switch to take place immediately, or to affect only newly created files.</p>
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">request services flow-collector change-destination primary interface on page 37</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<b>request services flow-collector change-destination primary interface</b>	<pre>user@host&gt; request services flow-collector change-destination primary interface cp-6/0/0 Flow collector interface: cp-6/0/0 Interface state: Collecting flows Destination change successful</pre>
---	---

## request services flow-collector change-destination secondary interface

---

<b>Syntax</b>	<code>request services flow-collector change-destination secondary interface <i>cp-fpc/pic/port</i></code> <code>&lt;clear-files&gt;</code> <code>&lt;clear-logs&gt;</code> <code>&lt;immediately   gracefully&gt;</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M40e, M160, and M320 routers and T Series routers only) Switch to the secondary File Transfer Protocol (FTP) server that is configured as a flow collector.
<b>Options</b>	<p><b>none</b>—Switch to the secondary FTP server.</p> <p><b><i>cp-fpc/pic/port</i></b>—Specify the flow collector interface name (<b><i>cp-fpc/pic/port</i></b>) for the secondary destination.</p> <p><b>clear-files</b>—(Optional) Request clearing of existing data files in the FTP wait queue when the switch takes place.</p> <p><b>clear-logs</b>—(Optional) Request clearing of existing logs when the switch takes place.</p> <p><b>immediately   gracefully</b>—(Optional) Specify whether you want the switch to take place immediately, or to affect only newly created files.</p>
<b>Required Privilege Level</b>	maintenance
<b>List of Sample Output</b>	<a href="#">request services flow-collector change-destination secondary interface on page 38</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

<code>request services flow-collector change-destination secondary interface</code>	<pre>user@host&gt; request services flow-collector change-destination secondary interface cp-6/0/0 Flow collector interface: cp-6/0/0 Interface state: Collecting flows Destination change successful</pre>
---	---

## request services flow-collector test-file-transfer

<b>Syntax</b>	<code>request services flow-collector test-file-transfer <i>filename</i> interface (all   <i>cp-fpc/pic/port</i>) (channel-zero   channel-one) (primary   secondary)</code>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M40e, M160, and M320 routers, PTX Series, and T Series routers only) Transfer a test file to the primary or secondary File Transfer Protocol (FTP) server that is configured as a flow collector. This command verifies that the output side of the flow collector interface is operating properly.
<b>Options</b>	<p><b><i>filename</i></b>—Name of the test file to transfer.</p> <p><b>interface all   <i>cp-fpc/pic/port</i></b>—Transfer a test file of flows from all configured flow collector interfaces or from only the specified interface.</p> <p><b>channel-zero   channel-one</b>—Transfer a file from export channel 0 (unit 0) or channel 1 (unit 1) of the PIC.</p> <p><b>primary   secondary</b>—Transfer a file to the primary or secondary server configured as a flow collector.</p>
<b>Required Privilege Level</b>	network
<b>List of Sample Output</b>	<a href="#">request services flow-collector test-file-transfer on page 39</a>
<b>Output Fields</b>	When you enter this command, you are provided feedback on the status of your request.

### Sample Output

```

request services flow-collector test-file-transfer
user@router> request services flow-collector test-file-transfer test_file interface cp-7/1/0
channel-one primary

Flow collector interface: cp-7/1/0
Interface state: Collecting flows
Response: Test file transfer successfully scheduled

```

## show services flow-collector file interface

<b>Syntax</b>	show services flow-collector file interface (all   cp-fpc/pic/port) <detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M40e, M160, and M320 routers and T Series routers only) Display information about flow collector files.
<b>Options</b>	<p><b>all   cp-fpc/pic/port</b>—Display file information for all configured flow collector interfaces or for the specified interface.</p> <p><b>detail   extensive   terse</b>—(Optional) Display the specified level of output.</p>
<b>Additional Information</b>	No entries are displayed for files that have been successfully transferred.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show services flow-collector file interface extensive on page 41</a>
<b>Output Fields</b>	<a href="#">Table 3 on page 40</a> lists the output fields for the <b>show services flow-collector file interface</b> command. Output fields are listed in the approximate order in which they appear.

**Table 3: show services flow-collector file interface Output Fields**

Output Field	Output Field Description	Level of Output
<b>Filename</b>	Name of the file created on the flow collector interface.	All levels
<b>Flows</b>	Total number of collector flows for which records are present in the file.	none specified
<b>Throughput</b>	Throughput statistics: <ul style="list-style-type: none"> <li>• <b>Flow records</b>—Number of flow records in the file.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of flow records per second.</li> <li>• <b>peak per second</b>—Peak number of flow records per second.</li> </ul> </li> <li>• <b>Uncompressed bytes</b>—Total file size before compression.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of uncompressed bytes per second.</li> <li>• <b>peak per second</b>—Peak number of uncompressed bytes per second.</li> </ul> </li> <li>• <b>Compressed bytes</b>—Total file size after compression.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of compressed bytes per second.</li> <li>• <b>peak per second</b>—Peak number of compressed bytes per second.</li> </ul> </li> </ul>	<b>extensive</b>

Table 3: show services flow-collector file interface Output Fields (*continued*)

Output Field	Output Field Description	Level of Output
Status	<p>File statistics:</p> <ul style="list-style-type: none"> <li>• <b>Compressed blocks</b>—(extensive output only) Data blocks in the file that have been compressed. The file is exported only when the compressed block count and block count become the same.</li> <li>• <b>Block count</b>—(extensive output only) Total number of data blocks in the file.</li> <li>• <b>State</b>—Processing state of the file. <ul style="list-style-type: none"> <li>• <b>Active</b>—The flow collector interface is writing to the file.</li> <li>• <b>Export 1</b>—File export is in progress to the primary server.</li> <li>• <b>Export 2</b>—File export is in progress to the secondary server.</li> <li>• <b>Wait</b>—File is pending export.</li> </ul> </li> <li>• <b>Transfer attempts 0</b>—Number of attempts made to transfer the file. If the file is successfully transferred in the first attempt, this field is 0.</li> </ul>	All levels

## Sample Output

show services  
flow-collector file  
interface extensive

```
user@host> show services flow-collector file interface cp-3/2/0 extensive
Filename: cFlowd-py69Ni69-0-20031112_014301-so_3_0_0_0.bcp.bi.gz
Throughput:
  Flow records: 188365, per second: 238, peak per second: 287
  Uncompressed bytes: 21267756, per second: 27007, peak per second: 32526
  Compressed bytes: 2965643, per second: 0, peak per second: 22999
Status:
  Compressed blocks: 156, Block count: 156
  State: Active, Transfer attempts: 0
```

## show services flow-collector input interface

---

<b>Syntax</b>	show services flow-collector input interface (all   <i>cp-fpc/pic/port</i> ) <detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M40e, M160, and M320 routers and T Series routers only) Display the number of packets received by collector interfaces from monitoring interfaces.
<b>Options</b>	<b>all   <i>cp-fpc/pic/port</i></b> —Display packets received by all configured flow collector interfaces or by the specified interface.  <b>detail   extensive   terse</b> —(Optional) Display the specified level of output.
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show services flow-collector input interface on page 43</a> <a href="#">show services flow-collector input interface all on page 43</a>
<b>Output Fields</b>	<a href="#">Table 4 on page 42</a> lists the output fields for the <b>show services flow-collector input interface</b> command. Output fields are listed in the approximate order in which they appear.

**Table 4: show services flow-collector input interface Output Fields**

Output Field	Output Field Description
<b>Interface</b>	Name of the monitoring interface.
<b>Packets</b>	Number of packets traveling from the monitoring interface to the flow collector interface.
<b>Bytes</b>	Number of bytes traveling from the monitoring interface to the flow collector interface.



## Sample Output

show services  
flow-collector input  
interface

```
user@host> show services flow-collector input interface cp-3/2/0
Interface          Packets      Bytes
mo-3/0/0.0         21706       32328568
mo-3/1/0.0         21706       32329096
```

show services  
flow-collector input  
interface all

```
user@host> show services flow-collector input interface all
Flow collector interface: cp-6/1/0
Interface state: Collecting flows
Interface          Packets      Bytes
mo-3/0/0.0         274         416232
mo-3/3/0.0         274         416184
mo-1/0/0.0         274         416232
mo-1/1/0.0         274         416232
mo-1/2/0.0         274         416232
mo-1/3/0.0         274         416232
mo-3/1/0.0         274         416232
mo-4/0/0.0         274         416232
mo-4/1/0.0         274         416232
mo-4/2/0.0         274         416184
mo-4/3/0.0         274         416232
mo-5/0/0.0         274         416232
mo-5/1/0.0         274         416232
mo-5/2/0.0         274         416232
mo-5/3/0.0         274         416232
mo-6/0/0.0         274         416232
```

```
Flow collector interface: cp-6/3/0
Interface state: Collecting flows
```

## show services flow-collector interface

<b>Syntax</b>	show services flow-collector interface (all   cp-fpc/pic/port) <detail   extensive   terse>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M40e, M160, and M320 routers and T Series routers only) Display overall statistics for the flow collector application.
<b>Options</b>	<p>all   cp-fpc/pic/port—Display statistics for flow collector applications on all interfaces or for the specified interface.</p> <p>detail   extensive   terse—(Optional) Display the specified level of output.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show services flow-collector interface all detail on page 47</a> <a href="#">show services flow-collector interface all extensive on page 47</a> <a href="#">show services flow-collector interface all terse on page 49</a> <a href="#">show services flow-collector interface extensive on page 49</a>
<b>Output Fields</b>	Table 5 on page 44 lists the output fields for the <b>show services flow-collector interface</b> command. Output fields are listed in the approximate order in which they appear.

Table 5: show services flow-collector interface Output Fields

Output Field	Output Field Description	Level of Output
Flow collector interface	Name of the flow collector interface.	All levels
Interface state	Collecting flow state for the interface.	All levels
Packets	Total number of packets received.	none specified
Flows Uncompressed Bytes	Total uncompressed data size for all files created on this PIC.	none specified
Compressed Bytes	Total compressed data size for all files created on this PIC.	none specified
FTP bytes	Total number of bytes transferred to the FTP server, including those dropped during transfer.	none specified
FTP files	Total number of FTP transfers attempted by the server.	none specified
Memory	Bytes used on the PIC and bytes free.	detail extensive

Table 5: show services flow-collector interface Output Fields (*continued*)

Output Field	Output Field Description	Level of Output
<b>Input</b>	Incoming flow collector packet statistics: <ul style="list-style-type: none"> <li>• <b>Packets</b>—Number of packets received on the unit.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of packets per second.</li> <li>• <b>peak per second</b>—Peak number of packets per second.</li> </ul> </li> <li>• <b>Bytes</b>—Number of bytes received on the unit.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of bytes per second.</li> <li>• <b>peak per second</b>—Peak number of bytes per second.</li> </ul> </li> <li>• <b>Flow records processed</b>—Number of records in the flow collector packets that were processed by the flow-collector interface.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of flow records processed per second.</li> <li>• <b>peak per second</b>—Peak number of flow records per second.</li> </ul> </li> </ul>	<b>detail extensive</b>
<b>Allocation</b>	Data block statistics: <ul style="list-style-type: none"> <li>• <b>Blocks allocated</b>—Total number of data blocks (containing flow records) allocated to the files created on this PIC.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of blocks allocated per second.</li> <li>• <b>peak per second</b>—Peak number of blocks allocated per second.</li> </ul> </li> <li>• <b>Blocks freed</b>—Total number of data blocks freed.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of blocks freed per second.</li> <li>• <b>peak per second</b>—Peak number of blocks freed per second.</li> </ul> </li> <li>• <b>Blocks unavailable</b>—Total number of data block requests denied, typically because of a memory shortage.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of blocks unavailable per second.</li> <li>• <b>peak per second</b>—Peak number of blocks unavailable per second.</li> </ul> </li> </ul>	<b>extensive</b>
<b>Files</b>	File statistics, incremented since the PIC last booted: <ul style="list-style-type: none"> <li>• <b>Files created</b>—Total number of files created on this PIC.</li> <li>• <b>Files exported</b>— Number of files successfully created and exported.</li> <li>• <b>Files destroyed</b>— (<b>extensive</b> output only) Number of files successfully exported and files dropped by the flow collection interface.</li> </ul>	<b>detail extensive</b>
<b>Throughput</b>	Throughput statistics: <ul style="list-style-type: none"> <li>• <b>Uncompressed bytes</b>—Total uncompressed data size for all files created on this PIC.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of uncompressed bytes per second.</li> <li>• <b>peak per second</b>—Peak number of uncompressed bytes per second.</li> </ul> </li> <li>• <b>Compressed bytes</b>—Total compressed data size for all files created on this PIC.               <ul style="list-style-type: none"> <li>• <b>per second</b>—Average number of compressed bytes per second.</li> <li>• <b>peak per second</b>—Peak number of compressed bytes per second.</li> </ul> </li> </ul>	<b>detail extensive</b>

Table 5: show services flow-collector interface Output Fields (*continued*)

Output Field	Output Field Description	Level of Output
<b>Packet drops</b>	<p>Number of packets dropped for the following causes:</p> <ul style="list-style-type: none"> <li>• <b>No memory</b>—Packets dropped because of insufficient memory.</li> <li>• <b>Not IP</b>—Packets dropped because they are not IP packets.</li> <li>• <b>Not IPv4</b>—Packets dropped because they are not IP version 4 packets.</li> <li>• <b>Too small</b>—Packets dropped because each packet was smaller than the size reported in its header.</li> <li>• <b>Fragments</b>—Packets dropped because of fragmentation. Fragments are not reassembled.</li> <li>• <b>ICMP</b>—Packets dropped because they are not ICMP packets.</li> <li>• <b>TCP</b>—Packets dropped because they are not TCP packets.</li> <li>• <b>Unknown</b>—Packets dropped because of undetermined causes.</li> <li>• <b>Not Junos flow</b>—Packets dropped because they are not interpreted by the Junos OS. The Junos OS interprets only IPv4, UDP cflowd version 5 packets.</li> </ul>	<b>extensive</b>
<b>File transfer</b>	<p>File transfer statistics:</p> <ul style="list-style-type: none"> <li>• <b>FTP bytes</b>—Total number of bytes transferred to the FTP server, including those dropped during transfer.</li> <li>• <b>FTP files</b>—Total number of FTP transfers attempted by the server.</li> <li>• <b>FTP failure</b>—Total number of FTP failures encountered by the server.</li> </ul>	<b>detail extensive</b>
<b>Flow collector interface</b>	Physical interface acting as a flow collector.	<b>detail</b>
<b>Export channel</b>	<p>Export channel 0 is unit 0. Export channel 1 is unit 1. Flow receive channel is unit 2. Server status statistics are the following:</p> <ul style="list-style-type: none"> <li>• <b>Current server Primary or Secondary</b>—Current FTP server being used. Value is</li> <li>• <b>Primary server state</b>—State of the server: <ul style="list-style-type: none"> <li>• <b>OK</b>—Server is operating without problems.</li> <li>• <b>FTP error</b>—Server encountered an FTP protocol error while sending files.</li> <li>• <b>Network error</b>—Flow-collector interface has errors when contacting the primary FTP server.</li> <li>• <b>Unknown</b>—First file transfer has not been sent to the primary server.</li> </ul> </li> <li>• <b>Secondary server state</b>—State of the server: <ul style="list-style-type: none"> <li>• <b>OK</b>—Server is operating without errors.</li> <li>• <b>FTP error</b>—Server encountered an FTP protocol error while sending files.</li> <li>• <b>Network error</b>—Flow-collector interface has errors when contacting the secondary FTP server.</li> <li>• <b>Unknown</b>—First file transfer has not been sent to the secondary server.</li> </ul> </li> <li>• <b>Not configured</b>—Secondary server is not configured.</li> </ul>	<b>detail extensive</b>

## Sample Output

show services  
flow-collector  
interface all detail

```
user@host> show services flow-collector interface all detail
Flow collector interface: cp-6/1/0
Interface state: Collecting flows
Memory:
  Used: 51452732, Free: 440329088
Input:
  Packets: 4384, per second: 0, peak per second: 156
  Bytes: 6659616, per second: 0, peak per second: 249695
  Flow records processed: 131070, per second: 0, peak per second: 4914
Files:
  Files created: 1, per second: 0, peak per second: 0
  Files exported: 1, per second: 0, peak per second: 0
Throughput:
  Uncompressed bytes: 13742307, per second: 0, peak per second: 593564
  Compressed bytes: 3786177, per second: 0, peak per second: 162826
File Transfer:
  FTP bytes: 3786247, per second: 0, peak per second: 378620
  FTP files: 1, per second: 0, peak per second: 0
  FTP failure: 0
Export channel: 0
  Current server: Primary
  Primary server state: OK, Secondary server state: OK
Export channel: 1
  Current server: Primary
  Primary server state: Unknown, Secondary server state: OK

Flow collector interface: cp-6/3/0
Interface state: Collecting flows
Memory:
  Used: 51452732, Free: 440329088
Input:
  Packets: 0, per second: 0, peak per second: 0
  Bytes: 0, per second: 0, peak per second: 0
  Flow records processed: 0, per second: 0, peak per second: 0
Files:
  Files created: 0, per second: 0, peak per second: 0
  Files exported: 0, per second: 0, peak per second: 0
Throughput:
  Uncompressed bytes: 0, per second: 0, peak per second: 0
  Compressed bytes: 0, per second: 0, peak per second: 0
File Transfer:
  FTP bytes: 70, per second: 0, peak per second: 6
  FTP files: 0, per second: 0, peak per second: 0
  FTP failure: 0
Export channel: 0
  Current server: Primary
  Primary server state: Unknown, Secondary server state: OK
Export channel: 1
  Current server: Primary
  Primary server state: Unknown, Secondary server state: OK
```

show services  
flow-collector  
interface all extensive

```
user@host> show services flow-collector interface all extensive
Flow collector interface: cp-6/1/0
Interface state: Collecting flows
Memory:
  Used: 51452732, Free: 440329088
Input:
```

Packets: 4384, per second: 0, peak per second: 156  
Bytes: 6659616, per second: 0, peak per second: 249695  
Flow records processed: 131070, per second: 0, peak per second: 4914

Allocation:  
Blocks allocated: 108, per second: 0, peak per second: 0  
Blocks freed: 108, per second: 0, peak per second: 10  
Blocks unavailable: 0, per second: 0, peak per second: 0

Files:  
Files created: 1, per second: 0, peak per second: 0  
Files exported: 1, per second: 0, peak per second: 0  
Files destroyed: 1, per second: 0, peak per second: 0

Throughput:  
Uncompressed bytes: 13742307, per second: 0, peak per second: 593564  
Compressed bytes: 3786177, per second: 0, peak per second: 162826

Packet drops:  
No memory: 0, Not IP: 0  
Not IPv4: 0, Too small: 0  
Fragments: 0, ICMP: 0  
TCP: 0, Unknown: 0  
Not JUNOS flow: 0

File Transfer:  
FTP bytes: 3786247, per second: 0, peak per second: 378620  
FTP files: 1, per second: 0, peak per second: 0  
FTP failure: 0

Export channel: 0  
Current server: Primary  
Primary server state: OK, Secondary server state: OK

Export channel: 1  
Current server: Primary  
Primary server state: Unknown, Secondary server state: OK

Flow collector interface: cp-6/3/0  
Interface state: Collecting flows

Memory:  
Used: 51452732, Free: 440329088

Input:  
Packets: 0, per second: 0, peak per second: 0  
Bytes: 0, per second: 0, peak per second: 0  
Flow records processed: 0, per second: 0, peak per second: 0

Allocation:  
Blocks allocated: 0, per second: 0, peak per second: 0  
Blocks freed: 0, per second: 0, peak per second: 0  
Blocks unavailable: 0, per second: 0, peak per second: 0

Files:  
Files created: 0, per second: 0, peak per second: 0  
Files exported: 0, per second: 0, peak per second: 0  
Files destroyed: 0, per second: 0, peak per second: 0

Throughput:  
Uncompressed bytes: 0, per second: 0, peak per second: 0  
Compressed bytes: 0, per second: 0, peak per second: 0

Packet drops:  
No memory: 0, Not IP: 0  
Not IPv4: 0, Too small: 0  
Fragments: 0, ICMP: 0  
TCP: 0, Unknown: 0  
Not JUNOS flow: 0

File Transfer:  
FTP bytes: 70, per second: 0, peak per second: 6  
FTP files: 0, per second: 0, peak per second: 0  
FTP failure: 0

Export channel: 0

```

Current server: Primary
Primary server state: Unknown, Secondary server state: OK
Export channel: 1
Current server: Primary
Primary server state: Unknown, Secondary server state: OK

```

#### show services flow-collector interface all terse

```

user@host> show services flow-collector interface all terse
Flow collector interface: cp-6/1/0
Interface state: Collecting flows

```

Packets	Bytes	Flows	Uncompressed Bytes	Compressed Bytes	FTP bytes	FTP files
4384	6659616	131070	13742307	3786177	3786247	1

```

Flow collector interface: cp-6/3/0
Interface state: Collecting flows

```

Packets	Bytes	Flows	Uncompressed Bytes	Compressed Bytes	FTP bytes	FTP files
0	0	0	0	0	70	0

#### show services flow-collector interface extensive

```

user@host> show services flow-collector interface cp-5/2/0 extensive
Flow collector interface: cp-5/2/0
Interface state: Collecting flows
Memory:
  Used: 458311860, Free: 40810008
Input:
  Packets: 922629, per second: 2069, peak per second: 3266
  Bytes: 1376559252, per second: 3096940, peak per second: 4880051
  Flow records processed: 25764957, per second: 42564, peak per second: 98124
Allocation:
  Blocks allocated: 20862, per second: 31, peak per second: 72
  Blocks freed: 17161, per second: 40, peak per second: 202
  Blocks unavailable: 58786, per second: 652, peak per second: 1120
Files:
  Files created: 52, per second: 0, peak per second: 0
  Files exported: 42, per second: 0, peak per second: 0
  Files destroyed: 42, per second: 0, peak per second: 0
Throughput:
  Uncompressed bytes: 2592070401, per second: 7297307,
  peak per second: 8630023
  Compressed bytes: 659600068, per second: 1858458, peak per second: 2198471
Packet drops:
  No memory: 58786, Not IP: 0
  Not IPv4: 0, Too small: 0
  Fragments: 0, ICMP: 0
  TCP: 0, Unknown: 0
  Not JUNOS flow: 0
File Transfer:
  FTP bytes: 585981447, per second: 1313320, peak per second: 4857798
  FTP files: 48, per second: 0, peak per second: 0
  FTP failure: 8
Export channel: 0
  Current server: Primary
  Primary server state: FTP error, Secondary server state: Not configured
Export channel: 1
  Current server: Primary
  Primary server state: OK, Secondary server state: Not configured

```





## CHAPTER 5

# Flow Collector Interface Operational Mode Commands

## show interfaces (Flow Collector)

<b>Syntax</b>	<pre>show interfaces <i>cp-fpc/pic/port:channel</i> &lt;brief   detail   extensive   terse&gt; &lt;descriptions&gt; &lt;media&gt; &lt;snmp-index <i>snmp-index</i>&gt; &lt;statistics&gt;</pre>
<b>Release Information</b>	Command introduced before Junos OS Release 7.4.
<b>Description</b>	(M Series and T Series routers only) Display status information about the specified flow collector interface.
<b>Options</b>	<p><b><i>cp-fpc/pic/port:channel</i></b>—Display standard status information about the specified flow collector interface.</p> <p><b>brief   detail   extensive   terse</b>—(Optional) Display the specified level of output.</p> <p><b>descriptions</b>—(Optional) Display interface description strings.</p> <p><b>media</b>—(Optional) Display media-specific information about network interfaces.</p> <p><b>snmp-index <i>snmp-index</i></b>—(Optional) Display information for the specified SNMP index of the interface.</p> <p><b>statistics</b>—(Optional) Display static interface statistics.</p>
<b>Required Privilege Level</b>	view
<b>List of Sample Output</b>	<a href="#">show interfaces extensive (Flow Collector) on page 56</a>
<b>Output Fields</b>	<a href="#">Table 6 on page 52</a> lists the output fields for the <b>show interfaces</b> (Flow Collector) command. Output fields are listed in the approximate order in which they appear.

Table 6: Flow Collector Show interfaces Output Fields

Field Name	Field Description	Level of Output
<b>Physical Interface</b>		
<b>Physical Interface</b>	Name of the physical interface type.	All levels
<b>Link</b>	Status of the link: <b>up</b> or <b>down</b> .	All levels
<b>Enabled</b>	State of the interface type. Possible values are described in the “Enabled Devices” section under Common Output Fields Description.	All levels
<b>Interface index</b>	Physical interface index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	SNMP index number for the physical interface.	<b>detail extensive none</b>

Table 6: Flow Collector Show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Type</b>	Type of interface.	All levels
<b>Link-level type</b>	Encapsulation type used on the physical interface.	All levels
<b>MTU</b>	Maximum Transmit Unit (MTU). Size of the largest packet to be transmitted.	All levels
<b>Clocking</b>	Reference clock source of the interface.	All levels
<b>Speed</b>	Network speed on the interface.	All levels
<b>Device flags</b>	Information about the physical device. Possible values are described in the "Device Flags" section under Common Output Fields Description.	All levels
<b>Interface flags</b>	Information about the interface. Possible values are described in the "Interface Flags" section under Common Output Fields Description.	All levels
<b>Link type</b>	Data transmission type.	All levels
<b>Link flags</b>	Information about the link. Possible values are described in the "Link Flags" section under Common Output Fields Description.	All levels
<b>Physical info</b>	Information about the physical interface.	All levels
<b>Hold-times</b>	Current interface hold-time up and hold-time down. Value is in milliseconds.	<b>detail extensive none</b>
<b>Current address</b>	Configured MAC address.	<b>detail extensive none</b>
<b>Hardware address</b>	Media access control (MAC) address of the interface.	<b>detail extensive none</b>
<b>Alternate link address</b>	Backup link address.	<b>detail extensive none</b>
<b>Last flapped</b>	Date, time, and how long ago the interface went from down to up. The format is <b>Last flapped: year-month-day hour:minute:second timezone (hour:minute:second ago)</b> . For example, <b>Last flapped: 2002-04-26 10:52:40 PDT (04:33:20 ago)</b> .	<b>detail extensive</b>
<b>Statistics last cleared</b>	Time when the statistics for the interface were last set to zero.	<b>detail extensive</b>
<b>Traffic statistics</b>	Number and rate of bytes and packets received and transmitted on the physical interface. <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the interface.</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the interface.</li> </ul>	<b>detail extensive</b>

Table 6: Flow Collector Show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Input errors</b>	<ul style="list-style-type: none"> <li>• <b>Errors</b>—Input errors on the interface.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC.</li> <li>• <b>Framing errors</b>—Number of packets received with an invalid frame checksum (FCS).</li> <li>• <b>Runts</b>—Frames received smaller than the runt threshold.</li> <li>• <b>Giants</b>—Frames received larger than the giant threshold.</li> <li>• <b>Policed Discards</b>—Frames that the incoming packet match code discarded because the frames did not recognize them or were not of interest. Usually, this field reports protocols that Junos does not support.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Output errors</b>	<ul style="list-style-type: none"> <li>• <b>Carrier transitions</b> —Number of times the interface has gone from <b>down</b> to <b>up</b>. This number does not normally increment quickly, increasing only when the cable is unplugged, the far-end system is powered down and then up, or another problem occurs. If the number of carrier transitions increments quickly, possibly once every 10 seconds, the cable, the remote system, or the interface is malfunctioning.</li> <li>• <b>Errors</b>—Sum of outgoing frame aborts and FCS errors.</li> <li>• <b>Drops</b>—Number of packets dropped by the output queue of the I/O Manager ASIC. If the interface is saturated, this number increments once for every packet dropped by the ASIC RED mechanism.</li> <li>• <b>Resource errors</b>—Sum of transmit drops.</li> </ul>	<b>extensive</b>
<b>Logical Interface</b>		
<b>Logical interface</b>	Name of the logical interface	All levels
<b>Index</b>	Logical interface index number, which reflects its initialization sequence.	<b>detail extensive none</b>
<b>SNMP ifIndex</b>	Logical interface SNMP interface index number.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Flags</b>	Information about the logical interface; values are described in the “Logical Interface Flags” section under Common Output Fields Description.	All levels
<b>Encapsulation</b>	Encapsulation on the logical interface.	All levels
<b>Traffic statistics</b>	<p>Total number of bytes and packets received and transmitted on the logical interface. These statistics are the sum of the local and transit statistics. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than 1 second) for this counter to stabilize.</p> <ul style="list-style-type: none"> <li>• <b>Input bytes, Output bytes</b>—Number of bytes received and transmitted on the interface.</li> <li>• <b>Input packets, Output packets</b>—Number of packets received and transmitted on the interface.</li> </ul>	<b>detail extensive</b>

Table 6: Flow Collector Show interfaces Output Fields (*continued*)

Field Name	Field Description	Level of Output
<b>Local statistics</b>	Statistics for traffic received from and transmitted to the Routing Engine. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than 1 second) for this counter to stabilize.	<b>detail extensive</b>
<b>Transit statistics</b>	Statistics for traffic transiting the router. When a burst of traffic is received, the value in the output packet rate field might briefly exceed the peak cell rate. It takes awhile (generally, less than 1 second) for this counter to stabilize.	<b>detail extensive</b>
<b>Protocol</b>	Protocol family configured on the logical interface (such as <b>iso</b> or <b>inet6</b> ).	<b>detail extensive none</b>
<b>MTU</b>	MTU size on the logical interface.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>
<b>Route table</b>	Route table in which this address exists; for example, <b>Route table:0</b> refers to inet.0.	<b>detail extensive</b>
<b>Flags</b>	Information about the protocol family flags. Possible values are described in the “Family Flags” section under Common Output Fields Description.	<b>detail extensive none</b>
<b>Addresses, Flags</b>	Information about the address flags. Possible values are described in the “Addresses Flags” section under Common Output Fields Description.	<b>detail extensive none</b>
<b>Destination</b>	IP address of the remote side of the connection.	<b>detail extensive none</b>
<b>Local</b>	IP address of the logical interface.	<b>detail extensive none</b>
<b>Broadcast</b>	Broadcast address.	<b>detail extensive none</b>
<b>Generation</b>	Unique number for use by Juniper Networks technical support only.	<b>detail extensive</b>

## Sample Output

show interfaces  
extensive  
(Flow Collector)

```
user@host> show interfaces extensive cp-5/0/0
Physical interface: cp-5/0/0, Enabled, Physical link is Up
  Interface index: 145, SNMP ifIndex: 52, Generation: 29
  Type: Flow-collector, Link-level type: Flow-collection, MTU: 9192,
  Clocking: Unspecified, Speed: 800mbps
  Device flags   : Present Running
  Interface flags: Point-To-Point SNMP-Traps 16384
  Link type      : Full-Duplex
  Link flags     : None
  Physical info  : Unspecified
  Hold-times    : Up 0 ms, Down 0 ms
  Current address: Unspecified, Hardware address: Unspecified
  Alternate link address: Unspecified
  Last flapped   : 2005-05-24 16:48:11 PDT (00:12:04 ago)
  Statistics last cleared: Never
  Traffic statistics:
    Input bytes   :          2041661287          0 bps
    Output bytes  :          3795049544      43816664 bps
    Input packets :          1365534          0 pps
    Output packets:          3865644      3670 pps
  Input errors:
    Errors: 0, Drops: 0, Framing errors: 0, Runts: 0, Giants: 0,
    Policed discards: 0, Resource errors: 0
  Output errors:
    Carrier transitions: 2, Errors: 0, Drops: 0, MTU errors: 0,
    Resource errors: 0

Logical interface cp-5/0/0.0 (Index 74) (SNMP ifIndex 53) (Generation 28)
  Flags: Point-To-Point SNMP-Traps Encapsulation: Flow-collection
  Traffic statistics:
    Input bytes   :          1064651568
    Output bytes  :          37144290
    Input packets :          711324
    Output packets:          713672
  Local statistics:
    Input bytes   :          0
    Output bytes  :          0
    Input packets :          0
    Output packets:          0
  Transit statistics:
    Input bytes   :          1064651568          0 bps
    Output bytes  :          37144290          0 bps
    Input packets :          711324          0 pps
    Output packets:          713672          0 pps
  Protocol inet, MTU: 9192, Generation: 39, Route table: 0
  Flags: Receive-options, Receive-TTL-Exceeded
  Addresses, Flags: Is-Preferred Is-Primary
    Destination: 4.0.0.2, Local: 4.0.0.1, Broadcast: Unspecified,
    Generation: 40

Logical interface cp-5/0/0.1 (Index 75) (SNMP ifIndex 54) (Generation 29)
  Flags: Point-To-Point SNMP-Traps Encapsulation: Flow-collection
  Traffic statistics:
    Input bytes   :          976793823
    Output bytes  :          34099481
    Input packets :          652729
    Output packets:          655127
  Local statistics:
```

```

Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Transit statistics:
Input bytes : 976793823 0 bps
Output bytes : 34099481 0 bps
Input packets: 652729 0 pps
Output packets: 655127 0 pps
Protocol inet, MTU: 9192, Generation: 40, Route table: 0
Flags: Receive-options, Receive-TTL-Exceeded
Addresses, Flags: Is-Preferred Is-Primary
Destination: 4.1.1.2, Local: 4.1.1.1, Broadcast: Unspecified,
Generation: 42

Logical interface cp-5/0/0.2 (Index 80) (SNMP ifIndex 55) (Generation 30)
Flags: Point-To-Point SNMP-Traps Encapsulation: Flow-collection
Traffic statistics:
Input bytes : 0
Output bytes : 3723079376
Input packets: 0
Output packets: 2495372
Local statistics:
Input bytes : 0
Output bytes : 0
Input packets: 0
Output packets: 0
Transit statistics:
Input bytes : 0 0 bps
Output bytes : 3723079376 43816664 bps
Input packets: 0 0 pps
Output packets: 2495372 3670 pps
Protocol inet, MTU: 9192, Generation: 41, Route table: 0
Flags: Receive-options, Receive-TTL-Exceeded
Addresses, Flags: Is-Preferred Is-Primary
Destination: 4.2.2.2, Local: 4.2.2.1, Broadcast: Unspecified,
Generation: 44

Logical interface cp-5/0/0.16383 (Index 81) (SNMP ifIndex 56) (Generation 31)
...
```





## PART 3

# Index

- [Index on page 61](#)



# Index

## Symbols

#, comments in configuration statements.....	xii
( ), in syntax descriptions.....	xii
< >, in syntax descriptions.....	xii
[ ], in configuration statements.....	xii
{ }, in configuration statements.....	xii
(pipe), in syntax descriptions.....	xii

## A

adaptive-services-pics statement	
usage guidelines.....	6
analyzer-address statement.....	17
usage guidelines.....	4
analyzer-id statement.....	17
usage guidelines.....	4
archive-sites statement.....	18
usage guidelines.....	5

## B

braces, in configuration statements.....	xii
brackets	
angle, in syntax descriptions.....	xii
square, in configuration statements.....	xii

## C

clear services flow-collector statistics	
command.....	36
collector statement.....	18
usage guidelines.....	5
collector-pic statement	
usage guidelines.....	6
comments, in configuration statements.....	xii
configuration	
flow collector interface.....	9
conventions	
text and syntax.....	xi
curly braces, in configuration statements.....	xii
customer support.....	xiii
contacting JTAC.....	xiii

## D

data-format statement.....	19
usage guidelines.....	4
destinations statement	
flow collection.....	19
usage guidelines.....	3
documentation	
comments on.....	xiii

## E

enable flow collection mode.....	6
----------------------------------	---

## F

file-specification statement	
usage guidelines.....	4, 5
filename-prefix statement.....	20
usage guidelines.....	5
flow collector	
analyzer configuration.....	4
destination configuration.....	3
example configuration.....	9
file format configuration.....	4
interface mapping.....	5
transfer log.....	5
flow collector interfaces	
status information, displaying.....	52
flow collector services	
interface files, displaying.....	40
packets received, displaying.....	42
primary server, switching to.....	37
secondary server, switching to.....	38
statistics	
displaying.....	44
interface, clearing.....	36
test file, transferring.....	39
flow-collector statement.....	22
usage guidelines.....	6
font conventions.....	xi
ftp statement	
usage guidelines.....	3, 5

## I

interface-map statement.....	25
usage guidelines.....	5

## M

manuals	
comments on.....	xiii

maximum-age statement.....	26
usage guidelines.....	5

## N

name-format statement.....	27
usage guidelines.....	4

## P

parentheses, in syntax descriptions.....	xii
password statement	
usage guidelines.....	3, 5

## R

request services flow-collector change-destination	
primary interface command.....	37
request services flow-collector change-destination	
secondary interface command.....	38
request services flow-collector test-file-transfer	
command.....	39
retry statement.....	29
usage guidelines.....	6
retry-delay statement.....	29
usage guidelines.....	6

## S

send cflowd records to flow collector.....	6
show interfaces (Flow Collector) command.....	52
show services flow-collector file interface	
command.....	40
show services flow-collector input interface	
command.....	42
show services flow-collector interface	
command.....	44
statement	
services	
usage guidelines.....	6
support, technical See technical support	
syntax conventions.....	xi

## T

technical support	
contacting JTAC.....	xiii
transfer statement.....	30
usage guidelines.....	4
transfer-log-archive statement.....	30
usage guidelines.....	5

## U

username statement	
flow collection.....	31
usage guidelines.....	5

## V

variant statement.....	31
usage guidelines.....	4