


- 5. Resolver C1 obtains an SAE reference for the VR and returns the VR identity to resolver A1.
- 6. Resolver A1 passes the SAE reference to its host.
- 7. The host returns the SAE reference to the NIC proxy.

Figure 2 on page 2 illustrates the interactions of the NIC components for this realm.

Figure 2: OnePopDynamicIp Centralized Configuration

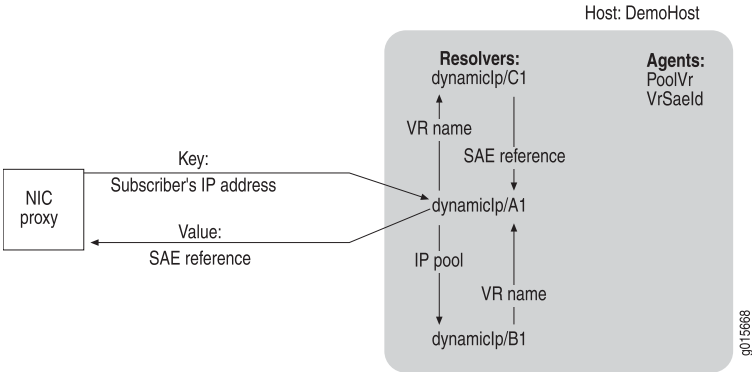

Distributed Configuration

In this configuration, the agents and resolvers are distributed among several hosts. When the NIC proxy sends a subscriber's IP address to host OnePopBO, the components execute the same actions as they do in the centralized configuration.

Figure 3 on page 2 illustrates the interactions of the NIC components for this realm.

Figure 3: OnePopDynamicIp Distributed Configuration

