

IS-IS Feature Guide for the QFX Series

Release
15.1



Modified: 2016-05-16

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

IS-IS Feature Guide for the QFX Series

15.1

Copyright © 2016, Juniper Networks, Inc.

All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	xi
	Documentation and Release Notes	xi
	Supported Platforms	xi
	Using the Examples in This Manual	xi
	Merging a Full Example	xii
	Merging a Snippet	xii
	Documentation Conventions	xiii
	Documentation Feedback	xv
	Requesting Technical Support	xv
	Self-Help Online Tools and Resources	xv
	Opening a Case with JTAC	xvi
Chapter 1	Overview	17
	IS-IS Overview	17
	IS-IS Terminology	18
	ISO Network Addresses	18
	IS-IS Packets	20
	Persistent Route Reachability	21
	IS-IS Support for Multipoint Network Clouds	21
	Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels	21
	Understanding BFD Authentication for IS-IS	22
	BFD Authentication Algorithms	22
	Security Authentication Keychains	23
	Strict Versus Loose Authentication	23
	Understanding Hitless Authentication Key Rollover for IS-IS	23
	Understanding Loop-Free Alternate Routes for IS-IS	24
	Configuring Link Protection for IS-IS	26
	Configuring Node-Link Protection for IS-IS	27
	Excluding an IS-IS Interface as a Backup for Protected Interfaces	27
	Configuring RSVP Label-Switched Paths as Backup Paths for IS-IS	27
	Using Operational Mode Commands to Monitor Protected IS-IS Routes	28
Part 1	Configuring IS-IS	
	Configuring IS-IS Authentication	29
	Configuring IS-IS Authentication Without Network-Wide Deployment	31
	Example: Configuring IS-IS	31
	Example: Configuring Multi-Level IS-IS	36
	Example: Configuring Hitless Authentication Key Rollover for IS-IS	45
	Example: Redistributing OSPF Routes into IS-IS	50
	Example: Configuring BFD for IS-IS	57

	Example: Configuring BFD Authentication for IS-IS	63
Chapter 2	Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies	67
	Understanding IS-IS IPv4 and IPv6 Unicast Topologies	67
	Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies	68
Chapter 3	Example: Configuring IS-IS Multicast Topology	77
	IS-IS Multicast Topologies Overview	77
	Example: Configuring IS-IS Multicast Topology	78
Chapter 4	Example: Configuring Link and Node Protection for IS-IS Routes	93
	Understanding Loop-Free Alternate Routes for IS-IS	93
	Configuring Link Protection for IS-IS	95
	Configuring Node-Link Protection for IS-IS	95
	Excluding an IS-IS Interface as a Backup for Protected Interfaces	96
	Configuring RSVP Label-Switched Paths as Backup Paths for IS-IS	96
	Using Operational Mode Commands to Monitor Protected IS-IS Routes	97
	Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN	97
	Example: Configuring an IS-IS Default Route Policy on Logical Systems	?
Chapter 5	Example: Configuring IS-IS for CLNS	109
	Understanding IS-IS for CLNS	109
	Example: Configuring IS-IS for CLNS	109
Chapter 6	Example: Configuring IS-IS Designated Routers	113
	Understanding IS-IS Designated Routers	113
	Configuring Designated Router Election Priority for IS-IS	113
	Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking	?
Chapter 7	IS-IS Configuration Statements	115
	authentication-key	117
	authentication-key-chain (Protocols IS-IS)	118
	authentication-type	119
	bfd-liveness-detection	120
	checksum (Protocols IS-IS)	122
	csnp-interval	123
	disable (IS-IS)	124
	export	125
	external-preference	126
	family	127
	graceful-restart	128
	hello-authentication-key	129
	hello-authentication-key-chain	130
	hello-authentication-type	131
	hello-interval (Protocols IS-IS)	132
	hello-padding	134
	hold-time (Protocols IS-IS)	136
	ignore-attached-bit	137
	interface	138
	ipv4-multicast	140
	ipv4-multicast-metric	140

	ipv6-multicast	141
	ipv6-multicast-metric	141
	ipv6-unicast	142
	ipv6-unicast-metric	143
	isis	144
	level (Global IS-IS)	145
	link-protection	146
	loose-authentication-check	146
	lsp-interval	147
	lsp-lifetime	148
	max-areas	149
	mesh-group	150
	metric	151
	no-adjacency-holddown	152
	no-authentication-check	152
	no-csnp-authentication	153
	no-eligible-backup	153
	no-hello-authentication	154
	no-ipv4-multicast	154
	no-ipv4-routing	155
	no-ipv6-multicast	155
	no-ipv6-routing	156
	no-ipv6-unicast	156
	no-psnp-authentication	157
	no-unicast-topology	157
	node-link-protection	158
	overload (Protocols IS-IS)	159
	passive	162
	point-to-point	163
	preference	164
	prefix-export-limit	165
	priority	166
	reference-bandwidth	167
	rib-group	168
	spf-options (Protocols IS-IS)	169
	topologies (Protocols IS-IS)	170
	traceoptions (Protocols IS-IS)	171
	traffic-engineering (Protocols IS-IS)	174
	wide-metrics-only	177
Chapter 8	IS-IS Operational Commands	179
	clear isis adjacency	180
	clear isis database	182
	clear isis overload	184
	clear isis statistics	186
	show isis adjacency	188
	show isis authentication	192
	show isis backup coverage	194
	show isis backup label-switched-path	196

show isis backup spf results	198
show isis database	202
show isis hostname	209
show isis interface	211
show isis overview	216
show isis route	220
show isis spf	224
show isis statistics	230

List of Figures

Chapter 1	Overview	17
	Figure 1: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2	21
	Figure 2: Link Protection and Node-Link Protection Comparison for IS-IS Routes	26
Part 1	Configuring IS-IS	
	Figure 3: Simple IS-IS Topology	32
	Figure 4: IS-IS Multi-Level Topology	37
	Figure 5: Hitless Authentication Key Rollover for IS-IS	46
	Figure 6: IS-IS Route Redistribution Topology	50
	Figure 7: Configuring BFD for IS-IS	58
	Figure 8: IS-IS BFD Authentication Topology	64
	Figure 13: IS-IS with a Default Route to an ISP	?
	Figure 14: IS-IS Checksum Topology	?
Chapter 2	Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies	67
	Figure 9: IS-IS IPv4 and IPv6 Unicast Topologies	69
Chapter 3	Example: Configuring IS-IS Multicast Topology	77
	Figure 10: Configuring IS-IS Multicast Topology	79
Chapter 4	Example: Configuring Link and Node Protection for IS-IS Routes	93
	Figure 11: Link Protection and Node-Link Protection Comparison for IS-IS Routes	94
	Figure 12: IS-IS Node-Link Protection Topology	98

List of Tables

	About the Documentation	xi
	Table 1: Notice Icons	xiii
	Table 2: Text and Syntax Conventions	xiii
Part 1	Configuring IS-IS	
Chapter 3	Example: Configuring IS-IS Multicast Topology	77
	Table 3: IPv4 Statements	78
	Table 4: IPv6 Statements	78
Chapter 8	IS-IS Operational Commands	179
	Table 5: show isis adjacency Output Fields	189
	Table 6: show isis authentication Output Fields	192
	Table 7: show isis backup coverage Output Fields	194
	Table 8: show isis backup label-switched-path Output Fields	196
	Table 9: show isis backup spf results Output Fields	199
	Table 10: show isis database Output Fields	203
	Table 11: show isis hostname Output Fields	209
	Table 12: show isis interface Output Fields	212
	Table 13: show isis overview Output Fields	216
	Table 14: show isis route Output Fields	221
	Table 15: show isis spf Output Fields	225
	Table 16: show isis statistics Output Fields	231

About the Documentation

- Documentation and Release Notes on page xi
- Supported Platforms on page xi
- Using the Examples in This Manual on page xi
- Documentation Conventions on page xiii
- Documentation Feedback on page xv
- Requesting Technical Support on page xv

Documentation and Release Notes

To obtain the most current version of all Juniper Networks[®] technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- [QFX Series](#)

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see the *CLI User Guide*.

Documentation Conventions

Table 1 on page xiii defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xiii defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> show chassis alarms No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none">Introduces or emphasizes important new terms.Identifies guide names.Identifies RFC and Internet draft titles.	<ul style="list-style-type: none">A policy <i>term</i> is a named structure that defines match conditions and actions.<i>Junos OS CLI User Guide</i>RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none">To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level.The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	stub <default-metric <i>metric</i>>;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast (<i>string1</i> <i>string2</i> <i>string3</i>)
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	community name members [<i>community-ids</i>]
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
GUI Conventions		
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none">In the Logical Interfaces box, select All Interfaces.To cancel the configuration, click Cancel.

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback rating system—On any page of the Juniper Networks TechLibrary site at <http://www.juniper.net/techpubs/index.html>, simply click the stars to rate the content, and use the pop-up form to provide us with information about your experience. Alternately, you can use the online feedback form at <http://www.juniper.net/techpubs/feedback/>.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>

- Download the latest versions of software and review release notes:
<http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications:
<http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum:
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

CHAPTER 1

Overview

- [IS-IS Overview on page 17](#)
- [Understanding BFD Authentication for IS-IS on page 22](#)
- [Understanding Hitless Authentication Key Rollover for IS-IS on page 23](#)
- [Understanding Loop-Free Alternate Routes for IS-IS on page 24](#)

IS-IS Overview

The IS-IS protocol is an interior gateway protocol (IGP) that uses link-state information to make routing decisions.

IS-IS is a link-state IGP that uses the shortest-path-first (SPF) algorithm to determine routes. IS-IS evaluates the topology changes and determines whether to perform a full SPF recalculation or a partial route calculation (PRC). This protocol originally was developed for routing International Organization for Standardization (ISO) Connectionless Network Protocol (CLNP) packets.

Like OSPF routing, IS-IS uses hello packets that allow network convergence to occur quickly when network changes are detected. IS-IS uses the SPF algorithm to determine routes. Using SPF, IS-IS evaluates network topology changes and determines if a full or partial route calculation is required.



NOTE: Because IS-IS uses ISO addresses, the configuration of IP version 6 (IPv6) and IP version 4 (IPv4) implementations of IS-IS is identical.

This section discusses the following topics:

- [IS-IS Terminology on page 18](#)
- [ISO Network Addresses on page 18](#)
- [IS-IS Packets on page 20](#)
- [Persistent Route Reachability on page 21](#)
- [IS-IS Support for Multipoint Network Clouds on page 21](#)
- [Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels on page 21](#)

IS-IS Terminology

An IS-IS network is a single autonomous system (AS), also called a *routing domain*, that consists of *end systems* and *intermediate systems*. End systems are network entities that send and receive packets. Intermediate systems send and receive packets and relay (forward) packets. (Intermediate system is the Open System Interconnection [OSI] term for a router.) ISO packets are called network PDUs.

In IS-IS, a single AS can be divided into smaller groups called *areas*. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring *Level 1* and *Level 2* intermediate systems. Level 1 systems route within an area; when the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs. No IS-IS area functions strictly as a backbone.

Level 1 routers share intra-area routing information, and Level 2 routers share interarea information about IP addresses available within each area. Uniquely, IS-IS routers can act as both Level 1 and Level 2 routers, sharing intra-area routes with other Level 1 routers and interarea routes with other Level 2 routers.

The propagation of link-state updates is determined by the level boundaries. All routers within a level maintain a complete link-state database of all other routers in the same level. Each router then uses the Dijkstra algorithm to determine the shortest path from the local router to other routers in the link-state database.

ISO Network Addresses

IS-IS uses ISO network addresses. Each address identifies a point of connection to the network, such as a router interface, and is called a *network service access point (NSAP)*.

IS-IS supports multiple NSAP addresses on the loopback lo0 interface.

An end system can have multiple NSAP addresses, in which case the addresses differ only by the last byte (called the *n-selector*). Each NSAP represents a service that is available at that node. In addition to having multiple services, a single node can belong to multiple areas.

Each network entity also has a special network address called a *network entity title (NET)*. Structurally, an NET is identical to an NSAP address but has an n-selector of 00. Most end systems and intermediate systems have one NET. Intermediate systems that participate in multiple areas can have multiple NETs.

The following ISO addresses illustrate the IS-IS address format:

```
49.0001.00a0.c96b.c490.00
49.0001.2081.9716.9018.00
```

NETs take several forms, depending on your network requirements. NET addresses are hexadecimal and range from 8 octets to 20 octets in length. Generally, the format consists of an authority and format Identifier (AFI), a domain ID, an area ID, a system identifier, and a selector. The simplest format omits the domain ID and is 10 octets long. For example, the NET address 49.0001.1921.6800.1001.00 consists of the following parts:

- 49—AFI
- 0001—Area ID
- 1921.6800.1001—System identifier
- 00—Selector

The system identifier must be unique within the network. For an IP-only network, we recommend using the IP address of an interface on the router. Configuring a loopback NET address with the IP address is helpful when troubleshooting is required on the network.

The first portion of the address is the area number, which is a variable number from 1 through 13 bytes. The first byte of the area number (49) is the authority and format indicator (AFI). The next bytes are the assigned domain (area) identifier, which can be from 0 through 12 bytes. In the examples above, the area identifier is 0001.

The next six bytes form the system identifier. The system identifier can be any six bytes that are unique throughout the entire domain. The system identifier commonly is the media access control (MAC) address (as in the first example, 00a0.c96b.c490) or the IP address expressed in binary-coded decimal (BCD) (as in the second example, 2081.9716.9018, which corresponds to IP address 208.197.169.18). The last byte (00) is the n-selector.



NOTE: The system identifier cannot be 0000.0000.0000. All 0s is an illegal setting, and the adjacency is not formed with this setting.

To provide help with IS-IS debugging, the Junos[®] operating system (Junos OS) supports dynamic mapping of ISO system identifiers to the hostname. Each system can be configured with a hostname, which allows the system identifier-to-hostname mapping to be carried in a dynamic hostname type, length, and value (TLV) tuple in IS-IS link-state PDUs. This enables intermediate systems in the routing domain to learn about the ISO system identifier of a particular intermediate system.

IS-IS Packets

Each protocol data unit (PDU) shares a common header. IS-IS uses the following protocol data units (PDUs) to exchange protocol information. :

- IS-IS hello (IIH) PDUs—Broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems.

IS-IS hello PDUs establish adjacencies with other routers and have three different formats: one for point-to-point hello packets, one for Level 1 broadcast links, and one for Level 2 broadcast links. Level 1 routers must share the same area address to form an adjacency, while Level 2 routers do not have this limitation. The request for adjacency is encoded in the Circuit type field of the PDU.

Hello PDUs have a preset length assigned to them. The IS-IS router does not resize any PDU to match the maximum transmission unit (MTU) on a router interface. Each interface supports the maximum IS-IS PDU of 1492 bytes, and hello PDUs are padded to meet the maximum value. When the hello is sent to a neighboring router, the connecting interface supports the maximum PDU size.

- Link-state PDUs—Contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area.

Also included is metric and IS-IS neighbor information. Each link-state PDU must be refreshed periodically on the network and is acknowledged by information within a sequence number PDU.

On point-to-point links, each link-state PDU is acknowledged by a partial sequence number PDU (PSNP), but on broadcast links, a complete sequence number PDU (CSNP) is sent out over the network. Any router that finds newer link-state PDU information in the CSNP then purges the out-of-date entry and updates the link-state database.

Link-state PDUs support variable-length subnet mask addressing.

- Complete sequence number PDUs (CSNPs)—Contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.

Contained within the CSNP is a link-state PDU identifier, a lifetime, a sequence number, and a checksum for each entry in the database. Periodically, a CSNP is sent on both broadcast and point-to-point links to maintain a correct database. Also, the advertisement of CSNPs occurs when an adjacency is formed with another router. Like IS-IS hello PDUs, CSNPs come in two types: Level 1 and Level 2.

When a device receives a CSNP, it checks the database entries against its own local link-state database. If it detects missing information, the device requests specific link-state PDU details using a partial sequence number PDU (PSNP).

- Partial sequence number PDUs (PSNPs)—Sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively

requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device.

A PSNP is used by an IS-IS router to request link-state PDU information from a neighboring router. A PSNP can also explicitly acknowledge the receipt of a link-state PDU on a point-to-point link. On a broadcast link, a CSNP is used as implicit knowledge. Like hello PDUs and CSNPs, the PSNP also has two types: Level 1 and Level 2.

When a device compares a CSNP to its local database and determines that a link-state PDU is missing, the router issues a PSNP for the missing link-state PDU, which is returned in a link-state PDU from the router sending the CSNP. The received link-state PDU is then stored in the local database, and an acknowledgment is sent back to the originating router.

Persistent Route Reachability

IPv4 and IPv6 route reachability information in IS-IS link-state PDUs is preserved when you commit a configuration. IP prefixes are preserved with their original packet fragment upon link-state PDU regeneration.


IS-IS Support for Multipoint Network Clouds

IS-IS does not support multipoint configurations. Therefore, when configuring Frame Relay or Asynchronous Transfer Mode (ATM) networks, you must configure them as collections of point-to-point links, not as multipoint clouds.

Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels

When a routing device that operates as both a Level 1 and Level 2 router (Router B) determines that it can reach at least one area other than its own (for example, in Area Y), it sets the ATTACHED bit in its Level 1 link-state PDU. Thereafter, the Level 1 router (Router A) introduces a default route pointing to the nearest attached routing device that operates as both a Level 1 and Level 2 router (Router B). See [Figure 1 on page 21](#).

Figure 1: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2

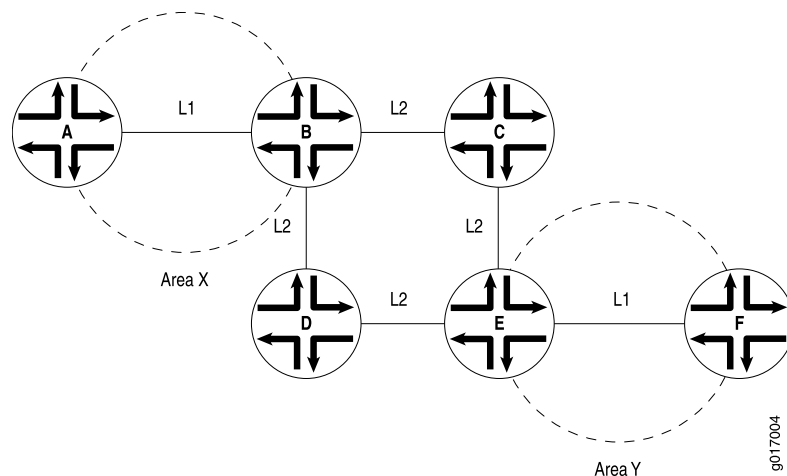

Related Documentation • [Configuring IS-IS](#)

Understanding BFD Authentication for IS-IS

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when running BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IS-IS. BFD authentication is only supported in the domestic image and is not available in the export image.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 22](#)
- [Security Authentication Keychains on page 23](#)
- [Strict Versus Loose Authentication on page 23](#)

BFD Authentication Algorithms

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords might be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.
- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method,

packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.

- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



NOTE: Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

Strict Versus Loose Authentication

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

Related Documentation

- [Example: Configuring BFD Authentication for IS-IS on page 63](#)

Understanding Hitless Authentication Key Rollover for IS-IS

IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in routing. By default, authentication is disabled. The authentication algorithm creates an encoded checksum that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet's checksum.

If you configure authentication for all peers, each peer in that group inherits the group's authentication.

You can update authentication keys without resetting any IS-IS neighbor sessions. This is referred to as *hitless authentication key rollover*.

Hitless authentication key rollover uses authentication keychains, which consist of the authentication keys that are being updated. The keychain includes multiple keys. Each key in the keychain has a unique start time. At the next key's start time, a rollover occurs from the current key to the next key, and the next key becomes the current key.

You can choose the algorithm through which authentication is established. You can configure MD5 or SHA-1 authentication. You associate a keychain and the authentication algorithm with an IS-IS neighboring session. Each key contains an identifier and a secret password.

The sending peer chooses the active key based on the system time and the start times of the keys in the keychain. The receiving peer determines the key with which it authenticates based on the incoming key identifier.

You can configure either RFC 5304-based encoding or RFC 5310-based encoding for the IS-IS protocol transmission encoding format.

Related Documentation

- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 45](#)

Understanding Loop-Free Alternate Routes for IS-IS

In Junos OS Release 9.5 and later, support for IS-IS loop-free alternate routes enables IP fast-reroute capability for IS-IS. Junos OS precomputes loop-free backup routes for all IS-IS routes. These backup routes are preinstalled in the Packet Forwarding Engine, which performs a local repair and implements the backup path when the link for a primary next hop for a particular route is no longer available. With local repair, the Packet Forwarding Engine can correct a path failure before it receives recomputed paths from the Routing Engine. Local repair reduces the amount of time needed to reroute traffic to less than 50 milliseconds. In contrast, global repair can take up to 800 milliseconds to compute a new route. Local repair and global repair are thus complementary. Local repair enables traffic to continue to be routed using a backup path until global repair is able to calculate a new route.

A loop-free path is one that does not forward traffic back through the routing device to reach a given destination. That is, a neighbor whose shortest path to the destination traverses the routing device is not used as a backup route to that destination. To determine loop-free alternate paths for IS-IS routes, Junos OS runs shortest-path-first (SPF) calculations on each one-hop neighbor. You can enable support for alternate loop-free routes on any IS-IS interface. Because it is common practice to enable LDP on an interface for which IS-IS is already enabled, this feature also provides support for LDP label-switched paths (LSPs).



NOTE: If you enable support for alternate loop-free routes on an interface configured for both LDP and IS-IS, you can use the `traceroute` command to trace the active path to the primary next hop.


The level of backup coverage available through IS-IS routes depends on the actual network topology and is typically less than 100 percent for all destinations on any given routing device. You can extend backup coverage to include RSVP LSPs.

Junos OS provides two mechanisms for route redundancy for IS-IS through alternate loop-free routes: link protection and node-link protection. When you enable link protection or node-link protection on an IS-IS interface, Junos OS creates a single alternate path to the primary next hop for all destination routes that traverse a protected interface. Link protection offers per-link traffic protection. Use link protection when you assume that only a single link might become unavailable but that the neighboring node on the primary path would still be available through another interface.

Node-link protection establishes an alternate path through a different routing device altogether. Use node-link protection when you assume that access to a node is lost when a link is no longer available. As a result, Junos OS calculates a backup path that avoids the primary next-hop routing device. In Junos OS Release 9.4 and earlier, only the RSVP protocol supports Packet Forwarding Engine local repair and fast reroute as well as link protection and node protection.

In [Figure 2 on page 26](#), Case 2 shows how link protection allows source Router A to switch to Link B when the primary next hop Link A to destination Router C fails. However, if Router B fails, Link B also fails, and the protected Link A is lost. If node-link protection is enabled, Router A is able to switch to Link D on Router D and bypass the failed Router B altogether. As shown in Case 1, with node-link protection enabled, Router A has a node-link protection alternate path available through Router D to destination Router C. That means that if Router B fails, Router A can still reach Router C because the path from Router A to Link D remains available as an alternate backup path.

Figure 2: Link Protection and Node-Link Protection Comparison for IS-IS Routes

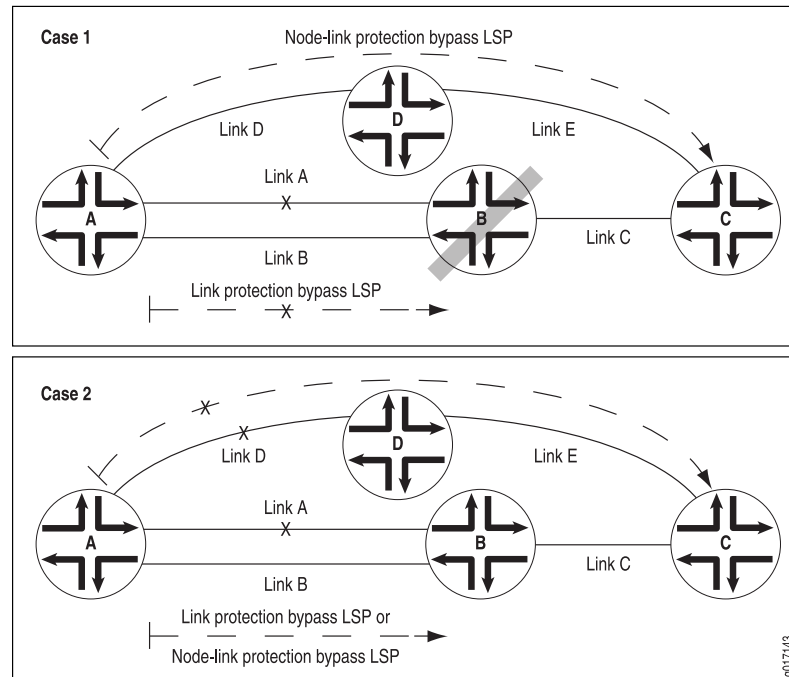

The Junos OS implementation of support for loop-free alternate paths for IS-IS routes is based on the following standards:

- RFC 5286, *Basic Specification for IP Fast-Reroute: Loop-free Alternates*
- RFC 5714, *IP Fast Reroute Framework*

Configuring Link Protection for IS-IS

You can configure link protection on any interface for which IS-IS is enabled. When you enable link protection, Junos OS creates one alternate path to the primary next hop for all destination routes that traverse a protected interface. Link protection assumes that only a single link becomes unavailable but that the neighboring node would still be available through another interface.



NOTE: You must also configure a per-packet load-balancing routing policy to ensure that the routing protocol process installs all the next hops for a given route in the routing table.

To enable link protection, include the **link-protection** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```
[edit]
protocols {
  isis {
    interface interface-name {
```

```

        link-protection;
    }
}

```

Configuring Node-Link Protection for IS-IS

You can configure node-link protection on any interface for which IS-IS is enabled. Node-link protection establishes an alternate path through a different routing device altogether for all destination routes that traverse a protected interface. Node-link protection assumes that the entire routing device, or node, has failed. Junos OS therefore calculates a backup path that avoids the primary next-hop routing device.



NOTE: You must also configure a per-packet load-balancing routing policy to ensure that the routing protocol process installs all the next hops for a given route in the routing table.

To enable node-link protection, include the **node-link-protection** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```

[edit]
protocols {
  isis {
    interface interface-name {
      node-link-protection;
    }
  }
}

```

Excluding an IS-IS Interface as a Backup for Protected Interfaces

By default, all IS-IS interfaces that belong to the master instance or a specific routing instance are eligible as backup interfaces for protected interfaces. You can specify that any IS-IS interface be excluded from functioning as a backup interface to protected interfaces. To exclude an IS-IS interface as a backup interface, include the **no-eligible-backup** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```

[edit]
protocols {
  isis {
    interface interface-name {
      no-eligible-backup;
    }
  }
}

```

Configuring RSVP Label-Switched Paths as Backup Paths for IS-IS

Relying on the shortest-path-first (SPF) calculation of backup paths for one-hop neighbors might result in less than 100 percent backup coverage for a specific network topology. You can enhance coverage of IS-IS and LDP label-switched paths (LSPs) by

configuring RSVP LSPs as backup paths. To configure a specific RSVP LSP as a backup path, include the **backup** statement at the **[edit protocols mpls label-switched-path *lsp-name*]** hierarchy level:

```
[edit]
protocols {
  mpls {
    label-switched-path lsp-name {
      backup;
      to ip-address;
    }
  }
}
```

When configuring an LSP, you must specify the IP address of the egress routing device with the **to** statement. For detailed information about configuring LSPs and RSVP, see the *Junos OS MPLS Applications Library for Routing Devices*.

Using Operational Mode Commands to Monitor Protected IS-IS Routes

You can issue operational mode commands that provide more details about your link-protected and node-link-protected IS-IS routes. The following guidelines explain the type of information available from the output of each command:

- **show isis backup label-switched-path**—Displays which MPLS LSPs have been designated as backup paths and the current status of those LSPs.
- **show isis backup spf results**—Displays SPF calculations for each neighbor for a given destination. Indicates whether a specific interface or node has been designated as a backup path and why. Use the **no-coverage** option to display only those nodes that do not have backup coverage.
- **show isis backup coverage**—Displays the percentage of nodes and prefixes for each type of address family that is protected.
- **show isis interface detail**—Displays the type of protection (link or node-link) applied to each protected interface.

Related Documentation

- [Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 97](#)

PART 1

Configuring IS-IS

- [Configuring IS-IS Authentication on page 29](#)
- [Configuring IS-IS Authentication Without Network-Wide Deployment on page 31](#)
- [Example: Configuring IS-IS on page 31](#)
- [Example: Configuring Multi-Level IS-IS on page 36](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 45](#)
- [Example: Redistributing OSPF Routes into IS-IS on page 50](#)
- [Example: Configuring BFD for IS-IS on page 57](#)
- [Example: Configuring BFD Authentication for IS-IS on page 63](#)
- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 67](#)
- [Example: Configuring IS-IS Multicast Topology on page 77](#)
- [Example: Configuring Link and Node Protection for IS-IS Routes on page 93](#)
- [Example: Configuring an IS-IS Default Route Policy on Logical Systems on page ?](#)
- [Example: Configuring IS-IS for CLNS on page 109](#)
- [Example: Configuring IS-IS Designated Routers on page 113](#)
- [Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking on page ?](#)

Configuring IS-IS Authentication

All IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in the autonomous system (AS) routing. By default, IS-IS authentication is disabled on the routing device.

To configure IS-IS authentication, you must define an authentication password and specify the authentication type.

You can configure one of the following authentication methods:

- **Simple authentication**—Uses a text password that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet. Simple authentication is included for compatibility with existing IS-IS implementations. However, we recommend that you do *not* use this authentication method because it is insecure (the text can be “sniffed”).



CAUTION: A simple password that exceeds 254 characters is truncated.

- HMAC-MD5 authentication—Uses an iterated cryptographic hash function. The receiving routing device uses an authentication key (password) to verify the packet.

You can also configure more fine-grained interface-level authentication for hello packets.

To enable authentication and specify an authentication method, include the **authentication-type** statement, specifying the **simple** or **md5** authentication type:

```
authentication-type authentication;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure a password, include the **authentication-key** statement. The authentication password for all routing devices in a domain must be the same.

```
authentication-key key;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure hitless authentication key rollover, include the **authentication-key-chain (Protocols IS-IS)** statement.

The password can contain up to 255 characters. If you include spaces, enclose all characters in quotation marks (" ").

If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces that are shared with a Junos OS implementation.

Authentication of hello packets, partial sequence number PDU (PSNP), and complete sequence number PDU (CSNP) can be suppressed to enable interoperability with the routing software of different vendors. Different vendors handle authentication in various ways, and suppressing authentication for different PDU types might be the simplest way to allow compatibility within the same network.

To configure IS-IS to generate authenticated packets, but not to check the authentication on received packets, include the **no-authentication-check** statement:

```
no-authentication-check;
```

To suppress authentication of IS-IS hello packets, include the **no-hello-authentication** statement:

```
no-hello-authentication;
```

To suppress authentication of PSNPs, include the **no-psnp-authentication** statement:

```
no-psnp-authentication;
```

To suppress authentication of CSNPs, include the **no-csnp-authentication** statement:

no-csnp-authentication;

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.



NOTE: The **authentication** and the **no-authentication** statements must be configured at the same hierarchy level. Configuring authentication at the [edit protocols isis interface *interface-name*] hierarchy level and configuring **no-authentication** at the [edit protocols isis] hierarchy level has no effect.

**Related
Documentation**

- [Configuring IS-IS Authentication Without Network-Wide Deployment on page 31](#)

Configuring IS-IS Authentication Without Network-Wide Deployment

To allow the use of authentication without requiring network-wide deployment, include the **loose-authentication-check** statement:

loose-authentication-check;

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

**Related
Documentation**

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 23](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 45](#)

Example: Configuring IS-IS

This example shows how to configure IS-IS.

- [Requirements on page 31](#)
- [Overview on page 31](#)
- [Configuration on page 32](#)
- [Verification on page 34](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.


Overview

In this example, you configure the two IS-IS routing devices in a single area. The devices have NET addresses 49.0002.0192.0168.0001.00 and 49.0002.0192.0168.0002.00 on the lo0 interfaces. Additionally, you configure the ISO family on the IS-IS interfaces.

For Junos OS security devices only, you configure the **mode packet-based** statement at the [edit security forwarding-options family iso] hierarchy level.

Figure 3 on page 32 shows the topology used in this example.

Figure 3: Simple IS-IS Topology

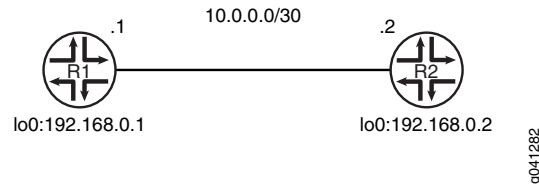

“CLI Quick Configuration” on page 32 shows the configuration for both of the devices in Figure 3 on page 32. The section “Step-by-Step Procedure” on page 32 describes the steps on Device R1.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R2
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

Device R2

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R1
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS:

1. Enable IS-IS if your router is in secure context.


```

[edit security forwarding-options family iso]
user@R1# set mode packet-based
      
```
2. Create the interface that connects to Device R2, and configure the ISO family on the interface.


```

[edit interfaces ge-1/2/0 unit 0]
user@R1# set description to-R2
      
```



```

user@R1# set family inet address 10.0.0.1/30
user@R1# set family iso

```

3. Create the loopback interface, set the IP address, and set the NET address.

```

[edit interfaces lo0 unit 0]
user@R1# set family inet address 192.168.0.1/32
user@R1# set family iso address 49.0002.0192.0168.0001.00

```

4. Enable IS-IS on the interfaces.

```

[edit protocols isis]
user@R1# set interface ge-1/2/0.0
user@R1# set interface lo0.0

```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R1# show security
forwarding-options {
  family iso {
    mode packet-based;
  }
}

user@R1# show interfaces
ge-1/2/0 {
  unit 0 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
  }
}

user@R1# show protocols
isis {
  interface ge-1/2/0.0;
  interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Verifying IS-IS Interface Configuration on page 34](#)
- [Verifying IS-IS Interface Configuration in Detail on page 34](#)
- [Verifying IS-IS Adjacencies on page 35](#)
- [Verifying IS-IS Adjacencies in Detail on page 35](#)

Verifying IS-IS Interface Configuration

Purpose Verify the status of the IS-IS-enabled interfaces.

Action From operational mode, enter the **show isis interface brief** command.

```
user@R1> show isis interface brief
IS-IS interface database:
Interface          L CirID Level 1 DR          Level 2 DR          L1/L2 Metric
lo0.0              3  0x1 Passive                Passive              0/0
ge-1/2/0.0         3  0x1 R2.02                  R2.02                10/10
```

Meaning Verify that the output shows the intended configuration of the interfaces on which IS-IS is enabled.

Verifying IS-IS Interface Configuration in Detail

Purpose Verify the details of IS-IS-enabled interfaces.

Action From operational mode, enter the **show isis interface detail** command.

```
user@R1> show isis interface detail
IS-IS interface database:
lo0.0
  Index: 75, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled
  Adjacency advertisement: Advertise
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                0        64      0 Passive
    2                0        64      0 Passive
ge-1/2/0.0
  Index: 77, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 10 s
  Adjacency advertisement: Advertise
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                1        64      10    9.000    27 R2.02 (not us)
    2                1        64      10    9.000    27 R2.02 (not us)
```

Meaning Check the following output fields and verify that the output shows the intended configuration of IS-IS-enabled interfaces:

- Interface—Interface configured for IS-IS.
- State—Internal implementation information.
- Circuit id—Circuit identifier.

- Circuit type—Configured level of IS-IS:
 - 1—Level 1 only
 - 2—Level 2 only
 - 3—Level 1 and Level 2
- link-state PDU interval—Time between IS-IS information messages.
- L or Level—Type of adjacency:
 - 1—Level 1 only
 - 2—Level 2 only
 - 3—Level 1 and Level 2
- Adjacencies—Adjacencies established on the interface.
- Priority—Priority value established on the interface.
- Metric—Metric value for the interface.
- Hello(s)—Intervals between hello PDUs.
- Hold(s)—Hold time on the interface.

Verifying IS-IS Adjacencies

Purpose Display brief information about IS-IS neighbors.

Action From operational mode, enter the **show isis adjacency brief** command.

```
user@R1> show isis adjacency brief
Interface          System      L State      Hold (secs) SNPA
ge-1/2/0.0         R2          1 Up          6 0:5:85:8f:c8:bd
ge-1/2/0.0         R2          2 Up          6 0:5:85:8f:c8:bd
```

Meaning Verify the adjacent routers in the IS-IS database.

Verifying IS-IS Adjacencies in Detail

Purpose Display extensive information about IS-IS neighbors.

Action From operational mode, enter the **show isis adjacency extensive** command.

```
user@R1> show isis adjacency extensive
R2
Interface: ge-1/2/0.0, Level: 1, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.0.2
Transition log:
When              State      Event          Down reason
Thu May 31 11:18:48 Up          Seenself
```

```
R2
Interface: ge-1/2/0.0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.0.2
Transition log:
When                State      Event      Down reason
Thu May 31 11:18:48  Up        SeenseIf
```

Meaning Check the following fields and verify the adjacency information about IS-IS neighbors:

- Interface—Interface through which the neighbor is reachable.
- L or Level—Configured level of IS-IS:
 - 1—Level 1 only
 - 2—Level 2 only
 - 3—Level 1 and Level 2

An exclamation point before the level number indicates that the adjacency is missing an IP address.

- State—Status of the adjacency: **Up**, **Down**, **New**, **One-way**, **Initializing**, or **Rejected**.
- Event—Message that identifies the cause of a state.
- Down reason—Reason the adjacency is down.
- Restart capable—A neighbor is configured for graceful restart.
- Transition log—List of transitions including **When**, **State**, and **Reason**.

**Related
Documentation**

- *Understanding IS-IS Configuration*
- *Example: Configuring IS-IS for GRES with Graceful Restart*
- [Configuring Designated Router Election Priority for IS-IS on page 113](#)

Example: Configuring Multi-Level IS-IS

This example shows how to configure a multi-level IS-IS topology.

- [Requirements on page 36](#)
- [Overview on page 37](#)
- [Configuration on page 38](#)
- [Verification on page 42](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview


Like OSPF, the IS-IS protocol supports the partitioning of a routing domain into multiple areas with levels that control inter-area flooding. The use of multiple levels improves protocol scalability, as level 2 (backbone) link-state protocol data units (LSPs) are normally not flooded into a level 1 area.

An IS-IS level 2 area is analogous to the OSPF backbone area (0), while a level 1 area operates much like an OSPF totally stubby area, in that a default route is normally used to reach both inter-level and AS external routes.

Unlike OSPF, IS-IS area boundaries occur between routers, such that a given routing device is always wholly contained within a particular area. Level 1 adjacencies can be formed between routers that share a common area number, while a level 2 adjacency can be formed between routers that might or might not share an area number.

Figure 4 on page 37 shows the topology used in this example.

Figure 4: IS-IS Multi-Level Topology

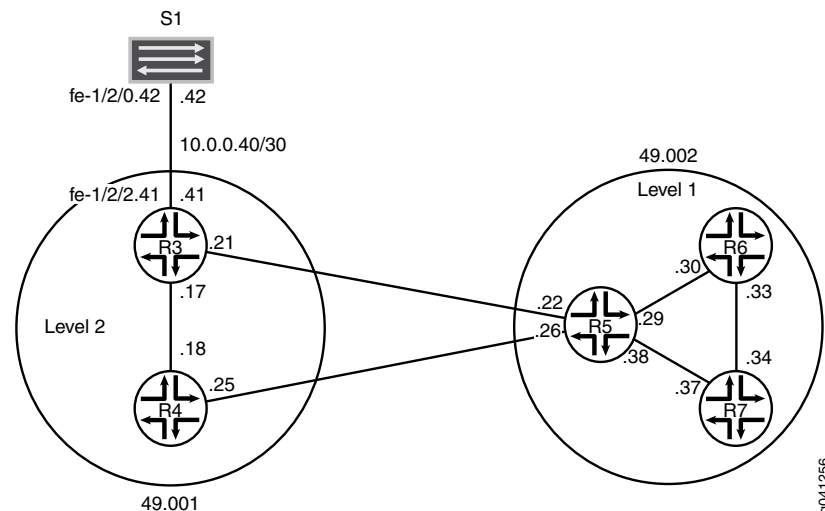

"CLI Quick Configuration" on page 38 shows the configuration for all of the devices in Figure 4 on page 37. The section "Step-by-Step Procedure" on page 39 describes the steps on Device R5.

This example has the following characteristics:

- Device R5 functions as a level 1/level 2 router to interconnect the level 2 backbone area 49.0001 and the level 1 area 49.0002 containing Device R6 and Device R7.
- The system ID is based on the devices' IPv4 lo0 addresses.
- Loss of any individual interface does not totally disrupt the IS-IS operation.
- The IPv4 lo0 addresses of all routers are reachable through IS-IS.

- The link between Device R3 and Device S1 appears in area 49.0001 as an intra-area route. No IS-IS adjacencies can be established on this interface. This is accomplished by configuring the **passive** statement on Device R3's interface to Device S1.
- The loopback addresses of level 2 devices do not appear in a level 1 area.
- There is only one adjacency for each device pairing.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R3

```
set interfaces fe-1/2/0 unit 17 description to-R4
set interfaces fe-1/2/0 unit 17 family inet address 10.0.0.17/30
set interfaces fe-1/2/0 unit 17 family iso
set interfaces fe-1/2/1 unit 21 description to-R5
set interfaces fe-1/2/1 unit 21 family inet address 10.0.0.21/30
set interfaces fe-1/2/1 unit 21 family iso
set interfaces fe-1/2/2 unit 41 family inet address 10.0.0.41/30
set interfaces fe-1/2/2 unit 41 description to-S1
set interfaces lo0 unit 3 family inet address 192.168.0.3/32
set interfaces lo0 unit 3 family iso address 49.0001.0192.0168.0003.00
set protocols isis interface fe-1/2/0.17 level 1 disable
set protocols isis interface fe-1/2/1.21 level 1 disable
set protocols isis interface lo0.3 level 1 disable
set protocols isis interface fe-1/2/2.41 passive
```

Device R4

```
set interfaces fe-1/2/0 unit 18 description to-R3
set interfaces fe-1/2/0 unit 18 family inet address 10.0.0.18/30
set interfaces fe-1/2/0 unit 18 family iso
set interfaces fe-1/2/1 unit 25 description to-R5
set interfaces fe-1/2/1 unit 25 family inet address 10.0.0.25/30
set interfaces fe-1/2/1 unit 25 family iso
set interfaces lo0 unit 4 family inet address 192.168.0.4/32
set interfaces lo0 unit 4 family iso address 49.0001.0192.0168.0004.00
set protocols isis interface fe-1/2/0.18 level 1 disable
set protocols isis interface fe-1/2/1.25 level 1 disable
set protocols isis interface lo0.4 level 1 disable
```

Device R5

```
set interfaces fe-1/2/0 unit 22 description to-R3
set interfaces fe-1/2/0 unit 22 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 22 family iso
set interfaces fe-1/2/1 unit 26 description to-R4
set interfaces fe-1/2/1 unit 26 family inet address 10.0.0.26/30
set interfaces fe-1/2/1 unit 26 family iso
set interfaces fe-1/2/2 unit 29 description to-R6
set interfaces fe-1/2/2 unit 29 family inet address 10.0.0.29/30
set interfaces fe-1/2/2 unit 29 family iso
set interfaces fe-1/2/3 unit 38 description to-R7
set interfaces fe-1/2/3 unit 38 family inet address 10.0.0.38/30
set interfaces fe-1/2/3 unit 38 family iso
set interfaces lo0 unit 5 family inet address 192.168.0.5/32
```

```

set interfaces lo0 unit 5 family iso address 49.0002.0192.0168.0005.00
set protocols isis interface fe-1/2/0.22 level 1 disable
set protocols isis interface fe-1/2/0.26 level 1 disable
set protocols isis interface fe-1/2/0.29 level 2 disable
set protocols isis interface fe-1/2/3.38 level 2 disable
set protocols isis interface lo0.5 level 1 disable

```

Device R6

```

set interfaces fe-1/2/0 unit 30 description to-R5
set interfaces fe-1/2/0 unit 30 family inet address 10.0.0.30/30
set interfaces fe-1/2/0 unit 30 family iso
set interfaces fe-1/2/1 unit 33 description to-R7
set interfaces fe-1/2/1 unit 33 family inet address 10.0.0.33/30
set interfaces fe-1/2/1 unit 33 family iso
set interfaces lo0 unit 6 family inet address 192.168.0.6/32
set interfaces lo0 unit 6 family iso address 49.0002.0192.0168.0006.00
set protocols isis interface fe-1/2/0.30 level 2 disable
set protocols isis interface fe-1/2/1.33 level 2 disable
set protocols isis interface lo0.6 level 2 disable

```

Device R7

```

set interfaces fe-1/2/0 unit 34 description to-R6
set interfaces fe-1/2/0 unit 34 family inet address 10.0.0.34/30
set interfaces fe-1/2/0 unit 34 family iso
set interfaces fe-1/2/1 unit 37 description to-R5
set interfaces fe-1/2/1 unit 37 family inet address 10.0.0.37/30
set interfaces fe-1/2/1 unit 37 family iso
set interfaces lo0 unit 7 family inet address 192.168.0.7/32
set interfaces lo0 unit 7 family iso address 49.0002.0192.0168.0007.00
set protocols isis interface fe-1/2/0.34 level 2 disable
set protocols isis interface fe-1/2/1.37 level 2 disable
set protocols isis interface lo0.7 level 2 disable

```

Device S1

```

set interfaces fe-1/2/0 unit 42 family inet address 10.0.0.42/30
set interfaces fe-1/2/0 unit 42 description to-R3

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the network interfaces.

Enable IS-IS on the interfaces by including the ISO address family on each interface.

```

[edit interfaces]
user@R5# set fe-1/2/0 unit 22 description to-R3
user@R5# set fe-1/2/0 unit 22 family inet address 10.0.0.22/30
user@R5# set fe-1/2/0 unit 22 family iso

```

```

user@R5# set fe-1/2/1 unit 26 description to-R4
user@R5# set fe-1/2/1 unit 26 family inet address 10.0.0.26/30
user@R5# set fe-1/2/1 unit 26 family iso

```

```

user@R5# set fe-1/2/2 unit 29 description to-R6
user@R5# set fe-1/2/2 unit 29 family inet address 10.0.0.29/30

```

```
user@R5# set fe-1/2/2 unit 29 family iso
```

```
user@R5# set fe-1/2/3 unit 38 description to-R7
```

```
user@R5# set fe-1/2/3 unit 38 family inet address 10.0.0.38/30
```

```
user@R5# set fe-1/2/3 unit 38 family iso
```

2. Configure two loopback interface addresses.

One address is for IPv4.

The other is for the IS-IS area 49.0002 so that Device R5 can form adjacencies with the other level 1 devices in area 49.0002. Even though Device R5's NET identifies itself as belonging to the level 1 area 49.0002, its loopback interface is not configured as a level 1 interface. Doing so would cause the route to Device R5's loopback to be injected into the level 1 area.

```
[edit interfaces lo0 unit 5]
```

```
user@R5# set family inet address 192.168.0.5/32
```

```
user@R5# set family iso address 49.0002.0192.0168.0005.00
```

3. Specify the IS-IS level on a per-interface basis.

Device R5 becomes adjacent to the other routing devices on the same level on each link.

By default, IS-IS is enabled for IS-IS areas on all interfaces on which the ISO protocol family is enabled (at the **[edit interfaces *interface-name* unit *logical-unit-number*]** hierarchy level). To disable IS-IS at any particular level on an interface, include the **disable** statement.

Device R5's loopback interface is configured to run level 2 only. If level 1 operation were enabled on lo0.5, Device R5 would include its loopback address in its level 1 LSP, which is incorrect for this example in which the loopback addresses of level 2 devices must not appear in a level 1 area.

Unlike OSPF, you must explicitly list the router's lo0 interface at the **[edit protocols isis]** hierarchy level, because this interface is the source of the router's NET, and therefore must be configured as an IS-IS interface. In IS-IS, the lo0 interface operates in the passive mode by default, which is ideal because adjacency formation can never occur on a virtual interface.

```
[edit protocols isis]
```

```
user@R5# set interface fe-1/2/0.22 level 1 disable
```

```
user@R5# set interface fe-1/2/0.26 level 1 disable
```

```
user@R5# set interface fe-1/2/0.29 level 2 disable
```

```
user@R5# set interface fe-1/2/3.38 level 2 disable
```

```
user@R5# set interface lo0.5 level 1 disable
```

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R5# show interfaces
```

```
fe-1/2/0 {
```

```
unit 22 {
```

```
description to-R3;
```



```

        encapsulation ethernet;
        peer-unit 21;
        family inet {
            address 10.0.0.22/30;
        }
        family iso;
    }
}
fe-1/2/1 {
    unit 26 {
        description to-R4;
        encapsulation ethernet;
        peer-unit 25;
        family inet {
            address 10.0.0.26/30;
        }
        family iso;
    }
}
fe-1/2/2 {
    unit 29 {
        description to-R6;
        encapsulation ethernet;
        peer-unit 30;
        family inet {
            address 10.0.0.29/30;
        }
        family iso;
    }
}
fe-1/2/3 {
    unit 38 {
        description to-R7;
        encapsulation ethernet;
        peer-unit 37;
        family inet {
            address 10.0.0.38/30;
        }
        family iso;
    }
}
lo0 {
    unit 5 {
        family inet {
            address 192.168.0.5/32;
        }
        family iso {
            address 49.0002.0192.0168.0005.00;
        }
    }
}

user@R5# show protocols
isis {
    interface fe-1/2/0.22 {
        level 1 disable;
    }
}

```

```
}
interface fe-1/2/0.26 {
    level 1 disable;
}
interface fe-1/2/0.29 {
    level 2 disable;
}
interface fe-1/2/3.38 {
    level 2 disable;
}
interface lo0.5 {
    level 1 disable;
}
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Checking Interface-to-Area Associations on page 42](#)
- [Verifying IS-IS Adjacencies on page 42](#)
- [Verifying IS-IS Adjacencies on page 43](#)

Checking Interface-to-Area Associations

Purpose Make sure that the interface-to-area associations are configured as expected.

Action From operational mode, enter the **show isis interface** command.

```
user@R5> show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
lo0.5              0  0x1 Disabled           Passive          0/0
fe-1/2/0.22        2  0x3 Disabled           R5.03           10/10
fe-1/2/0.26        2  0x2 Disabled           R5.02           10/10
fe-1/2/0.29        1  0x1 R6.02             Disabled         10/10
fe-1/2/3.38        1  0x4 R5.04             Disabled         10/10
```

Meaning The output shows that Device R5's interfaces have been correctly configured with the ISO family, and that the interfaces have been placed into the correct levels.

You can also see that Device R5 has elected itself as the DIS on its broadcast-capable IS-IS interfaces.

Verifying IS-IS Adjacencies

Purpose Verify that the expected adjacencies have formed between Device R5 and its IS-IS neighbors.

Action From operational mode, enter the **show isis adjacency detail** command.

```
user@R5> show isis adjacency detail
```

```

R3
Interface: fe-1/2/0.22, Level: 2, State: Up, Expires in 25 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:31 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.03, IP addresses: 10.0.0.21

R4
Interface: fe-1/2/0.26, Level: 2, State: Up, Expires in 24 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:36 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.02, IP addresses: 10.0.0.25

R6
Interface: fe-1/2/0.29, Level: 1, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:20:24 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R6.02, IP addresses: 10.0.0.30

R7
Interface: fe-1/2/3.38, Level: 1, State: Up, Expires in 21 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:29 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.04, IP addresses: 10.0.0.37

```

Meaning These results confirm that Device R5 has two level 2 adjacencies and two level 1 adjacencies.

Verifying IS-IS Adjacencies

Purpose Because Device R5 is a L1/L2 attached router, you can examine the level 1 link-state database associated with area 49.0002 to confirm that loopback addresses from backbone routers are not being advertised into the level 1 area.

Action From operational mode, enter the **show isis database detail** command.

```

user@R5> show isis database detail
IS-IS level 1 link-state database:

R5.00-00 Sequence: 0x19, Checksum: 0x7488, Lifetime: 727 secs
IS neighbor: R5.04                      Metric:      10
IS neighbor: R6.02                      Metric:      10
IP prefix: 10.0.0.28/30                  Metric:      10 Internal Up
IP prefix: 10.0.0.36/30                  Metric:      10 Internal Up

R5.04-00 Sequence: 0x14, Checksum: 0x2668, Lifetime: 821 secs
IS neighbor: R5.00                      Metric:       0
IS neighbor: R7.00                      Metric:       0

R6.00-00 Sequence: 0x17, Checksum: 0xa65, Lifetime: 774 secs
IS neighbor: R6.02                      Metric:      10
IS neighbor: R7.02                      Metric:      10

```

```

IP prefix: 10.0.0.28/30          Metric:      10 Internal Up
IP prefix: 10.0.0.32/30          Metric:      10 Internal Up
IP prefix: 192.168.0.6/32        Metric:       0 Internal Up

R6.02-00 Sequence: 0x13, Checksum: 0xd1c0, Lifetime: 908 secs
IS neighbor: R5.00              Metric:       0
IS neighbor: R6.00              Metric:       0

R7.00-00 Sequence: 0x17, Checksum: 0xe39, Lifetime: 775 secs
IS neighbor: R5.04              Metric:      10
IS neighbor: R7.02              Metric:      10
IP prefix: 10.0.0.32/30          Metric:      10 Internal Up
IP prefix: 10.0.0.36/30          Metric:      10 Internal Up
IP prefix: 192.168.0.7/32        Metric:       0 Internal Up

R7.02-00 Sequence: 0x13, Checksum: 0x404d, Lifetime: 966 secs
IS neighbor: R6.00              Metric:       0
IS neighbor: R7.00              Metric:       0

IS-IS level 2 link-state database:

R3.00-00 Sequence: 0x17, Checksum: 0x5f84, Lifetime: 1085 secs
IS neighbor: R4.02              Metric:      10
IS neighbor: R5.03              Metric:      10
IP prefix: 10.0.0.16/30          Metric:      10 Internal Up
IP prefix: 10.0.0.20/30          Metric:      10 Internal Up
IP prefix: 10.0.0.40/30          Metric:      10 Internal Up
IP prefix: 192.168.0.3/32        Metric:       0 Internal Up

R4.00-00 Sequence: 0x17, Checksum: 0xab3a, Lifetime: 949 secs
IS neighbor: R4.02              Metric:      10
IS neighbor: R5.02              Metric:      10
IP prefix: 10.0.0.16/30          Metric:      10 Internal Up
IP prefix: 10.0.0.24/30          Metric:      10 Internal Up
IP prefix: 192.168.0.4/32        Metric:       0 Internal Up

R4.02-00 Sequence: 0x14, Checksum: 0xf2a8, Lifetime: 1022 secs
IS neighbor: R3.00              Metric:       0
IS neighbor: R4.00              Metric:       0

R5.00-00 Sequence: 0x1f, Checksum: 0x20d7, Lifetime: 821 secs
IS neighbor: R5.02              Metric:      10
IS neighbor: R5.03              Metric:      10
IP prefix: 10.0.0.20/30          Metric:      10 Internal Up
IP prefix: 10.0.0.24/30          Metric:      10 Internal Up
IP prefix: 10.0.0.28/30          Metric:      10 Internal Up
IP prefix: 10.0.0.32/30          Metric:      20 Internal Up
IP prefix: 10.0.0.36/30          Metric:      10 Internal Up
IP prefix: 192.168.0.5/32        Metric:       0 Internal Up
IP prefix: 192.168.0.6/32        Metric:      10 Internal Up
IP prefix: 192.168.0.7/32        Metric:      10 Internal Up

R5.02-00 Sequence: 0x14, Checksum: 0x6135, Lifetime: 977 secs
IS neighbor: R4.00              Metric:       0
IS neighbor: R5.00              Metric:       0

R5.03-00 Sequence: 0x14, Checksum: 0x1483, Lifetime: 1091 secs
IS neighbor: R3.00              Metric:       0
IS neighbor: R5.00              Metric:       0

```

Meaning This display indicates that Device R5's loopback interface is correctly configured to run level 2 only. Had level 1 operation been enabled on lo0.5, Device R5 would have then included its loopback address in its level 1 LSP.

You can also see that Device R5 has level 2 LSPs, received from its adjacent neighbors.

Like an OSPF totally stubby area, no backbone (level 2) or external prefixes are leaked into a level 1 area, by default. Level 1 prefixes are leaked up into the IS-IS backbone, however, as can be seen in Device R5's level 2 LSP.

Related Documentation

- [IS-IS Overview on page 17](#)

Example: Configuring Hitless Authentication Key Rollover for IS-IS

This example shows how to configure hitless authentication key rollover for IS-IS.

- [Requirements on page 45](#)
- [Overview on page 45](#)
- [Configuration on page 46](#)
- [Verification on page 50](#)

Requirements

No special configuration beyond device initialization is required before configuring hitless authentication key rollover for IS-IS.

Overview

Authentication guarantees that only trusted routers participate in routing updates. This keychain authentication method is referred to as hitless because the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol. Junos OS supports both RFC 5304, *IS-IS Cryptographic Authentication* and RFC 5310, *IS-IS Generic Cryptographic Authentication*.

This example includes the following statements for configuring the keychain:

- **algorithm**—For each key in the keychain, you can specify an encryption algorithm. The algorithm can be SHA-1 or MD-5.
- **key**—A keychain can have multiple keys. Each key within a keychain must be identified by a unique integer value. The range of valid identifier values is from 0 through 63.
- **key-chain**—For each keychain, you must specify a name. This example defines two keychains: **base-key-global** and **base-key-inter**.
- **options**—For each key in the keychain, you can specify the encoding for the message authentication code: **isis-enhanced** or **basic**. The basic (RFC 5304) operation is enabled by default.

When you configure the **isis-enhanced** option, Junos OS sends RFC 5310-encoded routing protocol packets and accepts both RFC 5304-encoded and RFC 5310-encoded routing protocol packets that are received from other devices.

When you configure **basic** (or do not include the **options** statement in the key configuration) Junos OS sends and receives RFC 5304-encoded routing protocols packets, and drops 5310-encoded routing protocol packets that are received from other devices.

Because this setting is for IS-IS only, the TCP and the BFD protocols ignore the encoding option configured in the key.

- **secret**—For each key in the keychain, you must set a secret password. This password can be entered in either encrypted or plain text format in the **secret** statement. It is always displayed in encrypted format.
- **start-time**—Each key must specify a start time in UTC format. Control gets passed from one key to the next. When a configured start time arrives (based on the routing device's clock), the key with that start time becomes active. Start times are specified in the local time zone for a routing device and must be unique within the key chain.


You can apply a keychain globally to all interfaces or more granularly to specific interfaces.

This example includes the following statements for applying the keychain to all interfaces or to particular interfaces:

- **authentication-key-chain**—Enables you to apply a keychain at the global IS-IS level for all Level 1 or all Level 2 interfaces.
- **hello-authentication-key-chain**—Enables you to apply a keychain at the individual IS-IS interface level. The interface configuration overrides the global configuration.

Figure 5 on page 46 shows the topology used in the example.

Figure 5: Hitless Authentication Key Rollover for IS-IS

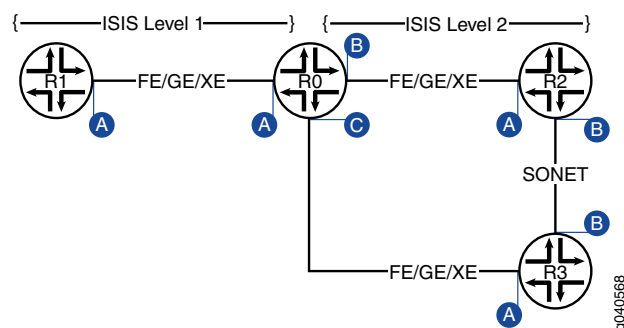

This example shows the configuration for Router R0.

Configuration

CLI Quick Configuration

To quickly configure the hitless authentication key rollover for IS-IS, copy the following commands and paste the commands into the CLI.

[edit]

```

set interfaces ge-0/0/0 unit 0 description "interface A"
set interfaces ge-0/0/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family inet6 address fe80::200:f8ff:fe21:67cf/128
set interfaces ge-0/0/1 unit 0 description "interface B"
set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family inet6 address 10FB::C:ABC:1FOC:44DA/128
set interfaces ge-0/0/2 unit 0 description "interface C"
set interfaces ge-0/0/2 unit 0 family inet address 10.0.0.9/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128
set security authentication-key-chains key-chain base-key-global key 63 secret
"$9$jkqfTQnCpBDict"
set security authentication-key-chains key-chain base-key-global key 63 start-time
"2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-global key 63 algorithm
hmac-sha-1
set security authentication-key-chains key-chain base-key-global key 63 options
isis-enhanced
set security authentication-key-chains key-chain base-key-inter key 0 secret
"$9$8sgx7Vws4ZDkWLGD"
set security authentication-key-chains key-chain base-key-inter key 0 start-time
"2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-inter key 0 algorithm md5
set security authentication-key-chains key-chain base-key-inter key 0 options basic
set protocols isis level 1 authentication-key-chain base-key-global
set protocols isis interface ge-0/0/0.0 level 1 hello-authentication-key-chain
base-key-inter

```

Step-by-Step Procedure To configure hitless authentication key rollover for IS-IS:

1. Configure the Router R0 interfaces.

```

[edit]
user@host# edit interfaces ge-0/0/0 unit 0
[edit interfaces ge-0/0/0 unit 0]
user@host# set description "interface A"
user@host# set family inet address 10.0.0.1/30
user@host# set family iso
user@host# set family inet6 address fe80::200:f8ff:fe21:67cf/128
user@host# exit
[edit]
user@host# edit interfaces ge-0/0/1 unit 0
[edit interfaces ge-0/0/1 unit 0]
user@host# set interfaces ge-0/0/1 unit 0 description "interface B"
user@host# set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
user@host# set interfaces ge-0/0/1 unit 0 family iso
user@host# set interfaces ge-0/0/1 unit 0 family inet6 address
10FB::C:ABC:1FOC:44DA/128
user@host# exit
[edit]
user@host# edit interfaces ge-0/0/2 unit 0
[edit interfaces ge-0/0/2 unit 0]
user@host# set description "interface C"
user@host# set family inet address 10.0.0.9/30

```

```
user@host# set interfaces ge-0/0/2 unit 0 family iso
user@host# set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128
user@host# exit
```

2. Configure one or more authentication keys.

```
[edit]
user@host# edit security authentication-key-chains key-chain base-key-global
[edit security authentication-key-chains key-chain base-key-global]
user@host# set key 63 secret "$9$jfkqfTQnCpBDiCt"
user@host# set key 63 start-time "2011-8-6.06:54:00-0700"
user@host# set key 63 algorithm hmac-sha-1
user@host# set key 63 options isis-enhanced
user@host# exit
[edit]
user@host# edit security authentication-key-chains key-chain base-key-inter
[edit security authentication-key-chains key-chain base-key-inter]
user@host# set key 0 secret "$9$8sgx7Vws4ZDkWLGD"
user@host# set key 0 start-time "2011-8-6.06:54:00-0700"
user@host# set key 0 algorithm md5
user@host# set key 0 options basic
user@host# exit
```

3. Apply the base-key-global keychain to all Level 1 IS-IS interfaces on Router R0.

```
[edit]
user@host# edit protocols isis level 1
[edit protocols isis level 1]
set authentication-key-chain base-key-global
user@host# exit
```

4. Apply the base-key-inter keychain to the **ge-0/0/0.0** interface on Router R0.

```
[edit]
user@host# edit protocols isis interface ge-0/0/0.0 level 1
[edit protocols isis interface ge-0/0/0.0 level 1]
set hello-authentication-key-chain base-key-inter
user@host# exit
```

5. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

Results

Confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands.

```
user@host# show interfaces
ge-0/0/0 {
  unit 0 {
    description "interface A";
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
```



```

        family inet6 {
            address fe80::200:f8ff:fe21:67cf/128;
        }
    }
}
ge-0/0/1 {
    unit 0 {
        description "interface B";
        family inet {
            address 10.0.0.5/30;
        }
        family iso;
        family inet6 {
            address 10FB::C:ABC:1F0C:44DA/128;
        }
    }
}
ge-0/0/2 {
    unit 0 {
        description "interface C";
        family inet {
            address 10.0.0.9/30;
        }
        family iso;
        family inet6 {
            address ff06::c3/128;
        }
    }
}
}

user@host# show protocols
isis {
    level 1 authentication-key-chain base-key-global;
    interface ge-0/0/0.0 {
        level 1 hello-authentication-key-chain base-key-inter;
    }
}

user@host# show security
authentication-key-chains {
    key-chain base-key-global {
        key 63 {
            secret "$9$jfkqfTQnCpBDiCt"; ## SECRET-DATA
            start-time "2011-8-6.06:54:00-0700";
            algorithm hmac-sha-1;
            options isis-enhanced;
        }
    }
    key-chain base-key-inter {
        key 0 {
            secret "$9$8sgx7Vws4ZDkWLGD"; ## SECRET-DATA
            start-time "2011-8-6.06:54:00-0700";
            algorithm md5;
            options basic;
        }
    }
}
}

```

Verification

To verify the configuration, run the following commands:

- `show isis authentication`
- `show security keychain`

Related Documentation

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 23](#)

Example: Redistributing OSPF Routes into IS-IS

This example shows how to redistribute OSPF routes into an IS-IS network.

- [Requirements on page 50](#)
- [Overview on page 50](#)
- [Configuration on page 50](#)
- [Verification on page 56](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

Export policy can be applied to IS-IS to facilitate route redistribution.

Junos OS does not support the application of import policy for link-state routing protocols like IS-IS because such policies can lead to inconsistent link-state database (LSDB) entries, which in turn can result in routing inconsistencies.

In this example, OSPF routes 192.168.0/24 through 192.168.3/24 are redistributed into IS-IS area 49.0002 from both from Device R2.

In addition, policies are configured to ensure that Device R1 can reach destinations on the 10.0.0.44/30 network, and that Device R3 can reach destinations on the 10.0.0.36/30 network. This enables end-to-end reachability.

[Figure 6 on page 50](#) shows the topology used in this example.

[“CLI Quick Configuration” on page 50](#) shows the configuration for all of the devices in [Figure 6 on page 50](#). The section [“Step-by-Step Procedure” on page 52](#) describes the steps on Device R2. [“Step-by-Step Procedure” on page 53](#) describes the steps on Device R3.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network

configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```

set interfaces fe-1/2/0 unit 0 description to-R7
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.38/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 172.16.3.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0305.00
set protocols isis interface fe-1/2/0.38
set protocols isis interface lo0.0

```

Device R2

```

set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/0 unit 0 description to-OSPF-network
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.45/30
set interfaces lo0 unit 0 family inet address 172.16.9.7/32
set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0907.00
set protocols isis export ospf-isis
set protocols isis export send-direct-to-isis-neighbors
set protocols isis interface fe-1/2/1.0
set protocols isis interface lo0.0
set protocols ospf export send-direct-to-ospf-neighbors
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0
set protocols ospf area 0.0.0.1 interface lo0.0 passive
set policy-options policy-statement ospf-isis term 1 from protocol ospf
set policy-options policy-statement ospf-isis term 1 from route-filter 192.168.0.0/22
  longer
set policy-options policy-statement ospf-isis term 1 then accept
set policy-options policy-statement send-direct-to-isis-neighbors from protocol direct
set policy-options policy-statement send-direct-to-isis-neighbors from route-filter
  10.0.0.44/30 exact
set policy-options policy-statement send-direct-to-isis-neighbors then accept
set policy-options policy-statement send-direct-to-ospf-neighbors from protocol direct
set policy-options policy-statement send-direct-to-ospf-neighbors from route-filter
  10.0.0.36/30 exact
set policy-options policy-statement send-direct-to-ospf-neighbors then accept

```

Device R3

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.46/30
set interfaces lo0 unit 0 family inet address 192.168.1.1/32
set interfaces lo0 unit 0 family inet address 192.168.2.1/32
set interfaces lo0 unit 0 family inet address 192.168.3.1/32
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set protocols ospf export ospf
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0
set protocols ospf area 0.0.0.1 interface lo0.0 passive
set policy-options policy-statement ospf term 1 from protocol static
set policy-options policy-statement ospf term 1 then accept
set routing-options static route 192.168.0.0/24 discard
set routing-options static route 192.168.1.0/24 discard
set routing-options static route 192.168.3.0/24 discard
set routing-options static route 192.168.2.0/24 discard

```

**Step-by-Step
Procedure**

To configure Device R2:

1. Configure the network interfaces.

```
[edit interfaces]
user@R2# set fe-1/2/1 unit 0 description to-R5
user@R2# set fe-1/2/1 unit 0 family inet address 10.0.0.37/30
user@R2# set fe-1/2/1 unit 0 family iso
user@R2# set fe-1/2/0 unit 0 description to-OSPF-network
user@R2# set fe-1/2/0 unit 0 family inet address 10.0.0.45/30
user@R2# set lo0 unit 0 family inet address 172.16.9.7/32
user@R2# set lo0 unit 0 family iso address 49.0002.0172.0016.0907.00
```
2. Configure IS-IS on the interface facing Device R1 and the loopback interface.

```
[edit protocols isis]
user@R2# set interface fe-1/2/1.0
user@R2# set interface lo0.0
```
3. Configure the policy that enables Device R1 to reach the 10.0.0.44/30 network.

```
[edit policy-options policy-statement send-direct-to-isis-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.44/30 exact
user@R2# set then accept
```
4. Apply the policy that enables Device R1 to reach the 10.0.0.44/30 network.

```
[edit protocols isis]
user@R2# set export send-direct-to-isis-neighbors
```
5. Configure OSPF on the interfaces.

```
[edit protocols ospf]
user@R2# set area 0.0.0.1 interface fe-1/2/0.0
user@R2# set area 0.0.0.1 interface lo0.0 passive
```
6. Configure the OSPF route redistribution policy.

```
[edit policy-options policy-statement ospf-isis term 1]
user@R2# set from protocol ospf
user@R2# set from route-filter 192.168.0.0/22 longer
user@R2# set then accept
```
7. Apply the OSPF route redistribution policy to the IS-IS instance.

```
[edit protocols isis]
user@R2# set export ospf-isis
```
8. Configure the policy that enables Device R3 to reach the 10.0.0.36/30 network.

```
[edit policy-options policy-statement send-direct-to-ospf-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.36/30 exact
user@R2# set then accept
```
9. Apply the policy that enables Device R3 to reach the 10.0.0.36/30 network.

```
[edit protocols ospf]
user@R2# set export send-direct-to-ospf-neighbors
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the network interfaces.

Multiple addresses are configured on the loopback interface to simulate multiple route destinations.

```
[edit interfaces]
user@R3# set fe-1/2/0 unit 0 family inet address 10.0.0.46/30
user@R3# set lo0 unit 0 family inet address 192.168.1.1/32
user@R3# set lo0 unit 0 family inet address 192.168.2.1/32
user@R3# set lo0 unit 0 family inet address 192.168.3.1/32
user@R3# set lo0 unit 0 family inet address 192.168.0.1/32
```

2. Configure static routes to the loopback interface addresses.

These are the routes that are redistributed into IS-IS.

```
[edit routing-options static]
user@R3# set route 192.168.0.0/24 discard
user@R3# set route 192.168.1.0/24 discard
user@R3# set route 192.168.3.0/24 discard
user@R3# set route 192.168.2.0/24 discard
```

3. Configure OSPF on the interfaces.

```
[edit protocols ospf area 0.0.0.1]
user@R3# set interface fe-1/2/0.0
user@R3# set interface lo0.0 passive
```

4. Configure the OSPF policy to export the static routes.

```
[edit policy-options policy-statement ospf term 1]
user@R3# set from protocol static
user@R3# set then accept
```

5. Apply the OSPF export policy.

```
[edit protocols ospf]
user@R3# set export ospf
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
Device R2 user@R2# show interfaces
fe-1/2/1 {
  unit 37 {
    description to-R5;
    family inet {
      address 10.0.0.37/30;
    }
    family iso;
  }
}
```

```
}
fe-1/2/0 {
  unit 45 {
    description to-OSPF-network;
    family inet {
      address 10.0.0.45/30;
    }
  }
}
lo0 {
  unit 0 {
    family inet {
      address 172.16.9.7/32;
    }
    family iso {
      address 49.0002.0172.0016.0907.00;
    }
  }
}

user@R2# show protocols
isis {
  export [ ospf-isis send-direct-to-isis-neighbors ];
  interface fe-1/2/1.0;
  interface lo0.0;
}
ospf {
  export send-direct-to-ospf-neighbors;
  area 0.0.0.1 {
    interface fe-1/2/0.0;
    interface lo0.0 {
      passive;
    }
  }
}

user@R2# show policy-options
policy-statement ospf-isis {
  term 1 {
    from {
      protocol ospf;
      route-filter 192.168.0.0/22 longer;
    }
    then accept;
  }
}
policy-statement send-direct-to-isis-neighbors {
  from {
    protocol direct;
    route-filter 10.0.0.44/30 exact;
  }
  then accept;
}
policy-statement send-direct-to-ospf-neighbors {
  from {
    protocol direct;
```

```

        route-filter 10.0.0.36/30 exact;
    }
    then accept;
}

Device R3 user@R3# show interfaces
fe-1/2/0 {
    unit 46 {
        family inet {
            address 10.0.0.46/30;
        }
    }
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.1.1/32;
            address 192.168.2.1/32;
            address 192.168.3.1/32;
            address 192.168.0.1/32;
        }
    }
}

user@R3# show protocols
ospf {
    export ospf;
    area 0.0.0.1 {
        interface fe-1/2/0.0;
        interface lo0.0 {
            passive;
        }
    }
}

user@R3# show policy-options
policy-statement ospf {
    term 1 {
        from protocol static;
        then accept;
    }
}

user@R3# show routing-options
static {
    route 192.168.0.0/24 discard;
    route 192.168.1.0/24 discard;
    route 192.168.3.0/24 discard;
    route 192.168.2.0/24 discard;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Verifying OSPF Route Advertisement on page 56](#)
- [Verifying Route Redistribution on page 56](#)
- [Verifying Connectivity on page 57](#)

Verifying OSPF Route Advertisement

Purpose Make sure that the expected routes are advertised by OSPF.

Action From operational mode on Device R2, enter the **show route protocol ospf** command.

```
user@R2> show route protocol ospf
```

```
inet.0: 15 destinations, 15 routes (15 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
192.168.0.0/24    *[OSPF/150] 03:54:21, metric 0, tag 0
                 > to 10.0.0.46 via fe-1/2/0.0
192.168.0.1/32   *[OSPF/10] 03:54:21, metric 1
                 > to 10.0.0.46 via fe-1/2/0.0
192.168.1.0/24   *[OSPF/150] 03:54:21, metric 0, tag 0
                 > to 10.0.0.46 via fe-1/2/0.0
192.168.1.1/32   *[OSPF/10] 03:54:21, metric 1
                 > to 10.0.0.46 via fe-1/2/0.0
192.168.2.0/24   *[OSPF/150] 03:54:21, metric 0, tag 0
                 > to 10.0.0.46 via fe-1/2/0.0
192.168.2.1/32   *[OSPF/10] 03:54:21, metric 1
                 > to 10.0.0.46 via fe-1/2/0.0
192.168.3.0/24   *[OSPF/150] 03:54:21, metric 0, tag 0
                 > to 10.0.0.46 via fe-1/2/0.0
192.168.3.1/32   *[OSPF/10] 03:54:21, metric 1
                 > to 10.0.0.46 via fe-1/2/0.0
224.0.0.5/32     *[OSPF/10] 03:56:03, metric 1
                 MultiRecv
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

Meaning The 192.168/16 routes are advertised by OSPF.

Verifying Route Redistribution

Purpose Make sure that the expected routes are redistributed from OSPF into IS-IS.

Action From operational mode on Device R1, enter the **show route protocol isis** command.

```
user@R1> show route protocol isis
```

```
inet.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```
10.0.0.44/30     *[IS-IS/160] 03:45:24, metric 20
```



```

172.16.9.7/32      > to 10.0.0.37 via fe-1/2/0.0
                  *[IS-IS/15] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.0.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.0.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.1.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.1.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.2.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.2.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.3.0/24    *[IS-IS/160] 03:49:46, metric 10
                  > to 10.0.0.37 via fe-1/2/0.0
192.168.3.1/32    *[IS-IS/160] 03:49:46, metric 11, tag2 1
                  > to 10.0.0.37 via fe-1/2/0.0

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

Meaning The 192.168/16 routes are redistributed into IS-IS.

Verifying Connectivity

Purpose Check that Device R1 can reach the destinations on Device R3.

Action From operational mode, enter the **ping** command.

```

user@R1> ping 192.168.1.1
PING 192.168.1.1 (192.168.1.1): 56 data bytes
64 bytes from 192.168.1.1: icmp_seq=0 ttl=63 time=2.089 ms
64 bytes from 192.168.1.1: icmp_seq=1 ttl=63 time=1.270 ms
64 bytes from 192.168.1.1: icmp_seq=2 ttl=63 time=2.135 ms

```

Meaning These results confirm that Device R1 can reach the destinations in the OSPF network.

Related Documentation

- [IS-IS Overview on page 17](#)

Example: Configuring BFD for IS-IS

This example describes how to configure the Bidirectional Forwarding Detection (BFD) protocol to detect failures in an IS-IS network.



NOTE: BFD is not supported with ISIS for IPV6 on QFX10000 series switches.

- [Requirements on page 58](#)
- [Overview on page 58](#)
- [Configuration on page 58](#)
- [Verification on page 61](#)

Requirements

Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 31](#) for information about the required IS-IS configuration.

This example uses the following hardware and software components:


- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

Overview

This example shows two routers connected to each other. A loopback interface is configured on each router. IS-IS and BFD protocols are configured on both routers.

[Figure 7 on page 58](#) shows the sample network.

Figure 7: Configuring BFD for IS-IS

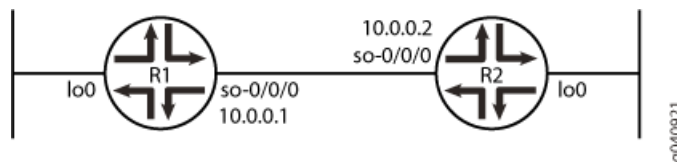

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Router R1

```
set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 5
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 2
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 3
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
  minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic
```

Router R2

```
set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 6
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 3
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 4
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
  minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
```

```
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.



NOTE: To simply configure BFD for IS-IS, only the `minimum-interval` statement is required. The BFD protocol selects default parameters for all the other configuration statements when you use the `bfd-liveness-detection` statement without specifying any parameters.



NOTE: You can change parameters at any time without stopping or restarting the existing session. BFD automatically adjusts to the new parameter value. However, no changes to BFD parameters take place until the values resynchronize with each BFD peer.

To configure BFD for IS-IS on Routers R1 and R2:

1. Enable BFD failure detection for IS-IS.


```
[edit protocols isis]
user@R1# set interface so-0/0/0 bfd-liveness-detection

[edit protocols isis]
user@R2# set interface so-0/0/0 bfd-liveness-detection
```
2. Configure the threshold for the adaptation of the detection time, which must be greater than the multiplier number multiplied by the minimum interval.


```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set detection-time threshold 5

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set detection-time threshold 6
```
3. Configure the minimum transmit and receive intervals for failure detection.


```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-interval 2

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-interval 3
```
4. Configure only the minimum receive interval for failure detection.


```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-receive-interval 1

[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-receive-interval 1
```
5. Disable BFD adaptation.


```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R1# set no-adaptation
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R2# set no-adaptation
```

6. Configure the threshold for the transmit interval, which must be greater than the minimum transmit interval.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R1# set transmit-interval threshold 3
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R2# set transmit-interval threshold 4
```

7. Configure the minimum transmit interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R1# set transmit-interval minimum-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R2# set transmit-interval minimum-interval 1
```

8. Configure the multiplier number, which is the number of hello packets not received by the neighbor that causes the originating interface to be declared down.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R1# set multiplier 2
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R2# set multiplier 2
```

9. Configure the BFD version used for detection.

The default is to have the version detected automatically.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R1# set version automatic
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
```

```
user@R2# set version automatic
```

Results

From configuration mode, confirm your configuration by issuing the **show protocols isis interface** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols isis interface so-0/0/0
```

```
bfd-liveness-detection {
  version automatic;
  minimum-interval 2;
  minimum-receive-interval 1;
  multiplier 2;
  no-adaptation;
  transmit-interval {
    minimum-interval 1;
    threshold 3;
  }
  detection-time {
    threshold 5;
  }
}
```

```

}
...

user@R2# show protocols isis interface so-0/0/0

    bfd-liveness-detection {
        version automatic;
        minimum-interval 3;
        minimum-receive-interval 1;
        multiplier 2;
        no-adaptation;
        transmit-interval {
            minimum-interval 1;
            threshold 4;
        }
        detection-time {
            threshold 6;
        }
    }
...

```

Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1 and R2 on page 61](#)
- [Verifying That IS-IS Is Configured on page 62](#)
- [Verifying That BFD Is configured on page 62](#)

Verifying the Connection Between Routers R1 and R2

Purpose Make sure that Routers R1 and R2 are connected to each other.

Action Ping the other router to check the connectivity between the two routers as per the network topology.

```
user@R1> ping 10.0.0.2
```

```

PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: icmp_seq=0 ttl=64 time=1.367 ms
64 bytes from 10.0.0.2: icmp_seq=1 ttl=64 time=1.662 ms
64 bytes from 10.0.0.2: icmp_seq=2 ttl=64 time=1.291 ms
^C
--- 10.0.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.291/1.440/1.662/0.160 ms

```

```
user@R2> ping 10.0.0.1
```

```

PING 10.0.0.1 (10.0.0.1): 56 data bytes
64 bytes from 10.0.0.1: icmp_seq=0 ttl=64 time=1.287 ms
64 bytes from 10.0.0.1: icmp_seq=1 ttl=64 time=1.310 ms
64 bytes from 10.0.0.1: icmp_seq=2 ttl=64 time=1.289 ms
^C
--- 10.0.0.1 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.287/1.295/1.310/0.010 ms

```

Meaning Routers R1 and R2 are connected to each other.

Verifying That IS-IS Is Configured

Purpose Make sure that the IS-IS instance is running on both routers.

Action Use the **show isis database** statement to check if the IS-IS instance is running on both routers, R1 and R2.

user@R1> show isis database

```
IS-IS level 1 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4a571  0x30c5    1195 L1 L2
R2.00-00    0x4a586  0x4b7e    1195 L1 L2
R2.02-00    0x330ca1 0x3492    1196 L1 L2
  3 LSPs
```

```
IS-IS level 2 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4a856  0x5db0    1194 L1 L2
R2.00-00    0x4a89d  0x149b    1194 L1 L2
R2.02-00    0x1fb2ff 0xd302    1194 L1 L2
  3 LSPs
```

user@R2> show isis database

```
IS-IS level 1 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4b707  0xcc80    1195 L1 L2
R2.00-00    0x4b71b  0xeb37    1198 L1 L2
R2.02-00    0x33c2ce 0xb52d    1198 L1 L2
  3 LSPs
```

```
IS-IS level 2 link-state database:
LSP ID      Sequence Checksum Lifetime Attributes
R1.00-00    0x4b9f2  0xee70    1192 L1 L2
R2.00-00    0x4ba41  0x9862    1197 L1 L2
R2.02-00    0x3      0x6242    1198 L1 L2
  3 LSPs
```

Meaning IS-IS is configured on both routers, R1 and R2.

Verifying That BFD Is configured

Purpose Make sure that the BFD instance is running on both routers, R1 and R2.

Action Use the **show bfd session detail** statement to check if BFD instance is running on the routers.

user@R1> show bfd session detail

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.0.0.2	Up	so-0/0/0	2.000	1.000	2
Client ISIS R2, TX interval 0.001, RX interval 0.001					
Client ISIS R1, TX interval 0.001, RX interval 0.001					

```

Session down time 00:00:00, previous up time 00:00:15
Local diagnostic NbrSignal, remote diagnostic NbrSignal
Remote state AdminDown, version 1
Router 3, routing table index 17

```

```

1 sessions, 2 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```

```
user@R2> show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.0.0.1	Up	so-0/0/0	2.000	1.000	2

```

Client ISIS R2, TX interval 0.001, RX interval 0.001
Session down time 00:00:00, previous up time 00:00:05
Local diagnostic NbrSignal, remote diagnostic NbrSignal
Remote state AdminDown, version 1
Router 2, routing table index 15

```

```

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```

Meaning BFD is configured on Routers R1 and R2 for detecting failures in the IS-IS network.

Related Documentation

- [Understanding BFD for IS-IS](#)

Example: Configuring BFD Authentication for IS-IS

This example shows how to configure BFD authentication for IS-IS.

- [Requirements on page 63](#)
- [Overview on page 63](#)
- [Configuration on page 64](#)
- [Verification on page 66](#)

Requirements


Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 31](#) for information about the required IS-IS configuration.

Overview

In this example, a BFD authentication keychain is configured with meticulous keyed MD5 authentication.

[Figure 8 on page 64](#) shows the topology used in this example.

Figure 8: IS-IS BFD Authentication Topology

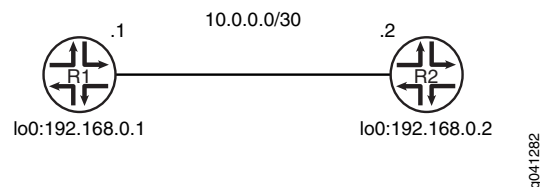

"CLI Quick Configuration" on page 64 shows the configuration for both of the devices in Figure 8 on page 64. The section "Step-by-Step Procedure" on page 65 describes the steps on Device R1.

Configuration

CLI Quick Configuration	To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the [edit] hierarchy level.
Device R1	<pre> set security authentication-key-chains key-chain secret123 description for-isis-bfd set security authentication-key-chains key-chain secret123 key 1 secret "\$9\$cW-yrv" set security authentication-key-chains key-chain secret123 key 1 start-time "2012-5-31.13:00:00 -0700" set security authentication-key-chains key-chain secret123 key 2 secret "\$9\$m5T3" set security authentication-key-chains key-chain secret123 key 2 start-time "2013-5-31.13:00:00 -0700" set security authentication-key-chains key-chain secret123 key 3 secret "\$9\$mTQn" set security authentication-key-chains key-chain secret123 key 3 start-time "2014-5-31.13:00:00 -0700" set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100 set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain secret123 set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm meticulous-keyed-md5 </pre>
Device R2	<pre> set security authentication-key-chains key-chain secret123 description for-isis-bfd set security authentication-key-chains key-chain secret123 key 1 secret "\$9\$cW-yrv" set security authentication-key-chains key-chain secret123 key 1 start-time "2012-5-31.13:00:00 -0700" set security authentication-key-chains key-chain secret123 key 2 secret "\$9\$m5T3" set security authentication-key-chains key-chain secret123 key 2 start-time "2013-5-31.13:00:00 -0700" set security authentication-key-chains key-chain secret123 key 3 secret "\$9\$mTQn" set security authentication-key-chains key-chain secret123 key 3 start-time "2014-5-31.13:00:00 -0700" set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100 set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain secret123 set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm meticulous-keyed-md5 </pre>

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS BFD authentication:

1. Configure the authentication keychain.


```
[edit security authentication-key-chains key-chain secret123]
user@R1# set description for-isis-bfd
user@R1# set key 1 secret "$9$cW-yrv"
user@R1# set key 1 start-time "2012-5-31.13:00:00 -0700"
user@R1# set key 2 secret "$9$m5T3"
user@R1# set key 2 start-time "2013-5-31.13:00:00 -0700"
user@R1# set key 3 secret "$9$mTQn"
user@R1# set key 3 start-time "2014-5-31.13:00:00 -0700"
```
2. Enable BFD.


```
[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set minimum-interval 100
```
3. Apply the authentication keychain.


```
[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication key-chain secret123
```
4. Set the authentication type.


```
[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication algorithm meticulous-keyed-md5
```

Results From configuration mode, confirm your configuration by entering the **show protocols** and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
isis {
  interface ge-1/2/0.0 {
    bfd-liveness-detection {
      minimum-interval 100;
      authentication {
        key-chain secret123;
        algorithm meticulous-keyed-md5;
      }
    }
  }
}

user@R1# show security
authentication-key-chains {
  key-chain secret123 {
    description for-isis-bfd;
    key 1 {
      secret "$9$cW-yrv"; ## SECRET-DATA
      start-time "2012-5-31.13:00:00 -0700";
    }
    key 2 {
```

```

        secret "$9$m5T3"; ## SECRET-DATA
        start-time "2013-5-31.13:00:00 -0700";
    }
    key 3 {
        secret "$9$mTQn"; ## SECRET-DATA
        start-time "2014-5-31.13:00:00 -0700";
    }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

Verifying IS-IS BFD Authentication

Purpose Verify the status of IS-IS BFD authentication.

Action From operational mode, enter the **show bfd session extensive** command.

```

user@R1> show bfd session extensive

```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.0.0.2	Down	ge-1/2/0.0	0.300	1.000	3

```

Client ISIS L1, TX interval 0.100, RX interval 0.100, Authenticate
  keychain secret123, algo meticulous-keyed-md5, mode strict
Client ISIS L2, TX interval 0.100, RX interval 0.100, Authenticate
  keychain secret123, algo meticulous-keyed-md5, mode strict
Session down time 00:35:13, previous up time 00:12:17
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Logical system 2, routing table index 85
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
Local min TX interval 1.000, minimum RX interval 0.100, multiplier 3
Remote min TX interval 0.100, min RX interval 0.100, multiplier 3
Local discriminator 2, remote discriminator 1
Echo mode disabled/inactive, no-absorb, no-refresh
Authentication enabled/active, keychain secret123, algo meticulous-keyed-md5,
mode strict
  Session ID: 0x100101

1 sessions, 2 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 10.0 pps

```

Meaning The output shows that BFD authentication is enabled on IS-IS Level 1 and Level 2.

Related Documentation

- [Configuring BFD Authentication for IS-IS](#)
- [Example: Configuring BFD for IS-IS on page 57](#)
- [Understanding BFD for IS-IS](#)

CHAPTER 2

Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies

- [Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 67](#)
- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 68](#)

Understanding IS-IS IPv4 and IPv6 Unicast Topologies

You can configure IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to inet6.0. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This enables you to exercise control over the paths that unicast data takes through a network.

A topology is the set of joined nodes. IS-IS evaluates all the paths in a single topology for each IS-IS level and uses the shortest-path-first (SPF) algorithm to determine the best path among all the feasible paths. Topology discovery and SPF calculation is performed in a protocol-neutral fashion because it is done at Layer 2 of the OSI model. If you load the topology with reachability information for a certain protocol (for example, IP), the assumption is that the circuits that are supposed to provide reachability between routing devices can carry the protocol. The SPF algorithm has a per-link orientation, not a per-address family or per-protocol orientation.

Multitopology routing enables you to override this default behavior by enabling a per-address family, per-protocol SPF calculation.

The additional CPU load associated with multiple runs of the SPF algorithm is generally not an issue with the processing power available on today's routing device control planes.

The multitopology extensions alter existing type, length, and value (TLV) tuples by adding a topology ID. Each routing device in a given topology maintains its adjacencies and runs a per-topology SPF calculation.

Related Documentation

- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 68](#)

Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies

This example shows how to configure IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology.

- [Requirements on page 68](#)
- [Overview on page 68](#)
- [Configuration on page 69](#)
- [Verification on page 73](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

This example focuses on IPv4 and IPv6 unicast topologies. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This enables you to exercise control over the paths that unicast data takes through a network.

To enable an IPv6 unicast topology for IS-IS, include the **ipv6-unicast** statement:

```
isis {  
  topologies {  
    ipv6-unicast;  
  }  
}
```

To configure a metric for the IPv6 unicast topology, include the **ipv6-unicast-metric** statement:

```
isis {  
  interface interface-name {  
    level level-number {  
      ipv6-unicast-metric number;  
    }  
  }  
}
```


To exclude an interface from the IPv6 unicast topologies for IS-IS, include the **no-ipv6-unicast** statement:

```
isis {  
  interface interface-name {  
    no-ipv6-unicast;  
  }  
}
```

[Figure 9 on page 69](#) shows the topology used in this example. The black lines indicate link membership in the IPv6 topology. The gray lines indicate membership to the IPv4

topology. Using regular TLVs, it would not be possible to build multiple topologies and run an SPF calculation based on them. The multitopology extensions describe an extension to carry the set of supported protocols in the hello packet. After activating multitopology routing support on a link, the link carries all the topologies that the underlying circuit is able to relay.

Figure 9: IS-IS IPv4 and IPv6 Unicast Topologies

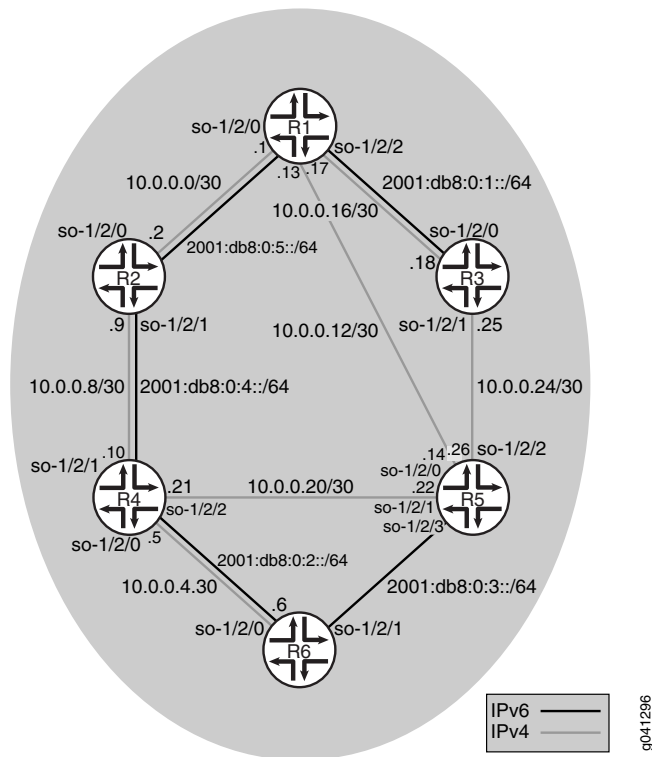

"CLI Quick Configuration" on page 69 shows the configuration for all of the devices in Figure 9 on page 69. The section "Step-by-Step Procedure" on page 71 describes the steps on Device R1.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.17/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
```

```
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::1/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface so-1/2/2.0
set protocols isis interface lo0.0
```

Device R2

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:4::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::2/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.2
set protocols isis interface so-1/2/1.0
set protocols isis interface lo0.0
```

Device R3

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.25/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::3/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface lo0.0
```

Device R4

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.5/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:2::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.10/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.21/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::4/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0
set protocols isis interface so-1/2/2.0 no-ipv6-unicast
set protocols isis interface lo0.0
```

Device R5

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.22/30
```

```

set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.26/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces so-1/2/3 unit 0 family iso
set interfaces so-1/2/3 unit 0 family inet6 address 2001:db8:0:3::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0005.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::5/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0 no-ipv6-unicast
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface so-1/2/2.0 no-ipv6-unicast
set protocols isis interface so-1/2/3.0
set protocols isis interface lo0.0

```

Device R6

```

set interfaces so-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:2::/64 eui-64
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:3::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0006.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::6/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0
set protocols isis interface lo0.0

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure an alternate IPv6 unicast topology:

1. Configure the interfaces.

```

[edit interfaces]
user@R1# set so-1/2/0 unit 0 family inet address 10.0.0.1/30
user@R1# set so-1/2/0 unit 0 family iso
user@R1# set so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
user@R1# set so-1/2/1 unit 0 family inet address 10.0.0.13/30
user@R1# set so-1/2/1 unit 0 family iso
user@R1# set so-1/2/2 unit 0 family inet address 10.0.0.17/30
user@R1# set so-1/2/2 unit 0 family iso
user@R1# set so-1/2/2 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
user@R1# set lo0 unit 0 family inet6 address 2001:db8::1/128

```

2. Enable IS-IS on the interfaces.

```

[edit protocols isis]
user@R1# set interface so-1/2/0.0
user@R1# set interface so-1/2/1.0
user@R1# set interface so-1/2/2.0
user@R1# set interface lo0.0

```

3. Enable multitopology routing on the IS-IS interfaces.

The **ipv6-unicast** statement enables multitopology IS-IS routing on all interfaces that have **family iso** and **family inet6** configured and are listed at the **[edit protocols isis interface]** hierarchy level.

```
[edit protocols isis]
user@R1# set topologies ipv6-unicast
```

4. Disable IPv6 unicast support on a given interface.

If you do not want to run multitopology IS-IS routing for IPv6 on a given interface, you can disable multitopology routing by including the **no-ipv6-unicast** statement in the IS-IS interface configuration.

```
[edit protocols isis]
user@R1# set interface so-1/2/1.0 no-ipv6-unicast
```

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
so-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
    family inet6 {
      address 2001:db8:0:5::/64 {
        eui-64;
      }
    }
  }
}
so-1/2/1 {
  unit 0 {
    family inet {
      address 10.0.0.13/30;
    }
    family iso;
  }
}
so-1/2/2 {
  unit 0 {
    family inet {
      address 10.0.0.17/30;
    }
    family iso;
    family inet6 {
      address 2001:db8:0:1::/64 {
        eui-64;
      }
    }
  }
}
```



```

}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
    family inet6 {
      address 2001:db8::1/128;
    }
  }
}

user@R1# show protocols
isis {
  topologies ipv6-unicast;
  interface so-1/2/0.0;
  interface so-1/2/1.0 {
    no-ipv6-unicast;
  }
  interface so-1/2/2.0;
  interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Checking the Topologies on Neighbors on page 73](#)
- [Checking the IS-IS SPF Calculations on page 74](#)
- [Checking the Tcpdump Output on page 75](#)

Checking the Topologies on Neighbors

Purpose Determine what topologies are supported on neighboring IS-IS devices.

Action From operational mode, enter the **show isis adjacency detail** command.

```
user@R1> show isis adjacency detail
```

R2

```

Interface: so-1/2/0.0, Level: 3, State: Up, Expires in 24 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:28:16 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.2
IPv6 addresses: fe80::2a0:a514:0:24c

```

R5

```

Interface: so-1/2/1.0, Level: 3, State: Up, Expires in 21 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:27:47 ago

```

Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast
 Restart capable: Yes, Adjacency advertisement: Advertise
 IP addresses: 10.0.0.14

R3

Interface: so-1/2/2.0, Level: 3, State: Up, Expires in 22 secs
 Priority: 0, Up/Down transitions: 1, Last transition: 05:27:25 ago
 Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast
 Restart capable: Yes, Adjacency advertisement: Advertise
 IP addresses: 10.0.0.18
 IPv6 addresses: fe80::2a0:a514:0:124c

Meaning As expected, the adjacency with Device R5 only supports the IPv4 unicast topology, while the adjacencies with Device R2 and Device R3 support both the IPv4 and IPv6 topologies.

Checking the IS-IS SPF Calculations

Purpose Verify that separate SPF calculations are being run for IPv4 and IPv6.

Action From operational mode, enter the **show isis spf brief** command.

user@R1> **show isis spf brief**

IPv4 Unicast IS-IS level 1 SPF results:

Node	Metric	Interface	NH	Via	SNPA
R6.00	20	so-1/2/1.0	IPV4 R5		
R4.00	20	so-1/2/0.0	IPV4 R2		
R5.00	10	so-1/2/1.0	IPV4 R5		
R3.00	10	so-1/2/2.0	IPV4 R3		
R2.00	10	so-1/2/0.0	IPV4 R2		
R1.00	0				

6 nodes

IPv4 Unicast IS-IS level 2 SPF results:

Node	Metric	Interface	NH	Via	SNPA
R6.00	20	so-1/2/1.0	IPV4 R5		
R4.00	20	so-1/2/0.0	IPV4 R2		
R5.00	10	so-1/2/1.0	IPV4 R5		
R3.00	10	so-1/2/2.0	IPV4 R3		
R2.00	10	so-1/2/0.0	IPV4 R2		
R1.00	0				

6 nodes

IPv6 Unicast IS-IS level 1 SPF results:

Node	Metric	Interface	NH	Via	SNPA
R5.00	40	so-1/2/0.0	IPV6 R2		
R6.00	30	so-1/2/0.0	IPV6 R2		
R4.00	20	so-1/2/0.0	IPV6 R2		
R3.00	10	so-1/2/2.0	IPV6 R3		
R2.00	10	so-1/2/0.0	IPV6 R2		
R1.00	0				

6 nodes

IPv6 Unicast IS-IS level 2 SPF results:

Node	Metric	Interface	NH	Via	SNPA
R5.00	40	so-1/2/0.0	IPV6 R2		
R6.00	30	so-1/2/0.0	IPV6 R2		
R4.00	20	so-1/2/0.0	IPV6 R2		

```

R3.00      10      so-1/2/2.0      IPV6 R3
R2.00      10      so-1/2/0.0      IPV6 R2
R1.00      0
6 nodes

```

Meaning As expected, SPF calculations are being performed for IPv4 and IPv6 topologies.

Checking the Tcpdump Output

Purpose Verify that the link can be a member of both the IPv4 unicast topology and the IPv6 unicast topology.

Action `user@R1> monitor traffic detail interface so-1/2/0.0`
`[...]`

```

15:52:35.719540 In IS-IS, length 82
p2p IIH, hlen: 20, v: 1, pdu-v: 1, sys-id-len: 6 (0), max-area: 3 (0)
source-id: 0192.0168.0002, holding time: 27s, Flags: [Level 1, Level
2]
circuit-id: 0x01, PDU length: 82
Point-to-point Adjacency State TLV #240, length: 15
Adjacency State: Up (0)
Extended Local circuit-ID: 0x00000054
Neighbor System-ID: 0192.0168.0001
Neighbor Extended Local circuit-ID: 0x00000043
Protocols supported TLV #129, length: 2
NLPID(s): IPv4 (0xcc), IPv6 (0x8e)
IPv4 Interface address(es) TLV #132, length: 4
IPv4 interface address: 10.0.0.2
IPv6 Interface address(es) TLV #232, length: 16
IPv6 interface address: fe80::2a0:a514:0:24c
Area address(es) TLV #1, length: 4
Area address (length: 3): 49.0002
Restart Signaling TLV #211, length: 3
Flags [none], Remaining holding time 0s
Multi Topology TLV #229, length: 4
IPv4 unicast Topology (0x000), Flags: [none]
IPv6 unicast Topology (0x002), Flags: [none]

```

Meaning The IS-IS hello (IIH) packet shows that IPv4 and IPv6 are supported. The hello packet lists valid IPv4 and IPv6 addresses, and therefore the routing device can create valid next-hop entries. The supported protocols are listed in the multitopology TLV #229.

Related Documentation • *Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast Addresses*

Related Documentation • *Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast Addresses*

CHAPTER 3

Example: Configuring IS-IS Multicast Topology

- [IS-IS Multicast Topologies Overview on page 77](#)
- [Example: Configuring IS-IS Multicast Topology on page 78](#)

IS-IS Multicast Topologies Overview

Most multicast routing protocols perform a reverse-path forwarding (RPF) check on the source of multicast data packets. If a packet comes in on the interface that is used to send data to the source, the packet is accepted and forwarded to one or more downstream interfaces. Otherwise, the packet is discarded and a notification is sent to the multicast routing protocol running on the interface.

In certain instances, the unicast routing table used for the RPF check is also the table used for forwarding unicast data packets. Thus, unicast and multicast routing are congruent. In other cases, where it is preferred that multicast routing be independent of unicast routing, the multicast routing protocols are configured to perform the RPF check using an alternate unicast routing table `inet.2`.

You can configure IS-IS to calculate an alternate IPv4 multicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to `inet.2`. The IS-IS interface metrics for the multicast topology can be configured independently of the unicast metrics. You can also selectively disable interfaces from participating in the multicast topology while continuing to participate in the regular unicast topology. This enables you to exercise control over the paths that multicast data takes through a network so that it is independent of unicast data paths. You can also configure IS-IS to calculate an alternate IPv6 multicast topology, in addition to the normal IPv6 unicast topology.



NOTE: IS-IS only starts advertising the routes when the interface routes are in `inet.2`.

[Table 3 on page 78](#) lists the various IPv4 statements you can use to configure IS-IS topologies.

Table 3: IPv4 Statements

Statement	Description
<code>ipv4-multicast</code>	Enables an alternate IPv4 multicast topology.
<code>ipv4-multicast-metric <i>number</i></code>	Configures the multicast metric for an alternate IPv4 multicast topology.
<code>no-ipv4-multicast</code>	Excludes an interface from the IPv4 multicast topology.
<code>no-unicast-topology</code>	Excludes an interface from the IPv4 unicast topologies.

Table 4 on page 78 lists the various IPv6 statements you can use to configure IS-IS topologies.

Table 4: IPv6 Statements

Statement	Description
<code>ipv6-multicast</code>	Enables an alternate IPv6 multicast topology.
<code>ipv6-multicast-metric <i>number</i></code>	Configures the multicast metric for an alternate IPv6 multicast topology.
<code>ipv6-unicast-metric <i>number</i></code>	Configures the unicast metric for an alternate IPv6 multicast topology.
<code>no-ipv6-multicast</code>	Excludes an interface from the IPv6 multicast topology.
<code>no-ipv6-unicast</code>	Excludes an interface from the IPv6 unicast topologies.

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

Related Documentation

- [Example: Configuring IS-IS Multicast Topology on page 78](#)

Example: Configuring IS-IS Multicast Topology

This example shows how to configure multicast topology for an IS-IS network.

- [Requirements on page 78](#)
- [Overview on page 79](#)
- [Configuration on page 79](#)
- [Verification on page 83](#)

Requirements

Before you begin, configure IS-IS on all routers. See *Minimum IS-IS Configuration* for information about the required IS-IS configuration.

This example uses the following hardware and software components:


- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

Overview

This example shows an IS-IS multicast topology configuration. Three routers are connected to each other. A loopback interface is configured on each router.

Figure 10 on page 79 shows the sample network.

Figure 10: Configuring IS-IS Multicast Topology

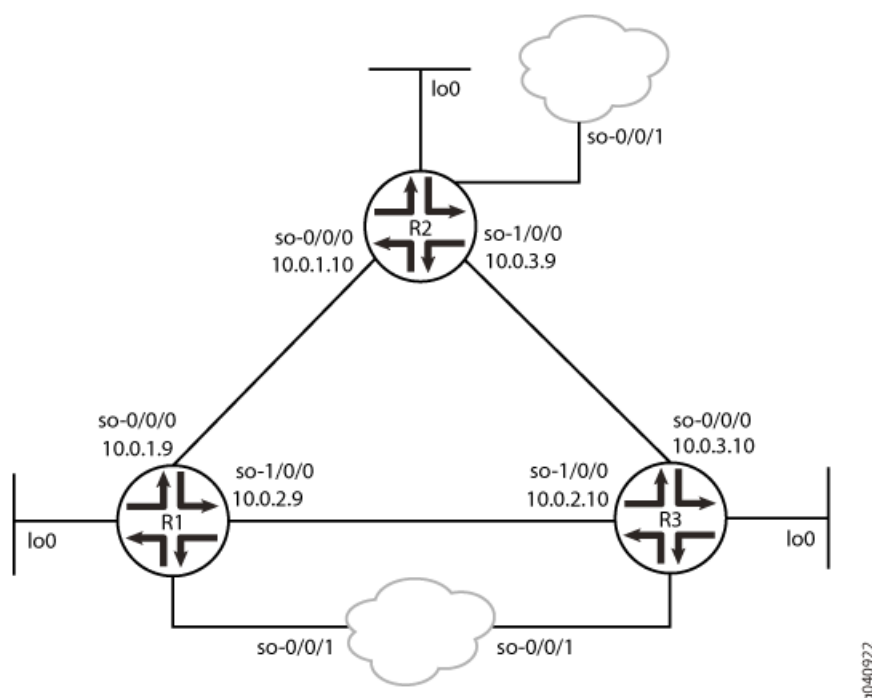

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter commit from configuration mode.

Router R1

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 15
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-0/0/0 level 2 metric 20
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 14
set protocols isis interface so-1/0/0 level 1 metric 13
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 12
```

```
set protocols isis interface so-1/0/0 level 2 metric 29
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface fxp0.0 disable
```

Router R2

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 13
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 12
set protocols isis interface so-0/0/0 level 2 metric 29
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface so-1/0/0 level 1 metric 14
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-1/0/0 level 2 metric 32
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 26
set protocols isis interface fxp0.0 disable
```

Router R3

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 19
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 11
set protocols isis interface so-0/0/0 level 2 metric 27
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 21
set protocols isis interface so-1/0/0 level 1 metric 16
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 26
set protocols isis interface so-1/0/0 level 2 metric 30
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 20
set protocols isis interface fxp0.0 disable
```

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see the *CLI User Guide*.

To configure IS-IS multicast topologies:

1. Enable the multicast topology for IS-IS by using the **ipv4-multicast** statement.

Routers R1, R2, and R3

```
[edit protocols isis]
user@host# set traceoptions file isis size 5m world-readable
user@host# set traceoptions flag error
user@host# set topologies ipv4-multicast
```

2. Enable multicast metrics on the first sonet Interface by using the **ipv4-multicast-metric** statement.

Router R1

```
[edit protocols isis interface so-0/0/0 ]
user@R1# set level 1 metric 15
user@R1# set level 1 ipv4-multicast-metric 18
user@R1# set level 2 metric 20
user@R1# set level 2 ipv4-multicast-metric 14
```


Router R2

```
[edit protocols isis interface so-0/0/0]
user@R2# set level 1 metric 19
user@R2# set level 1 ipv4-multicast-metric 11
user@R2# set level 2 metric 27
user@R2# set level 2 ipv4-multicast-metric 21
```

Router R3

```
[edit protocols isis interface so-0/0/0]
user@R3# set level 1 metric 19
user@R3# set level 1 ipv4-multicast-metric 11
user@R3# set level 2 metric 27
user@R3# set level 2 ipv4-multicast-metric 21
```

3. Enable multicast metrics on a second sonet Interface by using the **ipv4-multicast-metric** statement.

Router R1

```
[edit protocols isis interface so-1/0/0]
user@R1# set level 1 metric 13
user@R1# set level 1 ipv4-multicast-metric 12
user@R1# set level 2 metric 29
user@R1# set level 2 ipv4-multicast-metric 23
```

Router R2

```
[edit protocols isis interface so-1/0/0]
user@R2# set level 1 metric 14
user@R2# set level 1 ipv4-multicast-metric 18
user@R2# set level 2 metric 32
user@R2# set level 2 ipv4-multicast-metric 26
```

Router R3

```
[edit protocols isis interface so-1/0/0]
user@R3# set level 1 metric 16
user@R3# set level 1 ipv4-multicast-metric 26
user@R3# set level 2 metric 30
user@R3# set level 2 ipv4-multicast-metric 20
```

4. Disable the out-of-band management port, **fxp0**.

Routers R1, R2, and R3

```
[edit protocols isis]
user@host# set interface fxp0.0 disable
```

5. If you are done configuring the routers, commit the configuration.

Routers R1, R2, and R3

```
[edit]
user@host# commit
```

Results Confirm your configuration by using the **show protocols isis** statement.

Router R1

```
user@R1# show protocols isis
```

```
traceoptions {  
    file isis size 5m world-readable;  
    flag error;  
}  
topologies ipv4-multicast;  
interface so-0/0/0 {  
    level 1 {  
        metric 15;  
        ipv4-multicast-metric 18;  
    }  
    level 2 {  
        metric 20;  
        ipv4-multicast-metric 14;  
    }  
}  
interface so-1/0/0 {  
    level 1 {  
        metric 13;  
        ipv4-multicast-metric 12;  
    }  
    level 2 {  
        metric 29;  
        ipv4-multicast-metric 23;  
    }  
}  
interface fxp0.0 {  
    disable;  
}
```

Router R2

```
user@R2# show protocols isis
```

```
traceoptions {  
    file isis size 5m world-readable;  
    flag error;  
}  
topologies ipv4-multicast;  
interface so-0/0/0 {  
    level 1 {  
        metric 13;  
        ipv4-multicast-metric 12;  
    }  
    level 2 {  
        metric 29;  
        ipv4-multicast-metric 23;  
    }  
}  
interface so-1/0/0 {  
    level 1 {  
        metric 14;  
        ipv4-multicast-metric 18;  
    }  
    level 2 {  
        metric 32;  
        ipv4-multicast-metric 26;  
    }  
}
```

```
interface fxp0.0 {
    disable;
}
```

Router R3

```
user@R3# show protocols isis
```

```
traceoptions {
    file isis size 5m world-readable;
    flag error;
}
topologies ipv4-multicast;
interface so-0/0/0 {
    level 1 {
        metric 19;
        ipv4-multicast-metric 11;
    }
    level 2 {
        metric 27;
        ipv4-multicast-metric 21;
    }
}
interface so-1/0/0 {
    level 1 {
        metric 16;
        ipv4-multicast-metric 26;
    }
    level 2 {
        metric 30;
        ipv4-multicast-metric 20;
    }
}
interface fxp0.0 {
    disable;
}
```

Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1, R2, and R3 on page 83](#)
- [Verifying That IS-IS Is Configured on page 85](#)
- [Verifying the Configured Multicast Metric Values on page 87](#)
- [Verifying the Configuration of the Multicast Topology on page 88](#)

Verifying the Connection Between Routers R1, R2, and R3

Purpose Make sure that Routers R1, R2, and R3 are connected to each other.

Action Ping the other two routers from any router, to check the connectivity between the three routers as per the network topology.

```
user@R1> ping 10.0.3.9
```

```
PING 10.0.3.9 (10.0.3.9): 56 data bytes
64 bytes from 10.0.3.9: icmp_seq=0 ttl=64 time=1.299 ms
64 bytes from 10.0.3.9: icmp_seq=1 ttl=64 time=52.304 ms
```

```
64 bytes from 10.0.3.9: icmp_seq=2 ttl=64 time=1.271 ms
64 bytes from 10.0.3.9: icmp_seq=3 ttl=64 time=1.343 ms
64 bytes from 10.0.3.9: icmp_seq=4 ttl=64 time=1.434 ms
64 bytes from 10.0.3.9: icmp_seq=5 ttl=64 time=1.306 ms
^C
--- 10.0.3.9 ping statistics ---
6 packets transmitted, 6 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.271/9.826/52.304/18.997 ms
```

```
user@R1> ping 10.0.3.10
```

```
PING 10.0.3.10 (10.0.3.10): 56 data bytes
64 bytes from 10.0.3.10: icmp_seq=0 ttl=64 time=1.431 ms
64 bytes from 10.0.3.10: icmp_seq=1 ttl=64 time=1.296 ms
64 bytes from 10.0.3.10: icmp_seq=2 ttl=64 time=1.887 ms
^C
--- 10.0.3.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.296/1.538/1.887/0.253 ms
```

```
user@R2> ping 10.0.2.9
```

```
PING 10.0.2.9 (10.0.2.9): 56 data bytes
64 bytes from 10.0.2.9: icmp_seq=0 ttl=64 time=1.365 ms
64 bytes from 10.0.2.9: icmp_seq=1 ttl=64 time=1.813 ms
64 bytes from 10.0.2.9: icmp_seq=2 ttl=64 time=1.290 ms
^C
--- 10.0.2.9 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.290/1.489/1.813/0.231 ms
```

```
user@R2> ping 10.0.2.10
```

```
PING 10.0.2.10 (10.0.2.10): 56 data bytes
64 bytes from 10.0.2.10: icmp_seq=0 ttl=63 time=1.318 ms
64 bytes from 10.0.2.10: icmp_seq=1 ttl=63 time=1.394 ms
64 bytes from 10.0.2.10: icmp_seq=2 ttl=63 time=1.366 ms
64 bytes from 10.0.2.10: icmp_seq=3 ttl=63 time=1.305 ms
^C
--- 10.0.2.10 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.305/1.346/1.394/0.036 ms
```

```
user@R3> ping 10.0.1.10
```

```
PING 10.0.1.10 (10.0.1.10): 56 data bytes
64 bytes from 10.0.1.10: icmp_seq=0 ttl=63 time=1.316 ms
64 bytes from 10.0.1.10: icmp_seq=1 ttl=63 time=1.418 ms
64 bytes from 10.0.1.10: icmp_seq=2 ttl=63 time=1.277 ms
^C
--- 10.0.1.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.277/1.337/1.418/0.059 ms
```

```
user@R3> ping 10.0.1.9
```

```
PING 10.0.1.9 (10.0.1.9): 56 data bytes
64 bytes from 10.0.1.9: icmp_seq=0 ttl=64 time=1.381 ms
64 bytes from 10.0.1.9: icmp_seq=1 ttl=64 time=1.499 ms
64 bytes from 10.0.1.9: icmp_seq=2 ttl=64 time=1.300 ms
```

```

64 bytes from 10.0.1.9: icmp_seq=3 ttl=64 time=1.397 ms
^C
--- 10.0.1.9 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.300/1.394/1.499/0.071 ms

```

Meaning Routers R1, R2, and R3 have a peer relationship with each other.

Verifying That IS-IS Is Configured

Purpose Make sure that the IS-IS instance is running on Routers R1, R2, and R3, and that they are adjacent to each other.

Action Use the `show isis adjacency detail` command to check the adjacency between the routers.

Router R1

```
user@R1> show isis adjacency detail
```

R2

```

Interface: so-0/0/0, Level: 1, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10

```

R2

```

Interface: so-0/0/0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:58 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10

```

R3

```

Interface: so-1/0/0, Level: 1, State: Up, Expires in 7 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10

```

R3

```

Interface: so-1/0/0, Level: 2, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10

```

Router R2

```
user@R2> show isis adjacency detail
```

R1

```

Interface: so-0/0/0, Level: 1, State: Up, Expires in 20 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc

```

```
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.9
```

R1

```
Interface: so-0/0/0, Level: 2, State: Up, Expires in 26 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.9
```

R3

```
Interface: so-1/0/0, Level: 1, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.10
```

R3

```
Interface: so-1/0/0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.10
```

Router R3

```
user@R3> show isis adjacency detail
```

R2

```
Interface: so-0/0/0, Level: 1, State: Up, Expires in 18 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.9
```

R2

```
Interface: so-0/0/0, Level: 2, State: Up, Expires in 22 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.03, IP addresses: 10.0.3.9
```

R1

```
Interface: so-1/0/0, Level: 1, State: Up, Expires in 21 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.9
```

R1

```
Interface: so-1/0/0, Level: 2, State: Up, Expires in 19 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
```

Restart capable: Yes, Adjacency advertisement: Advertise
 LAN id: R3.02, IP addresses: 10.0.2.9

Meaning IS-IS is configured on Routers R1, R2, and R3 and they are adjacent to each other.

Verifying the Configured Multicast Metric Values

Purpose Make sure that the SPF calculations are accurate as per the configured multicast metric values on Routers R1, R2, and R3.

Action Use the `show isis spf results` command to check the SPF calculations for the network.

Router R1

```
user@R1> show isis spf results
...
IPv4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.03  28         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R2.00  18         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R3.00  17         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  0
      4 nodes

IPv4 Multicast IS-IS level 2 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.03  40         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R3.00  22         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R2.00  14         so-0/0/0   IPV4 R2  0:1b:c0:86:54:bd
R1.00  0
      4 nodes
```

Router R2

```
user@R2> show isis spf results
...
IPv4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  29         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.00  18         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  12         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.02  12
R2.00  0
      5 nodes

IPv4 Multicast IS-IS level 2 SPF results:
Node  Metric  Interface  NH  Via  SNPA
R3.02  45         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.00  26         so-1/0/0   IPV4 R3  0:1b:c0:86:54:bd
R1.00  23         so-0/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.02  23
R2.00  0
      5 nodes
```

Router R3

```
user@R3> show isis spf results
...
IPv4 Multicast IS-IS level 1 SPF results:
Node  Metric  Interface  NH  Via  SNPA
```

```

R3.02 26
R1.00 23          so-0/0/0      IPV4 R2  0:1b:c0:86:54:bc
R2.02 23          so-0/0/0      IPV4 R2  0:1b:c0:86:54:bc
R2.00 11          so-0/0/0      IPV4 R2  0:1b:c0:86:54:bc
R3.03 11
R3.00 0
        6 nodes

```

IPv4 Multicast IS-IS level 2 SPF results:

```

Node  Metric  Interface  NH  Via  SNPA
R2.02  34      so-1/0/0   IPV4 R1  0:1b:c0:86:54:bc
R2.00  21      so-0/0/0   IPV4 R2  0:1b:c0:86:54:bc
R3.03  21
R1.00  20      so-1/0/0   IPV4 R1  0:1b:c0:86:54:bc
R3.02  20
R3.00  0
        6 nodes

```

Meaning The configured multicast metric values are used in SPF calculations for the IS-IS network.

Verifying the Configuration of the Multicast Topology

Purpose Make sure that the multicast topology is configured on Routers R1, R2, and R3.

Action Use the **show isis database detail** command to verify the multicast topology configuration on the routers.

Router R1

```
user@R1> show isis database detail
```

IS-IS level 1 link-state database:

```

R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 663 secs
  IPV4 Unicast IS neighbor: R2.02  Metric:      15
  IPV4 Unicast IS neighbor: R3.02  Metric:      15
  IPV4 Multicast IS neighbor: R2.02 Metric:      18
  IPV4 Multicast IS neighbor: R3.02 Metric:      17
  IP IPV4 Unicast prefix: 10.0.1.8/30 Metric:      15 Internal Up
  IP IPV4 Unicast prefix: 10.0.2.8/30 Metric:      15 Internal Up

```

```

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 883 secs
  IPV4 Unicast IS neighbor: R2.02  Metric:      13
  IPV4 Unicast IS neighbor: R3.03  Metric:      14
  IPV4 Multicast IS neighbor: R2.02 Metric:      12
  IPV4 Multicast IS neighbor: R3.03 Metric:      18
  IP IPV4 Unicast prefix: 10.0.1.8/30 Metric:      13 Internal Up
  IP IPV4 Unicast prefix: 10.0.3.8/30 Metric:      14 Internal Up

```

```

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 913 secs
  IPV4 Unicast IS neighbor: R1.00  Metric:      0
  IPV4 Unicast IS neighbor: R2.00  Metric:      0

```

```

R3.00-00 Sequence: 0x13c, Checksum: 0xc8de, Lifetime: 488 secs
  IPV4 Unicast IS neighbor: R3.02  Metric:      16
  IPV4 Unicast IS neighbor: R3.03  Metric:      19
  IPV4 Multicast IS neighbor: R3.02 Metric:      26
  IPV4 Multicast IS neighbor: R3.03 Metric:      11
  IP IPV4 Unicast prefix: 10.0.2.8/30 Metric:      16 Internal Up

```



```

IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      19 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 625 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 714 secs
  IPv4 Unicast IS neighbor: R2.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

IS-IS level 2 link-state database:

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 816 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:      20
  IPv4 Unicast IS neighbor: R3.02 Metric:      31
  IPv4 Multicast IS neighbor: R2.02 Metric:      14
  IPv4 Multicast IS neighbor: R3.02 Metric:      22
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      20 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      31 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 966 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:      29
  IPv4 Unicast IS neighbor: R3.03 Metric:      32
  IPv4 Multicast IS neighbor: R2.02 Metric:      23
  IPv4 Multicast IS neighbor: R3.03 Metric:      26
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      29 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      28 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 966 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:      0
  IPv4 Unicast IS neighbor: R2.00 Metric:      0

R3.00-00 Sequence: 0x13d, Checksum: 0xb19, Lifetime: 805 secs
  IPv4 Unicast IS neighbor: R3.02 Metric:      30
  IPv4 Unicast IS neighbor: R3.03 Metric:      27
  IPv4 Multicast IS neighbor: R3.02 Metric:      20
  IPv4 Multicast IS neighbor: R3.03 Metric:      21
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      31 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      30 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 844 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 844 secs
  IPv4 Unicast IS neighbor: R2.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

```

Router R2

```
user@R2> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```

R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 524 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:      15
  IPv4 Unicast IS neighbor: R3.02 Metric:      15
  IPv4 Multicast IS neighbor: R2.02 Metric:      18
  IPv4 Multicast IS neighbor: R3.02 Metric:      17

```

```

IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      15 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      15 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 748 secs
IPV4 Unicast IS neighbor: R2.02 Metric:      13
IPV4 Unicast IS neighbor: R3.03 Metric:      14
IPV4 Multicast IS neighbor: R2.02 Metric:      12
IPV4 Multicast IS neighbor: R3.03 Metric:      18
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      13 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      14 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 777 secs
IPV4 Unicast IS neighbor: R1.00 Metric:      0
IPV4 Unicast IS neighbor: R2.00 Metric:      0

R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1102 secs
IPV4 Unicast IS neighbor: R3.02 Metric:      16
IPV4 Unicast IS neighbor: R3.03 Metric:      19
IPV4 Multicast IS neighbor: R3.02 Metric:      26
IPV4 Multicast IS neighbor: R3.03 Metric:      11
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      16 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      19 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 488 secs
IPV4 Unicast IS neighbor: R1.00 Metric:      0
IPV4 Unicast IS neighbor: R3.00 Metric:      0

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 577 secs
IPV4 Unicast IS neighbor: R2.00 Metric:      0
IPV4 Unicast IS neighbor: R3.00 Metric:      0

IS-IS level 2 link-state database:

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 676 secs
IPV4 Unicast IS neighbor: R2.02 Metric:      20
IPV4 Unicast IS neighbor: R3.02 Metric:      31
IPV4 Multicast IS neighbor: R2.02 Metric:      14
IPV4 Multicast IS neighbor: R3.02 Metric:      22
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      20 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      31 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 831 secs
IPV4 Unicast IS neighbor: R2.02 Metric:      29
IPV4 Unicast IS neighbor: R3.03 Metric:      32
IPV4 Multicast IS neighbor: R2.02 Metric:      23
IPV4 Multicast IS neighbor: R3.03 Metric:      26
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      29 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      28 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 831 secs
IPV4 Unicast IS neighbor: R1.00 Metric:      0
IPV4 Unicast IS neighbor: R2.00 Metric:      0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 667 secs
IPV4 Unicast IS neighbor: R3.02 Metric:      30
IPV4 Unicast IS neighbor: R3.03 Metric:      27
IPV4 Multicast IS neighbor: R3.02 Metric:      20
IPV4 Multicast IS neighbor: R3.03 Metric:      21
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:      31 Internal Up

```

```

IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:      30 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      27 Internal Up

```

```

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 707 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

```

```

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 707 secs
  IPv4 Unicast IS neighbor: R2.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

```

Router R3

```
user@R3> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```

R1.00-00 Sequence: 0x143, Checksum: 0xb08, Lifetime: 1155 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:      15
  IPv4 Unicast IS neighbor: R3.02 Metric:      15
  IPv4 Multicast IS neighbor: R2.02 Metric:      18
  IPv4 Multicast IS neighbor: R3.02 Metric:      17
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:    15 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:    15 Internal Up

```

```

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 687 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:      13
  IPv4 Unicast IS neighbor: R3.03 Metric:      14
  IPv4 Multicast IS neighbor: R2.02 Metric:      12
  IPv4 Multicast IS neighbor: R3.03 Metric:      18
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:    13 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:    14 Internal Up

```

```

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 716 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:      0
  IPv4 Unicast IS neighbor: R2.00 Metric:      0

```

```

R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1044 secs
  IPv4 Unicast IS neighbor: R3.02 Metric:      16
  IPv4 Unicast IS neighbor: R3.03 Metric:      19
  IPv4 Multicast IS neighbor: R3.02 Metric:      26
  IPv4 Multicast IS neighbor: R3.03 Metric:      11
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:    16 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:    19 Internal Up

```

```

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 430 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

```

```

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 519 secs
  IPv4 Unicast IS neighbor: R2.00 Metric:      0
  IPv4 Unicast IS neighbor: R3.00 Metric:      0

```

```
IS-IS level 2 link-state database:
```

```

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 617 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:      20
  IPv4 Unicast IS neighbor: R3.02 Metric:      31
  IPv4 Multicast IS neighbor: R2.02 Metric:      14
  IPv4 Multicast IS neighbor: R3.02 Metric:      22
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:    20 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:    31 Internal Up

```

```

IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:      29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 769 secs
  IPv4 Unicast IS neighbor: R2.02 Metric:      29
  IPv4 Unicast IS neighbor: R3.03 Metric:      32
  IPv4 Multicast IS neighbor: R2.02 Metric:     23
  IPv4 Multicast IS neighbor: R3.03 Metric:     26
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:    29 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:    28 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:    32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 769 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:       0
  IPv4 Unicast IS neighbor: R2.00 Metric:       0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 610 secs
  IPv4 Unicast IS neighbor: R3.02 Metric:       30
  IPv4 Unicast IS neighbor: R3.03 Metric:       27
  IPv4 Multicast IS neighbor: R3.02 Metric:      20
  IPv4 Multicast IS neighbor: R3.03 Metric:      21
  IP IPv4 Unicast prefix: 10.0.1.8/30 Metric:    31 Internal Up
  IP IPv4 Unicast prefix: 10.0.2.8/30 Metric:    30 Internal Up
  IP IPv4 Unicast prefix: 10.0.3.8/30 Metric:    27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 649 secs
  IPv4 Unicast IS neighbor: R1.00 Metric:       0
  IPv4 Unicast IS neighbor: R3.00 Metric:       0

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 649 secs
  IPv4 Unicast IS neighbor: R2.00 Metric:       0
  IPv4 Unicast IS neighbor: R3.00 Metric:       0

```

Meaning Multicast topology is configured on Routers R1, R2, and R3.

- Related Documentation**
- *Understanding Multitopology Routing in Conjunction with PIM*
 - *Example: Configuring Multitopology Routing to Provide Redundancy for Multicast Traffic over Separate Network Paths*
 - [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 67](#)

CHAPTER 4

Example: Configuring Link and Node Protection for IS-IS Routes

- [Understanding Loop-Free Alternate Routes for IS-IS on page 93](#)
- [Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 97](#)

Understanding Loop-Free Alternate Routes for IS-IS

In Junos OS Release 9.5 and later, support for IS-IS loop-free alternate routes enables IP fast-reroute capability for IS-IS. Junos OS precomputes loop-free backup routes for all IS-IS routes. These backup routes are preinstalled in the Packet Forwarding Engine, which performs a local repair and implements the backup path when the link for a primary next hop for a particular route is no longer available. With local repair, the Packet Forwarding Engine can correct a path failure before it receives recomputed paths from the Routing Engine. Local repair reduces the amount of time needed to reroute traffic to less than 50 milliseconds. In contrast, global repair can take up to 800 milliseconds to compute a new route. Local repair and global repair are thus complementary. Local repair enables traffic to continue to be routed using a backup path until global repair is able to calculate a new route.

A loop-free path is one that does not forward traffic back through the routing device to reach a given destination. That is, a neighbor whose shortest path to the destination traverses the routing device is not used as a backup route to that destination. To determine loop-free alternate paths for IS-IS routes, Junos OS runs shortest-path-first (SPF) calculations on each one-hop neighbor. You can enable support for alternate loop-free routes on any IS-IS interface. Because it is common practice to enable LDP on an interface for which IS-IS is already enabled, this feature also provides support for LDP label-switched paths (LSPs).



NOTE: If you enable support for alternate loop-free routes on an interface configured for both LDP and IS-IS, you can use the `traceroute` command to trace the active path to the primary next hop.


The level of backup coverage available through IS-IS routes depends on the actual network topology and is typically less than 100 percent for all destinations on any given routing device. You can extend backup coverage to include RSVP LSPs.

Junos OS provides two mechanisms for route redundancy for IS-IS through alternate loop-free routes: link protection and node-link protection. When you enable link protection or node-link protection on an IS-IS interface, Junos OS creates a single alternate path to the primary next hop for all destination routes that traverse a protected interface. Link protection offers per-link traffic protection. Use link protection when you assume that only a single link might become unavailable but that the neighboring node on the primary path would still be available through another interface. Link protection bypass LSP

Node-link protection establishes an alternate path through a different routing device altogether. Use node-link protection when you assume that access to a node is lost when a link is no longer available. As a result, Junos OS calculates a backup path that avoids the primary next-hop routing device. In Junos OS Release 9.4 and earlier, only the RSVP protocol supports Packet Forwarding Engine local repair and fast reroute as well as link protection and node protection.

In [Figure 2 on page 26](#), Case 2 shows how link protection allows source Router A to switch to Link B when the primary next hop Link A to destination Router C fails. However, if Router B fails, Link B also fails, and the protected Link A is lost. If node-link protection is enabled, Router A is able to switch to Link D on Router D and bypass the failed Router B altogether. As shown in Case 1, with node-link protection enabled, Router A has a node-link protection alternate path available through Router D to destination Router C. That means that if Router B fails, Router A can still reach Router C because the path from Router A to Link D remains available as an alternate backup path.

Figure 11: Link Protection and Node-Link Protection Comparison for IS-IS Routes

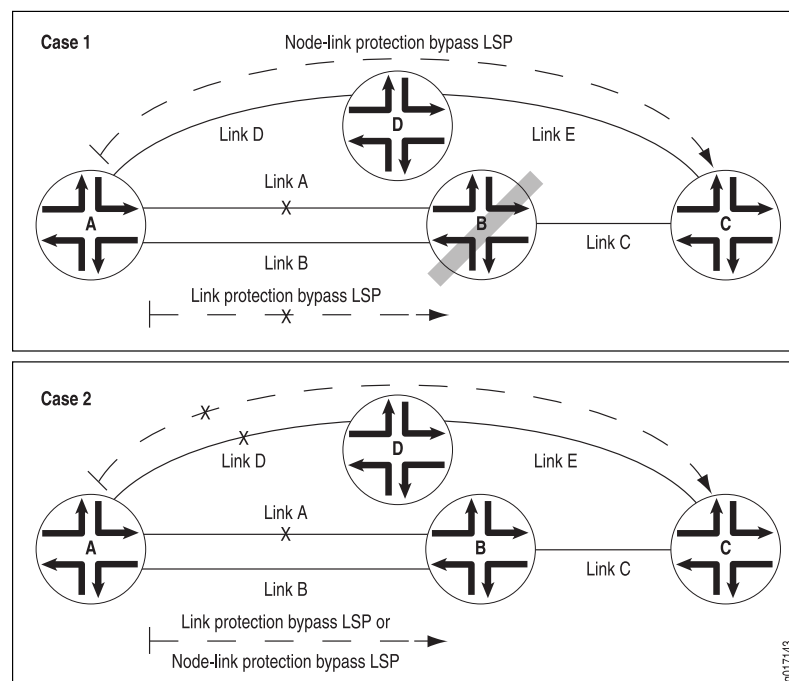

The Junos OS implementation of support for loop-free alternate paths for IS-IS routes is based on the following standards:

- RFC 5286, *Basic Specification for IP Fast-Reroute: Loop-free Alternates*
- RFC 5714, *IP Fast Reroute Framework*

Configuring Link Protection for IS-IS

You can configure link protection on any interface for which IS-IS is enabled. When you enable link protection, Junos OS creates one alternate path to the primary next hop for all destination routes that traverse a protected interface. Link protection assumes that only a single link becomes unavailable but that the neighboring node would still be available through another interface.



NOTE: You must also configure a per-packet load-balancing routing policy to ensure that the routing protocol process installs all the next hops for a given route in the routing table.

To enable link protection, include the **link-protection** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```
[edit]
protocols {
  isis {
    interface interface-name {
      link-protection;
    }
  }
}
```

Configuring Node-Link Protection for IS-IS

You can configure node-link protection on any interface for which IS-IS is enabled. Node-link protection establishes an alternate path through a different routing device altogether for all destination routes that traverse a protected interface. Node-link protection assumes that the entire routing device, or node, has failed. Junos OS therefore calculates a backup path that avoids the primary next-hop routing device.



NOTE: You must also configure a per-packet load-balancing routing policy to ensure that the routing protocol process installs all the next hops for a given route in the routing table.

To enable node-link protection, include the **node-link-protection** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```
[edit]
protocols {
  isis {
    interface interface-name {
```

```
        node-link-protection;  
    }  
}  
}
```

Excluding an IS-IS Interface as a Backup for Protected Interfaces

By default, all IS-IS interfaces that belong to the master instance or a specific routing instance are eligible as backup interfaces for protected interfaces. You can specify that any IS-IS interface be excluded from functioning as a backup interface to protected interfaces. To exclude an IS-IS interface as a backup interface, include the **no-eligible-backup** statement at the **[edit protocols isis interface *interface-name*]** hierarchy level:

```
[edit]  
protocols {  
  isis {  
    interface interface-name {  
      no-eligible-backup;  
    }  
  }  
}
```

Configuring RSVP Label-Switched Paths as Backup Paths for IS-IS

Relying on the shortest-path-first (SPF) calculation of backup paths for one-hop neighbors might result in less than 100 percent backup coverage for a specific network topology. You can enhance coverage of IS-IS and LDP label-switched paths (LSPs) by configuring RSVP LSPs as backup paths. To configure a specific RSVP LSP as a backup path, include the **backup** statement at the **[edit protocols mpls label-switched-path *lsp-name*]** hierarchy level:

```
[edit]  
protocols {  
  mpls {  
    label-switched-path lsp-name {  
      backup;  
      to ip-address;  
    }  
  }  
}
```

When configuring an LSP, you must specify the IP address of the egress routing device with the **to** statement. For detailed information about configuring LSPs and RSVP, see the *Junos OS MPLS Applications Library for Routing Devices*.

Using Operational Mode Commands to Monitor Protected IS-IS Routes

You can issue operational mode commands that provide more details about your link-protected and node-link-protected IS-IS routes. The following guidelines explain the type of information available from the output of each command:

- **show isis backup label-switched-path**—Displays which MPLS LSPs have been designated as backup paths and the current status of those LSPs.
- **show isis backup spf results**—Displays SPF calculations for each neighbor for a given destination. Indicates whether a specific interface or node has been designated as a backup path and why. Use the **no-coverage** option to display only those nodes that do not have backup coverage.
- **show isis backup coverage**—Displays the percentage of nodes and prefixes for each type of address family that is protected.
- **show isis interface detail**—Displays the type of protection (link or node-link) applied to each protected interface.

Related Documentation

- [Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 97](#)

Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN

Node-link protection establishes an alternate path through a different routing device. Use node-link protection when you assume that access to a node is lost when a link is no longer available. Junos OS calculates a backup path that avoids the primary next-hop routing device.

- [Requirements on page 97](#)
- [Overview on page 97](#)
- [Configuration on page 98](#)
- [Verification on page 104](#)

Requirements

This example requires Junos OS Release 9.5 or later.

No special configuration beyond device initialization is required before configuring this example.

Overview


In this example, core-facing interfaces are enabled for IS-IS Level 2, LDP, and RSVP. Node-link protection is enabled on all the core-facing interfaces, which means that if the primary next hop for any destination that traverses the interfaces becomes unavailable, Junos OS uses a backup link that avoids the next-hop router altogether if necessary.

You also need to configure a routing policy that requires all traffic to use per-packet load balancing in order to enable Packet Forwarding Engine local repair. With local repair, the

Packet Forwarding Engine can correct a path failure and implement a backup loop-free alternate route before it receives recomputed paths from the Routing Engine.

Figure 12 on page 98 shows the topology used in this example.

Figure 12: IS-IS Node-Link Protection Topology

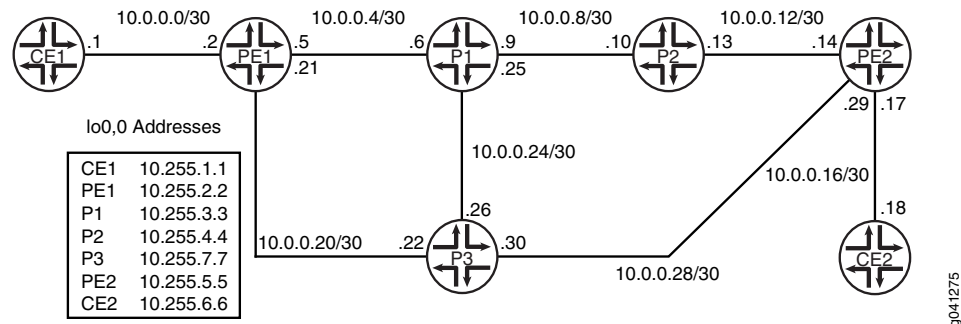

On Device PE1, an RSVP LSP is configured as a backup path for IS-IS. Relying on the shortest-path-first (SPF) calculation of backup paths for one-hop neighbors might result in less than 100 percent backup coverage for a specific network topology. You can enhance coverage of IS-IS and LDP LSPs by configuring RSVP LSPs as backup paths. To configure a specific RSVP LSP as a backup path, include the **backup** statement at the **[edit protocols mpls label-switched-path *lsp-name*]** hierarchy level.

“CLI Quick Configuration” on page 98 shows the configuration for all of the devices in Figure 12 on page 98. The section “Step-by-Step Procedure” on page 101 describes the steps on Device P1.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Device CE1    set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.1/30
               set interfaces lo0 unit 0 family inet address 10.255.1.1/32

Device PE1    set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.2/30
               set interfaces fe-1/2/0 unit 0 family iso
               set interfaces fe-1/2/0 unit 0 family mpls
               set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.5/30
               set interfaces fe-1/2/1 unit 0 family iso
               set interfaces fe-1/2/1 unit 0 family mpls
               set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.21/30
               set interfaces fe-1/2/2 unit 0 family iso
               set interfaces fe-1/2/2 unit 0 family mpls
               set interfaces lo0 unit 0 family inet address 10.255.2.2/32
               set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0202.00
               set protocols rsvp interface fe-1/2/2.0
               set protocols rsvp interface fe-1/2/1.0
               set protocols rsvp interface lo0.0
               set protocols rsvp interface fxp0.0 disable
  
```

```

set protocols mpls label-switched-path to-p2 backup
set protocols mpls label-switched-path to-p2 to 10.255.4.4
set protocols mpls label-switched-path to-p2 ldp-tunneling
set protocols mpls interface fe-1/2/2.0
set protocols mpls interface fe-1/2/1.0
set protocols mpls interface lo0.0
set protocols mpls interface fxp0.0 disable
set protocols bgp group l3vpn type internal
set protocols bgp group l3vpn local-address 10.255.2.2
set protocols bgp group l3vpn family inet-vpn unicast
set protocols bgp group l3vpn peer-as 65534
set protocols bgp group l3vpn local-as 65534
set protocols bgp group l3vpn neighbor 10.255.5.5
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface fe-1/2/1.0
set protocols ldp interface fe-1/2/2.0
set protocols ldp interface fxp0.0 disable
set protocols ldp interface lo0.0
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-instances VPN-A instance-type vrf
set routing-instances VPN-A interface fe-1/2/0.0
set routing-instances VPN-A route-distinguisher 65534:1234
set routing-instances VPN-A vrf-target target:65534:1234
set routing-instances VPN-A routing-options static route 10.255.1.1/32 next-hop 10.0.0.1
set routing-options autonomous-system 65534
set routing-options forwarding-table export ecmp

```

```

Device P1
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.3.3/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0303.00
set protocols rsvp interface all
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all

```

```
set protocols ldp interface fxp0.0 disable
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-options forwarding-table export ecmp
```

Device P2

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.10/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.4.4/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0404.00
set protocols rsvp interface all
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-options forwarding-table export ecmp
```

Device P3

```
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/0 unit 0 family mpls
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.26/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/1 unit 0 family mpls
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.30/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 10.255.7.7/32
set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0707.00
set protocols rsvp interface all
set protocols rsvp interface fxp0.0 disable
set protocols mpls interface all
set protocols mpls interface fxp0.0 disable
set protocols isis spf-options delay 1000
set protocols isis interface all node-link-protection
set protocols isis interface all level 2 metric 10
set protocols isis interface all level 1 disable
set protocols isis interface fxp0.0 disable
set protocols isis interface lo0.0 level 2 metric 0
set protocols ldp deaggregate
set protocols ldp interface all
set protocols ldp interface fxp0.0 disable
set policy-options policy-statement ecmp term 1 then load-balance per-packet
set routing-options forwarding-table export ecmp
```

```

Device PE2  set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.14/30
             set interfaces fe-1/2/0 unit 0 family iso
             set interfaces fe-1/2/0 unit 0 family mpls
             set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.17/30
             set interfaces fe-1/2/1 unit 0 family iso
             set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.29/30
             set interfaces fe-1/2/2 unit 0 family iso
             set interfaces fe-1/2/2 unit 0 family mpls
             set interfaces lo0 unit 0 family inet address 10.255.5.5/32
             set interfaces lo0 unit 0 family iso address 49.0001.0010.0000.0505.00
             set protocols rsvp interface fe-1/2/0.0
             set protocols rsvp interface fe-1/2/2.0
             set protocols rsvp interface lo0.0
             set protocols rsvp interface fxp0.0 disable
             set protocols mpls interface fe-1/2/0.0
             set protocols mpls interface fe-1/2/2.0
             set protocols mpls interface lo0.0
             set protocols mpls interface fxp0.0 disable
             set protocols bgp group l3vpn type internal
             set protocols bgp group l3vpn local-address 10.255.5.5
             set protocols bgp group l3vpn family inet-vpn unicast
             set protocols bgp group l3vpn peer-as 65534
             set protocols bgp group l3vpn local-as 65534
             set protocols bgp group l3vpn neighbor 10.255.2.2
             set protocols isis spf-options delay 1000
             set protocols isis interface all node-link-protection
             set protocols isis interface all level 2 metric 10
             set protocols isis interface all level 1 disable
             set protocols isis interface fxp0.0 disable
             set protocols isis interface lo0.0 level 2 metric 0
             set protocols ldp deaggregate
             set protocols ldp interface fe-1/2/0.0
             set protocols ldp interface fe-1/2/2.0
             set protocols ldp interface fxp0.0 disable
             set protocols ldp interface lo0.0
             set policy-options policy-statement ecmp term 1 then load-balance per-packet
             set routing-instances VPN-A instance-type vrf
             set routing-instances VPN-A interface fe-1/2/1.0
             set routing-instances VPN-A route-distinguisher 65534:1234
             set routing-instances VPN-A vrf-target target:65534:1234
             set routing-instances VPN-A routing-options static route 10.255.1.1/32 next-hop 10.0.0.18
             set routing-options autonomous-system 65534
             set routing-options forwarding-table export ecmp

Device CE2  set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
             set interfaces lo0 unit 0 family inet address 10.255.6.6/32

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the interfaces.

Enable IS-IS and MPLS.

```
[edit interfaces]
user@P1# set fe-1/2/0 unit 0 family inet address 10.0.0.6/30
user@P1# set fe-1/2/0 unit 0 family iso
user@P1# set fe-1/2/0 unit 0 family mpls
user@P1# set fe-1/2/1 unit 0 family inet address 10.0.0.9/30
user@P1# set fe-1/2/1 unit 0 family iso
user@P1# set fe-1/2/1 unit 0 family mpls
user@P1# set fe-1/2/2 unit 0 family inet address 10.0.0.25/30
user@P1# set fe-1/2/2 unit 0 family iso
user@P1# set fe-1/2/2 unit 0 family mpls
user@P1# set lo0 unit 0 family inet address 10.255.3.3/32
user@P1# set lo0 unit 0 family iso address 49.0001.0010.0000.0303.00
```

2. Configure the IS-IS interfaces for Level 2.

```
[edit protocols]
user@P1# set isis interface all level 2 metric 10
user@P1# set isis interface all level 1 disable
user@P1# set isis interface fxp0.0 disable
user@P1# set isis interface lo0.0 level 2 metric 0
```

3. Enable IS-IS node-link protection, which also automatically extends backup coverage to all LDP LSPs.

```
[edit protocols]
user@P1# set isis interface all node-link-protection
```

4. (Optional) Configure a 1000-millisecond time interval between the detection of a topology change and when the SPF algorithm runs.

```
[edit protocols]
user@P1# set isis spf-options delay 1000
```

5. Configure MPLS to use both RSVP and LDP label-switched paths (LSPs).

```
[edit protocols]
user@P1# set mpls interface all
user@P1# set mpls interface fxp0.0 disable
user@P1# set rsvp interface all
user@P1# set rsvp interface fxp0.0 disable
user@P1# set ldp interface all
user@P1# set ldp interface fxp0.0 disable
```

6. (Optional) For LDP, enable forwarding equivalence class (FEC) deaggregation, which results in faster global convergence.

```
[edit protocols]
user@P1# set ldp deaggregate
```

7. To enable Packet Forwarding Engine local repair, establish a policy that forces the routing protocol process to install all the next hops for a given route.

This policy ensures that the backup route is installed in the forwarding table used by the Packet Forwarding Engine to forward traffic to a given destination.

```
[edit policy-options policy-statement ecmp term 1]
user@P1# set then load-balance per-packet
```

8. Apply the policy to the forwarding table of the local router with the **export** statement.

```
[edit routing-options forwarding-table]
user@P1# set export ecmp
```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P1# show interfaces
fe-1/2/0 {
  unit 0 {
    family inet {
      address 10.0.0.6/30;
    }
    family iso;
    family mpls;
  }
}
fe-1/2/1 {
  unit 0 {
    family inet {
      address 10.0.0.9/30;
    }
    family iso;
    family mpls;
  }
}
fe-1/2/2 {
  unit 0 {
    family inet {
      address 10.0.0.25/30;
    }
    family iso;
    family mpls;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 10.255.3.3/32;
    }
    family iso {
      address 49.0001.0010.0000.0303.00;
    }
  }
}
}

user@P1# show protocols
rsvp {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
```

```
mpls {
  interface all;
  interface fxp0.0 {
    disable;
  }
}
isis {
  spf-options delay 1000;
  interface all {
    node-link-protection;
    level 2 metric 10;
    level 1 disable;
  }
  interface fxp0.0 {
    disable;
  }
  interface lo0.0 {
    level 2 metric 0;
  }
}
ldp {
  deaggregate;
  interface all;
  interface fxp0.0 {
    disable;
  }
}

user@P1# show policy-options
policy-statement ecmp {
  term 1 {
    then {
      load-balance per-packet;
    }
  }
}

user@P1# show routing-options
forwarding-table {
  export ecmp;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Checking the MPLS LSP Backup Path on page 105](#)
- [Checking Which Next-Hop Neighbors Are Designated as Backup Paths to the Destination Node on page 105](#)
- [Checking the Backup Coverage on page 106](#)
- [Checking the Type of Protection Configured on page 107](#)

Checking the MPLS LSP Backup Path

- Purpose** Display information about the MPLS label-switched-paths (LSPs) designated as the backup route for the IS-IS routes.
- Action** On Device PE1, from operational mode, enter the **show isis backup label-switched-path** command.
- ```
user@PE1> show isis backup label-switched-path
Backup MPLS LSPs:
to-p2, Egress: 10.255.4.4, Status: up, Last change: 01:17:45
TE-metric: 19, Metric: 0, Refcount: 1
```
- Meaning** The output shows that the backup path is up and operational.

### Checking Which Next-Hop Neighbors Are Designated as Backup Paths to the Destination Node

- Purpose** Display SPF calculations for each neighbor for a given destination.
- Action** On Device PE1, from operational mode, enter the **show isis backup spf results** command.
- ```
user@PE1> show isis backup spf results

IS-IS level 1 SPF results:
0 nodes

IS-IS level 2 SPF results:
PE2.00
  Primary next-hop: fe-1/2/2.0, IPV4, P3, SNPA: 0:5:85:8f:c8:bd
  Root: P2, Root Metric: 20, Metric: 10, Root Preference: 0x0
  track-item: P2.00-00
  Eligible, Backup next-hop: fe-1/2/1.0, LSP, to-p2
  Root: P3, Root Metric: 10, Metric: 10, Root Preference: 0x0
  Not eligible, Reason: Interface is already covered
  Root: P1, Root Metric: 10, Metric: 20, Root Preference: 0x0
  track-item: P3.00-00
  Not eligible, Reason: Interface is already covered
P2.00
  Primary next-hop: fe-1/2/1.0, IPV4, P1, SNPA: 0:5:85:8f:c8:bd
  Root: P2, Root Metric: 20, Metric: 0, Root Preference: 0x0
  track-item: P2.00-00
  Not eligible, Reason: Primary next-hop link fate sharing
  Root: P1, Root Metric: 10, Metric: 10, Root Preference: 0x0
  Not eligible, Reason: Primary next-hop link fate sharing
  Root: P3, Root Metric: 10, Metric: 20, Root Preference: 0x0
  track-item: P1.00-00
  Not eligible, Reason: Primary next-hop node fate sharing
P3.00
  Primary next-hop: fe-1/2/2.0, IPV4, P3, SNPA: 0:5:85:8f:c8:bd
  Root: P2, Root Metric: 20, Metric: 20, Root Preference: 0x0
  track-item: P3.00-00
  track-item: P2.00-00
  track-item: P1.00-00
  Eligible, Backup next-hop: fe-1/2/1.0, LSP, to-p2
  Root: P3, Root Metric: 10, Metric: 0, Root Preference: 0x0
  Not eligible, Reason: Interface is already covered
```

```

Root: P1, Root Metric: 10, Metric: 10, Root Preference: 0x0
track-item: P3.00-00
Not eligible, Reason: Interface is already covered
P1.00
Primary next-hop: fe-1/2/1.0, IPV4, P1, SNPA: 0:5:85:8f:c8:bd
Root: P2, Root Metric: 20, Metric: 10, Root Preference: 0x0
track-item: P2.00-00
track-item: P1.00-00
Not eligible, Reason: Primary next-hop link fate sharing
Root: P1, Root Metric: 10, Metric: 0, Root Preference: 0x0
Not eligible, Reason: Primary next-hop link fate sharing
Root: P3, Root Metric: 10, Metric: 10, Root Preference: 0x0
track-item: P1.00-00
Eligible, Backup next-hop: fe-1/2/2.0, IPV4, P3, SNPA: 0:5:85:8f:c8:bd
4 nodes

```

Meaning The output indicates whether a specific interface or node has been designated as a backup path and why.

Checking the Backup Coverage

Purpose Check the percentage of protected nodes and prefixes.

Action From operational mode, enter the **show isis backup coverage** command.

```
user@PE1> show isis backup coverage
```

```
Backup Coverage:
```

Topology	Level	Node	IPv4	IPv6	CLNS
IPV4 Unicast	1	0.00%	0.00%	0.00%	0.00%
IPV4 Unicast	2	75.00%	87.50%	0.00%	0.00%

```
user@P1> show isis backup coverage
```

```
Backup Coverage:
```

Topology	Level	Node	IPv4	IPv6	CLNS
IPV4 Unicast	1	0.00%	0.00%	0.00%	0.00%
IPV4 Unicast	2	75.00%	71.43%	0.00%	0.00%

```
user@P2> show isis backup coverage
```

```
Backup Coverage:
```

Topology	Level	Node	IPv4	IPv6	CLNS
IPV4 Unicast	1	0.00%	0.00%	0.00%	0.00%
IPV4 Unicast	2	50.00%	37.50%	0.00%	0.00%

```
user@P3> show isis backup coverage
```

```
Backup Coverage:
```

Topology	Level	Node	IPv4	IPv6	CLNS
IPV4 Unicast	1	0.00%	0.00%	0.00%	0.00%
IPV4 Unicast	2	75.00%	71.43%	0.00%	0.00%

```
user@PE2> show isis backup coverage
```

```
Backup Coverage:
```

Topology	Level	Node	IPv4	IPv6	CLNS
IPV4 Unicast	1	0.00%	0.00%	0.00%	0.00%
IPV4 Unicast	2	50.00%	37.50%	0.00%	0.00%

Meaning The level of backup coverage available through IS-IS routes depends on the actual network topology and is typically less than 100 percent for all destinations on any given routing device. You can extend backup coverage to include RSVP LSPs.

Checking the Type of Protection Configured

Purpose On all nodes in the IS-IS domain, check the type and percentage of protected nodes and prefixes.

Action From operational mode, enter the **show isis interface detail** command.

```
user@PE1> show isis interface detail
```

```
IS-IS interface database:
```

```
lo0.0
```

```
Index: 76, State: 0x6, Circuit id: 0x1, Circuit type: 0
```

```
LSP interval: 100 ms, CSNP interval: disabled
```

```
Adjacency advertisement: Advertise
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
1 0 64 0 Passive
```

```
2 0 64 0 Passive
```

```
fe-1/2/2.0
```

```
Index: 79, State: 0x6, Circuit id: 0x1, Circuit type: 2
```

```
LSP interval: 100 ms, CSNP interval: 10 s
```

```
Adjacency advertisement: Advertise
```

```
Protection Type: Node Link
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
2 1 64 10 9.000 27 P3.03 (not us)
```

```
fe-1/2/1.0
```

```
Index: 77, State: 0x6, Circuit id: 0x1, Circuit type: 2
```

```
LSP interval: 100 ms, CSNP interval: 10 s
```

```
Adjacency advertisement: Advertise
```

```
Protection Type: Node Link
```

```
Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
```

```
2 1 64 10 9.000 27 P1.02 (not us)
```

Meaning The output shows that node-link protection is configured on the interfaces.

Related Documentation

- [Understanding Loop-Free Alternate Routes for IS-IS on page 24](#)

Related Documentation

- [Example: Configuring BFD for IS-IS](#)

CHAPTER 5

Example: Configuring IS-IS for CLNS

- [Understanding IS-IS for CLNS on page 109](#)
- [Example: Configuring IS-IS for CLNS on page 109](#)

Understanding IS-IS for CLNS

IS-IS extensions provide the basic interior gateway protocol (IGP) support for collecting intradomain routing information for Connectionless Network Service (CLNS) destinations within a CLNS network. Routers that learn host addresses through End System-to-Intermediate System (ES-IS) can advertise the addresses to other routers (intermediate systems) by using IS-IS.

For more information about IS-IS, see the ISO 10589 standard.

Related Documentation

- [CLNS Overview](#)
- [Example: Configuring IS-IS for CLNS on page 109](#)

Example: Configuring IS-IS for CLNS

This example shows how to create a routing instance and enable IS-IS protocol on all interfaces.

- [Requirements on page 109](#)
- [Overview on page 109](#)
- [Configuration on page 110](#)
- [Verification on page 111](#)

Requirements

Before you begin, configure the network interfaces. See *Interfaces Overview*.

Overview

The configuration instructions in this topic describe how to create a routing-instance called `aaaa`, enable IS-IS on all interfaces, and define BGP export policy name (`dist-bgp`), family (`ISO`), and protocol (`BP`), and apply the export policy to IS-IS.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
set routing-instances aaaa protocols isis clns-routing
set routing-instances aaaa protocols isis interface all
set routing-instances aaaa protocols isis no-ipv4-routing no-ipv6-routing
set policy-options policy-statement dist-bgp from family iso protocol bgp
set policy-options policy-statement dist-bgp then accept
set routing-instances aaaa protocols isis export dist-bgp
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode*.

To configure IS-IS for CLNS:

1. Configure the routing instance.

```
[edit]
user@host# edit routing-instances aaaa
```
2. Enable CLNS routing.

```
[edit routing-instances aaaa]
user@host# set protocols isis clns-routing
```
3. Enable IS-IS on all interfaces.

```
[edit routing-instances aaaa]
user@host# set protocols isis interface all
```
4. (Optional) Disable IPv4 and IPv6 routing to configure a pure CLNS network .

```
[edit routing-instances aaaa]
user@host# set protocols isis no-ipv4-routing no-ipv6-routing
```
5. Define the BGP export policy name, family, and protocol.

```
[edit policy-options]
user@host# set policy-statement dist-bgp from family iso protocol bgp
```
6. Define the action for the export policy.

```
[edit policy-options]
user@host# set policy-statement dist-bgp then accept
```
7. Apply the export policy to IS-IS.

```
[edit routing-instances aaaa]
user@host# set protocols isis export dist-bgp
```

Results From configuration mode, confirm your configuration by entering the **show routing-instances** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
[edit]
user@host# show routing-instances
aaaa {
  protocols {
    isis {
      export dist-bgp;
      no-ipv4-routing;
      no-ipv6-routing;
      clns-routing;
      interface all;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Verifying Routing-Instance for CLNS on page 111](#)
- [Verifying IS-IS for CLNS on page 111](#)

Verifying Routing-Instance for CLNS

Purpose Verify that the policy options are enabled for the routing instance.

Action From operational mode, enter the **show routing-instances** command.

Verifying IS-IS for CLNS

Purpose Verify that IS-IS is enabled.

Action From operational mode, enter the **show protocols** command.

Related Documentation

- [CLNS Configuration Overview](#)
- [Understanding IS-IS for CLNS on page 109](#)
- [Verifying a CLNS VPN Configuration](#)

CHAPTER 6

Example: Configuring IS-IS Designated Routers

- [Understanding IS-IS Designated Routers on page 113](#)
- [Configuring Designated Router Election Priority for IS-IS on page 113](#)

Understanding IS-IS Designated Routers

A router advertises its priority to become a designated router in its hello packets. On all multiaccess networks (physical networks that support the attachment of more than two routers, such as Ethernet networks), IS-IS uses the advertised priorities to elect a designated router for the network. This router is responsible for sending network link-state advertisements, which describe all the routers attached to the network. These advertisements are flooded throughout a single area. The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.

A router's priority for becoming the designated router is indicated by an arbitrary number from 0 through 127, which you configure on the IS-IS interface. The router with the highest priority becomes the designated router for the area (Level 1, Level 2, or both), also configured on the IS-IS interface. If routers in the network have the same priority, then the router with the highest MAC address is elected as the designated router. By default, routers have a priority value of 64.

Related Documentation

- *Junos OS Feature Support Reference for SRX Series and J Series Devices*
- *OBSOLETE IS-IS Overview*
- [Configuring Designated Router Election Priority for IS-IS on page 113](#)

Configuring Designated Router Election Priority for IS-IS

This example shows how to configure the designated router election priority for IS-IS.

Before you begin:

- Configure network interfaces. See the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Enable IS-IS on the interfaces. See [“Example: Configuring IS-IS” on page 31](#).

In this example, you configure the priority for logical interface ge-0/0/1.0 to be 100 and the level number to be 1. If this interface has the highest priority value, the router becomes the designated router for the Level 1 area.

To configure a designated router election priority for IS-IS:

[edit]

user@host# **set protocols isis interface ge-0/0/1.0 level 1 priority 100**

- Related Documentation**
- [Understanding IS-IS Designated Routers on page 113](#)
 - [Example: Configuring IS-IS on page 31](#)

- Related Documentation**
- [Example: Configuring IS-IS](#)


CHAPTER 7

IS-IS Configuration Statements

- [authentication-key on page 117](#)
- [authentication-key-chain \(Protocols IS-IS\) on page 118](#)
- [authentication-type on page 119](#)
- [bfd-liveness-detection on page 120](#)
- [checksum \(Protocols IS-IS\) on page 122](#)
- [csnp-interval on page 123](#)
- [disable \(IS-IS\) on page 124](#)
- [export on page 125](#)
- [external-preference on page 126](#)
- [family on page 127](#)
- [graceful-restart on page 128](#)
- [hello-authentication-key on page 129](#)
- [hello-authentication-key-chain on page 130](#)
- [hello-authentication-type on page 131](#)
- [hello-interval \(Protocols IS-IS\) on page 132](#)
- [hello-padding on page 134](#)
- [hold-time \(Protocols IS-IS\) on page 136](#)
- [ignore-attached-bit on page 137](#)
- [interface on page 138](#)
- [ipv4-multicast on page 140](#)
- [ipv4-multicast-metric on page 140](#)
- [ipv6-multicast on page 141](#)
- [ipv6-multicast-metric on page 141](#)
- [ipv6-unicast on page 142](#)
- [ipv6-unicast-metric on page 143](#)
- [isis on page 144](#)
- [level \(Global IS-IS\) on page 145](#)
- [link-protection on page 146](#)

- [loose-authentication-check](#) on page 146
- [lsp-interval](#) on page 147
- [lsp-lifetime](#) on page 148
- [max-areas](#) on page 149
- [mesh-group](#) on page 150
- [metric](#) on page 151
- [no-adjacency-holddown](#) on page 152
- [no-authentication-check](#) on page 152
- [no-csnp-authentication](#) on page 153
- [no-eligible-backup](#) on page 153
- [no-hello-authentication](#) on page 154
- [no-ipv4-multicast](#) on page 154
- [no-ipv4-routing](#) on page 155
- [no-ipv6-multicast](#) on page 155
- [no-ipv6-routing](#) on page 156
- [no-ipv6-unicast](#) on page 156
- [no-psnp-authentication](#) on page 157
- [no-unicast-topology](#) on page 157
- [node-link-protection](#) on page 158
- [overload \(Protocols IS-IS\)](#) on page 159
- [passive](#) on page 162
- [point-to-point](#) on page 163
- [preference](#) on page 164
- [prefix-export-limit](#) on page 165
- [priority](#) on page 166
- [reference-bandwidth](#) on page 167
- [rib-group](#) on page 168
- [spf-options \(Protocols IS-IS\)](#) on page 169
- [topologies \(Protocols IS-IS\)](#) on page 170
- [traceoptions \(Protocols IS-IS\)](#) on page 171
- [traffic-engineering \(Protocols IS-IS\)](#) on page 174
- [wide-metrics-only](#) on page 177

authentication-key

Syntax	<code>authentication-key key;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis hello-authentication-key-edit-protocols-isis level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>],</p> <p>[edit protocols isis level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Authentication key (password). Neighboring routing devices use the password to verify the authenticity of packets sent from this interface. For the key to work, you also must include the authentication-type statement.</p> <p>All routing devices must use the same password. If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces adjacent to the Juniper Networks routing device.</p>
Default	If you do not include this statement and the authentication-type statement, IS-IS authentication is disabled.
Options	<p>key—Authentication password. The password can be up to 1024 characters long. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>
<div style="display: flex; align-items: center;">  <div style="margin-left: 10px;"> <p>CAUTION: A simple password for authentication is truncated if it exceeds 254 characters.</p> </div> </div>	
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • Configuring IS-IS Authentication on page 29

authentication-key-chain (Protocols IS-IS)

Syntax	authentication-key-chain <i>key-chain-name</i> ;
Hierarchy Level	[edit logical-systems <i>name</i> protocols isis level <i>level-number</i>], [edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis level <i>level-number</i>], [edit protocols isis level <i>level-number</i>], [edit routing-instances <i>instance-name</i> protocols isis level <i>level-number</i>]
Release Information	Statement introduced in Junos OS Release 11.2. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Apply and enable an authentication keychain to the routing device.
Options	key-chain —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 45• Example: Configuring Route Authentication for BGP• Example: Configuring BFD Authentication for Securing Static Routes• Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols• Understanding Hitless Authentication Key Rollover for IS-IS on page 23

authentication-type

Syntax	<code>authentication-type <i>authentication</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level level-number], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level level-number], [edit protocols isis level level-number], [edit routing-instances <i>routing-instance-name</i> protocols isis level level-number]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Enable authentication and specify the authentication scheme for IS-IS. If you enable authentication, you must specify a password by including the authentication-key statement.
Default	If you do not include this statement and the authentication-key statement, IS-IS authentication is disabled.
Options	authentication —Authentication scheme: <ul style="list-style-type: none"> • md5—Use HMAC authentication in combination with MD5. HMAC-MD5 authentication is defined in RFC 2104, <i>HMAC: Keyed-Hashing for Message Authentication</i>. • simple—Use a simple password for authentication. The password is included in the transmitted packet, making this method of authentication relatively insecure. We recommend that you <i>not</i> use this authentication method.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • authentication-key on page 117 • no-authentication-check on page 152 • Configuring IS-IS Authentication on page 29

bfd-liveness-detection

Syntax	<pre> bfd-liveness-detection { authentication { algorithm <i>algorithm-name</i>; key-chain <i>key-chain-name</i>; loose-check; } bfd-per-address-family; detection-time { threshold <i>milliseconds</i>; } minimum-interval <i>milliseconds</i>; minimum-receive-interval <i>milliseconds</i>; multiplier <i>number</i>; no-adaptation; transmit-interval { minimum-interval <i>milliseconds</i>; threshold <i>milliseconds</i>; } version (1 automatic); } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface interface-name],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface interface-name],</p> <p>[edit protocols isis interface interface-name],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface interface-name]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>detection-time threshold and transmit-interval threshold options added in Junos OS Release 8.2.</p> <p>Support for logical systems introduced in Junos OS Release 8.3.</p> <p>no-adaptation statement introduced in Junos OS Release 9.0.</p> <p>authentication algorithm, authentication key-chain, and authentication loose-check options introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>Support for IPv6 interfaces introduced in Junos OS Release 14.1R2.</p> <p>bfd-per-address-family statement introduced in Junos OS Release 14.1R2.</p>
Description	Configure bidirectional failure detection timers and authentication.
Options	<p>authentication algorithm <i>algorithm-name</i> —Configure the algorithm used to authenticate the specified BFD session: simple-password, keyed-md5, keyed-sha-1, meticulous-keyed-md5, meticulous-keyed-sha-1.</p> <p>authentication key-chain <i>key-chain-name</i>—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must</p>

match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

authentication loose-check—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication may not be configured at both ends of the BFD session.

bfd-per-address-family—(Optional) Specify to enable BFD for IPv4 and IPv6 interfaces that are configured on the same IS-IS instance. You must include this statement on both the IPv4 and IPv6 interfaces.



NOTE: If IPv6 is enabled on both sides of the adjacency, you must either configure the **bfd-per-address-family** statement or the **no-ipv4-routing** statement at the **[edit protocols isis]** hierarchy level to ensure that the IPv6 BFD session is created.

detection-time threshold *milliseconds*—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

minimum-interval *milliseconds*—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the **transmit-interval minimum-interval** and **minimum-receive-interval** statements.

Range: 1 through 255,000

minimum-receive-interval *milliseconds*—Configure the minimum interval after which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement.

Range: 1 through 255,000

multiplier *number*—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

Range: 1 through 255

Default: 3

no-adaptation—Specify that BFD sessions not adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

transmit-interval threshold *milliseconds*—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

Range: 0 through 4,294,967,295 ($2^{32} - 1$)

transmit-interval minimum-interval *milliseconds*—Configure a minimum interval after which the local routing device transmits hello packets to a neighbor. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement.

Range: 1 through 255,000

version—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version)

Default: **automatic**

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Configuring BFD for IS-IS*
- *Configuring BFD Authentication for IS-IS*

checksum (Protocols IS-IS)

Syntax checksum;

Hierarchy Level [edit logical-systems *logical-system-name* protocols isis **interface** *interface-name*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols isis **interface** *interface-name*],
[edit protocols isis **interface** *interface-name*],
[edit routing-instances *routing-instance-name* protocols isis **interface** *interface-name*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.

Description Enable checksums for packets on this interface.

Junos OS supports IS-IS checksums as documented in RFC 3358, *Optional Checksums in Intermediate System to Intermediate System (ISIS)*.

The checksum cannot be enabled with MD5 hello authentication on the same interface.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.


csnp-interval

Syntax	csnp-interval (<i>seconds</i> disable);
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface interface-name], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface interface-name], [edit protocols isis interface interface-name], [edit routing-instances <i>routing-instance-name</i> protocols isis interface interface-name]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Configure the interval between complete sequence number (CSN) packets on a LAN interface.
Options	disable —Do not send CSN packets on this interface. seconds —Number of seconds between the sending of CSN packets. Range: 1 through 65,535 seconds Default: 10 seconds
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <i>Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces</i>

disable (IS-IS)

Syntax	disable;
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering], [edit protocols isis], [edit protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis traffic-engineering], [edit routing-instances <i>routing-instance-name</i> protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
Description	<p>Disable IS-IS on the routing device, on an interface, or on a level. At the [edit protocols isis traffic-engineering] hierarchy level, disable IS-IS support for traffic engineering.</p> <p>Enabling IS-IS on an interface (by including the interface statement at the [edit protocols isis] or the [edit routing-instances <i>routing-instance-name</i> protocols isis] hierarchy level), disabling it (by including the disable statement), and not actually having IS-IS run on an interface (by including the passive statement) are mutually exclusive states.</p>
Default	<p>IS-IS is enabled for Level 1 and Level 2 routers on all interfaces on which an International Organization for Standardization (ISO) protocol family is enabled.</p> <p>IS-IS support for traffic engineering is enabled.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • IS-IS Overview on page 17 • Configuring IS-IS Traffic Engineering Attributes • Disabling IS-IS

export

Syntax	<code>export [<i>policy-names</i>];</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis],</p> <p>[edit protocols isis],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Apply one or more policies to routes being exported from the routing table into IS-IS.</p> <p>All routing protocols store the routes that they learn in the routing table. The routing table uses this collected route information to determine the active routes to destinations. The routing table then installs the active routes into its forwarding table and exports them into the routing protocols. It is these exported routes that the protocols advertise.</p> <p>For each protocol, you control which routes the protocol stores in the routing table and which routes the routing table exports into the protocol from the routing table by defining a <i>routing policy</i> for that protocol.</p>
	<div>  <p>NOTE: For IS-IS, you cannot apply routing policies that affect how routes are imported into the routing table; doing so with a link-state protocol can easily lead to an inconsistent topology database.</p> </div>
Options	<i>policy-names</i> —Name of one or more policies.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	

external-preference

Syntax	<code>external-preference <i>preference</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level level-number], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level level-number], [edit protocols isis level level-number], [edit routing-instances <i>routing-instance-name</i> protocols isis level level-number]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Configure the preference of external routes.
Options	<i>preference</i> —Preference value. Range: 0 through 4,294,967,295 ($2^{32} - 1$) Default: 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• preference on page 164• <i>Configuring Preference Values for IS-IS Routes</i>

family

Syntax	<pre>family inet { shortcuts { multicast-rpf-routes; } } family inet6 { shortcuts; }</pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis level],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level],</p> <p>[edit protocols isis level],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis level]</p>
Release Information	<p>Statement introduced in Junos OS Release 9.3.</p> <p>Support for IPv6 for IGP shortcuts introduced in Junos OS Release 9.3.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
Description	Configure the address family for traffic engineering IS-IS interior gateway protocol (IGP) shortcuts.
Options	<p>inet—IPv4 address family</p> <p>inet6—IPv6 address family</p> <p>The remaining statements are explained separately. See CLI Explorer.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <i>Configuring IS-IS Traffic Engineering Attributes</i>

graceful-restart

Syntax	<pre>graceful-restart { disable; helper-disable; restart-duration <i>seconds</i>; }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure graceful restart for IS-IS.
Options	<p>disable—Disable graceful restart.</p> <p>helper-disable—Disable graceful restart helper capability. Helper mode is enabled by default.</p> <p>restart-duration <i>seconds</i>—Configure the time period for the restart to last, in seconds. Range: 30 through 300 seconds Default: 30 seconds</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

hello-authentication-key

Syntax	<code>hello-authentication-key password;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
Description	Configure an authentication key (password) for hello packets. Neighboring routing devices use the password to verify the authenticity of packets sent from an interface. For the key to work, you also must include the hello-authentication-type statement.
Default	By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.
Options	<p>password—Authentication password. The password can be up to 255 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • authentication-key on page 117 • authentication-type on page 119 • hello-authentication-type on page 131 • Configuring Levels on IS-IS Interfaces


hello-authentication-key-chain

Syntax	hello-authentication-key-chain <i>key-chain-name</i> ;
Hierarchy Level	[edit logical-systems <i>name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]
Release Information	Statement introduced in Junos OS Release 11.2. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Apply an authentication keychain to the IS-IS interface.
Options	<i>key-chain-name</i> —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Understanding Hitless Authentication Key Rollover for IS-IS on page 23• Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 45

hello-authentication-type

Syntax	hello-authentication-type (md5 simple);
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>], [edit protocols isis interface <i>interface-name</i> level <i>number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Enable authentication on an interface for hello packets. If you enable authentication on hello packets, you must specify a password by including the hello-authentication-key statement.
Default	By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.
Options	md5 —Specifies Message Digest 5 as the packet verification type. simple —Specifies simple authentication as the packet verification type.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • authentication-key on page 117 • authentication-type on page 119 • hello-authentication-key on page 129 • Configuring Levels on IS-IS Interfaces

hello-interval (Protocols IS-IS)

Syntax	<code>hello-interval seconds;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Modify the frequency with which the routing device sends hello packets out of an interface, in seconds.</p> <p>Routing devices send hello packets at a fixed interval on all interfaces to establish and maintain neighbor relationships. This interval is advertised in the hello interval field in the hello packet.</p> <p>You can send out hello packets in subsecond intervals. To send out hello packets every 333 milliseconds, set the hold-time value to 1.</p>
Options	<p>seconds—Frequency of transmission for hello packets.</p> <p>Range: 1 through 20,000 seconds</p> <p>Default: 3 seconds (for designated intermediate system [DIS] routers), 9 seconds (for non-DIS routers)</p>
	<p> NOTE: When elected as a designated intermediate system [DIS] router on any LAN adjacency, the hello and hold-timer intervals are scaled down by a factor of 3. This means the default values of 9 and 27 seconds of ISIS hello and hold time intervals are scaled down to 3 and 9 seconds for LAN adjacencies. During switchovers, this hello interval is too short to form LAN adjacencies. Therefore, you can configure one of the following solutions:</p> <ul style="list-style-type: none"> • Set the hello and hold time interval for LAN adjacencies to 30 seconds and 90 seconds respectively on both the DIS and a neighboring router. • Convert the LAN interfaces to point-to-point IS-IS interfaces.
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

Related • *hold-time*
Documentation

hello-padding

Syntax	hello-padding (adaptive loose strict);
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>]
Release Information	Statement introduced in Junos OS Release 8.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Configure padding on hello packets to accommodate asymmetrical maximum transfer units (MTUs) from different hosts.</p> <p>This helps to prevent a premature adjacency Up state when one routing device's MTU does not meet the requirements to establish the adjacency.</p> <p>As an OSI Layer 2 protocol, IS-IS does not support data fragmentation. Therefore, maximum packet sizes must be established and supported between two routers. During adjacency establishment, the IS-IS protocol makes sure that the link supports a packet size of 1492 bytes by padding outgoing hello packets up to the maximum packet size of 1492 bytes.</p> <p>This is the default behavior of the Junos OS IS-IS implementation. However, Junos OS provides an option to disable hello padding that can override this behavior.</p> <p>There are four types of hello padding:</p> <ul style="list-style-type: none"> Adaptive padding—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state type, length, and value (TLV) tuple. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface. Adaptive padding has more overhead than loose padding and is able to detect MTU asymmetry from one side of the connection. This one-sided detection can result in generation of extra link-state PDUs that are flooded throughout the network. Specify the adaptive option to configure enough padding to establish an adjacency to neighbors. Disabled padding—Padding is disabled on all types of interfaces for all adjacency states. Specify the disable option to accommodate interfaces that support less than the default packet size of 1492 bytes. Loose padding (the default)—The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state. Loose padding might not be able to detect certain situations such as asymmetrical MTUs between the routing devices. Specify the loose option to configure enough padding to initialize an adjacency to neighbors.

- **Strict padding**—Padding is done on all interface types and for all adjacency states, and is continuous. Strict padding has the most overhead. The advantage is that strict padding detects MTU issues on both sides of a link. Specify the **strict** option to configure padding to allow all adjacency states with neighbors.

Options **adaptive**—Configure padding until the neighbor adjacency is established and active.

disable—Disable padding on all types of interfaces for all adjacency states.

loose—Configure padding until the state of the adjacency is initialized.

strict—Configure padding for all adjacency states.

Required Privilege routing—To view this statement in the configuration.
Level routing-control—To add this statement to the configuration.

hold-time (Protocols IS-IS)

Syntax	<code>hold-time seconds;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Set the length of time a neighbor considers this router to be operative (up) after receiving a hello packet. If the neighbor does not receive another hello packet within the specified time, it marks this routing device as inoperative (down). The hold time itself is advertised in the hello packets.</p> <p>The hold time specifies how long a neighbor should consider this routing device to be operative without receiving another hello packet. If the neighbor does not receive a hello packet from this routing device within the hold time, it marks the routing device as being unavailable.</p> <p>For systems configured with graceful routing switchover (GRES) with Graceful Restart, the hold time for Master and Backup Routing Engines should be set to a value higher than 40 seconds. This ensures that adjacencies between the Routing Engine and the neighboring peer 'helper' routers do not time out, stopping graceful restart, and all traffic.</p>
Options	<p>seconds—Hold-time value, in seconds.</p> <p>Range: 3 through 65,535 seconds, or 1 to send out hello packets every 333 milliseconds</p> <p>Default: 9 seconds (for designated intermediate system [DIS] routers), 27 seconds (for non-DIS routers; three times the default hello interval)</p>



NOTE: When elected as a designated intermediate system [DIS] router on any LAN adjacency, the hello and hold-timer intervals are scaled down by a factor of 3. This means the default values of 9 and 27 seconds of ISIS hello and hold time intervals are scaled down to 3 and 9 seconds for LAN adjacencies. During switchovers, this hold time is too short to form LAN adjacencies. Therefore, you can configure one of the following solutions:

- Set the hello and hold time interval for LAN adjacencies to 30 seconds and 90 seconds respectively on both the DIS router and a neighboring router.
- Convert the LAN interfaces to point-to-point IS-IS interfaces.

Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring Graceful Routing Engine Switchover</i> • <i>Example: Configuring IS-IS</i> • <i>Example: Configuring IS-IS for GRES with Graceful Restart</i> • hello-interval on page 132

ignore-attached-bit

Syntax	ignore-attached-bit;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Ignore the attached bit on IS-IS Level 1 routers. Configuring this statement enables the routing device to ignore the attached bit on incoming Level 1 LSPs. If the attached bit is ignored, no default route, which points to the routing device which has set the attached bit, is installed.
Default	The ignore-attached-bit statement is disabled by default.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring IS-IS</i>

interface

```

Syntax interface (all | interface-name) {
    disable;
    bfd-liveness-detection {
        authentication {
            algorithm algorithm-name;
            key-chain key-chain-name;
            loose-check;
        }
        detection-time {
            threshold milliseconds;
        }
        minimum-interval milliseconds;
        minimum-receive-interval milliseconds;
        transmit-interval {
            threshold milliseconds;
            minimum-interval milliseconds;
        }
        multiplier number;
    }
    checksum;
    csnp-interval (seconds | disable);
    hello-padding (adaptive | loose | strict);
    ldp-synchronization {
        disable;
        hold-time seconds;
    }
    lsp-interval milliseconds;
    mesh-group (value | blocked);
    no-adjacency-holddown;
    no-ipv4-multicast;
    no-ipv6-multicast;
    no-ipv6-unicast;
    no-unicast-topology;
    passive;
    point-to-point;
    level level-number {
        disable;
        hello-authentication-key key;
        hello-authentication-key-chain key-chain-name;
        hello-authentication-type authentication;
        hello-interval seconds;
        hold-time seconds;
        ipv4-multicast-metric metric;
        ipv6-multicast-metric metric;
        ipv6-unicast-metric metric;
        metric metric;
        passive;
        priority number;
        te-metric metric;
    }
}

```

Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis],</p> <p>[edit protocols isis],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p>no-eligible-remote-backup option introduced in Junos OS Release 14.2 for the MX Series.</p>
Description	<p>Configure interface-specific IS-IS properties. To configure more than one interface, include the interface statement multiple times.</p> <p>Enabling IS-IS on an interface (by including the interface statement at the [edit protocols isis] or the [edit routing-instances <i>routing-instance-name</i> protocols isis] hierarchy level), disabling it (by including the disable statement), and not actually having IS-IS run on an interface (by including the passive statement) are mutually exclusive states.</p>
Options	<p>all—Have Junos OS create IS-IS interfaces automatically. If you include this option, disable IS-IS on the management interface (fxp0).</p> <p>interface-name—Name of an interface. Specify the full interface name, including the physical and logical address components.</p> <p>The remaining statements are explained separately. See CLI Explorer.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • Configuring of Interface-Specific IS-IS Properties • Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 36

ipv4-multicast

Syntax	ipv4-multicast;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis topologies], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis topologies], [edit protocols isis topologies], [edit routing-instances <i>routing-instance-name</i> protocols isis topologies]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Configure alternate IPv4 multicast topologies.
Default	Multicast topologies are disabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring IS-IS Multicast Topology on page 77

ipv4-multicast-metric

Syntax	ipv4-multicast-metric <i>metric</i> ;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Specify the multicast topology metric value for the level.
Options	<i>metric</i> —Metric value. Range: 0 through 16,777,215
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring IS-IS Multicast Topology on page 77


ipv6-multicast

Syntax	ipv6-multicast;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis topologies], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis topologies], [edit protocols isis topologies], [edit routing-instances <i>routing-instance-name</i> protocols isis topologies]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure alternate IPv6 multicast topologies.
Default	Multicast topologies are disabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring IS-IS Multicast Topology on page 77

ipv6-multicast-metric

Syntax	ipv6-multicast-metric <i>metric</i> ;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the IPv6 alternate multicast topology metric value for the level.
Options	<i>metric</i> —Metric value. Range: 0 through 16,777,215
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring IS-IS Multicast Topology on page 77

ipv6-unicast

Syntax	ipv6-unicast;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis topologies], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis topologies], [edit protocols isis topologies], [edit routing-instances <i>routing-instance-name</i> protocols isis topologies]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Configure alternate IPv6 unicast topologies. This statement causes IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to inet6.0.
<div>  <p>NOTE: The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This lets you exercise control over the paths that unicast data takes through a network.</p> </div>	
Default	IPv6 unicast topologies are disabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <i>Configuring IS-IS IPv6 Unicast Topologies</i>

ipv6-unicast-metric

Syntax	ipv6-unicast-metric <i>metric</i> ;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Specify the IPv6 unicast topology metric value for the level.
Options	<i>metric</i> —Metric value. Range: 0 through 16,777,215
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring IS-IS IPv6 Unicast Topologies</i>

isis

Syntax	isis { ... }
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols], [edit protocols], [edit routing-instances <i>routing-instance-name</i> protocols]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Enable IS-IS routing on the routing device or for a routing instance. The isis statement is the one statement you must include in the configuration to run IS-IS on the routing device or in a routing instance.
Default	IS-IS is disabled on the routing device.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 36

level (Global IS-IS)

Syntax	<pre> level <i>level-number</i> { authentication-key <i>key</i>; authentication-key-chain (Protocols IS-IS) <i>key-chain-name</i>; authentication-type <i>type</i>; disable; external-preference <i>preference</i>; no-csnp-authentication; no-hello-authentication; no-psnp-authentication; preference <i>preference</i>; wide-metrics-only; } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis],</p> <p>[edit protocols isis],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure the global-level properties.</p> <p>You can administratively divide a single AS into smaller groups called areas. You configure each routing device interface to be in an area. Any interface can be in any area. The area address applies to the entire routing device. You cannot specify one interface to be in one area and another interface in a different area. To route between areas, you must have two adjacent Level 2 routers that communicate with each other.</p> <p>Level 1 routers can only route within their IS-IS area. To send traffic outside their area, Level 1 routers must send packets to the nearest intra-area Level 2 router. A routing device can be a Level 1 router, a Level 2 router, or both. You specify the router level on a per-interface basis, and a routing device becomes adjacent to other routing devices on the same level on that link only.</p> <p>You can configure one Level 1 routing process and one Level 2 routing process on each interface, and you can configure the two levels differently.</p>
Options	<p>level-number—IS-IS level number.</p> <p>Values: 1 or 2</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>

link-protection

Syntax	link-protection;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>]
Release Information	Statement introduced in Junos OS Release 9.5. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Enable link protection on the specified IS-IS interface. Junos OS creates a backup loop-free alternate path to the primary next hop for all destination routes that traverse the protected interface.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• node-link-protection on page 158• <i>Configuring Loop-Free Alternate Routes for IS-IS</i>

loose-authentication-check

Syntax	loose-authentication-check;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Allow the use of MD5 authentication without requiring network-wide deployment.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Understanding Hitless Authentication Key Rollover for IS-IS on page 23• Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 45

lsp-interval

Syntax	<code>lsp-interval <i>milliseconds</i>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>],</p> <p>[edit protocols isis interface <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure the link-state PDU interval time.</p> <p>By default, the routing device sends one link-state PDU packet out an interface every 100 milliseconds. To disable the transmission of all link-state PDUs, set the interval to 0.</p> <p>Link-state PDU throttling by use of the lsp-interval statement controls the flooding pace to neighboring routing devices in order to not overload them.</p> <p>Also, consider that control traffic (such as link-state PDUs and related packets) might delay user traffic (information packets) because control traffic always has precedence in terms of scheduling on the routing device interface cards. Unfortunately, the control traffic transmission rate is not decreased on low-bandwidth interfaces, such as DS-0 or fractional T1 and E1 interface. Line control traffic stays the same. On a low-bandwidth circuit that is transmitting 30 full-MTU-sized packets, there is not much bandwidth left over for other types of packets.</p>
Default	By default, the routing device sends one link-state PDU out an interface every 100 milliseconds.
Options	<p>milliseconds—Number of milliseconds between the sending of link-state PDUs. Specifying a value of 0 blocks all link-state PDU transmission.</p> <p>Range: 0 through 1000 milliseconds</p> <p>Default: 100 milliseconds</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</i> • <i>Understanding Link-State PDU Throttling for IS-IS Interfaces</i> • <i>Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces</i> • <i>Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces</i>

lsp-lifetime

Syntax	<code>lsp-lifetime <i>seconds</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Specify how long a link-state PDU originating from the routing device should persist in the network. The routing device sends link-state PDUs often enough so that the link-state PDU lifetime never expires.
Options	<i>seconds</i> —link-state PDU lifetime, in seconds. Range: 350 through 65,535 seconds Default: 1200 seconds
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring the Link-State PDU Lifetime for IS-IS</i>

max-areas

Syntax	<code>max-areas <i>number</i>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis]</p> <p>[edit protocols isis],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis]</p>
Release Information	<p>Statement introduced in Junos OS Release 8.1.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Modify the maximum number of IS-IS areas advertised.</p> <p>This value is included in the Maximum Address Area field of the IS-IS common PDU header included in all outgoing PDUs.</p> <p>The maximum number of areas you can advertise is restricted to 36 to ensure that the IIH PDUs have enough space to include other type, length, and value (TLV) fields, such as the Authentication and IPv4 and IPv6 Interface Address TLVs.</p>
Options	<p><i>number</i>—Maximum number of areas to include in the IS-IS hello (IIH) PDUs and link-state PDUs.</p> <p>Range: 3 through 36</p> <p>Default: 3</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <i>Limiting the Number of Advertised IS-IS Areas</i>

mesh-group

Syntax	mesh-group (blocked <i>value</i>);
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface interface-name], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface interface-name], [edit protocols isis interface interface-name], [edit routing-instances <i>routing-instance-name</i> protocols isis interface interface-name]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Configure an interface to be part of a mesh group, which is a set of fully connected nodes.
Options	blocked —Configure the interface so that it does not flood link-state PDU packets. value —Number that identifies the mesh group. Range: 1 through 4,294,967,295 ($2^{32} - 1$; 32 bits are allocated to identify a mesh group)
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Mesh Groups of IS-IS Interfaces</i>

metric

Syntax	<code>metric <i>metric</i>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
Description	Specify the metric value for the level.
Options	<p><i>metric</i>—Metric value.</p> <p>Range: 1 through 63, or 1 through 16,777,215 (if you have configured wide metrics)</p> <p>Default: 10 (for all interfaces except lo0), 0 (for the lo0 interface)</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <i>te-metric</i> wide-metrics-only on page 177 <i>Configuring Levels on IS-IS Interfaces</i>

no-adjacency-holddown

Syntax	no-adjacency-holddown;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced in Junos OS Release 8.0. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Disable the hold-down timer for IS-IS adjacencies.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Quicker Advertisement of IS-IS Adjacency State Changes</i>

no-authentication-check

Syntax	no-authentication-check;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Generate authenticated packets and check the authentication on received packets, but do not reject packets that cannot be authenticated.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• csnp-interval on page 123• hello-authentication-type on page 131• Configuring IS-IS Authentication on page 29

no-csnp-authentication

Syntax	no-csnp-authentication;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>], [edit protocols isis level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Suppress authentication check on complete sequence number PDU (CSNP) packets.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • csnp-interval on page 123 • Configuring IS-IS Authentication on page 29

no-eligible-backup

Syntax	no-eligible-backup;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>]
Release Information	Statement introduced in Junos OS Release 9.5. Statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Exclude the specified interface as a backup interface for IS-IS interfaces on which link protection or node-link protection is enabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • link-protection on page 146 • node-link-protection on page 158 • Configuring Loop-Free Alternate Routes for IS-IS

no-hello-authentication

Syntax	no-hello-authentication;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>], [edit protocols isis level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Suppress authentication check on complete sequence number hello packets.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• hello-authentication-type on page 131• Configuring IS-IS Authentication on page 29

no-ipv4-multicast

Syntax	no-ipv4-multicast;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Exclude an interface from IPv4 multicast topologies.
Default	Multicast topologies are disabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• Example: Configuring IS-IS Multicast Topology on page 77

no-ipv4-routing

Syntax	no-ipv4-routing;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Disable IP version 4 (IPv4) routing.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Disabling IPv4 Routing for IS-IS

no-ipv6-multicast

Syntax	no-ipv6-multicast;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface interface-name], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface interface-name], [edit protocols isis interface interface-name], [edit routing-instances <i>routing-instance-name</i> protocols isis interface interface-name]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Exclude an interface from the IPv6 multicast topologies.
Default	Multicast topologies are disabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring IS-IS Multicast Topology on page 77

no-ipv6-routing

Syntax	no-ipv6-routing;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Disable IP version 6 (IPv6) routing.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Disabling IPv6 Routing for IS-IS</i>

no-ipv6-unicast

Syntax	no-ipv6-unicast;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface interface-name], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface interface-name], [edit protocols isis interface interface-name], [edit routing-instances <i>routing-instance-name</i> protocols isis interface interface-name]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	Exclude an interface from the IPv6 unicast topologies.
Default	IPv6 unicast topologies are disabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring IS-IS IPv6 Unicast Topologies</i>

no-psnp-authentication

Syntax	no-psnp-authentication;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level level-number], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level level-number], [edit protocols isis level level-number], [edit routing-instances <i>routing-instance-name</i> protocols isis level level-number]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Suppress authentication check on partial sequence number PDU (PSNP) packets.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Configuring IS-IS Authentication on page 29

no-unicast-topology

Syntax	no-unicast-topology;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface interface-name], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface interface-name], [edit protocols isis interface interface-name], [edit routing-instances <i>routing-instance-name</i> protocols isis interface interface-name]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Exclude an interface from the IPv4 unicast topologies.
Default	IPv4 unicast topologies are disabled.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring IS-IS Multicast Topology on page 77

node-link-protection

Syntax	node-link-protection;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-routers <i>logical-router-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>]
Release Information	Statement introduced in Junos OS Release 9.5. Statement introduced in Junos OS Release 9.5 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Enable node-link protection on the specified IS-IS interface. Junos OS creates an alternate loop-free path to the primary next hop for all destination routes that traverse a protected interface. This alternate path avoids the primary next-hop routing device altogether and establishes a path through a different routing device.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• link-protection on page 146• <i>Configuring Loop-Free Alternate Routes for IS-IS</i>

overload (Protocols IS-IS)

Syntax	<pre> overload { advertise-high-metrics; allow-route-leaking; timeout <i>seconds</i>; } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</p> <p>[edit protocols <i>isis</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure the local routing device so that it appears to be overloaded. This statement causes the routing device to continue participating in IS-IS routing, but prevents it from being used for transit traffic. Traffic destined to immediately attached subnets continues to transit the routing device.</p> <p>You can also advertise maximum link metrics in network layer reachability information (NLRI) instead of setting the overload bit.</p> <p>You configure or disable overload mode in IS-IS with or without a timeout. Without a timeout, overload mode is set until it is explicitly deleted from the configuration. With a timeout, overload mode is set if the time elapsed since the IS-IS instance started is less than the specified timeout.</p> <p>A timer is started for the difference between the timeout and the time elapsed since the instance started. If the time elapsed after the IS-IS instance is enabled is less than the specified timeout, overload mode is set. When the timer expires, overload mode is cleared. In overload mode, the routing device IS-IS advertisements are originated with the overload bit set. This causes the transit traffic to take paths around the routing device. However, the overloaded routing device's own links are still accessible.</p> <p>The value of the overload bit depends on these three scenarios:</p> <ol style="list-style-type: none"> 1. When the overload bit has already been set to a given value and the routing process is restarted: Link-state PDUs are regenerated with the overload bit cleared. 2. When the overload bit is reset to a lesser value while the routing process is running: Link-state PDUs are regenerated with the overload bit cleared. 3. When the overload bit is reset to a greater value while the routing process is running: Link-state PDUs are regenerated with the overload bit set to the difference between the old and new value.

In overload mode, the routing device advertisement is originated with all the transit routing device links (except stub) set to a metric of 0xFFFF. The stub routing device links are advertised with the actual cost of the interfaces corresponding to the stub. This causes the transit traffic to avoid the overloaded routing device and take paths around the routing device.

To understand the reason for setting the overload bit, consider that BGP converges slowly. It is not very good at detecting that a neighbor is down because it has slow-paced keepalive timers. Once the BGP neighbor is determined to be down, it can take up to 2 minutes for a BGP router to declare the neighbor down. IS-IS is much quicker. IS-IS only takes 10-30 seconds to detect absent peers. It is the slowness of BGP, more precisely the slowness of internal BGP (IBGP), that necessitates the use of the overload bit. IS-IS and BGP routing are mutually dependent on each other. If both do not converge at the same time, traffic is dropped without notification (black holed).

You might want to configure the routing device so that it appears to be overloaded when you are restarting routing on the device. Setting the overload bit for a fixed amount of time right after a restart of the routing protocol process (rpd) ensures that the router does not receive transit traffic while the routing protocols (especially IBGP) are still converging.

Setting the overload bit is useful when performing hardware or software maintenance work on a routing device. After the maintenance work, clear the overload bit to carry on forwarding transit traffic. Manual clearing of the overload bit is not always possible. What is needed is an automated way of clearing the overload bit after some amount of time. Most networks use a time value of 300 seconds. This 5-minute value provides a good balance, allowing time to bring up even large internal IBGP meshes, while still relatively quick.

Another appropriate application for setting for the overload bit is on dedicated devices such as BGP route reflectors, which are intentionally not meant to carry any transit traffic. In this case, you would not use the timer.

You can verify that the overload bit is set by running the **show isis database** command.

Options **advertise-high-metrics**—Advertise maximum link metrics in NLRI instead of setting the overload bit.

The **advertise-high-metric** setting is only valid while the routing device is in overload mode.

When **advertise-high-metric** is configured, IS-IS does not set the overload bit. Rather, it sets the metric to 63 or 16,777,214, depending whether wide metrics are enabled. This allows the overloaded routing device to be used for transit as a last resort.

An L1-L2 router in overload mode stops leaking route information between L1 and L2 levels and clears its attached bit. This is also true when **advertise-high-metrics** is configured.

allow-route-leaking—Enable leaking of route information into the network even if the overload bit is set.



NOTE: The **allow-route-leaking** option does not work if the routing device is in dynamic overload mode. Dynamic overload can occur if the device has exceeded its resource limits, such as the prefix limit.

timeout seconds—Number of seconds at which the overloading is reset.

Range: 60 through 1800 seconds

Default: 0 seconds

Required Privilege routing—To view this statement in the configuration.
Level routing-control—To add this statement to the configuration.

passive

Syntax	<code>passive;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p>
Description	<p>Advertise the direct interface addresses on an interface or into a level on the interface without actually running IS-IS on that interface or level.</p> <p>This statement effectively prevents IS-IS from running on the interface. To enable IS-IS on an interface, include the interface statement at the [edit protocols isis] or the [edit routing-instances <i>routing-instance-name</i> protocols isis] hierarchy level. To disable it, include the disable statement at those hierarchy levels. The three states—enabling, disabling, or not running IS-IS on an interface—are mutually exclusive.</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> <i>disable</i> <i>Configuring Levels on IS-IS Interfaces</i>

point-to-point

Syntax	point-to-point;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>], [edit protocols isis interface <i>interface-name</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	<p>Configure an IS-IS interface to behave like a point-to-point connection.</p> <p>You can use the point-to-point statement to configure a LAN interface to act like a point-to-point interface for IS-IS. You do not need an unnumbered LAN interface, and it has no effect if configured on an interface that is already point-to-point.</p> <p>The point-to-point statement affects only IS-IS protocol procedures on that interface. All other protocols continue to treat the interface as a LAN interface. Only two IS-IS routing devices can be connected to the LAN interface, and both must be configured as point-to-point.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <i>Configuring Point-to-Point Interfaces for IS-IS</i>

preference

Syntax	<code>preference <i>preference</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level level-number], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level level-number], [edit protocols isis level level-number], [edit routing-instances <i>routing-instance-name</i> protocols isis level level-number]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Configure the preference of internal routes.
Options	<i>preference</i> —Preference value. Range: 0 through 4,294,967,295 ($2^{32} - 1$) Default: 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• external-preference on page 126• <i>Configuring Preference Values for IS-IS Routes</i>

prefix-export-limit

Syntax	<code>prefix-export-limit <i>number</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>], [edit protocols isis level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	Configure a limit to the number of prefixes exported into IS-IS.
Options	<i>number</i> —Prefix limit. Range: 0 through 4,294,967,295 ($2^{32} - 1$)
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <i>Limiting the Number of Prefixes Exported to IS-IS</i>

priority

Syntax	<code>priority <i>number</i>;</code>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit protocols isis interface <i>interface-name</i> level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	<p>The interface's priority for becoming the designated router. The interface with the highest priority value becomes that level's designated router.</p> <p>The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.</p>
Options	<i>number</i> —Priority value. Range: 0 through 127 Default: 64
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Configuring Levels on IS-IS Interfaces</i>

reference-bandwidth

Syntax	<code>reference-bandwidth <i>reference-bandwidth</i>;</code>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</p> <p>[edit protocols <i>isis</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Set the reference bandwidth used in calculating the default interface cost. The cost is calculated using the following formula:</p> $\text{cost} = \text{reference-bandwidth} / \text{bandwidth}$ <p>For example, if you set the reference bandwidth to 1 Gbps (that is, <i>reference-bandwidth</i> is set to 1,000,000,000), a 100-Mbps interface has a routing metric of 10.</p> <p>All IS-IS interfaces have a cost, which is a routing metric that is used in the IS-IS link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics.</p>
Options	<p><i>reference-bandwidth</i>—Reference bandwidth value in bits per second.</p> <p>Default: None</p> <p>Range: 9600 through 1,000,000,000,000 bps</p> <p>Default: None</p>
Required Privilege Level	<p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none"> • <i>Configuring the Reference Bandwidth Used in IS-IS Metric Calculations</i>

rib-group

Syntax	<pre>rib-group { inet <i>group-name</i>; inet6 <i>group-name</i>; }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series.
Description	<p>Install routes learned from IS-IS routing instances into routing tables in the IS-IS routing table group. You can install IPv4 routes or IPv6 routes.</p> <p>Support for IPv6 routing table groups in IS-IS enables IPv6 routes that are learned from IS-IS routing instances to be installed into other routing tables defined in an IS-IS routing table group.</p>
Options	<p><i>group-name</i>—Name of the routing table group.</p> <p>inet—Install IPv4 IS-IS routes.</p> <p>inet6—Install IPv6 IS-IS routes.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</i>• <i>Example: Importing Direct and Static Routes Into a Routing Instance</i>• <i>Understanding Multiprotocol BGP</i>

spf-options (Protocols IS-IS)

Syntax	<pre>spf-options { delay <i>milliseconds</i>; holddown <i>milliseconds</i>; rapid-runs <i>number</i>; }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced in Junos OS Release 8.5. Statement introduced in Junos OS Release 9.0 for EX Series switches.
Description	<p>Configure options for running the shortest-path-first (SPF) algorithm.</p> <p>Running the SPF algorithm is usually the beginning of a series of larger system-wide events. For example, the SPF algorithm can lead to interior gateway protocol (IGP) prefix changes, which then lead to BGP nexthop resolution changes. Consider what happens if there are rapid link changes in the network. The local routing device can become overwhelmed. This is why it sometimes makes sense to throttle the scheduling of the SPF algorithm.</p> <p>You can configure the following SPF options:</p> <ul style="list-style-type: none"> • The delay in the time between the detection of a topology change and when the SPF algorithm actually runs. • The maximum number of times that the SPF algorithm can run in succession before the hold-down timer begins. • The time to hold down, or wait, before running another SPF calculation after the SPF algorithm has run in succession the configured maximum number of times. <p>If the network stabilizes during the hold-down period and the SPF algorithm does not need to run again, the system reverts to the configured values for the delay and rapid-runs statements.</p>
Options	<p>delay <i>milliseconds</i>—Time interval between the detection of a topology change and when the SPF algorithm runs.</p> <p>Range: 50 through 1000 milliseconds</p> <p>Default: 200 milliseconds</p> <p>holddown <i>milliseconds</i>—Time interval to hold down, or wait before a subsequent SPF algorithm runs after the SPF algorithm has run the configured maximum number of times in succession.</p> <p>Range: 2000 through 10,000 milliseconds</p> <p>Default: 5000 milliseconds</p>

rapid-runs *number*—Maximum number of times the SPF algorithm can run in succession.
After the maximum is reached, the holddown interval begins.

Range: 1 through 5

Default: 3

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- [Understanding Loop-Free Alternate Routes for IS-IS on page 24](#)
- [Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 97](#)

topologies (Protocols IS-IS)

Syntax

```
topologies {  
  ipv4-multicast;  
  ipv6-multicast;  
  ipv6-unicast;  
}
```

Hierarchy Level [edit logical-systems *logical-system-name* protocols *isis*],
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols *isis*],
[edit protocols *isis*],
[edit routing-instances *routing-instance-name* protocols *isis*]

Release Information Statement introduced before Junos OS Release 7.4.
Statement introduced in Junos OS Release 9.0 for EX Series switches.
Statement introduced in Junos OS Release 12.1 for the QFX Series.
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

Description Configure alternate IS-IS topologies.

The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 68](#)
- [Example: Configuring IS-IS Multicast Topology on page 78](#)
- [IS-IS Multicast Topologies Overview on page 77](#)
- [Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 67](#)

traceoptions (Protocols IS-IS)

Syntax	<pre>traceoptions { file <i>name</i> <size <i>size</i>> <files <i>number</i>> <world-readable no-world-readable>; flag <i>flag</i> <flag-modifier> <disable>; }</pre>
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis], [edit protocols isis], [edit routing-instances <i>routing-instance-name</i> protocols isis]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure IS-IS protocol-level tracing options. To specify more than one tracing operation, include multiple flag statements.



NOTE: The **traceoptions** statement is not supported on QFabric systems.

Default	The default IS-IS protocol-level tracing options are those inherited from the routing protocols traceoptions statement included at the [edit routing-options] hierarchy level.
Options	<p>disable—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as all.</p> <p>file <i>name</i>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks (" "). All files are placed in the directory /var/log. We recommend that you place IS-IS tracing output in the file isis-log.</p> <p>files <i>number</i>—(Optional) Maximum number of trace files. When a trace file named trace-file reaches its maximum size, it is renamed trace-file.0, then trace-file.1, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you also must specify a maximum file size with the size option.</p> <p>Range: 2 through 1000 files</p> <p>Default: 10 files</p> <p>flag <i>flag</i>—Tracing operation to perform. To specify more than one flag, include multiple flag statements.</p>

IS-IS Protocol-Specific Tracing Flags

- **csn**—Complete sequence number PDU (CSNP) packets
- **error**—Errored IS-IS packets
- **graceful-restart**—Graceful restart operation
- **hello**—Hello packets
- **ldp-synchronization**—Synchronization between IS-IS and LDP
- **lsp**—Link-state PDUs
- **lsp-generation**—Link-state PDU generation packets
- **packets**—All IS-IS protocol packets
- **psn**—Partial sequence number PDU (PSNP) packets
- **spf**—Shortest-path-first calculations

Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations, including adjacency changes

Default: If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

flag-modifier—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Provide detailed trace information.
- **receive**—Trace the packets being received.
- **send**—Trace the packets being transmitted.

no-world-readable—(Optional) Prevent any user from reading the log file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

Syntax: **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

Range: 10 KB through the maximum file size supported on your system

Default: 128 KB

world-readable—(Optional) Allow any user to read the log file.

Required Privilege Level	routing and trace—To view this statement in the configuration. routing-control and trace-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Configuring the Transmission Frequency for CSNPs on IS-IS Interfaces</i> • Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking on page ? • <i>Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</i> • <i>Understanding Link-State PDU Throttling for IS-IS Interfaces</i> • <i>Understanding Checksums on IS-IS Interfaces for Error Checking</i>

traffic-engineering (Protocols IS-IS)

Syntax	<pre> traffic-engineering { disable; credibility-protocol-preference; family inet { shortcuts { multicast-rpf-routes; } } family inet6 { shortcuts; } multipath { lsp-equal-cost; } } </pre>
Hierarchy Level	<p>[edit logical-systems <i>logical-system-name</i> protocols isis],</p> <p>[edit protocols isis]</p>
Release Information	<p>Statement introduced before Junos OS Release 7.4.</p> <p>Support for the family statement introduced in Junos OS Release 9.3.</p> <p>Support for the credibility-protocol-preference statement introduced in Junos OS Release 9.4.</p> <p>Support for the multipath statement introduced in Junos OS Release 9.6.</p> <p>Support for the lsp-equal-cost statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	<p>Configure traffic engineering properties for IS-IS.</p> <p>IS-IS always performs shortest-path-first (SPF) calculations to determine next hops. For prefixes reachable through a particular next hop, IS-IS places that next hop for that prefix in the inet.0 routing table. In addition, for routers running MPLS, IS-IS installs the prefix for IPv4 routes in the inet.3 routing table as well. The inet.3 table, which is present on the ingress router, contains the host address of each MPLS label-switched path (LSP) egress router. BGP uses this routing table to resolve next-hop addresses.</p> <p>If you enable IS-IS traffic engineering shortcuts and if there is a label-switched path to a point along the path to that prefix, IS-IS installs the prefix in the inet.3 routing table and uses the LSP as a next hop. The net result is that for BGP egress routers for which there is no LSP, BGP automatically uses an LSP along the path to reach the egress router.</p> <p>In Junos OS Release 9.3 and later, IS-IS traffic engineering shortcuts support IPv6 routes. LSPs to be used for shortcuts continue to be signaled using IPv4. However, by default, shortcut routes calculated through IPv6 routes are added to the inet6.3 routing table. The default behavior is for only BGP to use LSPs in its calculations. If you configure MPLS so that both BGP and interior gateway protocols use LSPs for forwarding traffic, shortcut routes calculated through IPv6 are added to the inet6.0 routing table. IS-IS ensures that the IPv6 routes running over the IPv4 MPLS LSP are correctly de-encapsulated at the</p>

tunnel egress by pushing an extra IPv6 explicit null label between the IPv6 payload and the IPv4 transport label.

RSVP LSPs with a higher preference than IS-IS routes are not considered during the computation of traffic engineering shortcuts.

To configure IS-IS so that it uses LSPs as shortcuts when installing information in the inet.3 or inet6.3 routing table, include the following statements:

```
family inet {
  shortcuts {
    multicast-rpf-routes;
  }
}
family inet6 {
  shortcuts;
}
```

For IPv4 traffic, include the **inet** statement. For IPv6 traffic, include the **inet6** statement.

To configure load balancing across multiple LSPs, include the **multipath** statement.

When traffic engineering shortcuts are used, RSVP first looks at the **metric2** value, which is derived from the IGP cost. After this, RSVP considers the LSP metric value. So, if a certain path changes for an LSP and the cost changes, not all LSPs are used to load-balance the network.

When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default behavior for load balancing, include the **lsp-equal-cost** statement to retain the equal cost path information in the routing table.

```
multipath {
  lsp-equal-cost;
}
```

Because the inet.3 routing table is present only on ingress routers, you can configure LSP shortcuts only on these routers.

Default IS-IS traffic engineering support is enabled.

By default, IS-IS supports traffic engineering by exchanging basic information with the traffic engineering database. To disable this support, and to disable IS-IS shortcuts if they are configured, include the **disable** statement.

Options **credibility-protocol-preference**—Specify that IS-IS should use the configured protocol preference for IGP routes to determine the traffic engineering database credibility value. By default, the traffic engineering database prefers IS-IS routes even when the routes of another IGP are configured with a lower, that is, more preferred value. Use this statement to override this default behavior.

The traffic engineering database assigns a credibility value to each IGP and prefers the routes of the IGP with the highest credibility value. In Junos OS Release 9.4 and later, you can configure IS-IS to take protocol preference into account to determine the traffic engineering database credibility value. When protocol preference is used to determine the credibility value, IS-IS routes are not automatically preferred by the traffic engineering database, depending on your configuration. For example, OSPF routes have a default preference value of 10, whereas IS-IS Level 1 routes have a default preference value of 15. When protocol preference is enabled, the credibility value is determined by deducting the protocol preference value from a base value of 512. Using default protocol preference values, OSPF has a credibility value of 502, whereas IS-IS has a credibility value of 497. Because the traffic engineering database prefers IGP routes with the highest credibility value, OSPF routes are now preferred.



NOTE: This feature is also supported for OSPFv2.

lsp-equal-cost—Configure LSPs to be retained as equal cost paths for load balancing when a better path metric is found during the IS-IS internal routing table calculation. When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default IS-IS behavior, include the **lsp-equal-cost** statement for load balancing, so that the equal cost path information is retained in the routing table.

multipath—Enable load balancing for multiple LSPs.

The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

Related Documentation

- *Example: Enabling OSPF Traffic Engineering Support*
- *traffic-engineering (OSPF)*
- *Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts*

wide-metrics-only

Syntax	wide-metrics-only;
Hierarchy Level	[edit logical-systems <i>logical-system-name</i> protocols isis level <i>level-number</i>], [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>], [edit protocols isis level <i>level-number</i>], [edit routing-instances <i>routing-instance-name</i> protocols isis level <i>level-number</i>]
Release Information	Statement introduced before Junos OS Release 7.4. Statement introduced in Junos OS Release 9.0 for EX Series switches. Statement introduced in Junos OS Release 12.1 for the QFX Series. Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Configure IS-IS to generate metric values greater than 63 on a per IS-IS level basis. Normally, IS-IS metrics can have values up to 63, and IS-IS generates two type, length, and value (TLV) tuples, one for an IS-IS adjacency and the second for an IP prefix. To allow IS-IS to support traffic engineering, a second pair of TLVs has been added to IS-IS, one for IP prefixes and the second for IS-IS adjacency and traffic engineering information. With these TLVs, IS-IS metrics can have values up to 16,777,215 ($2^{24} - 1$). To configure IS-IS to generate only the new pair of TLVs and thus to allow the wider range of metric values, include the wide-metrics-only statement.
Default	By default, Junos OS supports the sending and receiving of wide metrics. Junos OS allows a maximum metric value of 63 and generates both pairs of TLVs.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> <i>te-metric</i> <i>Example: Enabling Wide IS-IS Metrics for Traffic Engineering</i> <i>Understanding Wide IS-IS Metrics for Traffic Engineering</i>

CHAPTER 8

IS-IS Operational Commands

- clear isis adjacency
- clear isis database
- clear isis overload
- clear isis statistics
- show isis adjacency
- show isis authentication
- show isis backup coverage
- show isis backup label-switched-path
- show isis backup spf results
- show isis database
- show isis hostname
- show isis interface
- show isis overview
- show isis route
- show isis spf
- show isis statistics

clear isis adjacency

List of Syntax	Syntax on page 180 Syntax (EX Series Switches and QFX Series) on page 180
Syntax	<pre>clear isis adjacency <all> <instance <i>instance-name</i>> <interface <i>interface-name</i>> <logical-system (all <i>logical-system-name</i>)> <neighbor></pre>
Syntax (EX Series Switches and QFX Series)	<pre>clear isis adjacency <all> <instance <i>instance-name</i>> <interface <i>interface-name</i>> <neighbor></pre>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. all option introduced in Junos OS Release 14.2.
Description	Remove entries from the IS-IS adjacency database.
Options	<p>none all—(Optional) Remove all entries from the adjacency database. Both clear isis adjacency and clear isis adjacency all function identically.</p> <p>instance <i>instance-name</i>—(Optional) Clear all adjacencies for the specified routing instance only.</p> <p>interface <i>interface-name</i>—(Optional) Clear all adjacencies for the specified interface only.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>neighbor—(Optional) Clear adjacencies for the specified neighbor only.</p>
Required Privilege Level	clear
Related Documentation	<ul style="list-style-type: none">• show isis adjacency on page 188
List of Sample Output	clear isis adjacency on page 181 clear isis adjacency all on page 181
Output Fields	See show isis adjacency for an explanation of output fields.

Sample Output

clear isis adjacency

The following sample output displays IS-IS adjacency database information before and after the **clear isis adjacency** command is entered:

```
user@host> show isis adjacency
IS-IS adjacency database:
Interface      System          L State          Hold (secs) SNPA
so-1/0/0.0     karakul         3 Up             26
so-1/1/3.0     1921.6800.5080 3 Up             23
so-5/0/0.0     1921.6800.5080 3 Up             19
```

```
user@host> clear isis adjacency karakul
```

```
user@host> show isis adjacency
IS-IS adjacency database:
Interface      System          L State          Hold (secs) SNPA
so-1/0/0.0     karakul         3 Initializing   26
so-1/1/3.0     1921.6800.5080 3 Up             24
so-5/0/0.0     1921.6800.5080 3 Up             21
```

clear isis adjacency all

```
user@host> clear isis adjacency all
IS-IS adjacency database:
Interface      System          L State          Hold (secs) SNPA
so-1/0/0.0     karakul         3 Initializing   26
so-1/1/3.0     1921.6800.5080 3 Initializing   24
so-5/0/0.0     1921.6800.5080 3 Initializing   21
```

clear isis database

List of Syntax	Syntax on page 182 Syntax (EX Series Switches and QFX Series) on page 182
Syntax	<code>clear isis database</code> <code><entries></code> <code><instance <i>instance-name</i>></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches and QFX Series)	<code>clear isis database</code> <code><entries></code> <code><instance <i>instance-name</i>></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series. Command introduced in 15.1X53-D30 for QFX10002 switch.
Description	Remove the entries from the IS-IS link-state database, which contains prefixes and topology information.
Options	none —Remove all entries from the IS-IS link-state database for all routing instances. entries —(Optional) Name of the database entry. instance <i>instance-name</i> —(Optional) Clear all entries for the specified routing instance. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	clear
Related Documentation	<ul style="list-style-type: none">• show isis database on page 202
List of Sample Output	clear isis database on page 182
Output Fields	See show isis database for an explanation of output fields.

Sample Output

clear isis database

The following sample output displays IS-IS link-state database information before and after the **clear isis database** command is entered:

```
user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime (secs)
crater.00-00          0x12    0x84dd             1139
```

```
1 LSPs
IS-IS level 2 link-state database:
LSP ID          Sequence Checksum Lifetime (secs)
crater.00-00     0x19  0xe92c      1134
badlands.00-00  0x16  0x1454      985
carlsbad.00-00  0x33  0x220b     1015
ranier.00-00    0x2e  0xfc31     1007
1921.6800.5066.00-00  0x11  0x7313      566
1921.6800.5067.00-00  0x14  0xd9d4      939
6 LSPs
```

```
user@host> clear isis database
```

```
user@host> show isis database
IS-IS level 1 link-state database:
LSP ID          Sequence Checksum Lifetime (secs)

IS-IS level 2 link-state database:
LSP ID          Sequence Checksum Lifetime (secs)
```

clear isis overload

List of Syntax	Syntax on page 184 Syntax (EX Series Switch and QFX Series) on page 184
Syntax	<code>clear isis overload</code> <code><instance <i>instance-name</i>></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switch and QFX Series)	<code>clear isis overload</code> <code><instance <i>instance-name</i>></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series.
Description	Reset the Intermediate System-to-Intermediate System (IS-IS) dynamic overload bit. This command can appear to not work, continuing to display overload after execution. The bit is reset only if the root cause is corrected by configuration remotely or locally.
Options	none —Reset the IS-IS dynamic overload bit. instance <i>instance-name</i> —(Optional) Reset the IS-IS dynamic overload bit for the specified routing instance. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	clear
Related Documentation	<ul style="list-style-type: none">• show isis database on page 202
List of Sample Output	clear isis overload on page 184
Output Fields	See show isis database for an explanation of output fields.

Sample Output

clear isis overload

The following sample output displays IS-IS database information before and after the **clear isis overload** command is entered:

```
user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                               Sequence Checksum Lifetime Attributes
pro3-c.00-00                          0x4    0x10db      1185 L1 L2 Overload

    1 LSPs
IS-IS level 2 link-state database:
LSP ID                               Sequence Checksum Lifetime Attributes
```


pro3-c.00-00	0x5	0x429f	1185	L1	L2	<i>Overload</i>
--------------	-----	--------	------	----	----	-----------------

pro2-a.00-00	0x91e	0x2589	874	L1	L2
pro2-a.02-00	0x1	0xcbc	874	L1	L2
3 LSPs					

user@host> clear isis overload

user@host> show isis database

IS-IS level 1 link-state database:

LSP ID	Sequence	Checksum	Lifetime	Attributes
pro3-c.00-00	0xa	0x429e	1183	L1 L2
1 LSPs				

IS-IS level 2 link-state database:

LSP ID	Sequence	Checksum	Lifetime	Attributes
pro3-c.00-00	0xc	0x9c39	1183	L1 L2
pro2-a.00-00	0x91e	0x2589	783	L1 L2
pro2-a.02-00	0x1	0xcbc	783	L1 L2
3 LSPs				

clear isis statistics

List of Syntax	Syntax on page 186 Syntax (EX Series Switches and QFX Series) on page 186
Syntax	clear isis statistics <instance <i>instance-name</i> > <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches and QFX Series)	clear isis statistics <instance <i>instance-name</i> >
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Set statistics about IS-IS traffic to zero.
Options	none —Set IS-IS traffic statistics to zero for all routing instances. instance <i>instance-name</i> —(Optional) Set IS-IS traffic statistics to zero for the specified routing instance only. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • show isis statistics on page 230
List of Sample Output	clear isis statistics on page 186
Output Fields	See show isis statistics for an explanation of output fields.

Sample Output

clear isis statistics

The following sample output displays IS-IS statistics before and after the **clear isis statistics** command is entered:

```
user@host> show isis statistics
IS-IS statistics for merino:
```

PDU type	Received	Processed	Drops	Sent	Rexmit
LSP	12793	12793	0	8666	719
IIH	116751	116751	0	118834	0
CSNP	203956	203956	0	204080	0
PSNP	7356	7350	6	8635	0
Unknown	0	0	0	0	0

```
Totals          340856    340850        6    340215        719
```

```
Total packets received: 340856 Sent: 340934
```

```
SNP queue length:      0 Drops:      0
LSP queue length:      0 Drops:      0
```

```
SPF runs:              1064
Fragments rebuilt:     1087
LSP regenerations:     436
Purges initiated:      0
```

```
user@host> clear isis statistics
```

```
user@host> show isis statistics
IS-IS statistics for merino:
```

PDU type	Received	Processed	Drops	Sent	Rexmit
LSP	0	0	0	0	0
IIH	3	3	0	3	0
CSNP	2	2	0	4	0
PSNP	0	0	0	0	0
Unknown	0	0	0	0	0
Totals	5	5	0	7	0

```
Total packets received: 5 Sent: 7
```

```
SNP queue length:      0 Drops:      0
LSP queue length:      0 Drops:      0
```

```
SPF runs:              0
Fragments rebuilt:     0
LSP regenerations:     0
Purges initiated:      0
```

show isis adjacency

List of Syntax	Syntax on page 188 Syntax (EX Series Switch and QFX Series) on page 188
Syntax	<code>show isis adjacency</code> <code><system-id></code> <code><brief detail extensive></code> <code><instance <i>instance-name</i>></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switch and QFX Series)	<code>show isis adjacency</code> <code><system-id></code> <code><brief detail extensive></code> <code><instance <i>instance-name</i>></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display information about Intermediate System-to-Intermediate System (IS-IS) neighbors.
Options	none —Display standard information about IS-IS neighbors for all routing instances. <i>system id</i> —(Optional) Display information about IS-IS neighbors for the specified intermediate system. <i>brief detail extensive</i> —(Optional) Display standard information about IS-IS neighbors with the specified level of output. <i>instance instance-name</i> —(Optional) Display information about IS-IS neighbors for the specified routing instance. <i>logical-system (all logical-system-name)</i> —(Optional) Display information about IS-IS neighbors for all logical systems or for a particular logical system.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• clear isis adjacency on page 180
List of Sample Output	show isis adjacency on page 190 show isis adjacency brief on page 190 show isis adjacency detail on page 191 show isis adjacency extensive on page 191
Output Fields	Table 5 on page 189 describes the output fields for the show isis adjacency command. Output fields are listed in the approximate order in which they appear.

Table 5: show isis adjacency Output Fields

Field Name	Field Description	Level of Output
Interface	Interface through which the neighbor is reachable.	All levels
System	System identifier (sysid), displayed as a name, if possible.	brief
L or Level	Level: <ul style="list-style-type: none"> • 1—Level 1 only • 2—Level 2 only • 3—Level 1 and Level 2 An exclamation point (!) preceding the level number indicates that the adjacency is missing an IP address.	All levels
State	State of the adjacency: Up , Down , New , One-way , Initializing , or Rejected .	All levels
Hold (secs)	Remaining hold time of the adjacency.	brief
SNPA	Subnetwork point of attachment (MAC address of the next hop).	brief
Expires in	How long until the adjacency expires, in seconds.	detail
Priority	Priority to become the designated intermediate system.	detail extensive
Up/Down transitions	Count of adjacency status changes from Up to Down or from Down to Up .	detail
Last transition	Time of the last Up/Down transition.	detail
Circuit type	Bit mask of levels on this interface: 1=Level 1 router; 2=Level 2 router; 3=both Level 1 and Level 2 router.	detail
Speaks	Protocols supported by this neighbor.	detail extensive
MAC address	MAC address of the interface.	detail extensive
Topologies	Supported topologies.	detail extensive
Restart capable	Whether a neighbor is capable of graceful restart: Yes or No .	detail extensive
Adjacency advertisement: Advertise	This router has signaled to advertise this interface to its neighbors in their label-switched paths (LSPs).	detail extensive
Adjacency advertisement: Suppress	This neighbor has signaled not to advertise the interface in the router's outbound LSPs.	detail extensive
IP addresses	IP address of this neighbor.	detail extensive

Table 5: show isis adjacency Output Fields (*continued*)

Field Name	Field Description	Level of Output
Transition log	<p>List of recent transitions, including:</p> <ul style="list-style-type: none"> • When—Time at which an IS-IS adjacency transition occurred. • State—Current state of the IS-IS adjacency (up, down, or rejected). <ul style="list-style-type: none"> • Up—Adjacency is up and operational. • Down—Adjacency is down and not available. • Rejected—Adjacency has been rejected. • Event—Type of transition that occurred. <ul style="list-style-type: none"> • Seenself—Possible routing loop has been detected. • Interface down—IS-IS interface has gone down and is no longer available. • Error—Adjacency error. • Down reason—Reason that an IS-IS adjacency is down: <ul style="list-style-type: none"> • 3-Way Handshake Failed—Connection establishment failed. • Address Mismatch—Address mismatch caused link failure. • Aged Out—Link expired. • ISO Area Mismatch—IS-IS area mismatch caused link failure. • Bad Hello—Unacceptable hello message caused link failure. • BFD Session Down—Bidirectional failure detection caused link failure. • Interface Disabled—IS-IS interface is disabled. • Interface Down—IS-IS interface is unavailable. • Interface Level Disabled—IS-IS level is disabled. • Level Changed—IS-IS level has changed on the adjacency. • Level Mismatch—Levels on adjacency are not compatible. • MPLS LSP Down—Label-switched path (LSP) is unavailable. • MT Topology Changed—IS-IS topology has changed. • MT Topology Mismatch—IS-IS topology is mismatched. • Remote System ID Changed—Adjacency peer system ID changed. • Protocol Shutdown—IS-IS protocol is disabled. • CLI Command—Adjacency brought down by user. • Unknown—Unknown. 	extensive

Sample Output

show isis adjacency

```

user@host> show isis adjacency
Interface          System      L State      Hold (secs) SNPA
at-2/3/0.0         ranier      3 Up         23

```

show isis adjacency brief

The output for the **show isis adjacency brief** command is identical to that for the **show isis adjacency** command. For sample output, see [show isis adjacency on page 190](#).

show isis adjacency detail

```
user@host> show isis adjacency detail
ranier
Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 21 secs
Priority: 0, Up/Down transitions: 1, Last transition: 00:01:09 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast
Restart capable: Yes
IP addresses: 11.1.1.2
```

show isis adjacency extensive

```
user@host> show isis adjacency extensive
ranier
Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 22 secs
Priority: 0, Up/Down transitions: 1, Last transition: 00:01:16 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast
Restart capable: Yes
IP addresses: 11.1.1.2
Transition log:
When           State      Event      Down reason
Wed Nov  8 21:24:25  Up        Seenself
```

show isis authentication

List of Syntax	Syntax on page 192 Syntax (EX Series Switch and QFX Series) on page 192
Syntax	<pre>show isis authentication <instance <i>instance-name</i>> <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switch and QFX Series)	<pre>show isis authentication <instance <i>instance-name</i>></pre>
Release Information	<p>Command introduced in Junos OS Release 7.5.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for hitless authentication key rollover introduced in Junos OS Release 11.2.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p>
Description	Display information about Intermediate System-to-Intermediate System (IS-IS) authentication.
Options	<p>none—Display information about IS-IS authentication.</p> <p>instance <i>instance-name</i>—(Optional) Display IS-IS authentication for the specified routing instance.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
List of Sample Output	show isis authentication on page 193 show isis authentication (With Hitless Authentication Key Rollover Configured) on page 193
Output Fields	<p>Table 6 on page 192 describes the output fields for the show isis authentication command. Output fields are listed in the approximate order in which they appear.</p>

Table 6: show isis authentication Output Fields

Field Name	Field Description
Interface	Interface name.
Level	IS-IS level.
IIH Auth	<p>IS-IS Hello (IIH) packet authentication type.</p> <p>Displays the name of the active keychain if hitless authentication key rollover is configured.</p>
CSN Auth	Complete sequence number authentication type.

Table 6: show isis authentication Output Fields (*continued*)

Field Name	Field Description
PSN Auth	Partial sequence number authentication type.
L1 LSP Authentication	Layer 1 link-state PDU authentication type.
L2 LSP Authentication	Layer 2 link-state PDU authentication type.

Sample Output

show isis authentication

```

user@host> show isis authentication
Interface          Level IIH Auth  CSN Auth  PSN Auth
at-2/3/0.0         1      Simple    Simple    Simple
                   2      MD5       MD5       MD5

L1 LSP Authentication: Simple
L2 LSP Authentication: MD5

```

show isis authentication (With Hitless Authentication Key Rollover Configured)

```

user@host> show isis authentication
Interface          Level IIH Auth  CSN Auth  PSN Auth
so-0/1/3.0         2      hakrhello MD5       MD5

L2 LSP Authentication: MD5

```

show isis backup coverage

Syntax	<pre>show isis backup coverage <instance <i>instance-name</i>> <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switch and QFX Series)	<pre>show isis backup coverage <instance <i>instance-name</i>></pre>
Release Information	<p>Command introduced in Junos OS Release 9.5.</p> <p>Command introduced in Junos OS Release 9.5 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Display information about the level of backup coverage available.
Options	<p>none—Display information about the level of backup coverage available for all the nodes and prefixes in the network.</p> <p>instance <i>instance-name</i>—(Optional) Display information about the level of backup coverage for a specific IS-IS routing instance.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • Understanding Loop-Free Alternate Routes for IS-IS on page 24 • Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 97 • show isis backup label-switched-path on page 196
List of Sample Output	show isis backup coverage on page 195
Output Fields	<p>Table 7 on page 194 lists the output fields for the show isis backup coverage command. Output fields are listed in the approximate order in which they appear.</p>

Table 7: show isis backup coverage Output Fields

Field Name	Field Description
Topology	Type of topology or address family: IPv4 Unicast or IPv6 Unicast .
Level	IS-IS level: <ul style="list-style-type: none"> • 1—Level 1 • 2—Level 2
Node	By topology, the percentage of all routes configured on the node that are protected through backup coverage.

Table 7: show isis backup coverage Output Fields (*continued*)

Field Name	Field Description
IPv4	Percentage of IPv4 unicast routes that are protected through backup coverage.
IPv6	Percentage of IPv6 unicast routes that are protected through backup coverage.
CLNS	Percentage of Connectionless Network Service (CLNS) routes that are protected through backup coverage.

Sample Output

show isis backup coverage

```

user@host> show isis backup coverage
Backup Coverage:
  Topology   Level  Node   IPv4   IPv6   CLNS
  IPv4 Unicast  2  28.57%  22.22%  0.00%  0.00%
  IPv6 Unicast  2   0.00%   0.00%  0.00%  0.00%

```

show isis backup label-switched-path

Syntax	show isis backup label-switched-path <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches and QFX Series)	show isis backup label-switched-path
Release Information	Command introduced in Junos OS Release 9.5. Command introduced in Junos OS Release 9.5 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display information about MPLS label-switched-paths (LSPs) designated as backup routes for IS-IS routes.
Options	none —Display information about MPLS LSPs designated as backup routes for IS-IS routes. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • Understanding Loop-Free Alternate Routes for IS-IS on page 24 • Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 97 • show isis backup coverage on page 194
List of Sample Output	show isis backup label-switched-path on page 197
Output Fields	Table 8 on page 196 lists the output fields for the show isis backup label-switched-path command. Output fields are listed in the approximate order in which they appear.

Table 8: show isis backup label-switched-path Output Fields

Field Name	Field Description
Backup MPLS LSPs	List of MPLS LSPs designated as backup paths for IS-IS routes.
Egress	IP address of the egress routing device for the LSP.

Table 8: show isis backup label-switched-path Output Fields (*continued*)

Field Name	Field Description
Status	<p>State of the LSP:</p> <ul style="list-style-type: none"> • Up—The routing device can detect RSVP hello messages from the neighbor. • Down—The routing device has received one of the following indications: <ul style="list-style-type: none"> • Communication failure from the neighbor. • Communication from IGP that the neighbor is unavailable. • Change in the sequence numbers in the RSVP hello messages sent by the neighbor. • Deleted—LSP is no longer available as a backup path.
Last change	Time elapsed since the neighbor state changed either from up to down or from down to up. The format is <i>hh:mm:ss</i> .
TE-metric	Configured traffic engineering metric.
Metric	Configured metric.

Sample Output

show isis backup label-switched-path

```

user@host> show isis backup label-switched-path
Backup MPLS LSPs:
f-to-g, Egress: 192.168.1.4, Status: up, Last change: 06:12:03
TE-metric: 9, Metric: 0

```

show isis backup spf results

Syntax	<pre>show isis backup spf results <instance <i>instance-name</i>> <level (1 2)> <logical-system (all <i>logical-system-name</i>)> <no-coverage> <topology (ipv4-unicast ipv6-multicast ipv6-unicast unicast)></pre>
Syntax (EX Series Switches)	<pre>show isis backup spf results <instance <i>instance-name</i>> <level (1 2)> <no-coverage> <topology (ipv4-unicast unicast)></pre>
Release Information	Command introduced in Junos OS Release 9.5.
Description	Display information about IS-IS shortest-path-first (SPF) calculations for backup paths.
Options	<p>none—Display information about IS-IS SPF calculations for all backup paths for all destination nodes.</p> <p>instance <i>instance-name</i>—(Optional) Display SPF calculations for backup paths for the specified routing instance.</p> <p>level (1 2)—(Optional) Display SPF calculations for the backup paths for the specified IS-IS level.</p> <p>logical-system <i>logical-system-name</i>—(Optional) Display SPF calculations for the backup paths for all logical systems or on a particular logical system.</p> <p>no-coverage—(Optional) Display SPF calculations only for destinations that do not have backup coverage.</p> <p>topology (ipv4-multicast ipv6-multicast ipv6-unicast unicast)—(Optional) Display SPF calculations for backup paths for the specified topology only.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • Example: Configuring Link and Node Protection for IS-IS Routes on page 93 • show isis backup coverage on page 194 • Understanding Loop-Free Alternate Routes for IS-IS on page 24 • Example: Configuring Node-Link Protection for IS-IS Routes in a Layer 3 VPN on page 97
List of Sample Output	<p>show isis backup spf results on page 199</p> <p>show isis backup spf results no-coverage on page 200</p>
Output Fields	Table 9 on page 199 lists the output fields for the show isis backup spf results command. Output fields are listed in the approximate order in which they appear.

Table 9: show isis backup spf results Output Fields

Field Name	Field Description
<i>node-name</i>	Name of the destination node.
Address	Address of the destination node.
Primary next-hop	Interface and name of the node of the primary next hop to reach the destination.
Root	Name of the next-hop neighbor.
Metric	Metric to the node.
Eligible	Indicates that the next-hop neighbor has been designated as a backup path to the destination node.
Backup next-hop	Name of the interface of the backup next hop.
SNPA	Subnetwork point of attachment (MAC address of the next hop).
LSP	Name of the MPLS label-switched path (LSP) designated as a backup path.
Not eligible	Indicates that the next-hop neighbor cannot function as a backup path to the destination.
Reason	Describes why the next-hop neighbor is designated as Not eligible as a backup path.

Sample Output

show isis backup spf results

```

user@host> show isis backup spf results

IS-IS level 1 SPF results:
  0 nodes

IS-IS level 2 SPF results:
banff.00
  Primary next-hop: so-6/0/0.0, IPV4, olympic
  Primary next-hop: ae0.0, IPV4, camaro, SNPA: 0:90:69:f:67:f0
  Primary next-hop: so-6/0/0.0, IPV6, olympic
  Primary next-hop: ae0.0, IPV6, camaro, SNPA: 0:90:69:f:67:f0
  Root: camaro, Root Metric: 10, Metric: 10
  Not eligible, Reason: Primary next-hop multipath
  Root: olympic, Root Metric: 10, Metric: 10
  Not eligible, Reason: Primary next-hop multipath
  Root: glacier, Root Metric: 10, Metric: 25
  Not eligible, Reason: Primary next-hop multipath
crater.00
  Primary next-hop: so-6/0/0.0, IPV4, olympic
  Primary next-hop: so-6/0/0.0, IPV6, olympic

```

```

Root: olympic, Root Metric: 10, Metric: 10
  Not eligible, Reason: Primary next-hop link fate sharing
Root: glacier, Root Metric: 10, Metric: 15
  Eligible, Backup next-hop: as0.0, IPV4, glacier
  Eligible, Backup next-hop: as0.0, IPV6, glacier
Root: camaro, Root Metric: 10, Metric: 20
  Not eligible, Reason: Interface is already covered
olympic.00
  Primary next-hop: so-6/0/0.0, IPV4, olympic
  Primary next-hop: so-6/0/0.0, IPV6, olympic
  Root: olympic, Root Metric: 10, Metric: 0
    Not eligible, Reason: Primary next-hop link fate sharing
  Root: camaro, Root Metric: 10, Metric: 20
    track-item: olympic.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
  Root: glacier, Root Metric: 10, Metric: 20
    track-item: olympic.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
camaro.00
  Primary next-hop: ae0.0, IPV4, camaro, SNPA: 0:90:69:f:67:f0
  Primary next-hop: ae0.0, IPV6, camaro, SNPA: 0:90:69:f:67:f0
  Root: camaro, Root Metric: 10, Metric: 0
    Not eligible, Reason: Primary next-hop link fate sharing
  Root: glacier, Root Metric: 10, Metric: 20
    track-item: camaro.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
  Root: olympic, Root Metric: 10, Metric: 20
    track-item: camaro.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
glacier.00
  Primary next-hop: as0.0, IPV4, glacier
  Primary next-hop: as0.0, IPV6, glacier
  Root: glacier, Root Metric: 10, Metric: 0
    Not eligible, Reason: Primary next-hop link fate sharing
  Root: camaro, Root Metric: 10, Metric: 20
    track-item: glacier.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
  Root: olympic, Root Metric: 10, Metric: 20
    track-item: glacier.00-00
    track-item: kobuk.00-00
    Not eligible, Reason: Path loops
5 nodes

```

show isis backup spf results no-coverage

```

user@host> show isis backup spf results no-coverage
IS-IS level 1 SPF results:
pro-bng3-k.00
  Primary next-hop: fe-1/3/3.0, IPV4, pro-bng3-k, SNPA: b0:c6:9a:2c:f0:de
  Primary next-hop: fe-1/3/3.0, IPV6, pro-bng3-k, SNPA: b0:c6:9a:2c:f0:de
  Root: pro-bng3-k, Root Metric: 10, Metric: 0, Root Preference: 0x0
  Root: pro-bng3-i, Root Metric: 10, Metric: 20, Root Preference: 0x0
    track-item: pro-bng3-k.00-00
    track-item: pro-bng3-j.00-00
pro-bng3-i.00
  Primary next-hop: fe-0/1/2.0, IPV4, pro-bng3-i, SNPA: b0:c6:9a:2a:f4:21

```



```

Primary next-hop: fe-0/1/2.0, IPV6, pro-bng3-i, SNPA: b0:c6:9a:2a:f4:21
Root: pro-bng3-i, Root Metric: 10, Metric: 0, Root Preference: 0x0
Root: pro-bng3-k, Root Metric: 10, Metric: 20, Root Preference: 0x0
track-item: pro-bng3-j.00-00
track-item: pro-bng3-i.00-00
2 nodes

```

IS-IS level 2 SPF results:

olympic.00

```

Primary next-hop: so-6/0/0.0, IPV4, olympic
Primary next-hop: so-6/0/0.0, IPV6, olympic
Root: olympic, Root Metric: 10, Metric: 0
Not eligible, Reason: Primary next-hop link fate sharing
Root: camaro, Root Metric: 10, Metric: 20
track-item: olympic.00-00
track-item: kobuk.00-00
Not eligible, Reason: Path loops
Root: glacier, Root Metric: 10, Metric: 20
track-item: olympic.00-00
track-item: kobuk.00-00
Not eligible, Reason: Path loops

```

camaro.00

```

Primary next-hop: ae0.0, IPV4, camaro, SNPA: 0:90:69:f:67:f0
Primary next-hop: ae0.0, IPV6, camaro, SNPA: 0:90:69:f:67:f0
Root: camaro, Root Metric: 10, Metric: 0
Not eligible, Reason: Primary next-hop link fate sharing
Root: glacier, Root Metric: 10, Metric: 20
track-item: camaro.00-00
track-item: kobuk.00-00
Not eligible, Reason: Path loops
Root: olympic, Root Metric: 10, Metric: 20
track-item: camaro.00-00
track-item: kobuk.00-00
Not eligible, Reason: Path loops

```

glacier.00

```

Primary next-hop: as0.0, IPV4, glacier
Primary next-hop: as0.0, IPV6, glacier
Root: glacier, Root Metric: 10, Metric: 0
Not eligible, Reason: Primary next-hop link fate sharing
Root: camaro, Root Metric: 10, Metric: 20
track-item: glacier.00-00
track-item: kobuk.00-00
Not eligible, Reason: Path loops
Root: olympic, Root Metric: 10, Metric: 20
track-item: glacier.00-00
track-item: kobuk.00-00
Not eligible, Reason: Path loops

```

3 nodes

show isis database

List of Syntax	Syntax on page 202 Syntax (EX Series Switch and QFX Series) on page 202
Syntax	<pre>show isis database <system-id> <brief detail extensive> <instance <i>instance-name</i>> <level (1 2)> <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switch and QFX Series)	<pre>show isis database <system-id> <brief detail extensive> <level (1 2)> <instance <i>instance-name</i>></pre>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display the entries in the Intermediate System-to-Intermediate System (IS-IS) link-state database, which contains data about PDU packets.
Options	<p>none—Display standard information about IS-IS link-state database entries for all routing instances.</p> <p><i>system id</i>—(Optional) Display IS-IS link-state database entries for the specified intermediate system.</p> <p><i>brief detail extensive</i>—(Optional) Display the specified level of output.</p> <p><i>instance instance-name</i>—(Optional) Display IS-IS link-state database entries for the specified routing instance.</p> <p><i>level (1 2)</i>—(Optional) Display IS-IS link-state database entries for the specified IS-IS level.</p> <p><i>logical-system (all logical-system-name)</i>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• clear isis database on page 182
List of Sample Output	show isis database on page 204 show isis database brief on page 205 show isis database detail on page 205

[show isis database extensive on page 205](#)

Output Fields [Table 10 on page 203](#) describes the output fields for the **show isis database** command. Output fields are listed in the approximate order in which they appear. Fields that contain internal IS-IS information useful only in troubleshooting obscure problems are not described in the table. For more details about these fields, contact your customer support representative.

Table 10: show isis database Output Fields

Field Name	Field Description	Level of Output
Interface name	Name of the interface on which the link-state PDU has been received; always IS-IS for this command.	All levels
level	Level of intermediate system: <ul style="list-style-type: none"> • 1—Intermediate system routes within an area; when the destination is outside an area, it routes toward a Level 2 system. • 2—Intermediate system routes between areas and toward other ASs. 	All levels
LSP ID	Link-state PDU identifier.	All levels
Sequence	Sequence number of the link-state PDU.	All levels
Checksum	Checksum value of the link-state PDU.	All levels
Lifetime (secs)	Remaining lifetime of the link-state PDU, in seconds.	All levels
Attributes	Attributes of the specified database: L1 , L2 , Overload , or Attached (L1 only).	none brief
# LSPs	Total number of link-state PDUs in the specified link-state database.	none brief
IP prefix	Prefix advertised by this link-state PDU.	detail extensive
IS neighbor	IS-IS neighbor of the advertising system.	detail extensive
IP prefix	IPv4 prefix advertised by this link-state PDU.	detail extensive
V6 prefix	IPv6 prefix advertised by this link-state PDU.	detail extensive
Metric	Metric of the prefix or neighbor.	detail extensive
Header	<ul style="list-style-type: none"> • LSP ID—Link state PDU identifier of the header. • Length—Header length. • Allocated Length—Amount of length available for the header. • Router ID—Address of the local routing device. • Remaining Lifetime—Remaining lifetime of the link-state PDU, in seconds. 	extensive

Table 10: show isis database Output Fields (*continued*)

Field Name	Field Description	Level of Output
Packet	<ul style="list-style-type: none"> • LSP ID—The identifier for the link-state PDU. • Length—Packet length. • Lifetime—Remaining lifetime, in seconds. • Checksum—The checksum of the link-state PDU. • Sequence—The sequence number of the link-state PDU. Every time the link-state PDU is updated, this number increments. • Attributes—Packet attributes. • NLPID—Network layer protocol identifier. • Fixed length—Specifies the set length for the packet. 	extensive
TLVs	<ul style="list-style-type: none"> • Area Address—Area addresses that the routing device can reach. • Speaks—Supported routing protocols. • IP router id—ID of the routing device (usually the IP address). • IP address—IPv4 address. • Hostname—Assigned name of the routing device. • IP prefix—IP prefix of the routing device. • Metric—IS-IS metric that measures the cost of the adjacency between the originating routing device and the advertised routing device. • IP extended prefix—Extended IP prefix of the routing device. • IS neighbor—Directly attached neighbor's name and metric. • IS extended neighbor—Directly attached neighbor's name, metric, IP address, local interface index, and remote interface index. <p>The interface indexes enable Junos OS to support unnumbered extensions for IS-IS, as described in RFC 4205.</p>	extensive

Sample Output

show isis database

```

user@host> show isis database
IS-IS level 1 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
kobuk.00-00           0x3     0x3167    1057 L1 L2
camaro.00-00          0x5     0x770e    1091 L1 L2
ranier.00-00          0x4     0xaa95    1091 L1 L2
glacier.00-00         0x4     0x206f    1089 L1 L2
glacier.02-00         0x1     0xd141    1089 L1 L2
badlands.00-00        0x3     0x87a2    1093 L1 L2
  6 LSPs

IS-IS level 2 link-state database:
LSP ID                Sequence Checksum Lifetime Attributes
kobuk.00-00           0x6     0x8d6b    1096 L1 L2
camaro.00-00          0x9     0x877b    1101 L1 L2
ranier.00-00          0x8     0x855d    1103 L1 L2
glacier.00-00         0x7     0xf892    1098 L1 L2
glacier.02-00         0x1     0xd141    1089 L1 L2
badlands.00-00        0x6     0x562     1105 L1 L2
  6 LSPs

```

show isis database brief

The output for the **show isis database brief** command is identical to that for the **show isis database** command. For sample output, see [show isis database on page 204](#).

show isis database detail

```
user@host> show isis database logical-system CE3 sisira.00-00 detail
```

IS-IS level 1 link-state database:

```
sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 975 secs
  IS neighbor: hemantha-CE3.02          Metric:      10
  ES neighbor: 0015.0015.0015          Metric:      10 Down
  ES neighbor: 0025.0025.0025          Metric:      10 Down
  ES neighbor: 0030.0030.0030          Metric:      10 Down
  ES neighbor: 0040.0040.0040          Metric:      10 Down
  ES neighbor: sisira                   Metric:       0
  IP prefix: 1.0.0.0/24                Metric:      10 External Down
  IP prefix: 3.0.0.0/24                Metric:      10 External Down
  IP prefix: 4.0.0.0/24                Metric:      10 External Down
  IP prefix: 5.0.0.0/24                Metric:      10 Internal Up
  IP prefix: 15.15.15.15/32            Metric:      10 External Down
  IP prefix: 25.25.25.25/32            Metric:      10 External Down
  IP prefix: 30.30.30.30/32            Metric:      10 External Down
  IP prefix: 40.40.40.40/32            Metric:      10 External Down
  IP prefix: 60.60.60.60/32            Metric:       0 Internal Up
```

IS-IS level 2 link-state database:

```
sisira.00-00 Sequence: 0x13, Checksum: 0x69ac, Lifetime: 993 secs
  IS neighbor: hemantha-CE3.02          Metric:      10
  IP prefix: 1.0.0.0/24                Metric:      10 External Down
  IP prefix: 3.0.0.0/24                Metric:      10 External Down
  IP prefix: 4.0.0.0/24                Metric:      10 External Down
  IP prefix: 5.0.0.0/24                Metric:      10 Internal Up
  IP prefix: 15.15.15.15/32            Metric:      10 External Down
  IP prefix: 25.25.25.25/32            Metric:      10 External Down
  IP prefix: 30.30.30.30/32            Metric:      10 External Down
  IP prefix: 40.40.40.40/32            Metric:      10 External Down
  IP prefix: 50.50.50.50/32            Metric:      10 Internal Up
  IP prefix: 60.60.60.60/32            Metric:       0 Internal Up
  ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152
                                          Metric:      10 External Down
  ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152
                                          Metric:      10 External Down
  ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152
                                          Metric:      10 External Down
  ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152
                                          Metric:      10 External Down
  ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152
                                          Metric:       0 Internal Up
```

show isis database extensive

```
user@host> show isis database extensive
```

IS-IS level 1 link-state database:

```
sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 970 secs
```

```

IS neighbor: hemantha-CE3.02          Metric:      10
Two-way fragment: hemantha-CE3.02-00, Two-way first fragment:
hemantha-CE3.02-00
ES neighbor: 0015.0015.0015          Metric:      10 Down
ES neighbor: 0025.0025.0025          Metric:      10 Down
ES neighbor: 0030.0030.0030          Metric:      10 Down
ES neighbor: 0040.0040.0040          Metric:      10 Down
ES neighbor: sisira                  Metric:      0
IP prefix: 1.0.0.0/24                Metric:      10 External Down
IP prefix: 3.0.0.0/24                Metric:      10 External Down
IP prefix: 4.0.0.0/24                Metric:      10 External Down
IP prefix: 5.0.0.0/24                Metric:      10 Internal Up
IP prefix: 15.15.15.15/32            Metric:      10 External Down
IP prefix: 25.25.25.25/32            Metric:      10 External Down
IP prefix: 30.30.30.30/32            Metric:      10 External Down
IP prefix: 40.40.40.40/32            Metric:      10 External Down
IP prefix: 60.60.60.60/32            Metric:      0 Internal Up

```

```

Header: LSP ID: sisira.00-00, Length: 336 bytes
Allocated length: 336 bytes, Router ID: 0.0.0.0
Remaining lifetime: 970 secs, Level: 1, Interface: 333
Estimated free bytes: 144, Actual free bytes: 0
Aging timer expires in: 970 secs
Protocols: IP, IPv6, CLNS

```

```

Packet: LSP ID: sisira.00-00, Length: 336 bytes, Lifetime : 1198 secs
Checksum: 0x10fc, Sequence: 0x11, Attributes: 0xb L1 L2 Attached
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
Packet type: 18, Packet version: 1, Max area: 0

```

TLVs:

```

Area address: 60.0006.80ff.f800.0000.0108.0001 (13)
Speaks: IP
Speaks: IPV6
Speaks: CLNP
Hostname: sisira
ES neighbor TLV: Internal, Metric: default 0, Up
  ES: sisira
IS neighbor: hemantha-CE3.02, Internal, Metric: default 10
IS extended neighbor: hemantha-CE3.02, Metric: default 10
ES neighbor TLV: External, Metric: default 10, Down
  ES: 0040.0040.0040
ES neighbor TLV: External, Metric: default 10, Down
  ES: 0025.0025.0025
ES neighbor TLV: External, Metric: default 10, Down
  ES: 0015.0015.0015
ES neighbor TLV: External, Metric: default 10, Down
  ES: 0030.0030.0030
IP external prefix: 3.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 40.40.40.40/32, Internal, Metric: default 10, Down
IP external prefix: 4.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 25.25.25.25/32, Internal, Metric: default 10, Down
IP external prefix: 15.15.15.15/32, Internal, Metric: default 10, Down
IP external prefix: 30.30.30.30/32, Internal, Metric: default 10, Down
IP extended prefix: 3.0.0.0/24 metric 10 down
IP extended prefix: 40.40.40.40/32 metric 10 down
IP extended prefix: 4.0.0.0/24 metric 10 down
IP extended prefix: 25.25.25.25/32 metric 10 down
IP extended prefix: 15.15.15.15/32 metric 10 down
IP extended prefix: 1.0.0.0/24 metric 10 down

```

```

IP extended prefix: 30.30.30.30/32 metric 10 down
IP prefix: 60.60.60.60/32, Internal, Metric: default 0, Up
IP prefix: 5.0.0.0/24, Internal, Metric: default 10, Up
IP extended prefix: 60.60.60.60/32 metric 0 up
IP extended prefix: 5.0.0.0/24 metric 10 up
No queued transmissions

```

IS-IS level 2 link-state database:

```

sisira.00-00 Sequence: 0x13, Checksum: 0x69ac, Lifetime: 988 secs
IS neighbor: hemantha-CE3.02 Metric: 10
Two-way fragment: hemantha-CE3.02-00, Two-way first fragment:
hemantha-CE3.02-00
IP prefix: 1.0.0.0/24 Metric: 10 External Down
IP prefix: 3.0.0.0/24 Metric: 10 External Down
IP prefix: 4.0.0.0/24 Metric: 10 External Down
IP prefix: 5.0.0.0/24 Metric: 10 Internal Up
IP prefix: 15.15.15.15/32 Metric: 10 External Down
IP prefix: 25.25.25.25/32 Metric: 10 External Down
IP prefix: 30.30.30.30/32 Metric: 10 External Down
IP prefix: 40.40.40.40/32 Metric: 10 External Down
IP prefix: 50.50.50.50/32 Metric: 10 Internal Up
IP prefix: 60.60.60.60/32 Metric: 0 Internal Up
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152
Metric: 10 External Down
ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152
Metric: 0 Internal Up

```

```

Header: LSP ID: sisira.00-00, Length: 427 bytes
Allocated length: 427 bytes, Router ID: 0.0.0.0
Remaining lifetime: 988 secs, Level: 2, Interface: 333
Estimated free bytes: 130, Actual free bytes: 0
Aging timer expires in: 988 secs
Protocols: IP, IPv6, CLNS

```

```

Packet: LSP ID: sisira.00-00, Length: 427 bytes, Lifetime : 1198 secs
Checksum: 0x69ac, Sequence: 0x13, Attributes: 0x3 L1 L2
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
Packet type: 20, Packet version: 1, Max area: 0

```

TLVs:

```

Area address: 60.0006.80ff.f800.0000.0108.0001 (13)
Speaks: IP
Speaks: IPV6
Speaks: CLNP
Hostname: sisira
IS neighbor: hemantha-CE3.02, Internal, Metric: default 10
IS extended neighbor: hemantha-CE3.02, Metric: default 10
IP external prefix: 3.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 40.40.40.40/32, Internal, Metric: default 10, Down
IP external prefix: 4.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 25.25.25.25/32, Internal, Metric: default 10, Down
IP external prefix: 15.15.15.15/32, Internal, Metric: default 10, Down
IP external prefix: 1.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 30.30.30.30/32, Internal, Metric: default 10, Down

```

```

IP extended prefix: 3.0.0.0/24 metric 10 down
IP extended prefix: 40.40.40.40/32 metric 10 down
IP extended prefix: 4.0.0.0/24 metric 10 down
IP extended prefix: 25.25.25.25/32 metric 10 down
IP extended prefix: 15.15.15.15/32 metric 10 down
IP extended prefix: 1.0.0.0/24 metric 10 down
IP extended prefix: 30.30.30.30/32 metric 10 down
ISO prefix-neighbor TLV: Internal, Metric: default 0, Up
  Prefix : 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152
ISO prefix-neighbor TLV: External, Metric: default 10, Down
  Prefix : 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152
ISO prefix-neighbor TLV: External, Metric: default 10, Down
  Prefix : 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152
ISO prefix-neighbor TLV: External, Metric: default 10, Down
  Prefix : 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152
ISO prefix-neighbor TLV: External, Metric: default 10, Down
  Prefix : 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152
IP prefix: 60.60.60.60/32, Internal, Metric: default 0, Up
IP prefix: 5.0.0.0/24, Internal, Metric: default 10, Up
IP prefix: 50.50.50.50/32, Internal, Metric: default 10, Up
IP extended prefix: 60.60.60.60/32 metric 0 up
IP extended prefix: 5.0.0.0/24 metric 10 up
IP extended prefix: 50.50.50.50/32 metric 10 up
No queued transmissions

```

```

Router-F.02-00 Sequence: 0x1, Checksum: 0xf5ae, Lifetime: 1153 secs
IS neighbor: Router-E.00 Metric: 0
  Two-way fragment: Router-E.00-00, Two-way first fragment: Router-E.00-00
IS neighbor: Router-F.00 Metric: 0
  Two-way fragment: Router-F.00-00, Two-way first fragment: Router-F.00-00

```

```

Header: LSP ID: Router-F.02-00, Length: 76 bytes
Allocated length: 284 bytes, Router ID: 0.0.0.0
Remaining lifetime: 1153 secs, Level: 2, Interface: 101
Estimated free bytes: 208, Actual free bytes: 208
Aging timer expires in: 1153 secs

```

```

Packet: LSP ID: Router-F.02-00, Length: 76 bytes, Lifetime : 1183 secs
Checksum: 0xf5ae, Sequence: 0x1, Attributes: 0x3 <L1 L2>
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
Packet type: 20, Packet version: 1, Max area: 0

```

```

TLVs:
IS neighbor: Router-F.00, Internal, Metric: default 0
IS neighbor: Router-E.00, Internal, Metric: default 0
IS extended neighbor: Router-F.00, Metric: default 0
IS extended neighbor: Router-E.00, Metric: default 0
No queued transmissions

```


show isis hostname

List of Syntax	Syntax on page 209 Syntax (EX Series Switches and QFX Series) on page 209
Syntax	show isis hostname <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switches and QFX Series)	show isis hostname
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display IS-IS hostname database information. This command displays the system ID-to-name cache. The output shows if the mapping has been learned by receipt of a Hostname TLV #137 (type dynamic) configured in Junos OS with the set system host-name command, or a static mapping defined in Junos OS with the set system static-host-mapping hostname sysid command (type static). The local router always has its type set to static even if static-host-mapping is not configured.
Options	none —Display IS-IS hostname database information. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show isis hostname on page 210
Output Fields	Table 11 on page 209 describes the output fields for the show isis hostname command. Output fields are listed in the approximate order in which they appear.

Table 11: show isis hostname Output Fields

Field Name	Field Description
System Id	System identifier mapped to the hostname.
Hostname	Hostname mapped to the system identifier.
Type	Type of mapping between system identifier and hostname. <ul style="list-style-type: none"> Dynamic—Hostname mapping determined as described in RFC 2763, <i>Dynamic Hostname Exchange Mechanism for IS-IS</i>. Static—Hostname mapping configured by user.


Sample Output

show isis hostname

```
user@host> show isis hostname
IS-IS hostname database:
System Id      Hostname
1921.6800.4201 isis1
1921.6800.4202 isis2
1921.6800.4203 isis3
```

	Type
1921.6800.4201 isis1	Dynamic
1921.6800.4202 isis2	Static
1921.6800.4203 isis3	Dynamic

show isis interface

List of Syntax	Syntax on page 211 Syntax (EX Series Switch and QFX Series) on page 211
Syntax	<pre>show isis interface <brief detail extensive> <interface-name> <logical-system (all <i>logical-system-name</i>)></pre>
Syntax (EX Series Switch and QFX Series)	<pre>show isis interface <brief detail extensive> <interface-name></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p>
Description	<p>Display status information about Intermediate System-to-Intermediate System (IS-IS)-enabled interfaces.</p>
<div>  <p>NOTE: If the configured metric for an IS-IS level is above 63, and the wide-metrics-only statement is not configured, the show isis interface detail command and the show isis interface extensive command display 63 as the metric value for that level. Configure the wide-metrics-only statement to generate metric values greater than 63 on a per IS-IS level basis.</p> <p>The show isis interface command displays the configured metric value for an IS-IS level irrespective of whether is configured or not.</p> <p>For information about how to configure the wide-metrics-only statement, see the <i>Junos OS Routing Protocols Library for Routing Devices</i>.</p> </div>	
Options	<p>none—Display standard information about all IS-IS-enabled interfaces.</p> <p>brief detail extensive—(Optional) Display the specified level of output.</p> <p>interface-name—(Optional) Display information about the specified interface only.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • <i>Example: Enabling Wide IS-IS Metrics for Traffic Engineering</i>
List of Sample Output	show isis interface on page 214

[show isis interface brief on page 214](#)

[show isis interface detail on page 214](#)

[show isis interface extensive on page 214](#)

[show isis interface extensive \(With LDP\) on page 214](#)

Output Fields Table 12 on page 212 describes the output fields for the **show isis interface** command. Output fields are listed in the approximate order in which they appear.

Table 12: show isis interface Output Fields

Field Name	Field Description	Level of Output
<i>interface-name</i>	Name of the interface.	detail
Designated router	Routing device selected by other routers that is responsible for sending link-state advertisements that describe the network. Used only on broadcast networks.	detail
Index	Interface index assigned by the Junos OS kernel.	detail
State	Internal implementation information.	detail
Circuit id	Circuit identifier. NOTE: Each IS-IS interface is assigned a circuit ID value to identify the interface within the linkstate database. All interfaces (loopback, broadcast, and so on) and all point-to-point links share the locally significant value of 0x01, and this value is not incremented.	detail
Circuit type	Circuit type: <ul style="list-style-type: none"> • 1—Level 1 only • 2—Level 2 only • 3—Level 1 and Level 2 	detail
LSP interval	Interval between link-state PDUs sent from the interface.	detail
CSNP interval	Interval between complete sequence number PDUs sent from the interface.	detail extensive
Sysid	System identifier.	detail
Interface	Interface through which the adjacency is made.	none brief
L or Level	Level: <ul style="list-style-type: none"> • 1—Level 1 only • 2—Level 2 only • 3—Level 1 and Level 2 NOTE: The default IS-IS level on loopback interfaces are always same as the IS-IS level configured on other IS-IS interfaces in a router. You can also configure IS-IS level on loopback interfaces per your requirement.	All levels
CirID	Circuit identifier.	none brief

Table 12: show isis interface Output Fields (*continued*)

Field Name	Field Description	Level of Output
Level 1 DR	Level 1 designated intermediate system.	none brief
Level 2 DR	Level 2 designated intermediate system.	none brief
L1/L2 Metric	Interface's metric for Level 1 and Level 2. If there is no information, the metric is 0.	none brief
Adjacency advertisement: Advertise	This routing device has signaled to advertise this interface to its neighbors in their label-switched paths (LSPs).	detail extensive
Adjacency advertisement: Suppress	This neighbor has signaled not to advertise this interface in the routing device's outbound LSPs.	detail extensive
Adjacencies	Number of adjacencies established on this interface.	detail
Priority	Priority value for this interface.	detail
Metric	Metric value for this interface.	detail
Hello(s) / Hello Interval	Interface's hello interval.	detail extensive
Hold(s) / Hold Time	Interface's hold time.	detail extensive
Designated Router	Router responsible for sending network link-state advertisements, which describe all the routing devices attached to the network.	detail
Hello padding	Type of hello padding: <ul style="list-style-type: none"> • Adaptive—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state TLV. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface. • Loose—(Default) The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state. • Strict—Padding is performed on all interface types and for all adjacency states, and is continuous. 	extensive
LDP sync state	Current LDP synchronization state: in sync , in holddown , or not supported .	extensive
reason	Reason for being in the LDP sync state.	extensive
config holdtime	Configured value of the hold timer.	extensive
remaining	If the state is not in sync and the hold time is not infinity, then this field displays the remaining hold time in seconds.	extensive

Sample Output

show isis interface

```
user@host> show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR      Level 2 DR      L1/L2 Metric
at-2/3/0.0         3  0x1 Point to Point    Point to Point    10/10
lo0.0              0  0x1 Passive           Passive           0/0
```

show isis interface brief

The output for the **show isis interface brief** command is identical to that for the **show isis interface** command. For sample output, see [show isis interface on page 214](#).

show isis interface detail

```
user@host> show isis interface detail
IS-IS interface database:
at-2/3/0.0
  Index: 66, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 5 s
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                1        64    10    9.000    27
    2                1        64    10    9.000    27
lo0.0
  Index: 64, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled
  Adjacency advertisement: Advertise
  Protection Type: Node Link, No eligible Backup
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                0        64     0 Passive
    2                0        64     0 Passive
```

show isis interface extensive

```
user@host> show isis interface extensive
IS-IS interface database:
at-2/3/0.0
  Index: 66, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 5 s, Loose Hello padding
  Level 1
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
  Level 2
    Adjacencies: 1, Priority: 64, Metric: 10
    Hello Interval: 9.000 s, Hold Time: 27 s
lo0.0
  Index: 64, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled, Loose Hello padding
  Level 1
    Adjacencies: 0, Priority: 64, Metric: 0
    Passive
  Level 2
    Adjacencies: 0, Priority: 64, Metric: 0
    Passive
```

show isis interface extensive (With LDP)

```
user@host> show isis interface extensive
```

```
IS-IS interface database:
so-1/1/2.0
  Index: 114, State: 0x6, Circuit id: 0x1, Circuit type: 2
  LSP interval: 100 ms, CSNP interval: 20 s, Loose Hello padding
  Adjacency advertisement: Advertise
  LDP sync state: in sync, for: 00:01:28, reason: LDP up during config
  config holdtime: 20 seconds
  Level 2
    Adjacencies: 1, Priority: 64, Metric: 11
    Hello Interval: 9.000 s, Hold Time: 27 s
    IPV4 MulticastMetric: 10
    IPV6 UnicastMetric: 10
```

show isis overview

Syntax	show isis overview <instance <i>instance-name</i> > <logical-system (all <i>logical-system-name</i>)>
Syntax (EX Series Switch and QFX Series)	show isis overview <instance <i>instance-name</i> >
Release Information	Command introduced in Junos OS Release 8.5. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display Intermediate System-to-Intermediate System (IS-IS) overview information.
Options	none —Display standard overview information about IS-IS for all routing instances. instance <i>instance-name</i> —(Optional) Display overview information for the specified routing instance. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
List of Sample Output	show isis overview on page 218
Output Fields	Table 13 on page 216 lists the output fields for the show isis overview command. Output fields are listed in the approximate order in which they appear.

Table 13: show isis overview Output Fields

Field Name	Field Description
Hostname	Name of the router.
Sysid	Part of the ISO address of the routing device.
Areaid	The area number of the routing device.
Instance	IS-IS routing instance.
Router ID	Router ID of the routing device.
Adjacency holddown	Adjacency holddown capability: enabled or disabled .
Maximum Areas	Maximum number of IS-IS areas advertised by the routing device.
LSP life time	Lifetime of the link-state PDU, in seconds.

Table 13: show isis overview Output Fields (*continued*)

Field Name	Field Description
Attached bit evaluation	Attached bit capability: enabled or disabled .
SPF delay	Delay before performing consecutive Shortest Path First calculations.
SPF holddown	Delay before performing additional Shortest Path First (SPF) calculations after the maximum number of consecutive SPF calculations is reached.
SPF rapid runs	Maximum number of Shortest Path First calculations that can be performed in succession before the holddown timer begins.
Overload bit at startup is set	Overload bit capability is enabled.
Overload high metrics	Overload high metrics capability: enabled or disabled .
Overload timeout	Time period after which overload is reset and the time that remains before the timer is set to expire.
Traffic engineering	Traffic engineering capability: enabled or disabled .
Restart	Graceful restart capability: enabled or disabled .
Restart duration	Time period for complete reacquisition of IS-IS neighbors.
Helper mode	Graceful restart helper capability: enabled or disabled .
Level	IS-IS level: <ul style="list-style-type: none"> • 1—Level 1 information • 2—Level 2 information
IPv4 is enabled	IP Protocol version 4 capability is enabled.
IPv6 is enabled	IP Protocol version 6 capability is enabled.
Internal route preference	Preference value of internal routes.
CLNS is enabled	Preference value of external routes.
Internal route preference	Preference value of internal routes.
External route preference	Preference value of external routes.
Wide area metrics are enabled	Wide area metrics capability is enabled.

Table 13: show isis overview Output Fields (*continued*)

Field Name	Field Description
Narrow metrics are enabled	Narrow metrics capability is enabled.

Sample Output

show isis overview

```

user@host> show isis overview
Instance: master
  Router ID: 192.168.1.220
  Adjacency holddown: enabled
  Maximum Areas: 3
  LSP life time: 65535
  Attached bit evaluation: enabled
  SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
  Overload bit at startup is set
    Overload high metrics: disabled
    Overload timeout: 300 sec, expires in 295 seconds
  IPv4 is enabled, IPv6 is enabled
  Traffic engineering: enabled
  Restart: Enabled
    Restart duration: 210 sec
    Helper mode: Enabled
  Level 1
    Internal route preference: 15
    External route preference: 160
    Wide metrics are enabled, Narrow metrics are enabled
  Level 2
    Internal route preference: 18
    External route preference: 165
    Prefix export limit: 5, Prefix export count: 5
    Wide metrics are enabled

```

```

user@host> show isis overview logical-system R2
Instance: master
  Router ID: 192.168.0.2
  Hostname: pro-bng3-a-R2
  Sysid: 0192.0168.0002
  Areaid: 49.0002
  Adjacency holddown: enabled
  Maximum Areas: 3
  LSP life time: 1200
  Attached bit evaluation: enabled
  SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
  IPv4 is enabled, IPv6 is enabled
  Traffic engineering: enabled
  Restart: Disabled
    Helper mode: Enabled
  Level 1
    Internal route preference: 15
    External route preference: 160
    Prefix export count: 0
    Wide metrics are enabled, Narrow metrics are enabled
  Level 2
    Internal route preference: 18

```

```
External route preference: 165
Prefix export count: 0
Wide metrics are enabled, Narrow metrics are enabled
```

```
user@host> show isis overview logical-system R3
```

```
Instance: master
Router ID: 192.168.0.3
Hostname: pro-bng3-a-R3
Sysid: 0192.0168.0003
Areaid: 49.0002
Adjacency holddown: enabled
Maximum Areas: 3
LSP life time: 1200
Attached bit evaluation: enabled
SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
IPv4 is enabled, IPv6 is enabled
Traffic engineering: enabled
Restart: Disabled
  Helper mode: Enabled
Level 1
  Internal route preference: 15
  External route preference: 160
  Prefix export count: 0
  Wide metrics are enabled, Narrow metrics are enabled
Level 2
  Internal route preference: 18
  External route preference: 165
  Prefix export count: 0
  Wide metrics are enabled, Narrow metrics are enabled
```

show isis route

List of Syntax	Syntax on page 220 Syntax (EX Series Switches and QFX Series) on page 220
Syntax	<pre>show isis route <destination> <inet inet6> <instance <i>instance-name</i>> <logical-system (all <i>logical-system-name</i>)> <topology (ipv4-multicast ipv6-multicast ipv6-unicast unicast)></pre>
Syntax (EX Series Switches and QFX Series)	<pre>show isis route <destination> <inet inet6> <instance <i>instance-name</i>> <topology (ipv4-multicast ipv6-multicast ipv6-unicast unicast)></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>
Description	Display the routes in the IS-IS routing table.
Options	<p>none—Display all routes in the IS-IS routing table for all supported address families for all routing instances.</p> <p><i>destination</i>—(Optional) Destination address for the route.</p> <p>inet inet6—(Optional) Display inet (IPv4) or inet6 (IPv6) routes, respectively.</p> <p>instance <i>instance-name</i>—(Optional) Display routes for the specified routing instance only.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>topology (ipv4-multicast ipv6-multicast ipv6-unicast unicast)—(Optional) Display routes for the specified topology only, or use unicast to display information, if available, for both IPv4 and IPv6 unicast topologies.</p>
Required Privilege Level	view
List of Sample Output	show isis route logical-system on page 221 show isis route (CLNS) on page 221 show isis route on page 222
Output Fields	<p>Table 14 on page 221 describes the output fields for the show isis route command. Output fields are listed in the approximate order in which they appear.</p>

Table 14: show isis route Output Fields

Field Name	Field Description
Current version	Number of the current version of the IS-IS routing table.
L1	Version of Level 1 SPF that was run.
L2	Version of Level 2 SPF that was run.
Prefix	Destination of the route.
L	IS-IS level: <ul style="list-style-type: none"> • 1—Level 1 only • 2—Level 2 only • 3—Level 1 and Level 2
Version	Version of SPF that generated the route.
Metric	Metric value associated with the route.
Type	Metric type: int (internal) or ext (external).
Interface	Interface to the next hop.
Via	System identifier of the next hop, displayed as a name if possible.
ISO Routes	ISO routing table entries.
snpa	MAC address.

Sample Output

show isis route logical-system

```

user@host> show isis route logical-system ls1
IS-IS routing table           Current version: L1: 8 L2: 11
Prefix      L Version Metric Type Interface  Via
10.9.7.0/30  2    11    20 int  gr-0/2/0.0  h
10.9.201.1/32 2    11    60 int  gr-0/2/0.0  h
IPv6 Unicast IS-IS routing table           Current version: L1: 9 L2: 11
Prefix      L Version Metric Type Interface  Via
8009:3::a09:3200/126 2    11    20 int  gr-0/2/0.0  h

```

show isis route (CLNS)

```

user@host> show isis route
IS-IS routing table           Current version: L1: 10 L2: 8
IPv4/IPv6 Routes
Prefix      L Version Metric Type Interface  Via
0.0.0.0/0   1    10    10 int  fe-0/0/1.0  ISIS.0
ISO Routes
Prefix L   Version Metric Type Interface  Via  snpa

```

```

0/0
  1      10      10 int fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001/104
  1      10      0 int
47.0005.80ff.f800.0000.0108.0001.1921.6800.4001/152
  1      10      10 int fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001.1921.6800.4002/152
  1      10      20 int fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0002/104
  1      10      0 int
47.0005.80ff.f800.0000.0108.0002.1921.6800.4001/152
  1      10      10 int fe-0/0/1.0 isis.0 0:12:0:34:0:56

```

show isis route

```
user@host> show isis route
```

```

IS-IS routing table          Current version: L1: 4 L2: 13
IPv4/IPv6 Routes
-----
Prefix                      L   Version  Metric Type Interface      NH   Via
10.255.71.52/32             2    13        10   int  ae0.0                 IPV4 camaro
10.255.71.238/32           2    13        20   int  so-6/0/0.0           IPV4 olympic
                               as0.0                 IPV4 glacier
10.255.71.239/32           2    13        20   int  so-6/0/0.0           IPV4 olympic
                               ae0.0                 IPV4 camaro
10.255.71.242/32           2    13        10   int  as0.0                 IPV4 glacier
10.255.71.243/32           2    13        10   int  so-6/0/0.0           IPV4 olympic
12.13.0.0/30                2    13        20   int  so-6/0/0.0           IPV4 olympic
12.15.0.0/30                2    13        20   int  so-6/0/0.0           IPV4 olympic
13.15.0.0/30                2    13        30   int  ae0.0                 IPV4 camaro
                               so-6/0/0.0           IPV4 olympic
                               as0.0                 IPV4 glacier
13.16.0.0/30                2    13        25   int  as0.0                 IPV4 glacier
14.15.0.0/30                2    13        20   int  ae0.0                 IPV4 camaro
192.2.1.0/30                2    13        30   int  so-6/0/0.0           IPV4 olympic
                               as0.0                 IPV4 glacier
1eee::/64                   2    13        30   int  so-6/0/0.0           IPV6 olympic
                               as0.0                 IPV6 glacier
abcd::10:255:71:52/128     2    13        10   int  ae0.0                 IPV6 camaro
abcd::10:255:71:238/128   2    13        20   int  so-6/0/0.0           IPV6 olympic

```

					as0.0	IPV6 glacier
abcd::10:255:71:239/128	2	13	20	int	so-6/0/0.0	IPV6 olympic
					ae0.0	IPV6 camaro
abcd::10:255:71:242/128	2	13	10	int	as0.0	IPV6 glacier
abcd::10:255:71:243/128	2	13	10	int	so-6/0/0.0	IPV6 olympic

show isis spf

List of Syntax	Syntax on page 224 Syntax (EX Series Switches) on page 224
Syntax	<pre>show isis spf (brief log results) <instance <i>instance-name</i>> <level (1 2)> <logical-system (all <i>logical-system-name</i>)> <topology (ipv4-multicast ipv6-multicast ipv6-unicast unicast)></pre>
Syntax (EX Series Switches)	<pre>show isis spf (brief log results) <instance <i>instance-name</i>> <level (1 2)> <topology (ipv4-multicast ipv6-multicast ipv6-unicast unicast)></pre>
Release Information	<p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p>
Description	Display information about Intermediate System-to-Intermediate System (IS-IS) shortest-path-first (SPF) calculations.
Options	<p>brief—Display an overview of SPF calculations.</p> <p>log—Display the log of SPF calculations.</p> <p>results—Display the results of SPF calculations.</p> <p>instance <i>instance instance-name</i>—(Optional) Display SPF calculations for the specified routing instance.</p> <p>level (1 2)—(Optional) Display SPF calculations for the specified IS-IS level.</p> <p>log—Display the log of SPF calculations.</p> <p>logical-system (all <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>results—Display the results of SPF calculations.</p> <p>topology (ipv4-multicast ipv6-multicast ipv6-unicast unicast)—(Optional) Display SPF calculations for the specified topology only.</p>
Required Privilege Level	view
List of Sample Output	show isis spf log on page 225 show isis spf results on page 226 show isis spf results (CLNS) on page 227 show isis spf results on page 228
Output Fields	<p>Table 15 on page 225 describes the output fields for the show isis spf command. Output fields are listed in the approximate order in which they appear.</p>

Table 15: show isis spf Output Fields

Field Name	Field Description
Node	System ID of a node.
Metric	Metric to the node.
Interface	Interface of the next hop.
Via	System ID of the next hop.
SNPA	Subnetwork point of attachment (MAC address of the next hop).
Start time	(log option only) Time that the SPF computation started.
Elapsed (secs)	(log option only) Length of time, in seconds, required to complete the SPF computation.
Count	(log option only) Number of times the SPF was triggered.
Reason	(log option only) Reason that the SPF computation was completed.

Sample Output

show isis spf log

```

user@host> show isis spf log logical-system lsl
IS-IS level 1 SPF log:
Start time           Elapsed (secs) Count Reason
Fri Oct 31 12:41:18   0.000069    1 Reconfig
Fri Oct 31 12:41:18   0.000107    3 Updated LSP fix.00-00
Fri Oct 31 12:41:18   0.000050    3 Address change on so-1/2/2.0
Fri Oct 31 12:41:23   0.000033    1 Updated LSP fix.00-00
Fri Oct 31 12:41:28   0.000178    5 New adjacency scat on ge-1/1/0.0
Fri Oct 31 12:41:59   0.000060    1 Updated LSP fix.00-00
Fri Oct 31 12:42:30   0.000161    2 Multi area attachment change
Fri Oct 31 12:56:58   0.000198    1 Periodic SPF
Fri Oct 31 13:10:29   0.000209    1 Periodic SPF
IS-IS level 2 SPF log:
Start time           Elapsed (secs) Count Reason
Fri Oct 31 12:41:18   0.000035    1 Reconfig
Fri Oct 31 12:41:18   0.000047    2 Updated LSP fix.00-00
Fri Oct 31 12:41:18   0.000043    5 Address change on gr-0/2/0.0
Fri Oct 31 12:41:23   0.000022    1 Updated LSP fix.00-00
Fri Oct 31 12:41:59   0.000144    3 New adjacency h on gr-0/2/0.0
Fri Oct 31 12:42:30   0.000257    3 New LSP skag.00-00
Fri Oct 31 12:54:37   0.000195    1 Periodic SPF
Fri Oct 31 12:55:50   0.000178    1 Updated LSP fix.00-00
Fri Oct 31 12:55:55   0.000174    1 Updated LSP h.00-00
Fri Oct 31 12:55:58   0.000176    1 Updated LSP skag.00-00
Fri Oct 31 13:08:14   0.000198    1 Periodic SPF
IPv6 Unicast IS-IS level 1 SPF log:
Start time           Elapsed (secs) Count Reason

```

```

Fri Oct 31 12:41:18      0.000028      1 Reconfig
Fri Oct 31 12:41:18      0.000043      3 Updated LSP fix.00-00
Fri Oct 31 12:41:18      0.000112      4 Updated LSP fix.00-00
Fri Oct 31 12:41:23      0.000059      1 Updated LSP fix.00-00
Fri Oct 31 12:41:25      0.000041      1 Updated LSP fix.00-00
Fri Oct 31 12:41:28      0.000103      5 New adjacency scat on ge-1/1/0.0
Fri Oct 31 12:41:59      0.000040      1 Updated LSP fix.00-00
Fri Oct 31 12:42:30      0.000118      2 Multi area attachment change
Fri Oct 31 12:56:08      0.000289      1 Periodic SPF
Fri Oct 31 13:11:07      0.000214      1 Periodic SPF
IPV6 Unicast IS-IS level 2 SPF log:

```

```

Start time      Elapsed (secs) Count Reason
Fri Oct 31 12:41:18      0.000027      1 Reconfig
Fri Oct 31 12:41:18      0.000039      2 Updated LSP fix.00-00
Fri Oct 31 12:41:18      0.000049      6 Updated LSP fix.00-00
Fri Oct 31 12:41:23      0.000025      1 Updated LSP fix.00-00
Fri Oct 31 12:41:25      0.000023      1 Updated LSP fix.00-00
Fri Oct 31 12:41:59      0.000087      3 New adjacency h on gr-0/2/0.0
Fri Oct 31 12:42:30      0.000123      3 New LSP skag.00-00
Fri Oct 31 12:55:50      0.000121      1 Updated LSP fix.00-00
Fri Oct 31 12:55:55      0.000121      1 Updated LSP h.00-00
Fri Oct 31 12:55:58      0.000121      1 Updated LSP skag.00-00
Fri Oct 31 13:09:46      0.000201      1 Periodic SPF
...

```

show isis spf results

```
user@host> show isis spf results logical-system ls1
```

IS-IS level 1 SPF results:

Node	Metric	Interface	Via	SNPA
scat.00	10	ge-1/1/0.0	scat	0:90:69:a6:48:9d
	20	10.9.1.0/30		
fix.02	10			
fix.00	0			
	10	10.9.1.0/30		
	10	10.9.5.0/30		
	10	10.9.6.0/30		
	20	10.9.7.0/30		
	60	10.9.201.1/32		
3 nodes				

IS-IS level 2 SPF results:

Node	Metric	Interface	Via	SNPA
skag.00	20	gr-0/2/0.0	h	
	30	10.9.7.0/30		
skag.02	20	gr-0/2/0.0	h	
h.00	10	gr-0/2/0.0	h	
	20	10.9.6.0/30		
	20	10.9.7.0/30		
	60	10.9.201.1/32		
fix.00	0			
	10	10.9.1.0/30		
	10	10.9.5.0/30		
	10	10.9.6.0/30		
4 nodes				

IPV6 Unicast IS-IS level 1 SPF results:

Node	Metric	Interface	Via	SNPA
scat.00	10	ge-1/1/0.0	scat	0:90:69:a6:48:9d
		ge-1/1/0.0	scat	0:90:69:a6:48:9d

```

                20      8009:1::a09:1400/126
fix.02         10
fix.00         0
                10      8009:1::a09:1400/126
                10      8009:2::a09:1e00/126
                20      8009:3::a09:3200/126
                10      8009:4::a09:2800/126
3 nodes

```

IPv6 Unicast IS-IS level 2 SPF results:

Node	Metric	Interface	Via	SNPA
skag.00	20	gr-0/2/0.0	h	
		gr-0/2/0.0	h	
	30	8009:3::a09:3200/126		
skag.02	20	gr-0/2/0.0	h	
		gr-0/2/0.0	h	
h.00	10	gr-0/2/0.0	h	
		gr-0/2/0.0	h	
	20	8009:3::a09:3200/126		
	20	8009:4::a09:2800/126		
fix.00	0			
	10	8009:1::a09:1400/126		
	10	8009:2::a09:1e00/126		
	10	8009:4::a09:2800/126		

4 nodes

Multicast IS-IS level 1 SPF results:

Node	Metric	Interface	Via	SNPA
scat.00	10	ge-1/1/0.0	scat	0:90:69:a6:48:9d
fix.02	10			
fix.00	0			

3 nodes

Multicast IS-IS level 2 SPF results:

Node	Metric	Interface	Via	SNPA
skag.00	20	gr-0/2/0.0	h	
skag.02	20	gr-0/2/0.0	h	
h.00	10	gr-0/2/0.0	h	
fix.00	0			

4 nodes

...

show isis spf results (CLNS)

```
user@host> show isis spf results
```

IS-IS level 1 SPF results:

Node	Metric	Interface	Via	SNPA
skag.00	10	fe-0/0/1.0	toothache	0:12:0:34:0:56
		fe-0/0/1.0	toothache	0:12:0:34:0:56
	20	192.168.37.64/29		
	10	1921.6800.4001		
	20	1921.6800.4002		
pro1-a.02	10			
pro1-a.00	0			
	0	10.255.245.1/32		
	10	192.168.37.64/29		
	0	1921.6800.4211		

3 nodes

IS-IS level 2 SPF results:

Node	Metric	Interface	Via	SNPA
------	--------	-----------	-----	------

```

skag.00 10          fe-0/0/1.0      toothache      0:12:0:34:0:56
                  fe-0/0/1.0      toothache      0:12:0:34:0:56
                  20        10.255.245.1/32
                  20        192.168.37.64/29
                  20        47.0005.80ff.f800.0000.0109.0010/104
pro1-a.02          10
pro1-a.00          0
                  0        10.255.245.1/32
                  10        192.168.37.64/29

3 nodes

```

show isis spf results

```
user@host> show isis spf results
```

```

IS-IS level 1 SPF results:
Node      Metric  Interface      NH  Via      SNPA
kobuk.00  0           10.255.70.103/32
          0           abcd::10:255:70:103/128
          0

1 nodes

IS-IS level 2 SPF results:
Node      Metric  Interface      NH  Via      SNPA
glacier.02  25      as0.0          IPV4 glacier
          25      as0.0          IPV6 glacier
banff.00   20      so-6/0/0.0     IPV4 olympic
          20      ae0.0          IPV4 camaro      0:90:69:f:67:f0
          20      so-6/0/0.0     IPV6 olympic
          20      ae0.0          IPV6 camaro      0:90:69:f:67:f0
          20      10.255.71.239/32
          30      12.15.0.0/30
          30      13.15.0.0/30
          30      14.15.0.0/30
          20      abcd::10:255:71:239/128
crater.00  20      so-6/0/0.0     IPV4 olympic
          20      so-6/0/0.0     IPV6 olympic
          20      10.255.71.238/32
          30      12.13.0.0/30
          30      13.15.0.0/30
          35      13.16.0.0/30
          30      192.2.1.0/30
          30      1eee::/64
          20      abcd::10:255:71:238/128
olympic.02  20      so-6/0/0.0     IPV4 olympic
          20      so-6/0/0.0     IPV6 olympic
camaro.03   20      ae0.0          IPV4 camaro      0:90:69:f:67:f0
          20      ae0.0          IPV6 camaro      0:90:69:f:67:f0
olympic.00  10      so-6/0/0.0     IPV4 olympic
          10      so-6/0/0.0     IPV6 olympic
          10      10.255.71.243/32
          20      11.12.0.0/30
          20      12.13.0.0/30
          20      12.15.0.0/30
          10      abcd::10:255:71:243/128
camaro.00   10      ae0.0          IPV4 camaro      0:90:69:f:67:f0
          10      ae0.0          IPV6 camaro      0:90:69:f:67:f0

```

	10	10.255.71.52/32
	20	11.14.10.0/24
	20	14.15.0.0/30
	10	abcd::10:255:71:52/128
glacier.00	10	as0.0 IPv4 glacier
		as0.0 IPv6 glacier
	10	10.255.71.242/32
	20	11.16.10.0/30
	25	13.16.0.0/30
	10	abcd::10:255:71:242/128
kobuk.00	0	
	0	10.255.70.103/32
	10	11.12.0.0/30
	10	11.14.10.0/24
	10	11.16.10.0/30
	0	abcd::10:255:70:103/128
9 nodes		

show isis statistics

List of Syntax	Syntax on page 230 Syntax (EX Series Switches and QFX Series) on page 230
Syntax	<code>show isis statistics</code> <code><instance <i>instance-name</i>></code> <code><logical-system (all <i>logical-system-name</i>)></code>
Syntax (EX Series Switches and QFX Series)	<code>show isis statistics</code> <code><instance <i>instance-name</i>></code>
Release Information	Command introduced before Junos OS Release 7.4. Command introduced in Junos OS Release 9.0 for EX Series switches. Command introduced in Junos OS Release 12.1 for the QFX Series. Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.
Description	Display statistics about IS-IS traffic.
Options	none —Display IS-IS traffic statistics for all routing instances. instance <i>instance-name</i> —(Optional) Display statistics for the specified routing instance. logical-system (all <i>logical-system-name</i>) —(Optional) Perform this operation on all logical systems or on a particular logical system.
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none">• clear isis statistics on page 186
List of Sample Output	show isis statistics on page 232
Output Fields	Table 16 on page 231 describes the output fields for the show isis statistics command. Output fields are listed in the approximate order in which they appear.

Table 16: show isis statistics Output Fields

Field Name	Field Description
PDU type	<p>PDU type:</p> <ul style="list-style-type: none"> • CSNP—Complete sequence number PDUs contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU. • IIH—IS-IS hello packets are broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems. • LSP—Link-state PDUs contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area. • PSNP—Partial sequence number PDUs are sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device. • Unknown—The PDU type is unknown.
Received	Number of PDUs received since IS-IS started or since the statistics were set to zero.
Processed	Number of PDUs received less the number dropped.
Drops	Number of PDUs dropped.
Sent	Number of PDUs transmitted since IS-IS started or since the statistics were set to zero.
Rexmit	Number of PDUs retransmitted since IS-IS started or since the statistics were set to zero.
Total packets received/sent	Total number of PDUs received and transmitted since IS-IS started or since the statistics were set to zero.
SNP queue length	Number of CSPN and PSNP packets currently waiting in the queue for processing. This value is almost always 0.
LSP queue length	Number of link-state PDUs waiting in the queue for processing. This value is almost always 0.
SPF runs	Number of shortest-path-first (SPF) calculations that have been performed. If this number is incrementing rapidly, it indicates that the network is unstable.
Fragments rebuilt	Number of link-state PDU fragments that the local system has computed.
LSP regenerations	Number of link-state PDUs that have been regenerated. A link-state PDU is regenerated when it is nearing the end of its lifetime and it has not changed.
Purges initiated	Number of purges that the system initiated. A purge is initiated if the software decides that a link-state PDU must be removed from the network.

Sample Output

show isis statistics

```
user@host> show isis statistics
IS-IS statistics for merino:

PDU type      Received  Processed    Drops      Sent      Reremit
LSP           12227     12227        0          8184      683
IIH           113808    113808        0         115817      0
CSNP          198868    198868        0         198934      0
PSNP           6985      6979         6          8274      0
Unknown        0          0            0           0         0
Totals        331888    331882        6         331209     683

Total packets received: 331888 Sent: 331892

SNP queue length:          0 Drops:          0
LSP queue length:          0 Drops:          0

SPF runs:                  1014
Fragments rebuilt:         1038
LSP regenerations:         425
Purges initiated:          0
```