



Junos[®] OS

Multichassis Link Aggregation Feature Guide for EX Series, MX Series, and QFX Series Devices



Modified: 2017-02-16

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Junos[®] OS Multichassis Link Aggregation Feature Guide for EX Series, MX Series, and QFX Series Devices
Copyright © 2017, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	xiii
	Documentation and Release Notes	xiii
	Supported Platforms	xiii
	Using the Examples in This Manual	xiii
	Merging a Full Example	xiv
	Merging a Snippet	xiv
	Documentation Conventions	xv
	Documentation Feedback	xvii
	Requesting Technical Support	xvii
	Self-Help Online Tools and Resources	xvii
	Opening a Case with JTAC	xviii
Part 1	Overview	
Chapter 1	Understanding Multichassis Link Aggregation Groups	3
	Multichassis Link Aggregation Features, Terms, and Best Practices	3
	ICCP and ICL	5
	Failure Handling	6
	Multichassis Link Protection	8
	MC-AE Statement Options	8
	Multichassis Link Aggregation Group (MC-LAG) Configuration	
	Synchronization	11
	Multichassis Link Aggregation Group (MC-LAG) Configuration Consistency	
	Check	11
	Enhanced Convergence	11
	IPv6 Neighbor Discovery Protocol	12
	Load Balancing	12
	Layer 2 Unicast Features Supported	12
	VLANs	12
	Layer 2 Multicast Features Supported	13
	IGMP Snooping on an Active-Active MC-LAG	13
	VRRP Active-Standby Support	14
	MAC Address Management	15
	MAC Aging	15
	Address Resolution Protocol Active-Active MC-LAG Support	
	Methodology	15
	DHCP Relay with Option 82	16
	MC-LAG Packet Forwarding	17
	Layer 3 Unicast Feature Support	17
	Virtual Router Redundancy Protocol (VRRP) over IRB and MAC Address	
	Synchronization	17

	Protocol Independent Multicast	19
	PIM Operation with Normal Mode Designated Router Election	20
	PIM Operation with Dual Designated Router Mode	20
	Failure Handling	20
	Miswiring Detection Guidelines	21
	Reverse Layer 2 Gateway Protocol (RL2GP) for Loop Prevention	21
	MC-LAG Upgrade	22
	IGMP Report Synchronization	23
Part 2	Configuring MC-LAG for Providing Redundancy, Load Balancing, and Multihoming Support	
Chapter 2	Establishing Redundancy and Multihoming Using MC-LAG	27
	Configuring Multichassis Link Aggregation on MX Series Routers	27
	Configuring Multichassis Link Aggregation on EX Series Switches	32
	Configuring Multichassis Link Aggregation	35
	Forcing MC-LAG Links or Interfaces with Limited LACP Capability to Be Up	40
	Example: Configuring Multichassis Link Aggregation	41
Chapter 3	Enabling High Availability in Layer 2 Networks Using Active-Active Bridging for MC-LAG	67
	Multichassis Link Aggregation on Logical Systems Overview	67
	Sample Configuration Scenario for MC-LAG on Logical Systems	69
	Guidelines for Configuring MC-LAG on Logical Systems	70
	Active-Active Bridging and VRRP over IRB Functionality Overview	71
	Advantages of Using Multichassis Link Aggregation Groups	76
	Data Traffic Forwarding Rules	77
	MAC Address Management	79
	MAC Aging	79
	Layer 3 Routing	79
	Address Resolution Protocol Active-Active MC-LAG Support	
	Methodology	80
	IGMP Snooping on Active-Active MC-LAG	80
	Up and Down Event Handling	81
	VRRP Active-Standby Support	82
	Inter-Chassis Control Protocol	83
	Inter-Chassis Control Protocol Message	83
	Preventing Loops in MC-LAG Topologies	83
	Understanding the Incremented Values of Statistical Counters for Loop-Free	
	MC-LAG Networks	84
	Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link	
	Aggregation	87
	Configuring MC-LAG	87
	Configuring the Interchassis Link-Protection Link	88
	Configuring Multiple Chassis	89
	Configuring the Service ID	89

Chapter 4

Configuring IGMP Snooping for Active-Active MC-LAG	91
Configuring IGMP Snooping in MC-LAG Active-Active Mode	92
Example: Configuring DHCP Relay on MC-LAG with VRRP on an EX9200 Switch	93
Configuring Manual and Automatic Link Switchover for MC-LAG Interfaces	99
Example: Configuring Multichassis Link Aggregation in Active-Active Mode	101
Example: Configuring Multichassis Link Aggregation in an Active-Active Bridging Domain on Logical Systems on MX Series Routers	115
Enabling High Availability in Layer 3 Networks Using VRRP and MAC Synchronization for MC-LAG	139
Active-Active Bridging and VRRP over IRB Functionality Overview	139
Advantages of Using Multichassis Link Aggregation Groups	145
Data Traffic Forwarding Rules	145
MAC Address Management	147
MAC Aging	148
Layer 3 Routing	148
Address Resolution Protocol Active-Active MC-LAG Support Methodology	148
IGMP Snooping on Active-Active MC-LAG	148
Up and Down Event Handling	150
VRRP Active-Standby Support	151
Inter-Chassis Control Protocol	152
Inter-Chassis Control Protocol Message	152
IGMP Snooping in MC-LAG Active-Active Mode	152
IGMP Snooping in MC-LAG Active-Active Mode Functionality	153
Typically Supported Network Topology for IGMP Snooping with MC-LAG Active-Active Bridging	154
Control Plane State Updates Triggered by Packets Received on Remote Chassis	154
Data Forwarding	155
Pure Layer 2 Topology Without Integrated Routing and Bridging	156
Qualified Learning	156
Data Forwarding with Qualified Learning	157
Static Groups on Single-Homed Interfaces	157
Router-Facing Interfaces as Multichassis Links	157
Example: Configuring IGMP Snooping in MC-LAG Active-Active Mode	158
Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on EX9200 Switches	174
Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on EX9200 Switches	195
Example: Configuring Multichassis Link Aggregation with Layer 3 MAC Address Synchronization	214
Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization	236
Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP	253
Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP	280

	Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on MX Series Routers[Warning: element unresolved in stylesheets: <author> (in <title>). This is probably a new element that is not yet supported in the stylesheets.]	318
	Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on MX Series Routers	338
Chapter 5	Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG	357
	Understanding MC-LAGs on an FCoE Transit Switch	357
	Supported Topology	358
	Transit Switches (Server Access)	359
	MC-LAG Switches (FCoE Aggregation)	359
	FIP Snooping and FCoE Trusted Ports	359
	CoS and Data Center Bridging (DCB)	360
	Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG . .	360
Chapter 6	Understanding MC-LAG Configuration Synchronization	385
	Understanding MC-LAG Configuration Synchronization	385
	Simplifying MC-LAG Configuration	385
	Understanding Configuration Groups	386
	Understanding Conditional Groups	386
	Understanding Apply Groups	386
	Understanding Peer Configuration Details for MC-LAG Configuration Synchronization	387
	Understanding How Configurations and Commits Are Synchronized Between MC-LAG Peers	387
	Synchronizing and Committing MC-LAG Configurations	388
	Configure the MC-LAG Peers for Configuration Synchronization	389
	Create a Global Configuration Group	390
	Create a Local Configuration Group	393
	Create a Remote Configuration Group	395
	Create Apply Groups for the Local, Remote, and Global Configurations . . .	397
	Synchronizing and Committing MC-LAG Configurations	397
	Troubleshooting Remote Peer Connections	397
Chapter 7	Understanding MC-LAG Configuration Consistency Check	401
	Understanding Multichassis Link Aggregation Group Configuration Consistency Check	401
	Understanding Multichassis Link Aggregation Group (MC-LAG) Configuration Consistency Check	401
Chapter 8	Configuring Multichassis Link Aggregation for IPv6 Through NDP	411
	Understanding IPv6 Neighbor Discovery Protocol and MC-LAGs	411
	Neighbor Discovery Messages for MC-LAGs	411
	NDP Functions and Configuration Requirements on MC-LAGs	411

Part 3	Troubleshooting	
Chapter 9	Troubleshooting Multichassis Link Aggregation	415
	Troubleshooting Multichassis Link Aggregation	415
	MAC Addresses Learned on Multichassis Aggregated Ethernet Interfaces	
	Are Not Removed from the MAC Address Table	416
	MC-LAG Peer Does Not Go into Standby Mode	416
	Secondary MC-LAG Peer with Status Control Set to Standby Becomes Inactive	417
	Redirect Filters Take Priority over User-Defined Filters	417
	Operational Command Output Is Wrong	417
	ICCP Connection Might Take Up to 60 Seconds to Become Active	417
	MAC Address Age Learned on a Multichassis Aggregated Ethernet Interface Is Reset to Zero	418
	MAC Address Is Not Learned Remotely in a Default VLAN	418
	Snooping Entries Learned on Multichassis Aggregated Ethernet Interfaces	
	Are Not Removed	418
	ICCP Does Not Come Up After You Add or Delete an Authentication Key	418
	Local Status Is Standby When It Should Be Active	419
	Packets Loop on the Server When ICCP Fails	419
	Both MC-LAG Peers Use the Default System ID After a Reboot or an ICCP Configuration Change	419
	No Commit Checks Are Done for ICL-PL Interfaces	419
	Double Failover Scenario	419
	Multicast Traffic Floods the VLAN When the ICL-PL Interface Goes Down and Up	420
	Layer 3 Traffic Sent to the Standby MC-LAG Peer Is Not Redirected to Active MC-LAG Peer	420
	Aggregated Ethernet Interfaces Go Down	420
	Flooding of Upstream Traffic	420
	ARP and MAC Table Entries Become Out of Sync in an MC-LAG Configuration	421
Chapter 10	Interface Diagnostics	423
	Configuring Interface Diagnostics Tools to Test the Physical Layer	
	Connections	423
	Configuring Loopback Testing	423
	Configuring BERT Testing	425
	Starting and Stopping a BERT Test	428
Part 4	Configuration Statements and Operational Commands	
Chapter 11	Configuration Statements	433
	apply-groups	434
	arp-l2-validate	435
	authentication-key (ICCP)	436
	backup-liveness-detection	437
	backup-peer-ip	437
	chassis-id	438
	detection-time (Liveness Detection)	438

enhanced-convergence	439
groups	440
iccp	442
interface (Multichassis Protection)	443
local-ip-addr (ICCP)	443
mc-ae	444
mc-ae-id	446
minimum-interval (Liveness Detection)	447
minimum-receive-interval (Liveness Detection)	447
mode (QFX Series)	448
multiplier (Liveness Detection)	448
multi-chassis	449
multi-chassis-protection	449
no-adaptation (Liveness Detection)	450
peer (ICCP)	451
peer (Multichassis)	452
peers (Commit)	453
peers-synchronize	454
status-control	454
session-establishment-hold-time	455
threshold (Detection Time)	455
transmit-interval (Liveness Detection)	456
version (Liveness Detection)	456
when	457
Chapter 12	
Operational Commands	459
request interface mc-ae switchover (Multichassis Link Aggregation)	460
request interface (revert switchover) (Aggregated Ethernet Link Protection)	462
request lacp link-switchover	463
show iccp	464
show interfaces mc-ae	466
show l2-learning redundancy-groups	469
show multi-chassis mc-lag configuration-consistency list-of-parameters	473
show multi-chassis mc-lag configuration-consistency	482
show multi-chassis mc-lag configuration-consistency global-config	487
show multi-chassis mc-lag configuration-consistency icl-config	489
show multi-chassis mc-lag configuration-consistency mcae-config	491
show multi-chassis mc-lag configuration-consistency vlan-config	494
show multi-chassis mc-lag configuration-consistency vrrp-config	497

List of Figures

Part 1	Overview	
Chapter 1	Understanding Multichassis Link Aggregation Groups	3
	Figure 1: Basic MC-LAG Topology	4
Part 2	Configuring MC-LAG for Providing Redundancy, Load Balancing, and Multihoming Support	
Chapter 2	Establishing Redundancy and Multihoming Using MC-LAG	27
	Figure 2: Configuring a Multichassis LAG Between Switch A and Switch B	43
Chapter 3	Enabling High Availability in Layer 2 Networks Using Active-Active Bridging for MC-LAG	67
	Figure 3: Comparison of Devices With and Without Logical Systems	68
	Figure 4: Logical Systems with MC-LAG	70
	Figure 5: Single Multichassis Link	74
	Figure 6: Dual Multichassis Link	74
	Figure 7: Interchassis Data Link Between Active-Active Nodes	75
	Figure 8: Active-Active MC-LAG with Single MC-LAG	75
	Figure 9: Active-Active MC-LAG with Multiple Nodes on a Single Multichassis Link	75
	Figure 10: MC-LAG Device and Single-Homed Client	76
	Figure 11: Loop Caused by the ICL Links	78
	Figure 12: Multicast Topology with Source Connected Through Layer 3	80
	Figure 13: Multicast Topology with Source Connected Through MC-Link	81
	Figure 14: N1 and N2 for the Same Service with Same Service ID	91
	Figure 15: Bridge Domain with Logical Interfaces from Two Multichassis Aggregated Ethernet Interfaces	91
	Figure 16: MC-LAG Active-Active Mode on MX Series Routers	102
	Figure 17: MC-LAG Active-Active on MX Series Routers	117
Chapter 4	Enabling High Availability in Layer 3 Networks Using VRRP and MAC Synchronization for MC-LAG	139
	Figure 18: Single Multichassis Link	142
	Figure 19: Dual Multichassis Link	142
	Figure 20: Interchassis Data Link Between Active-Active Nodes	143
	Figure 21: Active-Active MC-LAG with Single MC-LAG	143
	Figure 22: Active-Active MC-LAG with Multiple Nodes on a Single Multichassis Link	144
	Figure 23: MC-LAG Device and Single-Homed Client	145
	Figure 24: Loop Caused by the ICL Links	147
	Figure 25: Multicast Topology with Source Connected Through Layer 3	149

	Figure 26: Multicast Topology with Source Connected Through MC-Link	150
	Figure 27: Typical Network Over Which Active-Active Is Supported	154
	Figure 28: Layer 2 Configuration Without Integrated Routing and Bridging	156
	Figure 29: IGMP Snooping in MC-LAG Active-Active Mode on MX Series Routers	160
	Figure 30: Configuring Two MC-LAGs Between Switch A and Switch B	176
	Figure 31: Configuring an MC-LAG Between Switch A and Switch B	197
	Figure 32: Configuring a Multichassis LAG Between Switch A and Switch B	215
	Figure 33: Configuring a Multichassis LAG Between Switch A and Switch B	238
	Figure 34: Configuring a Multichassis LAG Between Switch A and Switch B	255
	Figure 35: Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP	283
	Figure 36: MC-LAG Active-Active on MX Series Routers	320
	Figure 37: MC-LAG Active-Active on MX Series Routers	340
Chapter 5	Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG	357
	Figure 38: Supported Topology for an MC-LAG on an FCoE Transit Switch	358
	Figure 39: Supported Topology for an MC-LAG on an FCoE Transit Switch	363

List of Tables

	About the Documentation	xiii
	Table 1: Notice Icons	xv
	Table 2: Text and Syntax Conventions	xvi
Part 1	Overview	
Chapter 1	Understanding Multichassis Link Aggregation Groups	3
	Table 3: ICCP Failure Scenarios for EX9200 Switches	7
	Table 4: ICCP Failure Scenarios for QFX Series Switches	7
Part 2	Configuring MC-LAG for Providing Redundancy, Load Balancing, and Multihoming Support	
Chapter 2	Establishing Redundancy and Multihoming Using MC-LAG	27
	Table 5: Components of the Topology for Configuring a Multichassis LAG Between Two Switches	43
Chapter 3	Enabling High Availability in Layer 2 Networks Using Active-Active Bridging for MC-LAG	67
	Table 6: Components of the Topology for Configuring DHCP Relay	95
Chapter 4	Enabling High Availability in Layer 3 Networks Using VRRP and MAC Synchronization for MC-LAG	139
	Table 7: Components of the Topology for Configuring Two MC-LAGs Between Switch A and Switch B	177
	Table 8: Components of the Topology for Configuring an MC-LAG Between Two Switches	197
	Table 9: Components of the Topology for Configuring a Multichassis LAG Between Two Switches	216
	Table 10: Components of the Topology for Configuring a Multichassis LAG Between Two Switches	238
	Table 11: Components of the Topology for Configuring a Multichassis LAG Between Two Switches	255
	Table 12: Components of the Topology for Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP	283
Chapter 5	Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG	357
	Table 13: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology	363
Chapter 7	Understanding MC-LAG Configuration Consistency Check	401
	Table 14: MC-LAG Parameters Checked for Configuration Consistency	403

Part 3	Troubleshooting	
Chapter 10	Interface Diagnostics	423
	Table 15: Loopback Modes by Interface Type	424
	Table 16: BERT Capabilities by Interface Type	427
Part 4	Configuration Statements and Operational Commands	
Chapter 12	Operational Commands	459
	Table 17: show iccp Output Fields	464
	Table 18: show interfaces mc-ae Output Fields	467
	Table 19: show l2-learning redundancy-groups arp-statistics Output Fields . . .	470
	Table 20: show l2-learning redundancy-groups nd-statistics Output Fields . . .	470
	Table 21: show l2-learning redundancy-groups remote-macs Output Fields . . .	471
	Table 22: show multi-chassis mc-lag configuration-consistency list-of-parameters Output Fields	474
	Table 23: show multi-chassis mc-lag configuration-consistency Output Fields	482
	Table 24: show multi-chassis mc-lag configuration-consistency global-config Output Fields	487
	Table 25: show multi-chassis mc-lag configuration-consistency icl-config Output Fields	489
	Table 26: show multi-chassis mc-lag configuration-consistency mcae-config Output Fields	492
	Table 27: show multi-chassis mc-lag configuration-consistency vlan-config Output Fields	494
	Table 28: show multi-chassis mc-lag configuration-consistency vrrp-config Output Fields	497

About the Documentation

- Documentation and Release Notes on page xiii
- Supported Platforms on page xiii
- Using the Examples in This Manual on page xiii
- Documentation Conventions on page xv
- Documentation Feedback on page xvii
- Requesting Technical Support on page xvii

Documentation and Release Notes

To obtain the most current version of all Juniper Networks[®] technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- MX Series
- QFX Series
- EX Series

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

Documentation Conventions

Table 1 on page xv defines notice icons used in this guide.

Table 1: Notice Icons







Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

Table 2 on page xvi defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure
Fixed-width text like this	Represents output that appears on the terminal screen.	user@host> show chassis alarms No alarms currently active
<i>Italic text like this</i>	<ul style="list-style-type: none"> Introduces or emphasizes important new terms. Identifies guide names. Identifies RFC and Internet draft titles. 	<ul style="list-style-type: none"> A policy <i>term</i> is a named structure that defines match conditions and actions. <i>Junos OS CLI User Guide</i> RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level. The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	stub <default-metric metric>;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast (string1 string2 string3)
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	community name members [community-ids]
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop address; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	

GUI Conventions

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> In the Logical Interfaces box, select All Interfaces. To cancel the configuration, click Cancel.
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback rating system—On any page of the Juniper Networks TechLibrary site at <http://www.juniper.net/techpubs/index.html>, simply click the stars to rate the content, and use the pop-up form to provide us with information about your experience. Alternately, you can use the online feedback form at <http://www.juniper.net/techpubs/feedback/>.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>
- Download the latest versions of software and review release notes: <http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications: <http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum: <http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

PART 1

Overview

- [Understanding Multichassis Link Aggregation Groups on page 3](#)

CHAPTER 1

Understanding Multichassis Link Aggregation Groups

- [Multichassis Link Aggregation Features, Terms, and Best Practices on page 3](#)

Multichassis Link Aggregation Features, Terms, and Best Practices

Supported Platforms [EX Series](#), [MX Series](#), [QFX Series](#)

Layer 2 networks are increasing in scale mainly because of technologies such as virtualization. Protocol and control mechanisms that limit the disastrous effects of a topology loop in the network are necessary. The Spanning Tree Protocol (STP) is the primary solution to this problem because it provides a loop-free Layer 2 environment. STP has gone through a number of enhancements and extensions, and even though it scales to very large network environments, it still only provides one active path from one device to another, regardless of how many actual connections might exist in the network. Although STP is a robust and scalable solution to redundancy in a Layer 2 network, the single logical link creates two problems: At least half of the available system bandwidth is off-limits to data traffic, and network topology changes occur. The Rapid Spanning Tree Protocol (RSTP) reduces the overhead of the rediscovery process and allows a Layer 2 network to reconverge faster, but the delay is still high.

Link aggregation (IEEE 802.3ad) solves some of these problems by enabling users to use more than one link connection between switches. All physical connections are considered one logical connection. The problem with standard link aggregation is that the connections are point to point.

Multichassis link aggregation groups (MC-LAGs) enable a client device to form a logical LAG interface between two MC-LAG peers. An MC-LAG provides redundancy and load balancing between the two MC-LAG peers, multihoming support, and a loop-free Layer 2 network without running STP.

On one end of an MC-LAG, there is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device uses the link as a LAG. On the other side of the MC-LAG, there are two MC-LAG peers. Each of the MC-LAG peers has one or more physical links connected to a single client device.


The MC-LAG peers use the Inter-Chassis Control Protocol (ICCP) to exchange control information and coordinate with each other to ensure that data traffic is forwarded properly.

The Link Aggregation Control Protocol (LACP) is a subcomponent of the IEEE 802.3ad standard. LACP is used to discover multiple links from a client device connected to an MC-LAG peer. LACP must be configured on both MC-LAG peers for an MC-LAG to work correctly.



NOTE: You must specify a service identifier (service-id) at the global level; otherwise, multichassis link aggregation will not work.

Figure 1: Basic MC-LAG Topology



The following sections provide information regarding the functional behavior of multichassis link aggregation, configuration guidelines, and best practices.

- [ICCP and ICL on page 5](#)
- [Multichassis Link Protection on page 8](#)
- [MC-AE Statement Options on page 8](#)
- [Multichassis Link Aggregation Group \(MC-LAG\) Configuration Synchronization on page 11](#)
- [Multichassis Link Aggregation Group \(MC-LAG\) Configuration Consistency Check on page 11](#)
- [Enhanced Convergence on page 11](#)
- [IPv6 Neighbor Discovery Protocol on page 12](#)
- [Load Balancing on page 12](#)
- [Layer 2 Unicast Features Supported on page 12](#)
- [VLANs on page 12](#)
- [Layer 2 Multicast Features Supported on page 13](#)
- [IGMP Snooping on an Active-Active MC-LAG on page 13](#)
- [VRRP Active-Standby Support on page 14](#)
- [MAC Address Management on page 15](#)
- [MAC Aging on page 15](#)

- [Address Resolution Protocol Active-Active MC-LAG Support Methodology on page 15](#)
- [DHCP Relay with Option 82 on page 16](#)
- [MC-LAG Packet Forwarding on page 17](#)
- [Layer 3 Unicast Feature Support on page 17](#)
- [Virtual Router Redundancy Protocol \(VRRP\) over IRB and MAC Address Synchronization on page 17](#)
- [Protocol Independent Multicast on page 19](#)
- [Miswiring Detection Guidelines on page 21](#)
- [Reverse Layer 2 Gateway Protocol \(RL2GP\) for Loop Prevention on page 21](#)
- [MC-LAG Upgrade on page 22](#)
- [IGMP Report Synchronization on page 23](#)

ICCP and ICL

The MC-LAG peers use the Inter-Chassis Control Protocol (ICCP) to exchange control information and coordinate with each other to ensure that data traffic is forwarded properly. ICCP replicates control traffic and forwarding states across the MC-LAG peers and communicates the operational state of the MC-LAG members. Because ICCP uses TCP/IP to communicate between the peers, the two peers must be connected to each other. ICCP messages exchange MC-LAG configuration parameters and ensure that both peers use the correct LACP parameters.

The interchassis link (ICL), also known as the interchassis link-protection link (ICL-PL), is used to forward data traffic across the MC-LAG peers. This link provides redundancy when a link failure (for example, an MC-LAG trunk failure) occurs on one of the active links. The ICL can be a single physical Ethernet interface or an aggregated Ethernet interface.

You can configure multiple ICLs between MC-LAG peers. Each ICL can learn up to 512K MAC addresses. You can configure additional ICLs for virtual switch instances.



NOTE: DHCP snooping, dynamic ARP inspection (DAI), and IP source guard are not supported on the ICL or MC-LAG interfaces. Consequently, incoming address resolution protocol replies on the ICL are discarded. However, ARP entries can be populated on the ICL interface through ICCP exchanges from a remote MC-LAG peer.



BEST PRACTICE: We recommend that you use separate ports and choose different Flexible PIC Concentrators (FPCs) for the interchassis link (ICL) and Inter-Chassis Control Protocol (ICCP) interfaces. Although you can use a single link for the ICCP interface, an aggregated Ethernet interface is preferred.

When configuring ICCP and ICL, we recommend that you:

- Use the peer loopback address to establish ICCP peering. Doing so avoids any direct link failure between MC-LAG peers. As long as the logical connection between the peers remains up, ICCP stays up.
- Configure the ICCP liveness-detection interval (the Bidirectional Forwarding Detection (BFD) timer) to be at least 8 seconds if you have configured ICCP connectivity through an IRB interface. A liveness-detection interval of 8 seconds or more allows for graceful Routing Engine switchover (GRES) to work seamlessly. By default, ICCP liveness detection uses multihop BFD, which runs in centralized mode.

This recommendation does not apply if you configured ICCP connectivity through a dedicated physical interface. In this case, you can configure single-hop BFD.

- Configure a session establishment hold time for ICCP. This results in a faster ICCP connection establishment. The recommended value is 50 seconds.
- Configure a hold-down timer on the ICL member links that is greater than the configured BFD timer for the ICCP interface. This prevents the ICL from being advertised as being down before the ICCP link is down. If the ICL goes down before the ICCP link, this causes a flap of the MC-LAG interface on the status-control standby node, which leads to a delay in convergence.
- Starting with Junos OS Release 15.1 on MX Series routers, configure the backup liveness detection feature to implement faster failover of data traffic during an MC-LAG peer reboot. Configure the [backup-liveness-detection](#) statement on the management interface (fxp0) only.

Failure Handling

Configuring ICCP adjacency over an aggregated interface with child links on multiple FPCs mitigates the possibility of a split-brain state. A split-brain occurs when ICCP adjacency is lost between the MC-LAG peers. To work around this problem, enable backup liveness detection. With backup liveness detection enabled, the MC-LAG peers establish an out-of-band channel through the management network in addition to the ICCP channel.

During a split-brain state, both active and standby peers change LACP system IDs. Because both MC-LAG peers change the LACP system ID, the customer edge (CE) device accepts the LACP system ID of the first link that comes up and brings down other links carrying different LACP system IDs. When the ICCP connection is active, both of the MC-LAG peers use the configured LACP system ID. If the LACP system ID is changed during failures, the server that is connected over the MC-LAG removes these links from the aggregated Ethernet bundle.

When the ICL is operationally down and the ICCP connection is active, the LACP state of the links with status control configured as standby is set to the standby state. When the LACP state of the links is changed to standby, the server that is connected over the MC-LAG makes these links inactive and does not use them for sending data.

Table 3 on page 7 describes the different ICCP failure scenarios for EX9200 switches. The dash means that the item is not applicable.

Table 3: ICCP Failure Scenarios for EX9200 Switches

ICCP Connection Status	ICL Status	Backup Liveness Peer Status	Action on Multichassis Aggregated Ethernet Interface with Status Set to Standby	Action on Multichassis Aggregated Ethernet Interface with Status Set to Standby and Prefer Status Control Set to Active
Down	Down or Up	Not configured	LACP system ID is changed to default value.	Not applicable. Liveness detection must be configured.
Down	Down or Up	Active	LACP system ID is changed to default value.	No change in LACP system ID.
Down	Down or Up	Inactive	No change in LACP system ID.	No change in LACP system ID.
Up	Down	–	LACP state is set to standby. MUX state moves to waiting state.	LACP status is set to standby. MUX state moves to waiting status.

Table 4 on page 7 describes the different ICCP failure scenarios for QFX Series switches. The dash means that the item is not applicable.

Table 4: ICCP Failure Scenarios for QFX Series Switches

ICCP Connection Status	ICL Status	Backup Liveness Peer Status	Action on Multichassis Aggregated Ethernet Interface with Status Set to Standby
Down	Down or Up	Not configured	LACP system ID is changed to default value.
Down	Down or Up	Active	LACP system ID is changed to default value.
Down	Down or Up	Inactive	No change in LACP system ID.
Up	Down	–	LACP state is set to standby. MUX state moves to waiting state.

Configure the **master-only** statement on the IP address of the fxp0 interface for backup liveness detection on both the master and backup Routing Engines. This ensures that the connection is not reset during GRES in the remote peer.

For example, on the master Routing Engine:

```
user@switch-rel > show configuration interfaces fxp0 | display inheritance no-comments
unit 0 {
  family inet {
    address 10.8.2.31/8;
    address 10.8.2.33/8 {
      master-only;
    }
  }
}
```

```
}  
}
```

For example, on the backup Routing Engine:

```
user@switch1-re1 > show configuration interfaces fxp0 | display inheritance no-comments  
unit 0 {  
  family inet {  
    address 10.8.2.32/8;  
    address 10.8.2.33/8 {  
      master-only;  
    }  
  }  
}
```

The master Routing Engine services both 10.8.2.31 and 10.8.2.33. Configure 10.8.2.33 in a backup-liveness-detection configuration on the peer node.

For example, on the backup Routing Engine:

```
user@switch2 > show configuration protocols iccp  
local-ip-addr 10.2.2.2;  
peer 10.1.1.1 {  
  session-establishment-hold-time 50;  
  redundancy-group-id-list 1;  
  backup-liveness-detection {  
    backup-peer-ip 10.8.2.33;  
  }  
  liveness-detection {  
    minimum-interval 500;  
    multiplier 3;  
    single-hop;  
  }  
}
```

Multichassis Link Protection

Multichassis link protection provides link protection between the two MC-LAG peers that host an MC-LAG. If the ICCP connection is up and the ICL comes up, the peer configured as standby brings up the multichassis aggregated Ethernet interfaces shared with the peer. Multichassis protection must be configured on each MC-LAG peer that is hosting an MC-LAG.

MC-AE Statement Options

The following options are available:

- MC-AE-ID

Specifies which MC-LAG group the aggregated Ethernet interface belongs to.

- Redundancy groups

Uses ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other.



BEST PRACTICE: We recommend that you configure only one redundancy group between MC-LAG nodes. The redundancy group represents the domain of high availability between the MC-LAG nodes. The redundancy group represents the domain of high availability between the MC-LAG nodes. One redundancy group is sufficient between a pair of MC-LAG nodes. If you are using logical systems, then configure one redundancy group between MC-LAG nodes in each logical system.

- Init Delay Time

Specifies the number of seconds by which to delay bringing the MC-LAG interface back to the up state when the MC-LAG peer is rebooted. By delaying the startup of the interface until after protocol convergence, you can prevent packet loss during the recovery of failed links and devices.

- Chassis ID

Specifies that LACP uses the chassis ID to calculate the port number of the MC-LAG physical member links. Each MC-LAG peer should have a unique chassis ID.

- Mode

Indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

In active-active mode, all member links are active on the MC-LAG. In this mode, media access control (MAC) addresses learned on one MC-LAG peer are propagated to the other MC-LAG peer. Active-active mode is a simple and deterministic design and is easier to troubleshoot than active-standby mode.



NOTE: Active-active mode is not supported on Dense Port Concentrator (DPC) line cards. Instead, use active-standby mode.

In active-active MC-LAG topologies, network interfaces are categorized into three interface types, as follows:

- S-Link—Single-homed link (S-Link) terminating on an MC-LAG peer device
- MC-Link—MC-LAG link
- ICL—Inter-chassis link

Depending on the incoming and outgoing interface types, some constraints are added to the Layer 2 forwarding rules for MC-LAG configurations. The following data traffic forwarding rules apply.



NOTE: If only one MC-LAG member link is in the up state, it is considered an S-Link.

- When an MC-LAG network receives a packet from a local MC-Link or S-Link, the packet is forwarded to other local interfaces, including S-Links and MC-Links based on the normal Layer 2 forwarding rules and on the configuration of the **mesh-group** and **no-local-switching** statements. If MC-Links and S-Links are in the same mesh group and their **no-local-switching** statements are enabled, the received packets are only forwarded upstream and not sent to MC-Links and S-Links.
- The following circumstances determine whether or not an ICL receives a packet from a local MC-Link or S-Link:
 - If the peer MC-LAG network device has S-Links or MC-LAGs that do not reside on the local MC-LAG network device
 - Whether or not interfaces on two peering MC-LAG network devices are allowed to talk to each other
- When an MC-LAG network receives a packet from the ICL, the packet is forwarded to all local S-Links and active MC-LAGs that do not exist in the MC-LAG network from which the packet was sent.

In active-standby mode, only one of the MC-LAG peers is active at any given time. The other MC-LAG peer is in backup (standby) mode. The active MC-LAG peer uses Link Aggregation Control Protocol (LACP) to advertise to client devices that its child link is available for forwarding data traffic. Active-standby mode should be used if you are interested in redundancy only. If you require both redundancy and load sharing across member links, use active-active mode.



NOTE: Active-standby mode is not supported on EX4300 and QFX Series switches.

- Status Control

Specifies whether a node becomes active or goes into standby mode when an ICL failure occurs. If one node is active, the other node must be standby.



BEST PRACTICE: We recommend that you configure **prefer-status-control-active** statement with the **mc-ae status-control active** configuration. Do not configure the **prefer-status-control-active** statement with the **mc-ae status-control standby** configuration.



NOTE: On EX9200 and QFX Series switches, if you configure both nodes as **prefer-status-control-active**, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.



NOTE: On EX9200 switches, the **prefer-status-control-active** statement was added in Junos OS Release 13.2R1.

- Events ICCP-Peer-Down Force-ICL-Down
Forces the ICL to be down if the peer of this node goes down.
- Events ICCP-Peer-Down Prefer-Status-Control-Active
Allows the LACP system ID to be retained during a reboot, which provides better convergence after a failover.

Multichassis Link Aggregation Group (MC-LAG) Configuration Synchronization

MC-LAG configuration synchronization enables you to easily propagate, synchronize, and commit configurations from one MC-LAG peer to another. You can log into any one of the MC-LAG peers to manage both MC-LAG peers, thus having a single point of management. You can also use configuration groups to simplify the configuration process. You can create one configuration group for the local MC-LAG peer, one for the remote MC-LAG peer, and one for the global configuration, which is essentially a configuration that is common to both MC-LAG peers.

In addition, you can create conditional groups to specify when a configuration is synchronized with another MC-LAG peer. You can enable the **peers-synchronize** statement at the **[edit system commit]** hierarchy to synchronize the configurations and commits across the MC-LAG peers by default. NETCONF over SSH provides a secure connection between the MC-LAG peers, and Secure Copy Protocol (SCP) copies the configurations securely between them.

Multichassis Link Aggregation Group (MC-LAG) Configuration Consistency Check

Configuration consistency check uses the Inter-Chassis Control Protocol (ICCP) to exchange MC-LAG configuration parameters (chassis ID, service ID, and so on) and checks for any configuration inconsistencies across MC-LAG peers. An example of an inconsistency is configuring identical chassis IDs on both peers instead of configuring unique chassis IDs on both peers. When there is an inconsistency, you are notified and can take action to resolve it. Only committed MC-LAG parameters are checked for consistency.

Enhanced Convergence

Starting with Junos OS Release 14.2R3 on MX Series routers, enhanced convergence improves Layer 2 and Layer 3 convergence time when a multichassis aggregated Ethernet (MC-AE) link goes down or comes up in a bridge domain or VLAN. Convergence time is improved because the traffic on the MC-AE interface is switched to the interchassis link (ICL) without waiting for a MAC address update.

If you have configured an IRB interface over an MC-AE interface that has enhanced convergences enabled, then you must configure enhanced convergence on the IRB interface as well. Enhanced convergence must be enabled for both Layer 2 and Layer 3 interfaces.

IPv6 Neighbor Discovery Protocol

Neighbor Discovery Protocol (NDP) is an IPv6 protocol that enables nodes on the same link to advertise their existence to their neighbors and to learn about the existence of their neighbors. NDP is built on top of Internet Control Message Protocol version 6 (ICMPv6). It replaces the following IPv4 protocols: Router Discovery (RDISC), Address Resolution Protocol (ARP), and ICMPv4 redirect.

You can use NDP in a multichassis link aggregation group (MC-LAG) active-active configuration on switches.

NDP on MC-LAGs uses the following message types:

- Neighbor solicitation (NS)—Messages used for address resolution and to test reachability of neighbors.

A host can verify that its address is unique by sending a neighbor solicitation message destined to the new address. If the host receives a neighbor advertisement in reply, the address is a duplicate.

- Neighbor advertisement (NA)—Messages used for address resolution and to test reachability of neighbors. Neighbor advertisements are sent in response to neighbor solicitation messages.

Load Balancing

Load balancing of network traffic between MC-LAG peers is 100 percent local bias. Load balancing of network traffic between multiple LAG members in a local MC-LAG node is achieved through a standard LAG hashing algorithm.

Layer 2 Unicast Features Supported

The following Layer 2 unicast features, learning and aging, are supported:

- Learned MAC addresses are propagated across MC-LAG peers for all of the VLANs that are spawned across the peers.
- Aging of MAC addresses occurs when the MAC address is not seen on both of the peers.
- MAC addresses learned on single-homed links are propagated across all of the VLANs that have MC-LAG links as members.



NOTE: MAC learning is disabled on the ICL. Consequently, source MAC addresses cannot be learned locally on the ICL. However, MAC addresses from a remote MC-LAG node can be installed on the ICL interface. For example, the MAC address for a single-homed client on a remote MC-LAG node can be installed on the ICL interface of the local MC-LAG node.

VLANs

Use the following best practice for configuring VLANs:



BEST PRACTICE: We recommend that you limit the scope of VLANs and configure them only where they are necessary. Configure the MC-AE trunk interfaces with only the VLANs that are necessary for the access layer. This limits the broadcast domain and reduces the STP load on aggregation and access switches.

Layer 2 Multicast Features Supported

The following Layer 2 multicast features, unknown unicast and IGMP snooping, are supported:

- Flooding happens on all links across peers if both peers have virtual LAN membership. Only one of the peers forwards traffic on a given MC-LAG link.
- Known and unknown multicast packets are forwarded across the peers by adding the ICL port as a multicast router port.
- IGMP membership learned on MC-LAG links is propagated across peers.

You must configure the **multichassis-lag-replicate-state** statement for Internet Group Management Protocol (IGMP) snooping to work properly in an MC-LAG environment.

- During an MC-LAG peer reboot, known multicast traffic is flooded until the IGMP snooping state is synchronized with the peer.

IGMP Snooping on an Active-Active MC-LAG

Internet Group Management Protocol (IGMP) snooping controls multicast traffic in a switched network. When IGMP snooping is not enabled, the Layer 2 device broadcasts multicast traffic out of all of its ports, even if the hosts on the network do not want the multicast traffic. With IGMP snooping enabled, a Layer 2 device monitors the IGMP join and leave messages sent from each connected host to a multicast router. This enables the Layer 2 device to keep track of the multicast groups and associated member ports. The Layer 2 device uses this information to make intelligent decisions and to forward multicast traffic to only the intended destination hosts. IGMP uses Protocol Independent Multicast (PIM) to route the multicast traffic. PIM uses distribution trees to determine which traffic is forwarded.



NOTE: You must enable Protocol Independent Multicast (PIM) on the IRB interface to avoid multicast duplication.

In an active-active MC-LAG configuration, IGMP snooping replicates the Layer 2 multicast routes so that each MC-LAG peer has the same routes. If a device is connected to an MC-LAG peer by way of a single-homed interface, IGMP snooping replicates the join message to its IGMP snooping peer. If a multicast source is connected to an MC-LAG by way of a Layer 3 device, the Layer 3 device passes this information to the IRB or the routed VLAN interface (RVI) that is configured on the MC-LAG. The first hop designated router is responsible for sending the register and register-stop messages for the multicast group.

The last hop designated router is responsible for sending PIM join and leave messages toward the rendezvous point and source for the multicast group. The routing device with the smallest preference metric forwards traffic on transit LANs.



NOTE: You must configure the ICL interface as a router-facing interface (by configuring the `multicast-router-interface` statement) for multicast forwarding to work in an MC-LAG environment. For the scenario in which traffic arrives by way of a Layer 3 interface, PIM and IGMP must be enabled on the IRB or RVI interface configured on the MC-LAG peers. You must enable PIM on the IRB or RVI interface to avoid multicast duplication.

VRRP Active-Standby Support

The Juniper Networks Junos operating system (Junos OS) supports active-active MC-LAGs by using VRRP in active-standby mode. VRRP in active-standby mode enables Layer 3 routing over the multichassis aggregated Ethernet interfaces on the MC-LAG peers. In this mode, the MC-LAG peers act as virtual routers. The peers share the virtual IP address that corresponds to the default route configured on the host or server connected to the MC-LAG. This virtual IP address (of the IRB or RVI interface) maps to either of the VRRP MAC addresses or to the logical interfaces of the MC-LAG peers. The host or server uses the VRRP MAC address to send any Layer 3 upstream packets. At any time, one of the VRRP devices is the master (active), and the other is a backup (standby). Usually, a VRRP backup node does not forward incoming packets. However, when VRRP over IRB or RVI is configured in an MC-LAG active-active environment, both the VRRP master and the VRRP backup forward Layer 3 traffic arriving on the multichassis aggregated Ethernet interface. If the master fails, all the traffic shifts to the multichassis aggregated Ethernet interface on the backup.



NOTE: You must configure VRRP on both MC-LAG peers for both the active and standby members to accept and route packets. Additionally, you must configure the VRRP backup device to send and receive ARP requests.

Routing protocols run on the primary IP address of the IRB or RVI interface, and both of the MC-LAG peers run routing protocols independently. The routing protocols use the primary IP address of the IRB or RVI interface and the IRB or RVI MAC address to communicate with the MC-LAG peers. The IRB or RVI MAC address of each MC-LAG peer is replicated on the other MC-LAG peer and is installed as a MAC address that has been learned on the ICL.



NOTE: If you are using the VRRP over IRB or RVI method to enable Layer 3 functionality, you must configure static ARP entries for the IRB or RVI interface of the remote MC-LAG peer to allow routing protocols to run over the IRB or RVI interfaces.

MAC Address Management

If an MC-LAG is configured to be active-active, upstream and downstream traffic could go through different MC-LAG peer devices. Because the MAC address is learned only on one of the MC-LAG peers, traffic in the reverse direction could be going through the other MC-LAG peer and flooding the network unnecessarily. Also, a single-homed client's MAC address is learned only on the MC-LAG peer that it is attached to. If a client attached to the peer MC-LAG network device needs to communicate with that single-homed client, then traffic would be flooded on the peer MC-LAG network device. To avoid unnecessary flooding, whenever a MAC address is learned on one of the MC-LAG peers, the address is replicated to the other MC-LAG peer. The following conditions are applied when MAC address replication is performed:



NOTE: Gratuitous ARP requests are not sent when the MAC address on the IRB or RVI interface changes.

- MAC addresses learned on an MC-LAG of one MC-LAG peer must be replicated as learned on the same MC-LAG of the other MC-LAG peer.
- MAC addresses learned on single-homed customer edge (CE) clients of one MC-LAG peer must be replicated as learned on the ICL interface of the other MC-LAG peer.
- MAC address learning on an ICL is disabled from the data path. It depends on software to install MAC addresses replicated through ICCP.

If you have a VLAN without an IRB or RVI configured, MAC address replication will synchronize the MAC addresses.

MAC Aging

MAC aging support in Junos OS extends aggregated Ethernet logic for a specified MC-LAG. A MAC address in software is not deleted until all Packet Forwarding Engines have deleted the MAC address.

Address Resolution Protocol Active-Active MC-LAG Support Methodology

The Address Resolution Protocol (ARP) maps IP addresses to MAC addresses. Junos OS uses ARP response packet snooping to support active-active MC-LAGs, providing easy synchronization without the need to maintain any specific state. Without synchronization, if one MC-LAG peer sends an ARP request, and the other MC-LAG peer receives the response, ARP resolution is not successful. With synchronization, the MC-LAG peers synchronize the ARP resolutions by sniffing the packet at the MC-LAG peer receiving the ARP response and replicating this to the other MC-LAG peer. This ensures that the entries in ARP tables on the MC-LAG peers are consistent.

When one of the MC-LAG peers restarts, the ARP destinations on its MC-LAG peer are synchronized. Because the ARP destinations are already resolved, its MC-LAG peer can forward Layer 3 packets out of the multichassis aggregated Ethernet interface.



NOTE:

- In some cases, ARP messages received by one MC-LAG peer are replicated to the other MC-LAG peer through ICCP. This optimization feature is applicable only for ARP replies, not ARP requests, received by the MC-LAG peers.
 - Dynamic ARP resolution over the ICL interface is not supported. Consequently, incoming ARP replies on the ICL are discarded. However, ARP entries can be populated on the ICL interface through ICCP exchanges from a remote MC-LAG peer.
 - During graceful Routing Engine switchover (GRES), ARP entries that were learned remotely are purged and then learned again.
-

DHCP Relay with Option 82



NOTE: DHCP relay is not supported with MAC address synchronization. If DHCP relay is required, configure VRRP over IRB or RVI for Layer 3 functionality.



BEST PRACTICE: In an MC-LAG active-active environment, we recommend that you use the bootp relay agent by configuring the DHCP relay agent with the **forwarding options helpers bootp** command to avoid stale session information issues that might arise for clients when the router is using the extended DHCP relay agent (jdhcp) process.

If your environment only supports IPv6 or you must use the extended DHCP relay agent (jdhcp) process for other reasons, then as a workaround, you can configure forward-only support by using the **forwarding-options dhcp-relay forward-only** command for IPv4 and the **forwarding-options dhcpv6 forward-only** command for IPv6. You must also verify that your DHCP server in the network supports option 82.

DHCP relay with option 82 provides information about the network location of DHCP clients. The DHCP server uses this information to implement IP addresses or other parameters for the client. With DHCP relay enabled, DHCP request packets might take the path to the DHCP server through either of the MC-LAG peers. Because the MC-LAG peers have different hostnames, chassis MAC addresses, and interface names, you need to observe these requirements when you configure DHCP relay with option 82:

- Use the interface description instead of the interface name.
- Do not use the hostname as part of the circuit ID or remote ID string.
- Do not use the chassis MAC address as part of the remote ID string.
- Do not enable the vendor ID.

- If the ICL interface receives DHCP request packets, the packets are dropped to avoid duplicate packets in the network.

A counter called *Due to received on ICL interface* has been added to the **show helper statistics** command, which tracks the packets that the ICL interface drops.

An example of the CLI output follows:

```
user@switch> show helper statistics
BOOTP:
  Received packets: 6
  Forwarded packets: 0
  Dropped packets: 6
    Due to no interface in DHCP Relay database: 0
    Due to no matching routing instance: 0
    Due to an error during packet read: 0
    Due to an error during packet send: 0
    Due to invalid server address: 0
    Due to no valid local address: 0
    Due to no route to server/client: 0
    Due to received on ICL interface: 6
```

The output shows that six packets received on the ICL interface have been dropped.

MC-LAG Packet Forwarding

To prevent the server from receiving multiple copies from both of the MC-LAG peers, a block mask is used to prevent forwarding of traffic received on the ICL toward the multichassis aggregated Ethernet interface. Preventing forwarding of traffic received on the ICL interface toward the multichassis aggregated Ethernet interface ensures that traffic received on MC-LAG links is not forwarded back to the same link on the other peer. The forwarding block mask for a given MC-LAG link is cleared if all of the local members of the MC-LAG link go down on the peer. To achieve faster convergence, if all local members of the MC-LAG link are down, outbound traffic on the MC-LAG is redirected to the ICL interface on the data plane.

Layer 3 Unicast Feature Support

Layer 3 unicast feature support includes the following:

- Address Resolution Protocol (ARP) synchronization enables ARP resolution on both of the MC-LAG peers.
- DHCP relay with option 82 enables option 82 on the MC-LAG peers. Option 82 provides information about the network location of DHCP clients. The DHCP server uses this information to implement IP addresses or other parameters for the client.

Virtual Router Redundancy Protocol (VRRP) over IRB and MAC Address Synchronization

There are two methods for enabling Layer 3 routing functionality across a multichassis link aggregation group (MC-LAG). You can choose either to configure the Virtual Router Redundancy Protocol (VRRP) over the integrated routing and bridging (IRB) interface or to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG.



NOTE: On EX9200 and QFX Series switches, routing protocols are not supported on the downstream clients.



BEST PRACTICE: On EX9200 and QFX Series switches, we recommend that you use MAC address synchronization for the downstream clients. For the upstream routers, we recommend that you use VRRP over IRB or RVI method.



NOTE: On EX9200 and QFX Series switches, you cannot configure both VRRP over IRB and MAC synchronization, because processing MAC addresses might not work.

VRRP over IRB or RVI requires that you configure different IP addresses on IRB or RVI interfaces, and run VRRP over the IRB or RVI interfaces. The virtual IP address is the gateway IP address for the MC-LAG clients.

If you are using the VRRP over IRB method to enable Layer 3 functionality, you must configure static ARP entries for the IRB interface of the remote MC-LAG peer to allow routing protocols to run over the IRB interfaces. This step is required so you can issue the **ping** command to reach both the physical IP addresses and virtual IP addresses of the MC-LAG peers.

For example, you can issue the **set interfaces irb unit 18 family inet address 10.181.18.3/8 arp 10.181.18.2 mac 00:00:5E:00:2f:f0** command.

When you issue the **show interfaces irb** command after you have configured VRRP over IRB, you will see that the static ARP entries are pointing to the IRB MAC addresses of the remote MC-LAG peer:

```
user@switch> show interfaces irb
Physical interface: irb, Enabled, Physical link is Up
  Interface index: 180, SNMP ifIndex: 532
  Type: Ethernet, Link-level type: Ethernet, MTU: 1514
  Device flags   : Present Running
  Interface flags: SNMP-Traps
  Link type      : Full-Duplex
  Link flags     : None
  Current address: 00:00:5E:00:2f:f0, Hardware address: 00:00:5E:00:2f:f0
  Last flapped   : Never
    Input packets : 0
    Output packets: 0
```



NOTE: Use MAC synchronization if you require more than 1,000 VRRP instances.

MAC address synchronization enables MC-LAG peers to forward Layer 3 packets arriving on multichassis aggregated Ethernet interfaces with either their own IRB or RVI MAC

address or their peer's IRB or RVI MAC address. Each MC-LAG peer installs its own IRB or RVI MAC address as well as the peer's IRB or RVI MAC address in the hardware. Each MC-LAG peer treats the packet as if it were its own packet. If MAC address synchronization is not enabled, the IRB or RVI MAC address is installed on the MC-LAG peer as if it were learned on the ICL.



NOTE: Here are some caveats with configuring MAC address synchronization:

- Use MAC address synchronization if you are not planning to run routing protocols on the IRB interfaces.

MAC address synchronization does not support routing protocols on IRB interfaces, and routing protocols are not supported with downstream MC-LAG clients. If you need routing capability, configure both VRRP and routing protocols on each MC-LAG peer. Routing protocols are supported on upstream routers.

- DHCP relay is not supported with MAC address synchronization.

If you need to configure DHCP relay, configure VRRP over IRB.

- Gratuitous ARP requests are not sent when the MAC address on the IRB interface changes.

MAC address synchronization requires you to configure the same IP address on the IRB interface in the VLAN on both MC-LAG peers. To enable the MAC address synchronization feature using the standard CLI, issue the **set vlan *vlan-name* mcae-mac-synchronize** command on each MC-LAG peer. If you are using the Enhanced Layer 2 CLI, issue the **set bridge-domains *name* mcae-mac-synchronize** command on each MC-LAG peer. Configure the same IP address on both MC-LAG peers. This IP address is used as the default gateway for the MC-LAG servers or hosts.

Protocol Independent Multicast

Protocol Independent Multicast (PIM) and Internet Group Management Protocol (IGMP) provide support for Layer 3 multicast. In addition to the standard mode of PIM operation, there is a special mode called PIM dual designated router. PIM dual designated router minimizes multicast traffic loss in case of failures.

If you are using Layer 3 multicast, configure the IP address on the active MC-LAG peer with a high IP address or a high designated router priority.



NOTE: PIM dual designated router is not supported on QFX10000 switches.

PIM operation is discussed in the following sections:

- [PIM Operation with Normal Mode Designated Router Election on page 20](#)
- [PIM Operation with Dual Designated Router Mode on page 20](#)
- [Failure Handling on page 20](#)

PIM Operation with Normal Mode Designated Router Election

In normal mode with designated router election, the IRB or RVI interfaces on both of the MC-LAG peers are configured with PIM enabled. In this mode, one of the MC-LAG peers becomes the designated router through the PIM designated router election mechanism. The elected designated router maintains the rendezvous-point tree (RPT) and shortest-path tree (SPT) so it can receive data from the source device. The elected designated router participates in periodic PIM join and prune activities toward the rendezvous point or the source.

The trigger for initiating these join and prune activities is the IGMP membership reports that are received from interested receivers. IGMP reports received over multichassis aggregated Ethernet interfaces (potentially hashing on either of the MC-LAG peers) and single-homed links are synchronized to the MC-LAG peer through ICCP.

Both MC-LAG peers receive traffic on their incoming interface (IIF). The non-designated router receives traffic by way of the ICL interface, which acts as a multicast router (mrouter) interface.

If the designated router fails, the non-designated router has to build the entire forwarding tree (RPT and SPT), which can cause multicast traffic loss.

PIM Operation with Dual Designated Router Mode

In dual designated router mode, both of the MC-LAG peers act as designated routers (active and standby) and send periodic join and prune messages upstream toward the rendezvous point, or source, and eventually join the RPT or SPT.

The primary MC-LAG peer forwards the multicast traffic to the receiver devices even if the standby MC-LAG peer has a smaller preference metric.

The standby MC-LAG peer also joins the forwarding tree and receives the multicast data. The standby MC-LAG peer drops the data because it has an empty outgoing interface list (OIL). When the standby MC-LAG peer detects the primary MC-LAG peer failure, it adds the receiver VLAN to the OIL, and starts to forward the multicast traffic.

To enable a multicast dual designated router, issue the **set protocols pim interface interface-name dual-dr** command on the VLAN interfaces of each MC-LAG peer.

Failure Handling

To ensure faster convergence during failures, configure the IP address on the primary MC-LAG peer with a higher IP address or with a higher designated router priority. Doing this ensures that the primary MC-LAG peer retains the designated router membership if PIM peering goes down.

To ensure that traffic converges if an MC-AE interfaces goes down, the ICL-PL interface is always added as an mrouter port. Layer 3 traffic is flooded through the default entry or the snooping entry over the ICL-PL interface, and the traffic is forwarded on the MC-AE interface on the MC-LAG peer. If the ICL-PL interface goes down, PIM neighborhood goes down. In this case, both MC-LAG peers become the designated router. The backup MC-LAG peer brings down its links and the routing peering is lost. If the ICCP connection

goes down, the backup MC-LAG peer changes the LACP system ID and brings down the MC-AE interfaces. The state of PIM neighbors remains operational.

Miswiring Detection Guidelines

You can use STP to detect miswiring loops within the peer or across MC-LAG peers. An example of miswiring is when a port of a network element is accidentally connected to another port of the same network element. Using STP to detect loops on MC-LAG interfaces, however, is not supported.



NOTE: Do not use Multiple Spanning Tree Protocol (MSTP). There could be a loop if MSTP is enabled in an MC-AE topology without enabling MSTP on the MC-AE logical interfaces. Also, there could be a loop if an alternate path exists from access nodes to MC-AE nodes.



BEST PRACTICE:

To detect miswirings, we recommend that you do the following:

- Configure STP globally so that STP can detect local miswiring within and across MC-LAG peers.
- Disable STP on ICL links, however, because STP might block ICL interfaces and disable protection.
- Disable STP on interfaces that are connected to aggregation switches.
- Configure MC-LAG interfaces as edge ports.
- Enable bridge protocol data unit (BPDU) block on edge.
- Do not enable BPDU block on interfaces connected to aggregation switches.

For more information about BPDU block, see *Understanding BPDU Protection for STP, RSTP, and MSTP*.

Reverse Layer 2 Gateway Protocol (RL2GP) for Loop Prevention

With RL2GP, you can configure two edge MC-LAG nodes with the same STP virtual root ID. The virtual root ID must be superior to all bridges in the downstream network, and the downstream bridges must be capable of running STP. STP could block one of the interfaces in the downstream network and break any loop due to miswiring at the core or access layer, or due to a problem in the server software.

RL2GP must be configured on both MC-LAG nodes to prevent loops. Because both MC-LAG nodes would have the same virtual root ID, the MC-LAG interface would always be forwarding traffic. The downstream bridge would receive BPDUs from both nodes and thus receive twice the number of BPDUs on its aggregated Ethernet (AE) interface. If you do not want to receive twice the number of BPDUs, you can double the STP hello time on the virtual ID root. If both of the nodes use the same AE interface name, then the

STP port number would be identical and would reduce the STP load on the downstream bridge.

MC-LAG Upgrade

Upgrade the MC-LAG peers according to the following guidelines.



NOTE: Upgrade both MC-LAG nodes to the same software version in order to achieve no loss during stable and failover conditions. The protocol states, data forwarding, and redundancy are guaranteed only after both nodes are upgraded to the same software version successfully.



NOTE: After a reboot, the multichassis aggregated Ethernet interfaces come up immediately and might start receiving packets from the server. If routing protocols are enabled, and the routing adjacencies have not been formed, packets might be dropped.

To prevent this scenario, issue the `set interfaces interface-name aggregated-ether-options mc-ae init-delay-time time` command to set a time by which the routing adjacencies are formed. The `init-delay-time` should be set to greater than or equal to 240 seconds.

1. Make sure that both of the MC-LAG peers (node1 and node2) are in the active-active state by using the following command on any one of the MC-LAG peers:

```
user@switch> show interfaces mc-ae id 1
Member Link           : ae0
Current State Machine's State: mcae active state
Local Status          : active<<<<<<<
Local State           : up
Peer Status           : active<<<<<<<
Peer State            : up
Logical Interface     : ae0.0
Topology Type         : bridge
Local State           : up
Peer State            : up
Peer Ip/MCP/State     : 10.1.1.2 ae2.0 up
```

2. Upgrade node1 of the MC-LAG.

When node1 is upgraded, it is rebooted, and all traffic is sent across the available LAG interfaces of node2, which is still up. The amount of traffic lost depends on how quickly the neighbor devices detect the link loss and rehash the flows of the LAG.

3. Verify that node1 is running the software you just installed by issuing the `show version` command.
4. Make sure that both nodes of the MC-LAG (node1 and node2) are in the active-active state after the reboot of node1.
5. Upgrade node2 of the MC-LAG.

Repeat Step 1 through Step 3 to upgrade node2.

IGMP Report Synchronization

IGMP reports received over MC-AE interfaces and single-homed links are synchronized to the MC-LAG peers. The MCSNOOPD client application on the MC-LAG peer receives the synchronization packet over ICCP and then sends a copy of the packet to the kernel using the routing socket PKT_INJECT mechanism. When the kernel receives the packet, it sends the packet to the routing protocol process (rpd) enables Layer 3 multicast protocols, like PIM and IGMP, on routed VLAN interfaces (RVIs) configured on MC-LAG VLANs.

Release History Table

Release	Description
15.1	Starting with Junos OS Release 15.1 on MX Series routers, configure the backup liveness detection feature to implement faster failover of data traffic during an MC-LAG peer reboot.
14.2R3	Starting with Junos OS Release 14.2R3 on MX Series routers, enhanced convergence improves Layer 2 and Layer 3 convergence time when a multichassis aggregated Ethernet (MC-AE) link goes down or comes up in a bridge domain or VLAN.

Related Documentation

- [Configuring Multichassis Link Aggregation for EX Series on page 32](#)
- [Configuring Multichassis Link Aggregation for MX Series on page 27](#)
- [Configuring Multichassis Link Aggregation for QFX Series on page 35](#)

PART 2

Configuring MC-LAG for Providing Redundancy, Load Balancing, and Multihoming Support

- Establishing Redundancy and Multihoming Using MC-LAG on page 27
- Enabling High Availability in Layer 2 Networks Using Active-Active Bridging for MC-LAG on page 67
- Enabling High Availability in Layer 3 Networks Using VRRP and MAC Synchronization for MC-LAG on page 139

CHAPTER 2

Establishing Redundancy and Multihoming Using MC-LAG

- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32](#)
- [Configuring Multichassis Link Aggregation on page 35](#)
- [Forcing MC-LAG Links or Interfaces with Limited LACP Capability to Be Up on page 40](#)
- [Example: Configuring Multichassis Link Aggregation on page 41](#)

Configuring Multichassis Link Aggregation on MX Series Routers

Supported Platforms [MX Series](#)

Multichassis link aggregation (MC-LAG) enables an MX Series 3D Universal Edge Router to form a logical LAG interface with two or more other devices. MC-LAG provides additional benefits over traditional LAG in terms of node level redundancy, multihoming support, and a loop-free Layer 2 network without the need to run Spanning Tree Protocol (STP). MC-LAG can be configured for virtual private LAN service (VPLS) routing instances, circuit cross-connect (CCC) applications, and Layer 2 circuit encapsulation types.

The MC-LAG devices use Inter-Chassis Control Protocol (ICCP) to exchange the control information between two MC-LAG network devices.

On one end of the MC-LAG is an MC-LAG client device that has one or more physical links in a link aggregation group (LAG). This client device does not need to be aware of the MC-LAG configuration. On the other side of the MC-LAG are two MC-LAG network devices. Each of these network devices has one or more physical links connected to a single client device. The network devices coordinate with each other to ensure that data traffic is forwarded properly.

MC-LAG includes the following functionality:

- Active/standby mode is supported using Link Aggregation Control Protocol (LACP).
- MC-LAG operates only between two devices.
- Layer 2 circuit functions are supported with **ether-ccc** and **vlan-ccc** encapsulations.
- VPLS functions are supported with **ether-vpls** and **vlan-vpls** encapsulations.



NOTE: Ethernet connectivity fault management (CFM) specified in the IEEE 802.1ag standard for Operation, Administration, and Management (OAM) is *not* supported on MC-LAG interfaces.

To enable MC-LAG, include the **mc-ae** statement at the **[edit interfaces aeX aggregated-ether-options]** hierarchy level along with one of the following statements at the **[edit interfaces aeX]** hierarchy level: **encapsulation-ethernet-bridge**, **encapsulation-ethernet-ccc**, **encapsulation-ethernet-vpls**, or **encapsulation-flexible-ethernet-services**. You also need to configure the **lACP**, **admin-key**, and **system-id** statements at the **[edit interfaces aeX aggregated-ether-options]** hierarchy level:



NOTE: When you configure the **prefer-status-control-active** statement, you must also configure the **status-control active** statement. If you configure the **status-control standby** statement with the **prefer-status-control-active** statement, the system issues a warning.

To delete an MC-LAG interface from the configuration, issue the **delete interfaces aeX aggregated-ether-options mc-ae** command at the **[edit]** hierarchy level in configuration mode:

```
[edit]
user@host# delete interfaces aeX aggregated-ether-options mc-ae
```

Perform the following steps on each switch that is hosting an MC-LAG:

1. Specify the same multichassis aggregated Ethernet identification number for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@host# set aeX aggregated-ether-options mc-ae mc-ae-id mc-ae-id
```

For example:

```
[edit interfaces]
user@host# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

2. Specify a unique chassis ID for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@host# set aeX aggregated-ether-options mc-ae chassis-id chassis-id
```

For example:

```
[edit interfaces]
user@host# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

3. Specify the mode of the MC-LAG that the aggregated Ethernet interface belongs to.



NOTE: Only active/active mode is supported for Reverse Layer 2 Gateway Protocol (R-L2GP) at this time.

```
[edit interfaces]
```

```
user@host# set aeX aggregated-ether-options mc-ae mode mode
```

For example:

```
[edit interfaces]
```

```
user@host# set ae1 aggregated-ether-options mc-ae mode active-active
```

4. Specify whether the aggregated Ethernet interface participating in the MC-LAG is primary or secondary. Primary is **active**, and secondary is **standby**.



NOTE: You must configure status control on both switches hosting the MC-LAG. If one switch is in active mode, the other must be in standby mode.

```
[edit interfaces]
```

```
user@host# set aeX aggregated-ether-options mc-ae status-control (active | standby)
```

For example:

```
[edit interfaces]
```

```
user@host# set aeX aggregated-ether-options mc-ae status-control (active | standby)
```

5. Configure the MC-LAG interface to improve Layer 2 and Layer 3 convergence time when a multichassis aggregated Ethernet link goes down or comes up in a bridge domain.

```
[edit interfaces]
```

```
user@host# set aeX aggregated-ether-options mc-ae enhanced-convergence
```

6. Specify the same LACP system ID on each switch.

```
[edit interfaces]
```

```
user@host# set aeX aggregated-ether-options lacp system-id mac-address
```

For example:

```
[edit interfaces]
```

```
user@host# set ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
```

7. Specify the same LACP administration key on each switch.

```
[edit interfaces]
```

```
user@host# set aeX aggregated-ether-options lacp admin-key number
```

For example:

```
[edit interfaces]
```

```
user@host# set ae1 aggregated-ether-options lacp admin-key 3
```

8. Configure ICCP by doing the following on each switch hosting the MC-LAG:

- a. Configure the local IP address to be used by all switches hosting the MC-LAG.

```
[edit protocols]
```

```
user@host# set iccp local-ip-addr local-ip-address
```

For example:

```
[edit protocols]
```

```
user@host# set iccp local-ip-addr 10.3.3.1
```

- b. (Optional) Configure the IP address of the router and the time during which an ICCP connection must succeed between the routers hosting the MC-LAG.

Configured session establishment hold time results in faster ICCP connection establishment. The recommended value is 50 seconds.

```
[edit protocols]
```

```
user@host# set iccp peer peer-ip-address session-establishment-hold-time seconds
```

For example:

```
[edit protocols]
```

```
user@host# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

- c. (Optional) Configure the IP address to be used for backup liveness detection:



NOTE: By default, backup liveness detection is not enabled. Configure backup liveness detection if you require faster failover of data traffic loss during an MC-LAG peer reboot. Backup liveness detection helps achieve subsecond traffic loss during an MC-LAG peer reboot.

```
[edit protocols]
```

```
user@host# set iccp peer peer-ip-address backup-liveness-detection backup-peer-ip ip-address
```

For example:

```
[edit protocols]
```

```
user@host# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.232
```

- d. Configure the minimum interval at which the router must receive a reply from the other router with which it has established a Bidirectional Forwarding Detection (BFD) session.



NOTE: Configuring the minimum receive interval is required to enable BFD.

```
[edit protocols]
```

```
user@host# set iccp peer peer-ip-address liveness-detection minimum-receive-interval milliseconds
```

For example:

```
[edit protocols]
```

```
user@host# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 60
```

- e. Configure the minimum transmit interval during which a router must receive a reply from a router with which it has established a BFD session.

```
[edit protocols]
```

```
user@host# set iccp peer peer-ip-address liveness-detection transmit-interval minimum-interval milliseconds
```

For example:

```
[edit protocols]
```

```
user@host# set iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 60
```

- f. Specify the switch service ID.

The switch service ID is used to synchronize applications, IGMP, ARP, and MAC learning across MC-LAG members.

```
[edit switch-options]
```

```
user@host# set service-id number
```

For example:


```
[edit switch-options]
user@host# set service-id 1
```

9. Configure a multichassis protection link between the routers.

```
[edit]
user@host# set multi-chassis multi-chassis-protection peer-ip-address interface
interface-name
```

For example:

```
[edit]
user@host# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

10. Enable RSTP globally on all interfaces.

```
[edit]
user@host# set protocols rstp interface all mode point-to-point
```

11. Disable RSTP on the interchassis control link protection link (ICL-PL) interfaces on both routers.

```
[edit]
user@host# set protocols rstp interface interface-name disable
```

For example:

```
[edit]
user@host# set protocols rstp interface ae0.0 disable
```

12. Configure the MC-LAG interfaces as edge ports on both routers.

```
user@host# set protocols rstp interface interface-name edge
```

For example:

```
[edit]
user@host# set protocols rstp interface ae1 edge
```

13. Enable BPDU block on all interfaces except for the ICL-PL interfaces on both routers.

```
[edit]
user@host# set protocols rstp bpdu-block-on-edge
```

For example:

```
[edit]
user@host# set protocols rstp bpdu-block-on-edge
```

Related Documentation

- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
- [Preventing Loops in MC-LAG Topologies on page 83](#)
- [Understanding the Incremented Values of Statistical Counters for Loop-Free MC-LAG Networks on page 84](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Configuring Manual and Automatic Link Switchover for MC-LAG Interfaces on page 99](#)
- `show interfaces mc-ae`
- *Ethernet Interfaces Feature Guide for Routing Devices*

Configuring Multichassis Link Aggregation on EX Series Switches

Supported Platforms **EX Series**

Multichassis link aggregation groups (MC-LAGs) enable a client device to form a logical LAG interface between two MC-LAG peers (for example, EX9200 switches). An MC-LAG provides redundancy and load balancing between the two MC-LAG peers, multihoming support, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP).

On one end of an MC-LAG, there is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device does not need to have an MC-LAG configured. On the other side of MC-LAG, there are two MC-LAG peers. Each of the MC-LAG peers has one or more physical links connected to a single client device.

The MC-LAG peers use Inter-Chassis Control Protocol (ICCP) to exchange control information and coordinate with each other to ensure that data traffic is forwarded properly.



NOTE: An interface with an already configured IP address cannot form part of the aggregated Ethernet interface or multichassis aggregated Ethernet interface group.

Perform the following steps on each switch that hosts an MC-LAG:

1. Specify the same multichassis aggregated Ethernet identification number for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options mc-ae mc-ae-id number
```

For example:

```
[edit interfaces]
user@switch# set ael aggregated-ether-options mc-ae mc-ae-id 3
```

2. Specify a unique chassis ID for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options mc-ae chassis-id number
```

For example:

```
[edit interfaces]
user@switch# set ael aggregated-ether-options mc-ae chassis-id 0
```

3. Specify the mode of the MC-LAG the aggregated Ethernet interface belongs to.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options mc-ae mode mode
```

For example:

```
[edit interfaces]
user@switch# set ael aggregated-ether-options mc-ae mode active-active
```

4. Specify whether the aggregated Ethernet interface participating in the MC-LAG is primary or secondary.

Primary is **active**, and secondary is **standby**.



NOTE: You must configure status control on both switches that host the MC-LAG. If one switch is in active mode, the other must be in standby mode.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options mc-ae status-control (active | standby)
For example:
```

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```



NOTE: If you configure both nodes as **prefer-status-control-active**, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.



NOTE: On EX9200 switches, the **prefer-status-control-active** statement was added in Junos OS Release 13.2R1.

5. Specify the init delay time.

The init delay time specifies the number of seconds by which to delay bringing up the MC-LAG interface back to the up state when the MC-LAG peer is rebooted. By delaying the bring-up of the interface until after the protocol convergence, you can prevent packet loss during the recovery of failed links and devices.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options mc-ae init-delay-time seconds
For example:
```

```
[edit interfaces]
user@switch# set ae0 aggregated-ether-options mc-ae init-delay-time 520
```

6. Specify the same LACP system ID on each switch.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp system-id mac-address
For example:
```

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
```

7. Specify the same LACP administration key on each switch.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options lacp admin-key number
For example:
```

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

8. Configure ICCP by performing the following steps on each switch that hosts the MC-LAG:

- a. Configure the local IP address to be used by the switches that host the MC-LAG.

```
[edit protocols]
user@switch# set iccp local-ip-addr local-ip-address
```

For example:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

- b. (Optional) Configure the IP address of the switch and the time during which an ICCP connection must be established between the switches that host the MC-LAG.



NOTE: Configuring the session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address session-establishment-hold-time seconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

- c. (Optional) Configure the **backup-liveness-detection** statement on the management interface (fxp0) only.

We recommend that you configure the backup liveness detection feature to implement faster failover of data traffic during an MC-LAG peer reboot.



NOTE: On EX9200 switches, the **backup-liveness-detection** statement was added in Junos OS Release 13.2R1.



NOTE: By default, backup liveness detection is not enabled. Configure backup liveness detection if you require minimal traffic loss during a reboot. Backup liveness detection helps achieve sub-second traffic loss during an MC-LAG reboot.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address backup-liveness-detection backup-peer-ip ip-address
```

For example:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.232
```

- d. Configure the minimum interval at which the switch must receive a reply from the other switch with which it has established a Bidirectional Forwarding Detection (BFD) session.



NOTE: Configuring the minimum receive interval is required to enable BFD. We recommend a minimum receive interval value of 1000 seconds.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address liveness-detection minimum-receive-interval
milliseconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
```

- e. Configure the minimum transmit interval during which a switch must receive a reply from a switch with which it has established a BFD session.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address liveness-detection transmit-interval
minimum-interval milliseconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval
1000
```

9. Specify the switch service ID.

The switch service ID is used to synchronize applications, IGMP, ARP, and MAC learning across MC-LAG members.

```
[edit switch-options]
user@switch# set service-id number
```

For example:

```
[edit switch-options]
user@switch# set service-id 1
```

10. Configure a multichassis protection link between the switches.

```
[edit multi-chassis]
user@switch# set multi-chassis-protection peer-ip-address interface interface-name
```

For example:

```
[edit multi-chassis]
user@switch# set multi-chassis-protection 10.3.3.1 interface ae0
```

Related Documentation

- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on EX9200 Switches on page 195](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on EX9200 Switches on page 174](#)

Configuring Multichassis Link Aggregation

Supported Platforms EX4600, QFX Series



NOTE: Multichassis link aggregation (MC-LAG) is supported on QFX3500 and QFX3600 standalone switches running the original CLI, and on QFX5100, QFX5200, EX4600, QFX10002, QFX10008, and QFX10016 switches running Enhanced Layer 2 Software.

Multichassis link aggregation groups (MC-LAGs) enable a client device to form a logical LAG interface between two switches. An MC-LAG provides redundancy and load balancing between the two switches, multihoming support, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP).

The MC-LAG switches use Inter-Chassis Control Protocol (ICCP) to exchange the control information between two MC-LAG switches.



NOTE: The ICCP link should be physically separate (out of band) from the data plane traffic.

On one end of an MC-LAG is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device does not need to detect the MC-LAG. On the other side of MC-LAG are two MC-LAG switches. Each of the switches has one or more physical links connected to a single client device. The switches coordinate with each other to ensure that data traffic is forwarded properly.



NOTE: An interface with an already configured IP address cannot form part of the aggregated Ethernet interface or multichassis aggregated Ethernet interface group.

Perform the following steps on each switch that is hosting an MC-LAG:

1. Specify the same multichassis aggregated Ethernet identification number for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options mc-ae mc-ae-id number
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

2. Specify a unique chassis ID for the MC-LAG that the aggregated Ethernet interface belongs to on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options mc-ae chassis-id number
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

3. Specify the mode of the MC-LAG the aggregated Ethernet interface belongs to.

```
[edit interfaces]
```

```
user@switch# set aeX aggregated-ether-options mc-ae mode mode
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```



NOTE: By default, backup liveness detection is not enabled. Configure backup liveness detection if you require minimal traffic loss during a reboot. Backup liveness detection helps achieve sub-second traffic loss during an MC-LAG reboot.

4. Specify whether the aggregated Ethernet interface participating in the MC-LAG is primary or secondary.

Primary is **active**, and secondary is **standby**.



NOTE: You must configure status control on both switches hosting the MC-LAG. If one switch is in active mode, the other must be in standby mode.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options mc-ae status-control (active | standby)
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```



NOTE: If you configure both nodes as **prefer-status-control-active**, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.

5. Specify the init delay time.

The init delay time specifies the number of seconds by which to delay bringing up the MC-LAG interface back to the up state when the MC-LAG peer is rebooted. By delaying the bring-up of the interface until after the protocol convergence, you can prevent packet loss during the recovery of failed links and devices.

```
[edit interfaces]
user@switch# set aex aggregated-ether-options mc-ae init-delay-time milliseconds
```

For example:

```
[edit interfaces]
user@switch# set ae0 aggregated-ether-options mc-ae init-delay-time 520
```

6. Specify the same LACP system ID on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options lacp system-id mac-address
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
```

7. Specify the same LACP administration key on each switch.

```
[edit interfaces]
user@switch# set aeX aggregated-ether-options lacp admin-key number
```

For example:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

8. Configure ICCP by doing the following on each switch hosting the MC-LAG:



NOTE: The ICCP link should be physically separate (out of band) from the data plane traffic.

- a. Configure the local IP address to be used by all switches hosting the MC-LAG.

```
[edit protocols]
user@switch# set iccp local-ip-addr local-ip-address
```

For example:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

- b. (Optional) Configure the IP address of the switch and the time during which an ICCP connection must succeed between the switches hosting the MC-LAG.



NOTE: Configuring the session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address session-establishment-hold-time seconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

- c. (Optional) Configure the **backup-liveness-detection** statement on the management interface (fxp0) only.



NOTE: By default, backup liveness detection is not enabled. Configure backup liveness detection if you require minimal traffic loss during a reboot. Backup liveness detection helps achieve sub-second traffic loss during an MC-LAG reboot.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address backup-liveness-detection backup-peer-ip ip-address
```

For example:

```
[edit protocols]
```



```
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.232
```

- d. Configure the minimum interval at which the switch must receive a reply from the other switch with which it has established a Bidirectional Forwarding Detection (BFD) session.



NOTE: Configuring the minimum receive interval is required to enable BFD.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address liveness-detection minimum-receive-interval
milliseconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
```

- e. Configure the minimum transmit interval during which a switch must receive a reply from a switch with which it has established a BFD session.

```
[edit protocols]
user@switch# set iccp peer peer-ip-address liveness-detection transmit-interval
minimum-interval milliseconds
```

For example:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval
1000
```

9. Specify the switch service ID.

The switch service ID is used to synchronize applications, IGMP, ARP, and MAC learning across MC-LAG members.

```
[edit switch-options]
user@switch# set service-id number
```

For example:

```
[edit switch-options]
user@switch# set service-id 1
```

10. Configure a multichassis protection link between the switches.

```
[edit]
user@switch# set multi-chassis multi-chassis-protection peer-ip-address interface
interface-name
```

For example:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

11. If you are using ELS, configure the **service-id** on both switches.

The **service-id** must be the same number on both switches.

```
[edit switch-options]
user@switch# set service-id number
```

For example:

```
[edit switch-options]
```

```
user@switch# set service-id 10
```

12. Configure the MC-LAG interfaces as edge ports on both switches.

```
[edit protocols rstp]
```

```
user@switch# set interface interface-name edge
```

For example:

```
[edit protocols rstp]
```

```
user@switch# set interface ae1 edge
```

13. Enable BPDU block on all interfaces except for the ICL-PL interfaces on both switches.

```
[edit protocols rstp]
```

```
user@switch# set bpdu-block-on-edge
```

Related Documentation

- [Example: Configuring Multichassis Link Aggregation on page 41](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization on page 236](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on page 253](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 280](#)

Forcing MC-LAG Links or Interfaces with Limited LACP Capability to Be Up

Supported Platforms [EX Series](#), [MX2010](#), [MX2020](#), [MX240](#), [MX480](#), [MX960](#), [QFX Series](#)

In an MC-LAG topology, a link without Link Access Control Protocol (LACP) configuration remains down and cannot be accessed by the provider edge (PE) devices in the topology.

Starting with Junos OS Release 14.1X53-D10 on the QFX5100 switch, you can configure the force-up feature in Link Aggregation Control Protocol (LACP) on the provider edge device for which you need connectivity. To ensure that the peer with limited LACP capability is up and accessible on the MC-LAG network, configure one of the aggregated Ethernet links or interfaces on a PE device to be up by using the **force-up** statement at the appropriate hierarchy level on your device:

- [edit interfaces *interface-name* aggregated-ether-options lacp]
- [edit interfaces *interface-name* ether-options 802.3ad lacp]

You can configure the *force-up* feature on either the PE device in active mode or in standby mode, or on both. However, in order to prevent duplicate traffic and packet drops, you can configure the force-up feature only on one aggregated Ethernet link of the PE device in an MC-LAG topology. If multiple aggregated Ethernet links are up on the PE device that has the force-up feature configured, then the device selects the link based on the LACP port ID and port priority. The port with the lowest priority is given preference. In case of two ports with the same priority, the one with the lowest port ID is given preference.



NOTE: The force-up option is not supported on QFX10002 switches.



NOTE: If LACP comes up partially in the MC-LAG topology—that is, it comes up on one of the PE devices and does not come up on the other PE devices—the force-up feature is disabled.

Release History Table

Release	Description
14.1X53-D10	Starting with Junos OS Release 14.1X53-D10 on the QFX5100 switch, you can configure the force-up feature in Link Aggregation Control Protocol (LACP) on the provider edge device for which you need connectivity.

Related Documentation

- [Understanding Multichassis Link Aggregation](#)
- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32](#)
- *force-up*
- *force-up*

Example: Configuring Multichassis Link Aggregation

Supported Platforms EX4600, QFX Series



NOTE: Multichassis link aggregation (MC-LAG) is supported on QFX3500 and QFX3600 standalone switches running the original CLI and QFX5100, EX4600, and QFX10002 standalone switches running Enhanced Layer 2 Software. (This example has not been tested on all devices that support MC-LAG. See [Feature Explorer](#) for a full listing of devices that support MC-LAG.

This example shows how multichassis link aggregation groups (MC-LAGs) enable a client device to form a logical LAG interface between two switches to provide redundancy and load balancing between the two switches, multihoming support, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP).

- [Requirements on page 42](#)
- [Overview on page 42](#)
- [Configuration on page 43](#)
- [Verification on page 61](#)
- [Troubleshooting on page 65](#)

Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.2 or later for the QFX3500 and QFX3600 standalone switches, Junos OS Release 13.2X51-D10 or later for the QFX5100 standalone switches, Junos OS Release 13.2X51-D25 or later for EX4600 switches, or Junos OS Release 15.1X53-D10 or later for QFX10002 standalone switches.
- Two QFX3500 or QFX3600 standalone switches, two QFX5100 standalone switches, two EX4600 switches, or two QFX10002 standalone switches.

Before you configure an MC-LAG, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch*.
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch*.


Overview

In this example, you configure an MC-LAG across two switches, consisting of two aggregated Ethernet interfaces, an interchassis control link-protection link (ICL-PL), multichassis protection link for the ICL-PL, the Inter-Chassis Control Protocol for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers. Layer 3 connectivity is required for ICCP.

Topology

The topology used in this example consists of two switches hosting an MC-LAG. The two switches are connected to a server. [Figure 2 on page 43](#) shows the topology used in this example.

Figure 2: Configuring a Multichassis LAG Between Switch A and Switch B

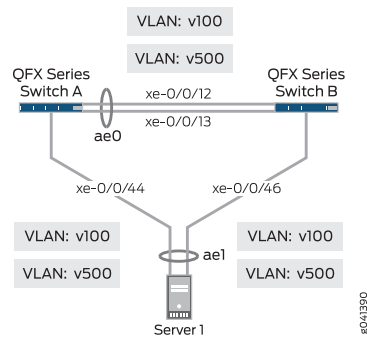

[Table 5 on page 43](#) details the topology used in this configuration example.

Table 5: Components of the Topology for Configuring a Multichassis LAG Between Two Switches

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500 or QFX3600 standalone switch, or QFX5100 standalone switch	ae0 is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following interfaces are part of ae0: xe-0/0/12 and xe-0/0/13 Switch A and xe-0/0/12 and xe-0/0/13 on Switch B.
Switch B	QFX3500 or QFX3600 standalone switch, or QFX5100 standalone switch	
	QFX3500, QFX3600, EX4600, QFX5100, or QFX10002 standalone switch	ae1 is configured as an MC-LAG, and the following two interfaces are part of ae1: xe-0/0/44 on Switch A and xe-0/0/46 on Switch B.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.



NOTE: This example shows how to configure MC-LAG using both the original CLI and Enhanced Layer 2 Software (ELS).

In ELS, there are three statements and one additional statement that are different from the original CLI:

- The port-mode statement in the [edit interfaces *interface-name* unit *number* family ethernet-switching] hierarchy is not supported. Use the interface-mode statement instead.
- The vlan statement in the [edit interfaces *interface-name*] hierarchy is not supported. Use the irb statement instead.
- The vlan.logical-interface-number option in the [edit vlans *vlan-name* l3-interface] hierarchy is not supported. Use the irb.logical-interface-number option instead.
- The service-id statement in the [edit switch-options] hierarchy is required in the ELS CLI.

Switch A—Original CLI

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lACP active
set interfaces ae1 aggregated-ether-options lACP system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lACP admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 1
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 unit 0 family ethernet-switching vlan members v500
set interfaces vlan unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v100 l3-interface vlan.100
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae0 disable
set protocols rstp interface ae1 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpd-block-on-edge
```

```
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

Switch A—ELS

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 1
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 unit 0 family ethernet-switching vlan members v500
set interfaces irb unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v100 l3-interface irb.100
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae1 edge
set protocols rstp interface ae1 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
set switch-options service-id 10
```

Switch B—Original CLI

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 1
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 unit 0 family ethernet-switching vlan members v500
set interfaces vlan unit 500 family inet address 10.3.3.1/8
```

```
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v100 l3-interface vlan.100
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae0 disable
set protocols rstp interface ae1 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

Switch B—ELS

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 1
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 unit 0 family ethernet-switching vlan members v500
set interfaces irb unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v100 l3-interface irb.100
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae1 edge
set protocols rstp interface ae1 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
set switch-options service-id 10
```


Configuring MC-LAG on Two Switches

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To enable multichassis protection link between MC-LAG peers:

1. Configure the number of LAGs on both Switch A and Switch B.

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2
```
2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

Switch A and Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
```

Switch A:

```
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
```

Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1
```

3. Configure a trunk interface between Switch A and Switch B.



NOTE: The `port-mode` statement is not supported on Enhanced Layer 2 Software (ELS). If you are running ELS, use the `interface-mode` statement.

Original CLI:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```

or

ELS:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk
```

4. Configure a multichassis protection link between Switch A and Switch B.

Switch A:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

Switch B:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

**Step-by-Step
Procedure**

To enable ICCP:

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

2. Configure the peer IP address and minimum receive interval for a BFD session for ICCP on Switch A and Switch B.



NOTE: Configure at least 1000 ms as the minimum receive interval.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection minimum-receive-interval
1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval
1000
```

3. Configure the peer IP address and minimum transmit interval for BFD session for ICCP on Switch A and Switch B.



NOTE: Configure at least 1000 ms as the transmit interval minimum interval.

Switch A:

```
[edit protocols]
```

```
user@switch# set iccp peer 10.3.3.1 liveness-detection transmit-interval
minimum-interval 1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval
minimum-interval 1000
```

4. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



NOTE: Configuring the session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

5. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



NOTE: By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during an MC-LAG peer reboot.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip
10.207.64.233
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.234
```

6. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.

```
[edit vlans]
user@switch# set v100 vlan-id 100
[edit vlans]
user@switch# set v500 vlan-id 500
```

Original CLI:

```
[edit vlans]
user@switch# set v100 l3-interface vlan.100
```

Original CLI:

```
[edit vlans]
user@switch# set v500 l3-interface vlan.500
```

ELS:

```
[edit vlans]
user@switch# set v100 l3-interface irb.100
```

ELS:

```
[edit vlans]
user@switch# set v500 l3-interface irb.500
```



NOTE: The `port-mode` statement is not supported on Enhanced Layer 2 Software (ELS). If you are running ELS, use the `interface-mode` statement.

**Step-by-Step
Procedure**

To enable the MC-LAG interface:

1. Enable LACP on the MC-LAG interface on Switch A and Switch B.



NOTE: At least one end needs to be active. The other end can be either active or passive.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp active
```

2. Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

3. Specify the same service ID on Switch A and Switch B.

ELS:

```
[edit]
user@switch# set switch-options service-id 10
```

4. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

Switch B:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1
```

5. Specify the operating mode of the MC-LAG on both Switch A and Switch B.



NOTE: Only active-active mode is supported at this time.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```

6. Specify the status control for MC-LAG on Switch A and Switch B.



NOTE: You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```

Switch B:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```

7. Specify the number of seconds by which the bring-up of the multichassis aggregated Ethernet interface should be deferred after you reboot Switch A and Switch B.



NOTE: The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
```

8. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
```

9. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

10. Enable VLANs on the MC-LAG on Switch A and Switch B.



NOTE: The `port-mode` statement is not supported on Enhanced Layer 2 Software (ELS). If you are running ELS, use the `interface-mode` statement.

Original CLI:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```

Original CLI:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v100
```

Original CLI:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500
```

or

ELS:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk
```

ELS:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v100
```

ELS:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500
```

Step-by-Step Procedure

To enable RSTP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Enable RSTP globally on all interfaces on Switch A and Switch B.



NOTE: The `all` option is not available on ELS, so you cannot issue this command on ELS.

```
[edit]
```

```
user@switch# set protocols rstp interface all mode point-to-point
```

ELS:

```
[edit]
```

```
user@switch# set protocols rstp interface ae1 mode point-to-point
```

2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B:



NOTE: This command is not needed on ELS.

```
[edit]
```

```
user@switch# set protocols rstp interface ae0 disable
```

3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpd-block-on-edge need to be configured. MC LAG switches are usually configured as root bridge. When downstream switches send superior BPDUs to the MC LAG switches, the MC LAG interfaces will be set as blocked by the downstream switches. The default behavior for the original CLI is to drop superior BPDUs.

```
[edit]
```

```
user@switch# set protocols rstp interface ae1 edge
```

4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpd-block-on-edge need to be configured.

```
[edit]
```

```
user@switch# set protocols rstp bpd-block-on-edge
```

Results

From configuration mode, confirm your configuration by entering the **show chassis**, **show interfaces**, **show protocols**, **show multi-chassis**, **show switch-options**, and **show vlans** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Switch A—Original CLI

```
user@SwitchA# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
```

```
    }  
  }  
  
user@SwitchA# show interfaces  
xe-0/0/12 {  
  ether-options {  
    802.3ad ae0;  
  }  
}  
xe-0/0/13 {  
  ether-options {  
    802.3ad ae0;  
  }  
}  
xe-0/0/44 {  
  ether-options {  
    802.3ad ae1;  
  }  
}  
ae0 {  
  unit 0 {  
    family ethernet-switching {  
      port-mode trunk;  
      vlan {  
        members v500;  
      }  
    }  
  }  
}  
ae1 {  
  aggregated-ether-options {  
    lacp {  
      active;  
      system-id 00:01:02:03:04:05;  
      admin-key 3;  
    }  
    mc-ae {  
      mc-ae-id 3;  
      chassis-id 0;  
      mode active-active;  
      status-control active;  
      init-delay-time 240;  
      redundancy-group 1;  
    }  
  }  
  unit 0 {  
    family ethernet-switching {  
      port-mode trunk;  
      vlan {  
        members v100;  
        members v500;  
      }  
    }  
  }  
}  
vlan {
```



```
unit 500 {
  family inet {
    address 10.3.3.2/8;
  }
}

user@SwitchA# show protocols
iccp {
  local-ip-addr 10.3.3.2;
  peer 10.3.3.1 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.233;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}

rstp {
  interface ae0 {
    disable;
  }
  interface ae1 {
    edge;
  }
  interface all {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}

user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
  interface ae0;
}

user@SwitchA# show vlans
v100 {
  vlan-id 100;
  l3-interface vlan.100;
}
v500 {
  vlan-id 500;
  l3-interface vlan.500;
}

user@SwitchA# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}
```

```
user@SwitchA# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 0;
      mode active-active;
      status-control active;
      init-delay-time 240
      redundancy-group 1;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
        members v500;
      }
    }
  }
}
irb {
  unit 500 {
    family inet {
```

```

        address 10.3.3.2/8;
    }
}
}
user@SwitchA# show protocols
iccp {
    local-ip-addr 10.3.3.2;
    peer 10.3.3.1 {
        session-establishment-hold-time 50;
        backup-liveness-detection {
            backup-peer-ip 10.207.64.233;
        }
        liveness-detection {
            minimum-receive-interval 1000;
            transmit-interval {
                minimum-interval 1000;
            }
        }
    }
}
}
rstp {
    interface ae1 {
        edge;
    }
    mode point-to-point;
}
bpdv-block-on-edge;
}

user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
    interface ae0;
}

user@SwitchA# show switch-options
service-id 10;

user@SwitchA# show vlans
v100 {
    vlan-id 100;
    l3-interface irb.100;
}
v500 {
    vlan-id 500;
    l3-interface irb.500;
}

```

Switch B—Original CLI

```

user@SwitchB# show chassis
aggregated-devices {
    ethernet {
        device-count 2;
    }
}

user@SwitchB# show interfaces
xe-0/0/12 {
    ether-options {

```

```
        802.3ad ae0;
    }
}
xe-0/0/13 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/46 {
    ether-options {
        802.3ad ae1;
    }
}
ae0 {
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members v100;
                members v500;
            }
        }
    }
}
ae1 {
    aggregated-ether-options {
        lacp {
            active;
            system-id 00:01:02:03:04:05;
            admin-key 3;
        }
        mc-ae {
            mc-ae-id 3;
            chassis-id 1;
            mode active-active;
            status-control standby;
            init-delay-time 240;
            redundancy-group 1;
        }
    }
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members v100;
                members v500;
            }
        }
    }
}
vlan {
    unit 500 {
        family inet {
            address 10.3.3.1/8;
        }
    }
}
```

```

}

user@SwitchB# show protocols
iccp {
  local-ip-addr 10.3.3.1;
  peer 10.3.3.2 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.234;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}
}

rstp {
  interface ae0 {
    disable;
  }
  interface ae1 {
    edge;
  }
  interface all {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
  interface ae0;
}

user@SwitchB# show vlans
v100 {
  vlan-id 100;
  l3-interface vlan.100;
}
v500 {
  vlan-id 500;
  l3-interface vlan.500;
}

Switch B—ELS user@SwitchB# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@SwitchB# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}

```

```
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/46 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        interface-mode trunk;
        vlan {
          members v100;
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 1;
        mode active-active;
        status-control standby;
        init-delay-time 240;
        redundancy-group 1;
      }
    }
    unit 0 {
      family ethernet-switching {
        interface-mode trunk;
        vlan {
          members v100;
          members v500;
        }
      }
    }
  }
  irb {
    unit 500 {
      family inet {
        address 10.3.3.1/8;
      }
    }
  }
}
```

```

user@SwitchB# show protocols
iccp {
  local-ip-addr 10.3.3.1;
  peer 10.3.3.2 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.234;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}
}
}
rstp {
  interface ae1 {
    edge;
  }
  mode point-to-point;
}
bpdv-block-on-edge;
}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
  interface ae0;
}

user@SwitchB# show switch-options
service-id 10;

user@SwitchB# show vlans
v100 {
  vlan-id 100;
  l3-interface irb.100;
}
v500 {
  vlan-id 500;
  l3-interface irb.500;
}

```

Verification

Verify that the configuration is working properly.

- [Verifying That ICCP Is Working on Switch A on page 62](#)
- [Verifying That ICCP Is Working on Switch B on page 62](#)
- [Verifying That LACP Is Active on Switch A on page 62](#)
- [Verifying That LACP Is Active on Switch B on page 63](#)
- [Verifying That the multichassis aggregated Ethernet and ICL-PL Interfaces Are Up on Switch A on page 63](#)

- [Verifying That the multichassis aggregated Ethernet and ICL-PL Interfaces Are Up on Switch B on page 64](#)
- [Verifying That MAC Learning Is Occurring on Switch A on page 64](#)
- [Verifying That MAC Learning Is Occurring on Switch B on page 64](#)

[Verifying That ICCP Is Working on Switch A](#)

Purpose Verify that ICCP is running on Switch A.

Action [edit]
 user@switch> **show iccp**
 Redundancy Group Information for peer 10.3.3.1
 TCP Connection : Established
 Liveliness Detection : Up

 Client Application: MCSNOOPD

 Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

[Verifying That ICCP Is Working on Switch B](#)

Purpose Verify that ICCP is running on Switch B.

Action **show iccp**

 [edit]
 user@switch> **show iccp**
 Redundancy Group Information for peer 10.3.3.2
 TCP Connection : Established
 Liveliness Detection : Up

 Client Application: MCSNOOPD

 Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

[Verifying That LACP Is Active on Switch A](#)

Purpose Verify that LACP is active on Switch A.

Action [edit]
 user@switch> show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/46	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/46	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol: Receive State Transmit State Mux State
 xe-0/0/46 Current Fast periodic Collecting distributing

Meaning This output shows that Switch A is participating in LACP negotiation.

Verifying That LACP Is Active on Switch B

Purpose Verify that LACP is active on Switch B

Action [edit]
 user@switch> show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/44	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/44	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol: Receive State Transmit State Mux State
 xe-0/0/44 Current Fast periodic Collecting distributing

Meaning This output shows that Switch B is participating in LACP negotiation.

Verifying That the multichassis aggregated Ethernet and ICL-PL Interfaces Are Up on Switch A

Purpose Verify that the multichassis aggregated Ethernet and ICL-PL interfaces are up on Switch A.

Action [edit]
 user@switch> show interfaces mc-ae
 Member Link : ae1
 Current State Machine's State: mcae active state
 Local Status : active
 Local State : up
 Peer Status : active
 Peer State : up
 Logical Interface : ae1.0
 Topology Type : bridge
 Local State : up
 Peer State : up
 Peer Ip/MCP/State : 10.3.3.1 ae0.0 up

Meaning This output shows that the multichassis aggregated Ethernet interface on Switch A is up and active.

Verifying That the multichassis aggregated Ethernet and ICL-PL Interfaces Are Up on Switch B

Purpose Verify that the multichassis aggregated Ethernet and ICL-PL interfaces are up on Switch B.

Action [edit]
user@switch> show interfaces mc-ae
Member Link : ae1
Current State Machine's State: mcae active state
Local Status : active
Local State : up
Peer Status : active
Peer State : up
Logical Interface : ae1.0
Topology Type : bridge
Local State : up
Peer State : up
Peer Ip/MCP/State : 10.3.3.2 ae0.0 up

Meaning This output shows that the multichassis aggregated Ethernet interface on Switch B is up and active.

Verifying That MAC Learning Is Occurring on Switch A

Purpose Verify that MAC learning is working on Switch A.

Action [edit]
user@switch> show ethernet-switching table
Ethernet-switching table: 10 entries, 4 learned, 0 persistent entries
VLAN MAC address Type Age Interfaces
V100 * Flood - All-members
V100 00:10:94:00:00:05 Learn(L) 33 ae0.0 (MCAE)

Meaning The output shows four learned MAC addresses entries.

Verifying That MAC Learning Is Occurring on Switch B

Purpose Verify that MAC learning is working on Switch B.

Action [edit]
user@switch> show ethernet-switching table
Ethernet-switching table: 10 entries, 4 learned, 0 persistent entries
VLAN MAC address Type Age Interfaces
V100 * Flood - All-members
V100 00:10:94:00:00:05 Learn(L) 33 ae0.0 (MCAE)

Meaning The output shows four learned MAC addresses entries.

Troubleshooting

Troubleshooting a LAG That Is Down

Problem The `show interfaces terse` command shows that the MC-LAG is **down**.

Solution Check the following:

1. Verify that there is no configuration mismatch.
2. Verify that all member ports are up.
3. Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
4. Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

Related Documentation

- [Configuring Multichassis Link Aggregation on page 35](#)

CHAPTER 3

Enabling High Availability in Layer 2 Networks Using Active-Active Bridging for MC-LAG

- [Multichassis Link Aggregation on Logical Systems Overview on page 67](#)
- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
- [Preventing Loops in MC-LAG Topologies on page 83](#)
- [Understanding the Incremented Values of Statistical Counters for Loop-Free MC-LAG Networks on page 84](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Configuring IGMP Snooping in MC-LAG Active-Active Mode on page 92](#)
- [Example: Configuring DHCP Relay on MC-LAG with VRRP on an EX9200 Switch on page 93](#)
- [Configuring Manual and Automatic Link Switchover for MC-LAG Interfaces on page 99](#)
- [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)
- [Example: Configuring Multichassis Link Aggregation in an Active-Active Bridging Domain on Logical Systems on MX Series Routers on page 115](#)

Multichassis Link Aggregation on Logical Systems Overview

Supported Platforms [EX Series, MX Series, QFX Series](#)

On MX Series routers, EX9200, and QFX10000 switches, multichassis link aggregation (MC-LAG) enables a device to form a logical LAG interface with two or more other devices. MC-LAG provides additional benefits over traditional LAG in terms of node-level redundancy, multihoming support, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP). The MC-LAG devices use Inter-Chassis Control Protocol (ICCP) to exchange the control information between two MC-LAG network devices. Starting in Junos OS Release 14.1, you can configure MC-LAG interfaces on logical systems within a router. Starting with Junos OS Release 15.1, you can configure MC-LAG interfaces on logical systems on EX9200 switches.




NOTE: On QFX10008 switches, Layer 2 and Layer 3 IRB interfaces are not supported under the `[edit logical-systems].hierarchy`.

To configure ICCP for MC-LAG interfaces on logical systems, include the `iccp` statement at the `[edit logical-systems logical-system-name protocols]` hierarchy level. To view ICCP information for MC-LAG on logical systems, use the `show iccp logical-system logical-system-name` command. To view ARP statistics or remote MAC addresses for the multichassis aggregated Ethernet nodes for all or specified redundancy groups on a logical system, use the `show l2-learning redundancy-groups group-name logical-system logical-system-name (arp-statistics | remote-macs)` command. To view neighbor discovery (ND) statistical details for multichassis aggregated Ethernet nodes on redundancy groups of a logical group, use the `show l2-learning redundancy-groups group-name logical-system logical-system-name nd-statistics` command.

Logical systems enable effective, optimal segregation of a single router or switch into multiple virtual partitions, which can be configured and managed by diversified entities. Logical systems perform a subset of the actions of a physical router or switch and have their own unique routing tables, interfaces, policies, and routing instances. A set of logical systems within a single router or switch can handle the functions previously performed by several small routers or switches. As shown on the right side of [Figure 3 on page 68](#), a set of logical systems within a single router can handle the functions previously performed by several small routers.

Figure 3: Comparison of Devices With and Without Logical Systems

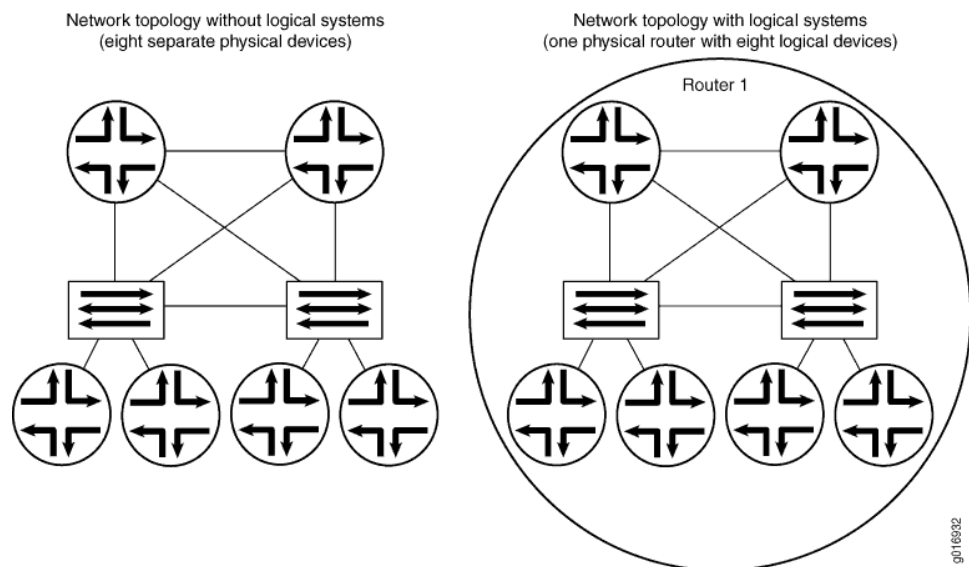

In a network deployment that contains MC-LAG interfaces, you can configure such interfaces on logical systems contained within a router or switch. When you configure multichassis aggregated Ethernet interfaces on a logical system, you must ensure that these interfaces are added with the same multichassis aggregated Ethernet identification number and redundancy group identifier for the MC-LAG on both the peers or devices that are connected by the multichassis aggregated Ethernet interfaces. It is not necessary

to specify the same logical system name on both the peers; however, you must ensure that ICCP to associate the routing or switching devices contained in a redundancy group is defined on both the peers within the logical systems of the devices. Such a configuration ensures that all the packets are transmitted using ICCP within the logical system network. The logical system information is added and removed by the ICCP process to prevent each packet from containing the logical system details. This behavior enables multiple disjoint users to employ MC-LAG capabilities within their networks transparently and seamlessly. A unique ICCP definition for a logical system is created, thereby enabling you to completely manage the ICCP parameters on one logical system without the need for access permissions to view other logical system networks on the same device. Configuration of MC-LAG interfaces on logical systems enables MC-LAG to be used across multiple routing tables and switch forwarding tables in active-active and active-standby modes of MC-LAG interfaces.

Because the Layer 2 address learning process supports logical systems, the ARP, neighbor discovery, and MAC synchronization packets that are traversing a multichassis aggregated Ethernet interface use the logical system:routing instance (LS:RI) combination to map the packets to the correct routing instance in a logical system. Link Aggregation Control Protocol (LACP) does not require the LS-RI combination to be identified because it operates on physical interfaces and is unique within a chassis. For a service, in the set of provider edge (PE) routers providing the service, the service ID distinguishes the routing instances in a logical system because it is unique for a logical system across a routing instance. MC-LAG is configured on the aggregated Ethernet (ae-) bundle interface. An ae- interface is a logical interface and is globally unique, which causes the MC-LAG configuration to be exclusive and separate for a router or switch. You can add ae- interfaces in an MC-LAG configuration to be part of a logical system and use it throughout that particular logical system.

Sample Configuration Scenario for MC-LAG on Logical Systems

Consider a sample scenario in which two MX Series routers, MX1 and MX2, are connected using an aggregated Ethernet interface that is enabled with MC-LAG. The peers in an MC-LAG use an interchassis link-protection link (ICL-PL) to replicate forwarding information across the peers. Additionally, ICCP propagates the operational state of MC-LAG members through the ICL-PL. The two PE devices, MX1 and MX2, each have a LAG connected to the CE devices, CE1 and CE2. Four logical systems are defined on each of the PE devices, MX1 and MX2. CE-1 and CE-2 can be part of the same VLAN with the same VLAN ID and located in the same IP subnet for MC-LAG in two different logical systems. All four logical system entities can work independently in MX1 and MX2.

The ICCP process can manage multiple client-server connections with its peer ICCP instances based on the ICCP configuration for the logical system:routing instance (LS-RI) combinations. Each ICCP connection is associated with an LS-RI combination. For example, with two routing instances, IP1 and IP2, on each of the logical systems, LS1 and LS2, the following mapping is performed for ICCP settings:


[ICCP] (LS1) (IP1) < = > (IP2) (LS1) [ICCP] within LS1 network.

[ICCP] (LS2) (IP1) < = > (IP2) (LS2) [ICCP] within LS2 network.

An ICCP instance in a logical system is linked with the ICCP instance of the peer logical system. The ICCP application transmits the relevant routing index depending on the LS:RI combination to the BFD process, when BFD is configured in your topology.

Figure 4 on page 70 shows the interconnection among logical systems on MX Series routers configured with MC-LAG.

Figure 4: Logical Systems with MC-LAG

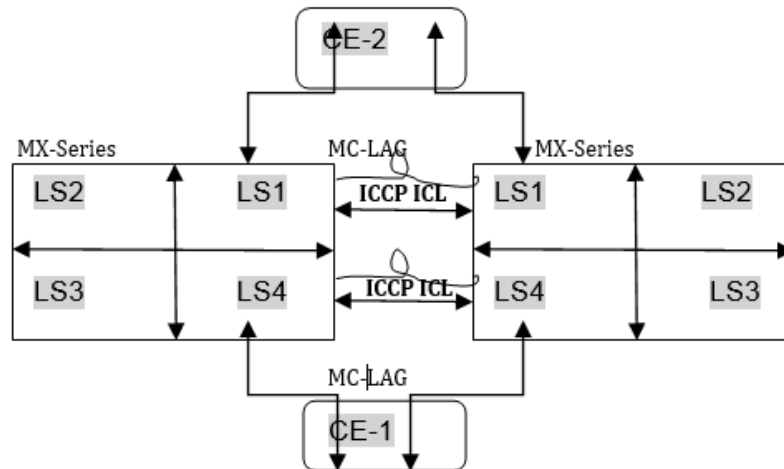

The Layer 2 address learning process (l2ald) transmits and receives Address Learning Protocol (ARP), neighbor discovery, and MAC synchronization packets with the LS-RI information. When the peer MAC synchronization packets are received, l2ald decodes the logical system details from the packet and determines whether an identical logical system has been previously created on the router. If a match is found for the logical system, the MAC forwarding entry for the corresponding bridge table for an interface bridge domain is created. If the logical system in the received packet does not match the defined logical system on the device, for the MAC synchronization packet, the default logical instance is used for processing. Similarly, upon receipt of the ARP and neighbor discovery packets, l2ald decapsulates the logical system information from the packets and determines if the corresponding logical instance has been previously created. If a match is found for the logical system, the ARP and neighbor discovery packets are processed according to the Layer 3 index that is unique in the system. The programming kernel entry might not require any logical system information since it is programmed on a Layer 3 index which is unique in the system. If the logical system in the received packet does not match the defined logical system on the device, for the ARP and neighbor discovery packets, the default logical instance is used for processing. The routing instance is determined using the service ID attribute. The logical system information is forwarded to ICCP, which in turn identifies the appropriate ICCP interface for the logical system and sends packets over it.

Guidelines for Configuring MC-LAG on Logical Systems

Keep the following points in mind while configuring MC-LAG interfaces on logical systems:

- You cannot use a single chassis to function as a provider edge (PE) device and a customer edge (CE) device in different logical systems.
- You cannot use a single chassis to function as two PE devices by configuring logical systems on the chassis and ICCP. ICL links between the two logical systems because the multichassis aggregated Ethernet ID is unique in a router or switch.
- IGMP snooping in MC-LAG topologies with logical systems is not supported.
- VPLS and VPN protocols with MC-LAG in active-standby mode is not supported.
- Logical system information is not communicated to the peer chassis because this detail is derived from an ICCP instance.

Release History Table

Release	Description
15.1	Starting with Junos OS Release 15.1, you can configure MC-LAG interfaces on logical systems on EX9200 switches.
14.1	Starting in Junos OS Release 14.1, you can configure MC-LAG interfaces on logical systems within a router.

Related Documentation

- [Example: Configuring Multichassis Link Aggregation in an Active-Active Bridging Domain on Logical Systems on MX Series Routers on page 115](#)

Active-Active Bridging and VRRP over IRB Functionality Overview

Supported Platforms [MX Series, QFX Series](#)

Active-active bridging and Virtual Router Redundancy Protocol (VRRP) over integrated routing and bridging (IRB) is supported. This is a common scenario used in data centers. This section provides an overview of the supported functionality.



NOTE: If you are using the VRRP over IRB or RVI method to enable Layer 3 functionality, you must configure static ARP entries for the IRB or RVI interface of the remote MC-LAG peer to allow routing protocols to run over the IRB or RVI interfaces. .

Active-active bridging and VRRP over IRB support extend multichassis link aggregation group (MC-LAG) by adding the following functionality:

- Interchassis link (ICL) pseudowire interface or Ethernet interface (ICL-PL field) for active-active bridging
- Active-active bridging
- VRRP over IRB for active-active bridging
- A single bridge domain not corresponding to two redundancy group IDs

The following functionalities are supported for MC-LAG in an active-active bridging domain:

- MC-LAG is supported only between two chassis, using an interchassis link (ICL) pseudowire interface or Ethernet interface (ICL-PL field) for **active-active bridging**, and **active-active bridging VRRP** over IRB for **active-active bridging**.
- For VPLS networks, you can configure the aggregated Ethernet (aeX) interfaces on MC-LAG devices with the **encapsulation ethernet-vpls** statement to use Ethernet VPLS encapsulation on Ethernet interfaces that have VPLS enabled and that must accept packets carrying standard Tag Protocol ID (TPID) values or the **encapsulation vlan-vpls** statement to use Ethernet VLAN encapsulation on VPLS circuits.
- Layer 2 circuit functionalities are supported with **ethernet-ccc** as the encapsulation mode.
- Network topologies in a triangular and square pattern are supported. In a triangular network design, with equal-cost paths to all redundant nodes, slower, timer-based convergence can possibly be prevented. Instead of indirect neighbor or route loss detection using hellos and dead timers, you can identify the physical link loss and denote a path as unusable and reroute all traffic to the alternate equal-cost path. In a square network design, depending on the location of the failure, the routing protocol might converge to identify a new path to the subnet or the VLAN, causing the convergence of the network to be slower.
- Interoperation of Link Aggregation Control Protocol (LACP) for MC-LAG devices is supported. LACP is one method of bundling several physical interfaces to form one logical interface. When LACP is enabled, the local and remote sides of the aggregated Ethernet links exchange protocol data units (PDUs), which contain information about the state of the link. You can configure Ethernet links to actively transmit PDUs, or you can configure the links to passively transmit them, sending out LACP PDUs only when the links receive the PDUs from another link. One side of the link must be configured as active for the link to be up.
- Active-standby mode is supported using LACP. When an MC-LAG operates in the active-standby mode, one of the router's ports only becomes active when failure is detected in the active links. In this mode, the provider edge (PE) routers perform an election to determine the active and standby routers.
- Configuration of the pseudowire status type length variable (TLV) is supported. The pseudowire status TLV is used to communicate the status of a pseudowire back and forth between two PE routers. The pseudowire status negotiation process ensures that a PE router reverts back to the label withdraw method for pseudowire status if its remote PE router neighbor does not support the pseudowire status TLV.
- The MC-LAG devices use Inter-Chassis Control Protocol (ICCP) to exchange the control information between two MC-LAG network devices.

Keep the following points in mind when you configure MC-LAG in an active-active bridging domain:

- A single bridge domain cannot be associated with two redundancy groups. You cannot configure a bridge domain to contain logical interfaces from two different multichassis

aggregated Ethernet interfaces and associate them with different redundancy group IDs by using the **redundancy group group-id** statement at the **[edit interfaces aeX aggregated-ether-options]** hierarchy level.

- You must configure logical interfaces in a bridge domain from a single multichassis aggregated Ethernet interface and associate it with a redundancy group. You must configure a service ID by including the **service-id vid** statement at the **[edit bridge-domains bd-name]** hierarchy level for multichassis aggregated Ethernet interfaces if you configure logical interfaces on multichassis aggregated Ethernet interfaces that are part of the bridge domain.

For a multichassis link aggregation group (MC-LAG) configured in an active-active bridge domain and with VRRP configured over an IRB interface, you must include the **accept-data** statement at the **[edit interfaces interface-name unit logical-unit-number family inet address address vrrp-group group-id]** hierarchy level to enable the router that functions as the master router to accept all packets destined for the virtual IP address.

On an MC-LAG, if you modify the source MAC address to be the virtual MAC address, you must specify the virtual IP address as the source IP address instead of the physical IP address. In such a case, the **accept-data** option is required for VRRP to prevent ARP from performing an incorrect mapping between IP and MAC addresses for customer edge (CE) devices. The **accept-data** attribute is needed for VRRP over IRB interfaces in MC-LAG to enable OSPF or other Layer 3 protocols and applications to work properly over multichassis aggregated Ethernet (mc-aeX) interfaces.



NOTE: On an MC-LAG, the unit number associated with aggregated Ethernet interfaces on provider edge router PE1 must match the unit number associated with aggregated Ethernet interfaces on provider edge router PE2. If the unit numbers differ, MAC address synchronization does not happen. As a result, the status of the MAC address on the remote provider edge router remains in a pending state.

In an IPv6 network, you cannot configure an MC-LAG in an active-active bridge domain if you specified the **vlan-id none** statement at the **[edit bridge-domain bd-name]** hierarchy level. The **vlan-id none** statement that enables the removal of the incoming VLAN tags identifying a Layer 2 logical interface when packets are sent over VPLS pseudowires is not supported for IPv6 packets in an MC-LAG.

The topologies shown in [Figure 5 on page 74](#) and [Figure 6 on page 74](#) are supported. These figures use the following abbreviations:

- Aggregated Ethernet (AE)
- Interchassis link (ICL)
- Multichassis link (MCL)

Figure 5: Single Multichassis Link


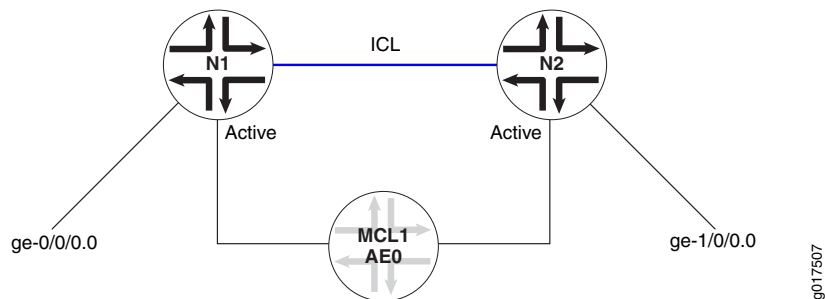


Figure 6: Dual Multichassis Link

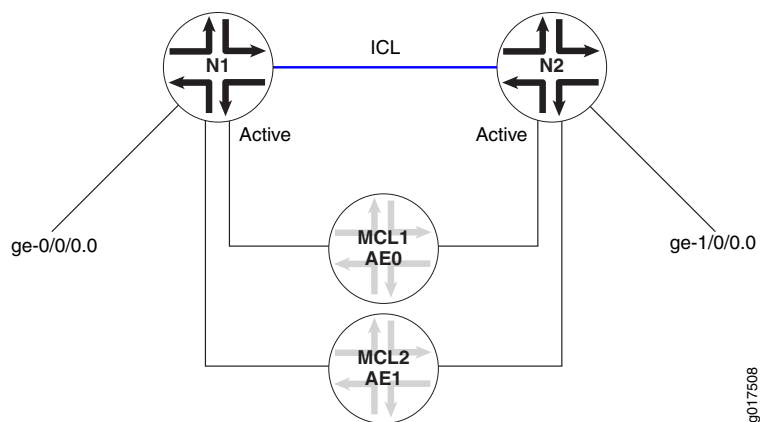

The following functionality is *not* supported:

- Virtual private LAN service (VPLS) within the core
- Bridged core
- Topology as described in Rule 4 of [“Data Traffic Forwarding Rules” on page 77](#)
- Routed multichassis aggregated Ethernet interface, where the VRRP backup router is used in the edge of the network
- Track object, where in the case of an MC-LAG, the status of the uplinks from the provider edge can be monitored, and the MC-LAG can act on the status
- Mixed mode (active-active MC-LAG is supported on MX Series routers with MPC or MIC interfaces only)

All interfaces in the bridge domain that are multichassis aggregated Ethernet active-active must be on MPCs or MICs.

The topologies shown in [Figure 7 on page 75](#), [Figure 8 on page 75](#), and [Figure 9 on page 75](#) are *not* supported:

Figure 7: Interchassis Data Link Between Active-Active Nodes

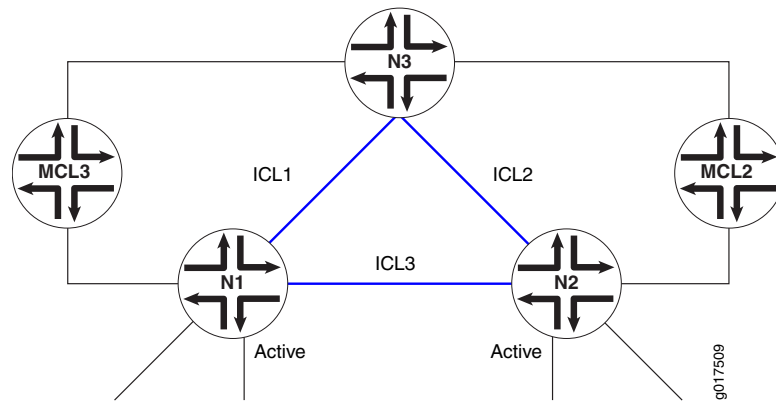


Figure 8: Active-Active MC-LAG with Single MC-LAG


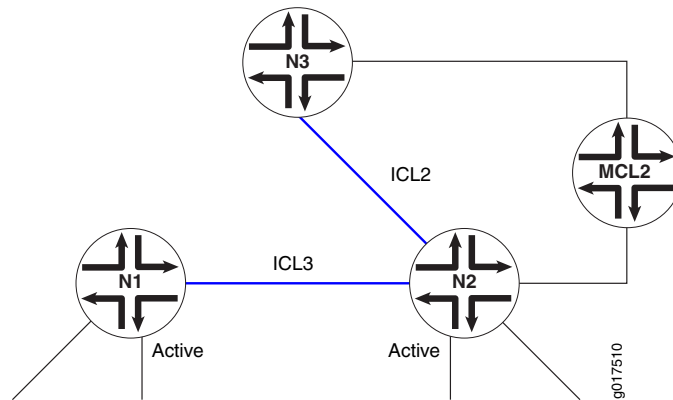


Figure 9: Active-Active MC-LAG with Multiple Nodes on a Single Multichassis Link

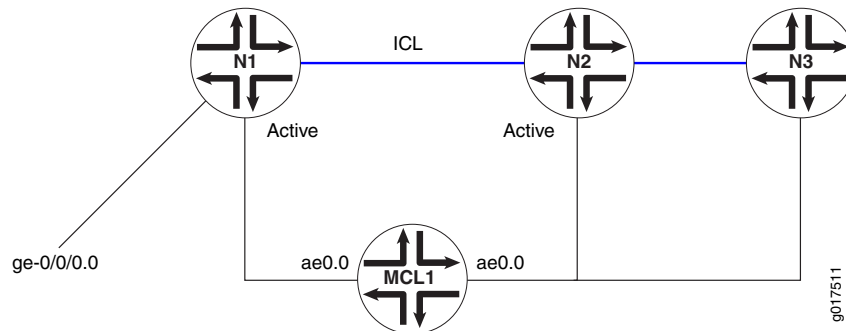

NOTE: A redundancy group cannot span more than two routers.


When configured to be active-active, the client device load-balances the traffic to the peering MC-LAG network devices. In a bridging environment, this could potentially cause the following problems:

- Traffic received on the MC-LAG from one MC-LAG network device could be looped back to the same MC-LAG on the other MC-LAG network device.
- Duplicated packets could be received by the MC-LAG client device.
- Traffic could be unnecessarily forwarded on the interchassis link.

To better illustrate the problems listed, consider [Figure 10 on page 76](#), where an MC-LAG device MCL1 and single-homed clients ge-0/0/0.0 and ge-1/0/0.0 are allowed to talk to each other through an ICL.

- Traffic received on network routing instance N1 from MCL1 could be flooded to ICL to reach network routing instance N2. Once it reaches network routing instance N2, it could flood again to MCL1.
- Traffic received on interface ge-0/0/0.0 could be flooded to MCL1 and ICL on network routing instance N1. Once network routing instance N2 receives such traffic from ICL, it could again be flooded to MCL1.
- If interface ge-1/0/0.0 does not exist on network routing instance N2, traffic received from interface ge-0/0/0.0 or MCL1 on network routing instance N1 could be flooded to network routing instance N2 through ICL unnecessarily since interface ge-0/0/0.0 and MCL1 could reach each other through network routing instance N1.

Figure 10: MC-LAG Device and Single-Homed Client

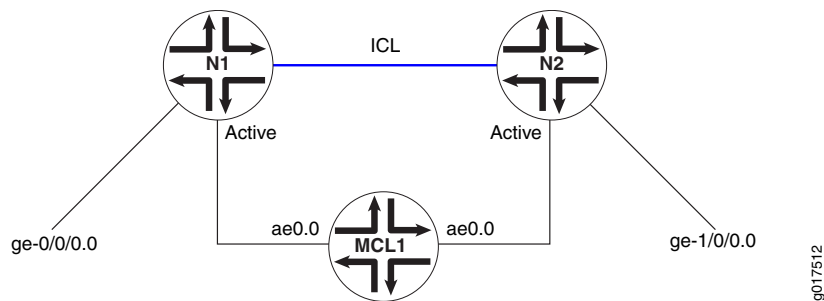

Advantages of Using Multichassis Link Aggregation Groups

An MC-LAG reduces operational expenses by providing active-active links with a LAG, eliminates the need for Spanning Tree Protocol (STP), and provides faster Layer 2 convergence upon link and device failures.

An MC-LAG adds node-level redundancy to the normal link-level redundancy that a LAG provides. An MC-LAG improves network resiliency, which reduces network down time as well as expenses.

In data centers, it is desirable for servers to have redundant connections to the network. You probably want active-active connections along with links from any server to at least two separate routers.

An MC-LAG allows you to bond two or more physical links into a logical link between two routers or between a server and a router, which improves network efficiency. An MC-LAG enables you to load-balance traffic on multiple physical links. If a link fails, the traffic can be forwarded through the other available link, and the logical aggregated link remains in the UP state.

Data Traffic Forwarding Rules

In active-active bridging and VRRP over IRB topographies, network interfaces are categorized into three different interface types, as follows:

S-Links—Single-homed link (S-Link) terminating on MC-LAG-N device or MC-LAG in active-standby mode. In [Figure 10 on page 76](#), interfaces ge-0/0/0.0 and ge-1/0/0.0 are S-Links.

MC-Links—MC-LAG links. In [Figure 10 on page 76](#), interface ae0.0 is the MC-Link.

ICL—Interchassis link.

Based on incoming and outgoing interface types, some constraints are added to the Layer 2 forwarding rules for MC-LAG configurations, as described in the data traffic forwarding rules. Note that if only one of the MC-LAG member link is in the UP state, it is considered an S-Link.

The following data traffic forwarding rules apply:

1. When an MC-LAG network receives a packet from a local MC-Link or S-Link, the packet is forwarded to other local interfaces, including S-Links and MC-Links based on the normal Layer 2 forwarding rules and on the configuration of the **mesh-group** and **no-local-switching** statements. If MC-Links and S-Links are in the same mesh group and their **no-local-switching** statements are enabled, the received packets are only forwarded upstream and not sent to MC-Links and S-Links.



NOTE: The functionality described in Rule 2 is *not* supported.

2. The following circumstances determine whether or not an ICL receives a packet from a local MC-Link or S-Link:
 - a. If the peer MC-LAG network device has S-Links or MC-LAGs that do not reside on the local MC-LAG network device
 - b. Whether or not interfaces on two peering MC-LAG network devices are allowed to talk to each other only if both a. and b. are true. Traffic is always forwarded to the ICL.
3. When an MC-LAG network receives a packet from the ICL, the packet is forwarded to all local S-Links and active MC-LAGs that do not exist in the MC-LAG network that the packet comes from.

4.



NOTE: The topology shown in [Figure 11 on page 78](#) is *not* supported.


In certain cases, for example the topology shown in [Figure 11 on page 78](#), there could be a loop caused by the ICL. To break the loop, one of the following mechanisms could be used:

- a. Run certain protocols, such as STP. In this case, whether packets received on one ICL are forwarded to other ICLs is determined by using Rule 3.
- b. Configure the ICL to be fully meshed among the MC-LAG network devices. In this case, traffic received on the ICL would not be forwarded to any other ICLs.

In either case, duplicate packets could be forwarded to the MC-LAG clients. Consider the topology shown in [Figure 11 on page 78](#), where if network routing instance N1 receives a packet from ge-0/0/0.0, it could be flooded to ICL1 and ICL3.

When receiving from ICL1 and ICL3, network routing instances N3 and N2 could flood the same packet to MCL2, as shown in [Figure 11 on page 78](#). To prevent this from happening, the ICL designated forwarder should be elected between MC-LAG peers, and traffic received on an ICL could be forwarded to the active-active MC-LAG client by the designated forwarder only.

Figure 11: Loop Caused by the ICL Links

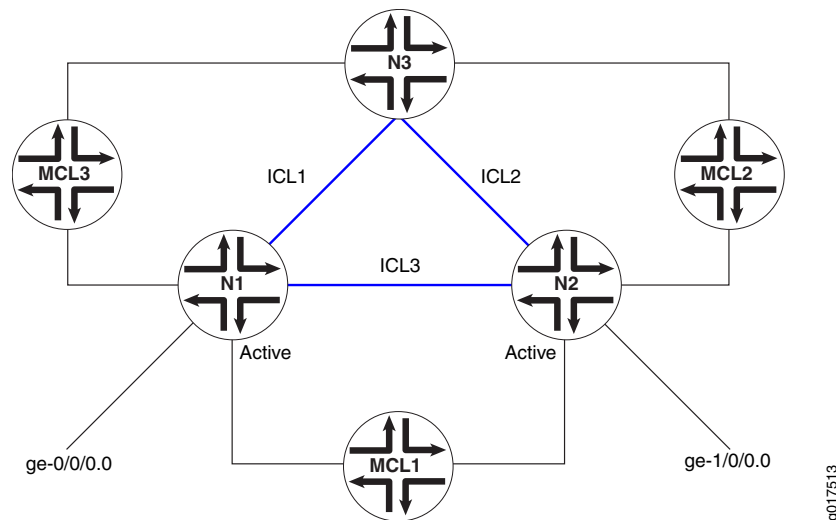

5. When received from an ICL, traffic should not be forwarded to the core-facing client link connection between two provider edge (PE) devices (MC-Link) if the peer chassis's (where the traffic is coming from) MC-Link is UP.

MAC Address Management

If an MC-LAG is configured to be active-active, upstream and downstream traffic could go through different MC-LAG network devices. Since the media access control (MAC) address is learned only on one of the MC-LAG network devices, the reverse direction's traffic could be going through the other MC-LAG network and be flooded unnecessarily. Also, a single-homed client's MAC address is only learned on the MC-LAG network device it is attached to. If a client attached to the peer MC-LAG network needs to communicate with that single-homed client, then traffic would be flooded on the peer MC-LAG network device. To avoid unnecessary flooding, whenever a MAC address is learned on one of the MC-LAG network devices, it gets replicated to the peer MC-LAG network device. The following conditions should be applied when MAC address replication is performed:

- MAC addresses learned on an MC-LAG of one MC-LAG network device should be replicated as learned on the same MC-LAG of the peer MC-LAG network device.
- MAC addresses learned on single-homed customer edge (CE) clients of one MC-LAG network device should be replicated as learned on the ICL-PL interface of the peer MC-LAG network device.
- MAC addresses learned on MC-LAG VE clients of one MC-LAG network device should be replicated as learned on the corresponding VE interface of the peer MC-LAG network device.
- MAC address learning on an ICL is disabled from the data path. It depends on software to install MAC addresses replicated through Inter-Chassis Control Protocol (ICCP).

MAC Aging

MAC aging support in Junos OS extends aggregated Ethernet logic for a specified MC-LAG. A MAC address in software is deleted until all Packet Forwarding Engines have deleted the MAC address. In the case of an MC-LAG, a remote provider edge is treated as a remote Packet Forwarding Engine and has a bit in the MAC data structure.

Layer 3 Routing

In general, when an MC-LAG is configured to provide Layer 3 routing functions to downstream clients, the MC-LAG network peers should be configured to provide the same gateway address to the downstream clients. To the upstream routers, the MC-LAG network peers could be viewed as either equal-cost multipath (ECMP) or two routes with different preference values.

Junos OS supports active-active MC-LAGs by using VRRP over IRB. Junos OS also supports active-active MC-LAGs by using IRB MAC address synchronization. You must configure IRB using the same IP address across MC-LAG peers. IRB MAC synchronization is supported on 32-bit interfaces and interoperates with earlier MPC and MIC releases.

To ensure that Layer 3 operates properly, instead of dropping the Layer 3 packet, the VRRP backup attempts to perform routing functions if the packet is received on an MC-LAG. A VRRP backup sends and responds to Address Resolution Protocol (ARP) requests.

For ARP, the same issue exists as with Layer 2 MAC addresses. Once ARP is learned, it must be replicated to the MC-LAG through ICCP. The peer must install an ARP route based on the ARP information received through ICCP.

For ARP aging, ARP requests on the MC-LAG peers can be aged out independently.

Address Resolution Protocol Active-Active MC-LAG Support Methodology

Suppose one of the PE routers issues an ARP request and another PE router gets the response and, because of the aggregated Ethernet distribution logic, the ARP resolution is not successful. Junos OS uses ARP response packet snooping to perform active-active multichassis link aggregation group support, providing easy synchronization without the need to maintain any specific state.


IGMP Snooping on Active-Active MC-LAG

For multicast to work in an active-active MC-LAG scenario, the typical topology is as shown in [Figure 12 on page 80](#) and [Figure 13 on page 81](#) with interested receivers over S-links and MC-Links. Starting in Junos OS Release 11.2, support is extended for sources connected over the Layer 2 interface.

If an MC-LAG is configured to be active-active, reports from MC-LAG clients could reach any of the MC-LAG network device peers. Therefore, the IGMP snooping module needs to replicate the states such that the Layer 2 multicast route state on both peers are the same. Additionally for S-Link clients, snooping needs to replicate these joins to its snooping peer, which in the case of Layer 3 connected source, passes this information to the PIM on IRB to enable the designated router to pull traffic for these groups,

The ICL should be configured as a router facing interface. For the scenario where traffic arrives through a Layer 3 interface, it is a requirement to have PIM and IGMP enabled on the IRB interface configured on the MC-LAG network device peers.

Figure 12: Multicast Topology with Source Connected Through Layer 3

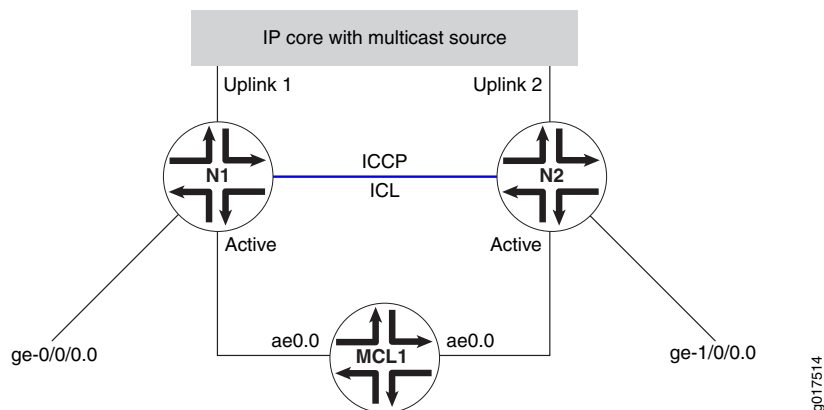


With reference to [Figure 12 on page 80](#), either Device N1 or N2 becomes a designated router (for this example, N1 is the designated router). Router N1 therefore pulls the multicast traffic from the core. Once multicast data hits the network Device N1, the data is forwarded based on the snooping learned route.

For MC-Link clients, data is forwarded through N1. In the case of failover of the MC-Links, the data reaches the client through N2. For S-Link clients on N1, data would be forwarded through normal snooping routes.

For S-Link clients on N2, data is forwarded through the ICL interface. Layer 2 multicast routes on N1 do not show these groups unless there is interest for the same group over MC-Links or over S-Links on N1. For the IRB scenario, the IGMP membership and Layer 3 multicast route on N1 does however show these groups learned over the IRB interface.

Therefore, for a case where a specific group interest is only on the S-Link on N2, data arriving on N1 reaches N2 through the default route, and the Layer 2 multicast route on N2 has the S-Link in the outgoing interface list.

Figure 13: Multicast Topology with Source Connected Through MC-Link

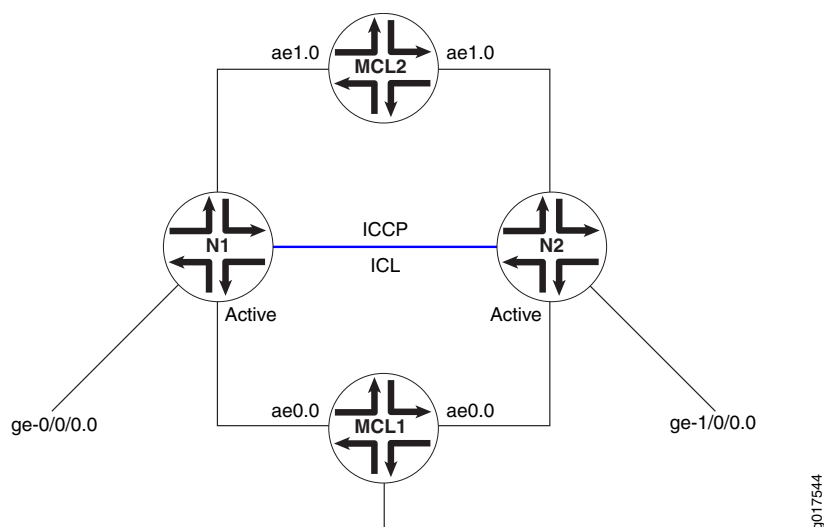

In Figure 13 on page 81, MCL1 and MCL2 are on different devices, and the multicast source or IGMP querier is connected through MCL2. The data forwarding behavior seen is similar to that explained for multicast topology with source connected through Layer 3.



NOTE: IGMP snooping should not be configured in proxy mode. There should be no IGMP hosts or IGMP or PIM routers sitting on the ICL interface.

Up and Down Event Handling

The following conditions apply to up and down event handling:

- If the Inter-Chassis Control Protocol (ICCP) connection is UP but the ICL interface goes DOWN, the router configured as the backup brings down all the multichassis aggregated Ethernet interfaces shared with the peer that is connected to ICL. This ensures that there are no loops in the network. Otherwise, both PEs become PIM-designated routers and, hence, forward multiple copies of the same packet to the customer edge.
- If the ICCP connection is UP and the ICL comes UP, the router configured as the backup brings up the multichassis aggregated Ethernet interfaces shared with the peer.

- If both the ICCP connection and the ICL are DOWN, the router configured as the backup brings up the multichassis aggregated Ethernet interfaces shared with the peer.
- The Layer 2 address learning process (l2ald) does not store the information about a MAC address learned from a peer in the kernel. If l2ald restarts, and if the MAC address was not learned from the local multichassis aggregated Ethernet interface, l2ald clears the MAC addresses, which causes the router to flood the packets destined to this MAC address. This behavior is similar to that in a Routing Engine switchover. (Note that currently l2ald runs on a Routing Engine only when it is a master). Also, during the time l2ald is DOWN, ARP packets received from an ICCP peer are dropped. ARP retry takes care of this situation. This is the case with Routing Engine switchover, too.
- If ICCP restarts, l2ald does not identify that a MAC address was learned from a peer and, if the MAC address was learned only from the peer, that MAC address is deleted, and the packets destined to this MAC address are flooded.

VRRP Active-Standby Support

VRRP in active-standby mode enables Layer 3 routing over the multichassis aggregated Ethernet interfaces on the MC-LAG peers. In this mode, the MC-LAG peers act as virtual routers. The virtual routers share the virtual IP address that corresponds to the default route configured on the host or server connected to the MC-LAG. This virtual IP address, known as a routed VLAN interface (RVI), maps to either of the VRRP MAC addresses or the logical interfaces of the MC-LAG peers. The host or server uses the VRRP MAC address to send any Layer 3 upstream packets. At any time, one of the VRRP routers is the master (active), and the other is a backup (standby). Both VRRP active and VRRP backup routers forward Layer 3 traffic arriving on the multichassis aggregated Ethernet interface. If the master router fails, all the traffic shifts to the multichassis aggregated Ethernet link on the backup router.



NOTE: You must configure VRRP on both MC-LAG peers for both the active and standby members to accept and route packets. Additionally, configure the VRRP backup router to send and receive ARP requests.

Routing protocols run on the primary IP address of the RVI, and both of the MC-LAG peers run routing protocols independently. The routing protocols use the primary IP address of the RVI and the RVI MAC address to communicate with the MC-LAG peers. The RVI MAC address of each MC-LAG peer is replicated on the other MC-LAG peer and is installed as a MAC address that has been learned on the ICL-PL.

In many cases, MC-LAG devices are Layer 3 routing devices and perform the default gateway functionality for hosts that are part of the attached IP subnets. The MC-LAG device-pair can therefore share the default gateway routing functionality with the VRRP protocol. The VRRP active-standby operation can be optimized to be an active-active mode of processing because traffic flowing from an MC-LAG client to an MC-LAG device is always sent on one of the available links of an MC-LAG and reaches exactly one of the MC-LAG destination devices. Because of this behavior, both MC-LAG devices in the pair can be enabled as routers for IP traffic destined to the VRRP destination MAC address.

Both MC-LAG devices must be full members of the routing domain and have routing entries that allow them to reach the IP destination networks.

The active-active functionality works without changing any VRRP state machine and by activating the routing function in the forwarding plane of the VRRP backup system (similar to the VRRP master). The mechanism enables traffic forwarding in Layer 3 to be fully redundant, leveraging all available link bandwidth. All routers forward traffic and thereby load-share routed traffic.

Inter-Chassis Control Protocol

Inter-Chassis Control Protocol (ICCP) is used to synchronize configurations, states, and data.

ICCP supports the following types of state information:

- MC-LAG members and their operational states
- Single-homed members and their operational states

ICCP supports the following application database synchronization parameters:

- MAC addresses learned and to be aged
- ARP information learned over IRB

Inter-Chassis Control Protocol Message

ICCP messages and attribute-value pairs (AVPs) are used for synchronizing MAC address and ARP information.

Related Documentation

- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)
- *multi-chassis-protection*
- *peer*
- *show interfaces mc-ae*
- *Ethernet Interfaces Feature Guide for Routing Devices*

Preventing Loops in MC-LAG Topologies

Supported Platforms **MX Series**

To prevent loops in MC-LAG topologies, configure the two edge nodes with same Spanning Tree Protocol (STP) virtual root ID using Reverse Layer 2 Gateway Protocol (R-L2GP). This root ID should be superior to all bridges in the downstream network while downstream bridges have to be capable of running STP. RL2GP should be configured on both MC-LAG nodes to prevent loops. A potential loop, such as one that can happen due to improper

cabling at the core or the access switching layer, or due to a bug in server software, is broken by STP blocking one of the interfaces in the downstream network. Because both the MC-LAG nodes are root bridges (virtual), the MC-LAG interface remains in the forwarding state. Downstream bridge receives bridge protocol data units (BPDUs) from both the nodes and thus receives twice the number of BPDUs on its **ae** interface. If both MC-LAG nodes use the same **ae** interface name, STP port number will be identical, which reduces the STP load on downstream bridge.

Related Documentation

- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)

Understanding the Incremented Values of Statistical Counters for Loop-Free MC-LAG Networks

Supported Platforms [MX Series](#)

In an MC-LAG in an active-active bridging domain, the output of the following command displays the MC-LAG color counters to be continuously increasing. This increase in the statistical count is an expected behavior because the MC-LAG color attribute or counter functions as a loop prevention mechanism.

```
request pfe execute target fpc0 command "show jnh 0 exceptions" |grep color
GOT: mc lag color DISC(88) 554712463 144488623417
request pfe execute target fpc0 command "show jnh 0 exceptions" |grep color
GOT: mc lag color DISC(88) 554712747 144488664296
```

The exception table stored in the Packet Forwarding Engine contains a list of counters as displayed in the following example output:

```
request pfe execute target fpc0 command "show jnh 0 exceptions"
```

GOT:	Reason	Type	Packets	Bytes
=====				
GOT:	Ucode Internal			
GOT:	-----			
GOT:	mcast stack overflow	DISC(33)	0	0
GOT:	sample stack error	DISC(35)	0	0
GOT:	undefined nexthop opcode	DISC(36)	0	0
GOT:	internal ucode error	DISC(37)	0	0
GOT:	invalid fabric hdr version	DISC(41)	0	0
GOT:	PFE State Invalid			
GOT:	-----			
GOT:	sw error	DISC(64)	803092438	59795128826
GOT:	child ifl nonlocal to pfe	DISC(85)	0	0
GOT:	invalid fabric token	DISC(75)	179	42346
GOT:	unknown family	DISC(73)	0	0
GOT:	unknown vrf	DISC(77)	0	0
GOT:	iif down	DISC(87)	0	0
GOT:	unknown iif	DISC(1)		
GOT:	invalid stream	DISC(72)	0	0
GOT:	egress pfe unspecified	DISC(19)	10889	1536998
GOT:	invalid L2 token	DISC(86)	26	1224
GOT:	mc lag color	DISC(88)	554693648	
144486028726<<<<<<<<<<<<<<<<<<<<<<<<<				
GOT:	dest interface non-local to pfe	DISC(27)	10939253797	2078273071209
GOT:	invalid inline-svcs state	DISC(90)	0	0
GOT:	nh id out of range	DISC(93)	0	0

```

GOT: invalid encap                DISC(96)          0          0
GOT: replication attempt on empty irb DISC(97)          0          0
GOT: invalid selector entry       DISC(98)          0          0
GOT:
GOT:
GOT: Packet Exceptions
GOT: -----
GOT: bad ipv4 hdr checksum        DISC( 2)          0          0
GOT: non-IPv4 layer3 tunnel       DISC( 4)          0          0
GOT: GRE unsupported flags        DISC( 5)          0          0
GOT: tunnel pkt too short         DISC( 6)          0          0
GOT: tunnel hdr too long          DISC( 7)          0          0
GOT: bad IPv6 options pkt         DISC( 9)          0          0
GOT: bad IP hdr                   DISC(11)          0          0
GOT: bad IP pkt len               DISC(12)          0          0
GOT: L4 len too short             DISC(13)          0          0
GOT: invalid TCP fragment         DISC(14)          0          0
GOT: mtu exceeded                 DISC(21)          0          0
GOT: frag needed but DF set       DISC(22)          0          0
GOT: ttl expired                  PUNT( 1)          9        769
GOT: IP options                   PUNT( 2)         16        512
GOT: xlated l2pt                  PUNT(14)          0          0
GOT: control pkt punt via ucode   PUNT( 4)          0          0
GOT: frame format error           DISC( 0)          0          0
GOT: tunnel hdr needs reassembly  PUNT( 8)          0          0
GOT: GRE key mismatch             DISC(76)          0          0
GOT: my-mac check failed          DISC(28)          0          0
GOT: frame relay type unsupported DISC(38)          0          0
GOT: IGMP snooping control packet PUNT(12)          0          0
GOT: bad CLNP hdr                 DISC(43)          0          0
GOT: bad CLNP hdr checksum        DISC(44)          0          0
GOT: Tunnel keepalives            PUNT(58)          0          0
GOT:
GOT:
GOT: Bridging
GOT: -----
GOT: lt unknown ucast             DISC(84)          0          0
GOT: dmac miss                    DISC(15)          0          0
GOT: mac learn limit exceeded     DISC(17)          0          0
GOT: static mac on unexpected iif DISC(18)          0          0
GOT: no local switching           DISC(20)          0          0
GOT: bridge ucast split horizon   DISC(26)        39458    13232394
GOT: mcast smac on bridged iif    DISC(24)        1263     200152
GOT: bridge pkt punt              PUNT( 7)          0          0
GOT: iif STP blocked              DISC( 3)          0          0
GOT: oif STP blocked              DISC(31)          0          0
GOT: vlan id out of oif's range   DISC(32)          0          0
GOT: mlp pkt                       PUNT(11)       15188054   440453569
GOT: input trunk vlan lookup failed DISC(91)          0          0
GOT: output trunk vlan lookup failed DISC(92)          0          0
GOT: LSI/VT vlan validation failed DISC(94)          0          0
GOT:
GOT:
GOT: Firewall
GOT: -----
GOT: mac firewall                 DISC(78)          0          0
GOT: firewall discard             DISC(67)          0          0
GOT: tcam miss                    DISC(16)          0          0
GOT: firewall reject              PUNT(36)       155559     59137563
GOT: firewall send to host         PUNT(54)          0          0
GOT: firewall send to host for NAT PUNT(59)          0          0

```

```

GOT:
GOT:
GOT: Routing
GOT: -----
GOT: discard route          DISC(66)    1577352    82845749
GOT: dsc ifl discard route DISC(95)      0          0
GOT: hold route            DISC(70)    21130    1073961
GOT: mcast rpf mismatch    DISC( 8)      0          0
GOT: resolve route         PUNT(33)    2858    154202
GOT: control pkt punt via nh PUNT(34) 51807272 5283911584
GOT: host route            PUNT(32) 23473304 1370843994
GOT: ICMP redirect         PUNT( 3)      0          0
GOT: mcast host copy       PUNT( 6)      0          0
GOT: reject route          PUNT(40)    1663    289278
GOT: link-layer-bcast-inet-check DISC(99)      0          0
GOT:

```

Consider a sample deployment in which two provider edge (PE) routers, PE1 and PE2, are connected with an aggregated Ethernet interface, **ae0**, respectively. Multichassis link aggregation groups (MC-LAGs) are used between PE1 and PE2 to form a logical LAG interface between the two controllers. PE1 and PE2 in an MC-LAG use an interchassis control link-protection link (ICL-PL) to replicate forwarding information across the peers.

Inter-Chassis Control Protocol (ICCP) messages are sent between the two PE devices. In this example, you configure an MC-LAG across two routers, consisting of two aggregated Ethernet interfaces, an interchassis control link-protection link (ICL-PL), multichassis protection link for the ICL-PL, and ICCP for the peers hosting the MC-LAG.

The PE1 router is connected using another aggregated Ethernet interface, **ae3**, to a host, H1, and to another MC-LAG host called C1. MC-LAG is enabled on the **ae3** interface.

Traffic received on PE1 from MC-LAG C1 can be flooded over the ICL to reach PE2. When the packets arrive at PE2, they can be flooded back to MC-LAG C1. Traffic sent by the single-homed host H1 can be flooded to MC-LAG C1 and the ICL on PE1. When PE2 receives such traffic from ICL, it can be again flooded to MC-LAG C1. To protect the MC-LAG topology from such loops, the MC-LAG color capability is implemented. This functionality is applied on the ingress of the ICL link. Therefore, when PE2 receives a packet from PE1, it sets the MC-LAG color as active or turns it on. When PE2 requires to flood the packet towards the MC-LAG link, it verifies whether the MC-LAG color bit is set or tagged as on. If the color is set, it drops the packet on the egress interface of MC-LAG **ae3** member link interfaces and the **mc-lag color** counter in the jnh exceptions is incremented.

Such a behavior of increase in counter value is an expected condition in an MC-LAG configured in an active/active bridging domain and when any form of traffic that needs to be flooded, such as ARP broadcast or multicast traffic, traverses the network.

Every VLAN might drop some packets to prevent loops and such a drop of packets might not be specific to a VLAN.

Sometimes, on both MC LAGs of the MX Series routers, you might notice that the counter increases on FPC0 and FPC2, but it does not increase on FPC2 as illustrated in the following sample output:

```

request pfe execute target fpc0 command "show jnh 0 exceptions" |grep color
GOT: mc lag color          DISC(88)    558477875 144977739683

```



```
request pfe execute target fpc1 command "show jnh 0 exceptions" |grep color
GOT: mc lag color                                DISC(88)          0          0
request pfe execute target fpc2 command "show jnh 0 exceptions" |grep color
GOT: mc lag color                                DISC(88)  518499257 119130527834
```

This behavior occurs because on an MX Series router with a 16-port 10-Gigabit Ethernet MPC (16x10GE 3D MPC), there are four Packet Forwarding Engines for each MPC. If you examine one Packet Forwarding Engine in FPC 0, 1, and 2, PFE1 in FPC1 does not have any interfaces which are member of MC-LAG. It might contain interfaces in other aggregated Ethernet interfaces that are not part of MC-LAG. Therefore, to obtain the correct counter statistics, you must examine the other Packet Forwarding Engines by entering the **request pfe execute target fpc0 command "show jnh X exceptions" |grep color** command where X can be 0, 1, 2, or 3.

When the counter named **dest interface non-local to pfe** is increasing, it is a desired behavior when aggregated Ethernet interfaces are split over more than one FPC. Consider an example in which an **ae5** interface contains the following member links: **xe-0/1/0** on (FPC0) and **xe-1/1/0** (FPC1). Based on the hash algorithm, traffic must be split between these two links. The hash algorithm is applied on the ingress FPC and performs an operation where it marks each packet through which FPC must be forwarded (FPC0 or FPC1). Then the packet is sent to the fabric. From the fabric, all of traffic is sent to both FPCs 0 and 1. On FPC0, the microkernel analyzes the packet and determines whether the packet needs to be forwarded by the local interface (local to pfe) or whether this packet has already been forwarded through FPC1 (non-local to pfe). If the packet has been already forwarded, the packet is dropped and the **non-local to pfe** counter is incremented.

Related Documentation • [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)

Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation

Supported Platforms [MX Series, QFX Series](#)

The following sections describe the configuration of active-active bridging and VRRP over IRB in a multichassis link aggregation (MC-LAG) :

- [Configuring MC-LAG on page 87](#)
- [Configuring the Interchassis Link-Protection Link on page 88](#)
- [Configuring Multiple Chassis on page 89](#)
- [Configuring the Service ID on page 89](#)
- [Configuring IGMP Snooping for Active-Active MC-LAG on page 91](#)

Configuring MC-LAG

Supported Platforms [MX Series](#)

An MC-LAG is composed of logical link aggregation groups (LAGs) and is configured under the **[edit interfaces aeX]** hierarchy, as follows:

[edit]

```

interfaces {
  ae0 {
    encapsulation ethernet-bridge;
    multi-chassis-protection {
      peer 10.10.10.10 {
        interface ge-0/0/0;
      }
    }
    aggregated-ether-options {
      mc-ae {
        mode active-active; # see note below
      }
    }
  }
}

```



NOTE: The `mode active-active` statement is valid only if encapsulation is an `ethernet-bridge` or `extended-vlan-bridge`.

Use the `mode` statement to specify if an MC-LAG is **active-standby** or **active-active**. If the ICCP connection is UP and ICL comes UP, the router configured as standby brings up the multichassis aggregated Ethernet interfaces shared with the peer.

Using **multi-chassis-protection** at the physical interface level is a way to reduce the configuration at the logical interface level.

If there are $n+1$ logical interfaces under `ae0`, from `ae0.0` through `ae0.n`, there are $n+1$ logical interfaces under `ge-0/0/0` as well, from `ge-0/0/0.0` through `ge-0/0/0.n`, each `ge-0/0/0` logical interface is a protection link for the `ae0` logical interface.



NOTE: A bridge domain cannot have multichassis aggregated Ethernet logical interfaces that belong to different redundancy groups.

Configuring the Interchassis Link-Protection Link

Supported Platforms **MX Series**

The interchassis link-protection link (ICL-PL) provides redundancy when a link failure (for example, an MC-LAG trunk failure) occurs on one of the active links. The ICL-PL is an aggregated Ethernet interface. You can configure only one ICL-PL between the two peers, although you can configure multiple MC-LAGs between them.

The ICL-PL assumes that interface `ge-0/0/0.0` is used to protect interface `ae0.0` of MC-LAG-1:

```

[edit]
interfaces {
  ae0 {
    ....
    unit 0 {

```

```

multi-chassis-protection {
  peer 10.10.10.10 {
    interface ge-0/0/0.0;
  }
  ....
}
...
}
}
}

```

The protection interface can be an Ethernet type interface such as ge or xe, or an aggregated Ethernet (ae) interface.

Configuring Multiple Chassis

Supported Platforms [MX Series](#)

A top-level hierarchy is used to specify a multichassis-related configuration, as follows:

```

[edit]
multi-chassis {
  multi-chassis-protection {
    peer 10.10.10.10 {
      interface ge-0/0/0;
    }
  }
}

```

This example specifies interface ge-0/0/0 as the multichassis protection interface for all the multichassis aggregated Ethernet interfaces which are also part of the peer. This can be overridden by specifying protection at the physical interface level and the logical interface level.

Configuring the Service ID

Supported Platforms [MX Series](#)

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. You can configure the service IDs under the level of the hierarchies shown in the following examples:

Global Configuration (Default Logical System)	<pre> switch-options { service-id 10; } bridge-domains { bd0 { service-id 2; } } routing-instances { r1 { switch-options { service-id 10; } bridge-domains { </pre>
--	---

```

        bd0 {
            service-id 2;
        }
    }
}

Logical Systems ls1 {
    switch-options {
        service-id 10;
    }
    routing-instances {
        r1 {
            switch-options {
                service-id 10;
            }
        }
    }
}

```



NOTE: Using a service name per bridge domain is not supported.

The bridge-level service ID is required to link related bridge domains across peers, and should be configured with the same value. The **service-id** values share the name space across all bridging and routing instances, and across peers. Thus, duplicate values for service IDs are not permitted across these entities.


The service ID at the bridge domain level is mandatory for type non-single VLAN bridge domains. The service ID is optional for bridge domains with a VLAN identifier (VID) defined. If no service ID is defined in the latter case, it is picked up from the service ID configuration for that routing instance.



NOTE: When this default routing instance (or any other routing instance) which contains a bridge domain containing a multichassis aggregated Ethernet interface is configured, you must configure a global-level **switch-options service-id *number***, irrespective of whether the contained bridge domains have specific service IDs configured.

In the sample illustration shown in [Figure 14 on page 91](#), network routing instances N1 and N2, both for the same service ID, are configured with same service ID in both N1 and N2. Use of a name string instead of a number is not supported.

Figure 14: N1 and N2 for the Same Service with Same Service ID

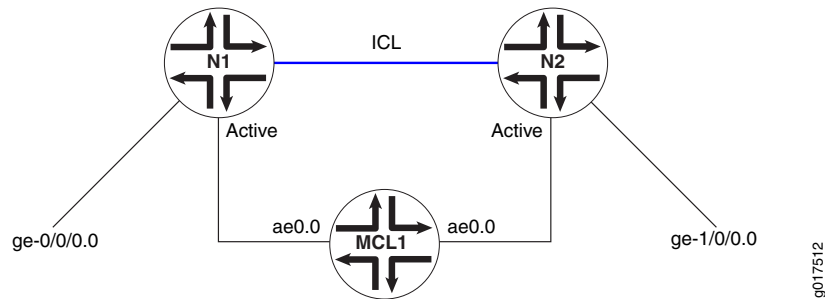


The following configuration restrictions apply:

- The service ID must be configured when the multichassis aggregated Ethernet interface is configured and a multichassis aggregated Ethernet logical interface is part of a bridge domain. This requirement is enforced.
- A single bridge domain cannot correspond to two redundancy group IDs.

In [Figure 15 on page 91](#), it is possible to configure a bridge domain consisting of logical interfaces from two multichassis aggregated Ethernet interfaces and map them to a separate redundancy group ID, which is not supported. A service must be mapped one-to-one with the redundancy group providing the service. This requirement is enforced.

Figure 15: Bridge Domain with Logical Interfaces from Two Multichassis Aggregated Ethernet Interfaces

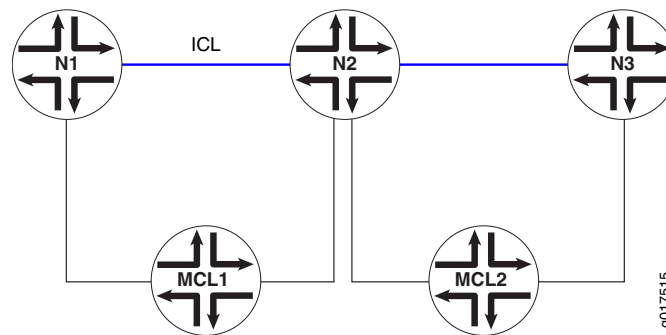

To display the multichassis aggregated Ethernet configuration, use the **show interfaces mc-ae** command. For more information, see the [CLI Explorer](#).

Configuring IGMP Snooping for Active-Active MC-LAG

Supported Platforms

For the multicast solution to work, the following must be configured:

- The multichassis protection link must be configured as a router-facing interface.

```
[edit bridge-domain bd-name]
protocols {
  igmp-snooping {
    interface ge-0/0/0.0 {
```

```
        multicast-router-interface;  
    }  
}  
}
```

In this example, ge-0/0/0.0 is an ICL interface.

- The **multichassis-lag-replicate-state** statement options must be configured under the **multicast-snooping-options** statement for that bridge domain.



NOTE: Snooping with active-active MC-LAG is only supported in non-proxy mode.

Related Documentation

- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
- [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)
- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [mc-ae on page 444](#)
- *multi-chassis-protection*
- *peer*
- *show interfaces irb*
- *show interfaces mc-ae*
- *Ethernet Interfaces Feature Guide for Routing Devices*

Configuring IGMP Snooping in MC-LAG Active-Active Mode

Supported Platforms [MX240, MX480, MX960, QFX Series](#)

You can use the **bridge-domain** statement's **service-id** option to specify the multichassis aggregated Ethernet configuration.

- The **service-id** statement is mandatory for non-single VLAN type bridge domains (**none**, **all**, or **vlan-id-tags:dual**).
- The statement is optional for bridge domains with a VID defined.
- If no **service-id** is defined in the latter case, it is picked up from the round-trip time's (RTT's) **service-id** configuration.
- The bridge-level **service-id** is required to link related bridge domains across peers, and should be configured with the same value.
- The **service-id** values share the name space across all bridging and routing instances, and across peers. Thus, duplicate **service-id** values are not permitted across these entities.
- A change of bridge **service-id** is considered catastrophic, and the bridge domain is changed.

This procedure allows you to enable or disable the replication feature.

To configure IGMP snooping in active-standby mode:

1. Use the **multichassis-lag-replicate-state** statement at the **[edit multicast-snooping-options]** hierarchy level in the master instance.

```
multicast-snooping-options {  
  ...  
  multichassis-lag-replicate-state; # REQUIRED  
}
```

2. Use the **interface icl-intf-name** statement at the **[edit protocols igmp-snooping]** hierarchy level, as shown in the following example:

```
protocols {  
  igmp-snooping {  
    interface icl-intf-name {  
      multicast-router-interface;  
    }  
  }  
}
```

The interchassis link, **interface icl-intf-name**, of the learning domain should be a router-facing interface.

Related Documentation

- [IGMP Snooping in MC-LAG Active-Active Mode on page 152](#)
- [Example: Configuring IGMP Snooping](#)
- [igmp-snooping](#)
- [multicast-router-interface](#)
- [show l2-learning instance](#)
- [Ethernet Interfaces Feature Guide for Routing Devices](#)

Example: Configuring DHCP Relay on MC- LAG with VRRP on an EX9200 Switch

Supported Platforms [EX Series](#)

This example shows how to configure Dynamic Host Configuration Protocol (DHCP) relay on EX9200 switches with the multichassis link aggregation (MC-LAG) feature using Virtual Router Redundancy Protocol (VRRP).

- [Requirements on page 94](#)
- [Overview on page 94](#)
- [Configuration on page 95](#)
- [Overwriting Address Information on page 97](#)
- [Verification on page 97](#)

Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for EX Series
- Two EX9200 switches

Before you configure DHCP relay, be sure that you understand how to:

- Configure MC-LAG and verify that MC-LAG and ICCP is up and running

To complete the configuration, enable VRRP by completing the following steps for each MC-LAG:

- Create an integrated routing and bridging (IRB) interface.
- Create a VRRP group and assign a virtual IP address that is shared between each switch in the VRRP group.
- Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group.
- Configure Layer 3 connectivity between the VRRP groups.

Overview

In this example, you configure DHCP relay with MC-LAG across two switches consisting of two EX9200 switches, an interchassis link-protection link (ICL-PL), multichassis protection link for the ICL-PL, ICCP for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers. Layer 3 connectivity is required for ICCP.



NOTE: On EX9200 switches, dynamic ARP resolution is not supported over inter-chassis control links (ICLs). As a workaround, you can configure static ARP on both ends of the ICL.

Topology

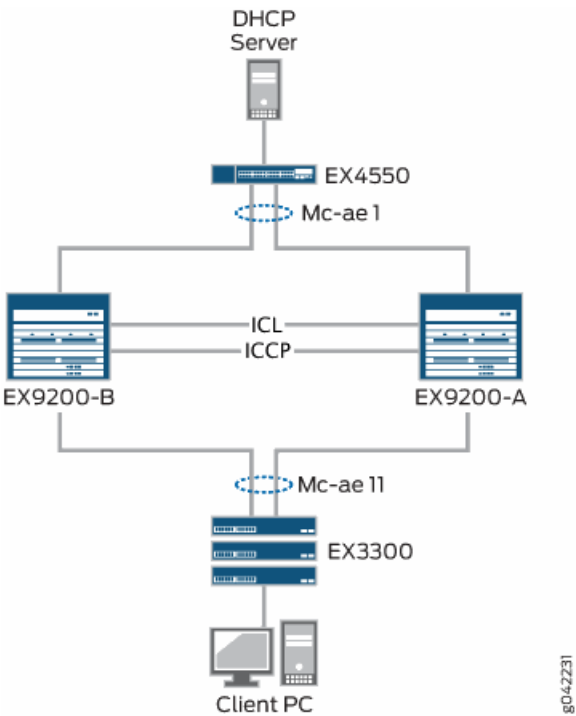


Table 6: Components of the Topology for Configuring DHCP Relay

Hostname	Hardware
Switch EX9200-A	EX9200 switch
Switch EX9200-B	EX9200 switch

Configuration

CLI Quick Configuration	To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the [edit] hierarchy level, and then enter commit from configuration mode.
Switch A and Switch B	<pre>set forwarding-options dhcp-relay forward-snooped-clients all-interfaces set forwarding-options dhcp-relay server-group GVP-DHCP 10.168.61.5 set forwarding-options dhcp-relay overrides allow-snooped-clients set forwarding-options dhcp-relay active-server-group GVP-DHCP set forwarding-options dhcp-relay group Floor1 interface irb.2540 set forwarding-options dhcp-relay route-suppression destination</pre>
Step-by-Step Procedure	<p>To configure DHCP relay on both Switch A and Switch B:</p> <ol style="list-style-type: none">1. Configure forward snooped (unicast) packets on the interfaces. [edit forwarding-options dhcp-relay]

```
user@switch# set forward-snooped-clients all-interfaces
```

2. Create a DHCP server group. A DHCP server group can include 1 through 5 DHCP server IP addresses.

```
[edit forwarding-options dhcp-relay]
user@switch# set server-group GVP-DHCP 10.168.61.5
```

3. Allow the creation of a binding entry using snooped (unicast) clients.

```
[edit forwarding-options dhcp-relay]
user@switch# set overrides allow-snooped-clients
```

4. Apply a DHCP relay agent configuration to the named group of DHCP server addresses.

```
[edit forwarding-options dhcp-relay ]
user@switch# set active-server-group GVP-DHCP
```

5. Create a DHCP relay group that includes at least one interface.

DHCP relay runs on the interfaces defined in DHCP groups.

```
[edit forwarding-options dhcp-relay]
user@switch# set group Floor1 interface irb.2540
```

6. Configure the relay agent to suppress the installation of ARP and route entries for corresponding client binding.

```
[edit forwarding-options dhcp-relay]
user@switch# set route-suppression destination
```

Results

From configuration mode, confirm your configuration by entering the **show forwarding-options dhcp-relay** command on both Switch A and Switch B. If the output does not display the required configuration, repeat the instructions in this example to correct the configuration.

```
user@switch# show forwarding-options dhcp-relay
forward-snooped-clients {
  all-interfaces;
}
overrides {
  allow-snooped-clients;
}
server-group {
  GVP-DHCP {
    10.168.61.5;
  }
}
active-server-group {
  GVP-DHCP;
}
group Floor1 {
  interface {
    irb.2540;
  }
}
```

```
}  
root-suppression {  
    destination;  
}
```

Overwriting Address Information

Step-by-Step Procedure We recommend that you configure the DHCP relay agent to change the gateway IP address (giaddr) field in packets that it forwards between a DHCP client and a DHCP server.

To overwrite the address of every DHCP packet with the address of the DHCP relay agent before forwarding the packet to the DHCP server.

1. Specify that you want to configure override options.

```
[edit forwarding-options dhcp-relay]  
user@hots# set overrides
```

2. Specify that the address of DHCP packets is overwritten.

```
[edit forwarding-options dhcp-relay overrides]  
user@host# set always-write-giaddr
```

Verification

Confirm that the configuration is working properly.

- [Verifying That DHCP Relay Binding Is Occurring on page 97](#)
- [Verifying That Relay Statistics Are Being Displayed on page 98](#)

Verifying That DHCP Relay Binding Is Occurring

Purpose Verify that address bindings in the DHCP client table are being displayed.

Action root@switchA# **show dhcp relay binding detail**
Client IP Address: 10.168.103.20
Hardware Address: 84:18:88:a8:ca:80
State: BOUND(RELAY_STATE_BOUND)
Lease Expires: 2013-10-03 12:17:43 CEST
Lease Expires in: 85829 seconds
Lease Start: 2013-10-02 10:48:34 CEST
Last Packet Received: 2013-10-02 12:17:43 CEST
Incoming Client Interface: ae0.0(irb.2540)
Server Ip Address: 10.168.61.5
Server Interface: none
Bootp Relay Address: 10.168.103.2
Session Id: 29

root@switchB# **show dhcp relay binding detail**
Client IP Address: 10.168.103.20
Hardware Address: 84:18:88:a8:ca:80
State: BOUND(RELAY_STATE_BOUND)
Lease Expires: 2013-10-03 12:17:43 CEST
Lease Expires in: 86228 seconds
Lease Start: 2013-10-02 10:48:34 CEST
Last Packet Received: 2013-10-02 10:48:34 CEST
Incoming Client Interface: ae11.0(irb.2540)
Server Ip Address: 10.168.61.5
Server Interface: none
Bootp Relay Address: 10.168.103.2
Session Id: 16

Meaning The field State indicates the state of the DHCP relay address binding table on the DHCP client. The state BOUND indicates that the client has an active IP address lease.

Verifying That Relay Statistics Are Being Displayed

Purpose Verify that DHCP relay statistics are being displayed.

Action root@switchA# **show dhcp relay statistics**
Packets dropped:
 Total 9
 dhcp-service total 9
Messages received:
 BOOTREQUEST 4
 DHCPCDECLINE 0
 DHCPDISCOVER 1
 DHCPINFORM 0
 DHCPRELEASE 0
 DHCPREQUEST 3

Messages sent:
 BOOTREPLY 0
 DHCPOFFER 0
 DHCPACK 0
 DHCPNAK 0
 DHCPFORCERENEW 0

Meaning The field Total displays the total number of packets discarded by the extended DHCP relay agent application.

- Related Documentation**
- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32](#)
 - [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on EX9200 Switches on page 174](#)

Configuring Manual and Automatic Link Switchover for MC-LAG Interfaces

Supported Platforms [MX Series](#)

In a multichassis link aggregation (MC-LAG) topology with active-standby mode, a link switchover happens only if the active node goes down. You can override this default behavior by configuring an MC-LAG interface in active-standby mode to automatically revert to a preferred node. With this configuration, you can trigger a link switchover to a preferred node even when the active node is available. For example, consider two nodes, PE1 and PE2. PE1 is configured in active mode making it a preferred node, and PE2 is configured in active-standby mode. In case of any failure at PE1, PE2 becomes the active node. However, as soon as PE1 is available again, an automatic link switchover is triggered and the control is switched back to PE1 even though PE2 is active.

You can configure the link switchover in two modes: revertive and nonrevertive. In revertive mode, the link switchover is triggered automatically by using the **request interface mc-ae switchover** operational mode command. In nonrevertive mode, the link switchover must be triggered manually by the user. You can also configure a revert time that triggers an automatic or manual switchover when the specified timer expires.



NOTE:

- If two MC-LAG devices configured in an active-standby setup using Inter-Chassis Control Protocol (ICCP) and nonrevertive switchover mode is configured on the aggregated Ethernet interfaces of both the MC-LAGs and when both mc-ae interfaces are linked together with a Layer 2 circuit local-switching configuration, we recommend that you perform switchover by entering the request interface mc-ae switchover (immediate mcae-id mcae-id | mcae-id mcae-id) operational mode command on only one of the aggregated Ethernet interfaces of an MC-LAG device. This command can be issued only on MC-LAG devices that are configured as active nodes (by using the status-control active statement at the [edit interfaces aeX aggregated-ether-options mc-ae] hierarchy level).
- In nonrevertive switchover mode, when an MC-LAG interface transitions to the standby state because of an MC-LAG member link failure and another MC-LAG interface moves to the active state, the MC-LAG in standby state remains in that state until the MC-LAG in active state encounters a failure and returns to the active state.
- If you perform a switchover on both the aggregated Ethernet interfaces in the MC-LAG, because of Layer 2 circuit local-switching configuration, a switchover on one aggregated Ethernet interface triggers a switchover on the other aggregated Ethernet interface. In such a scenario, both the aggregated Ethernet interfaces move to the standby state and then transition back to the active state. Therefore, you must not perform switchover on both the aggregated Ethernet interfaces in an MC-LAG at the same time.
- Layer 2 circuit configuration and VPLS functionalities are not supported if you configure an MC-LAG interface to be in revertive switchover mode. You can configure the revertive or nonrevertive switchover capability only if two MC-LAG devices are configured in an active-standby setup (one device set as an active node by using the status-control standby statement and the other device set as a standby node by using the status-control active statement at the [edit interfaces aeX aggregated-ether-options mc-ae] hierarchy level. You can perform a switchover by entering the request interface mc-ae switchover (immediate mcae-id mcae-id | mcae-id mcae-id) operational mode command only on MC-LAG devices configured as active nodes.

To configure the link switchover mechanism on an MC-LAG interface:

1. Configure the link switchover in revertive mode.

```
[edit interfaces aeX aggregated-ether-options mc-ae]  
user@host# set switchover-mode revertive
```

2. (Optional) Configure the link switchover in nonrevertive mode.

```
[edit interfaces aeX aggregated-ether-options mc-ae]  
user@host# set switchover-mode non-revertive
```

3. Configure the revert time.

```
[edit interfaces aeX aggregated-ether-options mc-ae]
user@host# set revert-time revert-time
```

4. Trigger manual switchover.

```
[edit request interface mc-ae]
user@host# set switchover < immediate> mcae-id mcae-id
```

You can use the **show interfaces mc-ae revertive-info** command to view the switchover configuration information.

Related Documentation

- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)

Example: Configuring Multichassis Link Aggregation in Active-Active Mode

Supported Platforms MX240, MX480, MX960, QFX Series

This example shows how to configure a multichassis link aggregation group (MC-LAG) in an active-active scenario, which load balances traffic across the PEs.

- [Requirements on page 101](#)
- [Overview on page 101](#)
- [Configuring the PE Routers on page 103](#)
- [Configuring the CE Device on page 109](#)
- [Configuring the Provider Router on page 112](#)
- [Verification on page 114](#)

Requirements

This example uses the following hardware and software components:



NOTE: This example also applies to QFX10002 and QFX10008 switches.

- Four Juniper Networks MX Series routers
- Junos OS Release 11.2 or later running on all four routers

Overview

Consider a sample topology in which a customer edge router, CE, is connected to two provider edge (PE) routers, PE1 and PE2, respectively. The two PE devices each have a link aggregation group (LAG) connected to the CE device. The configured mode is active

-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time. PE1 and PE2 are connected to a single service provider router, P.

In this example, the CE router is not aware that its aggregated Ethernet links are connected to two separate PE devices. The two PE devices each have a LAG connected to the CE device. The configured mode is active-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time.

In [Figure 16 on page 102](#), from the perspective of Router CE, all four ports belonging to a LAG are connected to a single service provider device. Because the configured mode is active-active, all four ports are active, and the CE device load-balances the traffic to the peering PE devices. On the PE routers, a regular LAG is configured facing the CE device.


On one end of an MC-LAG is an MC-LAG client device, such as a server, that has one or more physical links in a LAG. This client device does not need to detect the MC-LAG. On the other side of an MC-LAG are two MC-LAG routers. Each of the routers has one or more physical links connected to a single client device. The routers coordinate with each other to ensure that data traffic is forwarded properly.

ICCP messages are sent between the two PE devices. In this example, you configure an MC-LAG across two routers, consisting of two aggregated Ethernet interfaces, an interchassis link-protection link (ICL-PL), multichassis protection link for the ICL-PL, and ICCP for the peers hosting the MC-LAG.

Topology Diagram

[Figure 16 on page 102](#) shows the topology used in this example.

Figure 16: MC-LAG Active-Active Mode on MX Series Routers

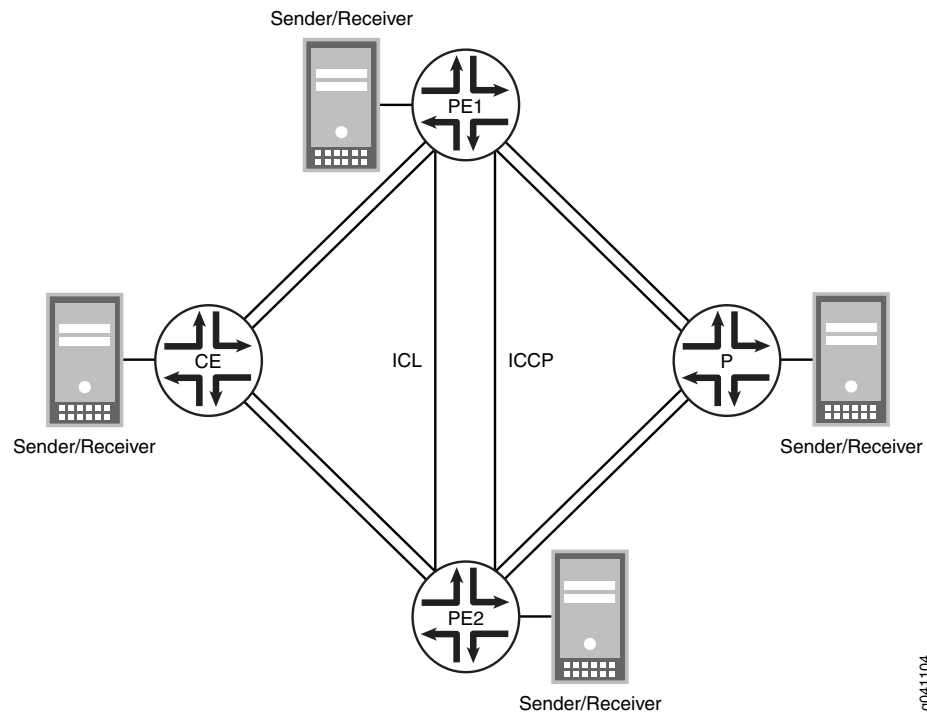

g041104

Configuring the PE Routers

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
Router PE1 set chassis aggregated-devices ethernet device-count 5
set interfaces ge-1/0/1 gigether-options 802.3ad ae1
set interfaces ge-1/0/2 unit 0 family inet address 10.100.100.1/30
set interfaces ge-1/0/6 gigether-options 802.3ad ae0
set interfaces ge-1/1/1 flexible-vlan-tagging
set interfaces ge-1/1/1 encapsulation flexible-ethernet-services
set interfaces ge-1/1/1 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/1 unit 0 vlan-id-range 100-110
set interfaces ge-1/1/4 flexible-vlan-tagging
set interfaces ge-1/1/4 encapsulation flexible-ethernet-services
set interfaces ge-1/1/4 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/4 unit 0 vlan-id-range 100-110
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 service-id 20
set bridge-domains bd0 interface ae1.0
set bridge-domains bd0 interface ge-1/0/3.0
set bridge-domains bd0 interface ge-1/1/1.0
set bridge-domains bd0 interface ge-1/1/4.0
set bridge-domains bd0 interface ae0.0
```

```
set protocols iccp local-ip-addr 10.100.100.1
set protocols iccp peer 10.100.100.2 redundancy-group-id-list 10
set protocols iccp peer 10.100.100.2 liveness-detection minimum-interval 1000
set switch-options service-id 10
```

Router PE2

```
set chassis aggregated-devices ethernet device-count 5
set interfaces ge-1/0/2 unit 0 family inet address 10.100.100.2/30
set interfaces ge-1/0/3 flexible-vlan-tagging
set interfaces ge-1/0/3 encapsulation flexible-ethernet-services
set interfaces ge-1/0/3 unit 0 encapsulation vlan-bridge
set interfaces ge-1/0/3 unit 0 vlan-id-range 100-110
set interfaces ge-1/0/4 flexible-vlan-tagging
set interfaces ge-1/0/4 encapsulation flexible-ethernet-services
set interfaces ge-1/0/4 unit 0 encapsulation vlan-bridge
set interfaces ge-1/0/4 unit 0 vlan-id-range 100-110
set interfaces ge-1/0/5 gigether-options 802.3ad ae0
set interfaces ge-1/1/0 gigether-options 802.3ad ae1
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control standby
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 service-id 20
set bridge-domains bd0 interface ae1.0
set bridge-domains bd0 interface ge-1/0/3.0
set bridge-domains bd0 interface ge-1/0/4.0
set bridge-domains bd0 interface ae0.0
set protocols iccp local-ip-addr 10.100.100.2
set protocols iccp peer 10.100.100.1 redundancy-group-id-list 10
set protocols iccp peer 10.100.100.1 liveness-detection minimum-interval 1000
set switch-options service-id 10
```

Configuring the PE1 Router

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router PE1:

- Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@PE1# set aggregated-devices ethernet device-count 5
```
- Specify the members to be included within the aggregated Ethernet bundles.

```
[edit interfaces]
user@PE1# set ge-1/0/1 gigether-options 802.3ad ae1
user@PE1# set ge-1/0/6 gigether-options 802.3ad ae0
```
- Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.

```
[edit interfaces]
user@PE1# set ge-1/1/1 flexible-vlan-tagging
user@PE1# set ge-1/1/1 encapsulation flexible-ethernet-services
user@PE1# set ge-1/1/1 unit 0 encapsulation vlan-bridge
user@PE1# set ge-1/1/1 unit 0 vlan-id-range 100-110

user@PE1# set ge-1/1/4 flexible-vlan-tagging
user@PE1# set ge-1/1/4 encapsulation flexible-ethernet-services
user@PE1# set ge-1/1/4 unit 0 encapsulation vlan-bridge
user@PE1# set ge-1/1/4 unit 0 vlan-id-range 100-110

user@PE1# set ge-1/0/2 unit 0 family inet address 10.100.100.1/30
```
- Configure parameters on the aggregated Ethernet bundles.

```
[edit interfaces ae0]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0

[edit interfaces ae1]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
```
- Configure LACP on the aggregated Ethernet bundles.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE1# set lacp active
user@PE1# set lacp system-priority 100
```

```
user@PE1# set lacp system-id 00:00:00:00:00:05
user@PE1# set lacp admin-key 1
```

```
[edit interfaces ae1 aggregated-ether-options]
user@PE1# set lacp active
user@PE1# set lacp system-priority 100
user@PE1# set lacp system-id 00:00:00:00:00:05
user@PE1# set lacp admin-key 1
```

6. Configure the MC-LAG interfaces.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 5
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active
```

```
[edit interfaces ae1 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 10
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active
```

The multichassis aggregated Ethernet identification number (**mc-ae-id**) specifies which link aggregation group the aggregated Ethernet interface belongs to. The ae0 interfaces on Router PE1 and Router PE2 are configured with **mc-ae-id 5**. The ae1 interfaces on Router PE1 and Router PE2 are configured with **mc-ae-id 10**. (To refer to the configuration on Router PE2, see [“Router PE2” on page 104](#)).

The **redundancy-group 10** statement is used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other. The ae0 and ae1 interfaces on Router PE1 and Router PE2 are configured with the same redundancy group, **redundancy-group 10**.

The **chassis-id** statement is used by LACP for calculating the port number of the MC-LAG's physical member links. Router PE1 uses **chassis-id 1** to identify both its ae0 and ae1 interfaces. Router PE2 (as shown in [“Router PE2” on page 104](#)) uses **chassis-id 0** to identify both its ae0 and ae1 interfaces.

The **mode** statement indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

7. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@PE1# set domain-type bridge
user@PE1# set vlan-id all
user@PE1# set service-id 20
user@PE1# set interface ae0.0
user@PE1# set interface ae1.0
user@PE1# set interface ge-1/0/3.0
user@PE1# set interface ge-1/1/1.0
user@PE1# set interface ge-1/1/4.0
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case Router PE1 and Router PE2), and must be configured with the same value.

8. Configure ICCP parameters.

```
[edit protocols iccp]
user@PE1# set local-ip-addr 10.100.100.1
user@PE1# set peer 10.100.100.2 redundancy-group-id-list 10
user@PE1# set peer 10.100.100.2 liveness-detection minimum-interval 1000
```

9. Configure the service ID at the global level.

```
[edit switch-options]
user@PE1# set service-id 10
```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, **show interfaces**, **show protocols**, and **show switch-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show bridge-domains
```

```
bd0 {
  domain-type bridge;
  vlan-id all;
  service-id 20;
  interface ae1.0;
  interface ge-1/0/3.0;
  interface ge-1/1/1.0;
  interface ge-1/1/4.0;
  interface ae0.0;
}
```

```
user@PE1# show chassis
```

```
aggregated-devices {
  ethernet {
    device-count 5;
  }
}
```

```
user@PE1# show interfaces
```

```
ge-1/0/1 {
  gigether-options {
    802.3ad ae1;
  }
}
ge-1/0/6 {
  gigether-options {
```

```
        802.3ad ae0;
    }
}
ge-1/0/2 {
    unit 0 {
        family inet {
            address 10.100.100.1/30;
        }
    }
}
ge-1/1/1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
    }
}
ge-1/1/4 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
    }
}
ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
            system-id 00:00:00:00:00:05;
            admin-key 1;
        }
        mc-ae {
            mc-ae-id 5;
            redundancy-group 10;
            chassis-id 1;
            mode active-active;
            status-control active;
        }
    }
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
        multi-chassis-protection 10.100.100.2 {
            interface ge-1/1/4.0;
        }
    }
}
ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
```

```

lacp {
    active;
    system-priority 100;
    system-id 00:00:00:00:00:05;
    admin-key 1;
}
mc-ae {
    mc-ae-id 10;
    redundancy-group 10;
    chassis-id 1;
    mode active-active;
    status-control active;
}
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
    multi-chassis-protection 10.100.100.2 {
        interface ge-1/1/4.0;
    }
}
}

user@PE1# show protocols
iccp {
    local-ip-addr 10.100.100.1;
    peer 10.100.100.2 {
        redundancy-group-id-list 10;
        liveness-detection {
            minimum-interval 1000;
        }
    }
}

user@PE1# show switch-options
service-id 10;

```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure for Router PE2, using the appropriate interface names and addresses.

Configuring the CE Device

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

Device CE

```

set chassis aggregated-devices ethernet device-count 2
set interfaces ge-2/0/2 gigether-options 802.3ad ae0
set interfaces ge-2/0/3 gigether-options 802.3ad ae0
set interfaces ge-2/1/6 flexible-vlan-tagging
set interfaces ge-2/1/6 encapsulation flexible-ethernet-services
set interfaces ge-2/1/6 unit 0 encapsulation vlan-bridge
set interfaces ge-2/1/6 unit 0 vlan-id-range 100-110

```

```
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-500
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 interface ge-2/1/6.0
set bridge-domains bd0 interface ae0.0
```

Configuring the CE Device

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the CE device:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@CE# set aggregated-devices ethernet device-count 2
```

2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]
user@CE# set ge-2/0/2 gigether-options 802.3ad ae0
user@CE# set ge-2/0/3 gigether-options 802.3ad ae0
```

3. Configure an interface that connects to senders or receivers.

```
[edit interfaces ge-2/1/6]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge
user@CE# set unit 0 vlan-id-range 100-110
```

4. Configure parameters on the aggregated Ethernet bundle.

```
[edit interfaces ae0]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge
user@CE# set unit 0 vlan-id-range 100-500
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit interfaces ae0 aggregated-ether-options]
user@CE# set lacp active
user@CE# set lacp system-priority 100
```

The **active** statement initiates transmission of LACP packets.

For the **system-priority** statement, a smaller value indicates a higher priority. The device with the lower system priority value determines which links between LACP partner devices are active and which are in standby mode for each LACP group. The device on the controlling end of the link uses port priorities to determine which ports

are bundled into the aggregated bundle and which ports are put in standby mode. Port priorities on the other device (the noncontrolling end of the link) are ignored.

6. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@CE# set domain-type bridge
user@CE# set vlan-id all
user@CE# set interface ge-2/1/6.0
user@CE# set interface ae0.0
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  interface ge-2/1/6.0;
  interface ae0.0;
}

user@CE# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@CE# show interfaces
ge-2/0/2 {
  gigaether-options {
    802.3ad ae0;
  }
}
ge-2/0/3 {
  gigaether-options {
    802.3ad ae0;
  }
}
ge-2/1/6 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
  unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
  }
}
ae0 {
  flexible-vlan-tagging;
```

```
encapsulation flexible-ethernet-services;
aggregated-ether-options {
    lacp {
        active;
        system-priority 100;
    }
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-500;
}
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring the Provider Router

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

Router P

```
set chassis aggregated-devices ethernet device-count 2
set interfaces ge-1/0/5 gigether-options 802.3ad ae1
set interfaces ge-1/0/11 gigether-options 802.3ad ae1
set interfaces ge-1/1/3 flexible-vlan-tagging
set interfaces ge-1/1/3 encapsulation flexible-ethernet-services
set interfaces ge-1/1/3 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/3 unit 0 vlan-id-range 100-500
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 interface ge-1/1/3.0
set bridge-domains bd0 interface ae1.0
```

Configuring the P Router

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the P router:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@P# set aggregated-devices ethernet device-count 2
```
2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]
```

```
user@P# set ge-1/0/5 gigether-options 802.3ad ae1
user@P# set ge-1/0/11 gigether-options 802.3ad ae1
```

3. Configure an interface that connects to senders or receivers.

```
[edit interfaces ge-1/1/3]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-500
```

4. Configure parameters on the aggregated Ethernet bundle.

```
[edit interfaces ae1]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-110
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit interfaces ae1 aggregated-ether-options]
user@P# set lacp active
user@P# set lacp system-priority 100
```

6. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@P# set vlan-id all
user@P# set domain-type bridge
user@P# set interface ge-1/1/3.0
user@P# set interface ae1.0
```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  interface ge-1/1/3.0;
  interface ae1.0;
}

user@P# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@P# show interfaces
ge-1/0/5 {
  gigether-options {
    802.3ad ae1;
```

```
    }  
  }  
  ge-1/0/11 {  
    gigether-options {  
      802.3ad ae1;  
    }  
  }  
  ge-1/1/3 {  
    flexible-vlan-tagging;  
    encapsulation flexible-ethernet-services;  
    unit 0 {  
      encapsulation vlan-bridge;  
      vlan-id-range 100-500;  
    }  
  }  
  ae1 {  
    flexible-vlan-tagging;  
    encapsulation flexible-ethernet-services;  
    aggregated-ether-options {  
      lacp {  
        active;  
        system-priority 100;  
      }  
    }  
    unit 0 {  
      encapsulation vlan-bridge;  
      vlan-id-range 100-110;  
    }  
  }  
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly by running the following commands:

- **show iccp**
- **show interfaces ae0**
- **show interfaces ae1**
- **show interfaces mc-ae**
- **show l2-learning instance**

Related Documentation

- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Configuring ICCP for MC-LAG](#)
- [show interfaces \(Aggregated Ethernet\)](#)

Example: Configuring Multichassis Link Aggregation in an Active-Active Bridging Domain on Logical Systems on MX Series Routers

Supported Platforms MX240, MX480, MX960

This example illustrates how to configure a multichassis link aggregation group (MC-LAG) in an active-active scenario on logical systems within MX Series routers.

- [Requirements on page 115](#)
- [Overview on page 115](#)
- [Configuring the Logical Systems on the PE Routers on page 117](#)
- [Configuring the Logical System on the CE Router on page 131](#)
- [Configuring the Provider Router on page 134](#)
- [Verification on page 137](#)

Requirements

This example uses the following hardware and software components:

- Four Juniper Networks MX Series routers.
- Junos OS Release 11.2 or later running on all four routers.

Overview

Consider a sample topology in which a customer edge router, CE, is connected to two provider edge (PE) routers, PE1 and PE2, respectively. CE is configured with a logical system, LS3. PE1 is configured with a logical system, LS1, and PE2 is configured with a logical system, LS2. LS1 and LS2 on the two PE devices each have a LAG connected to the CE device. The configured mode is active-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time. PE1 and PE2 are connected to a single service provider router, P.

Default logical systems are present on the two PE devices and the CE device. The default and user-defined logical systems have two different ICCP channel configurations. Multichassis aggregated Ethernet IDs over an MC-AE physical interface cannot be shared between multiple logical systems. The MC-LAG configuration is performed as part of the **ae-** physical interface settings in the default logical system. Service ID, peer chassis IP, VLAN ID, and IP subnets are unique within each logical system, such as the default and user-defined logical systems.



NOTE: MC-LAG settings on **ae-** interfaces are supported only on the default logical system.

In this example, the logical system on the CE router is not aware that its aggregated Ethernet links are connected to two separate PE devices. LS1 and LS2 on the two PE devices each have a LAG connected to LS3 on the CE device. The configured mode is

active-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time.

In [Figure 16 on page 102](#), from the perspective of Router CE, all four ports belonging to a LAG are connected to a single service provider device. Because the configured mode is active-active, all four ports are active, and LS3 on the CE device load-balances the traffic to the peering PE devices. On the PE routers, a regular LAG is configured facing the CE device.

On one end of an MC-LAG is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device does not need to detect the MC-LAG. On the other side of an MC-LAG are two MC-LAG routers. Each of the routers has one or more physical links connected to a single client device. The routers coordinate with each other to ensure that data traffic is forwarded properly.


ICCP messages are sent between the two logical systems, LS1 and LS2, of the PE devices. In this example, you configure an MC-LAG across two switches, consisting of two aggregated Ethernet interfaces, an interchassis control link-protection link (ICL-PL), multichassis protection link for the ICL-PL, and ICCP for the peers hosting the MC-LAG.

As a best practice, we recommend that you configure the ICCP and ICL interfaces over aggregated Ethernet interfaces instead of other interfaces such as Gigabit Ethernet interfaces, depending on your topology requirements and framework. You must disable RSTP on the ICL-PL interfaces for an MC-LAG in an active-active bridging domain.

Topology Diagram

[Figure 16 on page 102](#) shows the topology used in this example. The interface **ge-1/0/2** functions as the ICCP link between the two PE devices, interface **ge-1/1/1** is the ICL-PL link, and interface **ge-1/1/4** is the link that connects to the server or the MC-LAG client device. In the following figure, the logical systems, LS1 and LS2, on the PE devices, PE1 and PE2, are not explicitly displayed. Similarly, LS3 on the CE device is not shown in the illustration. However, the three logical systems are configured on the corresponding devices.

Figure 17: MC-LAG Active-Active on MX Series Routers

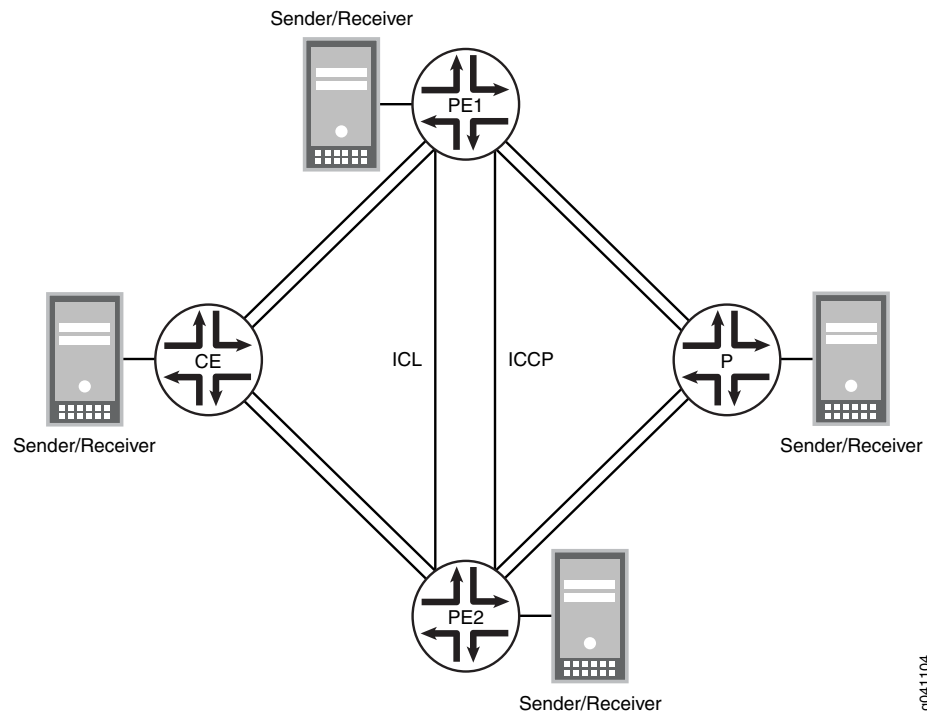

g041104

Configuring the Logical Systems on the PE Routers

- [LS1 on Router PE1 on page 121](#)
- [Default Logical System on Router PE1 on page 122](#)
- [Default Logical System on Router PE1 on page 123](#)
- [LS2 of Router PE2 on page 125](#)
- [Default Logical System of Router PE2 on page 126](#)
- [Results on page 128](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

LS1 on Router PE1

```
set chassis aggregated-devices ethernet device-count 5
set logical-systems LS1 interfaces ge-1/0/1 gigether-options 802.3ad ae1
set logical-systems LS1 interfaces ge-1/0/2 unit 0 family inet address 10.100.100.1/30
set logical-systems LS1 interfaces ge-1/0/6 gigether-options 802.3ad ae0
set logical-systems LS1 interfaces ge-1/1/1 flexible-vlan-tagging
set logical-systems LS1 interfaces ge-1/1/1 encapsulation flexible-ethernet-services
set logical-systems LS1 interfaces ge-1/1/1 unit 0 encapsulation vlan-bridge
set logical-systems LS1 interfaces ge-1/1/1 unit 0 vlan-id-range 100-110
set logical-systems LS1 interfaces ge-1/1/4 flexible-vlan-tagging
set logical-systems LS1 interfaces ge-1/1/4 encapsulation flexible-ethernet-services
set logical-systems LS1 interfaces ge-1/1/4 unit 0 encapsulation vlan-bridge
set logical-systems LS1 interfaces ge-1/1/4 unit 0 vlan-id-range 100-110
set logical-systems LS1 interfaces ae0 flexible-vlan-tagging
```

```

set logical-systems LS1 interfaces ae0 encapsulation flexible-ethernet-services
set logical-systems LS1 interfaces ae0 unit 0 encapsulation vlan-bridge
set logical-systems LS1 interfaces ae0 unit 0 vlan-id-range 100-110
set logical-systems LS1 interfaces ae0 unit 0 multi-chassis-protection 10.100.100.2
  interface ge-1/1/4.0
set logical-systems LS1 interfaces ae1 flexible-vlan-tagging
set logical-systems LS1 interfaces ae1 encapsulation flexible-ethernet-services
set logical-systems LS1 interfaces ae1 unit 0 encapsulation vlan-bridge
set logical-systems LS1 interfaces ae1 unit 0 vlan-id-range 100-110
set logical-systems LS1 interfaces ae1 unit 0 multi-chassis-protection 10.100.100.2
  interface ge-1/1/4.0
set logical-systems LS1 bridge-domains bd0 domain-type bridge
set logical-systems LS1 bridge-domains bd0 vlan-id all
set logical-systems LS1 bridge-domains bd0 service-id 20
set logical-systems LS1 bridge-domains bd0 interface ae1.0
set logical-systems LS1 bridge-domains bd0 interface ge-1/0/3.0
set logical-systems LS1 bridge-domains bd0 interface ge-1/1/1.0
set logical-systems LS1 bridge-domains bd0 interface ge-1/1/4.0
set logical-systems LS1 bridge-domains bd0 interface ae0.0
set logical-systems LS1 protocols iccp local-ip-addr 10.100.100.1
set logical-systems LS1 protocols iccp peer 10.100.100.2 redundancy-group-id-list 10
set logical-systems LS1 protocols iccp peer 10.100.100.2 liveness-detection
  minimum-interval 1000

```

Default logical system on Router PE1

```

set interfaces ge-1/1/4 flexible-vlan-tagging
set interfaces ge-1/1/4 encapsulation flexible-ethernet-services
set interfaces ge-1/1/4 unit 1 vlan-id 50
set interfaces ge-1/1/4 unit 1 family inet address 10.100.100.1/30
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0

```



```

set protocols iccp local-ip-addr 10.100.100.1
set protocols iccp peer 10.100.100.2 redundancy-group-id-list 10
set protocols iccp peer 10.100.100.2 liveness-detection minimum-interval 1000
set switch-options service-id 10

```

LS2 on Router PE2

```

set chassis aggregated-devices ethernet device-count 5
set logical-systems LS2 interfaces ge-1/0/2 unit 0 family inet address 10.100.100.2/30
set logical-systems LS2 interfaces ge-1/0/3 flexible-vlan-tagging
set logical-systems LS2 interfaces ge-1/0/3 encapsulation flexible-ethernet-services
set logical-systems LS2 interfaces ge-1/0/3 unit 0 encapsulation vlan-bridge
set logical-systems LS2 interfaces ge-1/0/3 unit 0 vlan-id-range 100-110
set logical-systems LS2 interfaces ge-1/0/4 flexible-vlan-tagging
set logical-systems LS2 interfaces ge-1/0/4 encapsulation flexible-ethernet-services
set logical-systems LS2 interfaces ge-1/0/4 unit 0 encapsulation vlan-bridge
set logical-systems LS2 interfaces ge-1/0/4 unit 0 vlan-id-range 100-110
set logical-systems LS2 interfaces ge-1/0/5 gigether-options 802.3ad ae0
set logical-systems LS2 interfaces ge-1/1/0 gigether-options 802.3ad ae1
set logical-systems LS2 interfaces ae0 flexible-vlan-tagging
set logical-systems LS2 interfaces ae0 encapsulation flexible-ethernet-services
set logical-systems LS2 interfaces ae0 aggregated-ether-options lacp active
set logical-systems LS2 interfaces ae0 aggregated-ether-options lacp system-priority
  100
set logical-systems LS2 interfaces ae0 aggregated-ether-options lacp system-id
  00:00:00:00:00:05
set logical-systems LS2 interfaces ae0 aggregated-ether-options lacp admin-key 1
set logical-systems LS2 interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set logical-systems LS2 interfaces ae0 aggregated-ether-options mc-ae redundancy-group
  10
set logical-systems LS2 interfaces ae0 aggregated-ether-options mc-ae chassis-id 0
set logical-systems LS2 interfaces ae0 aggregated-ether-options mc-ae mode
  active-active
set logical-systems LS2 interfaces ae0 aggregated-ether-options mc-ae status-control
  active
set logical-systems LS2 interfaces ae0 unit 0 encapsulation vlan-bridge
set logical-systems LS2 interfaces ae0 unit 0 vlan-id-range 100-110
set logical-systems LS2 interfaces ae0 unit 0 multi-chassis-protection 10.100.100.1
  interface ge-1/0/4.0
set logical-systems LS2 interfaces ae1 flexible-vlan-tagging
set logical-systems LS2 interfaces ae1 encapsulation flexible-ethernet-services
set logical-systems LS2 interfaces ae1 aggregated-ether-options lacp active
set logical-systems LS2 interfaces ae1 aggregated-ether-options lacp system-priority
  100
set logical-systems LS2 interfaces ae1 aggregated-ether-options lacp system-id
  00:00:00:00:00:05
set logical-systems LS2 interfaces ae1 aggregated-ether-options lacp admin-key 1
set logical-systems LS2 interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set logical-systems LS2 interfaces ae1 aggregated-ether-options mc-ae redundancy-group
  10
set logical-systems LS2 interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set logical-systems LS2 interfaces ae1 aggregated-ether-options mc-ae mode active-active
set logical-systems LS2 interfaces ae1 aggregated-ether-options mc-ae status-control
  active
set logical-systems LS2 interfaces ae1 unit 0 encapsulation vlan-bridge
set logical-systems LS2 interfaces ae1 unit 0 vlan-id-range 100-110
set logical-systems LS2 interfaces ae1 unit 0 multi-chassis-protection 10.100.100.1
  interface ge-1/0/4.0

```

```

set logical-systems LS2 bridge-domains bd0 domain-type bridge
set logical-systems LS2 bridge-domains bd0 vlan-id all
set logical-systems LS2 bridge-domains bd0 service-id 20
set logical-systems LS2 bridge-domains bd0 interface ae1.0
set logical-systems LS2 bridge-domains bd0 interface ge-1/0/3.0
set logical-systems LS2 bridge-domains bd0 interface ge-1/0/4.0
set logical-systems LS2 bridge-domains bd0 interface ae0.0
set logical-systems LS2 protocols iccp local-ip-addr 10.100.100.2
set logical-systems LS2 protocols iccp peer 10.100.100.1 redundancy-group-id-list 10
set logical-systems LS2 protocols iccp peer 10.100.100.1 liveness-detection
    minimum-interval 1000
set logical-systems LS2 switch-options service-id 10

```

Default Logical System on Router PE2

```

set interfaces ge-1/0/4 flexible-vlan-tagging
set interfaces ge-1/0/4 encapsulation flexible-ethernet-services
set interfaces ge-1/0/4 unit 1 vlan-id 50
set interfaces ge-1/0/4 unit 1 family inet address 10.100.100.2/30
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set protocols iccp local-ip-addr 10.100.100.2
set protocols iccp peer 10.100.100.1 redundancy-group-id-list 10
set protocols iccp peer 10.100.100.1 liveness-detection minimum-interval 1000
set switch-options service-id 10

```

LS1 on Router PE1

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the logical system, LS1, on router PE1:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@PE1# set aggregated-devices ethernet device-count 5
```

2. Specify the members to be included within the aggregated Ethernet bundles.

```
[edit logical-systems LS1 interfaces]
user@PE1# set ge-1/0/1 gigether-options 802.3ad ae1
user@PE1# set ge-1/0/6 gigether-options 802.3ad ae0
```

3. Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.

```
[edit logical-systems LS1 interfaces]
user@PE1# set ge-1/1/1 flexible-vlan-tagging
user@PE1# set ge-1/1/1 encapsulation flexible-ethernet-services
user@PE1# set ge-1/1/1 unit 0 encapsulation vlan-bridge
user@PE1# set ge-1/1/1 unit 0 vlan-id-range 100-110
user@PE1# set ge-1/1/4 flexible-vlan-tagging
user@PE1# set ge-1/1/4 encapsulation flexible-ethernet-services
user@PE1# set ge-1/1/4 unit 0 encapsulation vlan-bridge
user@PE1# set ge-1/1/4 unit 0 vlan-id-range 100-110
user@PE1# set ge-1/0/2 unit 0 family inet address 10.100.100.1/30
```

4. Configure parameters on the aggregated Ethernet bundles.

```
[edit logical-systems LS1 interfaces ae0]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
```

```
[edit logical-systems LS1 interfaces ae1]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
```

5. Configure a domain that includes the set of logical ports.

```
[edit logical-systems LS1 bridge-domains bd0]
user@PE1# set domain-type bridge
user@PE1# set vlan-id all
user@PE1# set service-id 20
user@PE1# set interface ae0.0
user@PE1# set interface ae1.0
```

```

user@PE1# set interface ge-1/0/3.0
user@PE1# set interface ge-1/1/1.0
user@PE1# set interface ge-1/1/4.0

```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case Router PE1 and Router PE2), and should be configured with the same value.

6. Configure ICCP parameters.

```

[edit logical-systems LS1 protocols iccp]
user@PE1# set local-ip-addr 10.100.100.1
user@PE1# set peer 10.100.100.2 redundancy-group-id-list 10
user@PE1# set peer 10.100.100.2 liveness-detection minimum-interval 1000

```

7. Configure the service ID at the global level.

```

[edit logical-systems LS1 switch-options]
user@PE1# set service-id 10

```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Default Logical System on Router PE1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the default logical system on router PE1:

1. Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.

```

[edit]
user@PE1# set interfaces ge-1/1/4 flexible-vlan-tagging
user@PE1# set interfaces ge-1/1/4 encapsulation flexible-ethernet-services
user@PE1# set interfaces ge-1/1/4 unit 1 vlan-id 50
user@PE1# set interfaces ge-1/1/4 unit 1 family inet address 10.100.100.1/30

```

2. Configure parameters on the aggregated Ethernet bundles.

```

[edit interfaces ae0]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0

```

```

[edit interfaces ae1]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge

```

```

user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0

```

3. Configure a domain that includes the set of logical ports.

```

[edit logical-systems LS1 bridge-domains bd0]
user@PE1# set domain-type bridge
user@PE1# set vlan-id all
user@PE1# set service-id 20
user@PE1# set interface ae0.0
user@PE1# set interface ae1.0
user@PE1# set interface ge-1/0/3.0
user@PE1# set interface ge-1/1/1.0
user@PE1# set interface ge-1/1/4.0

```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case Router PE1 and Router PE2), and should be configured with the same value.

4. Configure ICCP parameters.

```

[edit logical-systems LS1 protocols iccp]
user@PE1# set local-ip-addr 10.100.100.1
user@PE1# set peer 10.100.100.2 redundancy-group-id-list 10
user@PE1# set peer 10.100.100.2 liveness-detection minimum-interval 1000

```

5. Configure the service ID at the global level.

```

[edit logical-systems LS1 switch-options]
user@PE1# set service-id 10

```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Default Logical System on Router PE1

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the default logical system on router PE1:

1. Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.

```

[edit]
user@PE1# set interfaces ge-1/1/4 flexible-vlan-tagging
user@PE1# set interfaces ge-1/1/4 encapsulation flexible-ethernet-services
user@PE1# set interfaces ge-1/1/4 unit 1 vlan-id 50
user@PE1# set interfaces ge-1/1/4 unit 1 family inet address 10.100.100.1/30

```

2. Configure parameters on the aggregated Ethernet bundles.

```

[edit interfaces ae0]

```

```

user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0

```

```

[edit interfaces ae1]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0

```

3. Configure LACP on the aggregated Ethernet bundles.

```

[edit interfaces ae0 aggregated-ether-options]
user@PE1# set lacp active
user@PE1# set lacp system-priority 100
user@PE1# set lacp system-id 00:00:00:00:00:05
user@PE1# set lacp admin-key 1

```

```

[edit interfaces ae1 aggregated-ether-options]
user@PE1# set lacp active
user@PE1# set lacp system-priority 100
user@PE1# set lacp system-id 00:00:00:00:00:05
user@PE1# set lacp admin-key 1

```

4. Configure the MC-LAG interfaces.

```

[edit interfaces ae0 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 5
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active

```

```

[edit interfaces ae1 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 10
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active

```

The multichassis aggregated Ethernet identification number (**mc-ae-id**) specifies which link aggregation group the aggregated Ethernet interface belongs to. The **ae0** interfaces on default LS of Router 1 and default LS of Router 2 are configured with **mc-ae-id 5**. The **ae1** interfaces on default LS of Router 1 and default LS of Router 2 are configured with **mc-ae-id 10**. (To refer to the configuration on LS2 of Router PE2, see [“Router PE2” on page 104](#)).

The **redundancy-group 10** statement is used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other. The **ae0** and **ae1** interfaces on default LS of Router 1 and default LS of Router 2 are configured with the same redundancy group **redundancy-group 10**.

The **chassis-id** statement is used by LACP for calculating the port number of the MC-LAG's physical member links. LS1 of Router PE1 uses **chassis-id 1** to identify both its **ae0** and **ae1** interfaces. LS2 of Router PE2 (as shown in [“Router PE2” on page 104](#)) uses **chassis-id 0** to identify both its **ae0** and **ae1** interfaces.

The **mode** statement indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

5. Configure ICCP parameters.

```
[edit protocols iccp]
user@PE1# set local-ip-addr 10.100.100.1
user@PE1# set peer 10.100.100.2 redundancy-group-id-list 10
user@PE1# set peer 10.100.100.2 liveness-detection minimum-interval 1000
```

LS2 of Router PE2

Step-by-Step Procedure

To configure LS2 of Router PE2:

1. Specify the number of aggregated Ethernet interfaces to be created.


```
[edit chassis]
user@PE2# set aggregated-devices ethernet device-count 5
```
2. Specify the members to be included within the aggregated Ethernet bundles.


```
[edit logical-systems LS2 interfaces]
user@PE2# set ge-1/0/5 gigether-options 802.3ad ae1
user@PE2# set ge-1/1/0 gigether-options 802.3ad ae0
```
3. Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.


```
[edit logical-systems LS2 interfaces]
user@PE2# set ge-1/0/3 flexible-vlan-tagging
user@PE2# set ge-1/0/3 encapsulation flexible-ethernet-services
user@PE2# set ge-1/0/3 unit 0 encapsulation vlan-bridge
user@PE2# set ge-1/0/3 unit 0 vlan-id-range 100-110
user@PE2# set ge-1/0/4 flexible-vlan-tagging
user@PE2# set ge-1/0/4 encapsulation flexible-ethernet-services
user@PE2# set ge-1/0/4 unit 0 encapsulation vlan-bridge
user@PE2# set ge-1/0/4 unit 0 vlan-id-range 100-110
user@PE2# set ge-1/0/5 gigether-options 802.3ad ae0
user@PE2# set ge-1/1/0 gigether-options 802.3ad ae1
```
4. Configure parameters on the aggregated Ethernet bundles.


```
[edit logical-systems LS2 interfaces ae0]
user@PE2# set flexible-vlan-tagging
user@PE2# set encapsulation flexible-ethernet-services
user@PE2# set unit 0 encapsulation vlan-bridge
user@PE2# set unit 0 vlan-id-range 100-110
user@PE2# set unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0

[edit logical-systems LS2 interfaces ae1]
user@PE2# set flexible-vlan-tagging
user@PE2# set encapsulation flexible-ethernet-services
```

```

user@PE2# set unit 0 encapsulation vlan-bridge
user@PE2# set unit 0 vlan-id-range 100-110
user@PE2# set unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0

```

5. Configure a domain that includes the set of logical ports.

```

[edit logical-systems LS2 bridge-domains bd0]
user@PE2# set domain-type bridge
user@PE2# set vlan-id all
user@PE2# set service-id 20
user@PE2# set interface ae0.0
user@PE2# set interface ae1.0
user@PE2# set interface ge-1/0/3.0
user@PE2# set interface ge-1/1/1.0
user@PE2# set interface ge-1/1/4.0

```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case LS1 of Router PE1 and LS2 of Router PE2), and should be configured with the same value.

6. Configure ICCP parameters.

```

[edit logical-systems LS2 protocols iccp]
user@PE2# set local-ip-addr 10.100.100.2
user@PE2# set peer 10.100.100.1 redundancy-group-id-list 10
user@PE2# set peer 10.100.100.1 liveness-detection minimum-interval 1000

```

7. Configure the service ID at the global level.

```

[edit logical-systems LS2 switch-options]
user@PE2# set service-id 10

```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Default Logical System of Router PE2

Step-by-Step Procedure

To configure LS2 of Router PE2:

1. Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.

```

[edit]
user@PE2# set interfaces ge-1/0/4 flexible-vlan-tagging
user@PE2# set interfaces ge-1/0/4 encapsulation flexible-ethernet-services
user@PE2# set interfaces ge-1/0/4 unit 1 vlan-id 50
user@PE2# set interfaces ge-1/0/4 unit 1 family inet address 10.100.100.2/30

```

2. Configure parameters on the aggregated Ethernet bundles.

```

[edit interfaces ae0]
user@PE2# set flexible-vlan-tagging
user@PE2# set encapsulation flexible-ethernet-services
user@PE2# set unit 0 encapsulation vlan-bridge

```



```

user@PE2# set unit 0 vlan-id-range 100-110
user@PE2# set unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0

```

```

[edit interfaces ae1]
user@PE2# set flexible-vlan-tagging
user@PE2# set encapsulation flexible-ethernet-services
user@PE2# set unit 0 encapsulation vlan-bridge
user@PE2# set unit 0 vlan-id-range 100-110
user@PE2# set unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0

```

3. Configure LACP on the aggregated Ethernet bundles.

```

[edit interfaces ae0 aggregated-ether-options]
user@PE2# set lacp active
user@PE2# set lacp system-priority 100
user@PE2# set lacp system-id 00:00:00:00:00:05
user@PE2# set lacp admin-key 1

```

```

[edit interfaces ae1 aggregated-ether-options]
user@PE2# set lacp active
user@PE2# set lacp system-priority 100
user@PE2# set lacp system-id 00:00:00:00:00:05
user@PE2# set lacp admin-key 1

```

4. Configure the MC-LAG interfaces.

```

[edit interfaces ae0 aggregated-ether-options]
user@PE2# set mc-ae mc-ae-id 5
user@PE2# set mc-ae redundancy-group 10
user@PE2# set mc-ae chassis-id 1
user@PE2# set mc-ae mode active-active
user@PE2# set mc-ae status-control active

```

```

[edit interfaces ae1 aggregated-ether-options]
user@PE2# set mc-ae mc-ae-id 10
user@PE2# set mc-ae redundancy-group 10
user@PE2# set mc-ae chassis-id 1
user@PE2# set mc-ae mode active-active
user@PE2# set mc-ae status-control active

```

The multichassis aggregated Ethernet identification number (**mc-ae-id**) specifies which link aggregation group the aggregated Ethernet interface belongs to. The **ae0** interfaces on default LS of Router 1 and default LS of Router 2 are configured with **mc-ae-id 5**. The **ae1** interfaces on default LS of Router 1 and default LS of Router 2 are configured with **mc-ae-id 10**.

The **redundancy-group 10** statement is used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other. The **ae0** and **ae1** interfaces on default LS of Router 1 and default LS of Router 2 are configured with the same redundancy group **redundancy-group 10**.

The **chassis-id** statement is used by LACP for calculating the port number of the MC-LAG's physical member links. LS1 of Router PE1 uses **chassis-id 1** to identify both

its **ae0** and **ae1** interfaces. LS2 of Router PE2 uses **chassis-id 0** to identify both its **ae0** and **ae1** interfaces.

The **mode** statement indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

5. Configure ICCP parameters.

```
[edit protocols iccp]
user@PE2# set local-ip-addr 10.100.100.2
user@PE2# set peer 10.100.100.1 redundancy-group-id-list 10
user@PE2# set peer 10.100.100.1 liveness-detection minimum-interval 1000
```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show interfaces**, **show protocols**, and **show switch-options** commands at the **[edit logical-systems LS1]** hierarchy level, and the **show chassis** command at the **[edit]** hierarchy level. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit logical-systems LS1]
user@PE1# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  service-id 20;
  interface ae1.0;
  interface ge-1/1/1.0;
  interface ge-1/1/4.0;
  interface ae0.0;
}

[edit]
user@PE1# show chassis
aggregated-devices {
  ethernet {
    device-count 5;
  }
}

[edit logical-systems LS1]
user@PE1# show interfaces
ge-1/0/1 {
  gigether-options {
    802.3ad ae1;
  }
}
ge-1/0/6 {
  gigether-options {
    802.3ad ae0;
  }
}
ge-1/0/2 {
  unit 0 {
    family inet {
```

```

        address 10.100.100.1/30;
    }
}
ge-1/1/1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
    }
}
ge-1/1/4 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
    }
}
ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
        multi-chassis-protection 10.100.100.2 {
            interface ge-1/1/4.0;
        }
    }
}
ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
        multi-chassis-protection 10.100.100.2 {
            interface ge-1/1/4.0;
        }
    }
}

[edit]
user@PE1# show interfaces
ge-1/1/4 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        vlan-id 50
        family inet {
            address 10.100.100.1/30;
        }
    }
}
ae0 {

```

```
flexible-vlan-tagging;
encapsulation flexible-ethernet-services;
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
    multi-chassis-protection 10.100.100.2 {
        interface ge-1/1/4.0;
    }
}
}
ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
        multi-chassis-protection 10.100.100.2 {
            interface ge-1/1/4.0;
        }
    }
}
[edit]
user@PE1# show interfaces
ge-1/1/4 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        vlan-id 50
        family inet {
            address 10.100.100.1/30;
        }
    }
}
ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
            system-id 00:00:00:00:00:05;
            admin-key 1;
        }
        mc-ae {
            mc-ae-id 5;
            redundancy-group 10;
            chassis-id 1;
            mode active-active;
            status-control active;
        }
    }
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
        multi-chassis-protection 10.100.100.2 {
```

```

        interface ge-1/1/4.0;
    }
}
ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
            system-id 00:00:00:00:00:05;
            admin-key 1;
        }
        mc-ae {
            mc-ae-id 10;
            redundancy-group 10;
            chassis-id 1;
            mode active-active;
            status-control active;
        }
    }
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
        multi-chassis-protection 10.100.100.2 {
            interface ge-1/1/4.0;
        }
    }
}

[edit logical-systems LS1]
user@PE1# show protocols
iccp {
    local-ip-addr 10.100.100.1;
    peer 10.100.100.2 {
        redundancy-group-id-list 10;
        liveness-detection {
            minimum-interval 1000;
        }
    }
}

[edit logical-systems LS1]
user@PE1# show switch-options
service-id 10;

```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure for LS2 of Router PE2, using the appropriate interface names and addresses.

Configuring the Logical System on the CE Router

- [Router CE on page 132](#)
- [Results on page 133](#)

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

LS3 of Router CE

```

set chassis aggregated-devices ethernet device-count 2
set logical-systems LS3 interfaces ge-2/0/2 gigether-options 802.3ad ae0
set logical-systems LS3 interfaces ge-2/0/3 gigether-options 802.3ad ae0
set logical-systems LS3 interfaces ge-2/1/6 flexible-vlan-tagging
set logical-systems LS3 interfaces ge-2/1/6 encapsulation flexible-ethernet-services
set logical-systems LS3 interfaces ge-2/1/6 unit 0 encapsulation vlan-bridge
set logical-systems LS3 interfaces ge-2/1/6 unit 0 vlan-id-range 100-110
set logical-systems LS3 interfaces ae0 flexible-vlan-tagging
set logical-systems LS3 interfaces ae0 encapsulation flexible-ethernet-services
set logical-systems LS3 interfaces ae0 aggregated-ether-options lacp active
set logical-systems LS3 interfaces ae0 aggregated-ether-options lacp system-priority 100
set logical-systems LS3 interfaces ae0 unit 0 encapsulation vlan-bridge
set logical-systems LS3 interfaces ae0 unit 0 vlan-id-range 100-500
set logical-systems LS3 bridge-domains bd0 domain-type bridge
set logical-systems LS3 bridge-domains bd0 vlan-id all
set logical-systems LS3 bridge-domains bd0 interface ge-2/1/6.0
set logical-systems LS3 bridge-domains bd0 interface ae0.0

```

Router CE

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router CE:

- Specify the number of aggregated Ethernet interfaces to be created.

```

[edit chassis]
user@CE# set aggregated-devices ethernet device-count 2

```
- Specify the members to be included within the aggregated Ethernet bundle.

```

[edit logical-systems LS3 interfaces]
user@CE# set ge-2/0/2 gigether-options 802.3ad ae0
user@CE# set ge-2/0/3 gigether-options 802.3ad ae0

```
- Configure an interface that connects to senders or receivers.

```

[edit logical-systems LS3 interfaces ge-2/1/6]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge
user@CE# set unit 0 vlan-id-range 100-110

```
- Configure parameters on the aggregated Ethernet bundle.

```

[edit logical-systems LS3 interfaces ae0]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge

```

```
user@CE# set unit 0 vlan-id-range 100-500
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit logical-systems LS3 interfaces ae0 aggregated-ether-options]
user@CE# set lacp active
user@CE# set lacp system-priority 100
```

The **active** statement initiates transmission of LACP packets.

For the **system-priority** statement, a smaller value indicates a higher priority. The device with the lower system priority value determines which links between LACP partner devices are active and which are in standby mode for each LACP group. The device on the controlling end of the link uses port priorities to determine which ports are bundled into the aggregated bundle and which ports are put in standby mode. Port priorities on the other device (the noncontrolling end of the link) are ignored.

6. Configure a domain that includes the set of logical ports.

```
[edit logical-systems LS3 bridge-domains bd0]
user@CE# set domain-type bridge
user@CE# set vlan-id all
user@CE# set interface ge-2/1/6.0
user@CE# set interface ae0.0
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains** and **show interfaces** commands at the **[edit logical-systems LS3]** hierarchy level, and the **show chassis** command at the **[edit]** hierarchy level. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit logical-systems LS3]
user@CE# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  interface ge-2/1/6.0;
  interface ae0.0;
}

[edit]
user@CE# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

[edit logical-systems LS3]
user@CE# show interfaces
ge-2/0/2 {
  gigether-options {
    802.3ad ae0;
```

```

    }
  }
  ge-2/0/3 {
    gigether-options {
      802.3ad ae0;
    }
  }
  ge-2/1/6 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
      encapsulation vlan-bridge;
      vlan-id-range 100-110;
    }
  }
  ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
      lacp {
        active;
        system-priority 100;
      }
    }
    unit 0 {
      encapsulation vlan-bridge;
      vlan-id-range 100-500;
    }
  }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring the Provider Router

- [Router P on page 135](#)
- [Results on page 136](#)

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```

Router P
set chassis aggregated-devices ethernet device-count 2
set interfaces ge-1/0/5 gigether-options 802.3ad ae1
set interfaces ge-1/0/11 gigether-options 802.3ad ae1
set interfaces ge-1/1/3 flexible-vlan-tagging
set interfaces ge-1/1/3 encapsulation flexible-ethernet-services
set interfaces ge-1/1/3 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/3 unit 0 vlan-id-range 100-500
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110

```



```

set bridge-domains bd0 vlan-id all
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 interface ge-1/1/3.0
set bridge-domains bd0 interface ae1.0

```

Router P

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router P:

1. Specify the number of aggregated Ethernet interfaces to be created.

```

[edit chassis]
user@P# set aggregated-devices ethernet device-count 2

```

2. Specify the members to be included within the aggregated Ethernet bundle.

```

[edit interfaces]
user@P# set ge-1/0/5 gigether-options 802.3ad ae1
user@P# set ge-1/0/11 gigether-options 802.3ad ae1

```

3. Configure an interface that connects to senders or receivers.

```

[edit interfaces ge-1/1/3]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-500

```

4. Configure parameters on the aggregated Ethernet bundle.

```

[edit interfaces ae1]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-110

```

5. Configure LACP on the aggregated Ethernet bundle.

```

[edit interfaces ae1 aggregated-ether-options]
user@P# set lacp active
user@P# set lacp system-priority 100

```

6. Configure a domain that includes the set of logical ports.

```

[edit bridge-domains bd0]
user@P# set vlan-id all
user@P# set domain-type bridge
user@P# set interface ge-1/1/3.0
user@P# set interface ae1.0

```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P# show bridge-domains
bd0 {
    domain-type bridge;
    vlan-id all;
    interface ge-1/1/3.0;
    interface ae1.0;
}

user@P# show chassis
aggregated-devices {
    ethernet {
        device-count 2;
    }
}

user@P# show interfaces
ge-1/0/5 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-1/0/11 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-1/1/3 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-500;
    }
}
ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
        }
    }
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
    }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly by running the following commands:

- `show iccp`
- `show interfaces ae0`
- `show interfaces ae1`
- `show interfaces mc-ae`
- `show l2-learning instance extensive`

Related Documentation

- [Multichassis Link Aggregation on Logical Systems Overview on page 67](#)
- *Configuring ICCP for MC-LAG*
- *show interfaces (Aggregated Ethernet)*

CHAPTER 4

Enabling High Availability in Layer 3 Networks Using VRRP and MAC Synchronization for MC-LAG

- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 139](#)
- [IGMP Snooping in MC-LAG Active-Active Mode on page 152](#)
- [Example: Configuring IGMP Snooping in MC-LAG Active-Active Mode on page 158](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on EX9200 Switches on page 174](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on EX9200 Switches on page 195](#)
- [Example: Configuring Multichassis Link Aggregation with Layer 3 MAC Address Synchronization on page 214](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization on page 236](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on page 253](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 280](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on MX Series Routers\[Warning: element unresolved in stylesheets: <author> \(in <title>\). This is probably a new element that is not yet supported in the stylesheets.\] on page 318](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on MX Series Routers on page 338](#)

Active-Active Bridging and VRRP over IRB Functionality Overview

Supported Platforms [MX Series, QFX Series](#)

Active-active bridging and Virtual Router Redundancy Protocol (VRRP) over integrated routing and bridging (IRB) is supported. This is a common scenario used in data centers. This section provides an overview of the supported functionality.



NOTE: If you are using the VRRP over IRB or RVI method to enable Layer 3 functionality, you must configure static ARP entries for the IRB or RVI interface of the remote MC-LAG peer to allow routing protocols to run over the IRB or RVI interfaces. .

Active-active bridging and VRRP over IRB support extend multichassis link aggregation group (MC-LAG) by adding the following functionality:

- Interchassis link (ICL) pseudowire interface or Ethernet interface (ICL-PL field) for active-active bridging
- Active-active bridging
- VRRP over IRB for active-active bridging
- A single bridge domain not corresponding to two redundancy group IDs

The following functionalities are supported for MC-LAG in an active-active bridging domain:

- MC-LAG is supported only between two chassis, using an interchassis link (ICL) pseudowire interface or Ethernet interface (ICL-PL field) for **active-active bridging**, and **active-active bridging** VRRP over IRB for **active-active bridging**.
- For VPLS networks, you can configure the aggregated Ethernet (aeX) interfaces on MC-LAG devices with the **encapsulation ethernet-vpls** statement to use Ethernet VPLS encapsulation on Ethernet interfaces that have VPLS enabled and that must accept packets carrying standard Tag Protocol ID (TPID) values or the **encapsulation vlan-vpls** statement to use Ethernet VLAN encapsulation on VPLS circuits.
- Layer 2 circuit functionalities are supported with **ethernet-ccc** as the encapsulation mode.
- Network topologies in a triangular and square pattern are supported. In a triangular network design, with equal-cost paths to all redundant nodes, slower, timer-based convergence can possibly be prevented. Instead of indirect neighbor or route loss detection using hellos and dead timers, you can identify the physical link loss and denote a path as unusable and reroute all traffic to the alternate equal-cost path. In a square network design, depending on the location of the failure, the routing protocol might converge to identify a new path to the subnet or the VLAN, causing the convergence of the network to be slower.
- Interoperation of Link Aggregation Control Protocol (LACP) for MC-LAG devices is supported. LACP is one method of bundling several physical interfaces to form one logical interface. When LACP is enabled, the local and remote sides of the aggregated Ethernet links exchange protocol data units (PDUs), which contain information about the state of the link. You can configure Ethernet links to actively transmit PDUs, or you can configure the links to passively transmit them, sending out LACP PDUs only when the links receive the PDUs from another link. One side of the link must be configured as active for the link to be up.

- Active-standby mode is supported using LACP. When an MC-LAG operates in the active-standby mode, one of the router's ports only becomes active when failure is detected in the active links. In this mode, the provider edge (PE) routers perform an election to determine the active and standby routers.
- Configuration of the pseudowire status type length variable (TLV) is supported. The pseudowire status TLV is used to communicate the status of a pseudowire back and forth between two PE routers. The pseudowire status negotiation process ensures that a PE router reverts back to the label withdraw method for pseudowire status if its remote PE router neighbor does not support the pseudowire status TLV.
- The MC-LAG devices use Inter-Chassis Control Protocol (ICCP) to exchange the control information between two MC-LAG network devices.

Keep the following points in mind when you configure MC-LAG in an active-active bridging domain:

- A single bridge domain cannot be associated with two redundancy groups. You cannot configure a bridge domain to contain logical interfaces from two different multichassis aggregated Ethernet interfaces and associate them with different redundancy group IDs by using the **redundancy group group-id** statement at the **[edit interfaces aeX aggregated-ether-options]** hierarchy level.
- You must configure logical interfaces in a bridge domain from a single multichassis aggregated Ethernet interface and associate it with a redundancy group. You must configure a service ID by including the **service-id vid** statement at the **[edit bridge-domains bd-name]** hierarchy level for multichassis aggregated Ethernet interfaces if you configure logical interfaces on multichassis aggregated Ethernet interfaces that are part of the bridge domain.

For a multichassis link aggregation group (MC-LAG) configured in an active-active bridge domain and with VRRP configured over an IRB interface, you must include the **accept-data** statement at the **[edit interfaces interface-name unit logical-unit-number family inet address address vrrp-group group-id]** hierarchy level to enable the router that functions as the master router to accept all packets destined for the virtual IP address.

On an MC-LAG, if you modify the source MAC address to be the virtual MAC address, you must specify the virtual IP address as the source IP address instead of the physical IP address. In such a case, the **accept-data** option is required for VRRP to prevent ARP from performing an incorrect mapping between IP and MAC addresses for customer edge (CE) devices. The **accept-data** attribute is needed for VRRP over IRB interfaces in MC-LAG to enable OSPF or other Layer 3 protocols and applications to work properly over multichassis aggregated Ethernet (mc-aeX) interfaces.



NOTE: On an MC-LAG, the unit number associated with aggregated Ethernet interfaces on provider edge router PE1 must match the unit number associated with aggregated Ethernet interfaces on provider edge router PE2. If the unit numbers differ, MAC address synchronization does not happen. As a result, the status of the MAC address on the remote provider edge router remains in a pending state.

In an IPv6 network, you cannot configure an MC-LAG in an active-active bridge domain if you specified the `vlan-id none` statement at the `[edit bridge-domain bd-name]` hierarchy level. The `vlan-id none` statement that enables the removal of the incoming VLAN tags identifying a Layer 2 logical interface when packets are sent over VPLS pseudowires is not supported for IPv6 packets in an MC-LAG.

The topologies shown in [Figure 5 on page 74](#) and [Figure 6 on page 74](#) are supported. These figures use the following abbreviations:

- Aggregated Ethernet (AE)
- Interchassis link (ICL)
- Multichassis link (MCL)

Figure 18: Single Multichassis Link


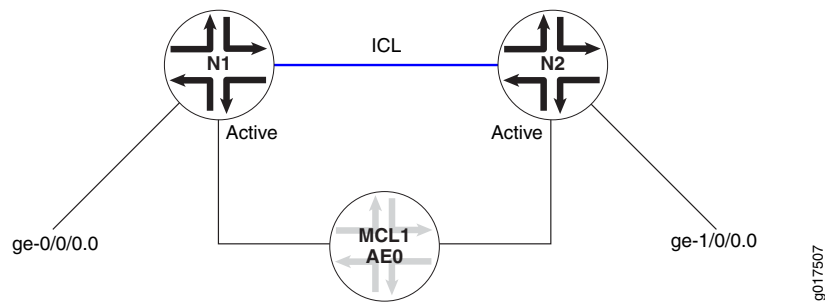


Figure 19: Dual Multichassis Link

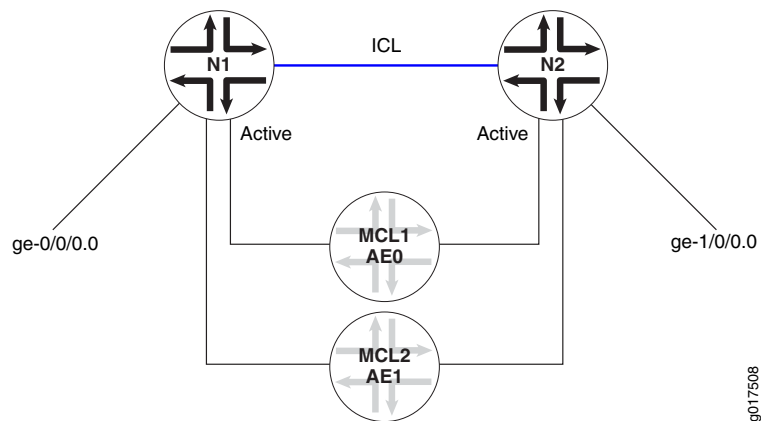

The following functionality is *not* supported:

- Virtual private LAN service (VPLS) within the core
- Bridged core
- Topology as described in Rule 4 of [“Data Traffic Forwarding Rules” on page 77](#)
- Routed multichassis aggregated Ethernet interface, where the VRRP backup router is used in the edge of the network

- Track object, where in the case of an MC-LAG, the status of the uplinks from the provider edge can be monitored, and the MC-LAG can act on the status
- Mixed mode (active-active MC-LAG is supported on MX Series routers with MPC or MIC interfaces only)

All interfaces in the bridge domain that are multichassis aggregated Ethernet active-active must be on MPCs or MICs.

The topologies shown in [Figure 7 on page 75](#), [Figure 8 on page 75](#), and [Figure 9 on page 75](#) are *not* supported:

Figure 20: Interchassis Data Link Between Active-Active Nodes

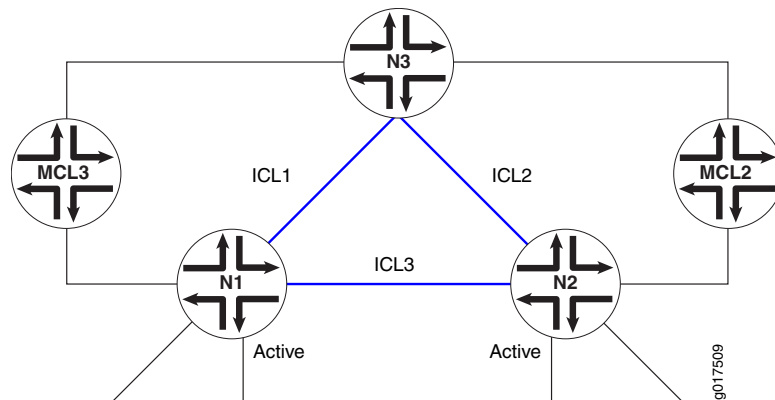


Figure 21: Active-Active MC-LAG with Single MC-LAG


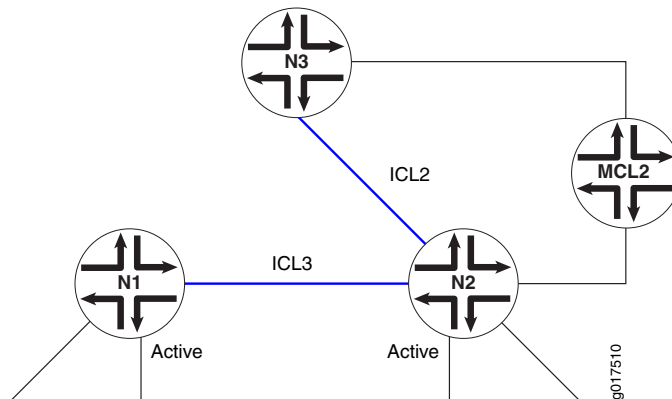


Figure 22: Active-Active MC-LAG with Multiple Nodes on a Single Multichassis Link

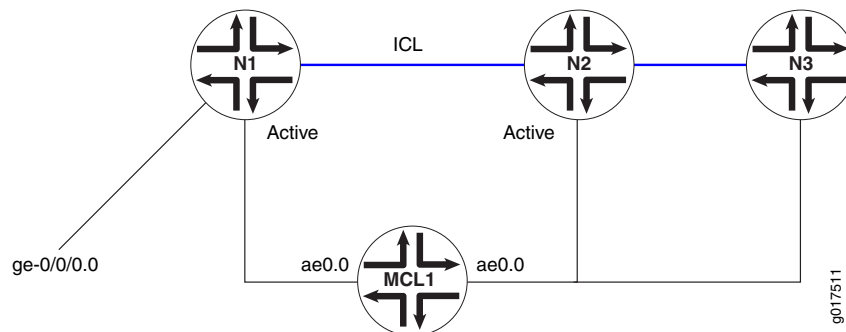

NOTE: A redundancy group cannot span more than two routers.


When configured to be active-active, the client device load-balances the traffic to the peering MC-LAG network devices. In a bridging environment, this could potentially cause the following problems:

- Traffic received on the MC-LAG from one MC-LAG network device could be looped back to the same MC-LAG on the other MC-LAG network device.
- Duplicated packets could be received by the MC-LAG client device.
- Traffic could be unnecessarily forwarded on the interchassis link.

To better illustrate the problems listed, consider [Figure 10 on page 76](#), where an MC-LAG device MCL1 and single-homed clients ge-0/0/0.0 and ge-1/0/0.0 are allowed to talk to each other through an ICL.

- Traffic received on network routing instance N1 from MCL1 could be flooded to ICL to reach network routing instance N2. Once it reaches network routing instance N2, it could flood again to MCL1.
- Traffic received on interface ge-0/0/0.0 could be flooded to MCL1 and ICL on network routing instance N1. Once network routing instance N2 receives such traffic from ICL, it could again be flooded to MCL1.
- If interface ge-1/0/0.0 does not exist on network routing instance N2, traffic received from interface ge-0/0/0.0 or MCL1 on network routing instance N1 could be flooded to network routing instance N2 through ICL unnecessarily since interface ge-0/0/0.0 and MCL1 could reach each other through network routing instance N1.

Figure 23: MC-LAG Device and Single-Homed Client

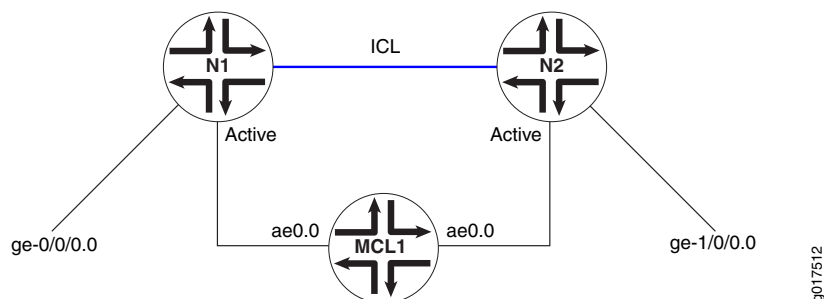

Advantages of Using Multichassis Link Aggregation Groups

An MC-LAG reduces operational expenses by providing active-active links with a LAG, eliminates the need for Spanning Tree Protocol (STP), and provides faster Layer 2 convergence upon link and device failures.

An MC-LAG adds node-level redundancy to the normal link-level redundancy that a LAG provides. An MC-LAG improves network resiliency, which reduces network down time as well as expenses.

In data centers, it is desirable for servers to have redundant connections to the network. You probably want active-active connections along with links from any server to at least two separate routers.

An MC-LAG allows you to bond two or more physical links into a logical link between two routers or between a server and a router, which improves network efficiency. An MC-LAG enables you to load-balance traffic on multiple physical links. If a link fails, the traffic can be forwarded through the other available link, and the logical aggregated link remains in the UP state.

Data Traffic Forwarding Rules

In active-active bridging and VRRP over IRB topographies, network interfaces are categorized into three different interface types, as follows:

S-Links—Single-homed link (S-Link) terminating on MC-LAG-N device or MC-LAG in active-standby mode. In [Figure 10 on page 76](#), interfaces ge-0/0/0.0 and ge-1/0/0.0 are S-Links.

MC-Links—MC-LAG links. In [Figure 10 on page 76](#), interface ae0.0 is the MC-Link.

ICL—Interchassis link.

Based on incoming and outgoing interface types, some constraints are added to the Layer 2 forwarding rules for MC-LAG configurations, as described in the data traffic forwarding rules. Note that if only one of the MC-LAG member link is in the UP state, it is considered an S-Link.

The following data traffic forwarding rules apply:

1. When an MC-LAG network receives a packet from a local MC-Link or S-Link, the packet is forwarded to other local interfaces, including S-Links and MC-Links based on the normal Layer 2 forwarding rules and on the configuration of the **mesh-group** and **no-local-switching** statements. If MC-Links and S-Links are in the same mesh group and their **no-local-switching** statements are enabled, the received packets are only forwarded upstream and not sent to MC-Links and S-Links.



NOTE: The functionality described in Rule 2 is *not* supported.

2. The following circumstances determine whether or not an ICL receives a packet from a local MC-Link or S-Link:
 - a. If the peer MC-LAG network device has S-Links or MC-LAGs that do not reside on the local MC-LAG network device
 - b. Whether or not interfaces on two peering MC-LAG network devices are allowed to talk to each other only if both a. and b. are true. Traffic is always forwarded to the ICL.
3. When an MC-LAG network receives a packet from the ICL, the packet is forwarded to all local S-Links and active MC-LAGs that do not exist in the MC-LAG network that the packet comes from.



NOTE: The topology shown in [Figure 11 on page 78](#) is *not* supported.


In certain cases, for example the topology shown in [Figure 11 on page 78](#), there could be a loop caused by the ICL. To break the loop, one of the following mechanisms could be used:

- a. Run certain protocols, such as STP. In this case, whether packets received on one ICL are forwarded to other ICLs is determined by using Rule 3.
- b. Configure the ICL to be fully meshed among the MC-LAG network devices. In this case, traffic received on the ICL would not be forwarded to any other ICLs.

In either case, duplicate packets could be forwarded to the MC-LAG clients. Consider the topology shown in [Figure 11 on page 78](#), where if network routing instance N1 receives a packet from ge-0/0/0.0, it could be flooded to ICL1 and ICL3.

When receiving from ICL1 and ICL3, network routing instances N3 and N2 could flood the same packet to MCL2, as shown in [Figure 11 on page 78](#). To prevent this from happening, the ICL designated forwarder should be elected between MC-LAG peers, and traffic received on an ICL could be forwarded to the active-active MC-LAG client by the designated forwarder only.

Figure 24: Loop Caused by the ICL Links

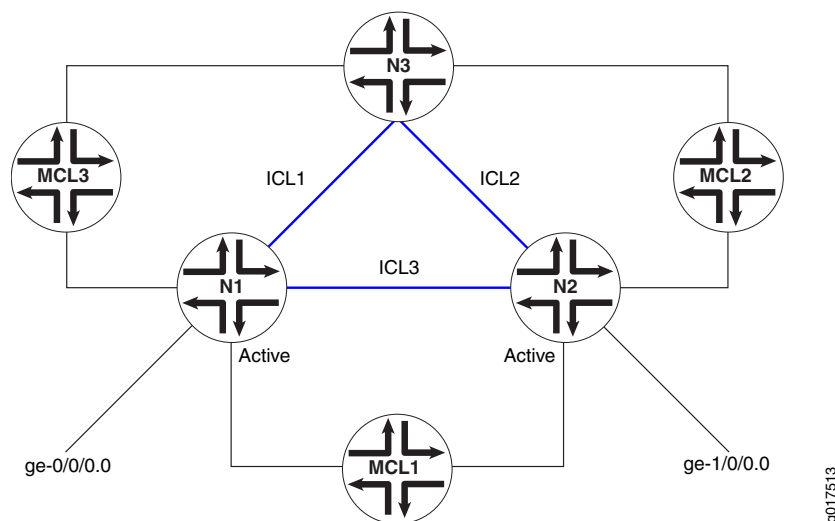

5. When received from an ICL, traffic should not be forwarded to the core-facing client link connection between two provider edge (PE) devices (MC-Link) if the peer chassis's (where the traffic is coming from) MC-Link is UP.

MAC Address Management

If an MC-LAG is configured to be active-active, upstream and downstream traffic could go through different MC-LAG network devices. Since the media access control (MAC) address is learned only on one of the MC-LAG network devices, the reverse direction's traffic could be going through the other MC-LAG network and be flooded unnecessarily. Also, a single-homed client's MAC address is only learned on the MC-LAG network device it is attached to. If a client attached to the peer MC-LAG network needs to communicate with that single-homed client, then traffic would be flooded on the peer MC-LAG network device. To avoid unnecessary flooding, whenever a MAC address is learned on one of the MC-LAG network devices, it gets replicated to the peer MC-LAG network device. The following conditions should be applied when MAC address replication is performed:

- MAC addresses learned on an MC-LAG of one MC-LAG network device should be replicated as learned on the same MC-LAG of the peer MC-LAG network device.
- MAC addresses learned on single-homed customer edge (CE) clients of one MC-LAG network device should be replicated as learned on the ICL-PL interface of the peer MC-LAG network device.
- MAC addresses learned on MC-LAG VE clients of one MC-LAG network device should be replicated as learned on the corresponding VE interface of the peer MC-LAG network device.
- MAC address learning on an ICL is disabled from the data path. It depends on software to install MAC addresses replicated through Inter-Chassis Control Protocol (ICCP).

MAC Aging

MAC aging support in Junos OS extends aggregated Ethernet logic for a specified MC-LAG. A MAC address in software is deleted until all Packet Forwarding Engines have deleted the MAC address. In the case of an MC-LAG, a remote provider edge is treated as a remote Packet Forwarding Engine and has a bit in the MAC data structure.

Layer 3 Routing

In general, when an MC-LAG is configured to provide Layer 3 routing functions to downstream clients, the MC-LAG network peers should be configured to provide the same gateway address to the downstream clients. To the upstream routers, the MC-LAG network peers could be viewed as either equal-cost multipath (ECMP) or two routes with different preference values.

Junos OS supports active-active MC-LAGs by using VRRP over IRB. Junos OS also supports active-active MC-LAGs by using IRB MAC address synchronization. You must configure IRB using the same IP address across MC-LAG peers. IRB MAC synchronization is supported on 32-bit interfaces and interoperates with earlier MPC and MIC releases.

To ensure that Layer 3 operates properly, instead of dropping the Layer 3 packet, the VRRP backup attempts to perform routing functions if the packet is received on an MC-LAG. A VRRP backup sends and responds to Address Resolution Protocol (ARP) requests.

For ARP, the same issue exists as with Layer 2 MAC addresses. Once ARP is learned, it must be replicated to the MC-LAG through ICCP. The peer must install an ARP route based on the ARP information received through ICCP.

For ARP aging, ARP requests on the MC-LAG peers can be aged out independently.

Address Resolution Protocol Active-Active MC-LAG Support Methodology

Suppose one of the PE routers issues an ARP request and another PE router gets the response and, because of the aggregated Ethernet distribution logic, the ARP resolution is not successful. Junos OS uses ARP response packet snooping to perform active-active multichassis link aggregation group support, providing easy synchronization without the need to maintain any specific state.


IGMP Snooping on Active-Active MC-LAG

For multicast to work in an active-active MC-LAG scenario, the typical topology is as shown in [Figure 12 on page 80](#) and [Figure 13 on page 81](#) with interested receivers over S-links and MC-Links. Starting in Junos OS Release 11.2, support is extended for sources connected over the Layer 2 interface.

If an MC-LAG is configured to be active-active, reports from MC-LAG clients could reach any of the MC-LAG network device peers. Therefore, the IGMP snooping module needs to replicate the states such that the Layer 2 multicast route state on both peers are the same. Additionally for S-Link clients, snooping needs to replicate these joins to its snooping peer, which in the case of Layer 3 connected source, passes this information to the PIM on IRB to enable the designated router to pull traffic for these groups,

The ICL should be configured as a router facing interface. For the scenario where traffic arrives through a Layer 3 interface, it is a requirement to have PIM and IGMP enabled on the IRB interface configured on the MC-LAG network device peers.

Figure 25: Multicast Topology with Source Connected Through Layer 3

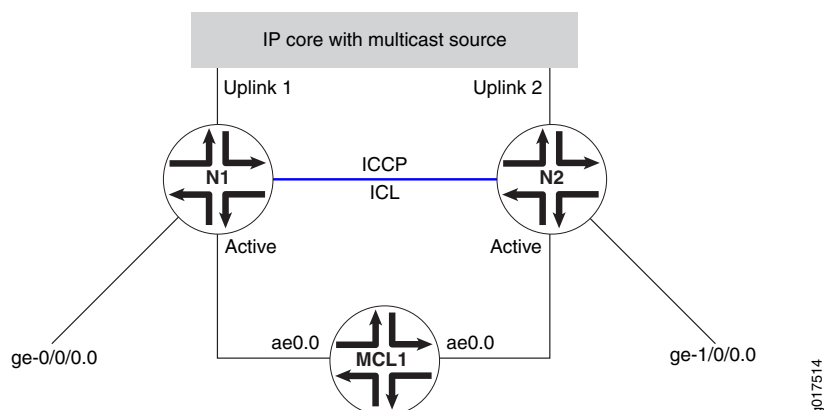


With reference to [Figure 12 on page 80](#), either Device N1 or N2 becomes a designated router (for this example, N1 is the designated router). Router N1 therefore pulls the multicast traffic from the core. Once multicast data hits the network Device N1, the data is forwarded based on the snooping learned route.

For MC-Link clients, data is forwarded through N1. In the case of failover of the MC-Links, the data reaches the client through N2. For S-Link clients on N1, data would be forwarded through normal snooping routes.

For S-Link clients on N2, data is forwarded through the ICL interface. Layer 2 multicast routes on N1 do not show these groups unless there is interest for the same group over MC-Links or over S-Links on N1. For the IRB scenario, the IGMP membership and Layer 3 multicast route on N1 does however show these groups learned over the IRB interface.

Therefore, for a case where a specific group interest is only on the S-Link on N2, data arriving on N1 reaches N2 through the default route, and the Layer 2 multicast route on N2 has the S-Link in the outgoing interface list.

Figure 26: Multicast Topology with Source Connected Through MC-Link

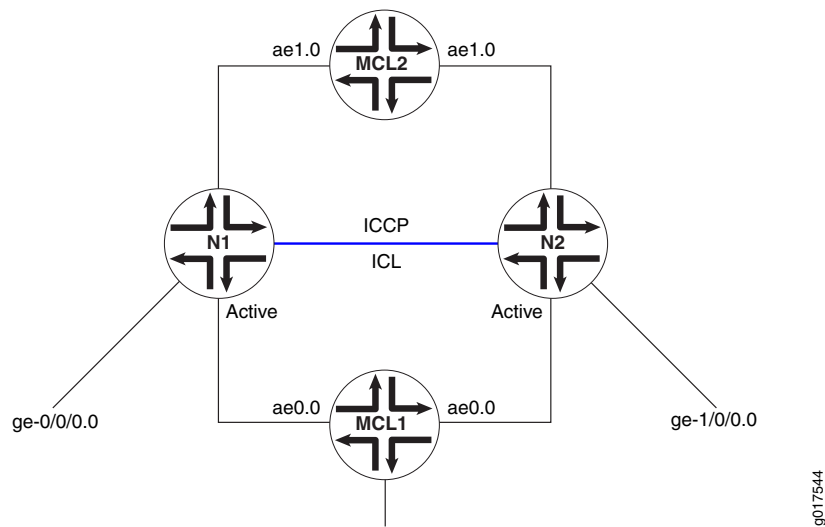

In Figure 13 on page 81, MCL1 and MCL2 are on different devices, and the multicast source or IGMP querier is connected through MCL2. The data forwarding behavior seen is similar to that explained for multicast topology with source connected through Layer 3.



NOTE: IGMP snooping should not be configured in proxy mode. There should be no IGMP hosts or IGMP or PIM routers sitting on the ICL interface.

Up and Down Event Handling

The following conditions apply to up and down event handling:

- If the Inter-Chassis Control Protocol (ICCP) connection is UP but the ICL interface goes DOWN, the router configured as the backup brings down all the multichassis aggregated Ethernet interfaces shared with the peer that is connected to ICL. This ensures that there are no loops in the network. Otherwise, both PEs become PIM-designated routers and, hence, forward multiple copies of the same packet to the customer edge.
- If the ICCP connection is UP and the ICL comes UP, the router configured as the backup brings up the multichassis aggregated Ethernet interfaces shared with the peer.
- If both the ICCP connection and the ICL are DOWN, the router configured as the backup brings up the multichassis aggregated Ethernet interfaces shared with the peer.
- The Layer 2 address learning process (l2ald) does not store the information about a MAC address learned from a peer in the kernel. If l2ald restarts, and if the MAC address was not learned from the local multichassis aggregated Ethernet interface, l2ald clears the MAC addresses, which causes the router to flood the packets destined to this MAC address. This behavior is similar to that in a Routing Engine switchover. (Note that currently l2ald runs on a Routing Engine only when it is a master). Also, during the time

l2ald is DOWN, ARP packets received from an ICCP peer are dropped. ARP retry takes care of this situation. This is the case with Routing Engine switchover, too.

- If ICCP restarts, l2ald does not identify that a MAC address was learned from a peer and, if the MAC address was learned only from the peer, that MAC address is deleted, and the packets destined to this MAC address are flooded.

VRRP Active-Standby Support

VRRP in active-standby mode enables Layer 3 routing over the multichassis aggregated Ethernet interfaces on the MC-LAG peers. In this mode, the MC-LAG peers act as virtual routers. The virtual routers share the virtual IP address that corresponds to the default route configured on the host or server connected to the MC-LAG. This virtual IP address, known as a routed VLAN interface (RVI), maps to either of the VRRP MAC addresses or the logical interfaces of the MC-LAG peers. The host or server uses the VRRP MAC address to send any Layer 3 upstream packets. At any time, one of the VRRP routers is the master (active), and the other is a backup (standby). Both VRRP active and VRRP backup routers forward Layer 3 traffic arriving on the multichassis aggregated Ethernet interface. If the master router fails, all the traffic shifts to the multichassis aggregated Ethernet link on the backup router.



NOTE: You must configure VRRP on both MC-LAG peers for both the active and standby members to accept and route packets. Additionally, configure the VRRP backup router to send and receive ARP requests.

Routing protocols run on the primary IP address of the RVI, and both of the MC-LAG peers run routing protocols independently. The routing protocols use the primary IP address of the RVI and the RVI MAC address to communicate with the MC-LAG peers. The RVI MAC address of each MC-LAG peer is replicated on the other MC-LAG peer and is installed as a MAC address that has been learned on the ICL-PL.

In many cases, MC-LAG devices are Layer 3 routing devices and perform the default gateway functionality for hosts that are part of the attached IP subnets. The MC-LAG device-pair can therefore share the default gateway routing functionality with the VRRP protocol. The VRRP active-standby operation can be optimized to be an active-active mode of processing because traffic flowing from an MC-LAG client to an MC-LAG device is always sent on one of the available links of an MC-LAG and reaches exactly one of the MC-LAG destination devices. Because of this behavior, both MC-LAG devices in the pair can be enabled as routers for IP traffic destined to the VRRP destination MAC address. Both MC-LAG devices must be full members of the routing domain and have routing entries that allow them to reach the IP destination networks.

The active-active functionality works without changing any VRRP state machine and by activating the routing function in the forwarding plane of the VRRP backup system (similar to the VRRP master). The mechanism enables traffic forwarding in Layer 3 to be fully redundant, leveraging all available link bandwidth. All routers forward traffic and thereby load-share routed traffic.

Inter-Chassis Control Protocol

Inter-Chassis Control Protocol (ICCP) is used to synchronize configurations, states, and data.

ICCP supports the following types of state information:

- MC-LAG members and their operational states
- Single-homed members and their operational states

ICCP supports the following application database synchronization parameters:

- MAC addresses learned and to be aged
- ARP information learned over IRB

Inter-Chassis Control Protocol Message

ICCP messages and attribute-value pairs (AVPs) are used for synchronizing MAC address and ARP information.

Related Documentation

- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)
- *multi-chassis-protection*
- *peer*
- *show interfaces mc-ae*
- *Ethernet Interfaces Feature Guide for Routing Devices*

IGMP Snooping in MC-LAG Active-Active Mode

Supported Platforms [MX240, MX480, MX960, QFX Series](#)

The following topics are included:

- [IGMP Snooping in MC-LAG Active-Active Mode Functionality on page 153](#)
- [Typically Supported Network Topology for IGMP Snooping with MC-LAG Active-Active Bridging on page 154](#)
- [Control Plane State Updates Triggered by Packets Received on Remote Chassis on page 154](#)
- [Data Forwarding on page 155](#)
- [Pure Layer 2 Topology Without Integrated Routing and Bridging on page 156](#)
- [Qualified Learning on page 156](#)
- [Data Forwarding with Qualified Learning on page 157](#)

- [Static Groups on Single-Homed Interfaces on page 157](#)
- [Router-Facing Interfaces as Multichassis Links on page 157](#)

IGMP Snooping in MC-LAG Active-Active Mode Functionality

Multichassis link aggregation group (MC-LAG) active-active mode and IGMP snooping in active-standby mode are supported. MC-LAG allows one device to form a logical LAG interface with two or more network devices. MC-LAG provides additional benefits including node level redundancy, multihoming, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP). The following features are supported:

- State synchronization between peers for IGMP snooping in a bridge domain with only Layer 2 interfaces
- Qualified learning
- Router-facing multichassis links

The following enhancements to active-active bridging and Virtual Router Redundancy Protocol (VRRP) over integrated routing and bridging (IRB) are supported:

- MC-LAG support for IGMP snooping in a pure Layer 2 switch
- MC-LAG support for IGMP snooping in bridge domains doing qualified learning
- Support for MC-Links being router-facing interfaces

The following functions are *not* supported:


- MC-LAG for VPLS instances
- MC-Links trunk ports
- Proxy mode for active-active
- Adding interchassis links to outgoing interfaces on an as needed basis

Interchassis links can be added to the outgoing interface list as router-facing interfaces.

Typically Supported Network Topology for IGMP Snooping with MC-LAG Active-Active Bridging

Figure 27 on page 154 depicts a typical network topology over which IGMP snooping with MC-LAG active-active bridging is supported.

Figure 27: Typical Network Over Which Active-Active Is Supported

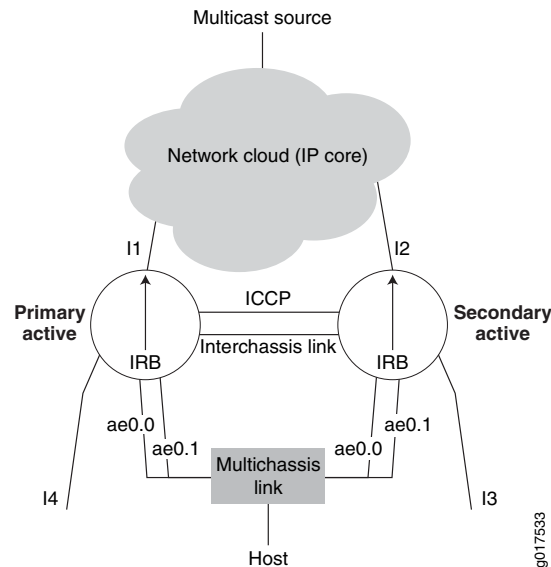

Interfaces I3 and I4 are single-homed interfaces. The multichassis links ae0.0 and ae0.1 belong to the same bridge domain in both the chassis. Interfaces I3, ae0.0, and ae0.1 are in the same bridge domain in the secondary active (S-A) router. Interfaces I4, ae0.0, and ae0.1 are in the same bridge domain in the primary active (P-A) router. Interfaces I3, I4, ae0.0, and ae0.1 are in the same learning domain as is the interchassis link (ICL) connecting the two chassis.

The primary active router is the chassis in which integrated routing and bridging has become PIM-DR. The secondary active router is the chassis in which integrated routing and bridging is not PIM-DR. Router P-A is the chassis responsible for pulling traffic from the IP core. Hence, PIM-DR election is used to avoid duplication of data traffic.

Learning domains are described in [“Qualified Learning” on page 156](#).

For the IGMP speakers (hosts and routers) in the learning domain, P-A and S-A together should appear as one device with interfaces I4, I3, ae0.0, and ae0.1.

No duplicate control packets should be sent on multichassis links, meaning the control packet should be sent through only one link.

Control Plane State Updates Triggered by Packets Received on Remote Chassis

Following are the control plane state updates that are triggered by the packets received on remote chassis:

- The membership state in Layer 3 multicast routing is updated as a result of reports learned on remote legs of multichassis links and S-links attached to the remote chassis.

- The membership state and routing entry in snooping are updated when reports are received on the remote legs of a multichassis link.



NOTE:

- When reports are received on S-links attached to the remote chassis, the membership state or routing entry in snooping is not updated.
 - When synchronizing multicast snooping state between PE routers, timers, such as the Group Membership Timeout timer, are not synchronized. When the synch notification is received, the remote PE router receiving the notification starts or restarts the relevant timer.
 - The list of <s,g>s for which the state is maintained is the same in both the chassis under snooping as long as the outgoing interface lists involve only multichassis links.
-

Data Forwarding

This discussion assumes integrated routing and bridging on Router P-A is the PIM-DR. It pulls the traffic from sources in the core. Traffic might also come on Layer 2 interfaces in the bridge domain. For hosts directly connected to the P-A chassis, there is no change in the way data is delivered.


For delivering traffic to hosts connected to S-A (which is the non-DR) on the single-homed link like I3, we rely on the interchassis link. The traffic that hits P-A is sent over ICL to S-A to be delivered to the links that have reported interests in s,g and the links that are router-facing.

When the ae0 leg in P-A goes down, the hosts connected to the multichassis link receive traffic through ICL. In S-A, traffic received on ICL is sent to multichassis links in the outgoing interface list for which the ae counterpart in P-A is down.

Pure Layer 2 Topology Without Integrated Routing and Bridging

Figure 28 on page 156 shows that the chassis connecting to the PIM-DR is the primary active (P-A) router and the other is the secondary active (S-A) router.

Figure 28: Layer 2 Configuration Without Integrated Routing and Bridging

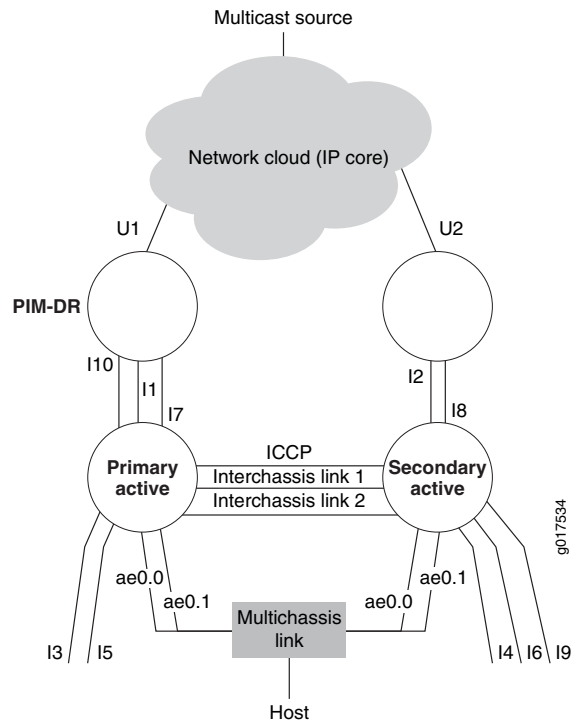

Qualified Learning

In this topology, interfaces I1, I2, I3, I4, I5, I6, I7, I8, I9, and I10 are single-homed interfaces. The multichassis links ae0.0 and ae0.1 belong to the same bridge domain in both the chassis. Interfaces I10, I1, I7, I3, I5, ae0.0 and ae0.1 are in same bridge domain, bd1 in P-A. Interfaces I9, I2, I8, I4, I6, ae0.0, and ae0.1 are in same bridge domain, bd1 in S-A.

This discussion assumes the following configuration:

- In P-A and S-A, qualified learning is ON in bd1.
- Interfaces I1, I2, I3, ae0.0, and I4 belong to vlan1, learning domain ld1.
- Interfaces I7, I8, I5, ae0.1, and I6 belong to vlan2, learning domain ld2.
- Interfaces I9 and I10 belong to vlan3, learning domain ld3.

For the IGMP speakers (hosts and routers) in the same learning domain ld1, P-A and S-A linked should appear to be one switch.

For the IGMP speakers (hosts and routers) in the same learning domain ld2, P-A and S-A linked should appear to be one switch.

Since there are no multichassis links in learning domain ld3, for the IGMP speakers (hosts and routers) in learning domain ld3, P-A and S-A will not appear to be one switch.

This discussion assumes interchassis link ICL1 corresponds to learning domain ld1 and interchassis link ICL2 corresponds to learning domain ld2.

Control packet flow is supported, with the exception of passing information to IRB.

Data Forwarding with Qualified Learning

This discussion assumes one learning domain (LD), ld1, and further assumes that interface I1 on Router P-A is connected to the PIM-DR in the learning domain and pulls the traffic from sources in the core.

For delivering traffic to hosts connected to Router S-A (which is the non-DR) on the single-homed link like I2, I4 (belonging to ld1), we rely on ICL1. The traffic that hits Router P-A on interface I1 is sent over interchassis link ICL1 to Router S-A to be delivered to the links that have reported interests in s,g or the links that are router-facing in learning domain ld1.

When the interface ae0 leg in Router P-A goes down, the hosts connected to the multichassis link receive traffic from interface I1 using the interchassis link ICL1. In Router S-A, traffic received on interchassis link ICL1 is sent to multichassis links in the outgoing interface list for which the aggregated Ethernet counterpart in Router P-A is down.

It is further assumed that interface I9 in Router S-A belongs to the learning domain ld3 with interests in s,g, and that interface I10 in learning domain ld3 in Router P-A receives traffic for s,g. Interface I9 does not receive data in this topology because there are no multichassis links (in a-a mode) and hence no interchassis link in learning domain ld3.

Static Groups on Single-Homed Interfaces

For multichassis links, the static group configuration should exist on both legs, and synchronization with the other chassis is not required.

Synchronization of the static groups on single-homed interfaces between the chassis is not supported. However, the addition of logical interfaces to the default outgoing interface list supports traffic delivery to the interface within a static configuration.

Router-Facing Interfaces as Multichassis Links

IGMP queries could arrive on either leg of the multichassis links, but in both peers, the multichassis link should be considered as router-facing.

Reports should exit only once from the multichassis link, that is, from only one leg.

The following MC-LAG support for IGMP snooping in IRB is provided:

- Non-proxy snooping
- Logical interfaces must be outgoing interfaces for all routes including the default route
- IGMP snooping in a pure Layer 2 switch

- IGMP snooping in bridge domains doing qualified learning
- Router-facing interface MC-Links

The following features are *not* supported:

- Proxy mode for active-active
- MC-LAG support for VPLS instances
- Trunk ports as multichassis links
- Adding logical interfaces to outgoing interfaces on an as need basis.

However, logical interfaces are always added as a router-facing interface to the outgoing interface list.

Related Documentation

- [Configuring IGMP Snooping in MC-LAG Active-Active Mode on page 92](#)
- [Example: Configuring IGMP Snooping in MC-LAG Active-Active Mode on page 158](#)
- [Example: Configuring IGMP Snooping](#)
- [igmp-snooping](#)
- [multicast-router-interface](#)
- [show l2-learning instance](#)
- [Ethernet Interfaces Feature Guide for Routing Devices](#)

Example: Configuring IGMP Snooping in MC-LAG Active-Active Mode

Supported Platforms [MX240, MX480, MX960, QFX Series](#)

This example shows how to configure Internet Group Management Protocol (IGMP) snooping for uninterrupted traffic flow with a multichassis link aggregation group (MC-LAG) in an active-active scenario.

- [Requirements on page 158](#)
- [Overview on page 159](#)
- [Configuring the PE Routers on page 160](#)
- [Configuring the CE Device on page 169](#)
- [Configuring the Provider Router on page 172](#)
- [Verification on page 174](#)

Requirements

This example uses the following hardware and software components:



NOTE: This example also applies to QFX10002 and QFX10008 switches.

- Four Juniper Networks MX Series routers
- Junos OS Release 11.2 or later running on all four routers

Before you begin, make sure that Protocol Independent Multicast (PIM) and Internet Group Management Protocol (IGMP) are running on all interfaces that will receive multicast packets. IGMP is automatically enabled on all IPv4 interfaces on which you configure PIM.

Overview

When links are aggregated, the links can be treated as if they were a single link. Link aggregation increases bandwidth, provides graceful degradation as failure occurs, and increases availability. MC-LAG provides redundant Layer 2 access connectivity at the node level. This enables two or more systems to share a common LAG endpoint. The multiple endpoints present a single logical chassis to the start point, and the start node does not need to be aware that MC-LAG is being used.

In this example, the CE router is not aware that its aggregated Ethernet links are connected to two separate PE devices. The two PE devices each have a LAG connected to the CE device. The configured mode is active-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time.



NOTE: The other possible mode is active-standby, in which one of the router's ports only becomes active when failure is detected in the active links. In active-standby mode, the PE routers perform an election to determine the active and standby routers.

In [Figure 29 on page 160](#), from the perspective of the CE device, all four ports belonging to a LAG are connected to a single service provider device. Because the configured mode is active-active, all four ports are active, and the CE device load-balances the traffic to the peering PE devices. On the PE routers, a regular LAG is configured facing the CE device.


Inter-Chassis Control Protocol (ICCP) messages are sent between the two PE devices. These messages exchange MC-LAG configuration parameters and ensure that both chassis use the correct Link Aggregation Control Protocol (LACP) parameters when talking to the CE device.

The interchassis link-protection link (ICL) provides redundancy when a link failure occurs on one of the active links. The ICL-PL between the MC-LAG peering devices relays traffic that would otherwise be dropped due to a link failure.

Topology Diagram

[Figure 29 on page 160](#) shows the topology used in this example.

Figure 29: IGMP Snooping in MC-LAG Active-Active Mode on MX Series Routers

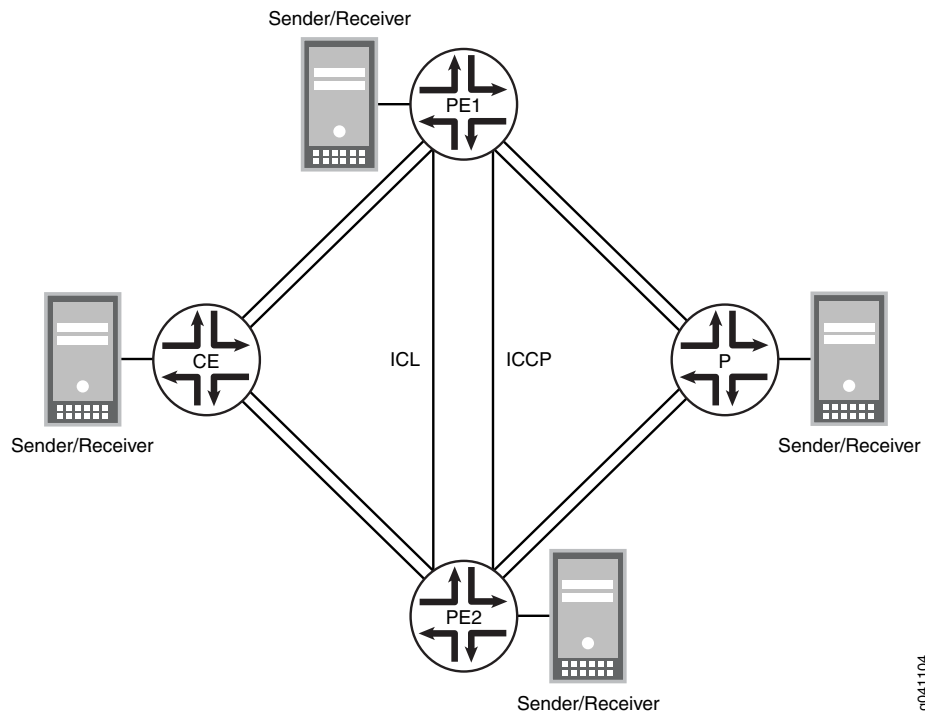

g041104

Configuring the PE Routers

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
Router PE1
set chassis aggregated-devices ethernet device-count 5
set interfaces ge-1/0/1 gigether-options 802.3ad ae1
set interfaces ge-1/0/2 unit 0 family inet address 10.100.100.1/30
set interfaces ge-1/0/6 gigether-options 802.3ad ae0
set interfaces ge-1/1/1 flexible-vlan-tagging
set interfaces ge-1/1/1 encapsulation flexible-ethernet-services
set interfaces ge-1/1/1 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/1 unit 0 vlan-id-range 100-110
set interfaces ge-1/1/4 flexible-vlan-tagging
set interfaces ge-1/1/4 encapsulation flexible-ethernet-services
set interfaces ge-1/1/4 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/4 unit 0 vlan-id-range 100-110
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 1
```

```

set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 service-id 20
set bridge-domains bd0 interface ae1.0
set bridge-domains bd0 interface ge-1/0/3.0
set bridge-domains bd0 interface ge-1/1/1.0
set bridge-domains bd0 interface ge-1/1/4.0
set bridge-domains bd0 interface ae0.0
set bridge-domains bd0 multicast-snooping-options multichassis-lag-replicate-state
set bridge-domains bd0 protocols igmp-snooping vlan 100 interface ge-1/1/4.0
    multicast-router-interface
set bridge-domains bd0 protocols igmp-snooping vlan 101 interface ge-1/1/4.0
    multicast-router-interface
set bridge-domains bd0 protocols igmp-snooping vlan 200 interface ge-1/1/4.0
    multicast-router-interface
set multicast-snooping-options multichassis-lag-replicate-state
set protocols iccp local-ip-addr 10.100.100.1
set protocols iccp peer 10.100.100.2 redundancy-group-id-list 10
set protocols iccp peer 10.100.100.2 liveness-detection minimum-interval 1000
set switch-options service-id 10

```

Router PE2

```

set chassis aggregated-devices ethernet device-count 5
set interfaces ge-1/0/2 unit 0 family inet address 10.100.100.2/30
set interfaces ge-1/0/3 flexible-vlan-tagging
set interfaces ge-1/0/3 encapsulation flexible-ethernet-services
set interfaces ge-1/0/3 unit 0 encapsulation vlan-bridge
set interfaces ge-1/0/3 unit 0 vlan-id-range 100-110
set interfaces ge-1/0/4 flexible-vlan-tagging
set interfaces ge-1/0/4 encapsulation flexible-ethernet-services
set interfaces ge-1/0/4 unit 0 encapsulation vlan-bridge
set interfaces ge-1/0/4 unit 0 vlan-id-range 100-110
set interfaces ge-1/0/5 gigether-options 802.3ad ae0
set interfaces ge-1/1/0 gigether-options 802.3ad ae1
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100

```

```
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 service-id 20
set bridge-domains bd0 interface ae1.0
set bridge-domains bd0 interface ge-1/0/3.0
set bridge-domains bd0 interface ge-1/0/4.0
set bridge-domains bd0 interface ae0.0
set bridge-domains bd0 multicast-snooping-options multichassis-lag-replicate-state
set bridge-domains bd0 protocols igmp-snooping vlan 100 interface ge-1/0/4.0
    multicast-router-interface
set bridge-domains bd0 protocols igmp-snooping vlan 101 interface ge-1/0/4.0
    multicast-router-interface
set bridge-domains bd0 protocols igmp-snooping vlan 200 interface ge-1/0/4.0
    multicast-router-interface
set multicast-snooping-options multichassis-lag-replicate-state
set protocols iccp local-ip-addr 10.100.100.2
set protocols iccp peer 10.100.100.1 redundancy-group-id-list 10
set protocols iccp peer 10.100.100.1 liveness-detection minimum-interval 1000
set switch-options service-id 10
```

Configuring the PE1 Router

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router PE1:

1. Specify the number of aggregated Ethernet interfaces to be created.

[edit chassis]

```
user@PE1# set aggregated-devices ethernet device-count 5
```

2. Specify the members to be included within the aggregated Ethernet bundles.

```
[edit interfaces]
```

```
user@PE1# set ge-1/0/1 gigether-options 802.3ad ae1
```

```
user@PE1# set ge-1/0/6 gigether-options 802.3ad ae0
```

3. Configure the interfaces that connect to multicast senders or receivers, the ICL interfaces, and the ICCP interfaces.

```
[edit interfaces]
```

```
user@PE1# set ge-1/1/1 flexible-vlan-tagging
```

```
user@PE1# set ge-1/1/1 encapsulation flexible-ethernet-services
```

```
user@PE1# set ge-1/1/1 unit 0 encapsulation vlan-bridge
```

```
user@PE1# set ge-1/1/1 unit 0 vlan-id-range 100-110
```

```
user@PE1# set ge-1/1/4 flexible-vlan-tagging
```

```
user@PE1# set ge-1/1/4 encapsulation flexible-ethernet-services
```

```
user@PE1# set ge-1/1/4 unit 0 encapsulation vlan-bridge
```

```
user@PE1# set ge-1/1/4 unit 0 vlan-id-range 100-110
```

```
user@PE1# set ge-1/0/2 unit 0 family inet address 10.100.100.1/30
```

4. Configure parameters on the aggregated Ethernet bundles.

```
[edit interfaces ae0]
```

```
user@PE1# set flexible-vlan-tagging
```

```
user@PE1# set encapsulation flexible-ethernet-services
```

```
user@PE1# set unit 0 encapsulation vlan-bridge
```

```
user@PE1# set unit 0 vlan-id-range 100-110
```

```
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
```

```
[edit interfaces ae1]
```

```
user@PE1# set flexible-vlan-tagging
```

```
user@PE1# set encapsulation flexible-ethernet-services
```

```
user@PE1# set unit 0 encapsulation vlan-bridge
```

```
user@PE1# set unit 0 vlan-id-range 100-110
```

```
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
```

5. Configure LACP on the aggregated Ethernet bundles.

```
[edit interfaces ae0 aggregated-ether-options]
```

```
user@PE1# set lacp active
```

```
user@PE1# set lacp system-priority 100
```

```
user@PE1# set lacp system-id 00:00:00:00:00:05
```

```
user@PE1# set lacp admin-key 1
```

```
[edit interfaces ae1 aggregated-ether-options]
```

```
user@PE1# set lacp active
```

```
user@PE1# set lacp system-priority 100
```

```
user@PE1# set lacp system-id 00:00:00:00:00:05
```

```
user@PE1# set lacp admin-key 1
```

6. Configure the MC-LAG interfaces.

```
[edit interfaces ae0 aggregated-ether-options]
```

```
user@PE1# set mc-ae mc-ae-id 5
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active
```

```
[edit interfaces ae1 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 10
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active
```

The multichassis aggregated Ethernet identification number (**mc-ae-id**) specifies which link aggregation group the aggregated Ethernet interface belongs to. The ae0 interfaces on Router PE1 and Router PE2 are configured with **mc-ae-id 5**. The ae1 interfaces on Router PE1 and Router PE2 are configured with **mc-ae-id 10**. (To refer to the configuration on Router PE2, see [“Router PE2” on page 104](#)).

The **redundancy-group 10** statement is used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other. The ae0 and ae1 interfaces on Router PE1 and Router PE2 are configured with the same redundancy group, **redundancy-group 10**.

The **chassis-id** statement is used by LACP for calculating the port number of the MC-LAG's physical member links. Router PE1 uses **chassis-id 1** to identify both its ae0 and ae1 interfaces. Router PE2 (as shown in [“Router PE2” on page 104](#)) uses **chassis-id 0** to identify both its ae0 and ae1 interfaces.

The **mode** statement indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

7. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@PE1# set domain-type bridge
user@PE1# set vlan-id all
user@PE1# set service-id 20
user@PE1# set interface ae0.0
user@PE1# set interface ae1.0
user@PE1# set interface ge-1/0/3.0
user@PE1# set interface ge-1/1/1.0
user@PE1# set interface ge-1/1/4.0
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case Router PE1 and Router PE2), and should be configured with the same value.

8. At the global level and also in the bridge domain, replicate IGMP join and leave messages from the active link to the standby link of a dual-link MC-LAG interface, to enable faster recovery of membership information after failover.

```
[edit multicast-snooping-options]
user@PE1# set multichassis-lag-replicate-state
```

```
[edit bridge-domains bd0 multicast-snooping-options]
user@PE1# set multichassis-lag-replicate-state
```

9. (Optional) Suppress MC-LAG reports to optimize the syncing of the ICCP messages. By default, every IGMP packet received on the MC-AE interface is replicated to the peer. If multiple hosts behind the CE router send reports for the same group, all the packets are synced even though only a single report is used for building the IGMP snooping state on the peer. Also all subsequent refreshes sent in response to the IGMP queries are also synced to this peer. This requires significant CPU cycles on both peers which send and receive these reports over ICCP. Starting with Junos OS Release 16.1, you can configure the **suppress-report** statement at the **[edit multicast-snooping-options multichassis-lag-replicate-state]** hierarchy level to optimize the syncing of the ICCP messages.

```
[edit multicast-snooping-options]
user@PE1# set multichassis-lag-replicate-state suppress-report
```

Optimizing the syncing of ICCP messages ensures that the message exchanges using ICCP between the peers is more efficient. This also improves scaling by ensuring that the membership state is present only at the receiving PE.



NOTE:

- Because the IGMP reports/leaves sent between the MC-LAG peers are suppressed, IGMP snooping statistics will not be the same on both peers. Total statistics will be the sum of the IGMP reports received on both MCLAG peers.
- When MC-LAG reports are suppressed, the MCSNOOPD client application will not receive the source IP address (host information).

10. Configure multicast snooping for the MC-LAG interfaces.

```
[edit bridge-domains bd0]
user@PE1# set protocols igmp-snooping vlan 100 interface ge-1/1/4.0
multicast-router-interface
user@PE1# set protocols igmp-snooping vlan 101 interface ge-1/1/4.0
multicast-router-interface
user@PE1# set protocols igmp-snooping vlan 200 interface ge-1/1/4.0
multicast-router-interface
```



NOTE: Starting with Junos OS Release 16.1, you can selectively add ICL to preserve ICL bandwidth. To do this, you must *not* configure the ICL as an multicast-router-interface as specified in this step. Instead, you must configure the enhanced-ip statement.

When you configure to selectively add ICL, control packets are directly sent from PFE to RPD. Therefore, if an IRB interface is attached to a bridge-domain, the proxy functionality in the L2 domain will not be effective because MCSNOOPD only proxies to external routers connected to the physical interfaces. In such scenarios, you can enable proxy to IRB. To do this, configure the `irb` statement at the `[edit protocols igmp-snooping proxy]` hierarchy level.

11. Configure ICCP parameters.

```
[edit protocols iccp]
user@PE1# set local-ip-addr 10.100.100.1
user@PE1# set peer 10.100.100.2 redundancy-group-id-list 10
user@PE1# set peer 10.100.100.2 liveness-detection minimum-interval 1000
```

12. Configure the service ID at the global level.

```
[edit switch-options]
user@PE1# set service-id 10
```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Results

From configuration mode, confirm your configuration by entering the `show bridge-domains`, `show chassis`, `show interfaces`, `show multicast-snooping-options`, `show protocols`, and `show switch-options` commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  service-id 20;
  interface ae1.0;
  interface ge-1/0/3.0;
  interface ge-1/1/1.0;
  interface ge-1/1/4.0;
  interface ae0.0;
  multicast-snooping-options {
    multichassis-lag-replicate-state;
  }
  protocols {
    igmp-snooping {
```



```
vlan 100 {
  interface ge-1/1/4.0 {
    multicast-router-interface;
  }
}
vlan 101 {
  interface ge-1/1/4.0 {
    multicast-router-interface;
  }
}
vlan 200 {
  interface ge-1/1/4.0 {
    multicast-router-interface;
  }
}
}
}

user@PE1# show chassis
aggregated-devices {
  ethernet {
    device-count 5;
  }
}

user@PE1# show interfaces
ge-1/0/1 {
  gicether-options {
    802.3ad ae1;
  }
}
ge-1/0/6 {
  gicether-options {
    802.3ad ae0;
  }
}
ge-1/0/2 {
  unit 0 {
    family inet {
      address 10.100.100.1/30;
    }
  }
}
ge-1/1/1 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
  unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
  }
}
ge-1/1/4 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
  unit 0 {
    encapsulation vlan-bridge;
```

```
        vlan-id-range 100-110;
    }
}
ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
            system-id 00:00:00:00:00:05;
            admin-key 1;
        }
        mc-ae {
            mc-ae-id 5;
            redundancy-group 10;
            chassis-id 1;
            mode active-active;
            status-control active;
        }
    }
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
    multi-chassis-protection 10.100.100.2 {
        interface ge-1/1/4.0;
    }
}
}
ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
            system-id 00:00:00:00:00:05;
            admin-key 1;
        }
        mc-ae {
            mc-ae-id 10;
            redundancy-group 10;
            chassis-id 1;
            mode active-active;
            status-control active;
        }
    }
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
    multi-chassis-protection 10.100.100.2 {
        interface ge-1/1/4.0;
    }
}
}
```

```

user@PE1# show multicast-snooping-options
multichassis-lag-replicate-state;

user@PE1# show protocols
iccp {
  local-ip-addr 10.100.100.1;
  peer 10.100.100.2 {
    redundancy-group-id-list 10;
    liveness-detection {
      minimum-interval 1000;
    }
  }
}

user@PE1# run show switch-options
service-id 10;

```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure for Router PE2, using the appropriate interface names and addresses.

Configuring the CE Device

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```

Device CE  set chassis aggregated-devices ethernet device-count 2
            set interfaces ge-2/0/2 gigether-options 802.3ad ae0
            set interfaces ge-2/0/3 gigether-options 802.3ad ae0
            set interfaces ge-2/1/6 flexible-vlan-tagging
            set interfaces ge-2/1/6 encapsulation flexible-ethernet-services
            set interfaces ge-2/1/6 unit 0 encapsulation vlan-bridge
            set interfaces ge-2/1/6 unit 0 vlan-id-range 100-110
            set interfaces ae0 flexible-vlan-tagging
            set interfaces ae0 encapsulation flexible-ethernet-services
            set interfaces ae0 aggregated-ether-options lacp active
            set interfaces ae0 aggregated-ether-options lacp system-priority 100
            set interfaces ae0 unit 0 encapsulation vlan-bridge
            set interfaces ae0 unit 0 vlan-id-range 100-500
            set bridge-domains bd0 domain-type bridge
            set bridge-domains bd0 vlan-id all
            set bridge-domains bd0 interface ge-2/1/6.0
            set bridge-domains bd0 interface ae0.0

```

Configuring the CE Device

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure the CE device:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@CE# set aggregated-devices ethernet device-count 2
```

2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]
user@CE# set ge-2/0/2 gigether-options 802.3ad ae0
user@CE# set ge-2/0/3 gigether-options 802.3ad ae0
```

3. Configure an interface that connects to multicast senders or receivers.

```
[edit interfaces ge-2/1/6]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge
user@CE# set unit 0 vlan-id-range 100-110
```

4. Configure parameters on the aggregated Ethernet bundle.

```
[edit interfaces ae0]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge
user@CE# set unit 0 vlan-id-range 100-500
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit interfaces ae0 aggregated-ether-options]
user@CE# set lacp active
user@CE# set lacp system-priority 100
```

The **active** statement initiates transmission of LACP packets.

For the **system-priority** statement, a smaller value indicates a higher priority. The device with the lower system priority value determines which links between LACP partner devices are active and which are in standby mode for each LACP group. The device on the controlling end of the link uses port priorities to determine which ports are bundled into the aggregated bundle and which ports are put in standby mode. Port priorities on the other device (the noncontrolling end of the link) are ignored.

6. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@CE# set domain-type bridge
user@CE# set vlan-id all
user@CE# set interface ge-2/1/6.0
user@CE# set interface ae0.0
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE# show bridge-domains
bd0 {
    domain-type bridge;
    vlan-id all;
    interface ge-2/1/6.0;
    interface ae0.0;
}

user@CE# show chassis
aggregated-devices {
    ethernet {
        device-count 2;
    }
}

user@CE# show interfaces
ge-2/0/2 {
    gigether-options {
        802.3ad ae0;
    }
}
ge-2/0/3 {
    gigether-options {
        802.3ad ae0;
    }
}
ge-2/1/6 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
    }
}
ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
        }
    }
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-500;
```

```
}  
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring the Provider Router

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

Router P

```
set chassis aggregated-devices ethernet device-count 2  
set interfaces ge-1/0/5 gigether-options 802.3ad ae1  
set interfaces ge-1/0/11 gigether-options 802.3ad ae1  
set interfaces ge-1/1/3 flexible-vlan-tagging  
set interfaces ge-1/1/3 encapsulation flexible-ethernet-services  
set interfaces ge-1/1/3 unit 0 encapsulation vlan-bridge  
set interfaces ge-1/1/3 unit 0 vlan-id-range 100-500  
set interfaces ae1 flexible-vlan-tagging  
set interfaces ae1 encapsulation flexible-ethernet-services  
set interfaces ae1 aggregated-ether-options lacp active  
set interfaces ae1 aggregated-ether-options lacp system-priority 100  
set interfaces ae1 unit 0 encapsulation vlan-bridge  
set interfaces ae1 unit 0 vlan-id-range 100-110  
set bridge-domains bd0 vlan-id all  
set bridge-domains bd0 domain-type bridge  
set bridge-domains bd0 interface ge-1/1/3.0  
set bridge-domains bd0 interface ae1.0
```

Configuring the P Router

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router P:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]  
user@P# set aggregated-devices ethernet device-count 2
```
2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]  
user@P# set ge-1/0/5 gigether-options 802.3ad ae1  
user@P# set ge-1/0/11 gigether-options 802.3ad ae1
```
3. Configure an interface that connects to multicast senders or receivers.

```
[edit interfaces ge-1/1/3]  
user@P# set flexible-vlan-tagging  
user@P# set encapsulation flexible-ethernet-services  
user@P# set unit 0 encapsulation vlan-bridge  
user@P# set unit 0 vlan-id-range 100-500
```

4. Configure parameters on the aggregated Ethernet bundle.

```
[edit interfaces ae1]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-110
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit interfaces ae1 aggregated-ether-options]
user@P# set lacp active
user@P# set lacp system-priority 100
```

6. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@P# set vlan-id all
user@P# set domain-type bridge
user@P# set interface ge-1/1/3.0
user@P# set interface ae1.0
```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  interface ge-1/1/3.0;
  interface ae1.0;
}

user@P# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@P# show interfaces
ge-1/0/5 {
  gigether-options {
    802.3ad ae1;
  }
}
ge-1/0/11 {
  gigether-options {
    802.3ad ae1;
  }
}
ge-1/1/3 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
```

```
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-500;
    }
}
ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
        }
    }
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
}
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Verify that the configuration is working properly by running the following commands:

- `show iccp`
- `show igmp snooping interface`
- `show igmp snooping membership`
- `show interfaces ae0`
- `show interfaces ae1`
- `show interfaces mc-ae`
- `show l2-learning instance extensive`
- `show multicast snooping route extensive`

Related Documentation

- [IGMP Snooping in MC-LAG Active-Active Mode on page 152](#)
- [Configuring IGMP Snooping in MC-LAG Active-Active Mode on page 92](#)
- [Configuring ICCP for MC-LAG](#)
- `show interfaces (Aggregated Ethernet)` in the [CLI Explorer](#)

Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on EX9200 Switches

Supported Platforms [EX Series](#)

There are two methods for enabling Layer 3 multicast functionality across a multichassis link aggregation group (MC-LAG). You can choose either to configure Virtual Router Redundancy Protocol (VRRP) over the integrated routing and bridging (IRB) interface or to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG. This provides redundancy and load balancing between the two MC-LAG peers. The procedure to configure VRRP for use in a Layer 3 multicast MC-LAG is included in this example.

- [Requirements on page 175](#)
- [Overview on page 175](#)
- [Configuration on page 177](#)
- [Verification on page 194](#)

Requirements

This example uses the following hardware and software components:

- Two EX9200 switches
- Junos OS Release 13.2R1 or later

Before you configure an MC-LAG for Layer 3 multicast using VRRP, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See *Configuring an Aggregated Ethernet Interface*.
- Configure Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See *Configuring Aggregated Ethernet LACP*.
- Configure Virtual Router Redundancy Protocol (VRRP) on a switch. See *Configuring Basic VRRP Support*.

For a list of best practice configuration guidelines and important functional behavior for MC-LAGs, see “[Multichassis Link Aggregation Features, Terms, and Best Practices](#)” on [page 3](#).

Overview

In this example, you configure two MC-LAGs between two switches, consisting of two aggregated Ethernet interfaces (ae1 and ae2). To support the MC-LAG, you create a third aggregated Ethernet interface (ae0) for the interchassis link (ICL). You also configure a multichassis protection link for the ICL, Inter-Chassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



NOTE: Layer 3 connectivity is required for ICCP.


To complete the MC-LAG configuration, enable VRRP by completing the following tasks for each MC-LAG:

1. Create an IRB interface.
2. Create a VRRP group and assign a virtual IP address that is shared between each switch in the VRRP group.
3. Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group.
4. Configure Layer 3 connectivity between the VRRP groups.

Topology

The topology used in this example consists of two switches hosting two MC-LAGs—ae1 and ae2. The two switches are connected to a multicast source (Server 1) over MC-LAG ae1, and a multicast receiver (Server 2) over MC-LAG ae2. [Figure 30 on page 176](#) shows the topology for this example.

Figure 30: Configuring Two MC-LAGs Between Switch A and Switch B

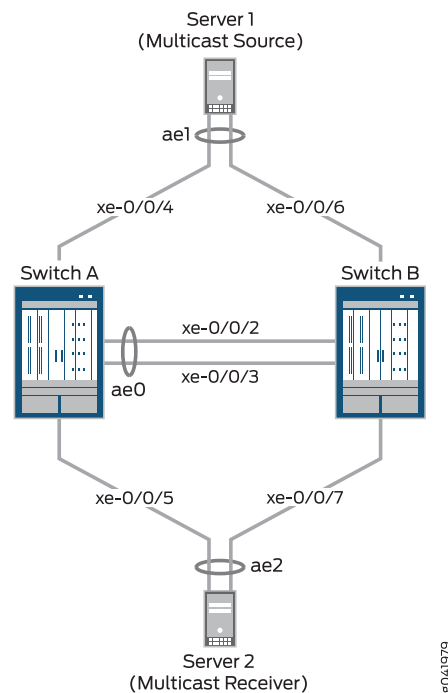

[Table 7 on page 177](#) details the topology used in this configuration example.

Table 7: Components of the Topology for Configuring Two MC-LAGs Between Switch A and Switch B

Hostname	Base Hardware	Link Aggregation Groups
Switch A	EX9200 switch	<ul style="list-style-type: none"> ae0 is configured as an aggregated Ethernet interface, and is used as an ICL. The following two interfaces are part of ae0: xe-0/0/2 and xe-0/0/3 on Switch A and xe-0/0/2 and xe-0/0/3 on Switch B. ae1 is configured as an MC-LAG for the multicast source (Server 1), and the following two interfaces are part of ae1: xe-0/0/4 on Switch A and xe-0/0/6 on Switch B. ae2 is configured as an MC-LAG for the multicast receiver (Server 2), and the following two interfaces are part of ae2: xe-0/0/5 on Switch A and xe-0/0/7 on Switch B.
Switch B		

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
Switch A
set chassis aggregated-devices ethernet device-count 3
set interfaces xe-0/0/2 ether-options 802.3ad ae0
set interfaces xe-0/0/3 ether-options 802.3ad ae0
set interfaces xe-0/0/4 ether-options 802.3ad ae1
set interfaces xe-0/0/5 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control active
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching interface-mode trunk
```

```

set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
set interfaces irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 virtual-address
  10.1.1.2
set interfaces irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 priority 200
set interfaces irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 accept-data
set interfaces irb unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface irb.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 60
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval
  60
set protocols igmp-snooping vlan v100
set protocols igmp-snooping vlan v200
set protocols igmp-snooping vlan v500
set protocols ospf area 0.0.0.0 interface irb.100 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface irb.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface irb.100 bfd-liveness-detection transmit-interval
  threshold 500
set protocols ospf area 0.0.0.0 interface irb.200 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface irb.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface irb.200 bfd-liveness-detection transmit-interval
  threshold 500
set protocols pim rp static address 10.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface irb.100 priority 200
set protocols pim interface irb.200 priority 600
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0

```

Switch B

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/2 ether-options 802.3ad ae0
set interfaces xe-0/0/3 ether-options 802.3ad ae0
set interfaces xe-0/0/6 ether-options 802.3ad ae1
set interfaces xe-0/0/7 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240

```

```
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control standby
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
set interfaces irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 virtual-address
10.1.1.2
set interfaces irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 priority 150
set interfaces irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 accept-data
set interfaces irb unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface irb.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 60
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval
60
set protocols igmp-snooping vlan v100
set protocols igmp-snooping vlan v200
set protocols igmp-snooping vlan v500
set protocols ospf area 0.0.0.0 interface irb.100 bfd-liveness-detection
minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface irb.100 bfd-liveness-detection transmit-interval
minimum-interval 350
set protocols ospf area 0.0.0.0 interface irb.100 bfd-liveness-detection transmit-interval
threshold 500
set protocols ospf area 0.0.0.0 interface irb.200 bfd-liveness-detection
minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface irb.200 bfd-liveness-detection transmit-interval
minimum-interval 350
set protocols ospf area 0.0.0.0 interface irb.200 bfd-liveness-detection transmit-interval
threshold 500
set protocols pim rp static address 10.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface irb.100 priority 100
set protocols pim interface irb.200 priority 500
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

Configuring MC-LAG for Layer 3 Multicast Using VRRP on Two Switches

Step-by-Step Procedure The following procedure requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To enable a multichassis protection link between MC-LAG peers:

1. Configure the number of LAGs on both Switch A and Switch B.

Switch A and Switch B:

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 3
```

2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

Switch A and Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/2 ether-options 802.3ad ae0
user@switch# set xe-0/0/3 ether-options 802.3ad ae0
```

Switch A:

```
[edit interfaces]
user@switch# set xe-0/0/4 ether-options 802.3ad ae1
user@switch# set xe-0/0/5 ether-options 802.3ad ae2
```

Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/6 ether-options 802.3ad ae1
user@switch# set xe-0/0/7 ether-options 802.3ad ae2
```

3. Configure ae0 as the trunk interface between Switch A and Switch B.

Switch A and Switch B:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk
```

4. Configure ae0 as the multichassis protection link between Switch A and Switch B.

Switch A:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

Switch B:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

**Step-by-Step
Procedure**

To enable ICCP:

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

2. Configure the peer IP address, minimum receive interval, and minimum transmit interval for a Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.



NOTE: Configuring the minimum receive interval is required to enable BFD. We recommend a minimum receive interval value of 60 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection minimum-receive-interval
60
user@switch# set iccp peer 10.3.3.1 liveness-detection transmit-interval
minimum-interval 60
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval
60
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval
minimum-interval 60
```

3. (Optional) Configure the time during which an ICCP connection must be established between MC-LAG peers on Switch A and Switch B.



NOTE: Configuring session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

4. (Optional) Configure the **backup-liveness-detection** statement on the management interface (fxp0) only.

We recommend that you configure the backup liveness detection feature to implement faster failover of data traffic during an MC-LAG peer reboot.



NOTE: The **backup-liveness-detection** statement is supported starting in Junos OS Release 13.2R1.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip
10.207.64.233
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.234
```

5. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.

Switch A and Switch B:

```
[edit vlans]
user@switch# set v500 vlan-id 500
user@switch# set v500 l3-interface irb.500

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500
```

Switch A:

```
[edit interfaces]
user@switch# set irb unit 500 family inet address 10.3.3.2/8
```

Switch B:

```
[edit interfaces]
user@switch# set irb unit 500 family inet address 10.3.3.1/8
```

Step-by-Step Procedure

To enable the ae1 and ae2 MC-LAG interfaces:

1. Enable LACP on the MC-LAG interfaces on Switch A and Switch B.



NOTE: At least one end needs to be active. The other end can be either active or passive.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp active
```



```
user@switch# set ae2 aggregated-ether-options lacp active
```

- Specify the same multichassis aggregated Ethernet identification number for each MC-LAG peer on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

```
user@switch# set ae2 aggregated-ether-options mc-ae mc-ae-id 4
```

- Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

```
user@switch# set ae2 aggregated-ether-options mc-ae chassis-id 0
```

Switch B:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1
```

```
user@switch# set ae2 aggregated-ether-options mc-ae chassis-id 1
```

- Specify the operating mode of the MC-LAGs on both Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```

```
user@switch# set ae2 aggregated-ether-options mc-ae mode active-active
```

- Specify the status control for the MC-LAGs on Switch A and Switch B.



NOTE: You must configure status control on both Switch A and Switch B that host the MC-LAGs. If one peer is in active mode, the other must be in standby mode.

Switch A:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```

```
user@switch# set ae2 aggregated-ether-options mc-ae status-control active
```

Switch B:

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```

```
user@switch# set ae2 aggregated-ether-options mc-ae status-control standby
```



NOTE: If you configure both nodes as prefer-status-control-active, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.

6. To minimize traffic loss, specify the number of seconds by which to delay bringing the multichassis aggregated Ethernet interface back to the up state when you reboot Switch A or Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
user@switch# set ae2 aggregated-ether-options mc-ae init-delay-time 240
```

7. Specify the same LACP system ID for each MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
user@switch# set ae2 aggregated-ether-options lacp system-ID 00:01:02:03:04:06
```

8. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
user@switch# set ae2 aggregated-ether-options lacp admin-key 3
```

9. Enable a VLAN for each MC-LAG on Switch A and Switch B.

```
[edit vlans]
user@switch# set v100 vlan-id 100
user@switch# set v200 vlan-id 200
```

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
user@switch# set ae2 unit 0 family ethernet-switching vlan members v200
```

10. Configure ae1 and ae2 as trunk interfaces between Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching interface-mode trunk
user@switch# set ae2 unit 0 family ethernet-switching interface-mode trunk
```

Step-by-Step Procedure

To enable VRRP on the MC-LAGs:

1. Create an integrated routing and bridging (IRB) interface for each MC-LAG, assign a virtual IP address that is shared between each switch in the VRRP groups, and assign an individual IP address for each switch in the VRRP groups.

Switch A:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2
virtual-address 10.1.1.2
```

Switch B:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2
virtual-address 10.1.1.2
```

2. Assign the priority for each switch in the VRRP groups.



NOTE: The switch configured with the highest priority is the master.

Switch A:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
user@switch# set irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 priority 200
```

Switch B:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
user@switch# set irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 priority 150
```

3. Enable the switch to accept all packets destined for the virtual IP address if it is the master in a VRRP group.

Switch A:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
user@switch# set irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 accept-data
```

Switch B:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
user@switch# set irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 accept-data
```

4. Configure Layer 3 connectivity between Switch A and Switch B.

```
[edit]
user@switch# set v100 l3-interface irb.100
user@switch# set v200 l3-interface irb.200
```

Step-by-Step Procedure

To enable IGMP snooping:

- Enable IGMP snooping for all VLANs on Switch A and Switch B.

```
[edit protocols]
user@switch# set igmp-snooping vlan v100
user@switch# set igmp-snooping vlan v200
user@switch# set igmp-snooping vlan v500
```



NOTE: You must configure the `multichassis-lag-replicate-state` statement for IGMP snooping to work properly in an MC-LAG environment.

**Step-by-Step
Procedure**

To configure OSPF as the Layer 3 protocol:

1. Configure an OSPF area on Switch A and Switch B.

```
[edit protocols ospf]
user@switch# set area 0.0.0.0
```
2. Assign the VLAN interfaces for the MC-LAGs as interfaces to the OSPF area on Switch A and Switch B.

```
[edit protocols ospf area 0.0.0.0]
user@switch# set interface irb.100
user@switch# set interface irb.200
```
3. Configure the minimum receive interval, minimum transmit interval, and transmit interval threshold for a Bidirectional Forwarding Detection (BFD) session for the OSPF interfaces on Switch A and Switch B.

```
[edit protocols ospf area 0.0.0.0]
user@switch# set interface irb.100 bfd-liveness-detection minimum-receive-interval
700
user@switch# set interface irb.100 bfd-liveness-detection transmit-interval
minimum-interval 350
user@switch# set interface irb.100 bfd-liveness-detection transmit-interval threshold
500
user@switch# set interface irb.200 bfd-liveness-detection minimum-receive-interval
700
user@switch# set interface irb.200 bfd-liveness-detection transmit-interval
minimum-interval 350
user@switch# set interface irb.200 bfd-liveness-detection transmit-interval
threshold 500
```

**Step-by-Step
Procedure**

To configure Protocol Independent Multicast (PIM) as the multicast protocol:

1. Configure a static rendezvous point (RP) address on Switch A and Switch B.

```
[edit protocols pim]
user@switch# set rp static address 10.0.0.3
```
2. Configure the address ranges of the multicast groups for which Switch A and Switch B can be an RP.

```
[edit protocols pim rp static address 10.0.0.3]
user@switch# set group-ranges 233.252.0.0/8
```
3. Configure the priority of each PIM interface for being selected as the designated router.

An interface with a higher priority value has a higher probability of being selected as the designated router.



NOTE: Configure the IP address on the active MC-LAG peer with a high IP address or a high designated router priority.

Switch A:

```
[edit protocols pim]
user@switch# set interface irb.100 priority 200
user@switch# set interface irb.200 priority 600
```

Switch B:

```
[edit protocols pim]
user@switch# set interface irb.100 priority 100
user@switch# set interface irb.200 priority 500
```

Results

From configuration mode on Switch A, confirm your configuration by entering the **show chassis**, **show interfaces**, **show multi-chassis**, **show protocols**, and **show vlans** commands. If the output does not display the required configuration, repeat the instructions in this example to correct the configuration.

Switch A

```
user@SwitchA# show chassis
aggregated-devices {
  ethernet {
    device-count 3;
  }
}

user@SwitchA# show interfaces
xe-0/0/2 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/3 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/4 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/5 {
  ether-options {
    802.3ad ae2;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
```

```
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 0;
      mode active-active;
      status-control active;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
ae2 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:06;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 4;
      chassis-id 0;
      mode active-active;
      status-control active;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v200;
      }
    }
  }
}
}
irb {
  unit 100 {
    family inet {
      address 10.1.1.11/8 {
        vrrp-group 1 {
```

```
        virtual-address 10.1.1.1;
        priority 200;
        accept-data;
    }
}
}
unit 200 {
    family inet {
        address 10.1.1.21/8 {
            vrrp-group 2 {
                virtual-address 10.1.1.2;
                priority 200;
                accept-data;
            }
        }
    }
}
unit 500 {
    family inet {
        address 10.3.3.2/8;
    }
}
}

user@SwitchA# show protocols
ospf {
    area 0.0.0.0 {
        interface irb.100 {
            bfd-liveness-detection {
                minimum-receive-interval 700;
                transmit-interval {
                    minimum-interval 350;
                    threshold 500;
                }
            }
        }
    }
    interface irb.200 {
        bfd-liveness-detection {
            minimum-receive-interval 700;
            transmit-interval {
                minimum-interval 350;
                threshold 500;
            }
        }
    }
}
pim {
    rp {
        static {
            address 10.0.0.3 {
                group-ranges {
                    233.252.0.0/8;
                }
            }
        }
    }
}
```

```
    }
  }
  interface irb.100 {
    priority 200;
  }
  interface irb.200 {
    priority 600;
  }
}
iccp {
  local-ip-addr 10.3.3.2;
  peer 10.3.3.1 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.233;
    }
    liveness-detection {
      minimum-receive-interval 60;
      transmit-interval {
        minimum-interval 60;
      }
    }
  }
}
}
igmp-snooping {
  vlan v100;
  vlan v200;
  vlan v500;
}

user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
  interface ae0;
}

user@SwitchA# show vlans
v100 {
  vlan-id 100;
  l3-interface irb.100;
}
v200 {
  vlan-id 200;
  l3-interface irb.200;
}
v500 {
  vlan-id 500;
  l3-interface irb.500;
}
```

Switch B

```
user@SwitchB# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}
```



```
user@SwitchB# show interfaces
xe-0/0/2 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/3 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/6 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/7 {
  ether-options {
    802.3ad ae2;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 1;
      mode active-active;
      status-control standby;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
ae2 {
```

```
aggregated-ether-options {
  lacp {
    active;
    system-id 00:01:02:03:04:06;
    admin-key 3;
  }
  mc-ae {
    mc-ae-id 4;
    chassis-id 1;
    mode active-active;
    status-control standby;
    init-delay-time 240;
  }
}
unit 0 {
  family ethernet-switching {
    interface-mode trunk;
    vlan {
      members v200;
    }
  }
}
}
irb {
  unit 100 {
    family inet {
      address 10.1.1.10/8 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 150;
          accept-data;
        }
      }
    }
  }
}
unit 200 {
  family inet {
    address 10.1.1.20/8 {
      vrrp-group 2 {
        virtual-address 10.1.1.2;
        priority 150;
        accept-data;
      }
    }
  }
}
unit 500 {
  family inet {
    address 10.3.3.1/8;
  }
}
}

user@SwitchB# show protocols
ospf {
  area 0.0.0.0 {
```

```

interface irb.100 {
  bfd-liveness-detection {
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}
interface irb.200 {
  bfd-liveness-detection {
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}
}
pim {
  rp {
    static {
      address 10.0.0.3 {
        group-ranges {
          233.252.0.0/8;
        }
      }
    }
  }
}
interface irb.100 {
  priority 100;
}
interface irb.200 {
  priority 500;
}
}
iccp {
  local-ip-addr 10.3.3.1;
  peer 10.3.3.2 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.234;
    }
    liveness-detection {
      minimum-receive-interval 60;
      transmit-interval {
        minimum-interval 60;
      }
    }
  }
}
}
igmp-snooping {
  vlan v100;
  vlan v200;
  vlan v500;
}

```

```

}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
    interface ae0;
}

user@SwitchB# show vlans
v100 {
    vlan-id 100;
    l3-interface irb.100;
}
v200 {
    vlan-id 200;
    l3-interface irb.200;
}
v500 {
    vlan-id 500;
    l3-interface irb.500;
}

```

Verification

Verify that the configuration is working properly.

- [Confirm That Switch A Is the Master Designated Router on page 194](#)
- [Verifying That Switch B Is the Backup Designated Router on page 194](#)

Confirm That Switch A Is the Master Designated Router

Purpose Verify that Switch A is the master designated router (DR).

Action user@switch> **show pim interfaces**

Stat = Status, V = Version, NbrCnt = Neighbor Count,
S = Sparse, D = Dense, B = Bidirectional,
DR = Designated Router, P2P = Point-to-point link,
Active = Bidirectional is active, NotCap = Not Bidirectional Capable

Name	Stat	Mode	IP	V	State	NbrCnt	JoinCnt(sg/*g)	DR	address
pim.32769	Down	S	4	2	P2P,NotCap	0	0/0		
irb.100	Up	S	4	2	DDR-DR,NotCap	1	0/0		10.1.1.11
irb.200	Up	S	4	2	DDR-DR,NotCap	2	0/0		10.1.1.21

Meaning The **DDR-DR** state of the VLAN interfaces in the output shows that Switch A is the master designated router.

Verifying That Switch B Is the Backup Designated Router

Purpose Confirm that Switch B is the backup designated router.

Action user@switch> **show pim interfaces**

Stat = Status, V = Version, NbrCnt = Neighbor Count,
S = Sparse, D = Dense, B = Bidirectional,
DR = Designated Router, P2P = Point-to-point link,
Active = Bidirectional is active, NotCap = Not Bidirectional Capable

Name	Stat	Mode	IP	V	State	NbrCnt	JoinCnt(sg/*g)	DR	address
p1me.32769	Down	S	4	2	P2P,NotCap	0	0/0		
irb.100	Up	S	4	2	DDR-BDR,NotCap	1	0/0	10.1.1.11	
irb.200	Up	S	4	2	DDR-BDR,NotCap	2	0/0	10.1.1.21	

Meaning The **DDR-BDR** state of the VLAN interfaces in the output shows that Switch B is the backup designated router.

- Related Documentation**
- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32](#)
 - [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on EX9200 Switches on page 195](#)
 - [Example: Configuring DHCP Relay on MC- LAG with VRRP on an EX9200 Switch on page 93](#)

Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on EX9200 Switches

Supported Platforms [EX Series](#)

There are two methods for enabling Layer 3 unicast functionality across a multichassis link aggregation group (MC-LAG). You can choose either to configure Virtual Router Redundancy Protocol (VRRP) over the integrated routing and bridging (IRB) interface or to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG. The procedure to configure VRRP for use in a Layer 3 unicast MC-LAG is included in this example.

- [Requirements on page 195](#)
- [Overview on page 196](#)
- [Configuration on page 197](#)
- [Verification on page 208](#)
- [Troubleshooting on page 213](#)

Requirements

This example uses the following hardware and software components:

- Two EX9200 switches
- Junos OS Release 13.2R1 or later

Before you configure an MC-LAG, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See *Configuring an Aggregated Ethernet Interface*.
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See *Configuring Aggregated Ethernet LACP*.
- Configure Virtual Router Redundancy Protocol (VRRP) on a switch. See *Configuring Basic VRRP Support*.

Overview

In this example, you configure an MC-LAG between two switches by including interfaces from both switches in an aggregated Ethernet interface (ae1). To support the MC-LAG, create a second aggregated Ethernet interface (ae0) for the interchassis link (ICL). Configure a multichassis protection link for the ICL, Interchassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



NOTE: Layer 3 connectivity is required for ICCP.

To complete the MC-LAG configuration, enable VRRP by completing the following tasks:

1. Create an integrated routing and bridging (IRB) interface.
2. Create a VRRP group and assign a virtual IP address that is shared between each switch in the VRRP group.
3. Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group.
4. Configure Layer 3 connectivity between the VRRP groups.

Topology

The topology used in this example consists of two switches that host an MC-LAG, ae1. The two switches are connected to a server. [Figure 31 on page 197](#) shows the topology for this example.

Figure 31: Configuring an MC-LAG Between Switch A and Switch B

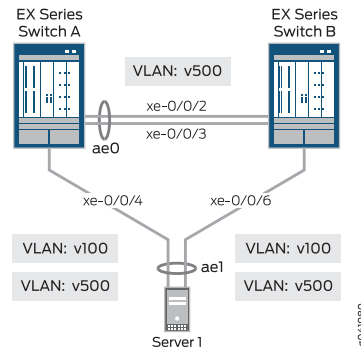


Table 5 on page 43 details the topology used in this configuration example.

Table 8: Components of the Topology for Configuring an MC-LAG Between Two Switches

Hostname	Base Hardware	Link Aggregation Groups
Switch A	EX9200 switch	<ul style="list-style-type: none"> ae0 is configured as an aggregated Ethernet interface, and is used as an ICL. The following interfaces are part of ae0: xe-0/0/2 and xe-0/0/3 on Switch A and xe-0/0/2 and xe-0/0/3 on Switch B. ae1 is configured as an MC-LAG, and the following two interfaces are part of ae1: xe-0/0/4 on Switch A and xe-0/0/6 on Switch B.
Switch B		

Configuration

CLI Quick Configuration

To quickly configure this example:

- Copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch A.

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/2 ether-options 802.3ad ae0
set interfaces xe-0/0/3 ether-options 802.3ad ae0
set interfaces xe-0/0/4 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240

```

```

set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
set interfaces irb unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 60
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0

```

- Copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, and paste the commands into the CLI at the **[edit]** hierarchy level of Switch B.

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/2 ether-options 802.3ad ae0
set interfaces xe-0/0/3 ether-options 802.3ad ae0
set interfaces xe-0/0/6 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
set interfaces irb unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 60
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 60
set protocols rstp interface ae0.0 disable
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0

```


Configuring MC-LAG for Layer 3 Unicast Using VRRP on Two Switches

Step-by-Step Procedure

To enable a multichassis protection link between MC-LAG peers:

The following procedure requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Configure the number of LAGs on both Switch A and Switch B.

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2
```
2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

Switch A and Switch B

```
[edit interfaces]
user@switch# set xe-0/0/2 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/3 ether-options 802.3ad ae0
```

Switch A

```
[edit interfaces]
user@switch# set xe-0/0/4 ether-options 802.3ad ae1
```

Switch B

```
[edit interfaces]
user@switch# set xe-0/0/6 ether-options 802.3ad ae1
```

3. Configure a trunk interface between Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk
```
4. Configure a multichassis protection link between Switch A and Switch B.

Switch A

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

Switch B

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

Step-by-Step Procedure

To enable ICCP:

The following procedure requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.2
```

Switch B

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

2. Configure the peer IP address, minimum receive interval, and minimum transmit interval for a Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.



NOTE: Configuring the minimum receive interval is required to enable BFD. We recommend a minimum receive interval value of 6 seconds.

Switch A

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection minimum-receive-interval
60
user@switch# set iccp peer 10.3.3.1 liveness-detection transmit-interval
minimum-interval 60
```

Switch B

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval
60
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval
minimum-interval 60
```

3. (Optional) Configure the time during which an ICCP connection must be established between MC-LAG peers on Switch A and Switch B.



NOTE: Configuring the session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

Switch A

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 session-establishment-hold-time 50
```

Switch B

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

4. (Optional) We recommend that you configure the backup liveness detection feature to implement faster failover of data traffic during an MC-LAG peer reboot. Configure

the **backup-liveness-detection** statement on the management interface (fxp0) only.



NOTE: The **backup-liveness-detection** statement is supported starting in Junos OS Release 13.2R1.

Switch A

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip
10.207.64.233
```

Switch B

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.234
```

5. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.

Switch A and B

```
[edit vlans]
user@switch# set v500 vlan-id 500
user@switch# set v500 l3-interface irb.500

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500
```

Switch A

```
user@switch# set vlan unit 500 family inet address 10.3.3.2/8
```

Switch B

```
user@switch# set vlan unit 500 family inet address 10.3.3.1/8
```

Step-by-Step Procedure

To enable the MC-LAG interface:

The following procedure requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Enable LACP on the MC-LAG interface on Switch A and Switch B.



NOTE: At least one end needs to be active. The other end can be either active or passive.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp active
```

2. Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
```

3. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0
```

Switch B

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1
```

4. Specify the operating mode of the MC-LAG on both Switch A and Switch B.

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active
```

5. Specify the status control for MC-LAG on Switch A and Switch B.



NOTE: You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```

Switch B

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```



NOTE: If you configure both nodes as `prefer-status-control-active`, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.

6. To minimize traffic loss, specify the number of seconds by which to delay bringing the mc-ae interface back to the up state when you reboot Switch A or Switch B.

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
```

7. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
```

8. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

9. Enable a VLAN on the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```

```
[edit]
user@switch# set vlans v100 vlan-id 100
```

10. Configure ae1 as the trunk interface between Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching interface-mode trunk
```

Step-by-Step Procedure

To enable VRRP on the MC-LAGs on Switch A and Switch B:

1. Create an integrated routing and bridging (IRB) interface for each MC-LAG, assign a virtual IP address that is shared between each switch in the VRRP group, and assign an individual IP address for each switch in the VRRP group.

Switch A

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1
virtual-address 10.1.1.1
```

Switch B

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1
virtual-address 10.1.1.1
```

2. Assign the priority for each switch in the VRRP group:



NOTE: The switch configured with the highest priority is the master.

Switch A

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority
200
```

Switch B

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority
150
```

3. Enable the switch to accept all packets destined for the virtual IP address if it is the master in a VRRP group:

Switch A

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1
accept-data
```

Switch B

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1
accept-data
```

4. Configure Layer 3 connectivity between Switch A and Switch B.

```
[edit]
user@switch# set vlans v100 l3-interface irb.100
```

**Step-by-Step
Procedure**

To disable RSTP:



NOTE: STP is not supported on the ICL or MC-LAG interfaces.

The following procedure requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Disable RSTP on the ICL interfaces on Switch A and Switch B:

```
[edit]
user@switch# set protocols rstp interface ae0.0 disable
```

Results

Display the results of the configuration on Switch A.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
    }
  }
}
interfaces {
  xe-0/0/2 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/3 {
    ether-options {
      802.3ad ae0;
    }
  }
}
```

```

    }
  }
  xe-0/0/4 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        interface-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240;
      }
    }
    unit 0 {
      family ethernet-switching {
        interface-mode trunk;
        vlan {
          members v100;
        }
      }
    }
  }
  irb {
    unit 100 {
      family inet {
        address 10.1.1.11/8 {
          vrrp-group 1 {
            virtual-address 10.1.1.1;
            priority 200;
            accept-data;
          }
        }
      }
    }
    unit 500 {
      family inet {
        address 10.3.3.2/8;
      }
    }
  }

```

```
    }
  }
}
protocols {
  iccp {
    local-ip-addr 10.3.3.2;
    peer 10.3.3.1 {
      session-establishment-hold-time 50;
      backup-liveness-detection {
        backup-peer-ip 10.207.64.233;
      }
      liveness-detection {
        minimum-receive-interval 60;
        transmit-interval {
          minimum-interval 60;
        }
      }
    }
  }
}
rstp {
  interface ae0.0 {
    disable;
  }
}
multi-chassis {
  multi-chassis-protection 10.3.3.1 {
    interface ae0;
  }
}
vllans {
  v100 {
    vlan-id 100;
    l3-interface irb.100;
  }
  v500 {
    vlan-id 500;
    l3-interface irb.500;
  }
}
```

Display the results of the configuration on Switch B.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
    }
  }
}
interfaces {
  xe-0/0/2 {
    ether-options {
      802.3ad ae0;
    }
  }
}
```



```
}
xe-0/0/3 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/4 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 1;
      mode active-active;
      status-control active;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
irb {
  unit 100 {
    family inet {
      address 10.1.1.10/8 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 200;
          accept-data;
        }
      }
    }
  }
}
```

```
    }
    unit 500 {
        family inet {
            address 10.3.3.1/8;
        }
    }
}
protocols {
    iccp {
        local-ip-addr 10.3.3.1;
        peer 10.3.3.2 {
            session-establishment-hold-time 50;
            backup-liveness-detection {
                backup-peer-ip 10.207.64.234;
            }
            liveness-detection {
                minimum-receive-interval 60;
                transmit-interval {
                    minimum-interval 60;
                }
            }
        }
    }
}
rstp {
    interface ae0.0 {
        disable;
    }
}
multi-chassis {
    multi-chassis-protection 10.3.3.2 {
        interface ae0;
    }
}
vllans {
    v100 {
        vlan-id 100;
        l3-interface irb.100;
    }
    v500 {
        vlan-id 500;
        l3-interface irb.500;
    }
}
```

Verification

To verify that the MC-LAG group has been created and is working properly, perform these tasks:

- [Verifying That ICCP Is Working on Switch A on page 209](#)
- [Verifying That ICCP Is Working on Switch B on page 209](#)
- [Verifying That LACP Is Active on Switch A on page 210](#)

- [Verifying That LACP Is Active on Switch B on page 210](#)
- [Verifying That the MC-AE and ICL Interfaces Are Up on Switch A on page 210](#)
- [Verifying That the MC-AE and ICL Interfaces Are Up on Switch B on page 211](#)
- [Verifying That MAC Learning Is Occurring on Switch A on page 211](#)
- [Verifying That MAC Learning Is Occurring on Switch B on page 211](#)
- [Verifying That Switch A is the Master in the VRRP Group on page 212](#)
- [Verifying That Switch B is the Backup Member in the VRRP Group on page 212](#)
- [Verifying That the Virtual IP Address is Attached to an Individual Address on Switch A on page 213](#)
- [Verifying That the Virtual IP Address is Attached to an Individual Address on Switch B on page 213](#)

Verifying That ICCP Is Working on Switch A

Purpose Verify that ICCP is running on Switch A.

Action [edit]
user@switch# **show iccp**
Redundancy Group Information for peer 10.3.3.1
TCP Connection : Established
Liveliness Detection : Up

Client Application: MCSNOOPD

Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That ICCP Is Working on Switch B

Purpose Verify that ICCP is running on Switch B.

Action **show iccp**

[edit]
user@switch# **show iccp**
Redundancy Group Information for peer 10.3.3.2
TCP Connection : Established
Liveliness Detection : Up

Client Application: MCSNOOPD

Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That LACP Is Active on Switch A

Purpose Verify that LACP is active on Switch A.

Action [edit]
 user@switch# show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/6	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/6	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active
LACP protocol:	Receive State	Transmit State	Mux State						
xe-0/0/6	Current	Fast periodic	Collecting	distributing					

Meaning This output shows that Switch A is participating in LACP negotiation.

Verifying That LACP Is Active on Switch B

Purpose Verify that LACP is active on Switch B

Action [edit]
 user@switch# show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/4	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/4	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active
LACP protocol:	Receive State	Transmit State	Mux State						
xe-0/0/4	Current	Fast periodic	Collecting	distributing					

Meaning This output shows that Switch B is participating in LACP negotiation.

Verifying That the MC-AE and ICL Interfaces Are Up on Switch A

Purpose Verify that the MC-AE and ICL interfaces are up on Switch A.

Action [edit]
 user@switch# show interfaces mc-ae

```

Member Link                : ae1
Current State Machine's State: mcae active state
Local Status                : active
Local State                 : up
Peer Status                 : active
Peer State                  : up
  Logical Interface         : ae1.0
  Topology Type             : bridge
  Local State               : up
  Peer State                : up
  Peer Ip/MCP/State         : 10.3.3.1 ae0.0 up
  
```

Meaning This output shows that the MC-AE interface on Switch A is up and active.

Verifying That the MC-AE and ICL Interfaces Are Up on Switch B

Purpose Verify that the MC-AE and ICL interfaces are up on Switch B.

Action [edit]
user@switch# **show interfaces mc-ae**
Member Link : ae1
Current State Machine's State: mcae active state
Local Status : active
Local State : up
Peer Status : active
Peer State : up
Logical Interface : ae1.0
Topology Type : bridge
Local State : up
Peer State : up
Peer Ip/MCP/State : 10.3.3.2 ae0.0 up

Meaning This output shows that the MC-AE interface on Switch B is up and active.

Verifying That MAC Learning Is Occurring on Switch A

Purpose Verify that MAC learning is working on Switch A.

Action [edit]
user@switch# **show ethernet-switching table**
Ethernet-switching table: 6 entries, 1 learned, 0 persistent entriesC

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood	-	All-members
v100	00:00:5e:00:01:01	Static	-	Router
v100	78:fe:3d:5a:07:42	Static	-	Router
v100	78:fe:3d:5b:ad:c2	Learn(R)	0	ae0.0
v500	*	Flood	-	All-members
v500	78:fe:3d:5a:07:42	Static	-	Router

Meaning The output shows two static MAC address in VLAN v100 and one static MAC address in VLAN v500. These addresses belong to the Layer 3 IRB addresses on both Switch A and Switch B that you configured in the MC-LAG. The ICL interface configured on the VRRP master member learned the VLAN v100 Learn (R) MAC address of the VRRP backup member.

Verifying That MAC Learning Is Occurring on Switch B

Purpose Verify that MAC learning is working on Switch B.

Action [edit]user@switch# **show ethernet-switching table**

Ethernet-switching table: 7 entries, 1 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood		- All-members
v100	00:00:5e:00:01:01	Static		- Router
v100	78:fe:3d:5a:07:42	Learn(R)	0	ae0.0
v100	78:fe:3d:5b:ad:c2	Static		- Router
v200	78:fe:3d:5b:ad:c2	Static		- Router
v500	*	Flood		- All-members
v500	78:fe:3d:5b:ad:c2	Static		- Router

Meaning The output shows two static MAC address in VLAN v100 and one static MAC address in VLAN v500. These addresses belong to the Layer 3 IRB addresses on both Switch A and Switch B that you configured in the MC-LAG. The ICL interface configured on the VRRP backup member learned the VLAN v100 Learn (R) MAC address of the VRRP master member.

Verifying That Switch A is the Master in the VRRP Group

Purpose Verify that Switch A is the master member in the VRRP group.

Action [edit]user@switch# **show vrrp**

Interface	State	Group	VR state	VR Mode	Timer	Type	Address
irb.100	up	1	master	Active	A 0.605	lcl	10.1.1.11
						vip	10.1.1.1

Meaning The output shows that Switch A is the master member in the VRRP group.

Verifying That Switch B is the Backup Member in the VRRP Group

Purpose Verify that Switch B is the backup member in the VRRP group.

Action [edit]user@switch# **show vrrp**

Interface	State	Group	VR state	VR Mode	Timer	Type	Address
irb.100	up	1	backup	Active	A 0.605	lcl	10.1.1.10
						vip	10.1.1.1

Meaning The output shows that Switch B is the backup member in the VRRP group.

Verifying That the Virtual IP Address is Attached to an Individual Address on Switch A

Action [edit]
 user@switch# run show interfaces terse vlan

Interface	Admin	Link	Proto	Local	Remote
irb	up	up			
irb.100	up	up	inet	10.1.1.1/8	10.1.1.11/8
irb.500	up	up	inet	10.3.3.2/8	

Meaning The output shows that the virtual IP address (10.1.1.1/8) is bound to the individual IP address (10.1.1.11/8) on Switch A.

Verifying That the Virtual IP Address is Attached to an Individual Address on Switch B

Action [edit]
 user@switch# run show interfaces terse vlan

Interface	Admin	Link	Proto	Local	Remote
irb	up	up			
irb.100	up	up	inet	10.1.1.1/8	10.1.1.10/8
irb.500	up	up	inet	10.3.3.1/8	

Meaning The output shows that the virtual IP address (10.1.1.1/8) is bound to the individual IP address (10.1.1.10/8) on Switch B.

Troubleshooting

- [Troubleshooting a LAG That Is Down on page 213](#)

Troubleshooting a LAG That Is Down

Problem The `show interfaces terse` command shows that the MC-LAG is **down**

Solution Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
- Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

Related Documentation

- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on EX9200 Switches on page 174](#)

- [Example: Configuring DHCP Relay on MC-LAG with VRRP on an EX9200 Switch on page 93](#)

Example: Configuring Multichassis Link Aggregation with Layer 3 MAC Address Synchronization

Supported Platforms EX4600, QFX Series



NOTE: Multichassis link aggregation (MC-LAG) is supported on QFX3500 and QFX3600 standalone switches running the original CLI and QFX3500, QFX3600, QFX5100, EX4600, and QFX10000 standalone switches running Enhanced Layer 2 Software.



NOTE: Issuing a PING request on an MC-LAG with MAC synchronization enabled does not work.



NOTE: On QFX5100 and QFX10000 switches, if you try to configure both VRRP over IRB and MAC synchronization, you will receive a commit error.

There are two methods for enabling Layer 3 unicast functionality across a multichassis link aggregation group (MC-LAG) to control the traffic. You can choose either to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG, or you can configure Virtual Router Redundancy Protocol (VRRP), but you cannot configure both at the same time. Because RVI interfaces share the same MAC address, if you enable MAC address synchronization, packets received on an MC-LAG peer with a destination MAC address that is the same as that of the peer's IRB MAC address will not be forwarded. The procedure to configure MAC address synchronization is included in this example. For more information about configuring VRRP for use in a Layer 3 unicast MC-LAG, see [“Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP” on page 253](#).

- [Requirements on page 214](#)
- [Overview on page 215](#)
- [Configuration on page 216](#)
- [Verification on page 233](#)
- [Troubleshooting on page 236](#)

Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for the QFX3500 and QFX3600 standalone switches, Junos OS Release 13.2X51-D10 or later for the QFX5100 and EX4600 standalone

switches, and Junos OS Release 15.1X53-D10 or later for the QFX10000 standalone switches.

- Two QFX3500 or QFX3600 standalone switches, two QFX5100 standalone switches, two EX4600 standalone switches, or two QFX10000 standalone switches.

Before you configure an MC-LAG for Layer 3 unicast, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch*.
- Configure Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch*.


Overview

In this example, you configure an MC-LAG across two switches, consisting of two aggregated Ethernet interfaces, an interchassis control link-protection link (ICL-PL), multichassis protection link for the ICL-PL, Inter-Chassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers. Layer 3 connectivity is required for ICCP.

Topology

The topology used in this example consists of two switches hosting an MC-LAG. The two switches are connected to a server. [Figure 2 on page 43](#) shows the topology of this example.

Figure 32: Configuring a Multichassis LAG Between Switch A and Switch B

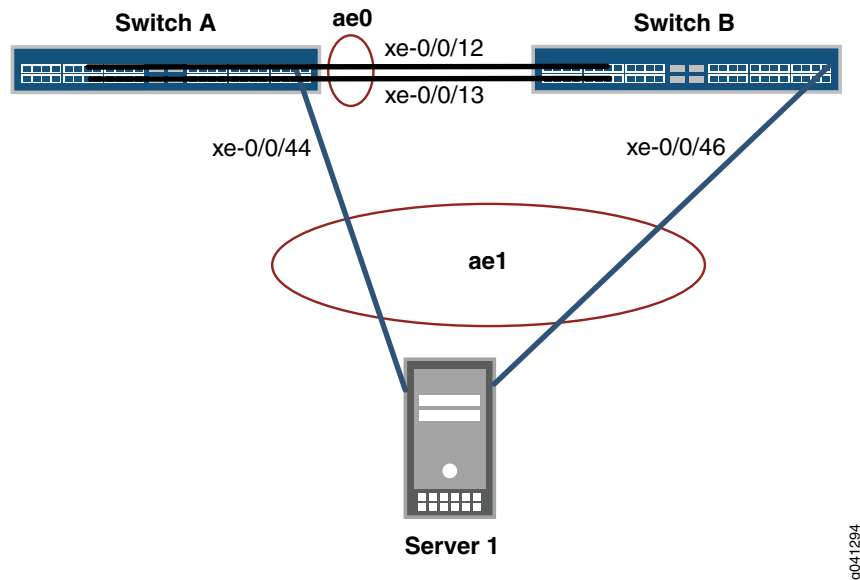

[Table 5 on page 43](#) details the topology used in this configuration example.

Table 9: Components of the Topology for Configuring a Multichassis LAG Between Two Switches

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500, QFX3600, QFX5100, EX4600, or QFX10000 standalone switch	ae0 is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following interfaces are part of ae0: xe-0/0/12 and xe-0/0/13 Switch A and xe-0/0/12 and xe-0/0/13 on Switch B. ae1 is configured as an MC-LAG, and the following two interfaces are part of ae1: xe-0/0/44 on Switch A and xe-0/0/46 on Switch B.
Switch B	QFX3500, QFX3600, QFX5100, EX4600, or QFX10000 standalone switch	

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.



NOTE: This example shows how to configure MC-LAG using both the original CLI and Enhanced Layer 2 Software (ELS).

In ELS, there are different statements and one additional statement that are different from the original CLI:

- The port-mode statement in the [edit interfaces *interface-name* unit *number* family ethernet-switching] hierarchy is not supported. Use the interface-mode statement instead.
- The vlan statement in the [edit interfaces *interface-name*] hierarchy is not supported. Use the irb statement instead.
- The vlan.logical-interface-number option in the [edit vlans *vlan-name* l3-interface] hierarchy is not supported. Use the irb.logical-interface-number option instead.
- The service-id statement in the [edit switch-options] hierarchy is required in the ELS CLI.

Switch A—Original CLI

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active

```

```

set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 500 family inet address 10.3.2/8
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0

```

Switch A—ELS

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces irb unit 500 family inet address 10.3.3.2/8
set interfaces irb unit 500 mac 00:00:00:00:00:01
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae1.0 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
set switch-options service-id 10

```

Switch B—Original CLI

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

Switch B—ELS

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces irb unit 500 family inet address 10.3.3.1/8
set interfaces irb unit 500 mac 00:00:00:00:00:01
set vlans v100 vlan-id 100
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
```

```

set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae1.0 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
set switch-options service-id 10

```

Configuring MC-LAG on Two Switches

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To enable multichassis protection link between MC-LAG peers:

1. Configure the number of LAGs on both Switch A and Switch B.

```

[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2

```
2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

Switch A and Switch B:

```

[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/13 ether-options 802.3ad ae0

```

Switch A:

```

[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1

```

Switch B:

```

[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1

```

3. Configure a trunk interface between Switch A and Switch B.

Original CLI:

```

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk

```

ELS:

```

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk

```

4. Configure a multichassis protection link between Switch A and Switch B.

Switch A:

```

[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0

```

Switch B:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

**Step-by-Step
Procedure**

To enable ICCP:

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

2. Configure the peer IP address and minimum receive interval for a (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection minimum-receive-interval
1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval
1000
```

3. Configure the peer IP address and minimum transmit interval for Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection transmit-interval
minimum-interval 1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval
minimum-interval 1000
```

4. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



NOTE: Configuring session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

5. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



NOTE: By default, backup liveness detection is not enabled. Configuring a backup IP address helps to achieve sub-second traffic loss during an MC-LAG peer reboot.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip
10.207.64.233
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.234
```

6. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.

Original CLI:

```
[edit vlans]
user@switch# set v100 vlan-id 100

[edit vlans]
user@switch# set v500 vlan-id 500

[edit vlans]
user@switch# set v500 l3-interface vlan.500

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500

[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v100
```

ELS:

```
[edit vlans]
user@switch# set v500 vlan-id 500

[edit vlans]
```

```

user@switch# set v500 l3-interface irb.500
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v100

```

Step-by-Step Procedure To enable the MC-LAG interface:

1. Enable LACP on the MC-LAG interface on Switch A and Switch B.



NOTE: At least one end needs to be active. The other end can be either active or passive.

```

[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp active

```

2. Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

```

[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3

```

3. Specify the same service ID on Switch A and Switch B.

ELS:

```

[edit]
user@switch# set switch-options service-id 10

```

4. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

```

[edit interfaces]
set ae1 aggregated-ether-options mc-ae chassis-id 0

```

Switch B:

```

[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1

```

5. Specify the operating mode of the MC-LAG on both Switch A and Switch B.



NOTE: Only active-active mode is supported at this time.

```

[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mode active-active

```


6. Specify the status control for MC-LAG on Switch A and Switch B.



NOTE: You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
```



NOTE: If you configure both nodes as `prefer-status-control-active`, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.

Switch B:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```

7. Specify the number of seconds by which the bring-up of the multichassis aggregated Ethernet interface should be deferred after you reboot Switch A and Switch B.



NOTE: The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
```

8. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
```

9. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

10. Enable VLAN interfaces on Switch A and Switch B using the original CLI.

Switch A Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 500 family inet address 10.3.3.2/8
```

```
[edit]
user@switch# set vlans v100 vlan-id 100
```

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```

11. Enable a VLAN on the MC-LAG on Switch A and Switch B using ELS:

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching interface-mode trunk
```

```
[edit]
user@switch# set vlans v100 vlan-id 100
```

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```

Step-by-Step Procedure

To enable RSTP:

1. Enable RSTP globally on all interfaces on Switch A and Switch B.



NOTE: The all option is not available on ELS, so you cannot issue this command on ELS.

```
[edit]
user@switch# set protocols rstp interface all mode point-to-point
```

ELS:

```
[edit]
user@switch# set protocols rstp interface ae1.0 mode point-to-point
```

2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B.



NOTE: This command is not needed on ELS.

```
[edit]
user@switch# set protocols rstp interface ae0.0 disable
```

3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpd-block-on-edge need to be configured.

```
[edit]
user@switch# set protocols rstp interface ae1.0 edge
```

4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpdu-block-on-edge need to be configured.

[edit]

```
user@switch# set protocols rstp bpdu-block-on-edge
```

Results

From configuration mode, confirm your configuration by entering the **show chassis**, **show interfaces**, **show protocols**, **show multi-chassis**, and **show vlans** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Switch A—Original CLI

```
user@SwitchA# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@SwitchA# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
    }
  }
}
```

```
        system-id 00:01:02:03:04:05;
        admin-key 3;
    }
    mc-ae {
        mc-ae-id 3;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240;
    }
}
unit 0 {
    family ethernet-switching {
        port-mode trunk;
        vlan {
            members v100;
        }
    }
}
vlan {
    unit 500 {
        family inet {
            address 10.3.3.2/8;
        }
    }
}

user@SwitchA# show protocols
iccp {
    local-ip-addr 10.3.3.2;
    peer 10.3.3.1 {
        session-establishment-hold-time 50;
        backup-liveness-detection {
            backup-peer-ip 10.207.64.233;
        }
        liveness-detection {
            minimum-receive-interval 1000;
            transmit-interval {
                minimum-interval 1000;
            }
        }
    }
}
rstp {
    interface ae0.0 {
        disable;
    }
    interface ae1.0 {
        edge;
    }
    interface all {
        mode point-to-point;
    }
    bpdu-block-on-edge;
}
```

```
user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
  interface ae0;
}
```

```
user@SwitchA# show vlans
v100 {
  vlan-id 100;
}
v500 {
  vlan-id 500;
  l3-interface vlan.500;
}
```

Switch A--ELS

```
user@SwitchA# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}
```

```
user@SwitchA# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
```

```
        mc-ae-id 3;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240;
    }
}
unit 0 {
    family ethernet-switching {
        interface-mode trunk;
        vlan {
            members v100;
        }
    }
}
}
vlan {
    unit 500 {
        family inet {
            address 10.3.3.2/8;
        }
    }
}
}

user@SwitchA# show protocols
iccp {
    local-ip-addr 10.3.3.2;
    peer 10.3.3.1 {
        session-establishment-hold-time 50;
        backup-liveness-detection {
            backup-peer-ip 10.207.64.233;
        }
        liveness-detection {
            minimum-receive-interval 1000;
            transmit-interval {
                minimum-interval 1000;
            }
        }
    }
}
}

rstp {
    interface ae1.0 {
        edge;
    }
    mode point-to-point;
}
bpdv-block-on-edge;
}

user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
    interface ae0;
}
}

user@SwitchA# show switch-options
service-id 10;
```

```
user@SwitchA# show vlans
v100 {
  vlan-id 100;
}
v500 {
  vlan-id 500;
  l3-interface irb.500;
}
```

Switch B—Original CLI

```
user@SwitchB# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@SwitchB# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/46 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
  }
  mc-ae {
    mc-ae-id 3;
    chassis-id 1;
    mode active-active;
    status-control standby;
    init-delay-time 240;
  }
}
```

```
    }
  }
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
vlan {
  unit 500 {
    family inet {
      address 10.3.3.1/8;
    }
  }
}

user@SwitchB# show protocols
iccp {
  local-ip-addr 10.3.3.1;
  peer 10.3.3.2 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.234;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}
}
rstp {
  interface ae0.0 {
    disable;
  }
  interface ae1.0 {
    edge;
  }
  interface all {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
  interface ae0;
}

user@SwitchB# show vlans
v100 {
  vlan-id 100;
}
```



```
v500 {  
  vlan-id 500;  
  l3-interface vlan.500;  
}
```

Switch B--ELS

```
user@SwitchB# show chassis  
aggregated-devices {  
  ethernet {  
    device-count 2;  
  }  
}  
  
user@SwitchB# show interfaces  
xe-0/0/12 {  
  ether-options {  
    802.3ad ae0;  
  }  
}  
xe-0/0/13 {  
  ether-options {  
    802.3ad ae0;  
  }  
}  
xe-0/0/46 {  
  ether-options {  
    802.3ad ae1;  
  }  
}  
ae0 {  
  unit 0 {  
    family ethernet-switching {  
      interface-mode trunk;  
      vlan {  
        members v500;  
      }  
    }  
  }  
}  
ae1 {  
  aggregated-ether-options {  
    lacp {  
      active;  
      system-id 00:01:02:03:04:05;  
      admin-key 3;  
    }  
    mc-ae {  
      mc-ae-id 3;  
      chassis-id 1;  
      mode active-active;  
      status-control standby;  
      init-delay-time 240;  
    }  
  }  
  unit 0 {  
    family ethernet-switching {
```

```
        interface-mode trunk;
        vlan {
            members v100;
        }
    }
}
vlan {
    unit 500 {
        family inet {
            address 10.3.3.1/8;
        }
    }
}

user@SwitchB# show protocols
iccp {
    local-ip-addr 10.3.3.1;
    peer 10.3.3.2 {
        session-establishment-hold-time 50;
        backup-liveness-detection {
            backup-peer-ip 10.207.64.234;
        }
        liveness-detection {
            minimum-receive-interval 1000;
            transmit-interval {
                minimum-interval 1000;
            }
        }
    }
}

rstp {
    interface ae1.0 {
        edge;
    }
    mode point-to-point;
}
bpdud-block-on-edge;

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
    interface ae0;
}

user@SwitchB# show switch-options
service-id 10;

user@SwitchB# show vlans
v100 {
    vlan-id 100;
}
v500 {
    vlan-id 500;
    l3-interface irb.500;
}
```

Verification

Verify that the configuration is working properly.

- [Verifying That ICCP Is Working on Switch A on page 233](#)
- [Verifying That ICCP Is Working on Switch B on page 233](#)
- [Verifying That LACP Is Active on Switch A on page 234](#)
- [Verifying That LACP Is Active on Switch B on page 234](#)
- [Verifying That the Multichassis Aggregated Ethernet and ICL-PL Interfaces Are Up on Switch A on page 234](#)
- [Verifying That the Multichassis Aggregated Ethernet and ICL-PL Interfaces Are Up on Switch B on page 235](#)
- [Verifying That MAC Learning Is Occurring on Switch A and Switch B on page 235](#)

Verifying That ICCP Is Working on Switch A

Purpose Verify that ICCP is running on Switch A.

Action [edit]
user@switch> **show iccp**
Redundancy Group Information for peer 10.3.3.1
TCP Connection : Established
Liveliness Detection : Up

Client Application: MCSNOOPD

Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That ICCP Is Working on Switch B

Purpose Verify that ICCP is running on Switch B.

Action **show iccp**

[edit]
user@switch> **show iccp**
Redundancy Group Information for peer 10.3.3.2
TCP Connection : Established
Liveliness Detection : Up

Client Application: MCSNOOPD

Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That LACP Is Active on Switch A

Purpose Verify that LACP is active on Switch A.

Action [edit]
user@switch> show lacp interfaces
Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/46	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/46	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol: Receive State Transmit State Mux State
xe-0/0/46 Current Fast periodic Collecting distributing

Meaning This output shows that Switch A is participating in LACP negotiation.

Verifying That LACP Is Active on Switch B

Purpose Verify that LACP is active on Switch B.

Action [edit]
user@switch> show lacp interfaces
Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/44	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/44	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol: Receive State Transmit State Mux State
xe-0/0/44 Current Fast periodic Collecting distributing

Meaning This output shows that Switch B is participating in LACP negotiation.

Verifying That the Multichassis Aggregated Ethernet and ICL-PL Interfaces Are Up on Switch A

Purpose Verify that the multichassis aggregated Ethernet and ICL-PL interfaces are up on Switch A.

Action [edit]
user@switch> show interfaces mc-ae
Member Link : ae1
Current State Machine's State: mcae active state
Local Status : active
Local State : up
Peer Status : active
Peer State : up
Logical Interface : ae1.0
Topology Type : bridge
Local State : up
Peer State : up
Peer Ip/MCP/State : 10.3.3.1 ae0.0 up

Meaning This output shows that the multichassis aggregated Ethernet and ICL-PL interfaces on Switch A is up and active.

Verifying That the Multichassis Aggregated Ethernet and ICL-PL Interfaces Are Up on Switch B

Purpose Verify that the multichassis aggregated Ethernet and ICL-PL interfaces are up on Switch B.

Action [edit]
user@switch> show interfaces mc-ae
Member Link : ae1
Current State Machine's State: mcae active state
Local Status : active
Local State : up
Peer Status : active
Peer State : up
Logical Interface : ae1.0
Topology Type : bridge
Local State : up
Peer State : up
Peer Ip/MCP/State : 10.3.3.2 ae0.0 up

Meaning This output shows that the multichassis aggregated Ethernet and ICL-PL interface on Switch B is up and active.

Verifying That MAC Learning Is Occurring on Switch A and Switch B

Purpose Verify that MAC learning is working on Switch A and B.

Action [edit]
user@switch> **show ethernet-switching table**
Ethernet-switching table: 10 entries, 4 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
v222	*	Flood		- All-members
v222	00:00:5e:00:01:01	Static		- Router
v222	00:10:94:00:00:05	Learn(L)	33	ae0.0 (MCAE)
v222	84:18:88:df:ac:ae	Learn(R)	0	ae2.0

Meaning The output shows four learned MAC addresses entries.

Troubleshooting

Troubleshooting a LAG That Is Down

Problem The **show interfaces terse** command shows that the MC-LAG is **down**.

Solution Check the following:

1. Verify that there is no configuration mismatch.
2. Verify that all member ports are up.
3. Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
4. Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

Related Documentation

- [Configuring Multichassis Link Aggregation on page 35](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 280](#)

Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization

Supported Platforms [EX4600](#), [QFabric System](#), [QFX Series](#)

There are two methods for enabling Layer 3 unicast functionality across a multichassis link aggregation group (MC-LAG). You can choose either to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG, or you can configure Virtual Router Redundancy Protocol (VRRP), but you cannot configure both at the same time. Because RVI interfaces share the same MAC address, if you enable MAC address synchronization, packets received on an MC-LAG peer with a destination MAC address that is the same as that of the peer's IRB MAC address will not be forwarded. The procedure to configure MAC address synchronization is included in this example. For more information on configuring VRRP for use in a Layer 3 unicast MC-LAG, see [“Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP” on page 253](#).

- [Requirements on page 237](#)
- [Overview on page 237](#)

- [Configuration on page 238](#)
- [Verification on page 250](#)
- [Troubleshooting on page 252](#)

Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for the QFX Series
- Two QFX3500, QFX3600, EX4600, QFX5100, or QFX10000 switches

Before you configure an MC-LAG for Layer 3 unicast, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch*.
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch*.
- Configure a standard MC-LAG between switches. See ["Example: Configuring Multichassis Link Aggregation" on page 41](#).

Overview

In this example, you configure an MC-LAG across two switches by including interfaces from both switches in an aggregated Ethernet interface (ae1). To support the MC-LAG, you create a second aggregated Ethernet interface (ae0) for the interchassis link-protection link (ICL-PL). You also configure a multichassis protection link for the ICL-PL, Inter-Chassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



NOTE: Layer 3 connectivity is required for ICCP.



NOTE: On QFX5100 and QFX10000 switches, if you try to configure both VRRP over IRB and MAC synchronization, you will receive a commit error.

To complete the configuration, configure MAC address synchronization between the peers and specify the same IP address on both Layer 3 interface members (also known as the routed VLAN interface [RVI] or the integrated routing and bridging (IRB) interface) in the MC-LAG VLAN.

Topology

The topology used in this example consists of two switches hosting an MC-LAG. The two switches are connected to a server. [Figure 33 on page 238](#) shows the topology of this example.

Figure 33: Configuring a Multichassis LAG Between Switch A and Switch B

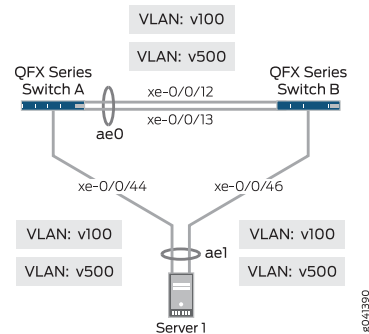


Table 5 on page 43 details the topology used in this configuration example.

Table 10: Components of the Topology for Configuring a Multichassis LAG Between Two Switches

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500, QFX3600, EX4600, QFX5100, or QFX10000 switch	<p>ae0 is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following interfaces are part of ae0: xe-0/0/12 and xe-0/0/13 on Switch A and xe-0/0/12 and xe-0/0/13 on Switch B. These interfaces are included in VLAN v500.</p> <p>ae1 is configured as an MC-LAG, and the following two interfaces are part of ae1: xe-0/0/44 on Switch A and xe-0/0/46 on Switch B. These interfaces are included in VLAN v100.</p>
Switch B	QFX3500, QFX3600, EX4600, QFX5100, or QFX10000 switch	

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

Switch A

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3

```



```

set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 10.1.1.10
set interfaces vlan unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v100 mcae-mac-synchronize
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval
    1000
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0

```

Switch B

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae0 unit 0 family ethernet-switching vlan members v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 10.1.1.10
set interfaces vlan unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v100 mcae-mac-synchronize
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval
    1000
set protocols rstp interface ae0.0 disable

```

```
set protocols rstp interface ae1.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

Configuring MC-LAG on Two Switches

Step-by-Step Procedure

To enable multichassis protection link between MC-LAG peers:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To enable multichassis protection link between MC-LAG peers:

1. Configure the number of LAGs on both Switch A and Switch B.

Switch A and Switch B:

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2
```

2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
```

Switch A:

```
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
```

```
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1
```

3. Configure a trunk interface between Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```

4. Configure a multichassis protection link between Switch A and Switch B.

Switch A:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

Switch B:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

**Step-by-Step
Procedure**

To enable ICCP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

2. Configure the peer IP address and minimum receive interval for a Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection minimum-receive-interval
1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval
1000
```

3. Configure the peer IP address and minimum transmit interval for a BFD session for ICCP on Switch A and Switch B.



NOTE: Configure at least 1000 milliseconds as the transmit interval minimum interval.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection transmit-interval
minimum-interval 1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval
minimum-interval 1000
```

4. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



NOTE: Configuring the session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

5. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



NOTE: By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during an MC-LAG peer reboot.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip
10.207.64.233
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.234
```

6. Configure Layer 3 connectivity across the ae0 ICCP link by adding a Layer 3 interface on both Switch A and Switch B.

```
[edit vlans v500]
user@switch# set vlan-id 500
user@switch# set l3-interface vlan.500
```

```
[edit interfaces ae0 unit 0 family ethernet-switching]
user@switch# set port-mode trunk
user@switch# set vlan members v500
```

Step-by-Step Procedure To enable the MC-LAG interface:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Enable LACP on the MC-LAG interface on Switch A and Switch B.



NOTE: At least one end needs to be active. The other end can be either active or passive.

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options lacp active**

2. Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae mc-ae-id 3**

3. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae chassis-id 0**

Switch B:

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae chassis-id 1**

4. Specify the operating mode of the MC-LAG on both Switch A and Switch B.



NOTE: Only active-active mode is supported at this time.

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae mode active-active**

5. Specify the status control for MC-LAG on Switch A and Switch B.



NOTE: You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A:

[edit interfaces]

user@switch# **set ae1 aggregated-ether-options mc-ae status-control active**

Switch B:

[edit interfaces]

```
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```



NOTE: If you configure both nodes as `prefer-status-control-active`, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.

6. Specify the number of seconds by which the bring-up of the MC-AE interface should be deferred after you reboot Switch A and Switch B.



NOTE: The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
```

7. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
```

8. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

9. Enable a VLAN on the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
```

```
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk
```

```
[edit]
```

```
user@switch# set vlans v100 vlan-id 100
```

```
[edit interfaces]
```

```
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```

10. Create a Layer 3 interface for the MC-LAG VLAN and assign the same IP address on both Switch A and Switch B.

```
[edit]
```

```
user@switch# set vlans v100 l3-interface vlan.100
```

```
[edit interfaces]
```

```
user@switch# set vlan unit 100 family inet address 10.1.1.10
```

11. Configure MAC address synchronization in the MC-LAG VLAN on both Switch A and Switch B.

```
[edit]
```

```
user@switch# set vlans v100 mcae-mac-synchronize
```

**Step-by-Step
Procedure**

To enable RSTP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Enable RSTP globally on all interfaces on Switch A and Switch B.
[edit]
user@switch# **set protocols rstp interface all mode point-to-point**
2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B:
[edit]
user@switch# **set protocols rstp interface ae0.0 disable**
3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpdu-block-on-edge need to be configured.

4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.
[edit]
user@switch# **set protocols rstp interface ae1.0 edge**



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpdu-block-on-edge need to be configured.

[edit]
user@switch# **set protocols rstp bpdu-block-on-edge**

Results

Display the results of the configuration on Switch A.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
    }
  }
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
}
```

```
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 0;
      mode active-active;
      status-control active;
      init-delay-time 240
    }
  }
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
vlan {
  unit 100 {
    family inet {
      address 10.1.1.10;
    }
  }
  unit 500 {
    family inet {
      address 10.3.3.2/8;
    }
  }
}

user@SwitchA# show protocols
iccp {
  local-ip-addr 10.3.3.2;
```



```
peer 10.3.3.1 {  
    session-establishment-hold-time 50;  
    backup-liveness-detection {  
        backup-peer-ip 10.207.64.233;  
    }  
    liveness-detection {  
        minimum-receive-interval 1000;  
        transmit-interval {  
            minimum-interval 1000;  
        }  
    }  
}  
}  
  
rstp {  
    interface ae0.0 {  
        disable;  
    }  
    interface ae1.0 {  
        edge;  
    }  
    interface all {  
        mode point-to-point;  
    }  
    bpdu-block-on-edge;  
}
```

```
user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
    interface ae0;
}
```

```
user@SwitchA# show vlags
vlags {
  v100 {
    vlan-id 100;
    l3-interface vlag.100;
    mcae-mac-synchronize;
  }
  v500 {
    vlan-id 500;
    l3-interface vlag.500;
  }
}
```

Display the results of the configuration on Switch B.

```
chassis {
  aggregated-devices {
    ethernet {
      device-count 2;
    }
  }
}
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
```

```
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/46 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 1;
        mode active-active;
        status-control standby;
        init-delay-time 240
      }
    }
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v100;
        }
      }
    }
  }
  vlan {
    unit 100 {
      family inet {
        address 10.1.1.10;
      }
    }
    unit 500 {
      family inet {
        address 10.3.3.1/8;
      }
    }
  }
```

```
    }  
  }  
}  
  
user@SwitchB# show protocols  
iccp {  
  local-ip-addr 10.3.3.1;  
  peer 10.3.3.2 {  
    session-establishment-hold-time 50;  
    backup-liveness-detection {  
      backup-peer-ip 10.207.64.234;  
    }  
    liveness-detection {  
      minimum-receive-interval 1000;  
      transmit-interval {  
        minimum-interval 1000;  
      }  
    }  
  }  
}  
}  
  
rstp {  
  interface ae0.0 {  
    disable;  
  }  
  interface ae1.0 {  
    edge;  
  }  
  interface all {  
    mode point-to-point;  
  }  
  bpdu-block-on-edge;  
}  
}  
  
multi-chassis {  
  multi-chassis-protection 10.3.3.2 {  
    interface ae0;  
  }  
}  
  
vlans {  
  v100 {  
    vlan-id 100;  
    l3-interface vlan.100;  
    mcae-mac-synchronize;  
  }  
  v500 {  
    vlan-id 500;  
    l3-interface vlan.500;  
  }  
}
```

Verification

To verify that the MC-LAG group has been created and is working properly, perform these tasks:

- [Verifying That ICCP Is Working on Switch A on page 250](#)
- [Verifying That ICCP Is Working on Switch B on page 250](#)
- [Verifying That LACP Is Active on Switch A on page 251](#)
- [Verifying That LACP Is Active on Switch B on page 251](#)
- [Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A on page 251](#)
- [Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B on page 252](#)
- [Verifying MAC Address Synchronization on Switch A and Switch B on page 252](#)

Verifying That ICCP Is Working on Switch A

Purpose Verify that ICCP is running on Switch A.

Action [edit]
user@switch# **show iccp**
Redundancy Group Information for peer 10.3.3.1
TCP Connection : Established
Liveliness Detection : Up

Client Application: MCSNOOPD

Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That ICCP Is Working on Switch B

Purpose Verify that ICCP is running on Switch B.

Action **show iccp**

[edit]
user@switch# **show iccp**
Redundancy Group Information for peer 10.3.3.2
TCP Connection : Established
Liveliness Detection : Up

Client Application: MCSNOOPD

Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That LACP Is Active on Switch A

Purpose Verify that LACP is active on Switch A.

Action [edit]
 user@switch# show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/46	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/46	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol:

Receive State	Transmit State	Mux State
xe-0/0/46	Current	Fast periodic Collecting distributing

Meaning This output shows that Switch A is participating in LACP negotiation.

Verifying That LACP Is Active on Switch B

Purpose Verify that LACP is active on Switch B

Action [edit]
 user@switch# show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/44	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/44	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol:

Receive State	Transmit State	Mux State
xe-0/0/44	Current	Fast periodic Collecting distributing

Meaning This output shows that Switch B is participating in LACP negotiation.

Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch A

Purpose Verify that the MC-AE and ICL-PL interfaces are up on Switch A.

Action [edit]
 user@switch# show interfaces mc-ae

```
Member Link                : ae1
Current State Machine's State: mcae active state
Local Status                : active
Local State                  : up
Peer Status                  : active
Peer State                   : up
  Logical Interface          : ae1.0
  Topology Type               : bridge
  Local State                 : up
  Peer State                  : up
  Peer Ip/MCP/State           : 10.3.3.1 ae0.0 up
```

Meaning This output shows that the MC-AE interface on Switch A is up and active.

Verifying That the MC-AE and ICL-PL Interfaces Are Up on Switch B

Purpose Verify that the MC-AE and ICL-PL interfaces are up on Switch B.

Action [edit]
user@switch# **show interfaces mc-ae**
Member Link : ae1
Current State Machine's State: mcae active state
Local Status : active
Local State : up
Peer Status : active
Peer State : up
Logical Interface : ae1.0
Topology Type : bridge
Local State : up
Peer State : up
Peer Ip/MCP/State : 10.3.3.2 ae0.0 up

Meaning This output shows that the MC-AE interface on Switch B is up and active.

Verifying MAC Address Synchronization on Switch A and Switch B

Purpose Confirm that MAC address synchronization is working on both Switch A and Switch B.

Action [edit]
user@switch# **show ethernet-switching table vlan v100**
Ethernet-switching table: 3 unicast entries

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood		- All-members
v100	84:18:88:df:35:36	Static		- Router
v100	84:18:88:df:83:0a	Static		- Router

Meaning The output shows two static MAC addresses in VLAN v100. The addresses belong to the Layer 3 IRB/RVI interfaces of both Switch A and Switch B that you configured in the MC-LAG VLAN. Appearance of both addresses indicates that MAC address synchronization is working.

Troubleshooting

Troubleshooting a LAG That Is Down

Problem The **show interfaces terse** command shows that the MC-LAG is **down**

Solution Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
- Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

- Related Documentation**
- [Configuring Multichassis Link Aggregation on page 35](#)
 - [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 280](#)
 - [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 280](#)

Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP

Supported Platforms [EX4600, QFX Series](#)



NOTE: Multichassis link aggregation (MC-LAG) is supported on QFX3500 and QFX3600 standalone switches running the original CLI, and QFX3500, QFX3600, QFX5100, EX4600, and QFX10000 standalone switches running Enhanced Layer 2 Software.

There are two methods for enabling Layer 3 unicast functionality across a multichassis link aggregation group (MC-LAG) to control traffic flow. You can choose either to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG, or you can configure Virtual Router Redundancy Protocol (VRRP), but you cannot configure both at the same time. Because RVI interfaces share the same MAC address, if you enable MAC address synchronization, packets received on an MC-LAG peer with a destination MAC address that is the same as that of the peer's IRB MAC address will not be forwarded. The procedure to configure VRRP for use in a Layer 3 unicast MC-LAG is included in this example. For more information about configuring MAC address synchronization, see [“Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization” on page 236](#).

- [Requirements on page 253](#)
- [Overview on page 254](#)
- [Configuration on page 255](#)
- [Verification on page 275](#)
- [Troubleshooting on page 280](#)

Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for the QFX Series
- Two QFX3500, QFX3600, EX4600, QFX5100, or QFX10000 switches

Before you configure an MC-LAG, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch*.

- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch*.
- Configure Virtual Router Redundancy Protocol (VRRP) on a switch. See *Configuring Basic VRRP Support for QFX*.

Overview

In this example, you configure an MC-LAG across two switches by including interfaces from both switches in an aggregated Ethernet interface (ae1). To support the MC-LAG, create a second aggregated Ethernet interface (ae0) for the interchassis control link-protection link (ICL-PL). Configure a multichassis protection link for the ICL-PL, the Inter-Chassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



NOTE: Layer 3 connectivity is required for ICCP.



NOTE: On QFX5100 and QFX10000 switches, if you try to configure both VRRP over IRB and MAC synchronization, you will receive a commit error.

To complete the configuration, enable VRRP by completing the following steps:

1. Create a routed VLAN interface (RVI).
2. Create a VRRP group and assign a virtual IP address that is shared between each switch in the VRRP group.
3. Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group.
4. Configure Layer 3 connectivity between the VRRP groups.

Topology

The topology used in this example consists of two switches hosting MC-LAGs. The two switches are connected to a server. [Figure 31 on page 197](#) shows the topology of this example.

Figure 34: Configuring a Multichassis LAG Between Switch A and Switch B

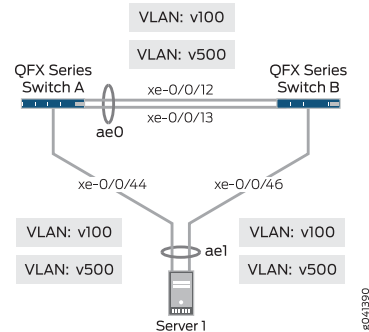


Table 5 on page 43 details the topology used in this configuration example.

Table 11: Components of the Topology for Configuring a Multichassis LAG Between Two Switches

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500, QFX3600, EX4600, QFX5100, QFX10000 switch	ae0 is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following interfaces are part of ae0: xe-0/0/12 and xe-0/0/13 on Switch A and xe-0/0/12 and xe-0/0/13 on Switch B. ae1 is configured as an MC-LAG, and the following two interfaces are part of ae1: xe-0/0/44 on Switch A and xe-0/0/46 on Switch B.
Switch B	QFX3500, QFX3600, EX4600, QFX5100, QFX10000 switch	

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.



NOTE: This example shows how to configure MC-LAG using both the original CLI and Enhanced Layer 2 Software (ELS).

In ELS, there are three statements and one additional statement that are different from the original CLI:

- The port-mode statement in the [edit interfaces *interface-name* unit *number* family ethernet-switching] hierarchy is not supported. Use the interface-mode statement instead.
- The vlan statement in the [edit interfaces *interface-name*] hierarchy is not supported. Use the irb statement instead.
- The vlan.logical-interface-number option in the [edit vlans *vlan-name* l3-interface] option is not supported. Use the irb.logical-interface-number option instead.
- The service-id statement in the [edit switch-options] hierarchy is required in the ELS CLI.

Switch A—Original CLI:

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500 v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
set interfaces vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
set interfaces vlan unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae0 disable
set protocols rstp interface ae1 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpd-block-on-edge
```

```
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

Switch A—ELS

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500 v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
set interfaces irb unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 3.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae1 edge
set protocols rstp interface ae1 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
set switch-options service-id 10
```

Switch B—Original CLI:

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500 v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
set interfaces vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
set interfaces vlan unit 500 family inet address 10.3.3.1/8
```

```
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae0 disable
set protocols rstp interface ae1 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

Switch B—ELS:

```
set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500 v100
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
set interfaces irb unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval 1000
set protocols rstp interface ae1 edge
set protocols rstp interface ae1 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
set switch-options service-id 10
```

Configuring MC-LAG on Two Switches

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To enable multichassis protection link between MC-LAG peers:

1. Configure the number of LAGs on both Switch A and Switch B.

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 2
```
2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

Switch A and Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
[edit interfaces]
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
```

Switch A:

```
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
```

Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1
```

3. Configure a trunk interface between Switch A and Switch B using the original CLI.

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```
4. Configure a trunk interface between Switch A and Switch B using ELS.

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk
```
5. Configure a multichassis protection link between Switch A and Switch B.

Switch A:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

Switch B:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

**Step-by-Step
Procedure**

To enable ICCP:

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

2. Configure the peer IP address and minimum receive interval for a Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection minimum-receive-interval
1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval
1000
```

3. Configure the peer IP address and minimum transmit interval for a BFD session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection transmit-interval
minimum-interval 1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval
minimum-interval 1000
```

4. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



NOTE: Configuring the session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
```

```
user@switch# set iccp peer 10.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
```

```
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

5. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



NOTE: By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during an MC-LAG peer reboot.

Switch A:

```
[edit protocols]
```

```
user@switch# set iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
```

Switch B:

```
[edit protocols]
```

```
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
```

6. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B using the original CLI.

```
[edit vlans]
```

```
user@switch# set v500 vlan-id 500
```

```
[edit vlans]
```

```
user@switch# set v500 l3-interface vlan.500
```

```
[edit interfaces]
```

```
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk vlan members v500 v100
```

7. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B using ELS.

```
edit vlans]
```

```
user@switch# set v500 vlan-id 500
```

```
[edit vlans]
```

```
user@switch# set v500 l3-interface irb.500
```

```
[edit interfaces]
```

```
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk vlan members v500 v100
```

Step-by-Step Procedure

To enable the MC-LAG interface:

1. Enable LACP on the MC-LAG interface on Switch A and Switch B.



NOTE: At least one end needs to be active. The other end can be either active or passive.

[edit interfaces]

user@switch# set ae1 aggregated-ether-options lacp active

2. Specify the same multichassis aggregated Ethernet identification number on both MC-LAG peers on Switch A and Switch B.

[edit interfaces]

user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3

3. Specify the same service ID on Switch A and Switch B.

ELS:

[edit]

user@switch# set switch-options service-id 10

4. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

[edit interfaces]

user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 0

Switch B:

[edit interfaces]

user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1

5. Specify the operating mode of the MC-LAG on both Switch A and Switch B.



NOTE: Only active-active mode is supported at this time.

[edit interfaces]

user@switch# set ae1 aggregated-ether-options mc-ae mode active-active

6. Specify the status control for MC-LAG on Switch A and Switch B.



NOTE: You must configure status control on both Switch A and Switch B hosting the MC-LAG. If one peer is in active mode, the other must be in standby mode.

Switch A:

[edit interfaces]

user@switch# set ae1 aggregated-ether-options mc-ae status-control active

Switch B:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
```



NOTE: If you configure both nodes as `prefer-status-control-active`, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.

7. Specify the number of seconds by which the bring-up of the multichassis aggregated Ethernet interface should be deferred after you reboot Switch A and Switch B.



NOTE: The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
```

8. Specify the same LACP system ID for the MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
```

9. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
```

10. Enable a VLAN on the MC-LAG on Switch A and Switch B using the original CLI.

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk
```

```
[edit]
user@switch# set vlans v100 vlan-id 100
```

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```

11. Enable a VLAN on the MC-LAG on Switch A and Switch B using ELS.

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching interface-mode trunk
```

```
[edit]
user@switch# set vlans v100 vlan-id 100
```

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
```

12. Enable VRRP on the MC-LAG on Switch A and Switch B:

- Create a routed VLAN interface (RVI), assign a virtual IP address that is shared between each switch in the VRRP group, and assign an individual IP address for each switch in the VRRP group:

Switch A:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1
virtual-address 10.1.1.1
```

Switch B:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1
virtual-address 10.1.1.1
```

- Assign the priority for each switch in the VRRP group:



NOTE: The switch configured with the highest priority is the master.

Switch A:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority
200
```

Switch B:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1
priority 150
```

- Enable the switch to accept all packets destined for the virtual IP address if it is the master in the VRRP group:

Switch A:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1
accept-data
```

Switch B:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1
accept-data
```

- Configure Layer 3 connectivity between Switch A and Switch B.

```
[edit interfaces]
user@switch# set vlans v100 l3-interface vlan.100
```

13. Enable VRRP on the MC-LAG on Switch A and Switch B using ELS:

- Create a routed VLAN interface (RVI), assign a virtual IP address that is shared between each switch in the VRRP group, and assign an individual IP address for each switch in the VRRP group:

Switch A:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1
virtual-address 10.1.1.1
```

Switch B:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1
virtual-address 10.1.1.1
```

- Assign the priority for each switch in the VRRP group:



NOTE: The switch configured with the highest priority is the master.

Switch A:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority
200
```

Switch B:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority
150
```

- Enable the switch to accept all packets destined for the virtual IP address if it is the master in the VRRP group:

Switch A:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1
accept-data
```

Switch B:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1
accept-data
```

- Configure Layer 3 connectivity between Switch A and Switch B.

```
[edit interfaces]
user@switch# set irb v100 l3-interface irb.100
```

**Step-by-Step
Procedure**

To enable RSTP:

1. Enable RSTP globally on all interfaces on Switch A and Switch B.



NOTE: The all option is not available on ELS, so you cannot issue this command on ELS.

[edit]

```
user@switch# set protocols rstp interface all mode point-to-point
```

ELS:

[edit]

```
user@switch# set protocols rstp interface ae1 mode point-to-point
```

2. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B.



NOTE: This command is not needed on ELS.

[edit]

```
user@switch# set protocols rstp interface ae0 disable
```

3. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpdu-block-on-edge need to be configured.

[edit]

```
user@switch# set protocols rstp interface ae1 edge
```

4. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpdu-block-on-edge need to be configured.

[edit]

```
user@switch# set protocols rstp bpdu-block-on-edge
```

Results

From configuration mode, confirm your configuration by entering the **show chassis**, **show interfaces**, **show protocols**, **show multi-chassis**, and **show vlans** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Switch A—Original CLI

```
user@SwitchA# show chassis
```

```
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@SwitchA# show interfaces
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/44 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240;
      }
    }
    unit 0 {
      family ethernet-switching {
        port-mode trunk;
        vlan {
          members v100;
        }
      }
    }
  }
}
```

```
}
vlan {
  unit 100 {
    family inet {
      address 10.1.1.11/8 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 200;
          accept-data;
        }
      }
    }
  }
  unit 500 {
    family inet {
      address 10.3.3.2/8;
    }
  }
}

user@SwitchA# show protocols
iccp {
  local-ip-addr 10.3.3.2;
  peer 10.3.3.1 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.233;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}

rstp {
  interface ae0.0 {
    disable;
  }
  interface ae1.0 {
    edge;
  }
  interface all {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}

user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
  interface ae0;
}

user@SwitchA# show vlans
v100 {
```

```
    vlan-id 100;
    l3-interface vlan.100;
  }
  v500 {
    vlan-id 500;
    l3-interface vlan.500;
  }
}
```

Switch A—ELS

```
user@SwitchA# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@SwitchA# show interfaces
interfaces {
  xe-0/0/12 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/13 {
    ether-options {
      802.3ad ae0;
    }
  }
  xe-0/0/44 {
    ether-options {
      802.3ad ae1;
    }
  }
  ae0 {
    unit 0 {
      family ethernet-switching {
        interface-mode trunk;
        vlan {
          members v500;
        }
      }
    }
  }
  ae1 {
    aggregated-ether-options {
      lacp {
        active;
        system-id 00:01:02:03:04:05;
        admin-key 3;
      }
      mc-ae {
        mc-ae-id 3;
        chassis-id 0;
        mode active-active;
        status-control active;
        init-delay-time 240;
      }
    }
  }
}
```

```
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
vlan {
  unit 100 {
    family inet {
      address 10.1.1.11/8 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 200;
          accept-data;
        }
      }
    }
  }
  unit 500 {
    family inet {
      address 10.3.3.2/8;
    }
  }
}

user@SwitchA# show protocols
iccp {
  local-ip-addr 10.3.3.2;
  peer 10.3.3.1 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.233;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}
rstp {
  interface ae1.0 {
    edge;
  }
  mode point-to-point;
  bpdv-block-on-edge;
}

user@SwitchA# show multi-chassis
```



```

multi-chassis-protection 10.3.3.1 {
  interface ae0;
}

user@SwitchA# show switch-options
service-id 10;

user@SwitchA# show vlans
v100 {
  vlan-id 100;
  l3-interface irb.100;
}
v500 {
  vlan-id 500;
  l3-interface irb.500;
}

```

Switch B—Original CLI

```

user@SwitchB# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@SwitchB# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
    }
  }
}

```

```
        admin-key 3;
    }
    mc-ae {
        mc-ae-id 3;
        chassis-id 1;
        mode active-active;
        status-control active;
        init-delay-time 240;
    }
}
unit 0 {
    family ethernet-switching {
        port-mode trunk;
        vlan {
            members v100;
        }
    }
}
vlan {
    unit 100 {
        family inet {
            address 10.1.1.10/8 {
                vrrp-group 1 {
                    virtual-address 10.1.1.1;
                    priority 200;
                    accept-data;
                }
            }
        }
    }
    unit 500 {
        family inet {
            address 10.3.1/8;
        }
    }
}

user@SwitchB# show protocols
iccp {
    local-ip-addr 10.3.3.1;
    peer 10.3.3.2 {
        session-establishment-hold-time 50;
        backup-liveness-detection {
            backup-peer-ip 10.207.64.234;
        }
        liveness-detection {
            minimum-receive-interval 1000;
            transmit-interval {
                minimum-interval 1000;
            }
        }
    }
}
rstp {
    interface ae0.0 {
```

```

        disable;
    }
    interface ae1.0 {
        edge;
    }
    interface all {
        mode point-to-point;
    }
    bpdu-block-on-edge;
}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
    interface ae0;
}

user@SwitchB# show vlans
v100 {
    vlan-id 100;
    l3-interface vlan.100;
}
v500 {
    vlan-id 500;
    l3-interface vlan.500;
}

```

Switch B—ELS

```

user@SwitchB# show chassis
aggregated-devices {
    ethernet {
        device-count 2;
    }
}

user@SwitchB# show interfaces
xe-0/0/12 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/13 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/44 {
    ether-options {
        802.3ad ae1;
    }
}
ae0 {
    unit 0 {
        family ethernet-switching {
            interface-mode trunk;
            vlan {
                members v500;
            }
        }
    }
}

```

```
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 1;
      mode active-active;
      status-control active;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
vlan {
  unit 100 {
    family inet {
      address 10.1.1.10/8 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 200;
          accept-data;
        }
      }
    }
  }
  unit 500 {
    family inet {
      address 10.3.3.1/8;
    }
  }
}

user@SwitchB# show protocols
iccp {
  local-ip-addr 10.3.3.1;
  peer 10.3.3.2 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.234;
    }
    liveness-detection {
```

```
        minimum-receive-interval 1000;
        transmit-interval {
            minimum-interval 1000;
        }
    }
}
rstp {
    interface ae1.0 {
        edge;
    }
    mode point-to-point;
}
bpdu-block-on-edge;
}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
    interface ae0;
}

user@SwitchB# show switch-options
service-id 10;

user@SwitchB# show vlans
v100 {
    vlan-id 100;
    l3-interface irb.100;
}
v500 {
    vlan-id 500;
    l3-interface irb.500;
}
```

Verification

Verify that the configuration is working properly.

- [Verifying That ICCP Is Working on Switch A on page 276](#)
- [Verifying That ICCP Is Working on Switch B on page 276](#)
- [Verifying That LACP Is Active on Switch A on page 276](#)
- [Verifying That LACP Is Active on Switch B on page 277](#)
- [Verifying That the multichassis aggregated Ethernet and ICL-PL Interfaces Are Up on Switch A on page 277](#)
- [Verifying That the Multichassis Aggregated Ethernet and ICL-PL Interfaces Are Up on Switch B on page 278](#)
- [Verifying that MAC Learning Is Occurring on Switch A on page 278](#)
- [Verifying that MAC Learning Is Occurring on Switch B on page 278](#)
- [Verifying that Switch A is the Master in the VRRP Group on page 279](#)
- [Verifying that Switch B is the Backup Member in the VRRP Group on page 279](#)

- [Verifying that the Virtual IP Address is Attached to an Individual Address on Switch A on page 280](#)
- [Verifying that the Virtual IP Address is Attached to an Individual Address on Switch B on page 280](#)

Verifying That ICCP Is Working on Switch A

Purpose Verify that ICCP is running on Switch A.

Action [edit]
 user@switch> **show iccp**
 Redundancy Group Information for peer 10.3.3.1
 TCP Connection : Established
 Liveliness Detection : Up

 Client Application: MCSNOOPD

 Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That ICCP Is Working on Switch B

Purpose Verify that ICCP is running on Switch B.

Action **show iccp**

 [edit]
 user@switch> **show iccp**
 Redundancy Group Information for peer 10.3.3.2
 TCP Connection : Established
 Liveliness Detection : Up

 Client Application: MCSNOOPD

 Client Application: eswd

Meaning This output shows that the TCP connection between the peers hosting the MC-LAG is up, liveness detection is up, and MCSNOOPD and ESWD client applications are running.

Verifying That LACP Is Active on Switch A

Purpose Verify that LACP is active on Switch A.

Action [edit]
 user@switch> show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/46	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/46	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol: Receive State Transmit State Mux State
 xe-0/0/46 Current Fast periodic Collecting distributing

Meaning This output shows that Switch A is participating in LACP negotiation.

Verifying That LACP Is Active on Switch B

Purpose Verify that LACP is active on Switch B.

Action [edit]
 user@switch> show lacp interfaces
 Aggregated interface: ae1

LACP state:	Role	Exp	Def	Dist	Col	Syn	Aggr	Timeout	Activity
xe-0/0/44	Actor	No	No	Yes	Yes	Yes	Yes	Fast	Active
xe-0/0/44	Partner	No	No	Yes	Yes	Yes	Yes	Fast	Active

LACP protocol: Receive State Transmit State Mux State
 xe-0/0/44 Current Fast periodic Collecting distributing

Meaning This output shows that Switch B is participating in LACP negotiation.

Verifying That the multichassis aggregated Ethernet and ICL-PL Interfaces Are Up on Switch A

Purpose Verify that the multichassis aggregated Ethernet and Inter-chassis Link Protection (ICL-PL) interfaces are up on Switch A.

Action [edit]
 user@switch> show interfaces mc-ae
 Member Link : ae1
 Current State Machine's State: mcae active state
 Local Status : active
 Local State : up
 Peer Status : active
 Peer State : up
 Logical Interface : ae1.0
 Topology Type : bridge
 Local State : up
 Peer State : up
 Peer Ip/MCP/State : 10.3.3.1 ae0.0 up

Meaning This output shows that the multichassis aggregated Ethernet and ICL-PL on Switch A is up and active.

Verifying That the Multichassis Aggregated Ethernet and ICL-PL Interfaces Are Up on Switch B

Purpose Verify that the multichassis aggregated Ethernet and ICL-PL interfaces are up on Switch B.

Action [edit]
 user@switch> show interfaces mc-ae
 Member Link : ae1
 Current State Machine's State: mcae active state
 Local Status : active
 Local State : up
 Peer Status : active
 Peer State : up
 Logical Interface : ae1.0
 Topology Type : bridge
 Local State : up
 Peer State : up
 Peer Ip/MCP/State : 10.3.3.2 ae0.0 up

Meaning This output shows that the multichassis aggregated Ethernet and ICL-PL interface on Switch B is up and active.

Verifying that MAC Learning Is Occurring on Switch A

Purpose Verify that MAC learning is working on Switch A.

Action [edit]
 user@switch> show ethernet-switching table
 Ethernet-switching table: 6 entries, 1 learned, 0 persistent entriesC

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood		- All-members
v100	00:00:5e:00:01:01	Static		- Router
v100	78:fe:3d:5a:07:42	Static		- Router
v100	78:fe:3d:5b:ad:c2	Learn(R)	0	ae0.0
v500	*	Flood		- All-members
v500	78:fe:3d:5a:07:42	Static		- Router

Meaning The output shows two static MAC address in VLAN v100 and one static MAC address in VLAN v500. These addresses belong to the Layer 3 RVI addresses on both Switch A and Switch B that you configured in the MC-LAG. The ICL-PL interface configured on the VRRP master member learned the VLAN v100 Learn (R) MAC address of the VRRP backup member.

Verifying that MAC Learning Is Occurring on Switch B

Purpose Verify that MAC learning is working on Switch B.

Action [edit]user@switch> **show ethernet-switching table**

Ethernet-switching table: 7 entries, 1 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood		- All-members
v100	00:00:5e:00:01:01	Static		- Router
v100	78:fe:3d:5a:07:42	Learn(R)	0	ae0.0
v100	78:fe:3d:5b:ad:c2	Static		- Router
v200	78:fe:3d:5b:ad:c2	Static		- Router
v500	*	Flood		- All-members
v500	78:fe:3d:5b:ad:c2	Static		- Router

Meaning The output shows two static MAC address in VLAN v100 and one static MAC address in VLAN v500. These addresses belong to the Layer 3 RVI addresses on both Switch A and Switch B that you configured in the MC-LAG. The ICL-PL interface configured on the VRRP backup member learned the VLAN v100 Learn (R) MAC address of the VRRP master member.

Verifying that Switch A is the Master in the VRRP Group

Purpose Verify that Switch A is the master member in the VRRP group.

Action [edit]user@switch> **show vrrp**

Interface	State	Group	VR state	VR Mode	Timer	Type	Address
vlan.100	up	1	master	Active	A 0.605	lcl	10.1.1.11
						vip	10.1.1.1

Meaning The output shows that Switch A is the master member in the VRRP group.

Verifying that Switch B is the Backup Member in the VRRP Group

Purpose Verify that Switch B is the backup member in the VRRP group.

Action [edit]user@switch> **show vrrp**

Interface	State	Group	VR state	VR Mode	Timer	Type	Address
vlan.100	up	1	backup	Active	A 0.605	lcl	10.1.1.10
						vip	10.1.1.1

Meaning The output shows that Switch B is the backup member in the VRRP group.

Verifying that the Virtual IP Address is Attached to an Individual Address on Switch A

Action [edit]
 user@switch# run show interfaces terse vlan

Interface	Admin	Link	Proto	Local	Remote
vlan	up	up			
vlan.100	up	up	inet	10.1.1.1/8 10.1.1.11/8	
vlan.500	up	up	inet	10.3.3.2/8	

Meaning The output shows that the virtual IP address (10.1.1.1/8) is bound to the individual IP address (10.1.1.11/8) on Switch A.

Verifying that the Virtual IP Address is Attached to an Individual Address on Switch B

Action [edit]
 user@switch# run show interfaces terse vlan

Interface	Admin	Link	Proto	Local	Remote
vlan	up	up			
vlan.100	up	up	inet	10.1.1.1/8 10.1.1.10/8	
vlan.500	up	up	inet	10.3.3.1/8	

Meaning The output shows that the virtual IP address (10.1.1.1/8) is bound to the individual IP address (10.1.1.10/8) on Switch B.

Troubleshooting

Troubleshooting a LAG That Is Down

Problem The `show interfaces terse` command shows that the MC-LAG is **down**.

Solution Check the following:

1. Verify that there is no configuration mismatch.
2. Verify that all member ports are up.
3. Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
4. Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

Related Documentation

- [Configuring Multichassis Link Aggregation on page 35](#)

Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP

Supported Platforms EX4600, QFX Series



NOTE: Multichassis link aggregation (MC-LAG) is supported on QFX3500 and QFX3600 standalone switches running the original CLI and QFX3500, QFX3600, QFX5100, EX4600, and QFX10000 standalone switches running Enhanced Layer 2 Software (ELS).

There are two methods for enabling Layer 3 multicast functionality across a multichassis link aggregation group (MC-LAG) to control traffic. You can choose either to synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG, or you can configure Virtual Router Redundancy Protocol (VRRP), but you cannot configure both at the same time. Because RVI interfaces share the same MAC address, if you enable MAC address synchronization, packets received on an MC-LAG peer with a destination MAC address that is the same as that of the peer's IRB MAC address will not be forwarded. The procedure to configure VRRP for use in a Layer 3 multicast MC-LAG is included in this example.

- [Requirements on page 281](#)
- [Overview on page 281](#)
- [Configuration on page 284](#)
- [Verification on page 317](#)

Requirements

This example uses the following hardware and software components:

- Junos OS Release 12.3 or later for the QFX3500 and QFX3600 standalone switches and Junos OS Release 13.2X51-D10 or later for the QFX5100 and EX4600 standalone switches, and Junos OS Release 15.1X53-D10 or later for the standalone QFX10000 switches.
- Two QFX3500 or QFX3600 standalone switches, two QFX5100 standalone switches, two EX4600, or two QFX10002 standalone switches.

Before you configure an MC-LAG for Layer 3 multicast using VRRP, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation Between a QFX Series Product and an Aggregation Switch*.
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a switch. See *Example: Configuring Link Aggregation with LACP Between a QFX Series Product and an Aggregation Switch*.

Overview

In this example, you configure two MC-LAGs across two switches, consisting of two aggregated Ethernet interfaces (ae1 and ae2). To support the MC-LAG, create a third aggregated Ethernet interface (ae0) for the interchassis control link-protection link (ICL-PL). Configure a multichassis protection link for the ICL-PL, the Inter-Chassis Control

Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



NOTE: Layer 3 connectivity is required for ICCP.



NOTE: On QFX5100 and QFX10000 switches, if you try to configure both VRRP over IRB and MAC synchronization, you will receive a commit error.


To complete the configuration, enable VRRP by completing the following steps for each MC-LAG:

1. Create a routed VLAN interface (RVI).
2. Create a VRRP group and assign a virtual IP address that is shared between each switch in the VRRP group.
3. Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group.
4. Configure Layer 3 connectivity between the VRRP groups.

Topology

The topology used in this example consists of two switches hosting two MC-LAGs—ae1 and ae2. The two switches are connected to a multicast source (Server 1) over the MC-LAG ae1, and a multicast receiver (Server 2) over the MC-LAG ae2. [Figure 30 on page 176](#) shows the topology of this example.

Figure 35: Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP

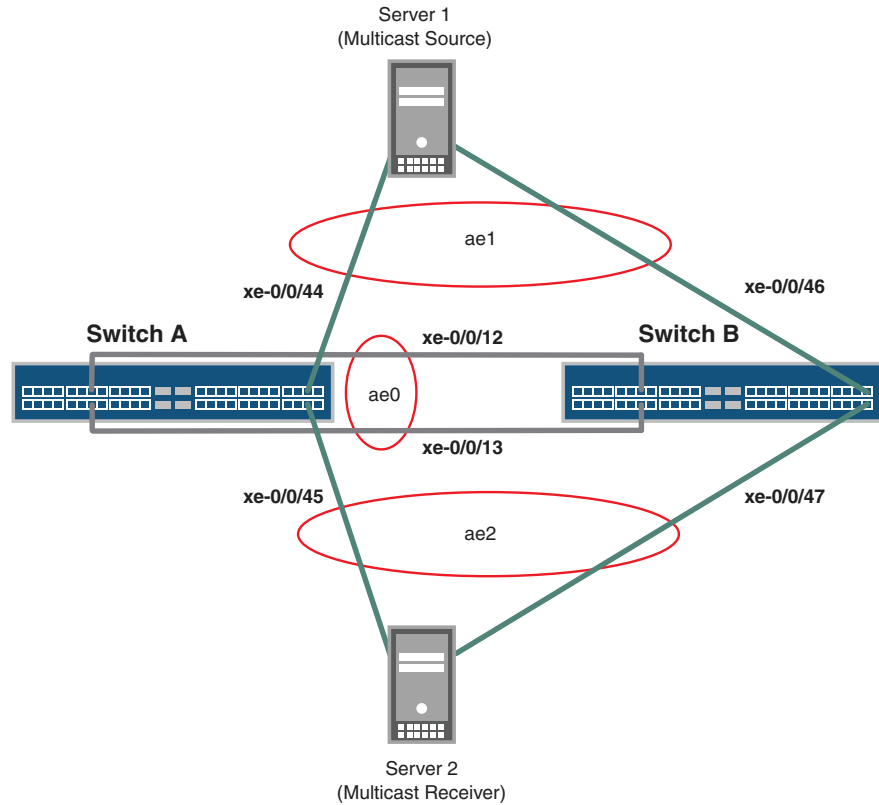

g041361

Table 7 on page 177 details the topology used in this configuration example.

Table 12: Components of the Topology for Configuring a Multichassis LAG for Layer 3 Multicast Using VRRP

Hostname	Base Hardware	Multichassis Link Aggregation Group
Switch A	QFX3500, QFX3600, EX4600, QFX5100, or QFX10000 standalone switch	<ul style="list-style-type: none"> ae0 is configured as an aggregated Ethernet interface, and is used as an ICL-PL. The following two interfaces are part of ae0: <ul style="list-style-type: none"> xe-0/0/12 and xe-0/0/13 on Switch A xe-0/0/12 and xe-0/0/13 on Switch B. ae1 is configured as an MC-LAG for the multicast source (Server 1), and the following two interfaces are part of ae1: <ul style="list-style-type: none"> xe-0/0/44 on Switch A xe-0/0/46 on Switch B. ae2 is configured as an MC-LAG for the multicast receiver (Server 2), and the following two interfaces are part of ae2: <ul style="list-style-type: none"> xe-0/0/45 on Switch A xe-0/0/47 on Switch B.
Switch B	QFX3500, QFX3600, EX4600, QFX5100, or QFX10000 standalone switch	

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.



NOTE: This example shows how to configure MC-LAG using both the original CLI and Enhanced Layer 2 Software (ELS).

In ELS, there are three different statements and one different option from the original CLI:

- The `port-mode` statement in the `[edit interfaces interface-name unit number family ethernet-switching]` hierarchy is not supported. Use the `interface-mode` statement instead.
- The `vlan` statement in the `[edit interfaces interface-name]` hierarchy is not supported. Use the `irb` statement instead.
- The `vlan.logical-interface-number` hierarchy in the `[edit vlans vlan-name l3-interface]` option is not supported. Use the `irb.logical-interface-number` option instead.
- The `service-id` statement in the `[edit switch-options]` hierarchy is required in the ELS CLI.

Switch A—Original CLI

```
set chassis aggregated-devices ethernet device-count 3
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces xe-0/0/45 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control active
```

```
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching port-mode trunk
set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 virtual-address
  10.1.1.1
set interfaces vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
set interfaces vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
set interfaces vlan unit 200 family inet address 10.1.1.21/8 vrrp-group 2 virtual-address
  10.1.1.2
set interfaces vlan unit 200 family inet address 10.1.1.21/8 vrrp-group 2 priority 200
set interfaces vlan unit 200 family inet address 10.1.1.21/8 vrrp-group 2 accept-data
set interfaces vlan unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface vlan.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval
  1000
set protocols igmp-snooping vlan all
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  threshold 500
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  threshold 500
set protocols pim rp static address 10.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface vlan.100 priority 200
set protocols pim interface vlan.100 dual-dr
set protocols pim interface vlan.100 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval threshold
  500
set protocols pim interface vlan.200 priority 600
set protocols pim interface vlan.200 dual-dr
set protocols pim interface vlan.200 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval threshold
  500
set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
```

```

set protocols rstp interface ae2.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0

```

Switch A—ELS

```

set chassis aggregated-devices ethernet device-count 3
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/44 ether-options 802.3ad ae1
set interfaces xe-0/0/45 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control active
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
set interfaces irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
set interfaces irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 virtual-address
    10.1.1.2
set interfaces irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 priority 200
set interfaces irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 accept-data
set interfaces irb unit 500 family inet address 10.3.3.2/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface irb.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.2
set protocols iccp peer 10.3.3.1 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip 10.207.64.233
set protocols iccp peer 10.3.3.1 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.1 liveness-detection transmit-interval minimum-interval
    1000
set protocols igmp-snooping vlan all
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection
    minimum-receive-interval 700

```



```

set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  threshold 500
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  threshold 500
set protocols pim rp static address 10.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface vlan.100 priority 200
set protocols pim interface vlan.100 dual-dr
set protocols pim interface vlan.100 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval threshold
  500
set protocols pim interface vlan.200 priority 600
set protocols pim interface vlan.200 dual-dr
set protocols pim interface vlan.200 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval threshold
  500
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae2.0 edge
set protocols rstp interface ae1.0 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
set switch-options service-id 10

```

Switch B—Original CLI:

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces xe-0/0/47 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 1

```

```
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control standby
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching port-mode trunk
set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 virtual-address
  10.1.1.1
set interfaces vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
set interfaces vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
set interfaces vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2 virtual-address
  10.1.1.2
set interfaces vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2 priority 150
set interfaces vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2 accept-data
set interfaces vlan unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface vlan.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface vlan.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface vlan.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval
  1000
set protocols igmp-snooping vlan all
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  threshold 500
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  threshold 500
set protocols pim rp static address 10.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface vlan.100 priority 100
set protocols pim interface vlan.100 dual-dr
set protocols pim interface vlan.100 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval threshold
  500
set protocols pim interface vlan.200 priority 500
set protocols pim interface vlan.200 dual-dr
set protocols pim interface vlan.200 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval threshold
  500
```

```

set protocols rstp interface ae0.0 disable
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae2.0 edge
set protocols rstp interface all mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0

```

Switch B—ELS

```

set chassis aggregated-devices ethernet device-count 2
set interfaces xe-0/0/12 ether-options 802.3ad ae0
set interfaces xe-0/0/13 ether-options 802.3ad ae0
set interfaces xe-0/0/46 ether-options 802.3ad ae1
set interfaces xe-0/0/47 ether-options 802.3ad ae2
set interfaces ae0 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae0 unit 0 family ethernet-switching vlan members v500
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-id 00:01:02:03:04:05
set interfaces ae1 aggregated-ether-options lacp admin-key 3
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 3
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control standby
set interfaces ae1 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae1 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae1 unit 0 family ethernet-switching vlan members v100
set interfaces ae2 aggregated-ether-options lacp active
set interfaces ae2 aggregated-ether-options lacp system-id 00:01:02:03:04:06
set interfaces ae2 aggregated-ether-options lacp admin-key 3
set interfaces ae2 aggregated-ether-options mc-ae mc-ae-id 4
set interfaces ae2 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae2 aggregated-ether-options mc-ae mode active-active
set interfaces ae2 aggregated-ether-options mc-ae status-control standby
set interfaces ae2 aggregated-ether-options mc-ae init-delay-time 240
set interfaces ae2 unit 0 family ethernet-switching interface-mode trunk
set interfaces ae2 unit 0 family ethernet-switching vlan members v200
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 virtual-address 10.1.1.1
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
set interfaces irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
set interfaces irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 virtual-address
10.1.1.2
set interfaces irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 priority 150
set interfaces irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 accept-data
set interfaces irb unit 500 family inet address 10.3.3.1/8
set vlans v100 vlan-id 100
set vlans v100 l3-interface irb.100
set vlans v200 vlan-id 200
set vlans v200 l3-interface irb.200
set vlans v500 vlan-id 500
set vlans v500 l3-interface irb.500
set protocols iccp local-ip-addr 10.3.3.1
set protocols iccp peer 10.3.3.2 session-establishment-hold-time 50
set protocols iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip 10.207.64.234
set protocols iccp peer 10.3.3.2 liveness-detection minimum-receive-interval 1000
set protocols iccp peer 10.3.3.2 liveness-detection transmit-interval minimum-interval
1000
set protocols igmp-snooping vlan all

```

```
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.100 bfd-liveness-detection transmit-interval
  threshold 500
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols ospf area 0.0.0.0 interface vlan.200 bfd-liveness-detection transmit-interval
  threshold 500
set protocols pim rp static address 10.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface vlan.100 priority 100
set protocols pim interface vlan.100 dual-dr
set protocols pim interface vlan.100 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.100 bfd-liveness-detection transmit-interval threshold
  500
set protocols pim interface vlan.200 priority 500
set protocols pim interface vlan.200 dual-dr
set protocols pim interface vlan.200 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface vlan.200 bfd-liveness-detection transmit-interval threshold
  500
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae2.0 edge
set protocols rstp interface ae1.0 mode point-to-point
set protocols rstp bpdu-block-on-edge
set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
set switch-options service-id 10
```

Configuring MC-LAG for Layer 3 Multicast Using VRRP on Two Switches

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To enable multichassis protection link between MC-LAG peers:

1. Configure the number of LAGs on both Switch A and Switch B.

```
[edit chassis]
user@switch# set aggregated-devices ethernet device-count 3
```
2. Add member interfaces to the aggregated Ethernet interfaces on both Switch A and Switch B.

Switch A and Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/12 ether-options 802.3ad ae0
```

```
user@switch# set xe-0/0/13 ether-options 802.3ad ae0
```

Switch A:

```
[edit interfaces]
user@switch# set xe-0/0/44 ether-options 802.3ad ae1
user@switch# set xe-0/0/45 ether-options 802.3ad ae2
```

Switch B:

```
[edit interfaces]
user@switch# set xe-0/0/46 ether-options 802.3ad ae1
user@switch# set xe-0/0/47 ether-options 802.3ad ae2
```

3. Configure ae0 as the trunk interface between Switch A and Switch B.

Switch A and Switch B:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk
```

Switch A and Switch B Using ELS:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching interface-mode trunk
```

4. Configure ae0 as the multichassis protection link between Switch A and Switch B.

Switch A:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.1 interface ae0
```

Switch B:

```
[edit]
user@switch# set multi-chassis multi-chassis-protection 10.3.3.2 interface ae0
```

**Step-by-Step
Procedure**

To enable ICCP:

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

1. Configure the local IP address to be in the ICCP connection on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.2
```

Switch B:

```
[edit protocols]
user@switch# set iccp local-ip-addr 10.3.3.1
```

2. Configure the peer IP address, minimum receive interval, and minimum transmit interval for a Bidirectional Forwarding Detection (BFD) session for ICCP on Switch A and Switch B.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 liveness-detection minimum-receive-interval
1000
user@switch# set iccp peer 10.3.3.1 liveness-detection transmit-interval
minimum-interval 1000
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 liveness-detection minimum-receive-interval
1000
user@switch# set iccp peer 10.3.3.2 liveness-detection transmit-interval
minimum-interval 1000
```

3. (Optional) Configure the time during which an ICCP connection must succeed between MC-LAG peers on Switch A and Switch B.



NOTE: Configuring session establishment hold time helps to establish a faster ICCP connection. The recommended value is 50 seconds.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 session-establishment-hold-time 50
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 session-establishment-hold-time 50
```

4. (Optional) Configure the backup IP address to be used for backup liveness detection on both Switch A and Switch B.



NOTE: By default, backup liveness detection is not enabled. Configuring a backup IP address helps achieve sub-second traffic loss during an MC-LAG peer reboot.

Switch A:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.1 backup-liveness-detection backup-peer-ip
10.207.64.233
```

Switch B:

```
[edit protocols]
user@switch# set iccp peer 10.3.3.2 backup-liveness-detection backup-peer-ip
10.207.64.233
```

5. Configure Layer 3 connectivity between the MC-LAG peers on both Switch A and Switch B.



NOTE: In ELS, use the *irb.logical-interface-number* instead.

Switch A and Switch B:

```
[edit vlans]
user@switch# set v500 vlan-id 500
user@switch# set v500 l3-interface vlan.500
```

Switch A and Switch B Using ELS:

```
[edit vlans]
user@switch# set v500 vlan-id 500
user@switch# set v500 l3-interface irb.500
```

Switch A and Switch B:

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching vlan members v500
```

Switch A Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 500 family inet address 10.3.3.2/8
```

Switch A Using ELS:

```
[edit interfaces]
user@switch# set irb unit 500 family inet address 10.3.3.2/8
```

Switch B Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 500 family inet address 10.3.3.1/8
```

Switch B Using ELS:

```
[edit interfaces]
user@switch# set irb unit 500 family inet address 10.3.3.1/8
```

Step-by-Step Procedure

To enable the ae1 and ae2 MC-LAG interfaces:

1. Enable LACP on the MC-LAG interfaces on Switch A and Switch B.



NOTE: At least one end needs to be active. The other end can be either active or passive.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp active
user@switch# set ae2 aggregated-ether-options lacp active
```

2. Specify the same multichassis aggregated Ethernet identification number for each MC-LAG peer on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mc-ae-id 3
user@switch# set ae2 aggregated-ether-options mc-ae mc-ae-id 4
```

3. Specify the same service ID on Switch A and Switch B.

ELS:

```
[edit]
set switch-options service-id 10
```

4. Specify a unique chassis ID for the MC-LAG on the MC-LAG peers on Switch A and Switch B.

Switch A:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae chassis-i 0
user@switch# set ae2 aggregated-ether-options mc-ae chassis-i 0
```

Switch B:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae chassis-id 1
user@switch# set ae2 aggregated-ether-options mc-ae chassis-id 1
```

5. Specify the operating mode of the MC-LAGs on both Switch A and Switch B.



NOTE: Only active-active mode is supported at this time.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae mod active-active
user@switch# set ae2 aggregated-ether-options mc-ae mod active-active
```

6. Specify the status control for the MC-LAGs on Switch A and Switch B.



NOTE: You must configure status control on both Switch A and Switch B hosting the MC-LAGs. If one peer is in active mode, the other must be in standby mode.

Switch A:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control active
user@switch# set ae2 aggregated-ether-options mc-ae status-control active
```


Switch B:

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae status-control standby
user@switch# set ae2 aggregated-ether-options mc-ae status-control standby
```



NOTE: If you configure both nodes as `prefer-status-control-active`, you must also configure ICCP peering using the peer's loopback address to make sure that the ICCP session does not go down because of physical link failures. Additionally, you must configure backup liveness detection on both of the MC-LAG nodes.

7. Specify the number of seconds by which the bring-up of the MC-LAG interfaces should be deferred after you reboot Switch A or Switch B.



NOTE: The recommended value for maximum VLAN configuration (for example, 4,000 VLANs) is 240 seconds. If IGMP snooping is enabled on all of the VLANs, the recommended value is 420 seconds.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options mc-ae init-delay-time 240
user@switch# set ae2 aggregated-ether-options mc-ae init-delay-time 240
```

8. Specify the same LACP system ID for each MC-LAG on Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp system-ID 00:01:02:03:04:05
user@switch# set ae2 aggregated-ether-options lacp system-ID 00:01:02:03:04:06
```

9. Specify the same LACP administration key on both Switch A and Switch B.

```
[edit interfaces]
user@switch# set ae1 aggregated-ether-options lacp admin-key 3
user@switch# set ae2 aggregated-ether-options lacp admin-key 3
```

10. Enable a VLAN for each MC-LAG on Switch A and Switch B.

```
[edit vlans]
user@switch# set v100 vlan-id 100
user@switch# set v200 vlan-id 200
```

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching vlan members v100
user@switch# set ae2 unit 0 family ethernet-switching vlan members v200
```

11. Configure ae1 and ae2 as trunk interfaces between Switch A and Switch B.

Original CLI:

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk
user@switch# set ae2 unit 0 family ethernet-switching port-mode trunk
```

ELS:

```
[edit interfaces]
user@switch# set ae1 unit 0 family ethernet-switching interface-mode trunk
user@switch# set ae2 unit 0 family ethernet-switching interface-mode trunk
```

**Step-by-Step
Procedure**

To enable VRRP on the MC-LAGs on Switch A and Switch B:

1. Create a routed VLAN interface (RVI) for each MC-LAG, assign a virtual IP address that is shared between each switch in the VRRP groups, and assign an individual IP address for each switch in the VRRP groups.

Switch A Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set vlan unit 200 family inet address 10.1.1.21/8 vrrp-group 2
virtual-address 10.1.1.2
```

Switch A Using ELS:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2
virtual-address 10.1.1.2
```

Switch B Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2
virtual-address 10.1.1.2
```

Switch B Using ELS:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1
virtual-address 10.1.1.1
user@switch# set irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2
virtual-address 10.1.1.2
```

2. Assign the priority for each switch in the VRRP groups:



NOTE: The switch configured with the highest priority is the master.

Switch A Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority
200
```

```
user@switch# set vlan unit 200 family inet address 10.1.1.21/8 vrrp-group 2 priority 200
```

Switch A Using ELS:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
user@switch# set irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 priority 200
```

Switch B Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
user@switch# set vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2 priority 150
```

Switch B Using ELS:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
user@switch# set irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 priority 150
```

3. Enable the switch to accept all packets destined for the virtual IP address if it is the master in a VRRP group:

Switch A Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
user@switch# set vlan unit 200 family inet address 10.1.1.21/8 vrrp-group 2 accept-data
```

Switch A Using ELS:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
user@switch# set irb unit 200 family inet address 10.1.1.21/8 vrrp-group 2 accept-data
```

Switch B Using the Original CLI:

```
[edit interfaces]
user@switch# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
user@switch# set vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2 accept-data
```

Switch B Using ELS:

```
[edit interfaces]
user@switch# set irb unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
user@switch# set irb unit 200 family inet address 10.1.1.20/8 vrrp-group 2 accept-data
```

4. Configure Layer 3 connectivity between Switch A and Switch B.

Original CLI:

```
[edit interfaces]
user@switch# set v100 l3-interface vlan.100
user@switch# set v200 l3-interface vlan.200
```

ELS:

```
[edit interfaces]
user@switch# set v100 l3-interface irb.100
user@switch# set v200 l3-interface irb.200
```

**Step-by-Step
Procedure**

To enable IGMP snooping:

1. Enable IGMP snooping for all VLANs on Switch A and Switch B.

```
[edit protocols]
user@switch# set igmp-snooping vlan all
```

**Step-by-Step
Procedure**

To configure OSPF as the Layer 3 protocol:

1. Configure an OSPF area on Switch A and Switch B.

```
[edit protocols ospf]
user@switch# set area 0.0.0.0
```

2. Assign the VLAN interfaces for the MC-LAGs as interfaces to the OSPF area on Switch A and Switch B.

```
[edit protocols ospf area 0.0.0.0]
user@switch# set interface vlan.100
user@switch# set interface vlan.200
```

3. Configure the minimum receive interval, minimum transmit interval, and transmit interval threshold for a Bidirectional Forwarding Detection (BFD) session for the OSPF interfaces on Switch A and Switch B.



NOTE: On a QFX5100 switch, the minimum transmit interval must be 1000 milliseconds or greater. Sub-second timers are not supported in Junos OS 13.2X51-D10 and later. If you configure the minimum transmit interval timer lower than 1000 milliseconds, the state of the MC-LAG can be affected.

```
[edit protocols ospf area 0.0.0.0]
user@switch# set interface vlan.100 bfd-liveness-detection
minimum-receive-interval 700
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
minimum-interval 350
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
threshold 500
user@switch# set interface vlan.200 bfd-liveness-detection
minimum-receive-interval 700
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
minimum-interval 350
```

```
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
threshold 500
```

Step-by-Step Procedure

To configure PIM as the multicast protocol:

1. Configure a static rendezvous point (RP) address on Switch A and Switch B.

```
[edit protocols pim]
user@switch# set rp static address 10.0.0.3
```
2. Configure the address ranges of the multicast groups for which Switch A and Switch B can be a rendezvous point (RP).

```
[edit protocols pim rp static address 10.0.0.3]
user@switch# set group-ranges 233.252.0.0/8
```
3. Enable PIM on the VLAN interfaces for the MC-LAGs on Switch A and Switch B.

```
[edit protocols pim]
user@switch# set interface vlan.100 dual-dr
user@switch# set interface vlan.200 dual-dr
```
4. Configure each PIM interface's priority for being selected as the designated router (DR) on Switch A and Switch B.

An interface with a higher priority value has a higher probability of being selected as the DR.

Switch A:

```
[edit protocols pim]
user@switch# set interface vlan.100 priority 200
user@switch# set interface vlan.200 priority 600
```

Switch B:

```
[edit protocols pim]
user@switch# set interface vlan.100 priority 100
user@switch# set interface vlan.200 priority 500
```

5. Configure the minimum receive interval, minimum transmit interval, and transmit interval threshold for a Bidirectional Forwarding Detection (BFD) session for the PIM interfaces on Switch A and Switch B.

```
[edit protocols pim]
user@switch# set interface vlan.100 bfd-liveness-detection
minimum-receive-interval 700
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
minimum-interval 350
user@switch# set interface vlan.100 bfd-liveness-detection transmit-interval
threshold 500
user@switch# set interface vlan.200 bfd-liveness-detection
minimum-receive-interval 700
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
minimum-interval 350
user@switch# set interface vlan.200 bfd-liveness-detection transmit-interval
threshold 500
```

**Step-by-Step
Procedure**

To enable RSTP:

1. Enable RSTP on Switch A and Switch B.

Original CLI:

```
[edit protocols rstp]
user@switch# set interface ae1.0 mode point-to-point
```

2. Enable RSTP on Switch B.

```
[edit protocols rstp]
user@switch# set interface ae1.0 mode point-to-point
```

3. Disable RSTP on the ICL-PL interfaces on Switch A and Switch B.



NOTE: This command does not apply on ELS.

```
[edit protocols rstp]
user@switch# set interface ae0.0 disable
```

4. Configure the MC-LAG interfaces as edge ports on Switch A and Switch B.



NOTE: The ae1 and ae2 interfaces are downstream interfaces. This is why RSTP and bpdv-block-on-edge need to be configured.

```
[edit protocols rstp]
user@switch# set interface ae1.0 edge
user@switch# set interface ae2.0 edge
```

5. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on Switch A and Switch B.



NOTE: The ae1 and ae2 interfaces are downstream interfaces. This is why RSTP and bpdv-block-on-edge need to be configured.

```
[edit protocols rstp]
user@switch# set bpdv-block-on-edge
```

Results

From configuration mode on Switch A, confirm your configuration by entering the **show chassis**, **show interfaces**, **show multi-chassis**, **show protocols**, and **show vlans** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Switch A—Original CLI:

```
user@SwitchA# show chassis
```

```
aggregated-devices {
  ethernet {
    device-count 3;
  }
}

user@SwitchA# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/45 {
  ether-options {
    802.3ad ae2;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 0;
      mode active-active;
      status-control active;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
```

```
        members v100;
    }
}
}
ae2 {
    aggregated-ether-options {
        lacp {
            active;
            system-id 00:01:02:03:04:06;
            admin-key 3;
        }
        mc-ae {
            mc-ae-id 4;
            chassis-id 0;
            mode active-active;
            status-control active;
            init-delay-time 240;
        }
    }
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members v200;
            }
        }
    }
}
vlan {
    unit 100 {
        family inet {
            address 10.1.1.11/8 {
                vrrp-group 1 {
                    virtual-address 10.1.1.1;
                    priority 200;
                    accept-data;
                }
            }
        }
    }
    unit 200 {
        family inet {
            address 10.1.1.21/8 {
                vrrp-group 2 {
                    virtual-address 10.1.1.2;
                    priority 200;
                    accept-data;
                }
            }
        }
    }
    unit 500 {
        family inet {
            address 10.3.3.2/8;
        }
    }
}
```



```

    }
  }
}

user@SwitchA# show protocols
ospf {
  area 0.0.0.0 {
    interface vlan.100 {
      bfd-liveness-detection {
        minimum-receive-interval 700;
        transmit-interval {
          minimum-interval 350;
          threshold 500;
        }
      }
    }
    interface vlan.200 {
      bfd-liveness-detection {
        minimum-receive-interval 700;
        transmit-interval {
          minimum-interval 350;
          threshold 500;
        }
      }
    }
  }
}
pim {
  rp {
    static {
      address 10.0.0.3 {
        group-ranges {
          233.252.0.0/8;
        }
      }
    }
  }
}
interface vlan.100 {
  priority 200;
  dual-dr;
  bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}
interface vlan.200 {
  priority 600;
  dual-dr;
  bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}

```

```
    }
  }
}
iccp {
  local-ip-addr 10.3.3.2;
  peer 10.3.3.1 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.233;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}
}
igmp-snooping {
  vlan all;
}
rstp {
  interface ae0.0 {
    disable;
  }
  interface ae1.0 {
    edge;
  }
  interface ae2.0 {
    edge;
  }
  interface all {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}

user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
  interface ae0;
}

user@SwitchA# show vlans
v100 {
  vlan-id 100;
  l3-interface vlan.100;
}
v200 {
  vlan-id 200;
  l3-interface vlan.200;
}
v500 {
  vlan-id 500;
  l3-interface vlan.500;
}
```

Switch A—ELS

```
user@SwitchA# show chassis
aggregated-devices {
  ethernet {
    device-count 3;
  }
}

user@SwitchA# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/44 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/45 {
  ether-options {
    802.3ad ae2;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
      chassis-id 0;
      mode active-active;
      status-control active;
      init-delay-time 240;
    }
  }
  unit 0 {
```

```
        family ethernet-switching {
            interface-mode trunk;
            vlan {
                members v100;
            }
        }
    }
}
ae2 {
    aggregated-ether-options {
        lacp {
            active;
            system-id 00:01:02:03:04:06;
            admin-key 3;
        }
        mc-ae {
            mc-ae-id 4;
            chassis-id 0;
            mode active-active;
            status-control active;
            init-delay-time 240;
        }
    }
    unit 0 {
        family ethernet-switching {
            interface-mode trunk;
            vlan {
                members v200;
            }
        }
    }
}
irb {
    unit 100 {
        family inet {
            address 10.1.1.11/8 {
                vrrp-group 1 {
                    virtual-address 10.1.1.1;
                    priority 200;
                    accept-data;
                }
            }
        }
    }
    unit 200 {
        family inet {
            address 10.1.1.21/8 {
                vrrp-group 2 {
                    virtual-address 10.1.1.2;
                    priority 200;
                    accept-data;
                }
            }
        }
    }
    unit 500 {
```

```
family inet {
    address 10.3.3.2/8;
}
}

user@SwitchA# show protocols
ospf {
    area 0.0.0.0 {
        interface vlan.100 {
            bfd-liveness-detection {
                minimum-receive-interval 700;
                transmit-interval {
                    minimum-interval 350;
                    threshold 500;
                }
            }
        }
        interface vlan.200 {
            bfd-liveness-detection {
                minimum-receive-interval 700;
                transmit-interval {
                    minimum-interval 350;
                    threshold 500;
                }
            }
        }
    }
}
pim {
    rp {
        static {
            address 10.0.0.3 {
                group-ranges {
                    233.252.0.0/8;
                }
            }
        }
    }
}
interface vlan.100 {
    priority 200;
    dual-dr;
    bfd-liveness-detection {
        minimum-receive-interval 700;
        transmit-interval {
            minimum-interval 350;
            threshold 500;
        }
    }
}
interface vlan.200 {
    priority 600;
    dual-dr;
    bfd-liveness-detection {
        minimum-receive-interval 700;
        transmit-interval {
```

```
        minimum-interval 350;
        threshold 500;
    }
}
}
iccp {
    local-ip-addr 10.3.3.2;
    peer 10.3.3.1 {
        session-establishment-hold-time 50;
        backup-liveness-detection {
            backup-peer-ip 10.207.64.233;
        }
        liveness-detection {
            minimum-receive-interval 1000;
            transmit-interval {
                minimum-interval 1000;
            }
        }
    }
}
}
igmp-snooping {
    vlan all;
}
rstp {
    interface ae1.0 {
        edge;
    }
    interface ae2.0 {
        edge;
    }
    interface ae1.0 {
        mode point-to-point;
    }
    bpdu-block-on-edge;
}

user@SwitchA# show multi-chassis
multi-chassis-protection 10.3.3.1 {
    interface ae0;
}

user@SwitchA# show switch-options
service-id 10;

user@SwitchA# show vlans
v100 {
    vlan-id 100;
    l3-interface irb.100;
}
v200 {
    vlan-id 200;
    l3-interface irb.200;
}
v500 {
    vlan-id 500;
    l3-interface irb.500;
```

```
}
```

From configuration mode on Switch B, confirm your configuration by entering the **show chassis**, **show interfaces**, **show multi-chassis**, **show protocols**, and **show vlans** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Switch B--Original CLI

```
user@SwitchB# show chassis
aggregated-devices {
  ethernet {
    device-count 3;
  }
}

user@SwitchB# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/46 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/47 {
  ether-options {
    802.3ad ae2;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members v500;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 3;
    }
  }
}
```

```
        chassis-id 1;
        mode active-active;
        status-control standby;
        init-delay-time 240;
    }
}
unit 0 {
    family ethernet-switching {
        port-mode trunk;
        vlan {
            members v100;
        }
    }
}
}
ae2 {
    aggregated-ether-options {
        lacp {
            active;
            system-id 00:01:02:03:04:06;
            admin-key 3;
        }
        mc-ae {
            mc-ae-id 4;
            chassis-id 1;
            mode active-active;
            status-control standby;
            init-delay-time 240;
        }
    }
}
unit 0 {
    family ethernet-switching {
        port-mode trunk;
        vlan {
            members v200;
        }
    }
}
}
}
irb {
    unit 100 {
        family inet {
            address 10.1.1.10/8 {
                vrrp-group 1 {
                    virtual-address 10.1.1.1;
                    priority 150;
                    accept-data;
                }
            }
        }
    }
}
unit 200 {
    family inet {
        address 10.1.1.20/8 {
            vrrp-group 2 {
                virtual-address 10.1.1.2;
```



```

        priority 150;
        accept-data;
    }
}
}
unit 500 {
    family inet {
        address 10.3.3.1/8;
    }
}
}
}

user@SwitchB# show protocols
ospf {
    area 0.0.0.0 {
        interface vlan.100 {
            bfd-liveness-detection {
                minimum-receive-interval 700;
                transmit-interval {
                    minimum-interval 350;
                    threshold 500;
                }
            }
        }
        interface vlan.200 {
            bfd-liveness-detection {
                minimum-receive-interval 700;
                transmit-interval {
                    minimum-interval 350;
                    threshold 500;
                }
            }
        }
    }
}
pim {
    rp {
        static {
            address 10.0.0.3 {
                group-ranges {
                    233.252.0.0/8;
                }
            }
        }
    }
}
interface vlan.100 {
    priority 100;
    dual-dr;
    bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
        minimum-receive-interval 700;
        transmit-interval {
            minimum-interval 350;
            threshold 500;
        }
    }
}

```

```
    }
  }
  interface vlan.200 {
    priority 500;
    dual-dr;
    bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
      minimum-receive-interval 700;
      transmit-interval {
        minimum-interval 350;
        threshold 500;
      }
    }
  }
}
iccp {
  local-ip-addr 10.3.3.1;
  peer 10.3.3.2 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.234;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}
igmp-snooping {
  vlan all;
}
rstp {
  interface ae0.0 {
    disable;
  }
  interface ae1.0 {
    edge;
  }
  interface ae2.0 {
    edge;
  }
  interface all {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
  interface ae0;
}

user@SwitchB# show vlans
v100 {
  vlan-id 100;
  l3-interface vlan.100;
```

```

}
v200 {
  vlan-id 200;
  l3-interface vlan.200;
}
v500 {
  vlan-id 500;
  l3-interface vlan.500;
}

```

Switch B—ELS

```

user@SwitchB# show chassis
aggregated-devices {
  ethernet {
    device-count 3;
  }
}

user@SwitchB# show interfaces
xe-0/0/12 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/13 {
  ether-options {
    802.3ad ae0;
  }
}
xe-0/0/46 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/47 {
  ether-options {
    802.3ad ae2;
  }
}
ae0 {
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
ae1 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:05;
      admin-key 3;
    }
  }
}

```

```
    mc-ae {
      mc-ae-id 3;
      chassis-id 1;
      mode active-active;
      status-control standby;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v100;
      }
    }
  }
}
ae2 {
  aggregated-ether-options {
    lacp {
      active;
      system-id 00:01:02:03:04:06;
      admin-key 3;
    }
    mc-ae {
      mc-ae-id 4;
      chassis-id 1;
      mode active-active;
      status-control standby;
      init-delay-time 240;
    }
  }
  unit 0 {
    family ethernet-switching {
      interface-mode trunk;
      vlan {
        members v200;
      }
    }
  }
}
irb {
  unit 100 {
    family inet {
      address 10.1.1.10/8 {
        vrrp-group 1 {
          virtual-address 10.1.1.1;
          priority 150;
          accept-data;
        }
      }
    }
  }
}
unit 200 {
  family inet {
    address 10.1.1.20/8 {
```

```
        vrrp-group 2 {
            virtual-address 10.1.1.2;
            priority 150;
            accept-data;
        }
    }
}
unit 500 {
    family inet {
        address 10.3.3.1/8;
    }
}
}

user@SwitchB# show protocols
ospf {
    area 0.0.0.0 {
        interface vlan.100 {
            bfd-liveness-detection {
                minimum-receive-interval 700;
                transmit-interval {
                    minimum-interval 350;
                    threshold 500;
                }
            }
        }
    }
    interface vlan.200 {
        bfd-liveness-detection {
            minimum-receive-interval 700;
            transmit-interval {
                minimum-interval 350;
                threshold 500;
            }
        }
    }
}
pim {
    rp {
        static {
            address 10.0.0.3 {
                group-ranges {
                    233.252.0.0/8;
                }
            }
        }
    }
}
interface vlan.100 {
    priority 100;
    dual-dr;
    bfd-liveness-detection {
        minimum-receive-interval 700;
        transmit-interval {
            minimum-interval 350;
            threshold 500;
        }
    }
}
```

```
    }
  }
}
interface vlan.200 {
  priority 500;
  dual-dr;
  bfd-liveness-detection {
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}
}
}
iccp {
  local-ip-addr 10.3.3.1;
  peer 10.3.3.2 {
    session-establishment-hold-time 50;
    backup-liveness-detection {
      backup-peer-ip 10.207.64.234;
    }
    liveness-detection {
      minimum-receive-interval 1000;
      transmit-interval {
        minimum-interval 1000;
      }
    }
  }
}
}
}
igmp-snooping {
  vlan all;
}
rstp {
  interface ae1.0 {
    edge;
  }
  interface ae2.0 {
    edge;
  }
  interface ae1.0 {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}

user@SwitchB# show multi-chassis
multi-chassis-protection 10.3.3.2 {
  interface ae0;
}

user@SwitchB# show switch-options
service-id 10;

user@SwitchB# show vlans
v100 {
  vlan-id 100;
```

```

l3-interface irb.100;
}
v200 {
  vlan-id 200;
  l3-interface irb.200;
}
v500 {
  vlan-id 500;
  l3-interface irb.500;
}

```

Verification

Verify that the configuration is working properly.

- [Verifying That Switch A is the Master Designated Router on page 317](#)
- [Verifying That Switch B is the Backup Designated Router on page 317](#)

Verifying That Switch A is the Master Designated Router

Purpose Verify that Switch A is the master designated router (DR).

Action From operational mode, enter the **show pim interfaces** command.

```

user@switch> show pim interfaces
Stat = Status, V = Version, NbrCnt = Neighbor Count,
S = Sparse, D = Dense, B = Bidirectional,
DR = Designated Router, P2P = Point-to-point link,
Active = Bidirectional is active, NotCap = Not Bidirectional Capable

```

Name	Stat	Mode	IP	V	State	NbrCnt	JoinCnt(sg/*g)	DR	address
pim.32769	Down	S	4	2	P2P,NotCap	0	0/0		
vlan.100	Up	S	4	2	DDR-DR,NotCap	1	0/0	10.1.1.11	
vlan.200	Up	S	4	2	DDR-DR,NotCap	2	0/0	10.1.1.21	

Meaning The DDR-DR state of the VLAN interfaces in the output shows that Switch A is the master designated router.

Verifying That Switch B is the Backup Designated Router

Purpose Verify that Switch B is the backup designated router (BDR).

Action From operational mode, enter the **show pim interfaces** command.

```

user@switch> show pim interfaces
Stat = Status, V = Version, NbrCnt = Neighbor Count,
S = Sparse, D = Dense, B = Bidirectional,
DR = Designated Router, P2P = Point-to-point link,
Active = Bidirectional is active, NotCap = Not Bidirectional Capable

```

Name	Stat	Mode	IP	V	State	NbrCnt	JoinCnt(sg/*g)	DR	address
pim.32769	Down	S	4	2	P2P,NotCap	0	0/0		
vlan.100	Up	S	4	2	DDR-BDR,NotCap	1	0/0	10.1.1.11	
vlan.200	Up	S	4	2	DDR-BDR,NotCap	2	0/0	10.1.1.21	

Meaning The DDR-BDR state of the VLAN interfaces in the output shows that Switch B is the backup designated router.

Related Documentation

- [Configuring Multichassis Link Aggregation on page 35](#)

Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on MX Series Routers

[Warning: element unresolved in stylesheets: <author> (in <title>). This is probably a new element that is not yet supported in the stylesheets.]

Supported Platforms [MX240, MX480, MX960](#)

There are two methods for enabling Layer 3 multicast functionality across a multichassis link aggregation group (MC-LAG). You can choose either to configure the Virtual Router Redundancy Protocol (VRRP) or synchronize the MAC addresses for the Layer 3 interfaces of the routers participating in the MC-LAG to load balance the traffic. The procedure to configure VRRP for use in a Layer 3 multicast MC-LAG is included in this example.

- [Requirements on page 318](#)
- [Overview on page 318](#)
- [Configuring the PE Routers on page 320](#)
- [Configuring the CE Device on page 332](#)
- [Configuring the Provider Router on page 335](#)
- [Verification on page 337](#)
- [Troubleshooting on page 337](#)

Requirements

This example uses the following hardware and software components:

- Four Juniper Networks MX Series routers
- Junos OS Release 11.2 or later running on all four routers

Before you configure an MC-LAG for Layer 3 multicast using VRRP, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a router.
- Configure the Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a router.
- Configure the Virtual Router Redundancy Protocol (VRRP) on a router.

Overview

In this example, you configure an MC-LAG across two routers by including interfaces from both routers in an aggregated Ethernet interface (ae1). To support the MC-LAG, create a second aggregated Ethernet interface (ae0) for the interchassis control link-protection

link (ICL-PL). Configure a multichassis protection link for the ICL-PL, Inter-Chassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



NOTE: Layer 3 connectivity is required for ICCP.

To complete the configuration, enable VRRP by completing the following steps:

- Create a routed VLAN interface (RVI).
- Create a VRRP group and assign a virtual IP address that is shared between each router in the VRRP group.
- Enable a member of a VRRP group to accept all packets destined for the virtual IP address if it is the master in the VRRP group.

Consider a sample topology in which a customer edge router, CE, is connected to two provider edge (PE) routers, PE1 and PE2, respectively. The two PE devices each have a link aggregation group (LAG) connected to the CE device. The configured mode is active-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time. PE1 and PE2 are connected to a single service provider router, P.


In [Figure 16 on page 102](#), from the perspective of the CE device, all four ports belonging to a LAG are connected to a single service provider device. Because the configured mode is active-active, all four ports are active, and the CE device load-balances the traffic to the peering PE devices. On the PE routers, a regular LAG is configured facing the CE device.

On one end of an MC-LAG is an MC-LAG client device, such as a server, that has one or more physical links in a LAG. This client device does not need to detect the MC-LAG. On the other side of an MC-LAG are two MC-LAG routers. Each of the routers has one or more physical links connected to a single client device. The routers coordinate with each other to ensure that data traffic is forwarded properly.

Topology Diagram

[Figure 16 on page 102](#) shows the topology used in this example.

Figure 36: MC-LAG Active-Active on MX Series Routers

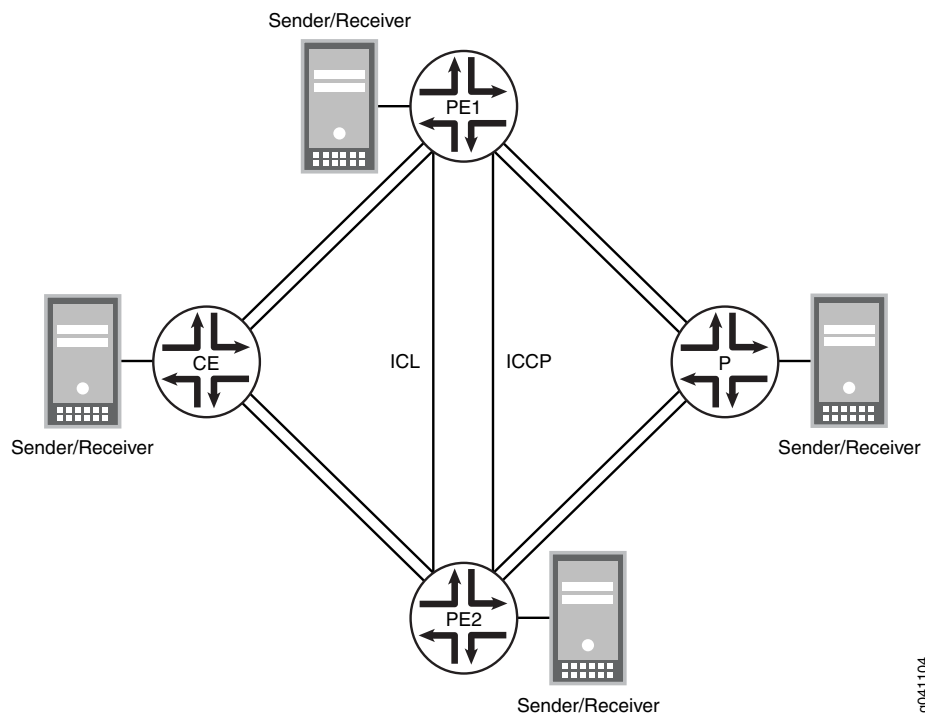

g041104

Configuring the PE Routers

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
Router PE1
set chassis aggregated-devices ethernet device-count 5
set interfaces ge-1/0/1 gigether-options 802.3ad ae1
set interfaces ge-1/0/2 unit 0 family inet address 10.100.100.1/30
set interfaces ge-1/0/6 gigether-options 802.3ad ae0
set interfaces ge-1/1/1 flexible-vlan-tagging
set interfaces ge-1/1/1 encapsulation flexible-ethernet-services
set interfaces ge-1/1/1 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/1 unit 0 vlan-id-range 100-110
set interfaces ge-1/1/4 flexible-vlan-tagging
set interfaces ge-1/1/4 encapsulation flexible-ethernet-services
set interfaces ge-1/1/4 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/4 unit 0 vlan-id-range 100-110
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
```

```
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 service-id 20
set bridge-domains bd0 interface ae1.0
set bridge-domains bd0 interface ge-1/0/3.0
set bridge-domains bd0 interface ge-1/1/1.0
set bridge-domains bd0 interface ge-1/1/4.0
set bridge-domains bd0 interface ae0.0
set protocols iccp local-ip-addr 10.100.100.1
set protocols iccp peer 10.100.100.2 redundancy-group-id-list 10
set protocols iccp peer 10.100.100.2 liveness-detection minimum-interval 1000
set protocols ospf area 0.0.0.0 interface ge-1/1/1.0 bfd-liveness-detection
    minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface ge-1/1/1.0 bfd-liveness-detection
    transmit-interval minimum-interval 350
set protocols ospf area 0.0.0.0 interface ge-1/1/1.0 bfd-liveness-detection
    transmit-interval threshold 500
set protocols ospf area 0.0.0.0 interface ge-1/1/4.0 bfd-liveness-detection
    minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface ge-1/1/4.0 bfd-liveness-detection
    transmit-interval minimum-interval 350
set protocols ospf area 0.0.0.0 interface ge-1/1/4.0 bfd-liveness-detection
    transmit-interval threshold 500
set protocols pim rp static address 1.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface ge-1/1/4.0 priority 200
set protocols pim interface ge-1/1/4.0 version 2
set protocols pim interface ge-1/1/4.0 bfd-liveness-detection minimum-receive-interval
    700
set protocols pim interface ge-1/1/4.0 bfd-liveness-detection transmit-interval
    minimum-interval 350
set protocols pim interface ge-1/1/4.0 bfd-liveness-detection transmit-interval threshold
    500
set protocols pim interface ge-1/1/1.0 priority 600
set protocols pim interface ge-1/1/1.0 version 2
set protocols pim interface ge-1/1/1.0 bfd-liveness-detection minimum-receive-interval
    700
set protocols pim interface ge-1/1/1.0 bfd-liveness-detection transmit-interval
    minimum-interval 350
```

```

set protocols pim interface ge-1/1/1.0 bfd-liveness-detection transmit-interval threshold
  500
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae1.0 mode point-to-point
set protocols rstp bpdu-block-on-edge
set switch-options service-id 10

```

Router PE2

```

set chassis aggregated-devices ethernet device-count 5
set interfaces ge-1/0/2 unit 0 family inet address 10.100.100.2/30
set interfaces ge-1/0/3 flexible-vlan-tagging
set interfaces ge-1/0/3 encapsulation flexible-ethernet-services
set interfaces ge-1/0/3 unit 0 encapsulation vlan-bridge
set interfaces ge-1/0/3 unit 0 vlan-id-range 100-110
set interfaces ge-1/0/4 flexible-vlan-tagging
set interfaces ge-1/0/4 encapsulation flexible-ethernet-services
set interfaces ge-1/0/4 unit 0 encapsulation vlan-bridge
set interfaces ge-1/0/4 unit 0 vlan-id-range 100-110
set interfaces ge-1/0/5 gigether-options 802.3ad ae0
set interfaces ge-1/1/0 gigether-options 802.3ad ae1
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae0 aggregated-ether-options lacp admin-key 1
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 5
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-110
set interfaces ae0 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 aggregated-ether-options lacp system-id 00:00:00:00:00:05
set interfaces ae1 aggregated-ether-options lacp admin-key 1
set interfaces ae1 aggregated-ether-options mc-ae mc-ae-id 10
set interfaces ae1 aggregated-ether-options mc-ae redundancy-group 10
set interfaces ae1 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae1 aggregated-ether-options mc-ae mode active-active
set interfaces ae1 aggregated-ether-options mc-ae status-control active
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set interfaces ae1 unit 0 multi-chassis-protection 10.100.100.1 interface ge-1/0/4.0
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 service-id 20
set bridge-domains bd0 interface ae1.0
set bridge-domains bd0 interface ge-1/0/3.0
set bridge-domains bd0 interface ge-1/0/4.0
set bridge-domains bd0 interface ae0.0
set protocols iccp local-ip-addr 10.100.100.2
set protocols iccp peer 10.100.100.1 redundancy-group-id-list 10

```

```

set protocols iccp peer 10.100.100.1 liveness-detection minimum-interval 1000
set protocols ospf area 0.0.0.0 interface ge-1/0/4.0 bfd-liveness-detection
  minimum-receive-interval 700
set protocols ospf area 0.0.0.0 interface ge-1/0/4.0 bfd-liveness-detection
  transmit-interval minimum-interval 350
set protocols ospf area 0.0.0.0 interface ge-1/0/4.0 bfd-liveness-detection
  transmit-interval threshold 500
set protocols pim rp static address 1.0.0.3 group-ranges 233.252.0.0/8
set protocols pim interface ge-1/0/4.0 priority 200
set protocols pim interface ge-1/0/4.0 version 2
set protocols pim interface ge-1/0/4.0 bfd-liveness-detection minimum-receive-interval
  700
set protocols pim interface ge-1/0/4.0 bfd-liveness-detection transmit-interval
  minimum-interval 350
set protocols pim interface ge-1/0/4.0 bfd-liveness-detection transmit-interval threshold
  500
set protocols rstp interface ae1.0 edge
set protocols rstp interface ae1.0 mode point-to-point
set protocols rstp bpdu-block-on-edge
set switch-options service-id 10

```

Configuring the PE1 Router

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.



NOTE: Repeat the procedure for Router PE2, after modifying the appropriate interface names, addresses, and other parameters.

To configure Router PE1:

1. Specify the number of aggregated Ethernet interfaces to be created.


```

[edit chassis]
user@PE1# set aggregated-devices ethernet device-count 5

```
2. Specify the members to be included within the aggregated Ethernet bundles.


```

[edit interfaces]
user@PE1# set ge-1/0/1 gigether-options 802.3ad ae1
user@PE1# set ge-1/0/6 gigether-options 802.3ad ae0

```
3. Configure the interfaces that connect to senders or receivers, the interchassis link (ICL) interfaces, and the ICCP interfaces.


```

[edit interfaces]
user@PE1# set ge-1/1/1 flexible-vlan-tagging
user@PE1# set ge-1/1/1 encapsulation flexible-ethernet-services
user@PE1# set ge-1/1/1 unit 0 encapsulation vlan-bridge
user@PE1# set ge-1/1/1 unit 0 vlan-id-range 100-110

user@PE1# set ge-1/1/4 flexible-vlan-tagging

```

```
user@PE1# set ge-1/1/4 encapsulation flexible-ethernet-services
user@PE1# set ge-1/1/4 unit 0 encapsulation vlan-bridge
user@PE1# set ge-1/1/4 unit 0 vlan-id-range 100-110
```

```
user@PE1# set ge-1/0/2 unit 0 family inet address 10.100.100.1/30
```

4. Configure parameters on the aggregated Ethernet bundles.

```
[edit interfaces ae0]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
```

```
[edit interfaces ae1]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
user@PE1# set unit 0 encapsulation vlan-bridge
user@PE1# set unit 0 vlan-id-range 100-110
user@PE1# set unit 0 multi-chassis-protection 10.100.100.2 interface ge-1/1/4.0
```

5. Configure LACP on the aggregated Ethernet bundles.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE1# set lacp active
user@PE1# set lacp system-priority 100
user@PE1# set lacp system-id 00:00:00:00:00:05
user@PE1# set lacp admin-key 1
```

```
[edit interfaces ae1 aggregated-ether-options]
user@PE1# set lacp active
user@PE1# set lacp system-priority 100
user@PE1# set lacp system-id 00:00:00:00:00:05
user@PE1# set lacp admin-key 1
```

6. Configure the MC-LAG interfaces.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 5
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active
```

```
[edit interfaces ae1 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 10
user@PE1# set mc-ae redundancy-group 10
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
user@PE1# set mc-ae status-control active
```

The multichassis aggregated Ethernet identification number (**mc-ae-id**) specifies which link aggregation group the aggregated Ethernet interface belongs to. The ae0 interfaces on Router PE1 and Router PE2 are configured with **mc-ae-id 5**. The

ae1 interfaces on Router PE1 and Router PE2 are configured with **mc-ae-id 10**. (To refer to the configuration on Router PE2, see [“Router PE2” on page 104](#)).

The **redundancy-group 10** statement is used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other. The **ae0** and **ae1** interfaces on Router PE1 and Router PE2 are configured with the same redundancy group **redundancy-group 10**.

The **chassis-id** statement is used by LACP for calculating the port number of the MC-LAG's physical member links. Router PE1 uses **chassis-id 1** to identify both its ae0 and ae1 interfaces. Router PE2 (as shown in [“Router PE2” on page 104](#)) uses **chassis-id 0** to identify both its ae0 and ae1 interfaces.

The **mode** statement indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

7. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@PE1# set domain-type bridge
user@PE1# set vlan-id all
user@PE1# set service-id 20
user@PE1# set interface ae0.0
user@PE1# set interface ae1.0
user@PE1# set interface ge-1/0/3.0
user@PE1# set interface ge-1/1/1.0
user@PE1# set interface ge-1/1/4.0
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case Router PE1 and Router PE2), and should be configured with the same value.

8. Configure ICCP parameters.

```
[edit protocols iccp]
user@PE1# set local-ip-addr 10.100.100.1
user@PE1# set peer 10.100.100.2 redundancy-group-id-list 10
user@PE1# set peer 10.100.100.2 liveness-detection minimum-interval 1000
```

9. Configure the service ID at the global level.

```
[edit switch-options]
user@PE1# set service-id 10
```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Step-by-Step Procedure

To enable VRRP on the MC-LAGs :

1. Assign the priority for each router in the VRRP groups.



NOTE: The router configured with the highest priority is the master.

PE1

```
[edit interfaces]
user@PE1# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 priority 200
user@PE1# set vlan unit 200 family inet address 10.1.1.21/8 vrrp-group 2 priority 200
```

PE2

```
[edit interfaces]
user@PE2# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 priority 150
user@PE2# set vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2 priority 150
```

2. Enable the router to accept all packets destined for the virtual IP address if it is the master in a VRRP group.

PE1

```
[edit interfaces]
user@PE1# set vlan unit 100 family inet address 10.1.1.11/8 vrrp-group 1 accept-data
```

PE2

```
[edit interfaces]
user@PE2# set vlan unit 100 family inet address 10.1.1.10/8 vrrp-group 1 accept-data
user@PE2# set vlan unit 200 family inet address 10.1.1.20/8 vrrp-group 2 accept-data
```

Step-by-Step Procedure

To configure OSPF as the Layer 3 protocol:

1. Configure an OSPF area .

```
[edit protocols ospf]
user@PE1# set area 0.0.0.0
```

2. Assign the VLAN interfaces for the MC-LAGs as interfaces to the OSPF area .

```
[edit protocols ospf area 0.0.0.0]
user@PE1# set interface ge-1/1/1.0
user@PE1# set interface ge-1/4/1.0
```

3. Configure the minimum receive interval, minimum transmit interval, and transmit interval threshold for a Bidirectional Forwarding Detection (BFD) session for the OSPF interfaces .

```
[edit protocols ospf area 0.0.0.0]
user@PE1# set interface ge-1/1/1.0 bfd-liveness-detection minimum-receive-interval 700
user@PE1# set interface ge-1/1/1.0 bfd-liveness-detection transmit-interval minimum-interval 350
user@PE1# set interface ge-1/1/1.0 bfd-liveness-detection transmit-interval threshold 500
user@PE1# set interface ge-1/4/1.0 bfd-liveness-detection minimum-receive-interval 700
```



```
user@PE1# set interface ge-1/4/1.0 bfd-liveness-detection transmit-interval
minimum-interval 350
```

```
user@PE1# set interface ge-1/4/1.0 bfd-liveness-detection transmit-interval
threshold 500
```

Step-by-Step Procedure

To configure PIM as the multicast protocol:

1. Configure a static rendezvous point (RP) address .


```
[edit protocols pim]
user@PE1# set rp static address 10.0.0.3
```
2. Configure the address ranges of the multicast groups for which PE1 and PE2 can be a rendezvous point (RP).


```
[edit protocols pim rp static address 10.0.0.3]
user@PE1# set group-ranges 233.252.0.0/8
```
3. Enable PIM on the VLAN interfaces for the MC-LAGs on PE1 and PE2.


```
[edit protocols pim]
user@PE1# set interface ge-1/1/1.0 version 2
user@PE1# set interface ge-1/4/1.0 version 2
```
4. Configure each PIM interface's priority for being selected as the designated router (DR).

An interface with a higher priority value has a higher probability of being selected as the DR.

```
[edit protocols pim]
user@PE1# set interface ge-1/1/1.0 priority 600
user@PE1# set interface ge-1/4/1.0 priority 200
```
5. Configure the minimum receive interval, minimum transmit interval, and transmit interval threshold for a Bidirectional Forwarding Detection (BFD) session for the PIM interfaces on PE1 and PE2.


```
[edit protocols pim]
user@PE1# set interface ge-1/1/1.0 bfd-liveness-detection minimum-receive-interval
700
user@PE1# set interface ge-1/1/1.0 bfd-liveness-detection transmit-interval
minimum-interval 350
user@PE1# set interface ge-1/1/1.0 bfd-liveness-detection transmit-interval threshold
500
user@PE1# set interface ge-1/4/1.0 bfd-liveness-detection minimum-receive-interval
700
user@PE1# set interface ge-1/4/1.0 bfd-liveness-detection transmit-interval
minimum-interval 350
user@PE1# set interface ge-1/4/1.0 bfd-liveness-detection transmit-interval
threshold 500
```

Step-by-Step Procedure

To enable RSTP:

1. Enable RSTP globally on all interfaces.


```
[edit]
user@PE1# set protocols rstp interface ae1.0 mode point-to-point
```

2. Configure the MC-LAG interfaces as edge ports on PE1 and PE2.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpdv-block-on-edge need to be configured.

[edit]

```
user@PE1# set protocols rstp interface ae1.0 edge
```

3. Enable BPDU blocking on all interfaces except for the ICL-PL interfaces on PE1 and PE2.



NOTE: The ae1 interface is a downstream interface. This is why RSTP and bpdv-block-on-edge need to be configured.

[edit]

```
user@PE1# set protocols rstp bpdv-block-on-edge
```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, **show interfaces**, **show protocols**, and **show switch-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show bridge-domains
```

```
bd0 {
  domain-type bridge;
  vlan-id all;
  service-id 20;
  interface ae1.0;
  interface ge-1/0/3.0
  interface ge-1/1/1.0;
  interface ge-1/1/4.0;
  interface ae0.0;
}
```

```
user@PE1# show chassis
```

```
aggregated-devices {
  ethernet {
    device-count 5;
  }
}
```

```
user@PE1# show interfaces
```

```
ge-1/0/1 {
  gigaether-options {
    802.3ad ae1;
  }
}
ge-1/0/6 {
  gigaether-options {
    802.3ad ae0;
```

```
    }  
  }  
  ge-1/0/2 {  
    unit 0 {  
      family inet {  
        address 10.100.100.1/30;  
      }  
    }  
  }  
  ge-1/1/1 {  
    flexible-vlan-tagging;  
    encapsulation flexible-ethernet-services;  
    unit 0 {  
      encapsulation vlan-bridge;  
      vlan-id-range 100-110;  
    }  
  }  
  ge-1/1/4 {  
    flexible-vlan-tagging;  
    encapsulation flexible-ethernet-services;  
    unit 0 {  
      encapsulation vlan-bridge;  
      vlan-id-range 100-110;  
    }  
  }  
  ae0 {  
    flexible-vlan-tagging;  
    encapsulation flexible-ethernet-services;  
    aggregated-ether-options {  
      lacp {  
        active;  
        system-priority 100;  
        system-id 00:00:00:00:00:05;  
        admin-key 1;  
      }  
      mc-ae {  
        mc-ae-id 5;  
        redundancy-group 10;  
        chassis-id 1;  
        mode active-active;  
        status-control active;  
      }  
    }  
    unit 0 {  
      encapsulation vlan-bridge;  
      vlan-id-range 100-110;  
      multi-chassis-protection 10.100.100.2 {  
        interface ge-1/1/4.0;  
      }  
    }  
  }  
  ae1 {  
    flexible-vlan-tagging;  
    encapsulation flexible-ethernet-services;  
    aggregated-ether-options {  
      lacp {
```

```
        active;
        system-priority 100;
        system-id 00:00:00:00:00:05;
        admin-key 1;
    }
    mc-ae {
        mc-ae-id 10;
        redundancy-group 10;
        chassis-id 1;
        mode active-active;
        status-control active;
    }
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
    multi-chassis-protection 10.100.100.2 {
        interface ge-1/1/4.0;
    }
}
}
vlan {
    unit 100 {
        family inet {
            address 10.1.1.11/8 {
                vrrp-group 1 {
                    priority 200;
                    accept-data;
                }
            }
        }
    }
}
user@PE1# show vrrp
vlan {
    unit 100 {
        family inet {
            address 10.1.1.11/8 {
                vrrp-group 1 {
                    virtual-address 10.1.1.1;
                    priority 200;
                    accept-data;
                }
            }
        }
    }
}
unit 200 {
    family inet {
        address 10.1.1.21/8 {
            vrrp-group 2 {
                virtual-address 10.1.1.2;
                priority 200;
                accept-data;
            }
        }
    }
}
}
```

```
user@PE1# show protocols
iccp {
  local-ip-addr 10.100.100.1;
  peer 10.100.100.2 {
    redundancy-group-id-list 10;
    liveness-detection {
      minimum-interval 1000;
    }
  }
}
rstp {
  interface ae1.0 {
    edge;
  }
  interface ae1.0 {
    mode point-to-point;
  }
  bpdu-block-on-edge;
}
ospf {
  area 0.0.0.0 {
    interface ge-1/1/1.0 {
      bfd-liveness-detection {
        minimum-receive-interval 700;
        transmit-interval {
          minimum-interval 350;
          threshold 500;
        }
      }
    }
    interface ge-1/4/1.0 {
      bfd-liveness-detection {
        minimum-receive-interval 700;
        transmit-interval {
          minimum-interval 350;
          threshold 500;
        }
      }
    }
  }
}
pim {
  rp {
    static {
      address 10.0.0.3 {
        group-ranges {
          239.0.0.0/8;
        }
      }
    }
  }
  interface ge-1/1/1.0 {
    priority 600;
    version 2;
  }
}
```

```

bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
  minimum-receive-interval 700;
  transmit-interval {
    minimum-interval 350;
    threshold 500;
  }
}
}
interface ge-1/4/1.0 {
  priority 200;
  version 2;
  bfd-liveness-detection { ## Warning: 'bfd-liveness-detection' is deprecated
    minimum-receive-interval 700;
    transmit-interval {
      minimum-interval 350;
      threshold 500;
    }
  }
}
}

user@PE1> show switch-options
service-id 10;

```

If you are done configuring the device, enter **commit** from configuration mode.

Repeat the procedure for Router PE2, using the appropriate interface names and addresses.

Configuring the CE Device

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

Device CE

```

set chassis aggregated-devices ethernet device-count 2
set interfaces ge-2/0/2 gigether-options 802.3ad ae0
set interfaces ge-2/0/3 gigether-options 802.3ad ae0
set interfaces ge-2/1/6 flexible-vlan-tagging
set interfaces ge-2/1/6 encapsulation flexible-ethernet-services
set interfaces ge-2/1/6 unit 0 encapsulation vlan-bridge
set interfaces ge-2/1/6 unit 0 vlan-id-range 100-110
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp system-priority 100
set interfaces ae0 unit 0 encapsulation vlan-bridge
set interfaces ae0 unit 0 vlan-id-range 100-500
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 interface ge-2/1/6.0
set bridge-domains bd0 interface ae0.0

```

Configuring the CE Device

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Device CE:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@CE# set aggregated-devices ethernet device-count 2
```

2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]
user@CE# set ge-2/0/2 gigether-options 802.3ad ae0
user@CE# set ge-2/0/3 gigether-options 802.3ad ae0
```

3. Configure an interface that connects to senders or receivers.

```
[edit interfaces ge-2/1/6]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge
user@CE# set unit 0 vlan-id-range 100-110
```

4. Configure parameters on the aggregated Ethernet bundle.

```
[edit interfaces ae0]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 0 encapsulation vlan-bridge
user@CE# set unit 0 vlan-id-range 100-500
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit interfaces ae0 aggregated-ether-options]
user@CE# set lacp active
user@CE# set lacp system-priority 100
```

The **active** statement initiates transmission of LACP packets.

For the **system-priority** statement, a smaller value indicates a higher priority. The device with the lower system priority value determines which links between LACP partner devices are active and which are in standby mode for each LACP group. The device on the controlling end of the link uses port priorities to determine which ports are bundled into the aggregated bundle and which ports are put in standby mode. Port priorities on the other device (the noncontrolling end of the link) are ignored.

6. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@CE# set domain-type bridge
user@CE# set vlan-id all
user@CE# set interface ge-2/1/6.0
user@CE# set interface ae0.0
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE# show bridge-domains
bd0 {
    domain-type bridge;
    vlan-id all;
    interface ge-2/1/6.0;
    interface ae0.0;
}

user@CE# show chassis
aggregated-devices {
    ethernet {
        device-count 2;
    }
}

user@CE# show interfaces
ge-2/0/2 {
    gigaether-options {
        802.3ad ae0;
    }
}
ge-2/0/3 {
    gigaether-options {
        802.3ad ae0;
    }
}
ge-2/1/6 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 0 {
        encapsulation vlan-bridge;
        vlan-id-range 100-110;
    }
}
ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            system-priority 100;
        }
    }
}
unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-500;
```



```
}
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring the Provider Router

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

Router P

```
set chassis aggregated-devices ethernet device-count 2
set interfaces ge-1/0/5 gigether-options 802.3ad ae1
set interfaces ge-1/0/11 gigether-options 802.3ad ae1
set interfaces ge-1/1/3 flexible-vlan-tagging
set interfaces ge-1/1/3 encapsulation flexible-ethernet-services
set interfaces ge-1/1/3 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/3 unit 0 vlan-id-range 100-500
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 interface ge-1/1/3.0
set bridge-domains bd0 interface ae1.0
```

Configuring the P Router

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router P:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@P# set aggregated-devices ethernet device-count 2
```
2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]
user@P# set ge-1/0/5 gigether-options 802.3ad ae1
user@P# set ge-1/0/11 gigether-options 802.3ad ae1
```
3. Configure an interface that connects to senders or receivers.

```
[edit interfaces ge-1/1/3]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-500
```

4. Configure parameters on the aggregated Ethernet bundle.

```
[edit interfaces ae1]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-110
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit interfaces ae1 aggregated-ether-options]
user@P# set lacp active
user@P# set lacp system-priority 100
```

6. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@P# set vlan-id all
user@P# set domain-type bridge
user@P# set interface ge-1/1/3.0
user@P# set interface ae1.0
```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@P# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  interface ge-1/1/3.0;
  interface ae1.0;
}

user@P# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@P# show interfaces
ge-1/0/5 {
  gigether-options {
    802.3ad ae1;
  }
}
ge-1/0/11 {
  gigether-options {
    802.3ad ae1;
  }
}
ge-1/1/3 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
```

```
    unit 0 {
      encapsulation vlan-bridge;
      vlan-id-range 100-500;
    }
  }
  ae1 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
      lacp {
        active;
        system-priority 100;
      }
    }
    unit 0 {
      encapsulation vlan-bridge;
      vlan-id-range 100-110;
    }
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly by running the following commands:

- **show iccp**
- **show interfaces ae0**
- **show interfaces ae1**
- **show interfaces mc-ae**
- **show pim interfaces**
- **show vrrp**
- **show l2-learning instance extensive**

Troubleshooting

Troubleshooting a LAG That Is Down

Problem The **show interfaces terse** command shows that the MC-LAG is **down**.

Solution Check the following:

- Verify that there is no configuration mismatch.
- Verify that all member ports are up.
- Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
- Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

- Related Documentation**
- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
 - [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
 - [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)
 - [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on MX Series Routers on page 338](#)

Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on MX Series Routers

Supported Platforms [MX240, MX480, MX960](#)

There are two methods for enabling Layer 3 unicast functionality across a multichassis link aggregation group (MC-LAG) to control traffic flow. You can choose either to configure Virtual Router Redundancy Protocol (VRRP) or synchronize the MAC addresses for the Layer 3 interfaces of the routers participating in the MC-LAG. The procedure to configure VRRP for use in a Layer 3 unicast MC-LAG is included in this example.

- [Requirements on page 338](#)
- [Overview on page 338](#)
- [Configuring the PE Routers on page 340](#)
- [Configuring the CE Device on page 350](#)
- [Configuring the Provider Router, P on page 352](#)
- [Verification on page 354](#)
- [Troubleshooting on page 354](#)

Requirements

This example uses the following hardware and software components:

- Four Juniper Networks MX Series routers
- Junos OS Release 11.2 or later running on all four routers

Before you configure an MC-LAG, be sure that you understand how to:

- Configure aggregated Ethernet interfaces on a router.
- Configure Link Aggregation Control Protocol (LACP) on aggregated Ethernet interfaces on a router.
- Configure Virtual Router Redundancy Protocol (VRRP) on a router.

Overview

In this example, you configure an MC-LAG across two routers by including interfaces from both routers in an aggregated Ethernet interface (ae0). Configure a multichassis protection

link for the ICL-PL, Inter-Chassis Control Protocol (ICCP) for the peers hosting the MC-LAG, and Layer 3 connectivity between MC-LAG peers.



NOTE: Layer 3 connectivity is required for ICCP.

To complete the configuration, enable VRRP by completing the following steps:

1. Create a routed VLAN interface (RVI).
2. Create a VRRP group and assign a virtual IP address that is shared between each router in the VRRP group.
3. Enable a member of a VRRP group to accept all packets destined for the virtual IP address.

Consider a sample topology in which a customer edge router, CE, is connected to two provider edge (PE) routers, PE1 and PE2, respectively. The two PE devices each have a LAG connected to the CE device. The configured mode is active-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time. PE1 and PE2 are connected to a single service provider router, the P router.

In this example, the CE router is not aware that its aggregated Ethernet links are connected to two separate PE devices. The two PE devices each have a LAG connected to the CE device. The configured mode is active-active, meaning that both PE routers' LAG ports are active and carrying traffic at the same time.

In [Figure 16 on page 102](#), from the perspective of Router CE, the two ports belonging to a LAG are connected to a single service provider device. Because the configured mode is active-active, the two ports are active, and the CE device load-balances the traffic to the peering PE devices. On the PE routers, a regular LAG is configured facing the CE device.


On one end of an MC-LAG is an MC-LAG client device, such as a server, that has one or more physical links in a link aggregation group (LAG). This client device does not need to detect the MC-LAG. On the other side of an MC-LAG are two MC-LAG routers. Each of the routers has one or more physical links connected to a single client device. The routers coordinate with each other to ensure that data traffic is forwarded properly.

ICCP messages are sent between the two PE devices. In this example, you configure an MC-LAG across two routers, consisting of two aggregated Ethernet interfaces, an interchassis link-protection link (ICL-PL), multichassis protection link for the ICL-PL, and ICCP for the peers hosting the MC-LAG.

Topology Diagram

[Figure 16 on page 102](#) shows the topology used in this example.

Figure 37: MC-LAG Active-Active on MX Series Routers

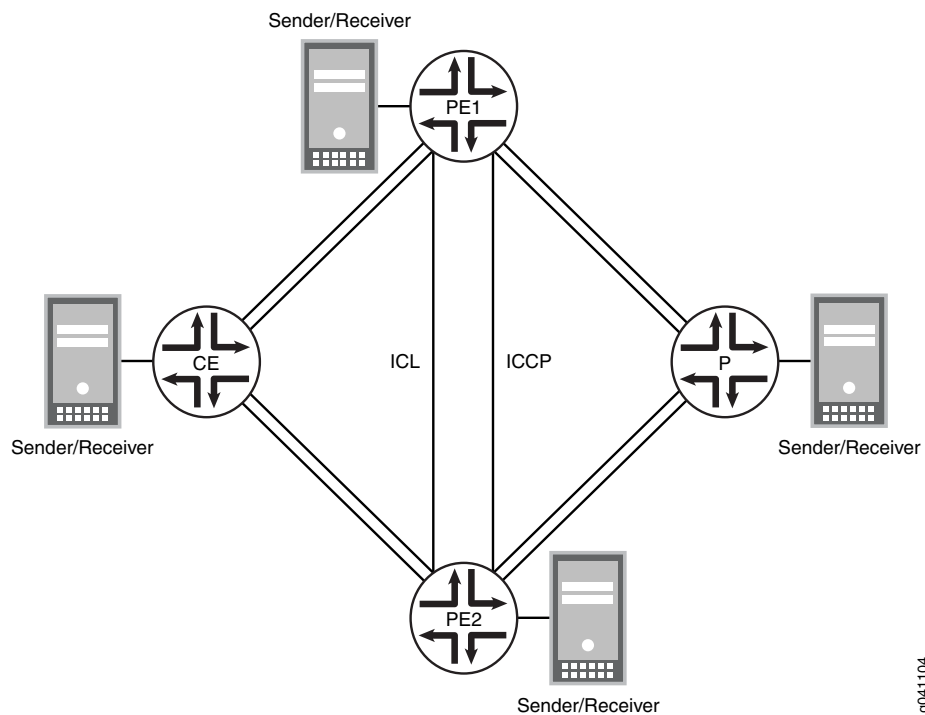

g041104

Configuring the PE Routers

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```

Router PE1
set chassis aggregated-devices ethernet device-count 4
set interfaces ge-0/0/1 gigether-options 802.3ad ae0
set interfaces ge-0/0/2 description "icl link"
set interfaces ge-0/0/2 flexible-vlan-tagging
set interfaces ge-0/0/2 encapsulation flexible-ethernet-services
set interfaces ge-0/0/2 unit 1 encapsulation vlan-bridge
set interfaces ge-0/0/2 unit 1 vlan-id 1
set interfaces ge-0/0/3 description "ICCP Link"
set interfaces ge-0/0/3 unit 0 family inet address 192.168.143.17/24
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp periodic fast
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:02
set interfaces ae0 aggregated-ether-options lacp admin-key 10
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 1
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 1
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 1
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control standby
set interfaces ae0 unit 1 encapsulation vlan-bridge
set interfaces ae0 unit 1 vlan-id 1

```

```

set interfaces ae0 unit 1 multi-chassis-protection 192.168.143.16 interface ge-0/0/2.1
set interfaces irb unit 1 family inet address 10.1.1.2/24 vrrp-group 1 virtual-address 10.1.1.5
set interfaces irb unit 1 family inet address 10.1.1.2/24 vrrp-group 1 priority 200
set interfaces irb unit 1 family inet address 10.1.1.2/24 vrrp-group 1 accept-data
set protocols iccp local-ip-addr 192.168.143.17
set protocols iccp peer 192.168.143.16 redundancy-group-id-list 1
set protocols iccp peer 192.168.143.16 liveness-detection minimum-interval 2500
set protocols iccp peer 192.168.143.16 liveness-detection multiplier 3
set bridge-domains bd1 vlan-id 1
set bridge-domains bd1 interface ae0.1
set bridge-domains bd1 interface ge-0/0/2.1
set bridge-domains bd1 routing-interface irb.1
set switch-options service-id 1

```

Router PE2

```

set chassis aggregated-devices ethernet device-count 4
set interfaces ge-0/0/1 gigether-options 802.3ad ae0
set interfaces ge-0/0/2 description "icl link"
set interfaces ge-0/0/2 flexible-vlan-tagging
set interfaces ge-0/0/2 encapsulation flexible-ethernet-services
set interfaces ge-0/0/2 unit 1 encapsulation vlan-bridge
set interfaces ge-0/0/2 unit 1 vlan-id 1
set interfaces ge-0/0/3 description "ICCP Link"
set interfaces ge-0/0/3 unit 0 family inet address 192.168.143.16/24
set interfaces ae0 flexible-vlan-tagging
set interfaces ae0 encapsulation flexible-ethernet-services
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 aggregated-ether-options lacp periodic fast
set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:02
set interfaces ae0 aggregated-ether-options lacp admin-key 10
set interfaces ae0 aggregated-ether-options mc-ae mc-ae-id 1
set interfaces ae0 aggregated-ether-options mc-ae redundancy-group 1
set interfaces ae0 aggregated-ether-options mc-ae chassis-id 0
set interfaces ae0 aggregated-ether-options mc-ae mode active-active
set interfaces ae0 aggregated-ether-options mc-ae status-control active
set interfaces ae0 unit 1 encapsulation vlan-bridge
set interfaces ae0 unit 1 vlan-id 1
set interfaces ae0 unit 1 multi-chassis-protection 192.168.143.17 interface ge-0/0/2.1
set interfaces irb unit 1 family inet address 10.1.1.3/24 vrrp-group 1 virtual-address 10.1.1.5
set interfaces irb unit 1 family inet address 10.1.1.3/24 vrrp-group 1 priority 200
set interfaces irb unit 1 family inet address 10.1.1.3/24 vrrp-group 1 accept-data
set protocols iccp local-ip-addr 192.168.143.16
set protocols iccp peer 192.168.143.17 redundancy-group-id-list 1
set protocols iccp peer 192.168.143.17 liveness-detection minimum-interval 2500
set protocols iccp peer 192.168.143.17 liveness-detection multiplier 3
set bridge-domains bd1 vlan-id 1
set bridge-domains bd1 interface ae0.1
set bridge-domains bd1 interface ge-0/0/2.1
set bridge-domains bd1 routing-interface irb.1
set switch-options service-id 1

```

Configuring the PE1 Router

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.



NOTE: Repeat this procedure for Router PE2, after modifying the appropriate interface names, addresses, and other parameters.

To configure Router PE1:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@PE1# set chassis aggregated-devices ethernet device-count 4
```

2. Specify the members to be included within the aggregated Ethernet bundles.

```
[edit interfaces]
user@PE1# set ge-0/0/1 gigether-options 802.3ad ae0
```

3. Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.

```
[edit interfaces]
user@PE1# set ge-0/0/2 description "icl link"
user@PE1# set ge-0/0/2 flexible-vlan-tagging
user@PE1# set ge-0/0/2 encapsulation flexible-ethernet-services
user@PE1# set ge-0/0/2 unit 1 encapsulation vlan-bridge
user@PE1# set ge-0/0/2 unit 1 vlan-id 1
user@PE1# set ge-0/0/3 description "ICCP Link"
user@PE1# set ge-0/0/3 unit 0 family inet address 192.168.143.17/24
```

4. Configure parameters on the aggregated Ethernet bundles.

```
[edit interfaces ae0]
user@PE1# set flexible-vlan-tagging
user@PE1# set encapsulation flexible-ethernet-services
```

5. Configure LACP on the aggregated Ethernet bundles.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE1# set lacp active
user@PE1# set lacp periodic fast
user@PE1# set lacp system-id 00:00:00:00:00:02
user@PE1# set lacp admin-key 10
```

6. Configure the MC-LAG interfaces.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE1# set mc-ae mc-ae-id 1
user@PE1# set mc-ae redundancy-group 1
user@PE1# set mc-ae chassis-id 1
user@PE1# set mc-ae mode active-active
```



```
user@PE1# set interfaces ae0 aggregated-ether-options mc-ae status-control
standby
```

The multichassis aggregated Ethernet identification number (**mc-ae-id**) specifies which link aggregation group the aggregated Ethernet interface belongs to. The ae0 interface on Router PE1 is configured with **mc-ae-id 1**.

The **redundancy-group 1** statement is used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other. The ae0 interfaces on Router PE1 and Router PE2 are configured with the same redundancy group, **redundancy-group 1**.

The **chassis-id** statement is used by LACP for calculating the port number of the MC-LAG's physical member links. Router PE1 uses **chassis-id 1** to identify ae0 interface.

The **mode** statement indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

7. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@PE1# set domain-type bridge
user@PE1# set vlan-id 1
user@PE1# set service-id 1
user@PE1# set interface ae0.1
user@PE1# set interface ge-0/0/2.1
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case Router PE1 and Router PE2), and should be configured with the same value.

8. Configure ICCP parameters.

```
[edit protocols iccp]
user@PE1# set local-ip-addr 192.168.143.17
user@PE1# set peer 192.168.143.16 redundancy-group-id-list 1
user@PE1# set peer 192.168.143.16 liveness-detection minimum-interval 2500
user@PE1# set peer 192.168.143.16 liveness-detection multiplier 3
```

9. Configure the service ID at the global level.

```
[edit switch-options]
user@PE1# set service-id 1
```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Step-by-Step Procedure

To enable VRRP on the MC-LAGs :

- Enable VRRP on the MC-LAG.
- Create a Integrated Routing and Bridging (IRB), assign a virtual IP address that is shared between each router in the VRRP group, and assign an individual IP address for each router in the VRRP group.

[edit]

```
user@PE1# set interfaces irb unit 1 family inet address 10.1.1.3/24 vrrp-group 1
virtual-address 10.1.1.5
```

- Assign the priority for each router in the VRRP group.



NOTE: The router configured with the highest priority is the master.

[edit interfaces irb]

```
user@PE1# unit 1 family inet address 10.1.1.2/24 vrrp-group 1 virtual-address 10.1.1.5
user@PE1# unit 1 family inet address 10.1.1.2/24 vrrp-group 1 priority 200
```

- Enable the router to accept all packets destined for the virtual IP address.

[edit interfaces irb]

```
user@PE1# unit 1 family inet address 10.1.1.2/24 vrrp-group 1 accept-data
```

Configuring the PE2 Router

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router PE2:

1. Specify the number of aggregated Ethernet interfaces to be created.

[edit chassis]

```
user@PE2# set chassis aggregated-devices ethernet device-count 4
```

2. Specify the members to be included within the aggregated Ethernet bundles.

[edit interfaces]

```
user@PE2# set ge-0/0/1 gigether-options 802.3ad ae0
```

3. Configure the interfaces that connect to senders or receivers, the ICL interfaces, and the ICCP interfaces.

[edit interfaces]

```
user@PE2# set ge-0/0/2 description "icl link"
```

```
user@PE2# set ge-0/0/2 flexible-vlan-tagging
```

```
user@PE2# set ge-0/0/2 encapsulation flexible-ethernet-services
```

```
user@PE2# set ge-0/0/2 unit 1 encapsulation vlan-bridge
```

```
user@PE2# set ge-0/0/2 unit 1 vlan-id 1
```

```
user@PE2# set ge-0/0/3 description "ICCP Link"
```

```
user@PE2# set ge-0/0/3 unit 0 family inet address 192.168.143.16/24
```

4. Configure parameters on the aggregated Ethernet bundles.

```
[edit interfaces ae0]
user@PE2# set flexible-vlan-tagging
user@PE2# set encapsulation flexible-ethernet-services
```

5. Configure LACP on the aggregated Ethernet bundles.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE2# set lacp active
user@PE2# set lacp periodic fast
user@PE2# set lacp system-id 00:00:00:00:00:02
user@PE2# set lacp admin-key 10
```

6. Configure the MC-LAG interfaces.

```
[edit interfaces ae0 aggregated-ether-options]
user@PE2# set mc-ae mc-ae-id 1
user@PE2# set mc-ae redundancy-group 1
user@PE2# set mc-ae chassis-id 0
user@PE2# set mc-ae mode active-active
user@PE2# set interfaces ae0 aggregated-ether-options mc-ae status-control
active
```

The multichassis aggregated Ethernet identification number (**mc-ae-id**) specifies which link aggregation group the aggregated Ethernet interface belongs to. The ae0 interface on Router PE2 is configured with **mc-ae-id 1**.

The **redundancy-group 1** statement is used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other. The ae0 interfaces on Router PE1 and Router PE2 are configured with the same redundancy group, **redundancy-group 1**.

The **chassis-id** statement is used by LACP for calculating the port number of the MC-LAG's physical member links. Router PE2 uses **chassis-id 0** to identify its ae0.

The **mode** statement indicates whether an MC-LAG is in active-standby mode or active-active mode. Chassis that are in the same group must be in the same mode.

7. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@PE2# set domain-type bridge
user@PE2# set vlan-id 1
user@PE2# set service-id 1
user@PE2# set interface ae0.1
user@PE2# set interface ge-0/0/2.1
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

The bridge-level **service-id** statement is required to link related bridge domains across peers (in this case Router PE1 and Router PE2), and should be configured with the same value.

8. Configure ICCP parameters.

```
[edit protocols iccp]
user@PE2# set local-ip-addr 192.168.143.16
user@PE2# set peer 192.168.143.17 redundancy-group-id-list 1
user@PE2# set peer 192.168.143.17 liveness-detection minimum-interval 2500
user@PE2# set peer 192.168.143.17 liveness-detection multiplier 3
```

9. Configure the service ID at the global level.

```
[edit switch-options]
user@PE1# set service-id 1
```

You must configure the same unique network-wide configuration for a service in the set of PE routers providing the service. This service ID is required if the multichassis aggregated Ethernet interfaces are part of a bridge domain.

Step-by-Step Procedure

To enable VRRP on the MC-LAGs :

- Enable VRRP on the MC-LAG.
- Create a Integrated and Bridging Interface (IRB), assign a virtual IP address that is shared between each router in the VRRP group, and assign an individual IP address for each router in the VRRP group.

```
[edit]
user@PE2# set interfaces irb unit 1 family inet address 10.1.1.3/24 vrrp-group 1
virtual-address 10.1.1.5
```

- Assign the priority for each router in the VRRP group.



NOTE: The router configured with the highest priority is the master.

```
[edit interfaces irb]
user@PE2# unit 1 family inet address 10.1.1.3/24 vrrp-group 1 virtual-address 10.1.1.5
user@PE2# unit 1 family inet address 10.1.1.3/24 vrrp-group 1 priority 200
```

- Enable the router to accept all packets destined for the virtual IP address.

```
[edit interfaces irb]
user@PE1# unit 1 family inet address 10.1.1.3/24 vrrp-group 1 accept-data
```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, **show interfaces**, **show protocols**, and **show switch-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@PE1# show bridge-domains
bd1 {
  domain-type bridge;
  vlan-id 1;
  interface ge-0/0/2.1;
```

```
interface ae0.1;
interface irb.1;
}

user@PE1# show interfaces
ge-0/0/1 {
  gigether-options {
    802.3ad ae0;
  }
}
ge-0/0/2 {
  description "icl link";
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
  unit 1 {
    encapsulation vlan-bridge;
    vlan-id 1;
  }
}
ge-0/0/3 {
  description "ICCP Link";
  unit 0 {
    family inet {
      address 192.168.143.17/24;
    }
  }
}
ae0 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
  aggregated-ether-options {
    lacp {
      active;
      periodic fast;
      system-id 00:00:00:00:00:02;
      admin-key 10;
    }
    mc-ae {
      mc-ae-id 1;
      redundancy-group 1;
      chassis-id 1;
      mode active-active;
      status-control standby;
    }
  }
}
unit 1 {
  encapsulation vlan-bridge;
  vlan-id 1;
  multi-chassis-protection 192.168.143.16 {
    interface ge-0/0/2.1;
  }
}
irb {
  unit 1 {
    family inet {
      address 10.1.1.2/24 {
```

```
        vrrp-group 1 {
            virtual-address 10.1.1.5;
            priority 200;
            accept-data;
        }
    }
}

user@PE1# show chassis
aggregated-devices {
    ethernet {
        device-count 4;
    }
}

user@PE1# show protocols
iccp {
    local-ip-addr 192.168.143.17;
    peer 192.168.143.16 {
        redundancy-group-id-list 1;
        liveness-detection {
            minimum-interval 2500;
            multiplier 3;
        }
    }
}

user@PE1# show switch-options
service-id 1;

user@PE2# show bridge-domains
bd1 {
    vlan-id 1;
    interface ae0.1;
    interface ge-0/0/2.1;
    routing-interface irb.1;
}

user@PE2# show interfaces
ge-0/0/1 {
    gigether-options {
        802.3ad ae0;
    }
}
ge-0/0/2 {
    description "icl link";
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    unit 1 {
        encapsulation vlan-bridge;
        vlan-id 1;
    }
}
ge-0/0/3 {
    description "ICCP Link";
    unit 0 {
```

```

        family inet {
            address 192.168.143.16/24;
        }
    }
}
ae0 {
    flexible-vlan-tagging;
    encapsulation flexible-ethernet-services;
    aggregated-ether-options {
        lacp {
            active;
            periodic fast;
            system-id 00:00:00:00:00:02;
            admin-key 10;
        }
        mc-ae {
            mc-ae-id 1;
            redundancy-group 1;
            chassis-id 0;
            mode active-active;
            status-control active;
        }
    }
    unit 1 {
        encapsulation vlan-bridge;
        vlan-id 1;
        multi-chassis-protection 192.168.143.17 {
            interface ge-0/0/2.1;
        }
    }
}
irb {
    unit 1 {
        family inet {
            address 10.1.1.3/24 {
                vrrp-group 1 {
                    virtual-address 10.1.1.5;
                    priority 200;
                    accept-data;
                }
            }
        }
    }
}

user@PE2# show protocols
iccp {
    local-ip-addr 192.168.143.16;
    peer 192.168.143.17 {
        redundancy-group-id-list 1;
        liveness-detection {
            minimum-interval 2500;
            multiplier 3;
        }
    }
}

```

```
user@PE2# show switch-options
service-id 1;
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring the CE Device

- [Configuring the CE Device on page 350](#)
- [Results on page 351](#)

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
Device CE    set chassis aggregated-devices ethernet device-count 4
              set interfaces ge-0/0/1 gigether-options 802.3ad ae0
              set interfaces ge-0/0/2 gigether-options 802.3ad ae0
              set interfaces ge-0/0/0 flexible-vlan-tagging
              set interfaces ge-0/0/0 encapsulation flexible-ethernet-services
              set interfaces ge-0/0/0 unit 1 encapsulation vlan-bridge
              set interfaces ge-0/0/0 unit 1 vlan-id 1
              set interfaces ae0 flexible-vlan-tagging
              set interfaces ae0 encapsulation flexible-ethernet-services
              set interfaces ae0 aggregated-ether-options lacp active
              set interfaces ae0 aggregated-ether-options lacp periodic fast
              set interfaces ae0 aggregated-ether-options lacp system-priority 127
              set interfaces ae0 aggregated-ether-options lacp system-id 00:00:00:00:00:01
              set interfaces ae0 unit 1 encapsulation vlan-bridge
              set interfaces ae0 unit 1 vlan-id 1
              set bridge-domains bd1 vlan-id 1
              set bridge-domains bd1 interface ae0.1
              set bridge-domains bd1 interface ge-0/0/0.1
```

Configuring the CE Device

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Device CE:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@CE# set aggregated-devices ethernet device-count 4
```
2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]
user@CE# set ge-0/0/1 gigether-options 802.3ad ae0
user@CE# set ge-0/0/2 gigether-options 802.3ad ae0
```
3. Configure an interface that connects to senders or receivers.

```
[edit interfaces ge-0/0/0]
```



```
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
user@CE# set unit 1 encapsulation vlan-bridge
user@CE# set unit 1 vlan-id 1
```

4. Configure parameters on the aggregated Ethernet bundle.

```
[edit interfaces ae0]
user@CE# set flexible-vlan-tagging
user@CE# set encapsulation flexible-ethernet-services
```

5. Configure LACP on the aggregated Ethernet bundle.

```
[edit interfaces ae0 aggregated-ether-options]
user@CE# set lacp active
user@CE# set lacp periodic fast
user@CE# set lacp system-priority 127
user@CE# set lacp system-id 00:00:00:00:00:01
```

The **active** statement initiates transmission of LACP packets.

For the **system-priority** statement, a smaller value indicates a higher priority. The device with the lower system priority value determines which links between LACP partner devices are active and which are in standby mode for each LACP group. The device on the controlling end of the link uses port priorities to determine which ports are bundled into the aggregated bundle and which ports are put in standby mode. Port priorities on the other device (the noncontrolling end of the link) are ignored.

6. Configure a domain that includes the set of logical ports.

```
[edit bridge-domains bd0]
user@CE# set domain-type bridge
user@CE# set vlan-id 1
user@CE# set interface ge-0/0/0.1
user@CE# set interface ae0.1
```

The ports within a bridge domain share the same flooding or broadcast characteristics in order to perform Layer 2 bridging.

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@CE# show bridge-domains
bd1 {
  vlan-id 1;
  interface ae0.1;
  interface ge-0/0/0.1;
}

user@CE# show chassis
aggregated-devices {
  ethernet {
    device-count 4;
  }
}
```

```
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring the Provider Router, P

- [Configuring the P Router on page 352](#)
- [Results on page 353](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them in a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
Router P
set chassis aggregated-devices ethernet device-count 4
set interfaces ge-1/0/5 gigether-options 802.3ad ae1
set interfaces ge-1/0/11 gigether-options 802.3ad ae1
set interfaces ge-1/1/3 flexible-vlan-tagging
set interfaces ge-1/1/3 encapsulation flexible-ethernet-services
set interfaces ge-1/1/3 unit 0 encapsulation vlan-bridge
set interfaces ge-1/1/3 unit 0 vlan-id-range 100-500
set interfaces ae1 flexible-vlan-tagging
set interfaces ae1 encapsulation flexible-ethernet-services
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 aggregated-ether-options lacp system-priority 100
set interfaces ae1 unit 0 encapsulation vlan-bridge
set interfaces ae1 unit 0 vlan-id-range 100-110
set bridge-domains bd0 vlan-id all
set bridge-domains bd0 domain-type bridge
set bridge-domains bd0 interface ge-1/1/3.0
set bridge-domains bd0 interface ae1.0
```

Configuring the P Router

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure Router P:

1. Specify the number of aggregated Ethernet interfaces to be created.

```
[edit chassis]
user@P# set aggregated-devices ethernet device-count 4
```
2. Specify the members to be included within the aggregated Ethernet bundle.

```
[edit interfaces]
user@P# set ge-0/0/1 gigether-options 802.3ad ae0
user@P# set ge-1/0/11 gigether-options 802.3ad ae1
```
3. Configure an interface that connects to senders or receivers.

```
[edit interfaces ge-1/1/3]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
```

```

user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-500

```

4. Configure parameters on the aggregated Ethernet bundle.

```

[edit interfaces ae1]
user@P# set flexible-vlan-tagging
user@P# set encapsulation flexible-ethernet-services
user@P# set unit 0 encapsulation vlan-bridge
user@P# set unit 0 vlan-id-range 100-110

```

5. Configure LACP on the aggregated Ethernet bundle.

```

[edit interfaces ae1 aggregated-ether-options]
user@P# set lacp active
user@P# set lacp system-priority 100

```

6. Configure a domain that includes the set of logical ports.

```

[edit bridge-domains bd0]
user@P# set vlan-id all
user@P# set domain-type bridge
user@P# set interface ge-1/1/3.0
user@P# set interface ae1.0

```

Results

From configuration mode, confirm your configuration by entering the **show bridge-domains**, **show chassis**, and **show interfaces** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@P# show bridge-domains
bd0 {
  domain-type bridge;
  vlan-id all;
  interface ge-1/1/3.0;
  interface ae1.0;
}

user@P# show chassis
aggregated-devices {
  ethernet {
    device-count 2;
  }
}

user@P# show interfaces
ge-1/0/5 {
  gigether-options {
    802.3ad ae1;
  }
}
ge-1/0/11 {
  gigether-options {
    802.3ad ae1;
  }
}

```

```
ge-1/1/3 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
  unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-500;
  }
}
ae1 {
  flexible-vlan-tagging;
  encapsulation flexible-ethernet-services;
  aggregated-ether-options {
    lacp {
      active;
      system-priority 100;
    }
  }
  unit 0 {
    encapsulation vlan-bridge;
    vlan-id-range 100-110;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly by running the following commands:

- **show iccp**
- **show interfaces ae0**
- **show interfaces ae1**
- **show interfaces mc-ae**
- **show vrrp**
- **show l2-learning instance extensive**

Troubleshooting

- [Troubleshooting a LAG That Is Down on page 354](#)

Troubleshooting a LAG That Is Down

Problem The **show interfaces terse** command shows that the MC-LAG is **down**.

Solution Check the following:

1. Verify that there is no configuration mismatch.
2. Verify that all member ports are up.

3. Verify that the MC-LAG is part of family Ethernet switching (Layer 2 LAG).
4. Verify that the MC-LAG member is connected to the correct MC-LAG member at the other end.

**Related
Documentation**

- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on MX Series Routers on page 318](#)

CHAPTER 5

Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG

- [Understanding MC-LAGs on an FCoE Transit Switch on page 357](#)
- [Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG on page 360](#)

Understanding MC-LAGs on an FCoE Transit Switch

Supported Platforms [EX4600, QFabric System, QFX Series](#)

Multichassis link aggregation groups (MC-LAGs) provide redundancy and load balancing between two switches, multihoming support for client devices such as servers, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP).

You can use an MC-LAG to provide a redundant aggregation layer for Fibre Channel over Ethernet (FCoE) traffic. To support lossless transport of FCoE traffic across an MC-LAG, you must configure the appropriate class of service (CoS) on both of the switches with MC-LAG port members. The CoS configuration must be the same on both of the MC-LAG switches because MC-LAGs do not carry forwarding class and IEEE 802.1p priority information.

Ports that are part of an FCoE-FC gateway configuration (a virtual FCoE-FC gateway fabric) do not support MC-LAGs. Ports that are members of an MC-LAG act as pass-through transit switch ports.

Standalone switches support MC-LAGs. QFabric system Node devices do not support MC-LAGs. Virtual Chassis and mixed-mode Virtual Chassis Fabric (VCF) configurations do not support FCoE. Only pure QFX5100 VCFs (consisting of only QFX5100 switches) support FCoE.


This topic describes:

- [Supported Topology on page 358](#)
- [FIP Snooping and FCoE Trusted Ports on page 359](#)
- [CoS and Data Center Bridging \(DCB\) on page 360](#)

Supported Topology

Switches that are not directly connected to FCoE hosts and that act as pass-through transit switches support MC-LAGs for FCoE traffic in an *inverted-U* network topology. [Figure 38 on page 358](#) shows an inverted-U topology using QFX3500 switches.

Figure 38: Supported Topology for an MC-LAG on an FCoE Transit Switch

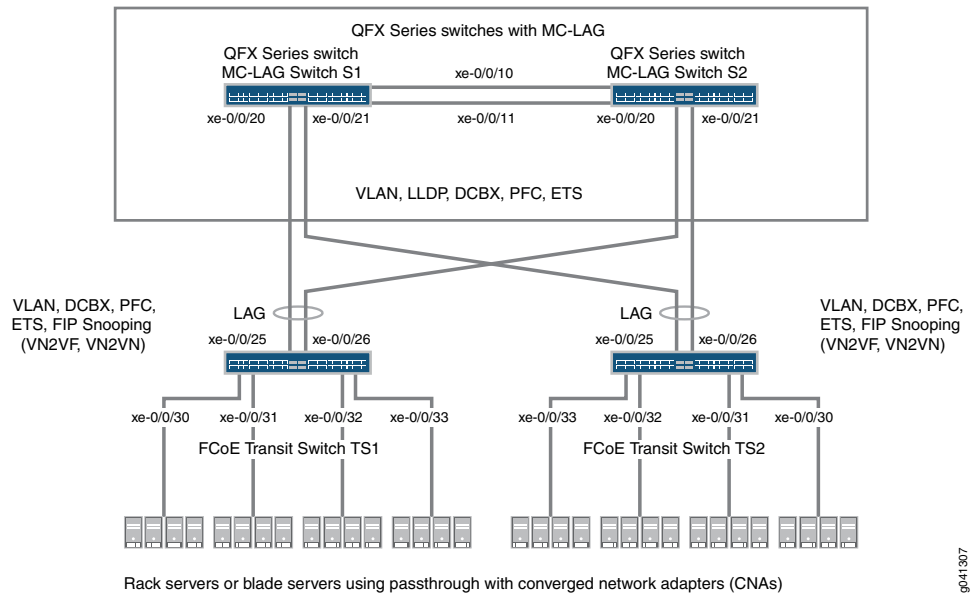

The following rules and guidelines apply to MC-LAGs when used for FCoE traffic. The rules and guidelines help to ensure the proper handling and lossless transport characteristics required for FCoE traffic.

- The two switches that form the MC-LAG (Switches S1 and S2) cannot use ports that are part of an FCoE-FC gateway fabric. The MC-LAG switch ports must be pass-through transit switch ports (used as part of an intermediate transit switch that is not directly connected to FCoE hosts).
- MC-LAG Switches S1 and S2 cannot be directly connected to the FCoE hosts.
- The two switches that serve as access devices for FCoE hosts (FCoE Transit Switches TS1 and TS2) use standard LAGs to connect to MC-LAG Switches S1 and S2. FCoE Transit Switches TS1 and TS2 can be standalone switches or they can be Node devices in a QFabric system.
- Transit Switches TS1 and TS2 must use transit switch ports for the FCoE hosts and for the standard LAGs to MC-LAG Switches S1 and S2.
- Enable FIP snooping on the FCoE VLAN on Transit Switches TS1 and TS2. You can configure either VN_Port to VF_Port (VN2VF_Port) FIP snooping or VN_Port to VN_Port (VN2VN_Port) FIP snooping, depending on whether the FCoE hosts need to access targets in the FC SAN (VN2VF_Port FIP snooping) or targets in the Ethernet network (VN2VN_Port FIP snooping).

FIP snooping should be performed at the access edge and is not supported on MC-LAG switches. Do not enable FIP snooping on MC-LAG Switches S1 and S2. (Do not enable FIP snooping on the MC-LAG ports that connect Switches S1 and S2 to Switches TS1 and TS2 or on the LAG ports that connect Switch S1 to S2.)



NOTE: Juniper Networks QFX10000 aggregation switches do not support FIP snooping, so they cannot be used as FIP snooping access switches (Transit Switches TS1 and TS2) in this topology.

- The CoS configuration must be consistent on the MC-LAG switches. Because MC-LAGs carry no forwarding class or priority information, each MC-LAG switch needs to have the same CoS configuration to support lossless transport. (On each MC-LAG switch, the name, egress queue, and CoS provisioning of each forwarding class must be the same, and the priority-based flow control (PFC) configuration must be the same.)

Transit Switches (Server Access)

The role of FCoE Transit Switches TS1 and TS2 is to connect FCoE hosts in a multihomed fashion to the MC-LAG switches, so Transit Switches TS1 and TS2 act as access switches for the FCoE hosts. (FCoE hosts are directly connected to Transit Switches TS1 and TS2.)

The transit switch configuration depends on whether you want to do VN2VF_Port FIP snooping or VN2VN_Port FIP snooping, and whether the transit switches also have ports configured as part of an FCoE-FC gateway virtual fabric. Ports that a QFX3500 switch uses in an FCoE-FC gateway virtual fabric cannot be included in the transit switch LAG connection to the MC-LAG switches. (Ports cannot belong to both a transit switch and an FCoE-FC gateway; you must use different ports for each mode of operation.)

MC-LAG Switches (FCoE Aggregation)

The role of MC-LAG Switches S1 and S2 is to provide redundant, load-balanced connections between FCoE transit switches. The MC-LAG Switches S1 and S2 act as aggregation switches. FCoE hosts are not directly connected to the MC-LAG switches.

The MC-LAG switch configuration is the same regardless of which type of FIP snooping FCoE Transit Switches TS1 and TS2 perform.

FIP Snooping and FCoE Trusted Ports

To maintain secure access, enable VN2VF_Port FIP snooping or VN2VN_Port FIP snooping at the transit switch access ports connected directly to the FCoE hosts. FIP snooping should be performed at the access edge of the network to prevent unauthorized access. For example, in [Figure 38 on page 358](#), you enable FIP snooping on the FCoE VLANs on Transit Switches TS1 and TS2 that include the access ports connected to the FCoE hosts.

Do not enable FIP snooping on the switches used to create the MC-LAG. For example, in [Figure 38 on page 358](#), you would not enable FIP snooping on the FCoE VLANs on Switches S1 and S2.

Configure links between switches as FCoE trusted ports to reduce FIP snooping overhead and ensure that the system performs FIP snooping only at the access edge. In the sample topology, configure the Transit Switch TS1 and TS2 LAG ports connected to the MC-LAG switches as FCoE trusted ports, configure the Switch S1 and S2 MC-LAG ports connected to Switches TS1 and TS2 as FCoE trusted ports, and configure the ports in the LAG that connects Switches S1 to S2 as FCoE trusted ports.

CoS and Data Center Bridging (DCB)

The MC-LAG links do not carry forwarding class or priority information. The following CoS properties must have the same configuration on each MC-LAG switch or on each MC-LAG interface to support lossless transport:

- FCoE forwarding class name—For example, the forwarding class for FCoE traffic could use the default **fcoe** forwarding class on both MC-LAG switches.
- FCoE output queue—For example, the **fcoe** forwarding class could be mapped to queue 3 on both MC-LAG switches (queue 3 is the default mapping for the **fcoe** forwarding class).
- Classifier—The forwarding class for FCoE traffic must be mapped to the same IEEE 802.1p code point on each member interface of the MC-LAG on both MC-LAG switches. For example, the FCoE forwarding class **fcoe** could be mapped to IEEE 802.1p code point **011** (code point **011** is the default mapping for the **fcoe** forwarding class).
- Priority-based flow control (PFC)—PFC must be enabled on the FCoE code point on each MC-LAG switch and applied to each MC-LAG interface using a congestion notification profile.

You must also configure enhanced transmission selection (ETS) on the MC-LAG interfaces to provide sufficient scheduling resources (bandwidth, priority) for lossless transport. The ETS configuration can be different on each MC-LAG switch, as long as enough resources are scheduled to support lossless transport for the expected FCoE traffic.

Link Layer Discovery Protocol (LLDP) and Data Center Bridging Capability Exchange Protocol (DCBX) must be enabled on each MC-LAG member interface (LLDP and DCBX are enabled by default on all interfaces).



NOTE: As with all other FCoE configurations, FCoE traffic requires a dedicated VLAN that carries only FCoE traffic, and IGMP snooping must be disabled on the FCoE VLAN.

Example: Configuring CoS for FCoE Transit Switch Traffic Across an MC-LAG

Supported Platforms EX4600, QFabric System, QFX Series

Multichassis link aggregation groups (MC-LAGs) provide redundancy and load balancing between two switches, multihoming support for client devices such as servers, and a loop-free Layer 2 network without running Spanning Tree Protocol (STP).



NOTE: This example uses Junos OS without support for the Enhanced Layer 2 Software (ELS) configuration style.

You can use an MC-LAG to provide a redundant aggregation layer for Fibre Channel over Ethernet (FCoE) traffic in an *inverted-U* topology. To support lossless transport of FCoE traffic across an MC-LAG, you must configure the appropriate class of service (CoS) on both of the switches with MC-LAG port members. The CoS configuration must be the same on both of the MC-LAG switches because an MC-LAG does not carry forwarding class and IEEE 802.1p priority information.



NOTE: This example describes how to configure CoS to provide lossless transport for FCoE traffic across an MC-LAG that connects two switches. It also describes how to configure CoS on the FCoE transit switches that connect FCoE hosts to the two switches that form the MC-LAG.

This example does *not* describe how to configure the MC-LAG itself. For a detailed example of MC-LAG configuration, see [“Example: Configuring Multichassis Link Aggregation” on page 41](#). However, this example includes a subset of MC-LAG configuration that only shows how to configure interface membership in the MC-LAG.

Ports that are part of an FCoE-FC gateway configuration (a virtual FCoE-FC gateway fabric) do not support MC-LAGs. Ports that are members of an MC-LAG act as FCoE pass-through transit switch ports.

QFX Series switches and EX4600 switches support MC-LAGs. QFabric system Node devices do not support MC-LAGs.

- [Requirements on page 361](#)
- [Overview on page 362](#)
- [Configuration on page 367](#)
- [Verification on page 375](#)

Requirements

This example uses the following hardware and software components:

- Two Juniper Networks QFX3500 switches that form an MC-LAG for FCoE traffic.
- Two Juniper Networks QFX3500 switches that provide FCoE server access in transit switch mode and that connect to the MC-LAG switches. These switches can be standalone QFX3500 switches or they can be Node devices in a QFabric system.
- FCoE servers (or other FCoE hosts) connected to the transit switches.
- Junos OS Release 12.2 or later for the QFX Series.

Overview

FCoE traffic requires lossless transport. This example shows you how to:

- Configure CoS for FCoE traffic on the two QFX3500 switches that form the MC-LAG, including priority-based flow control (PFC) and enhanced transmission selection (ETS; hierarchical scheduling of resources for the FCoE forwarding class priority and for the forwarding class set priority group).



NOTE: Configuring or changing PFC on an interface blocks the entire port until the PFC change is completed. After a PFC change is completed, the port is unblocked and traffic resumes. Blocking the port stops ingress and egress traffic, and causes packet loss on all queues on the port until the port is unblocked.

- Configure CoS for FCoE on the two FCoE transit switches that connect FCoE hosts to the MC-LAG switches and enable FIP snooping on the FCoE VLAN at the FCoE transit switch access ports.
- Disable IGMP snooping on the FCoE VLAN.



NOTE: This is only necessary if IGMP snooping is enabled on the VLAN. Before Junos OS Release 13.2, IGMP snooping was enabled by default on VLANs. Beginning with Junos OS Release 13.2, IGMP snooping is enabled by default only on the default VLAN.

- Configure the appropriate port mode, MTU, and FCoE trusted or untrusted state for each interface to support lossless FCoE transport.

Topology

Switches that act as transit switches support MC-LAGs for FCoE traffic in an inverted-U network topology, as shown in [Figure 39 on page 363](#).

Figure 39: Supported Topology for an MC-LAG on an FCoE Transit Switch

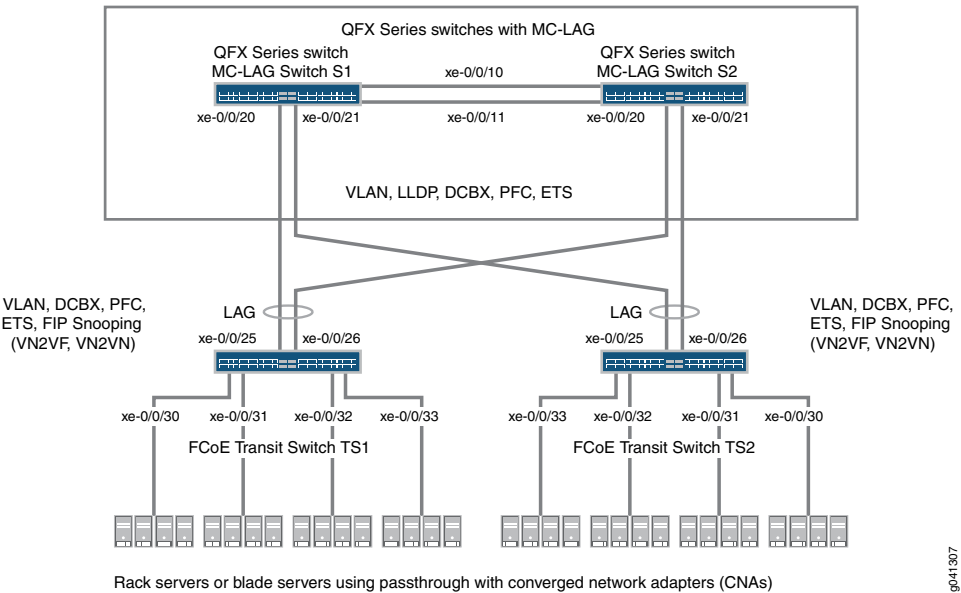


Table 13 on page 363 shows the configuration components for this example.

Table 13: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology

Component	Settings
Hardware	Four QFX3500 switches (two to form the MC-LAG as pass-through transit switches and two transit switches for FCoE access).
Forwarding class (all switches)	Default fcoe forwarding class.
Classifier (forwarding class mapping of incoming traffic to IEEE priority)	Default IEEE 802.1p trusted classifier on all FCoE interfaces.

Table 13: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology (*continued*)

Component	Settings
LAGs and MC-LAG	<p>S1—Ports xe-0/0/10 and x-0/0/11 are members of LAG ae0, which connects Switch S1 to Switch S2. Ports xe-0/0/20 and xe-0/0/21 are members of MC-LAG ae1. All ports are configured in trunk port mode, as fcoe-trusted, and with an MTU of 2180.</p> <p>S2—Ports xe-0/0/10 and x-0/0/11 are members of LAG ae0, which connects Switch S2 to Switch S1. Ports xe-0/0/20 and xe-0/0/21 are members of MC-LAG ae1. All ports are configured in trunk port mode, as fcoe-trusted, and with an MTU of 2180.</p> <p>NOTE: Ports xe-0/0/20 and xe-0/0/21 on Switches S1 and S2 are the members of the MC-LAG.</p> <p>TS1—Ports xe-0/0/25 and x-0/0/26 are members of LAG ae1, configured in trunk port mode, as fcoe-trusted, and with an MTU of 2180. Ports xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 are configured in tagged-access port mode, with an MTU of 2180.</p> <p>TS2—Ports xe-0/0/25 and x-0/0/26 are members of LAG ae1, configured in trunk port mode, as fcoe-trusted, and with an MTU of 2180. Ports xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 are configured in tagged-access port mode, with an MTU of 2180.</p>
FCoE queue scheduler (all switches)	fcoe-sched: Minimum bandwidth 3g Maximum bandwidth 100% Priority low
Forwarding class-to-scheduler mapping (all switches)	Scheduler map fcoe-map : Forwarding class fcoe Scheduler fcoe-sched
Forwarding class set (FCoE priority group, all switches)	fcoe-pg: Forwarding class fcoe Egress interfaces: <ul style="list-style-type: none"> • S1—LAG ae0 and MC-LAG ae1 • S2—LAG ae0 and MC-LAG ae1 • TS1—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 • TS2—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33
Traffic control profile (all switches)	fcoe-tcp: Scheduler map fcoe-map Minimum bandwidth 3g Maximum bandwidth 100%

Table 13: Components of the CoS for FCoE Traffic Across an MC-LAG Configuration Topology (*continued*)

Component	Settings
PFC congestion notification profile (all switches)	<p>fcoe-cnp: Code point 011</p> <p>Ingress interfaces:</p> <ul style="list-style-type: none"> • S1—LAG ae0 and MC-LAG ae1 • S2—LAG ae0 and MC-LAG ae1 • TS1—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 • TS2—LAG ae1, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33
FCoE VLAN name and tag ID	<p>Name—fcoe_vlan ID—100</p> <p>Include the FCoE VLAN on the interfaces that carry FCoE traffic on all four switches.</p> <p>Disable IGMP snooping on the interfaces that belong to the FCoE VLAN on all four switches.</p>
FIP snooping	<p>Enable FIP snooping on Transit Switches TS1 and TS2 on the FCoE VLAN. Configure the LAG interfaces that connect to the MC-LAG switches as FCoE trusted interfaces so that they do not perform FIP snooping.</p> <p>This example enables VN2VN_Port FIP snooping on the FCoE transit switch interfaces connected to the FCoE servers. The example is equally valid with VN2VF_Port FIP snooping enabled on the transit switch access ports. The method of FIP snooping you enable depends on your network configuration.</p>



NOTE: This example uses the default IEEE 802.1p trusted BA classifier, which is automatically applied to trunk mode and tagged access mode ports if you do not apply an explicitly configured classifier.

To configure CoS for FCoE traffic across an MC-LAG:

- Use the default FCoE forwarding class and forwarding-class-to-queue mapping (do not explicitly configure the FCoE forwarding class or output queue). The default FCoE forwarding class is **fcoe**, and the default output queue is queue 3.



NOTE: In Junos OS Release 12.2, traffic mapped to explicitly configured forwarding classes, even lossless forwarding classes such as **fcoe**, is treated as lossy (**best-effort**) traffic and does *not* receive lossless treatment. To receive lossless treatment in Release 12.2, traffic must use one of the default lossless forwarding classes (**fcoe** or **no-loss**).

In Junos OS Release 12.3 and later, you can include the *no-loss* packet drop attribute in the explicit forwarding class configuration to configure a lossless forwarding class.

- Use the default trusted BA classifier, which maps incoming packets to forwarding classes by the IEEE 802.1p code point (CoS priority) of the packet. The trusted classifier is the default classifier for interfaces in trunk and tagged-access port modes. The default trusted classifier maps incoming packets with the IEEE 802.1p code point 3 (011) to the FCoE forwarding class. If you choose to configure the BA classifier instead of using the default classifier, you must ensure that FCoE traffic is classified into forwarding classes in exactly the same way on both MC-LAG switches. Using the default classifier ensures consistent classifier configuration on the MC-LAG ports.
- Configure a congestion notification profile that enables PFC on the FCoE code point (code point 011 in this example). The congestion notification profile configuration must be the same on both MC-LAG switches.
- Apply the congestion notification profile to the interfaces.
- Configure enhanced transmission selection (ETS, also known as hierarchical scheduling) on the interfaces to provide the bandwidth required for lossless FCoE transport. Configuring ETS includes configuring bandwidth scheduling for the FCoE forwarding class, a forwarding class set (priority group) that includes the FCoE forwarding class, and a traffic control profile to assign bandwidth to the forwarding class set that includes FCoE traffic.
- Apply the ETS scheduling to the interfaces.
- Configure the port mode, MTU, and FCoE trusted or untrusted state for each interface to support lossless FCoE transport.

In addition, this example describes how to enable FIP snooping on the Transit Switch TS1 and TS2 ports that are connected to the FCoE servers and how to disable IGMP snooping on the FCoE VLAN. To provide secure access, FIP snooping must be enabled on the FCoE access ports.

This example focuses on the CoS configuration to support lossless FCoE transport across an MC-LAG. This example does not describe how to configure the properties of MC-LAGs and LAGs, although it does show you how to configure the port characteristics required

to support lossless transport and how to assign interfaces to the MC-LAG and to the LAGs.

Before you configure CoS, configure:

- The MC-LAGs that connect Switches S1 and S2 to Switches TS1 and TS2. ([“Example: Configuring Multichassis Link Aggregation” on page 41](#) describes how to configure MC-LAGs.)
- The LAGs that connect the Transit Switches TS1 and TS2 to MC-LAG Switches S1 and S2. ([Configuring Link Aggregation](#) describes how to configure LAGs.)
- The LAG that connects Switch S1 to Switch S2.

Configuration

To configure CoS for lossless FCoE transport across an MC-LAG, perform these tasks:

- [Configuring MC-LAG Switches S1 and S2 on page 369](#)
- [Configuring FCoE Transit Switches TS1 and TS2 on page 370](#)
- [Results on page 372](#)

CLI Quick Configuration

To quickly configure CoS for lossless FCoE transport across an MC-LAG, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI for MC-LAG Switch S1 and MC-LAG Switch S2 at the **[edit]** hierarchy level. The configurations on Switches S1 and S2 are identical because the CoS configuration must be identical, and because this example uses the same ports on both switches.

Switch S1 and Switch S2

```
set class-of-service schedulers fcoe-sched priority low transmit-rate 3g
set class-of-service schedulers fcoe-sched shaping-rate percent 100
set class-of-service scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set class-of-service forwarding-class-sets fcoe-pg class fcoe
set class-of-service traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate 3g
set class-of-service traffic-control-profiles fcoe-tcp shaping-rate percent 100
set class-of-service interfaces ae0 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set class-of-service interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces ae0 congestion-notification-profile fcoe-cnp
set class-of-service interfaces ae1 congestion-notification-profile fcoe-cnp
set vlans fcoe_vlan vlan-id 100
set protocols igmp-snooping vlan fcoe_vlan disable
set interfaces xe-0/0/10 ether-options 802.3ad ae0
set interfaces xe-0/0/11 ether-options 802.3ad ae0
set interfaces xe-0/0/20 ether-options 802.3ad ae1
set interfaces xe-0/0/21 ether-options 802.3ad ae1
set interfaces ae0 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces ae0 mtu 2180
set interfaces ae1 mtu 2180
```

```
set ethernet-switching-options secure-access-port interface ae0 fcoe-trusted
set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
```

To quickly configure CoS for lossless FCoE transport across an MC-LAG, copy the following commands, paste them in a text file, remove line breaks, change variables and details to match your network configuration, and then copy and paste the commands into the CLI for Transit Switch TS1 and Transit Switch TS2 at the **[edit]** hierarchy level. The configurations on Switches TS1 and TS2 are identical because the CoS configuration must be identical, and because this example uses the same ports on both switches.

Switch TS1 and Switch TS2

```
set class-of-service schedulers fcoe-sched priority low transmit-rate 3g
set class-of-service schedulers fcoe-sched shaping-rate percent 100
set class-of-service scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
set class-of-service forwarding-class-sets fcoe-pg class fcoe
set class-of-service traffic-control-profiles fcoe-tcp scheduler-map fcoe-map guaranteed-rate
3g
set class-of-service traffic-control-profiles fcoe-tcp shaping-rate percent 100
set class-of-service interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
set class-of-service interfaces xe-0/0/30 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
set class-of-service congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
set class-of-service interfaces ae1 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/30 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
set class-of-service interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
set vlans fcoe_vlan vlan-id 100
set protocols igmp-snooping vlan fcoe_vlan disable
set interfaces xe-0/0/25 ether-options 802.3ad ae1
set interfaces xe-0/0/26 ether-options 802.3ad ae1
set interfaces ae1 unit 0 family ethernet-switching port-mode trunk vlan members fcoe_vlan
set interfaces xe-0/0/30 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/31 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/32 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces xe-0/0/33 unit 0 family ethernet-switching port-mode tagged-access vlan members
fcoe_vlan
set interfaces ae1 mtu 2180
set interfaces xe-0/0/30 mtu 2180
set interfaces xe-0/0/31 mtu 2180
set interfaces xe-0/0/32 mtu 2180
set interfaces xe-0/0/33 mtu 2180
set ethernet-switching-options secure-access-port interface ae1 fcoe-trusted
set ethernet-switching-options secure-access-port vlan fcoe_vlan examine-fip examine-vn2v2
beacon-period 90000
```

Configuring MC-LAG Switches S1 and S2

Step-by-Step Procedure

To configure CoS resource scheduling (ETS), PFC, the FCoE VLAN, and the LAG and MC-LAG interface membership and characteristics to support lossless FCoE transport across an MC-LAG (this example uses the default **fcoe** forwarding class and the default classifier to map incoming FCoE traffic to the FCoE IEEE 802.1p code point **011**, so you do not configure them):

1. Configure output scheduling for the FCoE queue.

```
[edit class-of-service schedulers fcoe-sched]
user@switch# set priority low transmit-rate 3g
user@switch# set shaping-rate percent 100
```
2. Map the FCoE forwarding class to the FCoE scheduler (**fcoe-sched**).

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```
3. Configure the forwarding class set (**fcoe-pg**) for the FCoE traffic.

```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```
4. Define the traffic control profile (**fcoe-tcp**) to use on the FCoE forwarding class set.

```
[edit class-of-service traffic-control-profiles fcoe-tcp]
user@switch# set scheduler-map fcoe-map guaranteed-rate 3g
user@switch# set shaping-rate percent 100
```
5. Apply the FCoE forwarding class set and traffic control profile to the LAG and MC-LAG interfaces.

```
[edit class-of-service]
user@switch# set interfaces ae0 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
user@switch# set interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile fcoe-tcp
```
6. Enable PFC on the FCoE priority by creating a congestion notification profile (**fcoe-cnp**) that applies FCoE to the IEEE 802.1 code point **011**.

```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point 011 pfc
```
7. Apply the PFC configuration to the LAG and MC-LAG interfaces.

```
[edit class-of-service]
user@switch# set interfaces ae0 congestion-notification-profile fcoe-cnp
user@switch# set interfaces ae1 congestion-notification-profile fcoe-cnp
```
8. Configure the VLAN for FCoE traffic (**fcoe_vlan**).

```
[edit vlans]
user@switch# set fcoe_vlan vlan-id 100
```
9. Disable IGMP snooping on the FCoE VLAN.

```
[edit protocols]
user@switch# set igmp-snooping vlan fcoe_vlan disable
```
10. Add the member interfaces to the LAG between the two MC-LAG switches.

```
[edit interfaces]
user@switch# set xe-0/0/10 ether-options 802.3ad ae0
user@switch# set xe-0/0/11 ether-options 802.3ad ae0
```

11. Add the member interfaces to the MC-LAG.

```
[edit interfaces]
user@switch# set xe-0/0/20 ether-options 802.3ad ae1
user@switch# set xe-0/0/21 ether-options 802.3ad ae1
```

12. Configure the port mode as **trunk** and membership in the FCoE VLAN (**fcoe_vlan**) for the LAG (ae0) and for the MC-LAG (ae1).

```
[edit interfaces]
user@switch# set ae0 unit 0 family ethernet-switching port-mode trunk vlan members
fcoe_vlan
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk vlan members
fcoe_vlan
```

13. Set the MTU to **2180** for the LAG and MC-LAG interfaces.

2180 bytes is the minimum size required to handle FCoE packets because of the payload and header sizes. You can configure the MTU to a higher number of bytes if desired, but not less than 2180 bytes.

```
[edit interfaces]
user@switch# set ae0 mtu 2180
user@switch# set ae1 mtu 2180
```

14. Set the LAG and MC-LAG interfaces as FCoE trusted ports.

Ports that connect to other switches should be trusted and should not perform FIP snooping.

```
[edit ethernet-switching-options secure-access-port interface]
user@switch# set ae0 fcoe-trusted
user@switch# set ae1 fcoe-trusted
```

Configuring FCoE Transit Switches TS1 and TS2

Step-by-Step Procedure

The CoS configuration on FCoE Transit Switches TS1 and TS2 is similar to the CoS configuration on MC-LAG Switches S1 and S2. However, the port configurations differ, and you must enable FIP snooping on the Switch TS1 and Switch TS2 FCoE access ports.

To configure resource scheduling (ETS), PFC, the FCoE VLAN, and the LAG interface membership and characteristics to support lossless FCoE transport across the MC-LAG (this example uses the default **fcoe** forwarding class and the default classifier to map incoming FCoE traffic to the FCoE IEEE 802.1p code point **011**, so you do not configure them):

1. Configure output scheduling for the FCoE queue.

```
[edit class-of-service schedulers fcoe-sched]
user@switch# set priority low transmit-rate 3g
user@switch# set shaping-rate percent 100
```

2. Map the FCoE forwarding class to the FCoE scheduler (**fcoe-sched**).

```
[edit class-of-service]
user@switch# set scheduler-maps fcoe-map forwarding-class fcoe scheduler fcoe-sched
```

3. Configure the forwarding class set (**fcoe-pg**) for the FCoE traffic.


```
[edit class-of-service]
user@switch# set forwarding-class-sets fcoe-pg class fcoe
```
4. Define the traffic control profile (**fcoe-tcp**) to use on the FCoE forwarding class set.


```
[edit class-of-service]
user@switch# set traffic-control-profiles fcoe-tcp scheduler-map fcoe-map
guaranteed-rate 3g
user@switch# set traffic-control-profiles fcoe-tcp shaping-rate percent 100
```
5. Apply the FCoE forwarding class set and traffic control profile to the LAG interface and to the FCoE access interfaces.


```
[edit class-of-service]
user@switch# set interfaces ae1 forwarding-class-set fcoe-pg output-traffic-control-profile
fcoe-tcp
user@switch# set interfaces xe-0/0/30 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/31 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/32 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
user@switch# set interfaces xe-0/0/33 forwarding-class-set fcoe-pg
output-traffic-control-profile fcoe-tcp
```
6. Enable PFC on the FCoE priority by creating a congestion notification profile (**fcoe-cnp**) that applies FCoE to the IEEE 802.1 code point 011.


```
[edit class-of-service]
user@switch# set congestion-notification-profile fcoe-cnp input ieee-802.1 code-point
011 pfc
```
7. Apply the PFC configuration to the LAG interface and to the FCoE access interfaces.


```
[edit class-of-service]
user@switch# set interfaces ae1 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/30 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/31 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/32 congestion-notification-profile fcoe-cnp
user@switch# set interfaces xe-0/0/33 congestion-notification-profile fcoe-cnp
```
8. Configure the VLAN for FCoE traffic (**fcoe_vlan**).


```
[edit vlans]
user@switch# set fcoe_vlan vlan-id 100
```
9. Disable IGMP snooping on the FCoE VLAN.


```
[edit protocols]
user@switch# set igmp-snooping vlan fcoe_vlan disable
```
10. Add the member interfaces to the LAG.


```
[edit interfaces]
user@switch# set xe-0/0/25 ether-options 802.3ad ae1
user@switch# set xe-0/0/26 ether-options 802.3ad ae1
```
11. On the LAG (**ae1**), configure the port mode as **trunk** and membership in the FCoE VLAN (**fcoe_vlan**).


```
[edit interfaces]
```

```
user@switch# set ae1 unit 0 family ethernet-switching port-mode trunk vlan members
fcoe_vlan
```

12. On the FCoE access interfaces (xe-0/0/30, xe-0/0/31, xe-0/0/32, xe-0/0/33), configure the port mode as **tagged-access** and membership in the FCoE VLAN (**fcoe_vlan**).

```
[edit interfaces]
user@switch# set xe-0/0/30 unit 0 family ethernet-switching port-mode tagged-access
vlan members fcoe_vlan
user@switch# set xe-0/0/31 unit 0 family ethernet-switching port-mode tagged-access
vlan members fcoe_vlan
user@switch# set xe-0/0/32 unit 0 family ethernet-switching port-mode tagged-access
vlan members fcoe_vlan
user@switch# set xe-0/0/33 unit 0 family ethernet-switching port-mode tagged-access
vlan members fcoe_vlan
```

13. Set the MTU to **2180** for the LAG and FCoE access interfaces.

2180 bytes is the minimum size required to handle FCoE packets because of the payload and header sizes; you can configure the MTU to a higher number of bytes if desired, but not less than 2180 bytes.

```
[edit interfaces]
user@switch# set ae1 mtu 2180
user@switch# set xe-0/0/30 mtu 2180
user@switch# set xe-0/0/31 mtu 2180
user@switch# set xe-0/0/32 mtu 2180
user@switch# set xe-0/0/33 mtu 2180
```

14. Set the LAG interface as an FCoE trusted port. Ports that connect to other switches should be trusted and should not perform FIP snooping:

```
[edit ethernet-switching-options]
user@switch# set secure-access-port interface ae1 fcoe-trusted
```



NOTE: Access ports xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 are not configured as FCoE trusted ports. The access ports remain in the default state as untrusted ports because they connect directly to FCoE devices and must perform FIP snooping to ensure network security.

15. Enable FIP snooping on the FCoE VLAN to prevent unauthorized FCoE network access (this example uses VN2VN_Port FIP snooping; the example is equally valid if you use VN2VF_Port FIP snooping).

```
[edit ethernet-switching-options]
user@switch# set secure-access-port vlan fcoe_vlan examine-fip examine-vn2vn
beacon-period 90000
```

Results

Display the results of the CoS configuration on MC-LAG Switch S1 and on MC-LAG Switch S2 (the results on both switches are the same).

```
user@switch> show configuration class-of-service
traffic-control-profiles {
```

```
fcoe-tcp {
  scheduler-map fcoe-map;
  shaping-rate percent 100;
  guaranteed-rate 3g;
}
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
congestion-notification-profile {
  fcoe-cnp {
    input {
      ieee-802.1 {
        code-point 011 {
          pfc;
        }
      }
    }
  }
}
}
interfaces {
  ae0 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  ae1 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
}
scheduler-maps {
  fcoe-map {
    forwarding-class fcoe scheduler fcoe-sched;
  }
}
schedulers {
  fcoe-sched {
    transmit-rate 3g;
    shaping-rate percent 100;
    priority low;
  }
}
```



NOTE: The forwarding class and classifier configurations are not shown because the show command does not display default portions of the configuration.

For MC-LAG verification commands, see [“Example: Configuring Multichassis Link Aggregation” on page 41.](#)

Display the results of the CoS configuration on FCoE Transit Switch TS1 and on FCoE Transit Switch TS2 (the results on both transit switches are the same).

```
user@switch> show configuration class-of-service
traffic-control-profiles {
  fcoe-tcp {
    scheduler-map fcoe-map;
    shaping-rate percent 100;
    guaranteed-rate 3g;
  }
}
forwarding-class-sets {
  fcoe-pg {
    class fcoe;
  }
}
congestion-notification-profile {
  fcoe-cnp {
    input {
      ieee-802.1 {
        code-point 011 {
          pfc;
        }
      }
    }
  }
}
interfaces {
  xe-0/0/30 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/31 {
    forwarding-class-set {
      fcoe-pg {
        output-traffic-control-profile fcoe-tcp;
      }
    }
    congestion-notification-profile fcoe-cnp;
  }
  xe-0/0/32 {
```



```

forwarding-class-set {
  fcoe-pg {
    output-traffic-control-profile fcoe-tcp;
  }
}
congestion-notification-profile fcoe-cnp;
}
xe-0/0/33 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
}
scheduler-maps {
  fcoe-map {
    forwarding-class fcoe scheduler fcoe-sched;
  }
}
schedulers {
  fcoe-sched {
    transmit-rate 3g;
    shaping-rate percent 100;
    priority low;
  }
}
}

```

Verification

To verify that the CoS components and FIP snooping have been configured and are operating properly, perform these tasks. Because this example uses the default **fcoe** forwarding class and the default IEEE 802.1p trusted classifier, the verification of those configurations is not shown.

- [Verifying That the Output Queue Schedulers Have Been Created on page 376](#)
- [Verifying That the Priority Group Output Scheduler \(Traffic Control Profile\) Has Been Created on page 376](#)
- [Verifying That the Forwarding Class Set \(Priority Group\) Has Been Created on page 377](#)
- [Verifying That Priority-Based Flow Control Has Been Enabled on page 377](#)
- [Verifying That the Interface Class of Service Configuration Has Been Created on page 378](#)
- [Verifying That the Interfaces Are Correctly Configured on page 380](#)

- [Verifying That FIP Snooping Is Enabled on the FCoE VLAN on FCoE Transit Switches TS1 and TS2 Access Interfaces on page 382](#)
- [Verifying That the FIP Snooping Mode Is Correct on FCoE Transit Switches TS1 and TS2 on page 383](#)
- [Verifying That IGMP Snooping Is Disabled on the FCoE VLAN on page 384](#)

Verifying That the Output Queue Schedulers Have Been Created

Purpose Verify that the output queue scheduler for FCoE traffic has the correct bandwidth parameters and priorities, and is mapped to the correct forwarding class (output queue). Queue scheduler verification is the same on each of the four switches.

Action List the scheduler map using the operational mode command **show class-of-service scheduler-map fcoe-map**:

```
user@switch> show class-of-service scheduler-map fcoe-map
Scheduler map: fcoe-map, Index: 9023
```

```
Scheduler: fcoe-sched, Forwarding class: fcoe, Index: 37289
Transmit rate: 3000000000 bps, Rate Limit: none, Buffer size: remainder,
Buffer Limit: none, Priority: low
Excess Priority: unspecified
Shaping rate: 100 percent,
drop-profile-map-set-type: mark
Drop profiles:
  Loss priority  Protocol  Index  Name
  Low           any       1      <default-drop-profile>
  Medium high   any       1      <default-drop-profile>
  High          any       1      <default-drop-profile>
```

Meaning The **show class-of-service scheduler-map fcoe-map** command lists the properties of the scheduler map **fcoe-map**. The command output includes:

- The name of the scheduler map (**fcoe-map**)
- The name of the scheduler (**fcoe-sched**)
- The forwarding classes mapped to the scheduler (**fcoe**)
- The minimum guaranteed queue bandwidth (transmit rate **3000000000 bps**)
- The scheduling priority (**low**)
- The maximum bandwidth in the priority group the queue can consume (shaping rate **100 percent**)
- The drop profile loss priority for each drop profile name. This example does not include drop profiles because you do not apply drop profiles to FCoE traffic.

Verifying That the Priority Group Output Scheduler (Traffic Control Profile) Has Been Created

Purpose Verify that the traffic control profile **fcoe-tcp** has been created with the correct bandwidth parameters and scheduler mapping. Priority group scheduler verification is the same on each of the four switches.

Action List the FCoE traffic control profile properties using the operational mode command **show class-of-service traffic-control-profile fcoe-tcp**:

```
user@switch> show class-of-service traffic-control-profile fcoe-tcp
Traffic control profile: fcoe-tcp, Index: 18303
  Shaping rate: 100 percent
  Scheduler map: fcoe-map
  Guaranteed rate: 3000000000
```

Meaning The **show class-of-service traffic-control-profile fcoe-tcp** command lists all of the configured traffic control profiles. For each traffic control profile, the command output includes:

- The name of the traffic control profile (**fcoe-tcp**)
- The maximum port bandwidth the priority group can consume (shaping rate **100 percent**)
- The scheduler map associated with the traffic control profile (**fcoe-map**)
- The minimum guaranteed priority group port bandwidth (guaranteed rate **3000000000** in bps)

Verifying That the Forwarding Class Set (Priority Group) Has Been Created

Purpose Verify that the FCoE priority group has been created and that the **fcoe** priority (forwarding class) belongs to the FCoE priority group. Forwarding class set verification is the same on each of the four switches.

Action List the forwarding class sets using the operational mode command **show class-of-service forwarding-class-set fcoe-pg**:

```
user@switch> show class-of-service forwarding-class-set fcoe-pg
Forwarding class set: fcoe-pg, Type: normal-type, Forwarding class set index:
31420
  Forwarding class          Index
  fcoe                      1
```

Meaning The **show class-of-service forwarding-class-set fcoe-pg** command lists all of the forwarding classes (priorities) that belong to the **fcoe-pg** priority group, and the internal index number of the priority group. The command output shows that the forwarding class set **fcoe-pg** includes the forwarding class **fcoe**.

Verifying That Priority-Based Flow Control Has Been Enabled

Purpose Verify that PFC is enabled on the FCoE code point. PFC verification is the same on each of the four switches.

Action List the FCoE congestion notification profile using the operational mode command **show class-of-service congestion-notification fcoe-cnp**:

```
user@switch> show class-of-service congestion-notification fcoe-cnp
Type: Input, Name: fcoe-cnp, Index: 6879
Cable Length: 100 m
```

Priority	PFC	MRU
000	Disabled	
001	Disabled	
010	Disabled	
011	Enabled	2500
100	Disabled	
101	Disabled	
110	Disabled	
111	Disabled	
Type: Output		
Priority	Flow-Control-Queues	
000	0	
001	1	
010	2	
011	3	
100	4	
101	5	
110	6	
111	7	

Meaning The **show class-of-service congestion-notification fcoe-cnp** command lists all of the IEEE 802.1p code points in the congestion notification profile that have PFC enabled. The command output shows that PFC is enabled on code point **011 (fcoe queue)** for the **fcoe-cnp** congestion notification profile.

The command also shows the default cable length (**100 meters**), the default maximum receive unit (**2500 bytes**), and the default mapping of priorities to output queues because this example does not include configuring these options.

Verifying That the Interface Class of Service Configuration Has Been Created

Purpose Verify that the CoS properties of the interfaces are correct. The verification output on MC-LAG Switches S1 and S2 differs from the output on FCoE Transit Switches TS1 and TS2.

Action List the interface CoS configuration on MC-LAG Switches S1 and S2 using the operational mode command **show configuration class-of-service interfaces**:

```
user@switch> show configuration class-of-service interfaces
ae0 {
    forwarding-class-set {
        fcoe-pg {
            output-traffic-control-profile fcoe-tcp;
        }
    }
    congestion-notification-profile fcoe-cnp;
}

ae1 {
```

```

forwarding-class-set {
  fcoe-pg {
    output-traffic-control-profile fcoe-tcp;
  }
}
congestion-notification-profile fcoe-cnp;
}

```

List the interface CoS configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show configuration class-of-service interfaces**:

```

user@switch> show configuration class-of-service interfaces
xe-0/0/30 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/31 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/32 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
xe-0/0/33 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}
ae1 {
  forwarding-class-set {
    fcoe-pg {
      output-traffic-control-profile fcoe-tcp;
    }
  }
  congestion-notification-profile fcoe-cnp;
}

```

Meaning The **show configuration class-of-service interfaces** command lists the class of service configuration for all interfaces. For each interface, the command output includes:

- The name of the interface (for example, **ae0** or **xe-0/0/30**)
- The name of the forwarding class set associated with the interface (**fcoe-pg**)

- The name of the traffic control profile associated with the interface (output traffic control profile, **fcoe-tcp**)
- The name of the congestion notification profile associated with the interface (**fcoe-cnp**)



NOTE: Interfaces that are members of a LAG are not shown individually. The LAG or MC-LAG CoS configuration is applied to all interfaces that are members of the LAG or MC-LAG. For example, the interface CoS configuration output on MC-LAG Switches S1 and S2 shows the LAG CoS configuration but does not show the CoS configuration of the member interfaces separately. The interface CoS configuration output on FCoE Transit Switches TS1 and TS2 shows the LAG CoS configuration but also shows the configuration for interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33, which are not members of a LAG.

Verifying That the Interfaces Are Correctly Configured

Purpose Verify that the LAG membership, MTU, VLAN membership, and port mode of the interfaces are correct. The verification output on MC-LAG Switches S1 and S2 differs from the output on FCoE Transit Switches TS1 and TS2.

Action List the interface configuration on MC-LAG Switches S1 and S2 using the operational mode command **show configuration interfaces**:

```
user@switch> show configuration interfaces
xe-0/0/10 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/11 {
    ether-options {
        802.3ad ae0;
    }
}
xe-0/0/20 {
    ether-options {
        802.3ad ae1;
    }
}
xe-0/0/21 {
    ether-options {
        802.3ad ae1;
    }
}
ae0 {
    mtu 2180;
    unit 0 {
        family ethernet-switching {
            port-mode trunk;
            vlan {
                members fcoe_vlan;
            }
        }
    }
}
```

```

    }
  }
}
ae1 {
  mtu 2180;
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members fcoe_vlan;
      }
    }
  }
}
}

```

List the interface configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show configuration interfaces**:

```

user@switch> show configuration interfaces
xe-0/0/25 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/26 {
  ether-options {
    802.3ad ae1;
  }
}
xe-0/0/30 {
  mtu 2180;
  unit 0 {
    family ethernet-switching {
      port-mode tagged-access;
      vlan {
        members fcoe_vlan;
      }
    }
  }
}
xe-0/0/31 {
  mtu 2180;
  unit 0 {
    family ethernet-switching {
      port-mode tagged-access;
      vlan {
        members fcoe_vlan;
      }
    }
  }
}
xe-0/0/32 {
  mtu 2180;
  unit 0 {
    family ethernet-switching {
      port-mode tagged-access;
      vlan {
        members fcoe_vlan;
      }
    }
  }
}

```

```
    }
  }
  xe-0/0/33 {
    mtu 2180;
    unit 0 {
      family ethernet-switching {
        port-mode tagged-access;
        vlan {
          members fcoe_vlan;
        }
      }
    }
  }
}

ae1 {
  mtu 2180;
  unit 0 {
    family ethernet-switching {
      port-mode trunk;
      vlan {
        members fcoe_vlan;
      }
    }
  }
}
```

Meaning The **show configuration interfaces** command lists the configuration of each interface by interface name.

For each interface that is a member of a LAG, the command lists only the name of the LAG to which the interface belongs.

For each LAG interface and for each interface that is not a member of a LAG, the command output includes:

- The MTU (**2180**)
- The unit number of the interface (**0**)
- The port mode (**trunk** mode for interfaces that connect two switches, **tagged-access** mode for interfaces that connect to FCoE hosts)
- The name of the VLAN in which the interface is a member (**fcoe_vlan**)

[Verifying That FIP Snooping Is Enabled on the FCoE VLAN on FCoE Transit Switches TS1 and TS2 Access Interfaces](#)

Purpose Verify that FIP snooping is enabled on the FCoE VLAN access interfaces. FIP snooping is enabled only on the FCoE access interfaces, so it is enabled only on FCoE Transit Switches TS1 and TS2. FIP snooping is not enabled on MC-LAG Switches S1 and S2 because FIP snooping is done at the Transit Switch TS1 and TS2 FCoE access ports.

Action List the port security configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show configuration ethernet-switching-options secure-access-port**:

```
user@switch> show configuration ethernet-switching-options secure-access-port
interface ae1.0 {
    fcoe-trusted;
}
vlan fcoe_vlan {
    examine-fip {
        examine-vn2vn {
            beacon-period 90000;
        }
    }
}
```

Meaning The **show configuration ethernet-switching-options secure-access-port** command lists port security information, including whether a port is trusted. The command output shows that:

- LAG port **ae1.0**, which connects the FCoE transit switch to the MC-LAG switches, is configured as an FCoE trusted interface. FIP snooping is not performed on the member interfaces of the LAG (xe-0/0/25 and xe-0/0/26).
- FIP snooping is enabled (**examine-fip**) on the FCoE VLAN (**fcoe_vlan**), the type of FIP snooping is VN2VN_Port FIP snooping (**examine-vn2vn**), and the beacon period is set to **90000** milliseconds. On Transit Switches TS1 and TS2, all interface members of the FCoE VLAN perform FIP snooping unless the interface is configured as FCoE trusted. On Transit Switches TS1 and TS2, interfaces xe-0/0/30, xe-0/0/31, xe-0/0/32, and xe-0/0/33 perform FIP snooping because they are not configured as FCoE trusted. The interface members of LAG ae1 (xe-0/0/25 and xe-0/0/26) do not perform FIP snooping because the LAG is configured as FCoE trusted.

Verifying That the FIP Snooping Mode Is Correct on FCoE Transit Switches TS1 and TS2

Purpose Verify that the FIP snooping mode is correct on the FCoE VLAN. FIP snooping is enabled only on the FCoE access interfaces, so it is enabled only on FCoE Transit Switches TS1 and TS2. FIP snooping is not enabled on MC-LAG Switches S1 and S2 because FIP snooping is done at the Transit Switch TS1 and TS2 FCoE access ports.

Action List the FIP snooping configuration on FCoE Transit Switches TS1 and TS2 using the operational mode command **show fip snooping brief**:

```
user@switch> show fip snooping brief
VLAN: fcoe_vlan,    Mode: VN2VN Snooping
FC-MAP: 0e:fd:00
...
```



NOTE: The output has been truncated to show only the relevant information.

Meaning The **show fip snooping brief** command lists FIP snooping information, including the FIP snooping VLAN and the FIP snooping mode. The command output shows that:

- The VLAN on which FIP snooping is enabled is **fcoe_vlan**
- The FIP snooping mode is VN2VN_Port FIP snooping (**VN2VN Snooping**)

Verifying That IGMP Snooping Is Disabled on the FCoE VLAN

Purpose Verify that IGMP snooping is disabled on the FCoE VLAN on all four switches.

Action List the IGMP snooping protocol information on each of the four switches using the **show configuration protocols igmp-snooping** command:

```
user@switch> show configuration protocols igmp-snooping
vlan fcoe_vlan {
    disable;
}
```

Meaning The **show configuration protocols igmp-snooping** command lists the IGMP snooping configuration for the VLANs configured on the switch. The command output shows that IGMP snooping is disabled on the FCoE VLAN (**fcoe_vlan**).

- Related Documentation**
- [Example: Configuring Multichassis Link Aggregation on page 41](#)
 - [Configuring Link Aggregation](#)
 - [Example: Configuring CoS PFC for FCoE Traffic](#)
 - [Understanding MC-LAGs on an FCoE Transit Switch on page 357](#)

CHAPTER 6

Understanding MC-LAG Configuration Synchronization

- [Understanding MC-LAG Configuration Synchronization on page 385](#)
- [Synchronizing and Committing MC-LAG Configurations on page 388](#)

Understanding MC-LAG Configuration Synchronization

Supported Platforms [EX Series, MX Series, QFX Series](#)

This topic describes:

- [Simplifying MC-LAG Configuration on page 385](#)
- [Understanding Configuration Groups on page 386](#)
- [Understanding Conditional Groups on page 386](#)
- [Understanding Apply Groups on page 386](#)
- [Understanding Peer Configuration Details for MC-LAG Configuration Synchronization on page 387](#)
- [Understanding How Configurations and Commits Are Synchronized Between MC-LAG Peers on page 387](#)

Simplifying MC-LAG Configuration

Starting with Junos OS Release 14.2R6 on MX Series routers and Junos Fusion, Multichassis Link Aggregation group (MC-LAG) configuration synchronization enables you to easily propagate, synchronize, and commit configurations from one MC-LAG peer to another. You can log into any one of the MC-LAG peers to manage both MC-LAG peers, thus having a single point of management. You can also use configuration groups to simplify the configuration process. You can create one configuration group for the local MC-LAG peer, one for the remote MC-LAG peer, and one for the global configuration, which is essentially a configuration that is common to both MC-LAG peers.

In addition, you can create conditional groups to specify when a configuration is synchronized with another MC-LAG peer. You can enable the **peers-synchronize** statement at the **[edit system commit]** hierarchy to synchronize the configurations and commits across the MC-LAG peers by default. NETCONF over SSH provides a secure connection

between the MC-LAG peers, and Secure Copy Protocol (SCP) copies the configurations securely between them.

To enable MC-LAG configuration synchronization, perform the following steps:

1. Create configuration groups for local, remote, and global configurations.
2. Create conditional groups.
3. Create apply groups.
4. Enable NETCONF over SSH.
5. Configure MC-LAG peer details and user authentication details for MC-LAG configuration synchronization.
6. Enable the **peers-synchronize** statement or issue the **commit peers-synchronize** command to synchronize and commit the configurations between local and remote MC-LAG peers.

Understanding Configuration Groups

You can create configuration groups for local, remote, and global configurations. A local configuration group is used by the local MC-LAG peer, a remote configuration group is used by the remote MC-LAG peer, and a global configuration group is shared between the local and remote MC-LAG peers.

For example, you could create a local configuration group called Group A, which would include the configuration used by the local MC-LAG peer (Switch A), a remote configuration group called Group B, which would include the configuration used by the remote MC-LAG peer (Switch B), and a global configuration group called Group C, which would include the configuration that is common to both MC-LAG peers.

Create configuration groups at the **[edit groups]** hierarchy level.



NOTE: MC-LAG configuration synchronization does not support nested groups.

Understanding Conditional Groups

You can create conditional groups to specify when a particular configuration should be applied to an MC-LAG peer. If you want to apply the global configuration to both MC-LAG peers, for example, enable the **when peers** [*<name of local peer>* *<name of remote peer>*] statement at the **[edit groups]** hierarchy level. If, for example, you want to apply the global configuration (Group C) to the local and remote MC-LAG peers (Switch A and Switch B), you could issue the **set groups Group C when peers [Switch A Switch B]** command.

Understanding Apply Groups

To apply the configuration groups, enable the **apply-groups** statement at the **[edit]** hierarchy level. For example, to apply the local configuration group (Group A, for example),

remote configuration group (Group B), and global configuration group (Group C), issue the **set apply-groups [GroupA GroupB GroupC]** command.

Understanding Peer Configuration Details for MC-LAG Configuration Synchronization

To synchronize configurations between two MC-LAG peers, you need to configure the hostname or IP address, username, and password for both the local and remote MC-LAG peers. To do this, issue the **set peers <hostname-of-remote-peer> user <name-of-user> authentication <plain-text-password-string>** command at the **[edit system commit]** hierarchy on each MC-LAG peer. For example, to synchronize a configuration from Switch A to Switch B, issue the **set peers SwitchB user administrator authentication test123** command on Switch A. To synchronize a configuration from Switch B to Switch A, issue the **set peers SwitchA user administrator authentication test123** command on Switch B. If you only want to synchronize configurations from Switch A to Switch B, you do not need to configure the **peers** statement on Switch B.

The configuration details from the peers statements are also used to establish a NETCONF over SSH connection between the MC-LAG peers. To enable NETCONF over SSH, issue the **set system services netconf ssh** command on both MC-LAG peers.

Understanding How Configurations and Commits Are Synchronized Between MC-LAG Peers

The local (or requesting) MC-LAG peer on which you enable the **peers-synchronize** statement or issue the **commit peers-synchronize** command copies and loads its configuration to the remote (or responding) MC-LAG peer. Each MC-LAG peer then performs a syntax check on the configuration file being committed. If no errors are found, the configuration is activated and becomes the current operational configuration on both MC-LAG peers. The commits are propagated using a remote procedural call (RPC).

The following events occur during configuration synchronization:

1. The local MC-LAG peer sends the sync-peers.conf file (the configuration that will be shared with the peer specified in the conditional group) to the remote MC-LAG peer.
2. The remote MC-LAG peer loads the configuration, sends the results of the load to the local MC-LAG peer, exports its configuration to the local MC-LAG peer, and replies that the commit is complete.
3. The local MC-LAG peer reads the reply from the remote MC-LAG peer.
4. If successful, the configuration is committed.

Configuration synchronization is not successful if either a) the remote MC-LAG peer is unavailable or b) the remote MC-LAG peer is reachable, but there are failures due to the following reasons:

- SSH connection fails because of user and authentication issues.
- Junos OS RPC fails because a lock cannot be obtained on the remote database.
- Loading the configuration fails because of syntax problems.
- Commit check fails.

The **peers-synchronize** statement uses the hostname or IP address, username, and password for the MC-LAG peers you configured in the **peers** statement. With the **peers-synchronize** statement enabled, you can simply issue the **commit** command to synchronize the configuration from one MC-LAG peer to another. For example, if you configured the **peers** statement on the local MC-LAG peer, and want to synchronize the configuration with the remote MC-LAG peer, you can simply issue the **commit** command on the local MC-LAG peer. However, if you issue the **commit** command on the local MC-LAG peer and the remote MC-LAG peer is not reachable, you will receive a warning message saying that the remote MC-LAG peer is not reachable and only the configuration on the local MC-LAG peer is committed:

Here is an example warning message:

```
error: netconf: could not read hello
error: did not receive hello packet from server
error: Setting up sessions for peer: 'mc-lag-peer' failed
warning: Cannot connect to remote peers, ignoring it
commit complete
```

If you do not have the **peers** statement configured with the remote MC-LAG peer information and you issue the **commit** command, only the configuration on the local MC-LAG peer is committed. If the remote MC-LAG peer is unreachable and there are other failures, the commit is unsuccessful on both the local and remote MC-LAG peers.



NOTE: When you enable the **peers-synchronize** statement and issue the **commit** command, the commit might take longer than a normal commit. Even if the configuration is the same across the MC-LAG peers and does not require synchronization, the system still attempts to synchronize the configurations.

The **commit peers-synchronize** command also uses the hostname or IP address, username, and password for the MC-LAG peers configured in the **peers** statement. If you issue the **commit peers-synchronize** command on the local MC-LAG peer to synchronize the configuration with the remote MC-LAG peer and the remote MC-LAG peer is reachable but there are other failures, the commit fails on both the local and remote MC-LAG peers.

Release History Table

Release	Description
14.2R6	Starting with Junos OS Release 14.2R6 on MX Series routers and Junos Fusion, Multichassis Link Aggregation group (MC-LAG) configuration synchronization enables you to easily propagate, synchronize, and commit configurations from one MC-LAG peer to another.

Synchronizing and Committing MC-LAG Configurations

Supported Platforms EX Series, MX Series, QFX Series

To propagate, synchronize, and commit configuration changes from one MC-LAG peer to another, perform following tasks:

- [Configure the MC-LAG Peers for Configuration Synchronization on page 389](#)
- [Create a Global Configuration Group on page 390](#)
- [Create a Local Configuration Group on page 393](#)
- [Create a Remote Configuration Group on page 395](#)
- [Create Apply Groups for the Local, Remote, and Global Configurations on page 397](#)
- [Synchronizing and Committing MC-LAG Configurations on page 397](#)
- [Troubleshooting Remote Peer Connections on page 397](#)

Configure the MC-LAG Peers for Configuration Synchronization

Configure the hostnames or IP addresses for the MC-LAG peers that will be synchronizing their configurations as well as the usernames and authentication details for the users administering MC-LAG configuration synchronization. Additionally, enable a NETCONF connection so that the MC-LAG peers can synchronize their configurations. Secure Copy Protocol (SCP) copies the configurations securely between the MC-LAG peers.

For example, if you have a local MC-LAG peer named Switch A and want to synchronize an MC-LAG configuration with a remote MC-LAG peer named Switch B, you need to configure the details for Switch B on Switch A. On Switch B, you need to configure details for Switch A. You can do this by configuring the **peers** statement at the **[edit system commit]** hierarchy to configure these details.



NOTE: If you only want Switch B to receive a configuration from Switch A, then you do not need to specify the **peers** on Switch B.

To specify the configuration details:

1. On the local MC-LAG peer, specify the configuration details for the remote MC-LAG peer.

```
[edit system commit]
```

```
user@switch# set peers hostname user username authentication password string
```

For example, if the local MC-LAG peer is Switch A, and the remote MC-LAG peer is Switch B:

```
[edit system commit]
```

```
user@Switch A# set peers Switch B user mc-lag-admin-SwitchB authentication "test123"
```

The password string is stored as an authenticated password string.

The output for Switch A is as follows:

```
[edit system commit]
peers {
  Switch B{
    user mc-lag-admin-SwitchB;
    authentication "$ABC123";
  }
}
```

```
}
```

2. On the remote MC-LAG peer, specify the configuration details for the local MC-LAG peer.

For example, if the remote MC-LAG peer is Switch B, and the local MC-LAG peer is Switch A:

```
[edit system commit]
user@Switch B# set peers Switch A user mc-lag-admin-Switch A authentication "test123"
```

The output for Switch B is as follows:

```
[edit system commit]
  peers {
    Switch A{
      user mc-lag-admin-Switch A;
      authentication "$ABC123";
    }
  }
}
```

3. Enable a NETCONF connection using SSH between both MC-LAG peers (Switch A and Switch B).

For example:

```
[edit]
user@Switch A# set system services netconf ssh
[edit]
user@Switch B# set system services netconf ssh
```

Create a Global Configuration Group

Create a global configuration group the local and remote MC-LAG peers.

To create a global configuration group:

1. Specify the MC-LAG peers that will receive the configuration:

```
[edit]
user@switch# set groups <name of group> when peers [<name of local peer> <name of remote peer>]
```

For example:

```
[edit]
user@switch# set groups mc-ae-config-sync-global when peers [Switch A Switch B]
```

2. Create the global MC-LAG configuration that will be shared between the MC-LAG peers.

For example:

```
interfaces {
  ge-0/0/0 {
    unit 0 {
      family inet {
        address 10.1.1.1/8;
      }
    }
  }
  ge-0/0/1 {
    ether-options {
```



```

        802.3ad ae0;
    }
}
ge-0/0/2 {
    ether-options {
        802.3ad ae1;
    }
}
ae0 {
    aggregated-ether-options {
        lacp {
            active;
        }
    }
    unit 0 {
        family ethernet-switching {
            interface-mode trunk;
            vlan {
                members v1;
            }
        }
    }
}
ae1 {
    aggregated-ether-options {
        lacp {
            active;
            system-id 00:01:02:03:04:05;
            admin-key 3;
        }
        mc-ae {
            mc-ae-id 1;
            redundancy-group 1;
            mode active-active;
        }
    }
    unit 0 {
        family ethernet-switching {
            interface-mode access;
            vlan {
                members v1;
            }
        }
    }
}
}
switch-options {
    service-id 1;
}
vlangs {
    v1 {
        vlan-id 100;
        l3-interface irb.100;
    }
}
}

```

The output for the configuration is as follows:

```
groups {
  mcae-config-sync-global {
    when {
      peers [ Switch A Switch B ];
    }
    interfaces {
      ge-0/0/0 {
        unit 0 {
          family inet {
            address 10.1.1.1/8;
          }
        }
      }
      ge-0/0/1 {
        ether-options {
          802.3ad ae0;
        }
      }
      ge-0/0/2 {
        ether-options {
          802.3ad ae1;
        }
      }
    }
    ae0 {
      aggregated-ether-options {
        lACP {
          active;
        }
      }
      unit 0 {
        family ethernet-switching {
          interface-mode trunk;
          vlan {
            members v1;
          }
        }
      }
    }
    ae1 {
      aggregated-ether-options {
        lACP {
          active;
          system-id 00:01:02:03:04:05;
          admin-key 3;
        }
        mc-ae {
          mc-ae-id 1;
          redundancy-group 1;
          mode active-active;
        }
      }
      unit 0 {
        family ethernet-switching {
          interface-mode access;
        }
      }
    }
  }
}
```

```

        vlan {
            members v1;
        }
    }
}
switch-options {
    service-id 1;
}
vlans {
    v1 {
        vlan-id 100;
        l3-interface irb.100;
    }
}
}
}

```

Create a Local Configuration Group

Create a local configuration group for the local MC-LAG peer.

To create a local configuration group:

1. Specify the local configuration group name.

```
[edit]
user@switch# set groups name of group when peers [name of local peer]
```

For example:

```
[edit]
user@switch# set groups mcae-config-sync-local when peers [Switch A]
```

2. Include the local MC-LAG configuration that will be used by the local MC-LAG peer.

For example:

```

interfaces {
    ae1 {
        aggregated-ether-options {
            mc-ae {
                chassis-id 0;
                status-control active;
                events {
                    iccp-peer-down {
                        prefer-status-control-active;
                    }
                }
            }
        }
    }
}
irb {
    unit 100 {
        family inet {
            address 10.10.10.3/8 {
                arp 10.10.10.2 l2-interface ae0.0 mac 00:00:5E:00:53:00;
            }
        }
    }
}

```

```

    }
  }
}
multi-chassis {
  multi-chassis-protection 10.1.1.1 {
    interface ae0;
  }
}
}
}

```

The output for the configuration is as follows:

```

groups {
  mcae-config-sync-local {
    when {
      peers Switch A;
    }
    interfaces {
      ae1 {
        aggregated-ether-options {
          mc-ae {
            chassis-id 0;
            status-control active;
            events {
              iccp-peer-down {
                prefer-status-control-active;
              }
            }
          }
        }
      }
    }
  }
  irb {
    unit 100 {
      family inet {
        address 10.10.10.3/8 {
          arp 10.10.10.2 l2-interface ae0.0 mac 00:00:5E:00:53:00;
        }
      }
    }
  }
  multi-chassis {
    multi-chassis-protection 10.1.1.1 {
      interface ae0;
    }
  }
}
}

```

Create a Remote Configuration Group

Create a remote configuration group for the remote MC-LAG peer.

To create a remote configuration group:

1. Specify the remote configuration group name.

```
[edit]
user@switch# set groups name of group when peers [name of remote peer]
```

For example:

```
[edit]
user@switch# set groups mcae-config-sync-remote when peers [Switch B]
```

2. Include the remote MC-LAG configuration that will be used by the remote MC-LAG peer.

For example:

```
interfaces {
  ae1 {
    aggregated-ether-options {
      mc-ae {
        chassis-id 1;
        status-control standby;
        events {
          iccp-peer-down {
            prefer-status-control-active;
          }
        }
      }
    }
  }
}
irb {
  unit 100 {
    family inet {
      address 10.10.10.3/8 {
        arp 10.10.10.2 l2-interface ae0.0 mac 00:00:5E:00:53:00;
      }
    }
  }
}
multi-chassis {
  multi-chassis-protection 10.1.1.1 {
    interface ae0;
  }
}
```

The output for the configuration is as follows:

```
groups {
  mcae-config-sync-remote {
    when {
      peers Switch B
```

```
}
interfaces {
  ae1 {
    aggregated-ether-options {
      mc-ae {
        chassis-id 1;
        status-control standby;
        events {
          iccp-peer-down {
            prefer-status-control-active;
          }
        }
      }
    }
  }
}
irb {
  unit 100 {
    family inet {
      address 10.10.10.3/8 {
        arp 10.10.10.2 l2-interface ae0.0 mac 00:00:5E:00:53:00;
      }
    }
  }
}
multi-chassis {
  multi-chassis-protection 10.1.1.1 {
    interface ae0;
  }
}
}
```

Create Apply Groups for the Local, Remote, and Global Configurations

Create apply groups so changes in the MC-LAG configuration are inherited by local, remote, and global configuration groups. List the configuration groups in order of inheritance, where the configuration data in the first configuration group takes priority over the data in subsequent configuration groups.

When you apply the configuration groups and issue the **commit peers-synchronize** command, changes are committed on both the local and remote MC-LAG peers. If there is an error on any of the MC-LAG peers, an error message is issued, and the commit is aborted.

To apply the configuration groups:

1. Specify the names of the configuration groups.

```
[edit]
user@switch# set apply-groups [ <name of global configuration group> <name of local
configuration group> <name of remote configuration group> ]
```

For example:

```
[edit]
user@switch# set apply-groups [ mc-ae-config-sync-global mcae-config-sync-local
mcae-config-sync-remote ]
```

The output for the configuration is as follows:

```
apply-groups [ mc-ae-config-sync-global mcae-config-sync-local mcae-config-sync-remote
];
```

Synchronizing and Committing MC-LAG Configurations

You can enable the **peers-synchronize** statement on the local (or requesting) MC-LAG peer to copy and load its configuration to the remote (or responding) MC-LAG peer by default. You can alternatively issue the **commit peers-synchronize** command.

- Configure the **commit** command on the local (or requesting) MC-LAG peer to automatically perform a **peers-synchronize** action between peers.

```
[edit]
user@switch# set system commit peers-synchronize
```

The output for the configuration is as follows:

```
system {
  commit {
    peers-synchronize;
  }
}
```

- Issue the **commit peers-synchronize** command on the local (or requesting) MC-LAG peer.

```
[edit]
user@switch# commit peers-synchronize
```

Troubleshooting Remote Peer Connections

Problem	Description:
---------	--------------

When you issue the **commit** command, the system issues the following error message:

```
root@Switch A# commit
```

```
error: netconf: could not read hello error: did not receive hello packet from server error: Setting  
up sessions for peer: 'Switch B' failed warning: Cannot connect to remote peers, ignoring it
```

The error message shows that there is a NETCONF connection issue between the local peer and remote peer.

- Resolution** 1. Verify that the SSH connection to the remote peer (Switch B) is working.

```
root@Switch A# ssh root@Switch B
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@ WARNING: REMOTE HOST IDENTIFICATION HAS CHANGED! @
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
IT IS POSSIBLE THAT SOMEONE IS DOING SOMETHING NASTY! Someone could be
eavesdropping on you right now (man-in-the-middle attack)! It is also possible that a host
key has just been changed. The fingerprint for the ECDSA key sent by the remote host is
21:e8:5a:58:bb:29:8b:96:a4:eb:cc:8a:32:95:53:c0. Please contact your system administrator.
Add correct host key in /root/.ssh/known_hosts to get rid of this message. Offending ECDSA
key in /root/.ssh/known_hosts:1 ECDSA host key for Switch A has changed and you have
requested strict checking. Host key verification failed.
```

The error message shows that the SSH connection is not working.

2. Delete the key entry in the `/root/.ssh/known_hosts:1` directory and try to connect to Switch B again.

```
root@Switch A# ssh root@Switch B
The authenticity of host 'Switch B (10.92.76.235)' can't be established. ECDSA key fingerprint
is 21:e8:5a:58:bb:29:8b:96:a4:eb:cc:8a:32:95:53:c0. Are you sure you want to continue
connecting (yes/no)? yes Warning: Permanently added 'Switch A,10.92.76.235' (ECDSA) to
the list of known hosts. Password: Last login: Wed Apr 13 15:29:58 2016 from 192.168.61.129 -
JUNOS 15.1I20160412_0929_dc-builder Kernel 64-bit FLEX
JNPR-10.1-20160217.114153_fbsd-builder_stable_10 At least one package installed on this
device has limited support. Run 'file show /etc/notices/unsupported.txt' for details.
Connection to Switch B was successful.
```

3. Log out of Switch B.

```
root@Switch B# exit
logout Connection to Switch B closed.
```

4. Verify that NETCONF over SSH is working.

```
root@Switch A# ssh root@Switch B -s netconf
logout Connection to st-72q-01 closed.
Password:
<hello xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
<capabilities>
<capability>urn:ietf:params:netconf:base:1.0</capability>
<capability>urn:ietf:params:netconf:capability:candidate:1.0</capability>
The log message shows that the NETCONF over SSH was successful.
```

If the error message showed that NETCONF over SSH was not successful, enable NETCONF over SSH by issuing the **set system services netconf ssh** command.

5. Create configuration groups to synchronize if you have not done so already.

You can issue the **show | compare** command to see if any configuration groups have been created.

```
root@Switch A# show | compare
```

6. Issue the **commit** command.

```
root@Switch A# commit
[edit chassis]
configuration check succeeds
commit complete
```

{master:O}[edit]

The log message shows that the commit was successful.

CHAPTER 7

Understanding MC-LAG Configuration Consistency Check

- [Understanding Multichassis Link Aggregation Group Configuration Consistency Check on page 401](#)

Understanding Multichassis Link Aggregation Group Configuration Consistency Check

Supported Platforms EX Series, QFX Series

- [Understanding Multichassis Link Aggregation Group \(MC-LAG\) Configuration Consistency Check on page 401](#)

Understanding Multichassis Link Aggregation Group (MC-LAG) Configuration Consistency Check

Starting with Junos OS Release 15.1X53-D60 on QFX10000 switches, configuration consistency check uses the Inter-Chassis Control Protocol (ICCP) to exchange MC-LAG configuration parameters (chassis ID, service ID, and so on) and checks for any configuration inconsistencies across MC-LAG peers. An example of an inconsistency is configuring identical chassis IDs on both peers instead of configuring unique chassis IDs on both peers. When there is an inconsistency, you are notified and can take action to resolve it. Only committed MC-LAG parameters are checked for consistency.

The following events take place during configuration consistency check after you issue a commit on the local MC-LAG peer:

1. Commit an MC-LAG configuration on the local MC-LAG peer.
2. ICCP parses the MC-LAG configuration and then sends the configuration to the remote MC-LAG peer.
3. The remote MC-LAG peer receives the MC-LAG configuration from the local MC-LAG peer and compares it with its own MC-LAG configuration.

If there is a severe inconsistency between the two MC-LAG configurations, the MC-LAG interface is brought down, and syslog messages are issued.

If there is a moderate inconsistency between the two configurations, syslog messages are issued.

The following events take place during configuration consistency check after you issue a commit on the remote MC-LAG peer:

- Commit an MC-LAG configuration on the remote MC-LAG peer.
- ICCP parses the MC-LAG configuration and then sends the configuration to the local MC-LAG peer.
- The local MC-LAG peer receives the configuration from the remote MC-LAG peer and compares it with its own configuration.

If there is a severe inconsistency between the two configurations, the MC-LAG interface is brought down, and syslog messages are issued.

If there is a moderate inconsistency between the two configurations, syslog messages are issued.

There are different configuration consistency requirements depending on the MC-LAG parameters. The consistency requirements are either identical or unique, which means that some parameters must be configured identically and some must be configured uniquely on the MC-LAG peers. For example, the chassis ID must be unique on both peers, whereas the LACP mode must be identical on both peers.

The enforcement level of the consistency requirements (identical or unique) is either mandatory or desired. When the enforcement level is mandatory, and you configure the MC-LAG parameter incorrectly, the system brings down the interface and issues a syslog message. For example, you receive a syslog message that says, **"Some of the Multichassis Link Aggregation (MC-LAG) configuration parameters between the peer devices are not consistent. The concerned MC-LAG interfaces were explicitly brought down to prevent unwanted behavior."** When you correct the inconsistency, and issue a successful commit, the system will bring up the interface. When the enforcement is desired, and you configure the MC-LAG parameter incorrectly, you receive a syslog message that says, **"Some of the Multichassis Link Aggregation (MC-LAG) configuration parameters between the peer devices are not consistent. This may lead to sub-optimal performance of the feature."** As noted in the syslog message, performance will be sub-optimal in this situation. You can also issue the `show interfaces mc-ae` command to display the configuration consistency check status of the multichassis aggregated Ethernet interface. If there are multiple inconsistencies, only the first inconsistency is shown. If the enforcement level for an MC-LAG parameter is mandatory, and you did not configure that parameter correctly, the command shows that the MC-LAG interface is down.

When you issue a commit on the local peer, and the remote peer is not reachable, configuration consistency check will pass so that the local peer can come up in standalone mode. When the remote peer comes up, ICCP exchanges the configurations between the peers. If the consistency check fails, the MC-LAG interface goes down, and the system notifies you of the parameter that caused the inconsistency. When you correct the inconsistency, and issue a successful commit, the system brings up the interface.

Consistency check is not enabled by default. To enable consistency check, issue the `set multi-chassis mc-lag consistency-check` command.

Table 14 on page 403 provides a sample list of committed MC-LAG parameters that are checked for consistency, along with their consistency requirements (identical or unique), hierarchies in which the parameters are configured, and the consistency check enforcement levels (mandatory or desired).

Table 14: MC-LAG Parameters Checked for Configuration Consistency

Configuration Knob	Hierarchy	Consistency Requirement	Enforcement
session-establishment-hold-time Specify the time during which an Inter-Chassis Control Protocol (ICCP) connection must be established between peers.	Global, ICCP Peer	Identical	Mandatory
mac-limit Specify the maximum number of MAC addresses to be associated with a VLAN—the default is unlimited, which can leave the network vulnerable to flooding.	Global	Identical	Desired
mac-aging-timer Specify how long MAC addresses remain in the Ethernet switching table.	Global	Identical	Desired
arp-aging-timer Specify the ARP aging timer in minutes for a logical interface of inet .	Global	Identical	Desired
rstp-system-identifier Specify different bridge identifiers for different RSTP routing instances.	Global	Identical	Desired
mstp-system-identifier Specify different bridge identifiers for different MSTP routing instances.	Global	Identical	Desired
rstp-bridge-priority Determine which bridge is elected as the root bridge for RSTP. If two bridges have the same path cost to the root bridge, the bridge priority determines which bridge becomes the designated bridge for a LAN segment.	Global	Identical	Desired

Table 14: MC-LAG Parameters Checked for Configuration Consistency (*continued*)

Configuration Knob	Hierarchy	Consistency Requirement	Enforcement
mstp-bridge-priority Determine which bridge is elected as the root bridge for MSTP. If two bridges have the same path cost to the root bridge, the bridge priority determines which bridge becomes the designated bridge for a LAN segment.	Global	Identical	Desired
rstp-bpdu-block-on-edge Configure bridge protocol data unit (BPDU) protection on all edge ports of a switch for RSTP.	Global	Identical	Desired
vstp-bpdu-block-on-edge Configure bridge protocol data unit (BPDU) protection on all edge ports of a switch for VSTP.	Global	Identical	Desired
mstp-bpdu-block-on-edge Configure bridge protocol data unit (BPDU) protection on all edge ports of a switch for MSTP.	Global	Identical	Desired
service-id Specify a service identifier for each multichassis aggregated Ethernet interface that belongs to a link aggregation group (LAG).	Global	Identical	Mandatory
bfd minimum-interval Configure the minimum interval after which the local routing device transmits hello packets and then expects to receive a reply from a neighbor with which it has established a BFD session.	ICCP Peer	Identical	Mandatory
iccp/minimum-transmit-interval Specify the minimum interval at which the local routing device transmits hello packets to a neighbor with which it has established a BFD session.	ICCP Peer	Identical	Mandatory

Table 14: MC-LAG Parameters Checked for Configuration Consistency (*continued*)

Configuration Knob	Hierarchy	Consistency Requirement	Enforcement
iccp/minimum-receive-interval Specify the minimum interval after which the local routing device must receive a reply from a neighbor with which it has established a BFD session.	ICCP Peer	Identical	Mandatory
iccp/bfd multiplier Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.	ICCP Peer	Identical	Mandatory
iccp single-hop Configure single hop BFD sessions.	ICCP Peer	Identical	Mandatory
iccp/authentication-key Specify the authentication key password to verify the authenticity of packets sent from the peers hosting an MC-LAG.	ICCP Peer	Identical	Mandatory
redundancy-group-id-list Specify the redundancy group identification number. The Inter-Chassis Control Protocol (ICCP) uses the redundancy group ID to associate multiple chassis that perform similar redundancy functions.	ICCP Peer	Identical	Mandatory
backup-liveness-detection Determine whether a peer is up or down by exchanging keepalive messages over the management link between the two Inter-Chassis Control Protocol (ICCP) peers.	ICCP Peer	Unique	Mandatory
mc-ae-id Specify the identification number of the MC-LAG device.	MCAE ifd	Identical	Mandatory

Table 14: MC-LAG Parameters Checked for Configuration Consistency (*continued*)

Configuration Knob	Hierarchy	Consistency Requirement	Enforcement
mcae redundancy-group Used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other.	MCAE ifd	Identical	Mandatory
mcae chassis-id Used by LACP for calculating the port number of the MC-LAG's physical member links.	MCAE ifd	Unique	Mandatory
mcae deployment mode Indicates whether an MC-LAG is in active-standby mode or active-active mode.	MCAE ifd	Identical	Mandatory
mcae status-control Specify whether the chassis becomes active or remains in standby mode when an interchassis link failure occurs.	MCAE ifd	Unique	Mandatory
force-icl-down Specify that if the node's ICCP peer goes down, the system brings down the interchassis-link logical interface.	MCAE ifd	Unique	Mandatory
prefer-status-control-active Specify that the node configured as status-control active becomes the active node if the peer of this node goes down.	MCAE ifd	Unique	Desired
lACP mode Specify LACP is active or passive.	MCAE ifd	Identical	Mandatory
lACP periodic Specify the interval for periodic transmission of LACP packets.	MCAE ifd	Identical	Mandatory
lACP system-id Define the LACP system identifier at the aggregated Ethernet interface level.	MCAE ifd	Identical	Mandatory

Table 14: MC-LAG Parameters Checked for Configuration Consistency (*continued*)

Configuration Knob	Hierarchy	Consistency Requirement	Enforcement
lacp admin-key Specify an administrative key for the router or switch.	MCAE ifd	Identical	Mandatory
native-vlan-id Configure mixed tagging support for untagged packets on a port.	MCAE ifd	Identical	Mandatory
mcae-mac-synchronize Synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG.	VLAN	Identical	Mandatory
Interface mac Limit Configure a limit to the number of MAC addresses that can be learned from a bridge domain, VLAN, virtual switch, or set of bridge domains or VLANs.	VLAN	Identical	Desired
l3-interface Associate a Layer 3 interface with the VLAN.	VLAN	Identical	Desired
igmp-snooping Enable IGMP snooping. A Layer 2 device monitors the IGMP join and leave messages sent from each connected host to a multicast router. This enables the Layer 2 device to keep track of the multicast groups and associated member ports. The Layer 2 device uses this information to make intelligent decisions and to forward multicast traffic to only the intended destination hosts.	VLAN	Identical	Mandatory
family Specify the protocol family configured on the logical interface.	IRB Interface	Identical	Mandatory
ipv4 address Specify an IPv4 address for the IRB interface.	IRB Interface	Unique	Mandatory

Table 14: MC-LAG Parameters Checked for Configuration Consistency (*continued*)

Configuration Knob	Hierarchy	Consistency Requirement	Enforcement
ipv6 address Specify an IPv6 address for the IRB interface.	IRB Interface	Unique	Mandatory
vrrp-group id Specify a VRRP group identifier.	IRB Interface	Identical	Mandatory
proxy-arp-type For Ethernet interfaces only, configure the router or switch to respond to any ARP request, as long as the router or switch has an active route to the ARP request's target address.	IRB Interface	Identical	Mandatory
vrrp-group priority Configure a Virtual Router Redundancy Protocol (VRRP) router's priority for becoming the master default router. The router with the highest priority within the group becomes the master.	VRRP Group	Unique	Mandatory
vrrp-group authentication-key Configure a Virtual Router Redundancy Protocol (VRRP) IPv4 authentication key. You also must specify a VRRP authentication scheme by including the authentication-type statement.	VRRP Group	Identical	Mandatory
vrrp-group authentication-type Enable Virtual Router Redundancy Protocol (VRRP) IPv4 authentication and specify the authentication scheme for the VRRP group.	VRRP Group	Identical	Mandatory
vrrp-group virtual-address Configure the addresses of the virtual routers in a Virtual Router Redundancy Protocol (VRRP) IPv4 or IPv6 group.	VRRP Group	Identical	Mandatory
encapsulation Configure a logical link-layer encapsulation type.	MCAE ifd	Identical	Mandatory

Table 14: MC-LAG Parameters Checked for Configuration Consistency (*continued*)

Configuration Knob	Hierarchy	Consistency Requirement	Enforcement
flexible-vlan-tagging Support simultaneous transmission of 802.1Q VLAN single-tag and dual-tag frames on logical interfaces on the same Ethernet port, and on pseudowire logical interfaces.	MCAE ifd	Identical	Mandatory
vlan-tagging For Fast Ethernet and Gigabit Ethernet interfaces, aggregated Ethernet interfaces configured for VPLS, and pseudowire subscriber interfaces, enable the reception and transmission of 802.1Q VLAN-tagged frames on the interface.	MCAE ifd	Identical	Mandatory
mtu Specify the maximum transmission unit (MTU) size for the media or protocol.	MCAE ifd, ICL ifd	Identical	Mandatory
interface-mode Determine whether the logical interface accepts or discards packets based on VLAN tags.	MCAE ifl	Identical	Mandatory
vlan membership Specify the name of the VLAN that belongs to an interface.	MCAE ifl	Identical	Mandatory

The following commands provide information regarding the status of configuration consistency check:

- Issue the **show multi-chassis mc-lag configuration-consistency list-of-parameters** command to view the list of committed MC-LAG parameters that are checked for inconsistencies, the consistency requirement (identical or unique), and the enforcement level (mandatory or desired).
- Issue the **show multi-chassis mc-lag configuration-consistency** command to view the list of committed MC-LAG parameters that are checked for inconsistencies, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.
- Issue the **show multi-chassis mc-lag configuration-consistency global-config** command to view configuration consistency check status for all global configuration related to MC-LAG functionality, the consistency requirement (identical or unique),

the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail..

- Issue the **show multi-chassis mc-lag configuration-consistency icl-config** command to view configuration consistency check status for parameters related to the interchassis control link, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.
- Issue the **show multi-chassis mc-lag configuration-consistency mcae-config** command to view configuration consistency check status for parameters related to the multichassis aggregated Ethernet interface, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.
- Issue the **show multi-chassis mc-lag configuration-consistency vlan-config** command to view configuration consistency check status for parameters related to VLAN configuration, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail..
- Issue the **show multi-chassis mc-lag configuration-consistency vrrp-config** command to view configuration consistency check status for parameters related to VRRP configuration, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.
- Issue the **show interfaces mc-ae** command to view configuration consistency check status of the multichassis aggregated Ethernet interface. If there are multiple inconsistencies, only the first inconsistency is shown. If the enforcement level for the MC-LAG parameter is mandatory, and you did not configure that parameter correctly, the command will show that the MC-LAG interface is down.

Release History Table

Release	Description
15.1X53-D60	Starting with Junos OS Release 15.1X53-D60 on QFX10000 switches, configuration consistency check uses the Inter-Chassis Control Protocol (ICCP) to exchange MC-LAG configuration parameters (chassis ID, service ID, and so on) and checks for any configuration inconsistencies across MC-LAG peers.

CHAPTER 8

Configuring Multichassis Link Aggregation for IPv6 Through NDP

- [Understanding IPv6 Neighbor Discovery Protocol and MC-LAGs on page 411](#)

Understanding IPv6 Neighbor Discovery Protocol and MC-LAGs

Supported Platforms [EX Series](#), [MX Series](#), [QFX Series](#)

Neighbor Discovery Protocol (NDP) is an IPv6 protocol that enables nodes on the same link to advertise their existence to their neighbors and to learn about the existence of their neighbors. NDP is built on top of Internet Control Message Protocol version 6 (ICMPv6). It replaces the following IPv4 protocols: Router Discovery (RDISC), Address Resolution Protocol (ARP), and ICMPv4 redirect.

You can use NDP in a multichassis link aggregation group (MC-LAG) active-active configuration on switches.

Neighbor Discovery Messages for MC-LAGs

NDP on MC-LAGs uses the following message types:

- Neighbor solicitation (NS)—Messages used for address resolution and to test reachability of neighbors.

A host can verify that its address is unique by sending a neighbor solicitation message destined to the new address. If the host receives a neighbor advertisement in reply, the address is a duplicate.

- Neighbor advertisement (NA)—Messages used for address resolution and to test reachability of neighbors. Neighbor advertisements are sent in response to neighbor solicitation messages.

NDP Functions and Configuration Requirements on MC-LAGs

The functions provided through NDP on MC-LAGs on the switches are:

- Address resolution
- Neighbor unreachability detection

The requirements for an NDP configuration on MC-LAG on the switches include:

- An active-active configuration
- Virtual Router Redundancy Protocol (VRRP)

**Related
Documentation**

- [show l2-learning redundancy-groups on page 469](#)

PART 3

Troubleshooting

- [Troubleshooting Multichassis Link Aggregation on page 415](#)
- [Interface Diagnostics on page 423](#)

CHAPTER 9

Troubleshooting Multichassis Link Aggregation

- [Troubleshooting Multichassis Link Aggregation on page 415](#)

Troubleshooting Multichassis Link Aggregation

Supported Platforms [EX4600, QFX Series](#)

Use the following information to troubleshoot multichassis link aggregation configuration issues:

- [MAC Addresses Learned on Multichassis Aggregated Ethernet Interfaces Are Not Removed from the MAC Address Table on page 416](#)
- [MC-LAG Peer Does Not Go into Standby Mode on page 416](#)
- [Secondary MC-LAG Peer with Status Control Set to Standby Becomes Inactive on page 417](#)
- [Redirect Filters Take Priority over User-Defined Filters on page 417](#)
- [Operational Command Output Is Wrong on page 417](#)
- [ICCP Connection Might Take Up to 60 Seconds to Become Active on page 417](#)
- [MAC Address Age Learned on a Multichassis Aggregated Ethernet Interface Is Reset to Zero on page 418](#)
- [MAC Address Is Not Learned Remotely in a Default VLAN on page 418](#)
- [Snooping Entries Learned on Multichassis Aggregated Ethernet Interfaces Are Not Removed on page 418](#)
- [ICCP Does Not Come Up After You Add or Delete an Authentication Key on page 418](#)
- [Local Status Is Standby When It Should Be Active on page 419](#)
- [Packets Loop on the Server When ICCP Fails on page 419](#)
- [Both MC-LAG Peers Use the Default System ID After a Reboot or an ICCP Configuration Change on page 419](#)
- [No Commit Checks Are Done for ICL-PL Interfaces on page 419](#)
- [Double Failover Scenario on page 419](#)
- [Multicast Traffic Floods the VLAN When the ICL-PL Interface Goes Down and Up on page 420](#)

- [Layer 3 Traffic Sent to the Standby MC-LAG Peer Is Not Redirected to Active MC-LAG Peer on page 420](#)
- [Aggregated Ethernet Interfaces Go Down on page 420](#)
- [Flooding of Upstream Traffic on page 420](#)
- [ARP and MAC Table Entries Become Out of Sync in an MC-LAG Configuration on page 421](#)

MAC Addresses Learned on Multichassis Aggregated Ethernet Interfaces Are Not Removed from the MAC Address Table

Problem Description: When both of the multichassis aggregated Ethernet interfaces on both connected multichassis link aggregation group (MC-LAG) peers are down, the MAC addresses learned on the multichassis aggregated Ethernet interfaces are not removed from the MAC address table.

For example, if you disable the multichassis aggregated Ethernet interface (ae0) on both MC-LAG peers by issuing the **set interfaces ae0 disable** command and commit the configuration, the MAC table still shows the MAC addresses as being learned on the multichassis aggregated Ethernet interfaces of both MC-LAG peers.

user@switchA> **show ethernet-switching table**

Ethernet-switching table: 6 entries, 2 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
v10	*	Flood		- All-members
v10	00:00:5E:00:53:00	Learn(L)	3:55	ae0.0 (MCAE)
v10	00:00:5E:00:53:01	Learn(R)	0	xe-0/0/9.0
v20	*	Flood		- All-members
v30	*	Flood		- All-members
v30	00:00:5E:00:53:03	Static		- Router

user@switchB> **show ethernet-switching table**

Ethernet-switching table: 6 entries, 2 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
v10	*	Flood		- All-members
v10	00:00:5E:00:53:04	Learn(R)	0	ae0.0 (MCAE)
v10	00:00:5E:00:53:05	Learn	40	xe-0/0/10.0
v20	*	Flood		- All-members
v30	*	Flood		- All-members
v30	00:00:5E:00:53:06	Static		- Router

Solution This is expected behavior.

MC-LAG Peer Does Not Go into Standby Mode

Problem Description: A multichassis link aggregation group (MC-LAG) peer does not go into standby mode if the MC-LAG peer IP address specified in the Inter-Chassis Control Protocol (ICCP) configuration and the IP address specified in the multichassis protection configuration are different.

Solution To prevent failure to enter standby mode, make sure that the peer IP address in the ICCP configurations and the IP address in multichassis protection configurations are the same.

Secondary MC-LAG Peer with Status Control Set to Standby Becomes Inactive

Problem **Description:** When the interchassis control link-protection link (ICL-PL) and multichassis aggregated Ethernet interfaces go down on the primary multichassis link aggregation group (MC-LAG) peer, the secondary MC-LAG peer's multichassis aggregated Ethernet interfaces with status control set to standby become inactive instead of active.

Solution This is expected behavior.

Redirect Filters Take Priority over User-Defined Filters

Problem **Description:** Multichassis link aggregation group (MC-LAG) implicit failover redirection filters take precedence over user-configured explicit filters.

Solution This is expected behavior.

Operational Command Output Is Wrong

Problem **Description:** After you deactivate Inter-Chassis Control Protocol (ICCP), the **show iccp** operational command output still shows registered client daemons, such as mcsnoopd, lacpd, and eswd.

For example:

```
user@switch> show iccp
Client Application: MCSNOOPD
Redundancy Group IDs Joined: None
```

```
Client Application: lacpd
Redundancy Group IDs Joined: 1
```

```
Client Application: eswd
Redundancy Group IDs Joined: 1
```

The **show iccp** command output always shows registered modules regardless of whether or not ICCP peers are configured.

Solution This is expected behavior.

ICCP Connection Might Take Up to 60 Seconds to Become Active

Problem **Description:** When the Inter-Chassis Control Protocol (ICCP) configuration and the routed VLAN interface (RVI) configuration are committed together, the ICCP connection might take up to 60 seconds to become active.

Solution This is expected behavior.

MAC Address Age Learned on a Multichassis Aggregated Ethernet Interface Is Reset to Zero

Problem Description: When you activate and then deactivate an interchassis link-protection link (ICL-PL), the MAC address age learned on the multichassis aggregated Ethernet interface is reset to zero. The next-hop interface changes trigger MAC address updates in the hardware, which then triggers aging updates in the Packet Forwarding Engine. The result is that the MAC address age is updated to zero.

For example, the ICL-PL has been deactivated, and the **show ethernet-switching table** command output shows that the MAC addresses have an age of 0.

user@switch> show ethernet-switching table

Ethernet-switching table: 3 entries, 2 learned, 0 persistent entries

VLAN	MAC address	Type	Age	Interfaces
v100	*	Flood		- All-members
v100	00:10:00:00:00:01	Learn(L)	0	ae0.0 (MCAE)
v100	00:10:00:00:00:02	Learn(L)	0	ae0.0 (MCAE)

Solution This is expected behavior.

MAC Address Is Not Learned Remotely in a Default VLAN

Problem Description: If a multichassis link aggregation group (MC-LAG) peer learns a MAC address in the default VLAN, Inter-Chassis Control Protocol (ICCP) does not synchronize the MAC address with the MAC address of the other MC-LAG peer.

Solution This is expected behavior.

Snooping Entries Learned on Multichassis Aggregated Ethernet Interfaces Are Not Removed

Problem Description: When multichassis aggregated Ethernet interfaces are configured on a VLAN that is enabled for multicast snooping, the membership entries learned on the multichassis aggregated Ethernet interfaces on the VLAN are not cleared when the multichassis aggregated Ethernet interfaces go down. This is done to speed up convergence time when the interfaces come up, or come up and go down.

Solution This is expected behavior.

ICCP Does Not Come Up After You Add or Delete an Authentication Key

Problem Description: The Inter-Chassis Control Protocol (ICCP) connection is not established when you add an authentication key and then delete it only at the global ICCP level. However, authentication works correctly at the ICCP peer level.

Solution Delete the ICCP configuration, and then add the ICCP configuration.

Local Status Is Standby When It Should Be Active

Problem **Description:** If the multichassis aggregated Ethernet interface is down when the state machine is in a synchronized state, the multichassis link aggregation group (MC-LAG) peer local status is standby. If the multichassis aggregated Ethernet interface goes down after the state machine is in an active state, then the local status remains active, and the local state indicates that the interface is down.

Solution This is expected behavior.

Packets Loop on the Server When ICCP Fails

Problem **Description:** When you enable backup liveness detection for a multichassis link aggregation group (MC-LAG), and the backup liveness detection packets are lost because of a temporary failure on the MC-LAG, then both of the peers in the MC-LAG remain active. If this happens, both of the MC-LAG peers send packets to the connected server.

Solution This is expected behavior.

Both MC-LAG Peers Use the Default System ID After a Reboot or an ICCP Configuration Change

Problem **Description:** After a reboot or after a new Inter-Chassis Control Protocol (ICCP) configuration has been committed, and the ICCP connection does not become active, the Link Aggregation Control Protocol (LACP) messages transmitted over the multichassis aggregated Ethernet interfaces use the default system ID. The configured system ID is used instead of the default system ID only after the MC-LAG peers synchronize with each other.

Solution This is expected behavior.

No Commit Checks Are Done for ICL-PL Interfaces

Problem **Description:** There are no commit checks on the interface being configured as an interchassis link-protection link (ICL-PL), so you must provide a valid interface name for the ICL-PL.

Solution This is expected behavior.

Double Failover Scenario

Problem **Description:** If the following events happen in this exact order—Inter-Chassis Control Protocol (ICCP) goes down, and the multichassis aggregated Ethernet interface on the multichassis link aggregation group (MC-LAG) peer in active mode goes down—a double failover occurs. In this scenario, the MC-LAG peer in standby mode does not detect what happens on the active MC-LAG peer. The MC-LAG peer in standby mode operates as if the multichassis aggregated Ethernet interface on the MC-LAG in active mode were up

and blocks the interchassis link-protection link (ICL-PL) traffic. The ICL-PL traffic is not forwarded.

Solution This is expected behavior.

Multicast Traffic Floods the VLAN When the ICL-PL Interface Goes Down and Up

Problem **Description:** When interchassis link-protection link (ICL-PL) goes down and comes up, multicast traffic is flooded to all of the interfaces in the VLAN. The Packet Forwarding Engine flag `Ip4McastFloodMode` for the VLAN is changed to `MCAST_FLOOD_ALL`. This problem only occurs when a multichassis link aggregation group (MC-LAG) is configured for Layer 2.

Solution This is expected behavior.

Layer 3 Traffic Sent to the Standby MC-LAG Peer Is Not Redirected to Active MC-LAG Peer

Problem **Description:** When Inter-chassis Control Protocol (ICCP) is down, the status of a remote MC-LAG peer is unknown. Even if the MC-LAG peer is configured as standby, the traffic is not redirected to this peer because it is assumed that this peer is down.

Solution This is expected behavior.

Aggregated Ethernet Interfaces Go Down

Problem **Description:** When a multichassis aggregated Ethernet interface is converted to an aggregated Ethernet interface, it retains some multichassis aggregated Ethernet interface properties. For example, the aggregated Ethernet interface might retain the administrative key of the multichassis aggregated Ethernet interface. When this happens, the aggregated Ethernet interface goes down.

Solution Restart Link Aggregation Control Protocol (LACP) on the multichassis link aggregation group (MC-LAG) peer hosting the aggregated Ethernet interface to bring up the aggregated Ethernet interface. Restarting LACP removes the multichassis aggregated Ethernet properties of the aggregated Ethernet interface.

Flooding of Upstream Traffic

Problem **Description:** When MAC synchronization is enabled, the multichassis link aggregation group (MC-LAG) peer can resolve Address Resolution Protocol (ARP) entries for the MC-LAG routed VLAN interface (RVI) with either of the MC-LAG peer MAC addresses. If the downstream traffic is sent with one MAC address (MAC1) but the peer has resolved the MAC address with a different MAC address (MAC2), the MAC2 address might not be learned by any of the access layer switches. Flooding of the upstream traffic for the MAC2 address might then occur.

Solution Make sure that downstream traffic is sent from the MC-LAG peers periodically to prevent the MAC addresses from aging out.

ARP and MAC Table Entries Become Out of Sync in an MC-LAG Configuration

Problem **Description:** The ARP and MAC address tables in an MC-LAG configuration normally stay synchronized, but updates might be lost in extreme situations when table updates are happening very frequently, such as when link flapping occurs in an MC-LAG group.

Solution To avoid ARP and MAC entries becoming out of sync in an MC-LAG configuration, you can configure the **arp-l2-validate** option on the switch's IRB interface, as follows:

```
user@switch> set interfaces irb arp-l2-validate
```

The **arp-l2-validate** option is available only on QFX Series switches and EX4300 switches starting with Junos OS Release 15.1R4, and EX9200 switches starting with Junos OS Release 13.2R4.

This option turns on validation of ARP and MAC table entries, automatically applying updates if they become out of sync. You might want to enable this option as a workaround when the network is experiencing other issues that also cause loss of ARP and MAC synchronization, but disable it during normal operation because this option might impact performance in scale configurations.

- Related Documentation**
- [Example: Configuring Multichassis Link Aggregation on page 41](#)
 - [Configuring Multichassis Link Aggregation on page 35](#)

CHAPTER 10

Interface Diagnostics

- [Configuring Interface Diagnostics Tools to Test the Physical Layer Connections on page 423](#)

Configuring Interface Diagnostics Tools to Test the Physical Layer Connections

Supported Platforms [ACX Series, EX Series, J Series, M Series, MX Series, PTX Series, QFX Series, T Series](#)

- [Configuring Loopback Testing on page 423](#)
- [Configuring BERT Testing on page 425](#)
- [Starting and Stopping a BERT Test on page 428](#)

Configuring Loopback Testing

Loopback testing allows you to verify the connectivity of a circuit. You can configure any of the following interfaces to execute a loopback test: aggregated Ethernet, Fast Ethernet, Gigabit Ethernet, E1, E3, NxDSO, serial, SONET/SDH, T1, and T3.

The physical path of a network data circuit usually consists of segments interconnected by devices that repeat and regenerate the transmission signal. The transmit path on one device connects to the receive path on the next device. If a circuit fault occurs in the form of a line break or a signal corruption, you can isolate the problem by using a loopback test. Loopback tests allow you to isolate segments of the circuit and test them separately.

To do this, configure a *line loopback* on one of the routers. Instead of transmitting the signal toward the far-end device, the line loopback sends the signal back to the originating router. If the originating router receives back its own Data Link Layer packets, you have verified that the problem is beyond the originating router. Next, configure a line loopback farther away from the local router. If this originating router does not receive its own Data Link Layer packets, you can assume that the problem is on one of the segments between the local router and the remote router's interface card. In this case, the next troubleshooting step is to configure a line loopback closer to the local router to find the source of the problem.

The following types of loopback testing are supported by Junos OS:

- DCE local—Loops packets back on the local data circuit-terminating equipment (DCE).
- DCE remote—Loops packets back on the remote DCE.

- **Local**—Useful for troubleshooting physical PIC errors. Configuring local loopback on an interface allows transmission of packets to the channel service unit (CSU) and then to the circuit toward the far-end device. The interface receives its own transmission, which includes data and timing information, on the local router's PIC. The data received from the CSU is ignored. To test a local loopback, issue the **show interfaces *interface-name*** command. If PPP keepalives transmitted on the interface are received by the PIC, the **Device Flags** field contains the output **Loop-Detected**.
- **Payload**—Useful for troubleshooting the physical circuit problems between the local router and the remote router. A payload loopback loops data only (without clocking information) on the remote router's PIC. With payload loopback, overhead is recalculated.
- **Remote**—Useful for troubleshooting the physical circuit problems between the local router and the remote router. A remote loopback loops packets, including both data and timing information, back on the remote router's interface card. A router at one end of the circuit initiates a remote loopback toward its remote partner. When you configure a remote loopback, the packets received from the physical circuit and CSU are received by the interface. Those packets are then retransmitted by the PIC back toward the CSU and the circuit. This loopback tests all the intermediate transmission segments.

Table 15 on page 424 shows the loopback modes supported on the various interface types.

Table 15: Loopback Modes by Interface Type

Interface	Loopback Modes	Usage Guidelines
Aggregated Ethernet, Fast Ethernet, Gigabit Ethernet	Local	<i>Configuring Ethernet Loopback Capability</i>
Circuit Emulation E1	Local and remote	<i>Configuring E1 Loopback Capability</i>
Circuit Emulation T1	Local and remote	<i>Configuring T1 Loopback Capability</i>
E1 and E3	Local and remote	<i>Configuring E1 Loopback Capability and Configuring E3 Loopback Capability</i>
NxDSO	Payload	<i>Configuring Channelized E1 IQ and IQE Interfaces, Configuring T1 and NxDSO Interfaces, Configuring Channelized OC12/STM4 IQ and IQE Interfaces (SONET Mode), Configuring Channelized STM1 IQ and IQE Interfaces, and Configuring Channelized T3 IQ Interfaces</i>
Serial (V.35 and X.21)	Local and remote	<i>Configuring Serial Loopback Capability</i>
Serial (EIA-530)	DCE local, DCE remote, local, and remote	<i>Configuring Serial Loopback Capability</i>
SONET/SDH	Local and remote	<i>Configuring SONET/SDH Loopback Capability to Identify a Problem as Internal or External</i>

Table 15: Loopback Modes by Interface Type (*continued*)

Interface	Loopback Modes	Usage Guidelines
T1 and T3	Local, payload, and remote	<i>Configuring T1 Loopback Capability</i> and <i>Configuring T3 Loopback Capability</i> <i>See also Configuring the T1 Remote Loopback Response</i>

To configure loopback testing, include the **loopback** statement:

```
user@host# loopback mode;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* aggregated-ether-options]
- [edit interfaces *interface-name* ds0-options]
- [edit interfaces *interface-name* e1-options]
- [edit interfaces *interface-name* e3-options]
- [edit interfaces *interface-name* fastether-options]
- [edit interfaces *interface-name* gigether-options]
- [edit interfaces *interface-name* serial-options]
- [edit interfaces *interface-name* sonet-options]
- [edit interfaces *interface-name* t1-options]
- [edit interfaces *interface-name* t3-options]

Configuring BERT Testing

To configure BERT:

- Configure the duration of the test.

```
[edit interfaces interface-name interface-type-options]
user@host# bert-period seconds;
```

You can configure the BERT period to last from 1 through 239 seconds on some PICs and from 1 through 240 seconds on other PICs. By default, the BERT period is 10 seconds.

- Configure the error rate to monitor when the inbound pattern is received.

```
[edit interfaces interface-name interface-type-options]
user@host# bert-error-rate rate;
```

rate is the bit error rate. This can be an integer from 0 through 7, which corresponds to a bit error rate from 10^{-0} (1 error per bit) to 10^{-7} (1 error per 10 million bits).

- Configure the bit pattern to send on the transmit path.

```
[edit interfaces interface-name interface-type-options]
user@host# bert-algorithm algorithm;
```

algorithm is the pattern to send in the bit stream. For a list of supported algorithms, enter a ? after the **bert-algorithm** statement; for example:

```
[edit interfaces t1-0/0/0 t1-options]
user@host# set bert-algorithm ?
Possible completions:
pseudo-2e11-o152    Pattern is 2^11 -1 (per 0.152 standard)
pseudo-2e15-o151    Pattern is 2^15 - 1 (per 0.152 standard)
pseudo-2e20-o151    Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e20-o153    Pattern is 2^20 - 1 (per 0.153 standard)
...
```

For specific hierarchy information, see the individual interface types.



NOTE: The four-port E1 PIC supports only the following algorithms:

```
pseudo-2e11-o152    Pattern is 2^11 -1 (per 0.152 standard)
pseudo-2e15-o151    Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151    Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e23-o151    Pattern is 2^23 (per 0.151 standard)
```

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



NOTE: The 12-port T1/E1 Circuit Emulation (CE) PIC supports only the following algorithms:

```
all-ones-repeating   Repeating one bits
all-zeros-repeating  Repeating zero bits
alternating-double-ones-zeros Alternating pairs of ones and zeros
alternating-ones-zeros Alternating ones and zeros
pseudo-2e11-o152     Pattern is 2^11 -1 (per 0.152 standard)
pseudo-2e15-o151     Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151     Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e7           Pattern is 2^7 - 1
pseudo-2e9-o153      Pattern is 2^9 - 1 (per 0.153 standard)
repeating-1-in-4      1 bit in 4 is set
repeating-1-in-8      1 bit in 8 is set
repeating-3-in-24     3 bits in 24 are set
```

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



NOTE: The IQE PICs support only the following algorithms:

```

all-ones-repeating    Repeating one bits
all-zeros-repeating   Repeating zero bits
alternating-double-ones-zeros Alternating pairs of ones and zeros
alternating-ones-zeros Alternating ones and zeros
pseudo-2e9-o153      Pattern is 2^9 -1 (per 0.153 (511 type) standard)
pseudo-2e11-o152     Pattern is 2^11 -1 (per 0.152 and 0.153 (2047 type)
standards)
pseudo-2e15-o151     Pattern is 2^15 -1 (per 0.151 standard)
pseudo-2e20-o151     Pattern is 2^20 -1 (per 0.151 standard)
pseudo-2e20-o153     Pattern is 2^20 -1 (per 0.153 standard)
pseudo-2e23-o151     Pattern is 2^23 -1 (per 0.151 standard)
repeating-1-in-4      1 bit in 4 is set
repeating-1-in-8      1 bit in 8 is set
repeating-3-in-24     3 bits in 24 are set

```

When you issue the help command from the CLI, all BERT algorithm options are displayed, regardless of the PIC type, and no commit check is available. Unsupported patterns for a PIC type can be viewed in system log messages.



NOTE: BERT is supported on the PDH interfaces of the Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP and the DS3/E3 MIC. The following BERT algorithms are supported:

```

all-ones-repeating    Repeating one bits
all-zeros-repeating   Repeating zero bits
alternating-double-ones-zeros Alternating pairs of ones and zeros
alternating-ones-zeros Alternating ones and zeros
repeating-1-in-4      1 bit in 4 is set
repeating-1-in-8      1 bit in 8 is set
repeating-3-in-24     3 bits in 24 are set
pseudo-2e9-o153      Pattern is 2^9 - 1 (per 0.153 standard)
pseudo-2e11-o152     Pattern is 2^11 - 1 (per 0.152 standard)
pseudo-2e15-o151     Pattern is 2^15 - 1 (per 0.151 standard)
pseudo-2e20-o151     Pattern is 2^20 - 1 (per 0.151 standard)
pseudo-2e20-o153     Pattern is 2^20 - 1 (per 0.153 standard)
pseudo-2e23-o151     Pattern is 2^23 (per 0.151 standard)

```

Table 16 on page 427 shows the BERT capabilities for various interface types.

Table 16: BERT Capabilities by Interface Type

Interface	T1 BERT	T3 BERT	Comments
12-port T1/E1 Circuit Emulation	Yes (ports 0–11)	—	• Limited algorithms
4-port Channelized OC3/STM1 Circuit Emulation	Yes (port 0–3)	—	• Limited algorithms

Table 16: BERT Capabilities by Interface Type (*continued*)

Interface	T1 BERT	T3 BERT	Comments
E1 or T1	Yes (port 0–3)	Yes (port 0–3)	<ul style="list-style-type: none"> Single port at a time Limited algorithms
E3 or T3	Yes (port 0–3)	Yes (port 0–3)	<ul style="list-style-type: none"> Single port at a time
Channelized OC12	—	Yes (channel 0–11)	<ul style="list-style-type: none"> Single channel at a time Limited algorithms No bit count
Channelized STM1	Yes (channel 0–62)	—	<ul style="list-style-type: none"> Multiple channels Only one algorithm No error insert No bit count
Channelized T3 and Multichannel T3	Yes (channel 0–27)	Yes (port 0–3 on channel 0)	<ul style="list-style-type: none"> Multiple ports and channels Limited algorithms for T1 No error insert for T1 No bit count for T1

These limitations do not apply to channelized IQ interfaces. For information about BERT capabilities on channelized IQ interfaces, see *Channelized IQ and IQE Interfaces Properties*.

Starting and Stopping a BERT Test

Before you can start the BERT test, you must disable the interface. To do this, include the **disable** statement at the **[edit interfaces *interface-name*]** hierarchy level:

```
[edit interfaces interface-name]
disable;
```

After you configure the BERT properties and commit the configuration, begin the test by issuing the **test interface *interface-name interface-type-bert-start*** operational mode command:

```
user@host> test interface interface-name interface-type-bert-start
```

The test runs for the duration you specify with the **bert-period** statement. If you want to terminate the test sooner, issue the **test interface *interface-name interface-type-bert-stop*** command:

```
user@host> test interface interface-name interface-type-bert-stop
```

For example:

```
user@host> test interface t3-1/2/0 t3-bert-start
user@host> test interface t3-1/2/0 t3-bert-stop
```

To view the results of the BERT test, issue the **show interfaces extensive | find BERT** command:

```
user@host> show interfaces interface-name extensive | find BERT
```

For more information about running and evaluating the results of the BERT procedure, see the [CLI Explorer](#).



NOTE: To exchange BERT patterns between a local router and a remote router, include the `loopback remote` statement in the interface configuration at the remote end of the link. From the local router, issue the `test interface` command.

**Related
Documentation**

- *show interfaces diagnostics optics (Gigabit Ethernet, 10-Gigabit Ethernet, 40-Gigabit Ethernet, 100-Gigabit Ethernet, and Virtual Chassis Port)*

PART 4

Configuration Statements and Operational Commands

- [Configuration Statements on page 433](#)
- [Operational Commands on page 459](#)

CHAPTER 11

Configuration Statements

- [apply-groups](#) on page 434
- [arp-l2-validate](#) on page 435
- [authentication-key \(ICCP\)](#) on page 436
- [backup-liveness-detection](#) on page 437
- [backup-peer-ip](#) on page 437
- [chassis-id](#) on page 438
- [detection-time \(Liveness Detection\)](#) on page 438
- [enhanced-convergence](#) on page 439
- [groups](#) on page 440
- [iccp](#) on page 442
- [interface \(Multichassis Protection\)](#) on page 443
- [local-ip-addr \(ICCP\)](#) on page 443
- [mc-ae](#) on page 444
- [mc-ae-id](#) on page 446
- [minimum-interval \(Liveness Detection\)](#) on page 447
- [minimum-receive-interval \(Liveness Detection\)](#) on page 447
- [mode \(QFX Series\)](#) on page 448
- [multiplier \(Liveness Detection\)](#) on page 448
- [multi-chassis](#) on page 449
- [multi-chassis-protection](#) on page 449
- [no-adaptation \(Liveness Detection\)](#) on page 450
- [peer \(ICCP\)](#) on page 451
- [peer \(Multichassis\)](#) on page 452
- [peers \(Commit\)](#) on page 453
- [peers-synchronize](#) on page 454
- [status-control](#) on page 454
- [session-establishment-hold-time](#) on page 455
- [threshold \(Detection Time\)](#) on page 455

- [transmit-interval \(Liveness Detection\) on page 456](#)
- [version \(Liveness Detection\) on page 456](#)
- [when on page 457](#)

[apply-groups](#)

Supported Platforms	ACX Series , EX Series , M Series , MX Series , OCX1100 , PTX Series , QFabric System , QFX Series , SRX Series , T Series
Syntax	<code>apply-groups [<i>group-names</i>];</code>
Hierarchy Level	All hierarchy levels
Release Information	Statement introduced before Junos OS Release 7.4.
Description	<p>Apply a configuration group to a specific hierarchy level in a configuration, to have a configuration inherit the statements in the configuration group.</p> <p>You can specify more than one group name. You must list them in order of inheritance priority. The configuration data in the first group takes priority over the data in subsequent groups.</p>
Options	<i>group-names</i> —One or more names specified in the groups statement.
Required Privilege Level	<code>configure</code> —To enter configuration mode, but other required privilege levels depend on where the statement is located in the configuration hierarchy.
Related Documentation	<ul style="list-style-type: none">• Applying the Junos OS Configuration Group• groups on page 440

arp-l2-validate

Supported Platforms	EX4300, EX9200, QFX Series
Syntax	arp-l2-validate
Hierarchy Level	[edit interfaces irb]
Release Information	<p>Statement introduced in Junos OS Release 13.2R4 for EX9200 switches.</p> <p>Statement introduced in Junos OS Release 15.1R4 for QFX Series switches and EX4300 switches.</p>
Description	<p>Enables periodic checking of ARP Layer 3 addressing and MAC Layer 2 addressing tables, and fixes entries if they become out of sync.</p> <p>Normally, the ARP and MAC address tables stay synchronized. However, you can configure this option on the irb interface of the switch to help avoid traffic loss in network conditions that might cause unresolved inconsistencies to occur between the ARP and MAC address tables, such as:</p> <ul style="list-style-type: none">• When link flapping occurs in a multichassis link aggregation (MC-LAG) group, and the network is attempting to achieve convergence. In this case, frequent MAC table updates are happening, and occasionally a corresponding ARP table update might be lost.
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>
Related Documentation	<ul style="list-style-type: none">•

authentication-key (ICCP)

Supported Platforms	EX4600, MX Series, QFX Series
Syntax	authentication-key <i>key</i> ;
Hierarchy Level	[edit protocols iccp], [edit protocols iccp peer <i>peer-IP-address</i>]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series.
Description	<p>Specify the authentication key (password). The QFX3500 and MX Series devices use this password to verify the authenticity of packets sent from the peers hosting a multichassis link aggregation group (MC-LAG). Peer-level authentication takes precedence over global-level authentication.</p> <p>Inter-Chassis Control Protocol (ICCP) uses MD5 authentication.</p>
Options	<i>key</i> —Authentication password. It can be 1 through 16 contiguous digits or letters. Separate decimal digits with periods. Separate hexadecimal digits with periods and precede the string with 0x. If you include spaces in the password, enclose the entire password in quotation marks (" ").
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

backup-liveness-detection

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	<pre>backup-liveness-detection { backup-peer-ip ipv4-address; }</pre>
Hierarchy Level	[edit protocols iccp peer]
Release Information	Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 13.2R1 for EX Series switches.
Description	<p>Determine whether a peer is up or down by exchanging keepalive messages over the management link between the two Inter-Chassis Control Protocol (ICCP) peers.</p> <p>When an ICCP connection is operationally down, the status of the peers hosting a multichassis link aggregation group (MC-LAG) is detected by sending liveness detection requests to each other. Peers must respond to liveness detection requests within a specified amount of time. If the responses are not received within that time for a given number of consecutive attempts, the liveness detection check fails, and a failure action is implemented. Backup liveness detection must be configured on both peers hosting the MC-LAG.</p> <p>The remaining statement is explained separately.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none"> • Configuring Multichassis Link Aggregation on MX Series Routers on page 27

backup-peer-ip

Supported Platforms	EX Series, QFX Series
Syntax	<pre>backup-peer-ip ipv4-address;</pre>
Hierarchy Level	[edit protocols iccp peer backup-liveness-detection]
Release Information	Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 13.2R1 for EX Series switches.
Description	Specify the IP address of the peer being used as a backup peer in the Bidirectional Forwarding Detection (BFD) configuration.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

chassis-id

Supported Platforms	EX Series, QFX Series
Syntax	chassis-id <i>chassis-id</i> ;
Hierarchy Level	[edit interfaces aggregated-ether-options mc-ae]
Release Information	Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Specify the chassis ID of the multichassis aggregated Ethernet interface device. LACP uses the chassis ID to calculate the port number of the multichassis link aggregation group (MC-LAG) physical member links.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

detection-time (Liveness Detection)

Supported Platforms	EX4600, MX Series, QFX Series
Syntax	detection-time { threshold <i>milliseconds</i> ; }
Hierarchy Level	[edit protocols <i>iccp</i> <i>peer</i> liveness-detection]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series.
Description	The Bidirectional Forwarding Detection (BFD) timers are adaptive and can be adjusted to be faster or slower. The remaining statement is explained separately.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

enhanced-convergence

Supported Platforms [EX Series](#), [MX Series](#), [QFX Series](#)

Syntax enhanced-convergence;

Hierarchy Level [edit interfaces aeX aggregated-ether-options [mc-ae](#)]
[edit interfaces irb unit *unit-number*]

Release Information Statement introduced in Junos OS Release 15.1R1.

Description



NOTE: On EX9200 and QFX10000 switches, enhanced convergence is applicable for unicast traffic only—for example, when a MAC address is learned over an MC-AE interface, or an ARP entry is resolved over an MC-AE interface.

Improves Layer 2 and Layer 3 convergence time when a multichassis aggregated Ethernet (MC-AE) link goes down or comes up in a bridge domain or VLAN. Convergence time is improved because the traffic on the MC-AE interface is switched to the interchassis link (ICL) without waiting for a MAC address update.

If you have configured an IRB interface over an MC-AE interface that has enhanced convergences enabled, then you must configure enhanced convergence on the IRB interface as well. Enhanced convergence must be enabled for both Layer 2 and Layer 3 interfaces.

Required Privilege Level interface—To view this statement in the configuration.
interface-control—To add this statement to the configuration.

Related Documentation

- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [Configuring Multichassis Link Aggregation on page 35](#)

groups

Supported Platforms ACX Series, EX Series, M Series, MX Series, PTX Series, QFX Series, T Series

Syntax

```
groups {
  group-name {
    configuration-data;
    when {
      chassis chassis-id;
      member member-id;
      model model-id;
      node node-id;
      peers [ names of peers ]
      routing-engine routing-engine-id;
      time <start-time> [to <end-time>];
    }
    conditional-data;
  }
  lccn-re0 {
    configuration-data;
  }
  lccn-re1 {
    configuration-data;
  }
}
```

Hierarchy Level [edit]

Release Information Statement introduced before Junos OS Release 7.4.

Description Create a configuration group.

Options —

group-name—Name of the configuration group. To configure multiple groups, specify more than one ***group-name***.

configuration-data—The configuration statements that are to be applied elsewhere in the configuration with the **apply-groups** statement, to have the target configuration inherit the statements in the group.

when *conditional-data*—Option introduced in Junos 11.3. The conditional statements that are to be applied when this configuration group is applied.

On routers that support multiple Routing Engines, you can also specify two special group names:

re0—Configuration statements that are to be applied to the Routing Engine in slot 0.

re1—Configuration statements that are to be applied to the Routing Engine in slot 1.

The configuration specified in group **re0** is applied only if the current Routing Engine is in slot 0; likewise, the configuration specified in group **re1** is applied only if the current Routing Engine is in slot 1. Therefore, both Routing Engines can use the same

configuration file, each using only the configuration statements that apply to it. Each **re0** or **re1** group contains at a minimum the configuration for the hostname and the management interface (**fxp0**). If each Routing Engine uses a different management interface, the group also should contain the configuration for the backup router and static routes.

(Routing matrix only) The TX Matrix router supports group names for the Routing Engines in each connected T640 router in the following formats:



NOTE: The management Ethernet interface used for the TX Matrix Plus router, T1600 routers in a routing matrix, and PTX Series Packet Transport Routers, is **em0**. Junos OS automatically creates the router's management Ethernet interface, **em0**.

- **lccn-re0**—Configuration statements applied to the Routing Engine in slot 0 of the specified T640 router that is connected to a TX Matrix router.
 - **lccn-re1**—Configuration statements applied to the specified to the Routing Engine in slot 1 of the specified T640 router that is connected to a TX Matrix router.
- n* identifies the T640 router and can be from 0 through 3.

The remaining statements are explained separately.

Required Privilege Level **configure**—To enter configuration mode.

- Related Documentation**
- *Creating the Junos OS Configuration Group*
 - [apply-groups on page 434](#)
 - *apply-groups-except*

iccp

Supported Platforms EX Series, MX Series, QFX Series

Syntax

```
iccp {
  authentication-key string;
  local-ip-addr local-ip-addr;
  peer ip-address {
    authentication-key string;
    backup-liveness-detection {
      backup-peer-ip ip-address;
    }
    liveness-detection {
      detection-time {
        threshold milliseconds;
      }
      minimum-interval milliseconds;
      minimum-receive-interval milliseconds;
      multiplier number;
      no-adaptation;
      transmit-interval {
        minimum-interval milliseconds;
        threshold milliseconds;
      }
      version (1 | automatic);
    }
    local-ip-addr ipv4-address;
    session-establishment-hold-time seconds;
  }
  session-establishment-hold-time seconds;
  traceoptions {
    file <filename> <files number> <match regular-expression> <microsecond-stamp>
      <size size> <world-readable | no-world-readable>;
    flag flag;
    no-remote-trace;
  }
}
```

Hierarchy Level [edit protocols]

Release Information Statement introduced in Junos OS Release 10.0 for MX Series routers.
Statement introduced in Junos OS Release 12.2 for the QFX Series.
Statement introduced in Junos OS Release 12.3R2 for EX Series switches.

Description Configure Inter-Chassis Control Protocol (ICCP) between the multichassis link aggregation group (MC-LAG) peers. ICCP replicates forwarding information, validates configurations, and propagates the operational state of the MC-LAG members.



NOTE: Backup liveness detection is not supported on MX Series routers.

The remaining statements are explained separately.

Required Privilege	routing—To view this statement in the configuration.
Level	routing-control—To add this statement to the configuration.

interface (Multichassis Protection)

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	interface <i>interface-name</i> ;
Hierarchy Level	[edit multi-chassis multi-chassis-protection peer]
Release Information	Statement introduced in Junos OS Release 9.6 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Specify the name of the interface that is being used as an interchassis link-protection link (ICL-PL). The two switches hosting a multichassis link aggregation group (MC-LAG) use this link to pass Inter-Chassis Control Protocol (ICCP) and data traffic.
Required Privilege	interface—To view this statement in the configuration.
Level	interface-control—To add this statement to the configuration.

local-ip-addr (ICCP)

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	local-ip-addr <i>local-ip-address</i> ;
Hierarchy Level	[edit protocols iccp], [edit protocols iccp peer peer-IP-address]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Specify the local IP address of the interchassis link (ICL) interface that Inter-Chassis Control Protocol (ICCP) uses to communicate to the peers that host a multichassis link aggregation group (MC-LAG).
Options	<i>local-ip-address</i> —Default local IP address to be used by all peers.
Required Privilege	routing—To view this statement in the configuration.
Level	routing-control—To add this statement to the configuration.

mc-ae

Supported Platforms EX Series, MX Series, QFX Series

Syntax

```
mc-ae {
  chassis-id chassis-id;
  events {
    iccp-peer-down;
    force-icl-down;
    prefer-status-control-active;
  }
  init-delay-time seconds;
  mc-ae-id mc-ae-id;
  mode (active-active | active-standby);
  redundancy-group group-id;
  revert-time revert-time;
  status-control (active | standby);
  switchover-mode (non-revertive | revertive);
}
```

Hierarchy Level [edit interfaces aeX aggregated-ether-options],
[edit logical-systems *logical-system-name* interfaces aeX aggregated-ether-options]

Release Information Statement introduced in Junos OS Release 9.6 for MX Series routers.
events statement introduced in Junos OS Release 11.4R4 for MX Series routers.
 Statement introduced in Junos OS Release 12.2 for the QFX Series. Only the **chassis-id**, **mc-ae-id**, **mode active-active**, and **status-control (active | standby)** options are supported on QFX Series devices.
 Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
prefer-status-control-active statement introduced in Junos OS Release 13.2R1 for EX Series switches.
init-delay-time seconds statement introduced in Junos OS Release 13.2R3 for EX Series switches.
switchover-mode and **revert-time** statements introduced in Junos OS Release 13.3.
 Support for logical systems introduced in Junos OS Release 14.1.

Description Enable multichassis link aggregation groups (MC-LAG), which enables one device to form a logical LAG interface with two or more other devices.

Options

chassis-id—Specify the chassis ID for Link Aggregation Control Protocol (LACP) to calculate the port number of MC-LAG physical member links.
Values: 0 or 1

events—Specify an action if a specific MC-LAG event occurs.

iccp-peer-down—Specify an action if the ICCP peer of this node goes down.

force-icl-down—If the node's ICCP peer goes down, bring down the interchassis-link logical interface.

prefer-status-control-active—Specify that the node configured as **status-control active** become the active node if the peer of this node goes down.



NOTE: The `prefer-status-control-active` statement can be configured with the `status-control standby` configuration to prevent the LACP MC-LAG system ID from reverting to the default LACP system ID on ICCP failure. Use this configuration only if you can ensure that ICCP will not go down unless the router or switch is down. You must also configure the `hold-time down` value (at the `[edit interfaces interface-name]` hierarchy level) for the interchassis link with the `status-control standby` configuration to be higher than the ICCP BFD timeout. This configuration prevents data traffic loss by ensuring that when the router or switch with the `status-control active` configuration goes down, the router or switch with the `status-control standby` configuration does not go into standby mode.

To make the `prefer-status-control-active` configuration work with the `status-control standby` configuration when an interchassis-link logical interface is configured on aggregate Ethernet interface, you must either configure the `lACP periodic interval` statement at the `[edit interface interface-name aggregated-ether-options]` hierarchy level as slow or configure the `detection-time threshold` statement at the `[edit protocols iccp peer liveness-detection]` hierarchy level as less than 3 seconds.

init-delay-time *seconds*—To minimize traffic loss, specify the number of seconds in which to delay bringing the multichassis aggregated Ethernet interface back to the up state when you reboot an MC-LAG peer.

mc-ae-id *mc-ae-id*—Specify the identification number of the MC-LAG device. The two MC-LAG network devices that manage a given MC-LAG must have the same identification number.

Range: 1 through 65,535

mode (*active-active* | *active-standby*)—Specify whether the MC-LAG is in active-active or active-standby mode.



NOTE: You can configure IPv4 (`inet`) and IPv6 (`inet6`) addresses on `mc-ae` interfaces when the `active-standby` mode is configured.

redundancy-group *group-id*—Specify the redundancy group identification number. The Inter-Chassis Control Protocol (ICCP) uses the redundancy group ID to associate multiple chassis that perform similar redundancy functions.

Range: 1 through 4,294,967,294

revert-time—Wait interval (in minutes) before the switchover to the preferred node is performed when the `switchover-mode` is configured as `revertive`.

Range: 1 through 10

status-control (active | standby)—Specify whether the chassis becomes active or remains in standby mode when an interchassis link failure occurs.

switchover-mode (non-revertive | revertive)—Specify whether Junos OS should trigger a link switchover to the preferred node when the active node is available.



NOTE: For revertive mode to automatically switch over to the preferred node, the **status-control** statement should be configured as **active**.

init-delay-time seconds—To minimize traffic loss, specify the number of seconds by which to delay bringing the multichassis aggregated Ethernet (mc-ae) interface back to the up state when you reboot an MC-LAG peer.

Required Privilege Level interface—To view this statement in the configuration.
interface-control—To add this statement to the configuration.

Related Documentation

- [Active-Active Bridging and VRRP over IRB Functionality Overview on page 71](#)
- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Example: Configuring Multichassis Link Aggregation in Active-Active Mode on page 101](#)
- [Configuring Manual and Automatic Link Switchover for MC-LAG Interfaces on page 99](#)

mc-ae-id

Supported Platforms [EX Series](#), [QFX Series](#)

Syntax `mc-ae-id mc-ae-id;`

Hierarchy Level [edit interfaces aggregated-ether-options mc-ae]

Release Information Statement introduced in Junos OS Release 12.2 for the QFX Series.
Statement introduced in Junos OS Release 12.3R2 for EX Series switches.

Description Specify the multichassis aggregated Ethernet (MC-AE) identification number of the MC-AE that a given aggregated Ethernet interface belongs to. The two peers that host a given multichassis link aggregation group (MC-LAG) must have the same multichassis aggregated Ethernet ID.

Options **Range:** 1 through 65535.

Required Privilege Level interface—To view this statement in the configuration.
interface-control—To add this statement to the configuration.

minimum-interval (Liveness Detection)

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	minimum-interval <i>milliseconds</i> ;
Hierarchy Level	[edit protocols iccp peer liveness-detection]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Configure simultaneously the minimum interval at which the peer transmits liveness detection requests and the minimum interval at which the peer expects to receive a reply from a peer with which it has established a Bidirectional Forwarding Detection (BFD) session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately by using the transmit-interval minimal-interval and minimum-receive-interval statements, respectively.
Options	milliseconds —Specify the minimum interval value for Bidirectional Forwarding Detection (BFD). Range: 1 through 255,000
Required Privilege Level	routing —To view this statement in the configuration. routing-control —To add this statement to the configuration.

minimum-receive-interval (Liveness Detection)

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	minimum-receive-interval <i>milliseconds</i> ;
Hierarchy Level	[edit protocols iccp peer liveness-detection]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Configure the minimum interval at which the peer must receive a reply from a peer with which it has established a Bidirectional Forwarding Detection (BFD) session.
Options	milliseconds —Specify the minimum interval value. Range: 1 through 255,000
Required Privilege Level	routing —To view this statement in the configuration. routing-control —To add this statement to the configuration.

mode (QFX Series)

Supported Platforms	EX Series, QFX Series
Syntax	mode active-active ;
Hierarchy Level	[edit interfaces aggregated-ether-options mc-ae]
Release Information	Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Configure the multichassis link aggregation group (MC-LAG) to be in active-active mode. In active-active mode, all of the members of the MC-LAG will be active on both routing or switching devices. Only active-active mode is supported at this time.
Options	active-active —Specify that all of the members of the MC-LAG will be active on both routing or switching devices.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.
Related Documentation	

multiplier (Liveness Detection)

Supported Platforms	EX4600, QFX Series
Syntax	multiplier <i>number</i> ;
Hierarchy Level	[edit protocols iccp peer liveness-detection]
Release Information	Statement introduced in Junos OS Release 12.2 for the QFX Series.
Description	Configure the number of liveness detection requests not received by the peer before Bidirectional Forwarding Detection (BFD) declares the peer is down.
Options	number —Maximum allowable number of liveness detection requests missed by the peer. Range: 1 through 255 Default: 3
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

multi-chassis

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	<pre>multi-chassis { multi-chassis-protection peer-ip-address { interface interface-name; } mc-lag consistency-check; }</pre>
Hierarchy Level	[edit]
Release Information	<p>Statement introduced in Junos OS Release 9.6 for MX Series routers.</p> <p>Statement introduced in Junos OS Release 12.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>
Description	<p>Configure an interchassis link-protection link (ICL-PL) between the two peers that host a multichassis link aggregation group (MC-LAG). You can configure either an aggregated Ethernet interface or a 10-Gigabit Ethernet interface to be an ICL-PL.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>

multi-chassis-protection

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	<pre>multi-chassis-protection peer-ip-address { interface interface-name; }</pre>
Hierarchy Level	[edit multi-chassis]
Release Information	<p>Statement introduced in Junos OS Release 9.6 for MX Series routers.</p> <p>Statement introduced in Junos OS Release 12.2 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 12.3R2 for EX Series switches.</p>
Description	<p>Configure multichassis link protection between the two peers that host a multichassis link aggregation group (MC-LAG). If the Interchassis Control Protocol (ICCP) connection is up and the interchassis link (ICL) comes up, the peer configured as standby brings up the multichassis aggregated Ethernet interfaces shared with the peer. Multichassis protection must be configured on one interface for each peer.</p> <p>The remaining statement is explained separately.</p>
Required Privilege Level	<p>interface—To view this statement in the configuration.</p> <p>interface-control—To add this statement to the configuration.</p>

no-adaptation (Liveness Detection)

Supported Platforms	EX4600, MX Series, QFX Series
Syntax	no-adaptation;
Hierarchy Level	[edit protocols iccp peer liveness-detection]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series.
Description	Configure Bidirectional Forwarding Detection (BFD) sessions to not adapt to changing network conditions.
Required Privilege	routing—To view this statement in the configuration.
Level	routing-control—To add this statement to the configuration.

peer (ICCP)

Supported Platforms EX Series, MX Series, QFX Series

Syntax

```
peer ip-address {
    authentication-key string;
    backup-liveness-detection {
        backup-peer-ip ip-address;
    }
    liveness-detection {
        detection-time {
            threshold milliseconds;
        }
        minimum-interval milliseconds;
        minimum-receive-interval milliseconds;
        multiplier number;
        no-adaptation;
        transmit-interval {
            minimum-interval milliseconds;
            threshold milliseconds;
        }
        version (1 | automatic);
    }
    local-ip-addr ipv4-address;
    session-establishment-hold-time seconds;
}
```

Hierarchy Level [edit protocols iccp]

Release Information Statement introduced in Junos OS Release 10.0 for MX Series routers.
Statement introduced in Junos OS Release 12.2 for the QFX Series.
Statement introduced in Junos OS Release 12.3R2 for EX Series switches.

Description Configure the peers that host a multichassis link aggregation group (MC-LAG). You must configure Inter-Chassis Control Protocol (ICCP) for both peers that host the MC-LAG.



NOTE: Backup liveness detection is not supported on MX Series routers.

The remaining statements are explained separately.

Required Privilege Level routing—To view this statement in the configuration.
routing-control—To add this statement to the configuration.

peer (Multichassis)

Supported Platforms [EX4600](#), [MX Series](#), [QFX Series](#)

Syntax `peer ip-address {
 interface interface-name;
}`

Hierarchy Level [edit [multi-chassis](#)]

Release Information Statement introduced in Junos OS Release 9.6 for MX Series routers.
Statement introduced in Junos OS Release 12.2 for the QFX Series.

Description Configure the IP address of the peer that is part of the interchassis link-protection link (ICL-PL). If Inter-Chassis Control Protocol (ICCP) is up and the interchassis link (ICL) comes up, the peer configured as standby will bring up the multichassis aggregated Ethernet interfaces shared with the active peer specified by the **peer** statement. You must specify the physical interface of the peer.

The remaining statement is explained separately.

Required Privilege Level interface—To view this statement in the configuration.
interface-control—To add this statement to the configuration.

peers (Commit)

Supported Platforms [EX Series, MX Series](#)

Syntax

```
peers {
  name of peer {
    user name of user;
    authentication string;
  }
}
```

Hierarchy Level [edit system commit]

Release Information Statement introduced in Junos OS Release 14.2R6 for the MX Series.
Statement introduced in Junos OS Release 16.1R1 for the EX Series.

Description Configure options for the peers participating in commit synchronization.

Options

- name of peer*—Hostname or IP address of the peer participating in commit synchronization.
- user*—Name of administrator configuring commit synchronization.
- authentication*—Plain-text password string that is stored as an encrypted password string.

Required Privilege Level

- maintenance—To view this statement in the configuration.
- maintenance-control—To add this statement to the configuration.

Related Documentation

- *delta-export*
- *fast-synchronize*
- [peers-synchronize on page 454](#)
- *persist-groups-inheritance*
- *server*
- *synchronize*

peers-synchronize

Supported Platforms	EX Series, MX Series
Syntax	peers-synchronize;
Hierarchy Level	[edit system commit]
Release Information	Statement introduced in Junos OS Release 14.2R6 for the MX Series. Statement introduced in Junos OS Release 16.1R1 for the EX Series.
Description	Configure the commit command to automatically perform a peers-synchronize action between peers. The local peer (or requesting peer) on which you enable the peers-synchronize statement copies and loads its configuration to the remote (or responding) peer. Each peer then performs a syntax check on the configuration file being committed. If no errors are found, the configuration is activated and becomes the current operational configuration on both peers.
Required Privilege Level	system—To view this statement in the configuration. system-control—To add this statement to the configuration.
Related Documentation	<ul style="list-style-type: none">• <i>delta-export</i>• <i>fast-synchronize</i>• <i>persist-groups-inheritance</i>• <i>server</i>• <i>synchronize</i>


status-control

Supported Platforms	EX Series, QFX Series
Syntax	status-control (active standby);
Hierarchy Level	[edit interfaces aggregated-ether-options mc-ae]
Release Information	Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Specify whether a peer hosting a multichassis link aggregation group (MC-LAG) is primary or secondary. Primary is considered active, and secondary is considered standby.
Required Privilege Level	interface—To view this statement in the configuration. interface-control—To add this statement to the configuration.

session-establishment-hold-time

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	session-establishment-hold-time <i>seconds</i> ;
Hierarchy Level	[edit protocols iccp], [edit protocols iccp peer]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	Specify the time during which an Inter-Chassis Control Protocol (ICCP) connection must be established between peers.
Options	<i>seconds</i> —Time (in seconds) within which a successful ICCP connection must be established.
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

threshold (Detection Time)

Supported Platforms	EX4600, MX Series, QFX Series
Syntax	threshold <i>milliseconds</i> ;
Hierarchy Level	[edit protocols iccp peer liveness-detection detection-time]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series.
Description	Specify the threshold for the adaptation of the detection time for a Bidirectional Forwarding Detection (BFD) session. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.
<div style="display: flex; align-items: center;">  <p>NOTE: The threshold time must be greater than or equal to the minimum-interval or the minimum-receive-interval values.</p> </div>	
Options	<i>milliseconds</i> — Value for the detection time adaptation threshold. Range: 1 through 255,000
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

transmit-interval (Liveness Detection)

Supported Platforms	EX Series, MX Series, QFX Series
Syntax	<pre>transmit-interval { minimum-interval <i>milliseconds</i>; threshold <i>milliseconds</i>; }</pre>
Hierarchy Level	[edit protocols iccp peer liveness-detection]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series. Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Description	<p>Configure the Bidirectional Forwarding Detection (BFD) transmit interval. The negotiated transmit interval for a peer is the interval between the sending of BFD liveness detection requests to peers. The receive interval for a peer is the minimum interval between receiving packets sent from its peer; the receive interval is not negotiated between peers. To determine the transmit interval, each peer compares its configured minimum transmit interval with its peer's minimum receive interval. The larger of the two numbers is accepted as the transmit interval for that peer.</p> <p>The remaining statements are explained separately.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

version (Liveness Detection)

Supported Platforms	EX4600, MX Series, QFX Series
Syntax	<pre>version (1 automatic);</pre>
Hierarchy Level	[edit protocols iccp peer liveness-detection]
Release Information	Statement introduced in Junos OS Release 10.0 for MX Series routers. Statement introduced in Junos OS Release 12.2 for the QFX Series.
Description	Configure the Bidirectional Forwarding Detection (BFD) protocol version to detect.
Options	<p>1—Use BFD protocol version 1.</p> <p>automatic—Autodetect the BFD protocol version.</p>
Required Privilege Level	routing—To view this statement in the configuration. routing-control—To add this statement to the configuration.

when

Supported Platforms	ACX Series, EX Series, J Series, M Series, MX Series, QFX Series, T Series
Syntax	<pre> when { chassis <i>chassis-id</i>; member <i>member-id</i>; model <i>model-id</i>; node [<i>names of peers</i>] <i>node-id</i>; peers [<i>names of peers</i>]; routing-engine <i>routing-engine-id</i>; time <<i>start-time</i>> [to <<i>end-time</i>>]; } </pre>
Hierarchy Level	[edit groups <i>group-name</i>]
Release Information	<p>Statement introduced in Junos OS Release 11.3.</p> <p>peers option added in Junos OS Release 14.2R6 for the MX Series.</p> <p>peers option added in Junos OS Release 16.1R1 for the EX Series.</p>
Description	Define conditions under which the configuration group should be applied. Conditions include the type of chassis, model, or Routing Engine, virtual chassis member, cluster node, and start and optional end time of day. If you specify multiple conditions in a single configuration group, all conditions must be met before the configuration group is applied.
Options	<p>chassis <i>chassis-id</i>—Specify the chassis type of the router. Valid types include SCC0, SCC1, LCC0, LCC1 ... LCC3.</p> <p>member <i>member-id</i>—Specify the name of the member of the virtual chassis.</p> <p>model <i>model-id</i>—Specify the model name of the router, such as m7i or tx100.</p> <p>node <i>node-id</i>—Specify the cluster node.</p> <p>peers [<i>names of peers</i>]—Specify the names of the MC-LAG peers participating in commit synchronization.</p> <p>routing-engine <i>routing-engine-id</i>—Specify the type of Routing Engine, re0 or re1.</p> <p>time <<i>start-time</i>> [to <<i>end-time</i>>]—Specify the start time or time duration for this configuration group to be applied. If only the start time is specified, the configuration group is applied at the specified time and remains in effect until the time is changed. If the end time is specified, then on each day, the applied configuration group is started and stopped at the specified times. The syntax for specifying the time is: time <<i>start-time</i>> [to <<i>end-time</i>>] using the time format yyyy-mm-dd.hh:mm, hh:mm, or hh.</p>
Required Privilege Level	configure—To enter configuration mode.
Related Documentation	<ul style="list-style-type: none"> Creating the Junos OS Configuration Group

- [apply-groups on page 434](#)
- *apply-groups-except*
- [groups on page 440](#)

CHAPTER 12

Operational Commands

- request interface mc-ae switchover (Multichassis Link Aggregation)
- request interface (revert | switchover) (Aggregated Ethernet Link Protection)
- request lacp link-switchover
- show iccp
- show interfaces mc-ae
- show l2-learning redundancy-groups
- show multi-chassis mc-lag configuration-consistency list-of-parameters
- show multi-chassis mc-lag configuration-consistency
- show multi-chassis mc-lag configuration-consistency global-config
- show multi-chassis mc-lag configuration-consistency icl-config
- show multi-chassis mc-lag configuration-consistency mcae-config
- show multi-chassis mc-lag configuration-consistency vlan-config
- show multi-chassis mc-lag configuration-consistency vrrp-config

request interface mc-ae switchover (Multichassis Link Aggregation)

Supported Platforms [MX Series](#)

Syntax request interface mc-ae switchover
<immediate> mcae-id *mcae-id*;
mcae-id *mcae-id*;

Release Information Command introduced in Junos OS Release 13.3.

Description Manually revert egress traffic from the active node to the designated preferred node of a multichassis aggregated Ethernet interface. You can use this command to manually switch over traffic to the preferred node when the **switchover-mode** statement for the multichassis aggregated Ethernet interface is configured as **non-revertive** at the **[edit interfaces aeX mc-ae]** hierarchy level.



NOTE: To run this command successfully, the **status-control** statement should be configured as **active** at the **[edit interfaces aeX mc-ae]** hierarchy level.

Options **immediate**—(Optional) Trigger immediate switchover to the preferred node. If this option is not configured, Junos OS waits for the timer configured using the **revert-time** statement at the **[edit interfaces aeX mc-ae]** hierarchy level to expire before it triggers the switchover.

mcae-id *mcae-id*—Triggers switchover for the specified mc-ae interface.

Required Privilege Level view

Related Documentation

- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [Configuring Manual and Automatic Link Switchover for MC-LAG Interfaces on page 99](#)

List of Sample Output [request interface mc-ae switchover immediate mcae-id on page 460](#)
[request interface mc-ae switchover mcae-id on page 461](#)

Output Fields When you enter this command, you are provided feedback on the status of your request.

Sample Output

request interface mc-ae switchover immediate mcae-id

```
user@host >request interface mc-ae switchover immediate mcae-id 2
MCAE: Switchover Done
```

Sample Output

`request interface mc-ae switchover mcae-id`

```
user@host >request interface mc-ae switchover mcae-id 2
Switchover In Progress: Please check after 1 minutes,
Use "show interfaces mc-ae revertive-info" to check for the status
```

request interface (revert | switchover) (Aggregated Ethernet Link Protection)

Supported Platforms EX Series, M Series, MX Series, PTX Series, T Series

Syntax request interface (revert | switchover) aex

Release Information Command introduced in Junos OS Release 8.3.

Description Manually revert egress traffic from the designated backup link to the designated primary link of an aggregated Ethernet interface for which link protection is enabled, or manually switch egress traffic from the primary link to the backup link. This traffic includes transit traffic and local traffic originated on the router itself.



NOTE: When link protection is enabled on an aggregated Ethernet interface, if the primary link fails, the router automatically routes egress traffic to the backup link. However, the router does not automatically route egress traffic back to the primary link when the primary link is subsequently reestablished. Instead, you manually control when to have traffic diverted back to the primary link by issuing the `request interface (revert | switchover) (Aggregated Ethernet Link Protection)` operational command and specifying the `revert` keyword.

On M Series and T Series routers, use the `request interface (revert | switchover) (Adaptive Services)` operational command to manually revert to the primary adaptive services interface or link services interface, or to switch from the primary to the secondary interface. For information about this command, see *request interface (revert | switchover) (Adaptive Services)*.

Options `revert`—Restores egress traffic processing to the primary link.

`switchover`—Transfers egress traffic processing to the secondary (backup) link.

`aex`—Aggregated Ethernet logical interface number: 0 through 15.

Required Privilege Level view

List of Sample Output [request interface revert on page 462](#)

Output Fields When you enter this command, you are provided feedback on the status of your request.

Sample Output

request interface revert

```
user@host >request interface revert ael
```


request lacp link-switchover

Supported Platforms [EX Series](#), [M Series](#), [MX Series](#), [PTX Series](#), [T Series](#)

Syntax request lacp link-switchover aex

Release Information Command introduced in Junos OS Release 9.3.

Description Manually switch aggregated Ethernet active or standby LACP links.



NOTE: Because this command overrides LACP priority calculations, we strongly recommend that you use this command only when the actor (in this case, the Juniper Networks router) is controlling the active or standby link and the partner (peer) is following. This scenario occurs when you configure only the actor for link protection.

Options aex—Aggregated Ethernet logical interface number: 0 through 15.

Required Privilege Level view

List of Sample Output [request lacp link-switchover aeX on page 463](#)

Output Fields When you enter this command, you are provided feedback on the status of your request. To view the switchover, use the **show lacp interfaces** command.

Sample Output

request lacp link-switchover aeX

```
user@host >request lacp link-switchover ae0ae0: Request succeeded
```

show iccp

Supported Platforms	EX4600, MX Series, QFX Series
Syntax	show iccp <brief detail> logical-system [<i>system-name</i> all]
Release Information	Command introduced in Junos OS Release 10.0 for the MX Series. Support for logical systems added in Junos OS Release 14.1 for MX Series routers. Command introduced in Junos OS Release 12.2 for the QFX Series.
Description	Display Inter-Chassis Control Protocol (ICCP) information about the multichassis link aggregation group (MC-LAG) peers, including the state of the TCP connection, Bidirectional Forwarding Detection (BFD) protocol, backup liveness peer status, and MCSNOOPD, LACPD, and ESWD applications.
Options	<p>none—Display ICCP information about the MC-LAG peers, including the state of the TCP connection and BFD protocol, and MCSNOOPD, LACP, and ESWD applications.</p> <p>brief—Display brief ICCP information about the MC-LAG peers, including the state of the TCP connection and BFD protocol, and MCSNOOPD, LACP, and ESWD applications.</p> <p>detail—Display detailed ICCP information about the MC-LAG peers, including the state of the TCP connection and BFD protocol, and MCSNOOPD, LACP, and ESWD applications.</p> <p>logical-system [<i>system-name</i> all]—(Optional) Display information for a specified logical system or all systems.</p>
Required Privilege Level	view
Related Documentation	<ul style="list-style-type: none"> • iccp on page 442
List of Sample Output	show iccp (QFX Series) on page 465 show iccp (MX Series) on page 465
Output Fields	Table 17 on page 464 lists the output fields for the show iccp command. Output fields are listed in the approximate order in which they appear.

Table 17: show iccp Output Fields

Field Name	Field Description
Redundancy Group Information for peer	Aggregated Ethernet interface name.
TCP Connection	Specifies if the TCP connection between the peers hosting the MC-LAG is up or down.
Liveness Detection	Specifies if liveness detection, also known as Bidirectional Forwarding Detection (BFD), is up or down.
Client Application	Specifies information regarding the state of the MCSNOOPD and client applications.

Sample Output

show iccp (QFX Series)

```
user@switch> show iccp
Redundancy Group Information for peer 10.3.3.2
  TCP Connection      : Established
  Liveliness Detection : Up

Client Application: MCSN00PD

Client Application: eswd
```

show iccp (MX Series)

```
user@host> show iccp
Logical system :LS1
  Redundancy Group Information for peer 10.1.1.1
    TCP Connection      : Established
    Liveliness Detection : Up
    Redundancy Group ID      Status
      1                      Up
      2                      Up

Client Application: lacpd
Redundancy Group IDs Joined: 1
Redundancy Group IDs Joined: 2

Client Application: l2ald_iccpd_client
Redundancy Group IDs Joined: 1
Redundancy Group IDs Joined: 2
```

show interfaces mc-ae

Supported Platforms [EX Series](#), [MX Series](#), [QFX Series](#)

Syntax `show interfaces mc-ae id identifier unit number`

Release Information Command introduced in Junos OS Release 9.6 for the MX Series.
Command introduced in Junos OS Release 12.2 for the QFX Series.
Statement introduced in Junos OS Release 12.3R2 for EX Series switches.
Configuration Consistency Check output field added in Junos OS Release 15.1X53-D60 for the QFX Series.

Description On peers with multichassis aggregated Ethernet (**mc-aeX**) interfaces, use this command to display information about the multichassis aggregated Ethernet interfaces.

Options `id identifier`—(Optional) Specify the name of the multichassis aggregated Ethernet interface.

`unit number`—(Optional) Specify the logical interface by unit number.

Required Privilege Level view

Related Documentation

- [Configuring Multichassis Link Aggregation on page 35 \(QFX Series Switches\)](#)
- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32 \(EX Series Switches\)](#)
- [Example: Configuring Multichassis Link Aggregation on page 41 \(QFX Series Switches\)](#)
- [Example: Configuring Multichassis Link Aggregation with Layer 3 MAC Address Synchronization on page 214 \(QFX Series Switches\)](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast using MAC Address Synchronization on page 236 \(QFX Series Switches\)](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on page 253 \(QFX Series Switches\)](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Unicast Using VRRP on EX9200 Switches on page 195 \(EX Series Switches\)](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on page 280 \(QFX Series Switches\)](#)
- [Example: Configuring Multichassis Link Aggregation for Layer 3 Multicast Using VRRP on EX9200 Switches on page 174 \(EX Series Switches\)](#)

List of Sample Output [show interfaces mc-ae \(EX Series \) on page 467](#)
[show interfaces mc-ae \(MX Series\) on page 468](#)
[show interfaces mc-ae \(Active/Active Bridging and VRRP over IRB on MX Series\) on page 468](#)

Output Fields Table 18 on page 467 lists the output fields for the **show interfaces mc-ae** command. Output fields are listed in the approximate order in which they appear.

Table 18: show interfaces mc-ae Output Fields

Output Field Name	Field Description
Current State Machine's State	Specifies the state of the MC-LAG initialization state machine.
Configuration Consistency Check	Specifies the status of the MC-LAG configuration consistency check feature. The status is either Passed or Failed . If the status is Failed , the system will display the name of the parameter that failed consistency check. If there are multiple inconsistencies, only the first inconsistency is shown. If the enforcement level for the MC-LAG parameter was mandatory, and you did not configure that parameter correctly, the command will show that the MC-LAG interface is down.
Member Link	Specifies the identifiers of the configured multichassis link aggregated interface members.
Local Status	Specifies the status of the local link: active or standby .
Peer Status	Specifies the status of the peer link: active or standby .
Peer State	Specifies the status of the local and peer links in an active/active MC-LAG configuration.
Logical Interface	Specifies the identifier and unit of the AE interface.
Topology Type	Specifies the bridge configured on the AE.
Local State	Specifies if the local device is up or down.
Peer State	Specifies if the peer device is up or down.
Peer Ip/MCP/State	Specifies the multichassis protection (MCP) link or the interchassis link-protection link (ICL-PL) for all of the multichassis aggregated Ethernet interfaces that are part of the peer.

Sample Output

show interfaces mc-ae (EX Series)

```

user@switch> show interfaces mc-ae ae1 512
Member Link           : ae1
Current State Machine's State: mcae active state
Configuration Consistency Check : Failed (redundancy group id mismatch)
Local Status          : active
Local State           : up
Peer Status           : standby
Peer State            : up
  Logical Interface    : ae1.0
  Topology Type        : bridge

```

```
Local State           : up
Peer State            : up
Peer Ip/MCP/State     : 10.1.1.1 ae0.0 up
```

show interfaces mc-ae (MX Series)

```
user@host> show interfaces mc-ae ae0 unit 512
Member Links   : ae0
Local Status   : active
Peer Status    : active
Logical Interface : ae0.512
Core Facing Interface : Label Ethernet Interface
ICL-PL         : Label Ethernet Interface
```

show interfaces mc-ae (Active/Active Bridging and VRRP over IRB on MX Series)

```
user@host# show interfaces mc-ae ge-0/0/0.0
Member Link           : ae0
Current State Machine's State: active
Local Status          : active
Local State           : up
Peer Status           : active
Peer State            : up
Logical Interface     : ae0.0
Topology Type         : bridge
Local State           : up
Peer State            : up
Peer Ip/ICL-PL/State  : 192.168.100.10 ge-0/0/0.0 up
```

show l2-learning redundancy-groups

Supported Platforms [EX Series](#), [MX Series](#)

Syntax `show l2-learning redundancy-groups`
`logical-system [system-name | all]`
`<redundancy-group-id [0 to 4294967294]>`
`arp-statistics`
`nd-statistics`
`remote-macs`

Release Information Command introduced in Junos OS Release 13.2.
 Support for logical systems added in Junos OS Release 14.1.
 Command introduced in Junos OS Release 15.1R1 for EX Series switches

Description (MX Series routers and EX9200 switches only) Display ARP statistics, Neighbor Discovery statistics, or remote MAC addresses for the Multi-Chassis Aggregated Ethernet (MC-AE) nodes for all or specified redundancy groups on a router or switch or logical systems on a router or switch. Note that the Redundancy Group ID is inherited by the bridging domain or VLAN from member AE interfaces.

Options `logical-system [system-name | all]`—(Optional) Display information for a specified logical system or all systems.

`redundancy-group-id`—(Optional) The redundancy group identification number. The Inter-Chassis Control Protocol (ICCP) uses the redundancy group ID to associate the routing or switching devices contained in a redundancy group.

`arp-statistics`—(Optional) Count of ARP packets sent and received by the two MC-AE nodes.

`nd-statistics`—(Optional) Count of Neighbor Discovery packets sent and received by the two MC-AE nodes.

`remote-macs`—(Optional) List of remote MAC addresses in the “Installed” state, as learned from the remote MC-AE node.

Required Privilege Level view

Related Documentation

- [Configuring Multichassis Link Aggregation on MX Series Routers on page 27](#)
- [show interfaces mc-ae](#)
- [Configuring Active-Active Bridging and VRRP over IRB in Multichassis Link Aggregation on page 87](#)
- [Configuring Multichassis Link Aggregation on EX Series Switches on page 32](#)

List of Sample Output [show l2-learning redundancy-groups arp-statistics on page 471](#)
[show l2-learning redundancy-groups nd-statistics on page 471](#)
[show l2-learning redundancy-groups remote-macs on page 472](#)

[show l2-learning redundancy-groups logical-system arp-statistics \(for Logical Systems\) on page 472](#)

[show l2-learning redundancy-groups logical-system nd-statistics \(for Logical Systems\) on page 472](#)

[show l2-learning redundancy-groups group-id on page 472](#)

[show l2-learning redundancy-groups logical-system on page 472](#)

Output Fields Output fields are listed in the approximate order in which they appear.

Table 19: show l2-learning redundancy-groups arp-statistics Output Fields

Field Name	Field Description
Redundancy Group ID	Redundancy Group to which the following details apply.
MCLAG ARP Statistics Group ID	ARP statistics for this Multichassis Link Aggregation Group (MC-LAG) instance.
ARP Rx Count From Line	Total number of ARPs received from the Line.
ARP Tx Count To Peer	Total number of ARPs sent to the peer.
ARP Rx Count From Peer	Total number of ARPs received from the peer.
ARP Drop Count received from line	Total number of ARPs sent by the peer that were received.
ARP Drop Count received from peer	Total number of ARPs sent by the peer that were dropped
Service-id	Service ID (configured at the routing instance level).

Table 20: show l2-learning redundancy-groups nd-statistics Output Fields

Field Name	Field Description
Redundancy Group ID	Redundancy Group to which the following details apply.
MCLAG ND Statistics Group ID	Neighbor Discovery statistics for this Multichassis Link Aggregation Group (MC-LAG) instance.
ND Rx Count From Line	Total number of Neighbor Discovery packets received from the Line.
ND Tx Count To Peer	Total number of Neighbor Discovery packets sent to the peer.
ND Rx Count From Peer	Total number of Neighbor Discovery packets received from the peer.
ND Drop Count received from line	Total number of Neighbor Discovery packets sent by the peer that were received.

Table 20: show l2-learning redundancy-groups nd-statistics Output Fields (*continued*)

Field Name	Field Description
ND Drop Count received from peer	Total number of Neighbor Discovery packets sent by the peer that were dropped
Service-id	Service ID (configured at the routing instance level).

Table 21: show l2-learning redundancy-groups remote-macs Output Fields

Field Name	Field Description
Redundancy Group ID	Redundancy Group to which the following details apply.
Peer-Addr	IP address of the remote peer.
VLAN	Virtual LAN identifier associated with the redundancy group.
MAC	Hardware media access control address associated with the redundancy group.
MCAE-ID	ID number of the MC-AE used by the redundancy group.
Flags	Connection state: local connect or Remote connect. If no flag is shown, the redundancy group may not be connected.
Status	Installation state: Installed or Not Installed.

Sample Output

show l2-learning redundancy-groups arp-statistics

```

user@host> show l2-learning redundancy-groups arp-statistics
Logical System : default
Redundancy Group ID : 1      Flags : Local Connect, Remote Connect

MCLAG ARP Statistics
Group ID                  : 1
ARP Rx Count From Line    : 52
ARP Tx Count To Peer      : 15
ARP Rx Count From Peer    : 39
ARP Install Count         : 34
ARP Drop Count received from line : 37
ARP Drop Count received from peer : 5

```

show l2-learning redundancy-groups nd-statistics

```

user@host> show l2-learning redundancy-groups nd-statistics
Logical System : default
Redundancy Group ID : 1      Flags : Local Connect, Remote Connect

MCLAG ND Statistics
Group ID                  : 1
ND Rx Count From Line     : 52
ND Tx Count To Peer       : 15

```

```
ND Rx Count From Peer           : 39
ND Install Count                 : 34
ND Drop Count received from line : 37
ND Drop Count received from peer : 5
```

show l2-learning redundancy-groups remote-macs

```
user@host> show l2-learning redundancy-groups <redundancy-group-id> remote-macs
Redundancy Group ID : 1      Flags : Local Connect, Remote Connect
```

Service-id	Peer-Addr	VLAN	MAC	MCAE-ID	Subunit	Opcode
Flags	Status					
10	10.1.1.2	100	64:87:88:6a:df:f0	1	0	1
0	Installed					

show l2-learning redundancy-groups logical-system arp-statistics (for Logical Systems)

```
user@host> show l2-learning redundancy-groups logical-system LS1 arp-statistics
```

```
Redundancy Group ID : 1      Flags : Local Connect, Remote Connect
```

```
MCLAG ARP Statistics
Group ID                : 1
ARP Rx Count From Line  : 52
ARP Tx Count To Peer    : 15
ARP Rx Count From Peer  : 39
ARP Install Count       : 34
ARP Drop Count received from line : 37
ARP Drop Count received from peer : 5
```

show l2-learning redundancy-groups logical-system nd-statistics (for Logical Systems)

```
user@host> show l2-learning redundancy-groups logical-system LS1 nd-statistics
```

```
Redundancy Group ID : 1      Flags : Local Connect, Remote Connect
```

```
MCLAG ND Statistics
Group ID                : 1
ND Rx Count From Line   : 52
ND Tx Count To Peer     : 15
ND Rx Count From Peer   : 39
ND Install Count        : 34
ND Drop Count received from line : 37
ND Drop Count received from peer : 5
```

show l2-learning redundancy-groups group-id

```
user@host> show l2-learning redundancy-groups 1
```

```
Redundancy Group ID : 1      Flags : Local Connect, Remote Connect
```

show l2-learning redundancy-groups logical-system

```
user@host> show l2-learning redundancy-groups logical-system ls1
```

```
Redundancy Group ID : 2      Flags : Local Connect, Remote Connect
```

show multi-chassis mc-lag configuration-consistency list-of-parameters

Supported Platforms EX Series

Syntax show multichassis configuration-check list-of-parameters

Release Information Command introduced in Junos OS Release 16.1R1 for the EX Series.

Description Displays the list of MC-LAG parameters (referred to as configuration knobs in the CLI) that are checked for consistency across MC-LAG peers. There are certain parameters that must be identical and others that must be unique on both peers. Enforcement of the consistency check for the parameters is either mandatory or desired. If the enforcement is mandatory, and you have not configured the parameter correctly, the multichassis aggregated Ethernet interface (MC-AE) interface will not come up. If the enforcement is desired, and you have not configured the parameter correctly, the MC-AE interface will come up, but performance might be sub-optimal. In this situation, the system will issue a syslog message.

The following list provides the hierarchies in which the MC-LAG parameters are configured:

- **ICL ifd**
Specifies configuration parameters related to the interchassis control link
- **ICCP Peer**
Specifies configuration parameters related to ICCP functionality
- **IRB Interface**
Specifies configuration parameters related to the integrated routing and bridging interface
- **MCAE IFBD**
Specifies configuration parameters related to the VLAN membership of a given MC-AE interface
- **MCAE ifd**
Specifies configuration parameters related to a given MC-AE interface
- **MCAE ifl**
Specifies configuration parameters related to a given MC-AE logical interface
- **VLAN**
Specifies configuration parameters related to a given VLAN
- **VRRP Group**
Specifies configuration parameters related to a VRRP session

Options There are no options for this command.

Required Privilege Level view

List of Sample Output [show multi-chassis mc-lag configuration-consistency list-of-parameters on page 479](#)

Output Fields Table 22 on page 474 lists the output fields for the **show multi-chassis mc-lag configuration-consistency list-of-parameters** command.

Table 22: show multi-chassis mc-lag configuration-consistency list-of-parameters Output

Configuration Knob	Hierarchy
session-establishment-hold-time Specify the time during which an Inter-Chassis Control Protocol (ICCP) connection must be established between peers.	Global, ICCP Peer
mac-limit Specify the maximum number of MAC addresses to be associated with a VLAN—the default is unlimited, which can leave the network vulnerable to flooding.	Global
mac-aging-timer Specify how long MAC addresses remain in the Ethernet switching table.	Global
arp-aging-timer Specify the ARP aging timer in minutes for a logical interface of inet .	Global
rstp-system-identifier Specify different bridge identifiers for different RSTP routing instances.	Global
mstp-system-identifier Specify different bridge identifiers for different MSTP routing instances.	Global
rstp-bridge-priority Determine which bridge is elected as the root bridge for RSTP. If two bridges have the same path cost to the root bridge, the bridge priority determines which bridge becomes the designated bridge for a LAN segment.	Global
mstp-bridge-priority Determine which bridge is elected as the root bridge for MSTP. If two bridges have the same path cost to the root bridge, the bridge priority determines which bridge becomes the designated bridge for a LAN segment.	Global

Table 22: show multi-chassis mc-lag configuration-consistency list-of-parameters Out

Configuration Knob	Hierarchy
rstp-bpdu-block-on-edge Configure bridge protocol data unit (BPDU) protection on all edge ports of a switch for RSTP.	Global
vstp-bpdu-block-on-edge Configure bridge protocol data unit (BPDU) protection on all edge ports of a switch for VSTP.	Global
mstp-bpdu-block-on-edge Configure bridge protocol data unit (BPDU) protection on all edge ports of a switch for MSTP.	Global
service-id Specify a service identifier for each multichassis aggregated Ethernet interface that belongs to a link aggregation group (LAG).	Global
bfd minimum-interval Configure the minimum interval after which the local routing device transmits hello packets and then expects to receive a reply from a neighbor with which it has established a BFD session.	ICCP Peer
iccp/minimum-transmit-interval Specify the minimum interval at which the local routing device transmits hello packets to a neighbor with which it has established a BFD session.	ICCP Peer
iccp/minimum-receive-interval Specify the minimum interval after which the local routing device must receive a reply from a neighbor with which it has established a BFD session.	ICCP Peer
iccp/bfd multiplier Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.	ICCP Peer
iccp single-hop Configure single hop BFD sessions.	ICCP Peer
iccp/authentication-key Specify the authentication key password to verify the authenticity of packets sent from the peers hosting an MC-LAG.	ICCP Peer

Table 22: show multi-chassis mc-lag configuration-consistency list-of-parameters Out

Configuration Knob	Hierarchy
redundancy-group-id-list Specify the redundancy group identification number. The Inter-Chassis Control Protocol (ICCP) uses the redundancy group ID to associate multiple chassis that perform similar redundancy functions.	ICCP Peer
backup-liveness-detection Determine whether a peer is up or down by exchanging keepalive messages over the management link between the two Inter-Chassis Control Protocol (ICCP) peers.	ICCP Peer
mc-ae-id Specify the identification number of the MC-LAG device.	MCAE ifd
mcae redundancy-group Used by ICCP to associate multiple chassis that perform similar redundancy functions and to establish a communication channel so that applications on peering chassis can send messages to each other.	MCAE ifd
mcae chassis-id Used by LACP for calculating the port number of the MC-LAG's physical member links.	MCAE ifd
mcae deployment mode Indicates whether an MC-LAG is in active-standby mode or active-active mode.	MCAE ifd
mcae status-control Specify whether the chassis becomes active or remains in standby mode when an interchassis link failure occurs.	MCAE ifd
force-icl-down Specify that if the node's ICCP peer goes down, the system brings down the interchassis-link logical interface.	MCAE ifd
prefer-status-control-active Specify that the node configured as status-control active becomes the active node if the peer of this node goes down.	MCAE ifd
lacp mode Specify LACP is active or passive.	MCAE ifd

Table 22: show multi-chassis mc-lag configuration-consistency list-of-parameters Out

Configuration Knob	Hierarchy
lacp periodic Specify the interval for periodic transmission of LACP packets.	MCAE ifd
lacp system-id Define the LACP system identifier at the aggregated Ethernet interface level.	MCAE ifd
lacp admin-key Specify an administrative key for the router or switch.	MCAE ifd
native-vlan-id Configure mixed tagging support for untagged packets on a port.	MCAE ifd
mcae-mac-synchronize Synchronize the MAC addresses for the Layer 3 interfaces of the switches participating in the MC-LAG.	VLAN
Interface mac Limit Configure a limit to the number of MAC addresses that can be learned from a bridge domain, VLAN, virtual switch, or set of bridge domains or VLANs.	VLAN
l3-interface Associate a Layer 3 interface with the VLAN.	VLAN
igmp-snooping Enable IGMP snooping. A Layer 2 device monitors the IGMP join and leave messages sent from each connected host to a multicast router. This enables the Layer 2 device to keep track of the multicast groups and associated member ports. The Layer 2 device uses this information to make intelligent decisions and to forward multicast traffic to only the intended destination hosts.	VLAN
family Specify the protocol family configured on the logical interface.	IRB Interface
ipv4 address Specify an IPv4 address for the IRB interface.	IRB Interface

Table 22: show multi-chassis mc-lag configuration-consistency list-of-parameters Out

Configuration Knob	Hierarchy
ipv6 address Specify an IPv6 address for the IRB interface.	IRB Interface
vrrp-group id Specify a VRRP group identifier.	IRB Interface
proxy-arp-type For Ethernet interfaces only, configure the router or switch to respond to any ARP request, as long as the router or switch has an active route to the ARP request's target address.	IRB Interface
vrrp-group priority Configure a Virtual Router Redundancy Protocol (VRRP) router's priority for becoming the master default router. The router with the highest priority within the group becomes the master.	VRRP Group
vrrp-group authentication-key Configure a Virtual Router Redundancy Protocol (VRRP) IPv4 authentication key. You also must specify a VRRP authentication scheme by including the authentication-type statement.	VRRP Group
vrrp-group authentication-type Enable Virtual Router Redundancy Protocol (VRRP) IPv4 authentication and specify the authentication scheme for the VRRP group.	VRRP Group
vrrp-group virtual-address Configure the addresses of the virtual routers in a Virtual Router Redundancy Protocol (VRRP) IPv4 or IPv6 group.	VRRP Group
encapsulation Configure a logical link-layer encapsulation type.	MCAE ifd
flexible-vlan-tagging Support simultaneous transmission of 802.1Q VLAN single-tag and dual-tag frames on logical interfaces on the same Ethernet port, and on pseudowire logical interfaces.	MCAE ifd

Table 22: show multi-chassis mc-lag configuration-consistency list-of-parameters Out

Configuration Knob	Hierarchy
vlan-tagging For Fast Ethernet and Gigabit Ethernet interfaces, aggregated Ethernet interfaces configured for VPLS, and pseudowire subscriber interfaces, enable the reception and transmission of 802.1Q VLAN-tagged frames on the interface.	MCAE ifd
mtu Specify the maximum transmission unit (MTU) size for the media or protocol.	MCAE ifd, ICL ifd
interface-mode Determine whether the logical interface accepts or discards packets based on VLAN tags.	MCAE ifl
vlan membership Specify the name of the VLAN that belongs to an interface.	MCAE ifl

Sample Output

show multi-chassis mc-lag configuration-consistency list-of-parameters

```

user@host> show multi-chassis mc-lag configuration-consistency list-of-parameters
Possible completions:
configuration-consistency Show all configuration consistency information
regress@liki-pe2_re0> show multi-chassis mc-lag configuration-consistency
list-of-parameters
#Item  Configuration Knob                Hierarchy      Consistency
Requirement Enforcement
-----
0      local-ip-addr                      Global         Unique
Mandatory
1      session-establishment-hold-time   Global         Identical
Mandatory
2      local-ip-addr                      ICCP Peer     Unique
Mandatory
3      session-establishment-hold-time   ICCP Peer     Identical
Mandatory
5      bfd minimum-interval              ICCP Peer     Identical
Mandatory
6      iccp/minimum-transmit-interval     ICCP Peer     Identical
Mandatory
7      iccp/minimum-receive-interval      ICCP Peer     Identical
Mandatory
8      iccp/bfd multiplier                ICCP Peer     Identical
Mandatory
9      iccp single-hop                    ICCP Peer     Identical
Mandatory
11     iccp/authentication-key            ICCP Peer     Identical
Mandatory
4      redundancy-group-id-list           ICCP Peer     Identical

```

12	Mandatory backup-liveness-detection	ICCP Peer	Unique
13	Mandatory service-id	Global	Identical
14	Mandatory mac-limit	Global	Identical
15	Desired mac-ageing-timer	Global	Identical
16	Desired arp-ageing-timer	Global	Identical
17	Desired rstp-bpdu-block-on-edge	Global	Identical
18	Desired rstp-bridge-priority	Global	Identical
19	Desired rstp-system-identifier	Global	Identical
20	Desired vstp-bpdu-block-on-edge	Global	Identical
21	Desired mstp-bpdu-block-on-edge	Global	Identical
22	Desired mstp-bridge-priority	Global	Identical
23	Desired mstp-system-identifier	Global	Identical
24	Mandatory mc-ae-id	MCAE ifd	Identical
25	Mandatory mcae redundancy-group	MCAE ifd	Identical
26	Mandatory mcae chassis-id	MCAE ifd	Unique
27	Mandatory mcae deployment mode	MCAE ifd	Identical
28	Mandatory mcae status-control	MCAE ifd	Unique
29	Mandatory force-icl-down	MCAE ifd	Unique
30	Desired prefer-status-control-active	MCAE ifd	Unique
31	Mandatory lacp mode	MCAE ifd	Identical
32	Mandatory lacp periodic	MCAE ifd	Identical
33	Mandatory lacp system-id	MCAE ifd	Identical
34	Mandatory lacp admin-key	MCAE ifd	Identical
59	Mandatory vlan id list	VLAN	Identical
60	Mandatory vlan-ids	VLAN	Identical
62	Mandatory Interface mac Limit	VLAN	Identical
58	Desired service-id	VLAN	Identical
64	Mandatory igmp-snooping-enabled	VLAN	Identical
61	Mandatory mcae-mac-synchronize	VLAN	Identical
45	Mandatory l3-interface	VLAN	Identical
	Desired		

47	ipv4 address	IRB Interface	Unique
	Mandatory		
48	ipv6 address	IRB Interface	Unique
	Mandatory		
49	vrrp-group id	IRB Interface	Identical
	Mandatory		
53	vrrp-group priority	VRRP Group	Unique
	Mandatory		
51	vrrp-group authentication-key	VRRP Group	Identical
	Mandatory		
52	vrrp-group authentication-type	VRRP Group	Identical
	Mandatory		
50	vrrp-group virtual-address	VRRP Group	Identical
	Mandatory		
54	proxy-arp-type	IRB Interface	Identical
	Mandatory		
35	encapsulation	MCAE ifd	Identical
	Mandatory		
36	flexible-vlan-tagging	MCAE ifd	Identical
	Mandatory		
37	vlan-tagging	MCAE ifd	Identical
	Mandatory		
38	mtu	MCAE ifd	Identical
	Mandatory		
39	native-vlan-id	MCAE ifd	Identical
	Mandatory		
40	family	MCAE ifl	Identical
	Mandatory		
42	interface-mode	MCAE ifl	Identical
	Mandatory		
43	vlan	MCAE ifl	Identical
	Mandatory		
44	vlan membership	MCAE ifl	Identical
	Mandatory		
65	ICL interface	ICL ifd	Identical
	Mandatory		
65	ICL interface	ICL ifd	Identical
	Mandatory		
65	ICL interface	ICL ifd	Identical
	Mandatory		
68	encapsulation	ICL ifd	Identical
	Mandatory		
69	flexible-vlan-tagging	ICL ifd	Identical
	Mandatory		
71	vlan-tagging	ICL ifd	Identical
	Mandatory		
70	mtu	ICL ifd	Identical
	Mandatory		
72	native-vlan-id	ICL ifd	Identical
	Mandatory		
73	family	ICL ifl	Identical
	Mandatory		
75	interface-mode	ICL ifl	Identical
	Mandatory		
76	vlan	ICL ifl	Identical
	Mandatory		
77	vlan membership	ICL ifl	Identical
	Mandatory		

show multi-chassis mc-lag configuration-consistency

Supported Platforms [EX Series](#)

Syntax `show multi-chassis mc-lag configuration-consistency (brief | detail)`

Release Information Command introduced in Junos OS Release 16.1R1 for the EX Series.

Description Displays configuration consistency check status for various MC-LAG parameters .



NOTE: This command only displays MC-LAG parameters that are committed.

Options `none`—Display configuration consistency check status for various MC-LAG parameters.

Required Privilege Level view

List of Sample Output [show multi-chassis mc-lag configuration-consistency on page 483](#)

Output Fields [Table 23 on page 482](#) lists the output fields for the **show multi-chassis mc-lag configuration-consistency** command. Output fields are listed in the approximate order in which they appear.

Table 23: show multi-chassis mc-lag configuration-consistency Output Fields

Output Field Name	Field Description
Configuration Item	Name of the committed MC-LAG parameter.
Local Physical Interface	Name of the physical interface configured on the local MC-LAG peer.
Peer Physical Interface	Name of the physical interface configured on the remote MC-LAG peer.
Local Logical Interface	Name of the logical interface configured on the local MC-LAG peer.
Peer Logical Interface	Name of the logical interface configured on the remote MC-LAG peer.
Local IRB	Name of the integrated routing and bridging (IRB) interface configured on the local MC-LAG peer.
Peer IRB	Name of the integrated routing and bridging (IRB) interface configured on the remote MC-LAG peer.
Local VLAN	Name of the VLAN configured on the local MC-LAG peer.
Peer VLAN	Name of the VLAN configured on the remote MC-LAG peer.

Table 23: show multi-chassis mc-lag configuration-consistency Output Fields (*continued*)

Output Field Name	Field Description
Enforcement Level	Enforcement level for the MC-LAG parameter is Mandatory or Desirable .
Local Value	Value of the committed MC-LAG parameter for the local MC-LAG peer.
Peer Value	Value of the committed MC-LAG parameter for the remote MC-LAG peer.
Result	Result of the configuration consistency check of the MC-LAG parameter is PASS or FAIL .

Sample Output

show multi-chassis mc-lag configuration-consistency

```

user@host> show multi-chassis mc-lag configuration-consistency
Configuration Item      Enforcement Level  Local Value
Peer Value      Result
-----
service-id      Mandatory          1          1
PASS
session-establishment-hold-time  Mandatory          300
300      PASS
local-ip-addr      Mandatory          10.1.1.1
10.1.1.2      PASS
iccp/bfd multiplier      Mandatory          3          3
PASS
iccp/minimum-transmit-interval  Mandatory          60
60      PASS
bfd minimum-interval      Mandatory          1000
1000      PASS

Local Physical Interface:ae0
Peer Physical Interface :ae0
Configuration Item      Enforcement Level  Local Value
Peer Value      Result
-----
lACP admin-key      Mandatory          21
21      PASS
lACP system-id      Mandatory          00:00:00:00:00:01
00:00:00:00:00:01      PASS
lACP mode      Mandatory          0          0
PASS
prefer-status-control-active  Desirable          TRUE
TRUE      FAIL
mCAE status-control  Mandatory          standby
active      PASS
mCAE deployment mode      Mandatory          active-active
active-active      PASS
mCAE chassis-id      Mandatory          0          1

```

	PASS		
mcae redundancy-group 101	PASS	Mandatory	101
force-icl-down TRUE	PASS	Mandatory	--
Local Logical Interface:ae0.0 Peer Logical Interface :ae0.0			
Configuration Item		Enforcement Level	Local Value
Peer Value	Result		
-----	-----	-----	-----
vlan membership 501-502	PASS	Mandatory	501-502
interface-mode trunk	PASS	Mandatory	trunk
Local Physical Interface:ae1 Peer Physical Interface :ae1			
Configuration Item		Enforcement Level	Local Value
Peer Value	Result		
-----	-----	-----	-----
lacp admin-key 22	PASS	Mandatory	22
lacp system-id 00:00:00:00:00:03	PASS	Mandatory	00:00:00:00:00:03
lacp mode	PASS	Mandatory	0 0
prefer-status-control-active TRUE	FAIL	Desirable	TRUE
mcae status-control active	PASS	Mandatory	standby
mcae deployment mode active-active	PASS	Mandatory	active-active
mcae chassis-id	PASS	Mandatory	0 1
mcae redundancy-group 101	PASS	Mandatory	101
force-icl-down TRUE	PASS	Mandatory	--
Local Logical Interface:ae1.0 Peer Logical Interface :ae1.0			
Configuration Item		Enforcement Level	Local Value
Peer Value	Result		
-----	-----	-----	-----
vlan membership 601-602	PASS	Mandatory	601-602
interface-mode trunk	PASS	Mandatory	trunk
Local Physical Interface:ae5 Peer Physical Interface :ae5			
Local Logical Interface:ae5.0 Peer Logical Interface :ae5.0			
Configuration Item		Enforcement Level	Local Value
Peer Value	Result		
-----	-----	-----	-----

```

-----
vlan membership
501-502,601-602      PASS      Mandatory      501-502,601-602
interface-mode
trunk                PASS
-----

Local VLAN:client-vlan-1
Peer VLAN :client-vlan-1
Configuration Item    Enforcement Level  Local Value
Peer Value            Result
-----
-----

mcae-mac-synchronize
TRUE                  PASS      Mandatory      TRUE
-----

Local IRB:irb.501
Peer IRB :irb.501
Configuration Item    Enforcement Level  Local Value
Peer Value            Result
-----
-----

IPv4 Addresses
10.1.1.2/24           FAIL      Mandatory      10.1.1.1/24
-----

Local VLAN:client-vlan-2
Peer VLAN :client-vlan-2
Configuration Item    Enforcement Level  Local Value
Peer Value            Result
-----
-----

mcae-mac-synchronize
TRUE                  PASS      Mandatory      TRUE
-----

Local IRB:irb.502
Peer IRB :irb.502
Configuration Item    Enforcement Level  Local Value
Peer Value            Result
-----
-----

IPv4 Addresses
10.1.1.2/24           FAIL      Mandatory      10.1.1.1/24
-----

Local VLAN:server-vlan-1
Peer VLAN :server-vlan-1
Configuration Item    Enforcement Level  Local Value
Peer Value            Result
-----
-----

mcae-mac-synchronize
TRUE                  PASS      Mandatory      TRUE
-----

Local IRB:irb.601
Peer IRB :irb.601
Configuration Item    Enforcement Level  Local Value
Peer Value            Result
-----
-----

IPv4 Addresses
10.2.1.2/24           FAIL      Mandatory      10.2.1.1/24
-----

Local VLAN:server-vlan-2

```

Peer VLAN :server-vlan-2

Configuration Item

Peer Value Result

mcae-mac-synchronize

TRUE PASS

Enforcement Level

Mandatory

Local Value

TRUE

Local IRB:irb.602

Peer IRB :irb.602

Configuration Item

Peer Value Result

IPv4 Addresses

10.3.1.2/24 FAIL

Enforcement Level

Mandatory

Local Value

10.3.1.1/24

show multi-chassis mc-lag configuration-consistency global-config

Supported Platforms [EX Series](#), [QFX Series](#)

Syntax show multi-chassis mc-lag configuration-consistency global-config (brief | detail)

Release Information Command introduced in Junos OS Release 15.1X53-D60 for the QFX Series.
Command introduced in Junos OS Release 16.1R1 for the EX Series.

Description View configuration consistency check status for all committed global configuration related to MC-LAG functionality, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.

This command shows only a subset of what is shown in the **show multi-chassis mc-lag configuration-consistency** command. The following parameters related to the global configuration are checked for consistency.

- ICL interface
- RSTP bridge priority
- service ID
- session establishment hold time
- local IP address of the ICCP interface
- backup liveness detection peer IP address
- ICCP/BFD multiplier



NOTE: This command only displays MC-LAG parameters that are committed.

Options none—Display configuration consistency check status for all global configuration related to MC-LAG functionality.

Required Privilege Level view

List of Sample Output [show multi-chassis mc-lag configuration-consistency global-config on page 488](#)

Output Fields [Table 24 on page 487](#) lists the output fields for the **show multi-chassis mc-lag configuration-consistency global-config** command. Output fields are listed in the approximate order in which they appear.

Table 24: show multi-chassis mc-lag configuration-consistency global-config Output Fields

Output Field Name	Field Description
Configuration Item	Name of the committed MC-LAG parameter.

Table 24: show multi-chassis mc-lag configuration-consistency global-config Output Fields (*continued*)

Output Field Name	Field Description
Enforcement Level	Enforcement level for the MC-LAG parameter is Mandatory or Desirable .
Local Value	Value of the committed MC-LAG parameter on the local peer.
Peer Value	Value of the committed MC-LAG parameter on the remote peer.
Result	Result of the configuration consistency check of the MC-LAG parameter is PASS or FAIL .

Sample Output

show multi-chassis mc-lag configuration-consistency global-config

```

user@host> show multi-chassis mc-lag configuration-consistency global-config
Configuration Item      Enforcement Level  Local Value
Peer Value              Result
-----
service-id              Mandatory         1           1
                        PASS
session-establishment-hold-time  Mandatory         300
300                      PASS
local-ip-addr           Mandatory         10.1.1.1
10.1.1.2                PASS
iccp/bfd multiplier     Mandatory         3           3
                        PASS
iccp/minimum-transmit-interval  Mandatory         60
60                       PASS
bfd minimum-interval    Mandatory         1000
1000                    PASS

```

show multi-chassis mc-lag configuration-consistency icl-config

Supported Platforms [EX Series, QFX Series](#)

Syntax show multi-chassis mc-lag configuration-consistency icl-config (brief | detail)

Release Information Command introduced in Junos OS Release 15.1X53-D60 for the QFX Series.
Command introduced in Junos OS Release 16.1R1 for the EX Series.

Description View configuration consistency check status for parameters related to the ICL, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail. Some example of parameters related to the ICL interface are the interface mode and which VLAN the interface belongs to.

This command shows only a subset of what is shown in the **show multi-chassis mc-lag configuration-consistency** command. The following parameters related to the ICL configuration are checked for consistency check:

- VLAN membership
- interface mode



NOTE: This command only displays MC-LAG parameters that are committed.

Options **none**—Display configuration consistency check status for MC-LAG parameters related to the interchassis control link.

Required Privilege Level view

List of Sample Output [show multi-chassis mc-lag configuration-consistency icl-config on page 490](#)

Output Fields [Table 25 on page 489](#) lists the output fields for the **show multi-chassis mc-lag configuration-consistency icl-config** command. Output fields are listed in the approximate order in which they appear.

Table 25: show multi-chassis mc-lag configuration-consistency icl-config Output Fields

Output Field Name	Field Description
Configuration Item	Name of the committed MC-LAG parameter.
Local Physical Interface	Name of the physical interface configured on the local MC-LAG peer.
Peer Physical Interface	Name of the physical interface configured on the remote MC-LAG peer.

Table 25: show multi-chassis mc-lag configuration-consistency icl-config Output Fields (*continued*)

Output Field Name	Field Description
Local Logical Interface	Name of the logical interface configured on the local MC-LAG peer.
Peer Logical Interface	Name of the logical interface configured on the remote MC-LAG peer.
Enforcement Level	Enforcement level for the MC-LAG parameter is Mandatory or Desirable .
Local Value	Value of the committed MC-LAG parameter on the local peer.
Peer Value	Value of the committed MC-LAG parameter on the remote peer.
Result	Result of the configuration consistency check of the MC-LAG parameter is PASS or FAIL .

Sample Output

show multi-chassis mc-lag configuration-consistency icl-config

```

user@host> show multi-chassis mc-lag configuration-consistency icl-config
Local Physical Interface:ae5
Peer Physical Interface :ae5

Local Logical Interface:ae5.0
Peer Logical Interface :ae5.0
Configuration Item      Result      Enforcement Level  Local Value
Peer Value              -----
-----
vlan membership         PASS        Mandatory          501-502,601-602
501-502,601-602
interface-mode           PASS        Mandatory          trunk
trunk

```

show multi-chassis mc-lag configuration-consistency mcae-config

Supported Platforms [EX Series](#), [QFX Series](#)

Syntax show multi-chassis mc-lag configuration-consistency mcae-config (brief | detail)

Release Information Command introduced in Junos OS Release 15.1X53-D60 for the QFX Series.
Command introduced in Junos OS Release 16.1R1 for the EX Series.

Description View configuration consistency check status for committed parameters related to the multichassis aggregated Ethernet interfaces, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.

This command shows only a subset of what is shown in the **show multi-chassis mc-lag configuration-consistency** command. The following parameters related to the MC-AE interfaces are checked for consistency:

- LACP administrative key
- LACP system ID
- LACP periodic interval
- prefer status control setting
- status control setting
- mode
- chassis ID
- redundancy group ID
- VLAN membership of the ICL
- interface mode of the ICL



NOTE: This command only displays MC-LAG parameters that are committed.

Options **none**—Display configuration consistency check status for MC-LAG parameters related to the multichassis aggregated Ethernet interface.

Required Privilege Level view

List of Sample Output [show multi-chassis mc-lag configuration-consistency mcae-config on page 492](#)

Output Fields [Table 26 on page 492](#) lists the output fields for the **show multi-chassis mc-lag configuration-consistency mcae-config** command. Output fields are listed in the approximate order in which they appear.

Table 26: show multi-chassis mc-lag configuration-consistency mcae-config Output Fields

Output Field Name	Field Description
Configuration Item	Name of the committed MC-LAG parameter.
Local Physical Interface	Name of the physical interface configured on the local MC-LAG peer.
Peer Physical Interface	Name of the physical interface configured on the remote MC-LAG peer.
Local Logical Interface	Name of the logical interface configured on the local MC-LAG peer.
Peer Logical Interface	Name of the logical interface configured on the remote MC-LAG peer.
Enforcement Level	Enforcement level for the MC-LAG parameter is Mandatory or Desirable .
Local Value	Value of the committed MC-LAG parameter on the local peer.
Peer Value	Value of the committed MC-LAG parameter on the remote peer.
Result	Result of the configuration consistency check of the MC-LAG parameter is PASS or FAIL .

Sample Output

show multi-chassis mc-lag configuration-consistency mcae-config

```

user@host> show multi-chassis mc-lag configuration-consistency mcae-config
Local Physical Interface:ae0
Peer Physical Interface :ae0
Configuration Item      Peer Value      Result      Enforcement Level  Local Value
-----
l2cp admin-key         21              PASS        Mandatory          21
l2cp system-id         00:00:00:00:00:01  PASS        Mandatory          00:00:00:00:00:01
l2cp mode              PASS           Mandatory          0                  0
prefer-status-control-active TRUE            FAIL        Desirable          TRUE
mcae status-control active PASS           Mandatory          standby
mcae deployment mode active-active   PASS        Mandatory          active-active
mcae chassis-id        PASS           Mandatory          0                  1
mcae redundancy-group  101           Mandatory          101

```

101	PASS		
force-icl-down		Mandatory	--
TRUE	PASS		
Local Logical Interface:ae0.0			
Peer Logical Interface :ae0.0			
Configuration Item		Enforcement Level	Local Value
Peer Value	Result		
-----	-----	-----	-----
vlan membership		Mandatory	501-502
501-502	PASS		
interface-mode		Mandatory	trunk
trunk	PASS		
Local Physical Interface:ae1			
Peer Physical Interface :ae1			
Configuration Item		Enforcement Level	Local Value
Peer Value	Result		
-----	-----	-----	-----
lACP admin-key		Mandatory	22
22	PASS		
lACP system-id		Mandatory	00:00:00:00:00:03
00:00:00:00:00:03	PASS		
lACP mode		Mandatory	0
	PASS		0
prefer-status-control-active		Desirable	TRUE
TRUE	FAIL		
mCAE status-control		Mandatory	standby
active	PASS		
mCAE deployment mode		Mandatory	active-active
active-active	PASS		
mCAE chassis-id		Mandatory	0
	PASS		1
mCAE redundancy-group		Mandatory	101
101	PASS		
force-icl-down		Mandatory	--
TRUE	PASS		
Local Logical Interface:ae1.0			
Peer Logical Interface :ae1.0			
Configuration Item		Enforcement Level	Local Value
Peer Value	Result		
-----	-----	-----	-----
vlan membership		Mandatory	601-602
601-602	PASS		
interface-mode		Mandatory	trunk
trunk	PASS		

show multi-chassis mc-lag configuration-consistency vlan-config

Supported Platforms [EX Series, QFX Series](#)

Syntax `show multi-chassis mc-lag configuration-consistency vlan-config (brief | detail)`

Release Information Command introduced in Junos OS Release 15.1X53-D60 for the QFX Series.
Command introduced in Junos OS Release 16.1R1 for the EX Series.

Description View configuration consistency check status for committed parameters related to MC-LAG VLAN configuration, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.

This command shows only a subset of what is shown in the **show multi-chassis mc-lag configuration-consistency** command. The following parameters related to the VLAN and IRB configuration are checked for consistency:

- VRRP group ID
- IP address of IRB interface



NOTE: This command only displays MC-LAG parameters that are committed.

Options **none**—Display configuration consistency check status for MC-LAG parameters related to VLAN configuration.

Required Privilege Level view

List of Sample Output [show multi-chassis mc-lag configuration-consistency vlan-config on page 495](#)

Output Fields [Table 27 on page 494](#) lists the output fields for the **show multi-chassis mc-lag configuration-consistency vlan-config** command. Output fields are listed in the approximate order in which they appear.

Table 27: show multi-chassis mc-lag configuration-consistency vlan-config Output Fields

Output Field Name	Field Description
Configuration Item	Name of the committed MC-LAG parameter.
Local Physical Interface	Name of the physical interface configured on the local MC-LAG peer.
Peer Physical Interface	Name of the physical interface configured on the remote MC-LAG peer.

Table 27: show multi-chassis mc-lag configuration-consistency vlan-config Output Fields (*continued*)

Output Field Name	Field Description
Local Logical Interface	Name of the logical interface configured on the local MC-LAG peer.
Peer Logical Interface	Name of the logical interface configured on the remote MC-LAG peer.
Local IRB	Name of the integrated routing and bridging (IRB) interface configured on the local MC-LAG peer.
Peer IRB	Name of the integrated routing and bridging (IRB) interface configured on the remote MC-LAG peer.
Local VLAN	Name of the VLAN configured on the local MC-LAG peer.
Peer VLAN	Name of the VLAN configured on the remote MC-LAG peer.
Enforcement Level	Enforcement level for the MC-LAG parameter is Mandatory or Desirable .
Local Value	Value of the committed MC-LAG parameter on the local peer.
Peer Value	Value of the committed MC-LAG parameter on the remote peer.
Result	Result of the configuration consistency check of the MC-LAG parameter is PASS or FAIL .

Sample Output

show multi-chassis mc-lag configuration-consistency vlan-config

```

user@host> show multi-chassis mc-lag configuration-consistency vlan-config
Local VLAN:client-vlan-1
Peer VLAN :client-vlan-1

Local IRB:irb.501
Peer IRB :irb.501
Configuration Item      Result      Enforcement Level  Local Value
Peer Value              -----
-----
vrrp-group id          11          Mandatory          11
IPv4 Addresses          10.1.1.1/8  Mandatory          10.1.1.2/8
10.1.1.1/8              PASS
10.1.1.1/8              PASS

Local VLAN:client-vlan-2
Peer VLAN :client-vlan-2

Local IRB:irb.502

```

Peer IRB :irb.502 Configuration Item Peer Value	Result	Enforcement Level	Local Value
-----	-----	-----	-----
vrrp-group id		Mandatory	12
12	PASS		
IPv4 Addresses		Mandatory	10.0.1.2/8
10.0.1.1/8	PASS		

show multi-chassis mc-lag configuration-consistency vrrp-config

Supported Platforms [EX Series, QFX Series](#)

Syntax show multi-chassis mc-lag configuration-consistency vrrp-config

Release Information Command introduced in Junos OS Release 15.1X53-D60 for the QFX Series.
Command introduced in Junos OS Release 16.1R1 for the EX Series.

Description View configuration consistency check status for committed parameters related to VRRP configuration, the consistency requirement (identical or unique), the enforcement level (mandatory or desired), and the result of the configuration consistency check. The results are either pass or fail.

This command shows only a subset of what is shown in the **show multi-chassis mc-lag configuration-consistency** command. The following parameters related to the VRRP configuration are checked for consistency: VRRP group virtual IP address and VRRP group priority value.



NOTE: This command only displays MC-LAG parameters that are committed.

Options **none**—Displays configuration consistency check status for MC-LAG parameters related to Virtual Router Redundancy Protocol (VRRP) configuration.

Required Privilege Level view

List of Sample Output [show multi-chassis mc-lag configuration-consistency vrrp-config on page 498](#)

Output Fields [Table 28 on page 497](#) lists the output fields for the **show multi-chassis mc-lag configuration-consistency vrrp-config** command. Output fields are listed in the approximate order in which they appear.

Table 28: show multi-chassis mc-lag configuration-consistency vrrp-config Output Fields

Output Field Name	Field Description
Configuration Item	Name of the committed MC-LAG parameter.
Local Physical Interface	Name of the physical interface configured on the local MC-LAG peer.
Peer Physical Interface	Name of the physical interface configured on the remote MC-LAG peer.
Local Logical Interface	Name of the logical interface configured on the local MC-LAG peer.

Table 28: show multi-chassis mc-lag configuration-consistency vrrp-config Output Fields (*continued*)

Output Field Name	Field Description
Peer Logical Interface	Name of the logical interface configured on the remote MC-LAG peer.
Local IRB	Name of the integrated routing and bridging (IRB) interface configured on the local MC-LAG peer.
Peer IRB	Name of the integrated routing and bridging (IRB) interface configured on the remote MC-LAG peer.
Local VLAN	Name of the VLAN configured on the local MC-LAG peer.
Peer VLAN	Name of the VLAN configured on the remote MC-LAG peer.
Enforcement Level	Enforcement level for the MC-LAG parameter is Mandatory or Desirable .
Local Value	Value of the committed MC-LAG parameter on the local peer.
Peer Value	Value of the committed MC-LAG parameter on the remote peer.
Result	Result of the configuration consistency check of the MC-LAG parameter is PASS or FAIL .

Sample Output

show multi-chassis mc-lag configuration-consistency vrrp-config

```

user@host> show multi-chassis mc-lag configuration-consistency vrrp-config
Local VRRP Group:11

Peer VRRP Group :11
Configuration Item      Peer Value      Result      Enforcement Level  Local Value
-----
vrrp-group virtual-address 010.001.001.010 PASS      Mandatory          010.001.001.010
vrrp-group priority 201          PASS      Mandatory          202

Local VRRP Group:12

Peer VRRP Group :12
Configuration Item      Peer Value      Result      Enforcement Level  Local Value
-----
vrrp-group virtual-address 011.001.001.010 PASS      Mandatory          011.001.001.010

```

<code>vrrp-group priority</code>			
<code>201</code>	PASS	Mandatory	202

