

IS-IS Feature Guide for EX4600 Switches

Release
16.2



Modified: 2016-12-06

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, Junos, Steel-Belted Radius, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. The Juniper Networks Logo, the Junos logo, and JunosE are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

IS-IS Feature Guide for EX4600 Switches
Release 16.2
Copyright © 2016, Juniper Networks, Inc.
All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <http://www.juniper.net/support/eula.html>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

	About the Documentation	xi
	Documentation and Release Notes	xi
	Supported Platforms	xi
	Using the Examples in This Manual	xi
	Merging a Full Example	xii
	Merging a Snippet	xii
	Documentation Conventions	xiii
	Documentation Feedback	xv
	Requesting Technical Support	xv
	Self-Help Online Tools and Resources	xv
	Opening a Case with JTAC	xvi
Part 1	Overview	
Chapter 1	Introduction to IS-IS	3
	IS-IS Overview	3
	IS-IS Terminology	4
	ISO Network Addresses	4
	IS-IS Packets	6
	Persistent Route Reachability	7
	IS-IS Support for Multipoint Network Clouds	7
	Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels	7
Part 2	Configuring IS-IS	
Chapter 2	Configuring IS-IS Guidelines	11
	Example: Configuring IS-IS	11
	Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding	16
	Example: Redistributing OSPF Routes into IS-IS	25
	Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies	33
	Understanding IS-IS IPv4 and IPv6 Unicast Topologies	33
	Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies	33
	Example: Configuring IS-IS Multicast Topology	41
	IS-IS Multicast Topologies Overview	42
	Example: Configuring IS-IS Multicast Topology	43
	Example: Configuring IS-IS for CLNS	57
	Understanding IS-IS for CLNS	57
	Example: Configuring IS-IS for CLNS	58

	Example: Configuring IS-IS Designated Routers	60
	Understanding IS-IS Designated Routers	60
	Configuring Designated Router Election Priority for IS-IS	60
	Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking . . .	60
	Configuring IS-IS Authentication	63
	Configuring IS-IS Authentication Without Network-Wide Deployment	64
Chapter 3	Configuring BFD Authentication	65
	Understanding BFD Authentication for IS-IS	65
	BFD Authentication Algorithms	65
	Security Authentication Keychains	66
	Strict Versus Loose Authentication	66
	Example: Configuring BFD for IS-IS	67
	Example: Configuring BFD Authentication for IS-IS	72
Chapter 4	Configuring Hitless Authentication	77
	Understanding Hitless Authentication Key Rollover for IS-IS	77
	Example: Configuring Hitless Authentication Key Rollover for IS-IS	78
Part 3	Configuration Statements and Operational Commands	
Chapter 5	Configuration Statements	85
	authentication-key (Protocols IS-IS)	87
	authentication-key-chain (Protocols IS-IS)	88
	authentication-type (Protocols IS-IS)	89
	bfd-liveness-detection (Protocols IS-IS)	90
	checksum (Protocols IS-IS)	92
	csnp-interval	93
	disable (Protocols IS-IS)	94
	export	95
	external-preference (Protocols IS-IS)	96
	family (Protocols IS-IS)	97
	hello-authentication-key	98
	hello-authentication-key-chain	99
	hello-authentication-type	100
	hello-interval (Protocols IS-IS)	101
	hello-padding	103
	hold-time (Protocols IS-IS)	105
	ignore-attached-bit	107
	interface (Protocols IS-IS)	108
	ipv4-multicast	110
	ipv4-multicast-metric	111
	ipv6-multicast	112
	ipv6-multicast-metric	112
	ipv6-unicast	113
	ipv6-unicast-metric	114
	isis	115
	level (Global IS-IS)	116
	loose-authentication-check	117
	lsp-interval	118

lsp-lifetime	119
max-areas	120
mesh-group (Protocols IS-IS)	121
metric (Protocols IS-IS)	122
no-adjacency-holddown	123
no-authentication-check	124
no-csnp-authentication	124
no-hello-authentication	125
no-ipv4-multicast	125
no-ipv4-routing	126
no-ipv6-multicast	127
no-ipv6-routing	128
no-ipv6-unicast	129
no-psnp-authentication	129
no-unicast-topology	130
overload (Protocols IS-IS)	131
passive (Protocols IS-IS)	134
point-to-point	136
preference (Protocols IS-IS)	137
prefix-export-limit (Protocols IS-IS)	138
priority (Protocols IS-IS)	139
reference-bandwidth (Protocols IS-IS)	140
rib-group (Protocols IS-IS)	141
topologies (Protocols IS-IS)	142
traceoptions (Protocols IS-IS)	143
traffic-engineering (Protocols IS-IS)	146
wide-metrics-only	149
Chapter 6	
Operational Commands	151
clear isis adjacency	152
clear isis database	154
clear isis overload	156
clear isis statistics	158
show isis adjacency	160
show isis authentication	164
show isis database	166
show isis hostname	180
show isis interface	182
show isis overview	187
show isis route	191
show isis statistics	195

List of Figures

Part 1	Overview	
Chapter 1	Introduction to IS-IS	3
	Figure 1: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2	7
Part 2	Configuring IS-IS	
Chapter 2	Configuring IS-IS Guidelines	11
	Figure 2: Simple IS-IS Topology	12
	Figure 3: IS-IS Multi-Level Topology	17
	Figure 4: IS-IS Route Redistribution Topology	26
	Figure 5: IS-IS IPv4 and IPv6 Unicast Topologies	35
	Figure 6: Configuring IS-IS Multicast Topology	44
	Figure 7: IS-IS Checksum Topology	61
Chapter 3	Configuring BFD Authentication	65
	Figure 8: Configuring BFD for IS-IS	67
	Figure 9: IS-IS BFD Authentication Topology	73
Chapter 4	Configuring Hitless Authentication	77
	Figure 10: Hitless Authentication Key Rollover for IS-IS	79

List of Tables

	About the Documentation	xi
	Table 1: Notice Icons	xiii
	Table 2: Text and Syntax Conventions	xiii
Part 2	Configuring IS-IS	
Chapter 2	Configuring IS-IS Guidelines	11
	Table 3: IPv4 Statements	42
	Table 4: IPv6 Statements	42
Part 3	Configuration Statements and Operational Commands	
Chapter 5	Configuration Statements	85
	Table 5: Default Metric Values for Routes Exported into IS-IS	122
Chapter 6	Operational Commands	151
	Table 6: show isis adjacency Output Fields	161
	Table 7: show isis authentication Output Fields	164
	Table 8: show isis database Output Fields	167
	Table 9: show isis hostname Output Fields	180
	Table 10: show isis interface Output Fields	183
	Table 11: show isis overview Output Fields	187
	Table 12: show isis route Output Fields	192
	Table 13: show isis statistics Output Fields	196

About the Documentation

- Documentation and Release Notes on page xi
- Supported Platforms on page xi
- Using the Examples in This Manual on page xi
- Documentation Conventions on page xiii
- Documentation Feedback on page xv
- Requesting Technical Support on page xv

Documentation and Release Notes

To obtain the most current version of all Juniper Networks® technical documentation, see the product documentation page on the Juniper Networks website at <http://www.juniper.net/techpubs/>.

If the information in the latest release notes differs from the information in the documentation, follow the product Release Notes.

Juniper Networks Books publishes books by Juniper Networks engineers and subject matter experts. These books go beyond the technical documentation to explore the nuances of network architecture, deployment, and administration. The current list can be viewed at <http://www.juniper.net/books>.

Supported Platforms

For the features described in this document, the following platforms are supported:

- EX Series

Using the Examples in This Manual

If you want to use the examples in this manual, you can use the **load merge** or the **load merge relative** command. These commands cause the software to merge the incoming configuration into the current candidate configuration. The example does not become active until you commit the candidate configuration.

If the example configuration contains the top level of the hierarchy (or multiple hierarchies), the example is a *full example*. In this case, use the **load merge** command.

If the example configuration does not start at the top level of the hierarchy, the example is a *snippet*. In this case, use the **load merge relative** command. These procedures are described in the following sections.

Merging a Full Example

To merge a full example, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration example into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following configuration to a file and name the file **ex-script.conf**. Copy the **ex-script.conf** file to the **/var/tmp** directory on your routing platform.

```
system {
  scripts {
    commit {
      file ex-script.xml;
    }
  }
}
interfaces {
  fxp0 {
    disable;
    unit 0 {
      family inet {
        address 10.0.0.1/24;
      }
    }
  }
}
```

2. Merge the contents of the file into your routing platform configuration by issuing the **load merge** configuration mode command:

```
[edit]
user@host# load merge /var/tmp/ex-script.conf
load complete
```

Merging a Snippet

To merge a snippet, follow these steps:

1. From the HTML or PDF version of the manual, copy a configuration snippet into a text file, save the file with a name, and copy the file to a directory on your routing platform.

For example, copy the following snippet to a file and name the file **ex-script-snippet.conf**. Copy the **ex-script-snippet.conf** file to the **/var/tmp** directory on your routing platform.

```
commit {
  file ex-script-snippet.xml; }
```

2. Move to the hierarchy level that is relevant for this snippet by issuing the following configuration mode command:

```
[edit]
user@host# edit system scripts
[edit system scripts]
```

3. Merge the contents of the file into your routing platform configuration by issuing the **load merge relative** configuration mode command:

```
[edit system scripts]
user@host# load merge relative /var/tmp/ex-script-snippet.conf
load complete
```

For more information about the **load** command, see [CLI Explorer](#).

Documentation Conventions

[Table 1 on page xiii](#) defines notice icons used in this guide.

Table 1: Notice Icons

Icon	Meaning	Description
	Informational note	Indicates important features or instructions.
	Caution	Indicates a situation that might result in loss of data or hardware damage.
	Warning	Alerts you to the risk of personal injury or death.
	Laser warning	Alerts you to the risk of personal injury from a laser.
	Tip	Indicates helpful information.
	Best practice	Alerts you to a recommended use or implementation.

[Table 2 on page xiii](#) defines the text and syntax conventions used in this guide.

Table 2: Text and Syntax Conventions

Convention	Description	Examples
Bold text like this	Represents text that you type.	To enter configuration mode, type the configure command: user@host> configure

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
Fixed-width text like this	Represents output that appears on the terminal screen.	<code>user@host> show chassis alarms</code> <code>No alarms currently active</code>
<i>Italic text like this</i>	<ul style="list-style-type: none"> Introduces or emphasizes important new terms. Identifies guide names. Identifies RFC and Internet draft titles. 	<ul style="list-style-type: none"> A policy <i>term</i> is a named structure that defines match conditions and actions. <i>Junos OS CLI User Guide</i> RFC 1997, <i>BGP Communities Attribute</i>
<i>Italic text like this</i>	Represents variables (options for which you substitute a value) in commands or configuration statements.	Configure the machine's domain name: [edit] root@# set system domain-name <i>domain-name</i>
Text like this	Represents names of configuration statements, commands, files, and directories; configuration hierarchy levels; or labels on routing platform components.	<ul style="list-style-type: none"> To configure a stub area, include the stub statement at the [edit protocols ospf area area-id] hierarchy level. The console port is labeled CONSOLE.
< > (angle brackets)	Encloses optional keywords or variables.	stub <default-metric metric>;
(pipe symbol)	Indicates a choice between the mutually exclusive keywords or variables on either side of the symbol. The set of choices is often enclosed in parentheses for clarity.	broadcast multicast (string1 string2 string3)
# (pound sign)	Indicates a comment specified on the same line as the configuration statement to which it applies.	rsvp { # Required for dynamic MPLS only
[] (square brackets)	Encloses a variable for which you can substitute one or more values.	community name members [<i>community-ids</i>]
Indentation and braces ({ })	Identifies a level in the configuration hierarchy.	[edit] routing-options { static { route default { nexthop <i>address</i> ; retain; } } }
;(semicolon)	Identifies a leaf statement at a configuration hierarchy level.	
GUI Conventions		
Bold text like this	Represents graphical user interface (GUI) items you click or select.	<ul style="list-style-type: none"> In the Logical Interfaces box, select All Interfaces. To cancel the configuration, click Cancel.

Table 2: Text and Syntax Conventions (*continued*)

Convention	Description	Examples
> (bold right angle bracket)	Separates levels in a hierarchy of menu selections.	In the configuration editor hierarchy, select Protocols>Ospf .

Documentation Feedback

We encourage you to provide feedback, comments, and suggestions so that we can improve the documentation. You can provide feedback by using either of the following methods:

- Online feedback rating system—On any page of the Juniper Networks TechLibrary site at <http://www.juniper.net/techpubs/index.html>, simply click the stars to rate the content, and use the pop-up form to provide us with information about your experience. Alternately, you can use the online feedback form at <http://www.juniper.net/techpubs/feedback/>.
- E-mail—Send your comments to techpubs-comments@juniper.net. Include the document or topic name, URL or page number, and software version (if applicable).

Requesting Technical Support

Technical product support is available through the Juniper Networks Technical Assistance Center (JTAC). If you are a customer with an active J-Care or Partner Support Service support contract, or are covered under warranty, and need post-sales technical support, you can access our tools and resources online or open a case with JTAC.

- JTAC policies—For a complete understanding of our JTAC procedures and policies, review the *JTAC User Guide* located at <http://www.juniper.net/us/en/local/pdf/resource-guides/7100059-en.pdf>.
- Product warranties—For product warranty information, visit <http://www.juniper.net/support/warranty/>.
- JTAC hours of operation—The JTAC centers have resources available 24 hours a day, 7 days a week, 365 days a year.

Self-Help Online Tools and Resources

For quick and easy problem resolution, Juniper Networks has designed an online self-service portal called the Customer Support Center (CSC) that provides you with the following features:

- Find CSC offerings: <http://www.juniper.net/customers/support/>
- Search for known bugs: <http://www2.juniper.net/kb/>
- Find product documentation: <http://www.juniper.net/techpubs/>
- Find solutions and answer questions using our Knowledge Base: <http://kb.juniper.net/>

- Download the latest versions of software and review release notes:
<http://www.juniper.net/customers/csc/software/>
- Search technical bulletins for relevant hardware and software notifications:
<http://kb.juniper.net/InfoCenter/>
- Join and participate in the Juniper Networks Community Forum:
<http://www.juniper.net/company/communities/>
- Open a case online in the CSC Case Management tool: <http://www.juniper.net/cm/>

To verify service entitlement by product serial number, use our Serial Number Entitlement (SNE) Tool: <https://tools.juniper.net/SerialNumberEntitlementSearch/>

Opening a Case with JTAC

You can open a case with JTAC on the Web or by telephone.

- Use the Case Management tool in the CSC at <http://www.juniper.net/cm/>.
- Call 1-888-314-JTAC (1-888-314-5822 toll-free in the USA, Canada, and Mexico).

For international or direct-dial options in countries without toll-free numbers, see <http://www.juniper.net/support/requesting-support.html>.

PART 1

Overview

- [Introduction to IS-IS on page 3](#)

CHAPTER 1

Introduction to IS-IS

- [IS-IS Overview on page 3](#)

IS-IS Overview

The IS-IS protocol is an interior gateway protocol (IGP) that uses link-state information to make routing decisions.

IS-IS is a link-state IGP that uses the shortest-path-first (SPF) algorithm to determine routes. IS-IS evaluates the topology changes and determines whether to perform a full SPF recalculation or a partial route calculation (PRC). This protocol originally was developed for routing International Organization for Standardization (ISO) Connectionless Network Protocol (CLNP) packets.

Like OSPF routing, IS-IS uses hello packets that allow network convergence to occur quickly when network changes are detected. IS-IS uses the SPF algorithm to determine routes. Using SPF, IS-IS evaluates network topology changes and determines if a full or partial route calculation is required.



NOTE: Because IS-IS uses ISO addresses, the configuration of IP version 6 (IPv6) and IP version 4 (IPv4) implementations of IS-IS is identical.



NOTE: See *Platforms/FPCs That Cannot Forward TCC Encapsulated ISO Traffic* to find a list of those devices and FPC configurations that cannot pass ISO traffic when encapsulated in TCC format.

This section discusses the following topics:

- [IS-IS Terminology on page 4](#)
- [ISO Network Addresses on page 4](#)
- [IS-IS Packets on page 6](#)
- [Persistent Route Reachability on page 7](#)

- [IS-IS Support for Multipoint Network Clouds on page 7](#)
- [Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels on page 7](#)

IS-IS Terminology

An IS-IS network is a single autonomous system (AS), also called a *routing domain*, that consists of *end systems* and *intermediate systems*. End systems are network entities that send and receive packets. Intermediate systems send and receive packets and relay (forward) packets. (Intermediate system is the Open System Interconnection [OSI] term for a router.) ISO packets are called network PDUs.

In IS-IS, a single AS can be divided into smaller groups called *areas*. Routing between areas is organized hierarchically, allowing a domain to be administratively divided into smaller areas. This organization is accomplished by configuring *Level 1* and *Level 2* intermediate systems. Level 1 systems route within an area; when the destination is outside an area, they route toward a Level 2 system. Level 2 intermediate systems route between areas and toward other ASs. No IS-IS area functions strictly as a backbone.

Level 1 routers share intra-area routing information, and Level 2 routers share interarea information about IP addresses available within each area. Uniquely, IS-IS routers can act as both Level 1 and Level 2 routers, sharing intra-area routes with other Level 1 routers and interarea routes with other Level 2 routers.

The propagation of link-state updates is determined by the level boundaries. All routers within a level maintain a complete link-state database of all other routers in the same level. Each router then uses the Dijkstra algorithm to determine the shortest path from the local router to other routers in the link-state database.

ISO Network Addresses

IS-IS uses ISO network addresses. Each address identifies a point of connection to the network, such as a router interface, and is called a *network service access point (NSAP)*.

IS-IS supports multiple NSAP addresses on the loopback lo0 interface.

An end system can have multiple NSAP addresses, in which case the addresses differ only by the last byte (called the *n-selector*). Each NSAP represents a service that is available at that node. In addition to having multiple services, a single node can belong to multiple areas.

Each network entity also has a special network address called a *network entity title (NET)*. Structurally, an NET is identical to an NSAP address but has an n-selector of 00. Most end systems and intermediate systems have one NET. Intermediate systems that participate in multiple areas can have multiple NETs.

The following ISO addresses illustrate the IS-IS address format:

```
49.0001.00a0.c96b.c490.00
49.0001.2081.9716.9018.00
```

NETs take several forms, depending on your network requirements. NET addresses are hexadecimal and range from 8 octets to 20 octets in length. Generally, the format consists

of an authority and format Identifier (AFI), a domain ID, an area ID, a system identifier, and a selector. The simplest format omits the domain ID and is 10 octets long. For example, the NET address 49.0001.1921.6800.1001.00 consists of the following parts:

- 49—AFI
- 0001—Area ID
- 1921.6800.1001—System identifier
- 00—Selector

The system identifier must be unique within the network. For an IP-only network, we recommend using the IP address of an interface on the router. Configuring a loopback NET address with the IP address is helpful when troubleshooting is required on the network.

The first portion of the address is the area number, which is a variable number from 1 through 13 bytes. The first byte of the area number (49) is the authority and format indicator (AFI). The next bytes are the assigned domain (area) identifier, which can be from 0 through 12 bytes. In the examples above, the area identifier is 0001.

The next six bytes form the system identifier. The system identifier can be any six bytes that are unique throughout the entire domain. The system identifier commonly is the media access control (MAC) address (as in the first example, 00a0.c96b.c490) or the IP address expressed in binary-coded decimal (BCD) (as in the second example, 2081.9716.9018, which corresponds to IP address 208.197.169.18). The last byte (00) is the n-selector.



NOTE: The system identifier cannot be 0000.0000.0000. All 0s is an illegal setting, and the adjacency is not formed with this setting.

To provide help with IS-IS debugging, the Junos[®] operating system (Junos OS) supports dynamic mapping of ISO system identifiers to the hostname. Each system can be configured with a hostname, which allows the system identifier-to-hostname mapping to be carried in a dynamic hostname type, length, and value (TLV) tuple in IS-IS link-state PDUs. This enables intermediate systems in the routing domain to learn about the ISO system identifier of a particular intermediate system.

IS-IS Packets

Each IS-IS PDU shares a common header. IS-IS uses the following PDUs to exchange protocol information:

- IS-IS hello (IIH) PDUs—Broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems.

IS-IS hello PDUs establish adjacencies with other routers and have three different formats: one for point-to-point hello packets, one for Level 1 broadcast links, and one for Level 2 broadcast links. Level 1 routers must share the same area address to form an adjacency, while Level 2 routers do not have this limitation. The request for adjacency is encoded in the Circuit type field of the PDU.

Hello PDUs have a preset length assigned to them. The IS-IS router does not resize any PDU to match the maximum transmission unit (MTU) on a router interface. Each interface supports the maximum IS-IS PDU of 1492 bytes, and hello PDUs are padded to meet the maximum value. When the hello is sent to a neighboring router, the connecting interface supports the maximum PDU size.

- Link-state PDUs—Contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area.

Also included is metric and IS-IS neighbor information. Each link-state PDU must be refreshed periodically on the network and is acknowledged by information within a sequence number PDU.

On point-to-point links, each link-state PDU is acknowledged by a partial sequence number PDU (PSNP), but on broadcast links, a complete sequence number PDU (CSNP) is sent out over the network. Any router that finds newer link-state PDU information in the CSNP then purges the out-of-date entry and updates the link-state database.

Link-state PDUs support variable-length subnet mask addressing.

- Complete sequence number PDUs (CSNPs)—Contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.

Contained within the CSNP is a link-state PDU identifier, a lifetime, a sequence number, and a checksum for each entry in the database. Periodically, a CSNP is sent on both broadcast and point-to-point links to maintain a correct database. Also, the advertisement of CSNPs occurs when an adjacency is formed with another router. Like IS-IS hello PDUs, CSNPs come in two types: Level 1 and Level 2.

When a device receives a CSNP, it checks the database entries against its own local link-state database. If it detects missing information, the device requests specific link-state PDU details using a partial sequence number PDU (PSNP).

- Partial sequence number PDUs (PSNPs)—Sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively

requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device.

A PSNP is used by an IS-IS router to request link-state PDU information from a neighboring router. A PSNP can also explicitly acknowledge the receipt of a link-state PDU on a point-to-point link. On a broadcast link, a CSNP is used as implicit knowledge. Like hello PDUs and CSNPs, the PSNP also has two types: Level 1 and Level 2.

When a device compares a CSNP to its local database and determines that a link-state PDU is missing, the router issues a PSNP for the missing link-state PDU, which is returned in a link-state PDU from the router sending the CSNP. The received link-state PDU is then stored in the local database, and an acknowledgment is sent back to the originating router.

Persistent Route Reachability

IPv4 and IPv6 route reachability information in IS-IS link-state PDUs is preserved when you commit a configuration. IP prefixes are preserved with their original packet fragment upon link-state PDU regeneration.


IS-IS Support for Multipoint Network Clouds

IS-IS does not support multipoint configurations. Therefore, when configuring Frame Relay or Asynchronous Transfer Mode (ATM) networks, you must configure them as collections of point-to-point links, not as multipoint clouds.

Installing a Default Route to the Nearest Routing Device That Operates at Both IS-IS Levels

When a routing device that operates as both a Level 1 and Level 2 router (Router B) determines that it can reach at least one area other than its own (for example, in Area Y), it sets the ATTACHED bit in its Level 1 link-state PDU. Thereafter, the Level 1 router (Router A) introduces a default route pointing to the nearest attached routing device that operates as both a Level 1 and Level 2 router (Router B). See [Figure 1 on page 7](#).

Figure 1: Install Default Route to Nearest Routing Device That Operates at Both Level 1 and Level 2

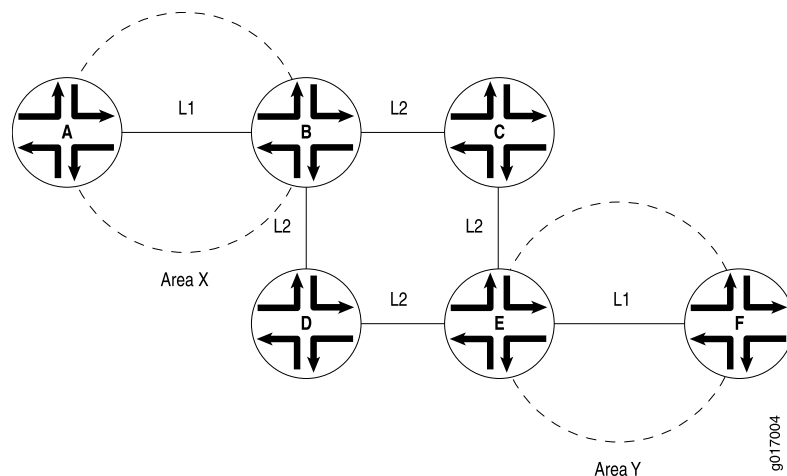

- Related Documentation**
- *Understanding IS-IS Configuration*
 - [Example: Configuring IS-IS on page 11](#)

PART 2

Configuring IS-IS

- [Configuring IS-IS Guidelines on page 11](#)
- [Configuring BFD Authentication on page 65](#)
- [Configuring Hitless Authentication on page 77](#)

CHAPTER 2

Configuring IS-IS Guidelines

- [Example: Configuring IS-IS on page 11](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 16](#)
- [Example: Redistributing OSPF Routes into IS-IS on page 25](#)
- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33](#)
- [Example: Configuring IS-IS Multicast Topology on page 41](#)
- [Example: Configuring IS-IS for CLNS on page 57](#)
- [Example: Configuring IS-IS Designated Routers on page 60](#)
- [Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking on page 60](#)
- [Configuring IS-IS Authentication on page 63](#)
- [Configuring IS-IS Authentication Without Network-Wide Deployment on page 64](#)

Example: Configuring IS-IS

This example shows how to configure IS-IS.

- [Requirements on page 11](#)
- [Overview on page 11](#)
- [Configuration on page 12](#)
- [Verification on page 14](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.


Overview

In this example, you configure the two IS-IS routing devices in a single area. The devices have NET addresses 49.0002.0192.0168.0001.00 and 49.0002.0192.0168.0002.00 on the lo0 interfaces. Additionally, you configure the ISO family on the IS-IS interfaces.

For Junos OS security devices only, you configure the **mode packet-based** statement at the **[edit security forwarding-options family iso]** hierarchy level.

Figure 2 on page 12 shows the topology used in this example.

Figure 2: Simple IS-IS Topology

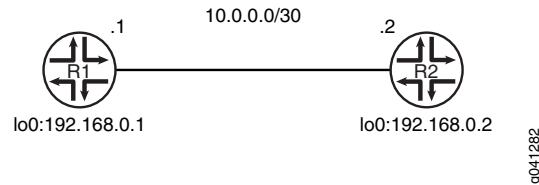

“CLI Quick Configuration” on page 12 shows the configuration for both of the devices in Figure 2 on page 12. The section “Step-by-Step Procedure” on page 12 describes the steps on Device R1.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R2
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

Device R2

```

set security forwarding-options family iso mode packet-based
set interfaces ge-1/2/0 unit 0 description to-R1
set interfaces ge-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set protocols isis interface ge-1/2/0.0
set protocols isis interface lo0.0
  
```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS:

1. Enable IS-IS if your router is in secure context.


```

[edit security forwarding-options family iso]
user@R1# set mode packet-based
      
```
2. Create the interface that connects to Device R2, and configure the ISO family on the interface.


```

[edit interfaces ge-1/2/0 unit 0]
user@R1# set description to-R2
      
```

```

user@R1# set family inet address 10.0.0.1/30
user@R1# set family iso

```

3. Create the loopback interface, set the IP address, and set the NET address.

```

[edit interfaces lo0 unit 0]
user@R1# set family inet address 192.168.0.1/32
user@R1# set family iso address 49.0002.0192.0168.0001.00

```

4. Enable IS-IS on the interfaces.

```

[edit protocols isis]
user@R1# set interface ge-1/2/0.0
user@R1# set interface lo0.0

```

Results From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R1# show security
forwarding-options {
  family iso {
    mode packet-based;
  }
}

user@R1# show interfaces
ge-1/2/0 {
  unit 0 {
    description to-R2;
    family inet {
      address 10.0.0.1/30;
    }
    family iso;
  }
}
lo0 {
  unit 0 {
    family inet {
      address 192.168.0.1/32;
    }
    family iso {
      address 49.0002.0192.0168.0001.00;
    }
  }
}

user@R1# show protocols
isis {
  interface ge-1/2/0.0;
  interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Verifying IS-IS Interface Configuration on page 14](#)
- [Verifying IS-IS Interface Configuration in Detail on page 14](#)
- [Verifying IS-IS Adjacencies on page 15](#)
- [Verifying IS-IS Adjacencies in Detail on page 15](#)

Verifying IS-IS Interface Configuration

Purpose Verify the status of the IS-IS-enabled interfaces.

Action From operational mode, enter the **show isis interface brief** command.

```
user@R1> show isis interface brief
IS-IS interface database:
Interface          L CirID Level 1 DR          Level 2 DR          L1/L2 Metric
lo0.0              3   0x1 Passive                Passive              0/0
ge-1/2/0.0         3   0x1 R2.02                R2.02                10/10
```

Meaning Verify that the output shows the intended configuration of the interfaces on which IS-IS is enabled.

Verifying IS-IS Interface Configuration in Detail

Purpose Verify the details of IS-IS-enabled interfaces.

Action From operational mode, enter the **show isis interface detail** command.

```
user@R1> show isis interface detail
IS-IS interface database:
lo0.0
  Index: 75, State: 0x6, Circuit id: 0x1, Circuit type: 0
  LSP interval: 100 ms, CSNP interval: disabled
  Adjacency advertisement: Advertise
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                0        64      0 Passive
    2                0        64      0 Passive
ge-1/2/0.0
  Index: 77, State: 0x6, Circuit id: 0x1, Circuit type: 3
  LSP interval: 100 ms, CSNP interval: 10 s
  Adjacency advertisement: Advertise
  Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
    1                1        64      10    9.000    27 R2.02 (not us)
    2                1        64      10    9.000    27 R2.02 (not us)
```

Meaning Check the following output fields and verify that the output shows the intended configuration of IS-IS-enabled interfaces:

- Interface—Interface configured for IS-IS.
- State—Internal implementation information.
- Circuit id—Circuit identifier.

- Circuit type—Configured level of IS-IS:
 - 1—Level 1 only
 - 2—Level 2 only
 - 3—Level 1 and Level 2
- link-state PDU interval—Time between IS-IS information messages.
- L or Level—Type of adjacency:
 - 1—Level 1 only
 - 2—Level 2 only
 - 3—Level 1 and Level 2
- Adjacencies—Adjacencies established on the interface.
- Priority—Priority value established on the interface.
- Metric—Metric value for the interface.
- Hello(s)—Intervals between hello PDUs.
- Hold(s)—Hold time on the interface.

Verifying IS-IS Adjacencies

Purpose Display brief information about IS-IS neighbors.

Action From operational mode, enter the **show isis adjacency brief** command.

```
user@R1> show isis adjacency brief
Interface          System      L State      Hold (secs) SNPA
ge-1/2/0.0         R2          1 Up          6 0:5:85:8f:c8:bd
ge-1/2/0.0         R2          2 Up          6 0:5:85:8f:c8:bd
```

Meaning Verify the adjacent routers in the IS-IS database.

Verifying IS-IS Adjacencies in Detail

Purpose Display extensive information about IS-IS neighbors.

Action From operational mode, enter the **show isis adjacency extensive** command.

```
user@R1> show isis adjacency extensive
R2
  Interface: ge-1/2/0.0, Level: 1, State: Up, Expires in 6 secs
  Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
  Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
  Topologies: Unicast
  Restart capable: Yes, Adjacency advertisement: Advertise
  LAN id: R2.02, IP addresses: 10.0.0.2
  Transition log:
    When          State      Event          Down reason
    Thu May 31 11:18:48  Up        Seenself
```

```
R2
Interface: ge-1/2/0.0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 00:40:28 ago
Circuit type: 3, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bd
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.0.2
Transition log:
When          State      Event      Down reason
Thu May 31 11:18:48  Up        SeenseIf
```

Meaning Check the following fields and verify the adjacency information about IS-IS neighbors:

- Interface—Interface through which the neighbor is reachable.
- L or Level—Configured level of IS-IS:
 - 1—Level 1 only
 - 2—Level 2 only
 - 3—Level 1 and Level 2

An exclamation point before the level number indicates that the adjacency is missing an IP address.

- State—Status of the adjacency: **Up**, **Down**, **New**, **One-way**, **Initializing**, or **Rejected**.
- Event—Message that identifies the cause of a state.
- Down reason—Reason the adjacency is down.
- Restart capable—A neighbor is configured for graceful restart.
- Transition log—List of transitions including **When**, **State**, and **Reason**.

- Related Documentation**
- *Understanding IS-IS Configuration*
 - *Example: Configuring IS-IS for GRES with Graceful Restart*
 - [Configuring Designated Router Election Priority for IS-IS on page 60](#)
 - *Junos OS Feature Support Reference for SRX Series and J Series Devices*

Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding

This example shows how to configure a multi-level IS-IS topology.

- [Requirements on page 17](#)
- [Overview on page 17](#)
- [Configuration on page 18](#)
- [Verification on page 22](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview


Like OSPF, the IS-IS protocol supports the partitioning of a routing domain into multiple areas with levels that control interarea flooding. The use of multiple levels improves protocol scalability, as Level 2 (backbone) link-state PDUs are normally not flooded into a Level 1 area.

An IS-IS Level 2 area is analogous to the OSPF backbone area (0), while a Level 1 area operates much like an OSPF totally stubby area, in that a default route is normally used to reach both inter-level and AS external routes.

Unlike OSPF, IS-IS area boundaries occur between routers, such that a given routing device is always wholly contained within a particular area. Level 1 adjacencies can be formed between routers that share a common area number, while a Level 2 adjacency can be formed between routers that might or might not share an area number.

Figure 3 on page 17 shows the topology used in this example.

Figure 3: IS-IS Multi-Level Topology

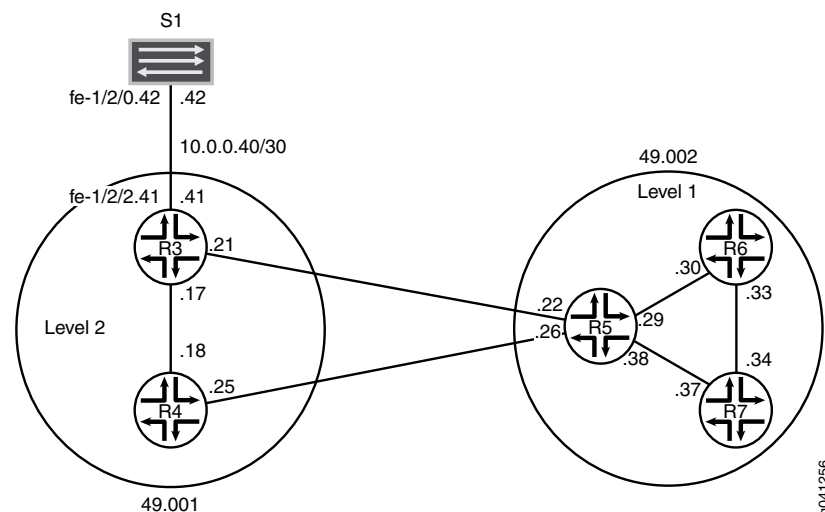

"CLI Quick Configuration" on page 18 shows the configuration for all of the devices in Figure 3 on page 17. The section "Step-by-Step Procedure" on page 19 describes the steps on Device R5.

This example has the following characteristics:

- Device R5 functions as a Level 1/Level 2 router to interconnect the Level 2 backbone area 49.001 and the Level 1 area 49.002 containing Device R6 and Device R7.
- The system ID is based on the devices' IPv4 lo0 addresses.

- Loss of any individual interface does not totally disrupt the IS-IS operation.
- The IPv4 lo0 addresses of all routers are reachable through IS-IS.
- The link between Device R3 and Device S1 appears in area 49.001 as an intra-area route. No IS-IS adjacencies can be established on this interface. This is accomplished by configuring the **passive** statement on Device R3's interface to Device S1.
- The loopback addresses of Level 2 devices do not appear in a Level 1 area.
- There is only one adjacency for each device pairing.

Configuration

CLI Quick Configuration To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R3

```
set interfaces fe-1/2/0 unit 0 description to-R4
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.17/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.21/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.41/30
set interfaces fe-1/2/2 unit 0 description to-S1
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.001.0192.0168.0003.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable
set protocols isis interface fe-1/2/2.0 passive
```

Device R4

```
set interfaces fe-1/2/0 unit 0 description to-R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.25/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.001.0192.0168.0004.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface lo0.0 level 1 disable
```

Device R5

```
set interfaces fe-1/2/0 unit 0 description to-R3
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.22/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R4
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.26/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/2 unit 0 description to-R6
set interfaces fe-1/2/2 unit 0 family inet address 10.0.0.29/30
set interfaces fe-1/2/2 unit 0 family iso
set interfaces fe-1/2/3 unit 0 description to-R7
```

```

set interfaces fe-1/2/3 unit 0 family inet address 10.0.0.38/30
set interfaces fe-1/2/3 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0005.00
set protocols isis interface fe-1/2/0.0 level 1 disable
set protocols isis interface fe-1/2/1.0 level 1 disable
set protocols isis interface fe-1/2/2.0 level 2 disable
set protocols isis interface fe-1/2/3.0 level 2 disable
set protocols isis interface lo0.0 level 1 disable

```

Device R6

```

set interfaces fe-1/2/0 unit 0 description to-R5
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.30/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R7
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.33/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0006.00
set protocols isis interface fe-1/2/0.0 level 2 disable
set protocols isis interface fe-1/2/1.0 level 2 disable
set protocols isis interface lo0.0 level 2 disable

```

Device R7

```

set interfaces fe-1/2/0 unit 0 description to-R6
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.34/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.7/32
set interfaces lo0 unit 0 family iso address 49.002.0192.0168.0007.00
set protocols isis interface fe-1/2/0.0 level 2 disable
set protocols isis interface fe-1/2/1.0 level 2 disable
set protocols isis interface lo0.0 level 2 disable

```

Device S1

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.42/30
set interfaces fe-1/2/0 unit 0 description to-R3

```

Step-by-Step Procedure The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the network interfaces.

Enable IS-IS on the interfaces by including the ISO address family on each interface.

```

[edit interfaces]
user@R5# set fe-1/2/0 unit 0 description to-R3
user@R5# set fe-1/2/0 unit 0 family inet address 10.0.0.22/30
user@R5# set fe-1/2/0 unit 0 family iso
user@R5# set fe-1/2/1 unit 0 description to-R4
user@R5# set fe-1/2/1 unit 0 family inet address 10.0.0.26/30
user@R5# set fe-1/2/1 unit 0 family iso
user@R5# set fe-1/2/2 unit 0 description to-R6

```

```

user@R5# set fe-1/2/2 unit 0 family inet address 10.0.0.29/30
user@R5# set fe-1/2/2 unit 0 family iso
user@R5# set fe-1/2/3 unit 0 description to-R7
user@R5# set fe-1/2/3 unit 0 family inet address 10.0.0.38/30
user@R5# set fe-1/2/3 unit 0 family iso

```

2. Configure two loopback interface addresses.

One address is for IPv4.

The other is for the IS-IS area 49.002 so that Device R5 can form adjacencies with the other Level 1 devices in area 49.002. Even though Device R5's NET identifies itself as belonging to the Level 1 area 49.002, its loopback interface is not configured as a Level 1 interface. Doing so would cause the route to Device R5's loopback to be injected into the Level 1 area.

```

[edit interfaces lo0 unit 0]
user@R5# set family inet address 192.168.0.5/32
user@R5# set family iso address 49.002.0192.0168.0005.00

```

3. Specify the IS-IS level on a per-interface basis.

Device R5 becomes adjacent to the other routing devices on the same level on each link.

By default, IS-IS is enabled for IS-IS areas on all interfaces on which the ISO protocol family is enabled (at the **[edit interfaces *interface-name* unit *logical-unit-number*]** hierarchy level). To disable IS-IS at any particular level on an interface, include the **disable** statement.

Device R5's loopback interface is configured to run Level 2 only. If Level 1 operation were enabled on lo0.0, Device R5 would include its loopback address in its Level 1 link-state PDU, which is incorrect for this example in which the loopback addresses of Level 2 devices must not appear in a Level 1 area.

Unlike OSPF, you must explicitly list the router's lo0 interface at the **[edit protocols isis]** hierarchy level, because this interface is the source of the router's NET, and therefore must be configured as an IS-IS interface. In IS-IS, the lo0 interface operates in the passive mode by default, which is ideal because adjacency formation can never occur on a virtual interface.

```

[edit protocols isis]
user@R5# set interface fe-1/2/0.0 level 1 disable
user@R5# set interface fe-1/2/1.0 level 1 disable
user@R5# set interface fe-1/2/0.0 level 2 disable
user@R5# set interface fe-1/2/3.0 level 2 disable
user@R5# set interface lo0.0 level 1 disable

```

Results From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R5# show interfaces
fe-1/2/0 {
  unit 0 {
    description to-R3;

```

```
        family inet {
            address 10.0.0.22/30;
        }
        family iso;
    }
}
fe-1/2/1 {
    unit 0 {
        description to-R4;
        family inet {
            address 10.0.0.26/30;
        }
        family iso;
    }
}
fe-1/2/2 {
    unit 0 {
        description to-R6;
        family inet {
            address 10.0.0.29/30;
        }
        family iso;
    }
}
fe-1/2/3 {
    unit 0 {
        description to-R7;
        family inet {
            address 10.0.0.38/30;
        }
        family iso;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.0.5/32;
        }
        family iso {
            address 49.002.0192.0168.0005.00;
        }
    }
}

user@R5# show protocols
isis {
    interface fe-1/2/0.0 {
        level 1 disable;
    }
    interface fe-1/2/1.0 {
        level 1 disable;
    }
    interface fe-1/2/0.0 {
        level 2 disable;
    }
    interface fe-1/2/3.0 {
```

```

        level 2 disable;
    }
    interface lo0.0 {
        level 1 disable;
    }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

Confirm that the configuration is working properly.

- [Checking Interface-to-Area Associations on page 22](#)
- [Verifying IS-IS Adjacencies on page 22](#)
- [Examining the IS-IS Database on page 23](#)

Checking Interface-to-Area Associations

Purpose Make sure that the interface-to-area associations are configured as expected.

Action From operational mode, enter the **show isis interface** command.

```

user@R5> show isis interface
IS-IS interface database:
Interface          L CirID Level 1 DR          Level 2 DR          L1/L2 Metric
lo0.0              3  0x1 Disabled              Passive              0/0
fe-1/2/0.0         2  0x3 Disabled              R5.03                10/10
fe-1/2/1.0         2  0x2 Disabled              R5.02                10/10
fe-1/2/0.0         1  0x1 R6.02                 Disabled              10/10
fe-1/2/3.0         1  0x4 R5.04                 Disabled              10/10

```

Meaning The output shows that Device R5's interfaces have been correctly configured with the ISO family, and that the interfaces have been placed into the correct levels.

You can also see that Device R5 has elected itself as the designated intermediate system (DIS) on its broadcast-capable IS-IS interfaces.

Verifying IS-IS Adjacencies

Purpose Verify that the expected adjacencies have formed between Device R5 and its IS-IS neighbors.

Action From operational mode, enter the **show isis adjacency detail** command.

```

user@R5> show isis adjacency detail
R3
  Interface: fe-1/2/0.0, Level: 2, State: Up, Expires in 25 secs
  Priority: 64, Up/Down transitions: 1, Last transition: 03:19:31 ago
  Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
  Topologies: Unicast
  Restart capable: Yes, Adjacency advertisement: Advertise
  LAN id: R5.03, IP addresses: 10.0.0.21

```

R4

```

Interface: fe-1/2/1.0, Level: 2, State: Up, Expires in 24 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:36 ago
Circuit type: 2, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.02, IP addresses: 10.0.0.25

```

R6

```

Interface: fe-1/2/0.0, Level: 1, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:20:24 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R6.02, IP addresses: 10.0.0.30

```

R7

```

Interface: fe-1/2/3.0, Level: 1, State: Up, Expires in 21 secs
Priority: 64, Up/Down transitions: 1, Last transition: 03:19:29 ago
Circuit type: 1, Speaks: IP, IPv6, MAC address: 0:5:85:8f:c8:bc
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R5.04, IP addresses: 10.0.0.37

```

Meaning These results confirm that Device R5 has two Level 2 adjacencies and two Level 1 adjacencies.

Examining the IS-IS Database

Purpose Because Device R5 is a Level 1/Level 2 (L1/L2) attached router, examine the Level 1 link-state database associated with area 49.002 to confirm that loopback addresses from backbone routers are not being advertised into the Level 1 area.

Action From operational mode, enter the **show isis database detail** command.

```
user@R5> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```

R5.00-00 Sequence: 0x19, Checksum: 0x7488, Lifetime: 727 secs
  IS neighbor: R5.04                      Metric:      10
  IS neighbor: R6.02                      Metric:      10
  IP prefix: 10.0.0.28/30                  Metric:      10 Internal Up
  IP prefix: 10.0.0.36/30                  Metric:      10 Internal Up

```

```

R5.04-00 Sequence: 0x14, Checksum: 0x2668, Lifetime: 821 secs
  IS neighbor: R5.00                      Metric:       0
  IS neighbor: R7.00                      Metric:       0

```

```

R6.00-00 Sequence: 0x17, Checksum: 0xa65, Lifetime: 774 secs
  IS neighbor: R6.02                      Metric:      10
  IS neighbor: R7.02                      Metric:      10
  IP prefix: 10.0.0.28/30                  Metric:      10 Internal Up
  IP prefix: 10.0.0.32/30                  Metric:      10 Internal Up
  IP prefix: 192.168.0.6/32                Metric:       0 Internal Up

```

```

R6.02-00 Sequence: 0x13, Checksum: 0xd1c0, Lifetime: 908 secs
  IS neighbor: R5.00                      Metric:       0
  IS neighbor: R6.00                      Metric:       0

```

```
R7.00-00 Sequence: 0x17, Checksum: 0xe39, Lifetime: 775 secs
```

```

IS neighbor: R5.04                      Metric:      10
IS neighbor: R7.02                      Metric:      10
IP prefix: 10.0.0.32/30                 Metric:      10 Internal Up
IP prefix: 10.0.0.36/30                 Metric:      10 Internal Up
IP prefix: 192.168.0.7/32               Metric:      0 Internal Up

R7.02-00 Sequence: 0x13, Checksum: 0x404d, Lifetime: 966 secs
IS neighbor: R6.00                      Metric:      0
IS neighbor: R7.00                      Metric:      0

IS-IS level 2 link-state database:

R3.00-00 Sequence: 0x17, Checksum: 0x5f84, Lifetime: 1085 secs
IS neighbor: R4.02                      Metric:      10
IS neighbor: R5.03                      Metric:      10
IP prefix: 10.0.0.16/30                 Metric:      10 Internal Up
IP prefix: 10.0.0.20/30                 Metric:      10 Internal Up
IP prefix: 10.0.0.40/30                 Metric:      10 Internal Up
IP prefix: 192.168.0.3/32               Metric:      0 Internal Up

R4.00-00 Sequence: 0x17, Checksum: 0xab3a, Lifetime: 949 secs
IS neighbor: R4.02                      Metric:      10
IS neighbor: R5.02                      Metric:      10
IP prefix: 10.0.0.16/30                 Metric:      10 Internal Up
IP prefix: 10.0.0.24/30                 Metric:      10 Internal Up
IP prefix: 192.168.0.4/32               Metric:      0 Internal Up

R4.02-00 Sequence: 0x14, Checksum: 0xf2a8, Lifetime: 1022 secs
IS neighbor: R3.00                      Metric:      0
IS neighbor: R4.00                      Metric:      0

R5.00-00 Sequence: 0x1f, Checksum: 0x20d7, Lifetime: 821 secs
IS neighbor: R5.02                      Metric:      10
IS neighbor: R5.03                      Metric:      10
IP prefix: 10.0.0.20/30                 Metric:      10 Internal Up
IP prefix: 10.0.0.24/30                 Metric:      10 Internal Up
IP prefix: 10.0.0.28/30                 Metric:      10 Internal Up
IP prefix: 10.0.0.32/30                 Metric:      20 Internal Up
IP prefix: 10.0.0.36/30                 Metric:      10 Internal Up
IP prefix: 192.168.0.5/32               Metric:      0 Internal Up
IP prefix: 192.168.0.6/32               Metric:      10 Internal Up
IP prefix: 192.168.0.7/32               Metric:      10 Internal Up

R5.02-00 Sequence: 0x14, Checksum: 0x6135, Lifetime: 977 secs
IS neighbor: R4.00                      Metric:      0
IS neighbor: R5.00                      Metric:      0

R5.03-00 Sequence: 0x14, Checksum: 0x1483, Lifetime: 1091 secs
IS neighbor: R3.00                      Metric:      0
IS neighbor: R5.00                      Metric:      0

```

Meaning This display indicates that Device R5's loopback interface is correctly configured to run Level 2 only. Had Level 1 operation been enabled on lo0.0, Device R5 would have then included its loopback address in its Level 1 link-state PDU.

You can also see that Device R5 has Level 2 link-state PDUs, received from its adjacent neighbors.

Like an OSPF totally stubby area, no backbone (Level 2) or external prefixes are leaked into a Level 1 area, by default. Level 1 prefixes are leaked up into the IS-IS backbone, however, as can be seen in Device R5's Level 2 link-state PDU.

**Related
Documentation**

- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups](#)

Example: Redistributing OSPF Routes into IS-IS

This example shows how to redistribute OSPF routes into an IS-IS network.

- [Requirements on page 25](#)
- [Overview on page 25](#)
- [Configuration on page 26](#)
- [Verification on page 31](#)

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

Export policy can be applied to IS-IS to facilitate route redistribution.


Junos OS does not support the application of import policy for link-state routing protocols like IS-IS because such policies can lead to inconsistent link-state database (LSDB) entries, which in turn can result in routing inconsistencies.

In this example, OSPF routes 192.168.0/24 through 192.168.3/24 are redistributed into IS-IS area 49.0002 from Device R2.

In addition, policies are configured to ensure that Device R1 can reach destinations on the 10.0.0.44/30 network, and that Device R3 can reach destinations on the 10.0.0.36/30 network. This enables end-to-end reachability.

[Figure 4 on page 26](#) shows the topology used in this example.

Figure 4: IS-IS Route Redistribution Topology

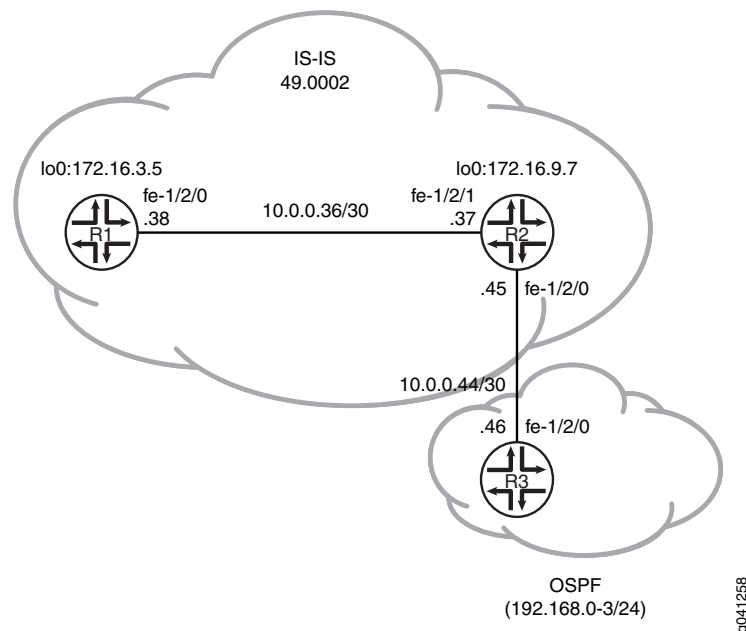

“CLI Quick Configuration” on page 26 shows the configuration for all of the devices in Figure 4 on page 26. The section “Step-by-Step Procedure” on page 27 describes the steps on Device R2. “Step-by-Step Procedure” on page 28 describes the steps on Device R3.

Configuration

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```

set interfaces fe-1/2/0 unit 0 description to-R7
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.38/30
set interfaces fe-1/2/0 unit 0 family iso
set interfaces lo0 unit 0 family inet address 172.16.3.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0305.00
set protocols isis interface fe-1/2/0.0
set protocols isis interface lo0.0

```

Device R2

```

set interfaces fe-1/2/1 unit 0 description to-R5
set interfaces fe-1/2/1 unit 0 family inet address 10.0.0.37/30
set interfaces fe-1/2/1 unit 0 family iso
set interfaces fe-1/2/0 unit 0 description to-OSPF-network
set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.45/30
set interfaces lo0 unit 0 family inet address 172.16.9.7/32
set interfaces lo0 unit 0 family iso address 49.0002.0172.0016.0907.00
set protocols isis export ospf-isis
set protocols isis export send-direct-to-isis-neighbors
set protocols isis interface fe-1/2/1.0
set protocols isis interface lo0.0

```

```

set protocols ospf export send-direct-to-ospf-neighbors
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0
set protocols ospf area 0.0.0.1 interface lo0.0 passive
set policy-options policy-statement ospf-isis term 1 from protocol ospf
set policy-options policy-statement ospf-isis term 1 from route-filter 192.168.0.0/22
  longer
set policy-options policy-statement ospf-isis term 1 then accept
set policy-options policy-statement send-direct-to-isis-neighbors from protocol direct
set policy-options policy-statement send-direct-to-isis-neighbors from route-filter
  10.0.0.44/30 exact
set policy-options policy-statement send-direct-to-isis-neighbors then accept
set policy-options policy-statement send-direct-to-ospf-neighbors from protocol direct
set policy-options policy-statement send-direct-to-ospf-neighbors from route-filter
  10.0.0.36/30 exact
set policy-options policy-statement send-direct-to-ospf-neighbors then accept

```

Device R3

```

set interfaces fe-1/2/0 unit 0 family inet address 10.0.0.46/30
set interfaces lo0 unit 0 family inet address 192.168.1.1/32
set interfaces lo0 unit 0 family inet address 192.168.2.1/32
set interfaces lo0 unit 0 family inet address 192.168.3.1/32
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set protocols ospf export ospf
set protocols ospf area 0.0.0.1 interface fe-1/2/0.0
set protocols ospf area 0.0.0.1 interface lo0.0 passive
set policy-options policy-statement ospf term 1 from protocol static
set policy-options policy-statement ospf term 1 then accept
set routing-options static route 192.168.0.0/24 discard
set routing-options static route 192.168.1.0/24 discard
set routing-options static route 192.168.3.0/24 discard
set routing-options static route 192.168.2.0/24 discard

```

Step-by-Step Procedure

To configure Device R2:

1. Configure the network interfaces.


```

[edit interfaces]
user@R2# set fe-1/2/1 unit 0 description to-R5
user@R2# set fe-1/2/1 unit 0 family inet address 10.0.0.37/30
user@R2# set fe-1/2/1 unit 0 family iso
user@R2# set fe-1/2/0 unit 0 description to-OSPF-network
user@R2# set fe-1/2/0 unit 0 family inet address 10.0.0.45/30
user@R2# set lo0 unit 0 family inet address 172.16.9.7/32
user@R2# set lo0 unit 0 family iso address 49.0002.0172.0016.0907.00

```
2. Configure IS-IS on the interface facing Device R1 and the loopback interface.


```

[edit protocols isis]
user@R2# set interface fe-1/2/1.0
user@R2# set interface lo0.0

```
3. Configure the policy that enables Device R1 to reach the 10.0.0.44/30 network.


```

[edit policy-options policy-statement send-direct-to-isis-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.44/30 exact
user@R2# set then accept

```
4. Apply the policy that enables Device R1 to reach the 10.0.0.44/30 network.

- ```
[edit protocols isis]
user@R2# set export send-direct-to-isis-neighbors
```
5. Configure OSPF on the interfaces.
 

```
[edit protocols ospf]
user@R2# set area 0.0.0.1 interface fe-1/2/0.0
user@R2# set area 0.0.0.1 interface lo0.0 passive
```
  6. Configure the OSPF route redistribution policy.
 

```
[edit policy-options policy-statement ospf-isis term 1]
user@R2# set from protocol ospf
user@R2# set from route-filter 192.168.0.0/22 longer
user@R2# set then accept
```
  7. Apply the OSPF route redistribution policy to the IS-IS instance.
 

```
[edit protocols isis]
user@R2# set export ospf-isis
```
  8. Configure the policy that enables Device R3 to reach the 10.0.0.36/30 network.
 

```
[edit policy-options policy-statement send-direct-to-ospf-neighbors]
user@R2# set from protocol direct
user@R2# set from route-filter 10.0.0.36/30 exact
user@R2# set then accept
```
  9. Apply the policy that enables Device R3 to reach the 10.0.0.36/30 network.
 

```
[edit protocols ospf]
user@R2# set export send-direct-to-ospf-neighbors
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure multi-level IS-IS:

1. Configure the network interfaces.
 

Multiple addresses are configured on the loopback interface to simulate multiple route destinations.

```
[edit interfaces]
user@R3# set fe-1/2/0 unit 0 family inet address 10.0.0.46/30
user@R3# set lo0 unit 0 family inet address 192.168.1.1/32
user@R3# set lo0 unit 0 family inet address 192.168.2.1/32
user@R3# set lo0 unit 0 family inet address 192.168.3.1/32
user@R3# set lo0 unit 0 family inet address 192.168.0.1/32
```

2. Configure static routes to the loopback interface addresses.

These are the routes that are redistributed into IS-IS.

```
[edit routing-options static]
user@R3# set route 192.168.0.0/24 discard
user@R3# set route 192.168.1.0/24 discard
user@R3# set route 192.168.3.0/24 discard
user@R3# set route 192.168.2.0/24 discard
```

3. Configure OSPF on the interfaces.  

```
[edit protocols ospf area 0.0.0.1]
user@R3# set interface fe-1/2/0.0
user@R3# set interface lo0.0 passive
```
4. Configure the OSPF policy to export the static routes.  

```
[edit policy-options policy-statement ospf term 1]
user@R3# set from protocol static
user@R3# set then accept
```
5. Apply the OSPF export policy.  

```
[edit protocols ospf]
user@R3# set export ospf
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, **show policy-options**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
Device R2 user@R2# show interfaces
fe-1/2/1 {
 unit 0 {
 description to-R5;
 family inet {
 address 10.0.0.37/30;
 }
 family iso;
 }
}
fe-1/2/0 {
 unit 0 {
 description to-OSPF-network;
 family inet {
 address 10.0.0.45/30;
 }
 }
}
lo0 {
 unit 0 {
 family inet {
 address 172.16.9.7/32;
 }
 family iso {
 address 49.0002.0172.0016.0907.00;
 }
 }
}

user@R2# show protocols
isis {
 export [ospf-isis send-direct-to-isis-neighbors];
 interface fe-1/2/1.0;
 interface lo0.0;
}
```

```
ospf {
 export send-direct-to-ospf-neighbors;
 area 0.0.0.1 {
 interface fe-1/2/0.0;
 interface lo0.0 {
 passive;
 }
 }
}

user@R2# show policy-options
policy-statement ospf-isis {
 term 1 {
 from {
 protocol ospf;
 route-filter 192.168.0.0/22 longer;
 }
 then accept;
 }
}

policy-statement send-direct-to-isis-neighbors {
 from {
 protocol direct;
 route-filter 10.0.0.44/30 exact;
 }
 then accept;
}

policy-statement send-direct-to-ospf-neighbors {
 from {
 protocol direct;
 route-filter 10.0.0.36/30 exact;
 }
 then accept;
}
```

**Device R3**

```
user@R3# show interfaces
fe-1/2/0 {
 unit 0 {
 family inet {
 address 10.0.0.46/30;
 }
 }
}

lo0 {
 unit 0 {
 family inet {
 address 192.168.1.1/32;
 address 192.168.2.1/32;
 address 192.168.3.1/32;
 address 192.168.0.1/32;
 }
 }
}

user@R3# show protocols
ospf {
```

```

export ospf;
area 0.0.0.1 {
 interface fe-1/2/0.0;
 interface lo0.0 {
 passive;
 }
}
}

user@R3# show policy-options
policy-statement ospf {
 term 1 {
 from protocol static;
 then accept;
 }
}

user@R3# show routing-options
static {
 route 192.168.0.0/24 discard;
 route 192.168.1.0/24 discard;
 route 192.168.3.0/24 discard;
 route 192.168.2.0/24 discard;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Verifying OSPF Route Advertisement on page 31](#)
- [Verifying Route Redistribution on page 32](#)
- [Verifying Connectivity on page 32](#)

### Verifying OSPF Route Advertisement

**Purpose** Make sure that the expected routes are advertised by OSPF.

**Action** From operational mode on Device R2, enter the **show route protocol ospf** command.

```
user@R2> show route protocol ospf
```

```
inet.0: 15 destinations, 15 routes (15 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
```

```

192.168.0.0/24 *[OSPF/150] 03:54:21, metric 0, tag 0
 > to 10.0.0.46 via fe-1/2/0.0
192.168.0.1/32 *[OSPF/10] 03:54:21, metric 1
 > to 10.0.0.46 via fe-1/2/0.0
192.168.1.0/24 *[OSPF/150] 03:54:21, metric 0, tag 0
 > to 10.0.0.46 via fe-1/2/0.0
192.168.1.1/32 *[OSPF/10] 03:54:21, metric 1
 > to 10.0.0.46 via fe-1/2/0.0
192.168.2.0/24 *[OSPF/150] 03:54:21, metric 0, tag 0
 > to 10.0.0.46 via fe-1/2/0.0

```

```

192.168.2.1/32 *[OSPF/10] 03:54:21, metric 1
 > to 10.0.0.46 via fe-1/2/0.0
192.168.3.0/24 *[OSPF/150] 03:54:21, metric 0, tag 0
 > to 10.0.0.46 via fe-1/2/0.0
192.168.3.1/32 *[OSPF/10] 03:54:21, metric 1
 > to 10.0.0.46 via fe-1/2/0.0
224.0.0.5/32 *[OSPF/10] 03:56:03, metric 1
 MultiRecv

iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)

```

**Meaning** The 192.168/16 routes are advertised by OSPF.

### Verifying Route Redistribution

**Purpose** Make sure that the expected routes are redistributed from OSPF into IS-IS.

**Action** From operational mode on Device R1, enter the **show route protocol isis** command.

```
user@R1> show route protocol isis
```

```

inet.0: 13 destinations, 13 routes (13 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

```

```

10.0.0.44/30 *[IS-IS/160] 03:45:24, metric 20
 > to 10.0.0.37 via fe-1/2/0.0
172.16.9.7/32 *[IS-IS/15] 03:49:46, metric 10
 > to 10.0.0.37 via fe-1/2/0.0
192.168.0.0/24 *[IS-IS/160] 03:49:46, metric 10
 > to 10.0.0.37 via fe-1/2/0.0
192.168.0.1/32 *[IS-IS/160] 03:49:46, metric 11, tag2 1
 > to 10.0.0.37 via fe-1/2/0.0
192.168.1.0/24 *[IS-IS/160] 03:49:46, metric 10
 > to 10.0.0.37 via fe-1/2/0.0
192.168.1.1/32 *[IS-IS/160] 03:49:46, metric 11, tag2 1
 > to 10.0.0.37 via fe-1/2/0.0
192.168.2.0/24 *[IS-IS/160] 03:49:46, metric 10
 > to 10.0.0.37 via fe-1/2/0.0
192.168.2.1/32 *[IS-IS/160] 03:49:46, metric 11, tag2 1
 > to 10.0.0.37 via fe-1/2/0.0
192.168.3.0/24 *[IS-IS/160] 03:49:46, metric 10
 > to 10.0.0.37 via fe-1/2/0.0
192.168.3.1/32 *[IS-IS/160] 03:49:46, metric 11, tag2 1
 > to 10.0.0.37 via fe-1/2/0.0

```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
```

**Meaning** The 192.168/16 routes are redistributed into IS-IS.

### Verifying Connectivity

**Purpose** Check that Device R1 can reach the destinations on Device R3.

**Action** From operational mode, enter the **ping** command.

```
user@R1> ping 192.168.1.1
```



```

PING 192.168.1.1 (192.168.1.1): 56 data bytes
64 bytes from 192.168.1.1: icmp_seq=0 ttl=63 time=2.089 ms
64 bytes from 192.168.1.1: icmp_seq=1 ttl=63 time=1.270 ms
64 bytes from 192.168.1.1: icmp_seq=2 ttl=63 time=2.135 ms

```

**Meaning** These results confirm that Device R1 can reach the destinations in the OSPF network.

**Related Documentation**

- [Understanding Routing Policies](#)

## Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies

- [Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 33](#)
- [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33](#)

### Understanding IS-IS IPv4 and IPv6 Unicast Topologies

You can configure IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to inet6.0. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This enables you to exercise control over the paths that unicast data takes through a network.

A topology is the set of joined nodes. IS-IS evaluates all the paths in a single topology for each IS-IS level and uses the shortest-path-first (SPF) algorithm to determine the best path among all the feasible paths. Topology discovery and SPF calculation is performed in a protocol-neutral fashion because it is done at Layer 2 of the OSI model. If you load the topology with reachability information for a certain protocol (for example, IP), the assumption is that the circuits that are supposed to provide reachability between routing devices can carry the protocol. The SPF algorithm has a per-link orientation, not a per-address family or per-protocol orientation.

Multitopology routing enables you to override this default behavior by enabling a per-address family, per-protocol SPF calculation.

The additional CPU load associated with multiple runs of the SPF algorithm is generally not an issue with the processing power available on today's routing device control planes.

The multitopology extensions alter existing type, length, and value (TLV) tuples by adding a topology ID. Each routing device in a given topology maintains its adjacencies and runs a per-topology SPF calculation.

### Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies

This example shows how to configure IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology.

- [Requirements on page 34](#)
- [Overview on page 34](#)

- [Configuration on page 35](#)
- [Verification on page 39](#)

## Requirements

---

No special configuration beyond device initialization is required before configuring this example.

## Overview

---

This example focuses on IPv4 and IPv6 unicast topologies. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This enables you to exercise control over the paths that unicast data takes through a network.

To enable an IPv6 unicast topology for IS-IS, include the **ipv6-unicast** statement:

```
isis {
 topologies {
 ipv6-unicast;
 }
}
```

To configure a metric for the IPv6 unicast topology, include the **ipv6-unicast-metric** statement:


```
isis {
 interface interface-name {
 level level-number {
 ipv6-unicast-metric number;
 }
 }
}
```

To exclude an interface from the IPv6 unicast topologies for IS-IS, include the **no-ipv6-unicast** statement:

```
isis {
 interface interface-name {
 no-ipv6-unicast;
 }
}
```

[Figure 5 on page 35](#) shows the topology used in this example. The black lines indicate link membership in the IPv6 topology. The gray lines indicate membership to the IPv4 topology. Using regular TLVs, it would not be possible to build multiple topologies and run an SPF calculation based on them. The multitopology extensions describe an extension to carry the set of supported protocols in the hello packet. After activating multitopology routing support on a link, the link carries all the topologies that the underlying circuit is able to relay.

Figure 5: IS-IS IPv4 and IPv6 Unicast Topologies

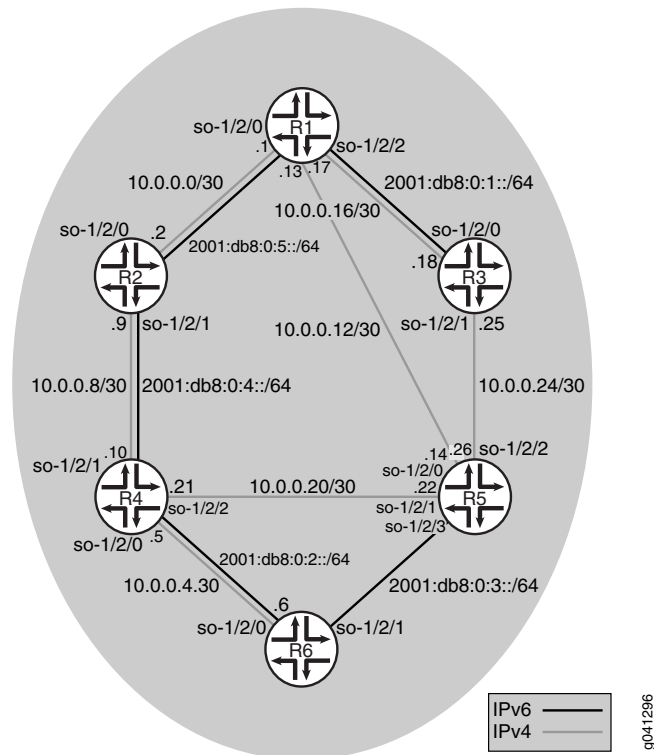

"CLI Quick Configuration" on page 35 shows the configuration for all of the devices in Figure 5 on page 35. The section "Step-by-Step Procedure" on page 37 describes the steps on Device R1.

### Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```

set interfaces so-1/2/0 unit 0 family inet address 10.0.0.1/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.13/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.17/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.1/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::1/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface so-1/2/2.0
set protocols isis interface lo0.0

```

**Device R2**

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.2/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.9/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:4::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0002.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::2/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.2
set protocols isis interface so-1/2/1.0
set protocols isis interface lo0.0
```

**Device R3**

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.18/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.25/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.3/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0003.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::3/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface lo0.0
```

**Device R4**

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.5/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:2::/64 eui-64
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.10/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.21/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces lo0 unit 0 family inet address 192.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0004.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::4/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0
set protocols isis interface so-1/2/2.0 no-ipv6-unicast
set protocols isis interface lo0.0
```

**Device R5**

```
set interfaces so-1/2/0 unit 0 family inet address 10.0.0.14/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet address 10.0.0.22/30
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/2 unit 0 family inet address 10.0.0.26/30
set interfaces so-1/2/2 unit 0 family iso
set interfaces so-1/2/3 unit 0 family iso
set interfaces so-1/2/3 unit 0 family inet6 address 2001:db8:0:3::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.5/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0005.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::5/128
```

```

set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0 no-ipv6-unicast
set protocols isis interface so-1/2/1.0 no-ipv6-unicast
set protocols isis interface so-1/2/2.0 no-ipv6-unicast
set protocols isis interface so-1/2/3.0
set protocols isis interface lo0.0

```

**Device R6**

```

set interfaces so-1/2/0 unit 0 family inet address 10.0.0.6/30
set interfaces so-1/2/0 unit 0 family iso
set interfaces so-1/2/0 unit 0 family inet6 address 2001:db8:0:2::/64 eui-64
set interfaces so-1/2/1 unit 0 family iso
set interfaces so-1/2/1 unit 0 family inet6 address 2001:db8:0:3::/64 eui-64
set interfaces lo0 unit 0 family inet address 192.168.0.6/32
set interfaces lo0 unit 0 family iso address 49.0002.0192.0168.0006.00
set interfaces lo0 unit 0 family inet6 address 2001:db8::6/128
set protocols isis topologies ipv6-unicast
set protocols isis interface so-1/2/0.0
set protocols isis interface so-1/2/1.0
set protocols isis interface lo0.0

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure an alternate IPv6 unicast topology:

1. Configure the interfaces.

```

[edit interfaces]
user@R1# set so-1/2/0 unit 0 family inet address 10.0.0.1/30
user@R1# set so-1/2/0 unit 0 family iso
user@R1# set so-1/2/0 unit 0 family inet6 address 2001:db8:0:5::/64 eui-64
user@R1# set so-1/2/1 unit 0 family inet address 10.0.0.13/30
user@R1# set so-1/2/1 unit 0 family iso
user@R1# set so-1/2/2 unit 0 family inet address 10.0.0.17/30
user@R1# set so-1/2/2 unit 0 family iso
user@R1# set so-1/2/2 unit 0 family inet6 address 2001:db8:0:1::/64 eui-64
user@R1# set lo0 unit 0 family inet address 192.168.0.1/32
user@R1# set lo0 unit 0 family iso address 49.0002.0192.0168.0001.00
user@R1# set lo0 unit 0 family inet6 address 2001:db8::1/128

```

2. Enable IS-IS on the interfaces.

```

[edit protocols isis]
user@R1# set interface so-1/2/0.0
user@R1# set interface so-1/2/1.0
user@R1# set interface so-1/2/2.0
user@R1# set interface lo0.0

```

3. Enable multitopology routing on the IS-IS interfaces.

The **ipv6-unicast** statement enables multitopology IS-IS routing on all interfaces that have **family iso** and **family inet6** configured and are listed at the **[edit protocols isis interface]** hierarchy level.

```

[edit protocols isis]
user@R1# set topologies ipv6-unicast

```

4. Disable IPv6 unicast support on a given interface.

If you do not want to run multitopology IS-IS routing for IPv6 on a given interface, you can disable multitopology routing by including the **no-ipv6-unicast** statement in the IS-IS interface configuration.

```
[edit protocols isis]
user@R1# set interface so-1/2/1.0 no-ipv6-unicast
```

**Results** From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show interfaces
so-1/2/0 {
 unit 0 {
 family inet {
 address 10.0.0.1/30;
 }
 family iso;
 family inet6 {
 address 2001:db8:0:5::/64 {
 eui-64;
 }
 }
 }
}
so-1/2/1 {
 unit 0 {
 family inet {
 address 10.0.0.13/30;
 }
 family iso;
 }
}
so-1/2/2 {
 unit 0 {
 family inet {
 address 10.0.0.17/30;
 }
 family iso;
 family inet6 {
 address 2001:db8:0:1::/64 {
 eui-64;
 }
 }
 }
}
lo0 {
 unit 0 {
 family inet {
 address 192.168.0.1/32;
 }
 family iso {
 address 49.0002.0192.0168.0001.00;
```

```

 }
 family inet6 {
 address 2001:db8::1/128;
 }
}

user@R1# show protocols
isis {
 topologies ipv6-unicast;
 interface so-1/2/0.0;
 interface so-1/2/1.0 {
 no-ipv6-unicast;
 }
 interface so-1/2/2.0;
 interface lo0.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

- [Checking the Topologies on Neighbors on page 39](#)
- [Checking the IS-IS SPF Calculations on page 40](#)
- [Checking the Tcpdump Output on page 41](#)

### *Checking the Topologies on Neighbors*

**Purpose** Determine what topologies are supported on neighboring IS-IS devices.

**Action** From operational mode, enter the **show isis adjacency detail** command.

```
user@R1> show isis adjacency detail
```

R2

```

Interface: so-1/2/0.0, Level: 3, State: Up, Expires in 24 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:28:16 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.2
IPv6 addresses: fe80::2a0:a514:0:24c

```

R5

```

Interface: so-1/2/1.0, Level: 3, State: Up, Expires in 21 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:27:47 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.14

```

R3

```

Interface: so-1/2/2.0, Level: 3, State: Up, Expires in 22 secs
Priority: 0, Up/Down transitions: 1, Last transition: 05:27:25 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast

```

```
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 10.0.0.18
IPv6 addresses: fe80::2a0:a514:0:124c
```

**Meaning** As expected, the adjacency with Device R5 only supports the IPv4 unicast topology, while the adjacencies with Device R2 and Device R3 support both the IPv4 and IPv6 topologies.

### *Checking the IS-IS SPF Calculations*

**Purpose** Verify that separate SPF calculations are being run for IPv4 and IPv6.

**Action** From operational mode, enter the **show isis spf brief** command.

```
user@R1> show isis spf brief
```

#### **IPv4 Unicast IS-IS level 1 SPF results:**

| Node  | Metric | Interface  | NH      | Via | SNPA |
|-------|--------|------------|---------|-----|------|
| R6.00 | 20     | so-1/2/1.0 | IPV4 R5 |     |      |
| R4.00 | 20     | so-1/2/0.0 | IPV4 R2 |     |      |
| R5.00 | 10     | so-1/2/1.0 | IPV4 R5 |     |      |
| R3.00 | 10     | so-1/2/2.0 | IPV4 R3 |     |      |
| R2.00 | 10     | so-1/2/0.0 | IPV4 R2 |     |      |
| R1.00 | 0      |            |         |     |      |

6 nodes

#### **IPv4 Unicast IS-IS level 2 SPF results:**

| Node  | Metric | Interface  | NH      | Via | SNPA |
|-------|--------|------------|---------|-----|------|
| R6.00 | 20     | so-1/2/1.0 | IPV4 R5 |     |      |
| R4.00 | 20     | so-1/2/0.0 | IPV4 R2 |     |      |
| R5.00 | 10     | so-1/2/1.0 | IPV4 R5 |     |      |
| R3.00 | 10     | so-1/2/2.0 | IPV4 R3 |     |      |
| R2.00 | 10     | so-1/2/0.0 | IPV4 R2 |     |      |
| R1.00 | 0      |            |         |     |      |

6 nodes

#### **IPv6 Unicast IS-IS level 1 SPF results:**

| Node  | Metric | Interface  | NH      | Via | SNPA |
|-------|--------|------------|---------|-----|------|
| R5.00 | 40     | so-1/2/0.0 | IPV6 R2 |     |      |
| R6.00 | 30     | so-1/2/0.0 | IPV6 R2 |     |      |
| R4.00 | 20     | so-1/2/0.0 | IPV6 R2 |     |      |
| R3.00 | 10     | so-1/2/2.0 | IPV6 R3 |     |      |
| R2.00 | 10     | so-1/2/0.0 | IPV6 R2 |     |      |
| R1.00 | 0      |            |         |     |      |

6 nodes

#### **IPv6 Unicast IS-IS level 2 SPF results:**

| Node  | Metric | Interface  | NH      | Via | SNPA |
|-------|--------|------------|---------|-----|------|
| R5.00 | 40     | so-1/2/0.0 | IPV6 R2 |     |      |
| R6.00 | 30     | so-1/2/0.0 | IPV6 R2 |     |      |
| R4.00 | 20     | so-1/2/0.0 | IPV6 R2 |     |      |
| R3.00 | 10     | so-1/2/2.0 | IPV6 R3 |     |      |
| R2.00 | 10     | so-1/2/0.0 | IPV6 R2 |     |      |
| R1.00 | 0      |            |         |     |      |

6 nodes

**Meaning** As expected, SPF calculations are being performed for IPv4 and IPv6 topologies.



**Checking the Tcpcdump Output**

**Purpose** Verify that the link can be a member of both the IPv4 unicast topology and the IPv6 unicast topology.

**Action** user@R1> monitor traffic detail interface so-1/2/0.0  
[...]

```
15:52:35.719540 In IS-IS, length 82
p2p IIH, hlen: 20, v: 1, pdu-v: 1, sys-id-len: 6 (0), max-area: 3 (0)
source-id: 0192.0168.0002, holding time: 27s, Flags: [Level 1, Level
2]

circuit-id: 0x01, PDU length: 82
Point-to-point Adjacency State TLV #240, length: 15
Adjacency State: Up (0)
Extended Local circuit-ID: 0x00000054
Neighbor System-ID: 0192.0168.0001
Neighbor Extended Local circuit-ID: 0x00000043
Protocols supported TLV #129, length: 2
NLPID(s): IPv4 (0xcc), IPv6 (0x8e)
IPv4 Interface address(es) TLV #132, length: 4
IPv4 interface address: 10.0.0.2
IPv6 Interface address(es) TLV #232, length: 16
IPv6 interface address: fe80::2a0:a514:0:24c
Area address(es) TLV #1, length: 4
Area address (length: 3): 49.0002
Restart Signaling TLV #211, length: 3
Flags [none], Remaining holding time 0s
Multi Topology TLV #229, length: 4
 IPv4 unicast Topology (0x000), Flags: [none]
 IPv6 unicast Topology (0x002), Flags: [none]
```

**Meaning** The IS-IS hello (IIH) packet shows that IPv4 and IPv6 are supported. The hello packet lists valid IPv4 and IPv6 addresses, and therefore the routing device can create valid next-hop entries. The supported protocols are listed in the multitopology TLV #229.

**Related Documentation**

- [Example: Configuring IS-IS Dual Stacking of IPv4 and IPv6 Unicast Addresses](#)

## Example: Configuring IS-IS Multicast Topology

---

- [IS-IS Multicast Topologies Overview on page 42](#)
- [Example: Configuring IS-IS Multicast Topology on page 43](#)

## IS-IS Multicast Topologies Overview

Most multicast routing protocols perform a reverse-path forwarding (RPF) check on the source of multicast data packets. If a packet comes in on the interface that is used to send data to the source, the packet is accepted and forwarded to one or more downstream interfaces. Otherwise, the packet is discarded and a notification is sent to the multicast routing protocol running on the interface.

In certain instances, the unicast routing table used for the RPF check is also the table used for forwarding unicast data packets. Thus, unicast and multicast routing are congruent. In other cases, where it is preferred that multicast routing be independent of unicast routing, the multicast routing protocols are configured to perform the RPF check using an alternate unicast routing table `inet.2`.

You can configure IS-IS to calculate an alternate IPv4 multicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to `inet.2`. The IS-IS interface metrics for the multicast topology can be configured independently of the unicast metrics. You can also selectively disable interfaces from participating in the multicast topology while continuing to participate in the regular unicast topology. This enables you to exercise control over the paths that multicast data takes through a network so that it is independent of unicast data paths. You can also configure IS-IS to calculate an alternate IPv6 multicast topology, in addition to the normal IPv6 unicast topology.



**NOTE:** IS-IS only starts advertising the routes when the interface routes are in `inet.2`.

Table 3 on page 42 lists the various IPv4 statements you can use to configure IS-IS topologies.

**Table 3: IPv4 Statements**

| Statement                                        | Description                                                               |
|--------------------------------------------------|---------------------------------------------------------------------------|
| <code>ipv4-multicast</code>                      | Enables an alternate IPv4 multicast topology.                             |
| <code>ipv4-multicast-metric <i>number</i></code> | Configures the multicast metric for an alternate IPv4 multicast topology. |
| <code>no-ipv4-multicast</code>                   | Excludes an interface from the IPv4 multicast topology.                   |
| <code>no-unicast-topology</code>                 | Excludes an interface from the IPv4 unicast topologies.                   |

Table 4 on page 42 lists the various IPv6 statements you can use to configure IS-IS topologies.

**Table 4: IPv6 Statements**

| Statement                   | Description                                   |
|-----------------------------|-----------------------------------------------|
| <code>ipv6-multicast</code> | Enables an alternate IPv6 multicast topology. |

Table 4: IPv6 Statements (*continued*)

| Statement                                        | Description                                                               |
|--------------------------------------------------|---------------------------------------------------------------------------|
| <code>ipv6-multicast-metric <i>number</i></code> | Configures the multicast metric for an alternate IPv6 multicast topology. |
| <code>ipv6-unicast-metric <i>number</i></code>   | Configures the unicast metric for an alternate IPv6 multicast topology.   |
| <code>no-ipv6-multicast</code>                   | Excludes an interface from the IPv6 multicast topology.                   |
| <code>no-ipv6-unicast</code>                     | Excludes an interface from the IPv6 unicast topologies.                   |

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

### Example: Configuring IS-IS Multicast Topology

This example shows how to configure a multicast topology for an IS-IS network.

- [Requirements on page 43](#)
- [Overview on page 43](#)
- [Configuration on page 44](#)
- [Verification on page 48](#)

#### Requirements

Before you begin, configure IS-IS on all routers. See [“Example: Configuring IS-IS” on page 11](#) for information about the required IS-IS configuration.

This example uses the following hardware and software components:


- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

#### Overview

This example shows an IS-IS multicast topology configuration. Three routers are connected to each other. A loopback interface is configured on each router.

[Figure 6 on page 44](#) shows the sample network.

Figure 6: Configuring IS-IS Multicast Topology

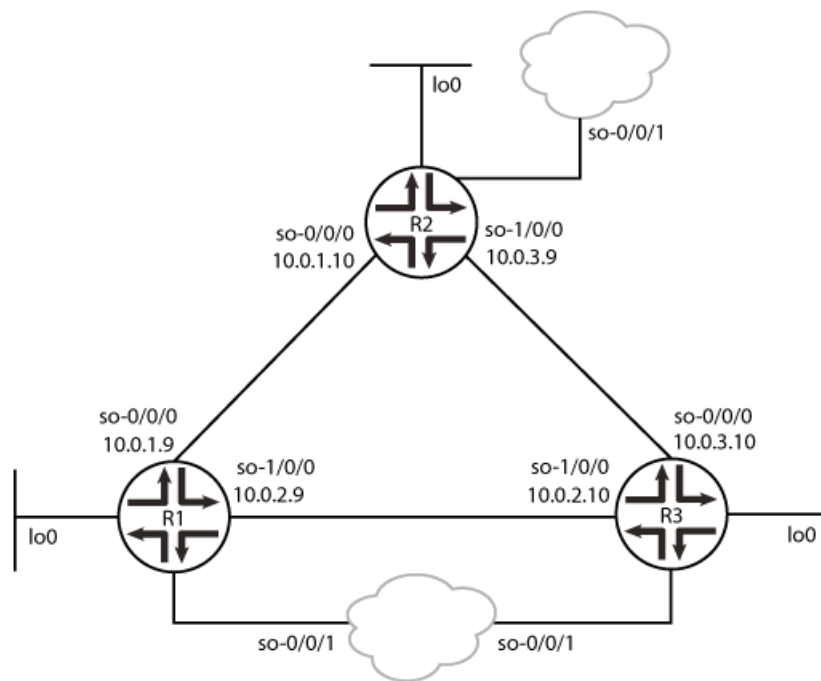

g040922

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

#### Router R1

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 15
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-0/0/0 level 2 metric 20
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 14
set protocols isis interface so-1/0/0 level 1 metric 13
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 12
set protocols isis interface so-1/0/0 level 2 metric 29
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface fxp0.0 disable
```

#### Router R2

```
set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 13
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 12
set protocols isis interface so-0/0/0 level 2 metric 29
```

```

set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 23
set protocols isis interface so-1/0/0 level 1 metric 14
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 18
set protocols isis interface so-1/0/0 level 2 metric 32
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 26
set protocols isis interface fxp0.0 disable

```

### Router R3

```

set protocols isis traceoptions file isis size 5m world-readable
set protocols isis traceoptions flag error
set protocols isis topologies ipv4-multicast
set protocols isis interface so-0/0/0 level 1 metric 19
set protocols isis interface so-0/0/0 level 1 ipv4-multicast-metric 11
set protocols isis interface so-0/0/0 level 2 metric 27
set protocols isis interface so-0/0/0 level 2 ipv4-multicast-metric 21
set protocols isis interface so-1/0/0 level 1 metric 16
set protocols isis interface so-1/0/0 level 1 ipv4-multicast-metric 26
set protocols isis interface so-1/0/0 level 2 metric 30
set protocols isis interface so-1/0/0 level 2 ipv4-multicast-metric 20
set protocols isis interface fxp0.0 disable

```

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS multicast topologies:

1. Enable the multicast topology for IS-IS by using the **ipv4-multicast** statement.

### Routers R1, R2, and R3

```

[edit protocols isis]
user@host# set traceoptions file isis size 5m world-readable
user@host# set traceoptions flag error
user@host# set topologies ipv4-multicast

```

2. Enable multicast metrics on the first SONET/SDH Interface by using the **ipv4-multicast-metric** statement.

### Router R1

```

[edit protocols isis interface so-0/0/0]
user@R1# set level 1 metric 15
user@R1# set level 1 ipv4-multicast-metric 18
user@R1# set level 2 metric 20
user@R1# set level 2 ipv4-multicast-metric 14

```

### Router R2

```

[edit protocols isis interface so-0/0/0]
user@R2# set level 1 metric 13
user@R2# set level 1 ipv4-multicast-metric 12
user@R2# set level 2 metric 29
user@R2# set level 2 ipv4-multicast-metric 23

```

### Router R3

```

[edit protocols isis interface so-0/0/0]

```

```
user@R3# set level 1 metric 19
user@R3# set level 1 ipv4-multicast-metric 11
user@R3# set level 2 metric 27
user@R3# set level 2 ipv4-multicast-metric 21
```

3. Enable multicast metrics on a second sonet Interface by using the **ipv4-multicast-metric** statement.

#### Router R1

```
[edit protocols isis interface so-1/0/0]
user@R1# set level 1 metric 13
user@R1# set level 1 ipv4-multicast-metric 12
user@R1# set level 2 metric 29
user@R1# set level 2 ipv4-multicast-metric 23
```

#### Router R2

```
[edit protocols isis interface so-1/0/0]
user@R2# set level 1 metric 14
user@R2# set level 1 ipv4-multicast-metric 18
user@R2# set level 2 metric 32
user@R2# set level 2 ipv4-multicast-metric 26
```

#### Router R3

```
[edit protocols isis interface so-1/0/0]
user@R3# set level 1 metric 16
user@R3# set level 1 ipv4-multicast-metric 26
user@R3# set level 2 metric 30
user@R3# set level 2 ipv4-multicast-metric 20
```

4. Disable the out-of-band management port, fxp0.

#### Routers R1, R2, and R3

```
[edit protocols isis]
user@host# set interface fxp0.0 disable
```

5. If you are done configuring the routers, commit the configuration.

#### Routers R1, R2, and R3

```
[edit]
user@host# commit
```

**Results** From configuration mode, confirm your configuration by using the **show protocols isis** statement. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

#### Router R1

```
user@R1# show protocols isis

traceoptions {
 file isis size 5m world-readable;
 flag error;
}
topologies ipv4-multicast;
interface so-0/0/0 {
 level 1 {
```

```

 metric 15;
 ipv4-multicast-metric 18;
 }
 level 2 {
 metric 20;
 ipv4-multicast-metric 14;
 }
}
interface so-1/0/0 {
 level 1 {
 metric 13;
 ipv4-multicast-metric 12;
 }
 level 2 {
 metric 29;
 ipv4-multicast-metric 23;
 }
}
interface fxp0.0 {
 disable;
}

```

### Router R2

user@R2# show protocols isis

```

traceoptions {
 file isis size 5m world-readable;
 flag error;
}
topologies ipv4-multicast;
interface so-0/0/0 {
 level 1 {
 metric 13;
 ipv4-multicast-metric 12;
 }
 level 2 {
 metric 29;
 ipv4-multicast-metric 23;
 }
}
interface so-1/0/0 {
 level 1 {
 metric 14;
 ipv4-multicast-metric 18;
 }
 level 2 {
 metric 32;
 ipv4-multicast-metric 26;
 }
}
interface fxp0.0 {
 disable;
}

```

### Router R3

user@R3# show protocols isis

```

traceoptions {
 file isis size 5m world-readable;
 flag error;
}

```

```
}
topologies ipv4-multicast;
interface so-0/0/0 {
 level 1 {
 metric 19;
 ipv4-multicast-metric 11;
 }
 level 2 {
 metric 27;
 ipv4-multicast-metric 21;
 }
}
interface so-1/0/0 {
 level 1 {
 metric 16;
 ipv4-multicast-metric 26;
 }
 level 2 {
 metric 30;
 ipv4-multicast-metric 20;
 }
}
interface fxp0.0 {
 disable;
}
```

---

### Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1, R2, and R3 on page 48](#)
- [Verifying That IS-IS Is Configured on page 50](#)
- [Verifying the Configured Multicast Metric Values on page 52](#)
- [Verifying the Configuration of the Multicast Topology on page 53](#)

#### *Verifying the Connection Between Routers R1, R2, and R3*

**Purpose** Make sure that Routers R1, R2, and R3 are connected to each other.

**Action** Ping the other two routers from any router, to check the connectivity between the three routers as per the network topology.

```
user@R1> ping 10.0.3.9
```

```
PING 10.0.3.9 (10.0.3.9): 56 data bytes
64 bytes from 10.0.3.9: icmp_seq=0 ttl=64 time=1.299 ms
64 bytes from 10.0.3.9: icmp_seq=1 ttl=64 time=52.304 ms
64 bytes from 10.0.3.9: icmp_seq=2 ttl=64 time=1.271 ms
64 bytes from 10.0.3.9: icmp_seq=3 ttl=64 time=1.343 ms
64 bytes from 10.0.3.9: icmp_seq=4 ttl=64 time=1.434 ms
64 bytes from 10.0.3.9: icmp_seq=5 ttl=64 time=1.306 ms
^C
--- 10.0.3.9 ping statistics ---
6 packets transmitted, 6 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.271/9.826/52.304/18.997 ms
```

```
user@R1> ping 10.0.3.10
```



```

PING 10.0.3.10 (10.0.3.10): 56 data bytes
64 bytes from 10.0.3.10: icmp_seq=0 ttl=64 time=1.431 ms
64 bytes from 10.0.3.10: icmp_seq=1 ttl=64 time=1.296 ms
64 bytes from 10.0.3.10: icmp_seq=2 ttl=64 time=1.887 ms
^C
--- 10.0.3.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.296/1.538/1.887/0.253 ms

```

```
user@R2> ping 10.0.2.9
```

```

PING 10.0.2.9 (10.0.2.9): 56 data bytes
64 bytes from 10.0.2.9: icmp_seq=0 ttl=64 time=1.365 ms
64 bytes from 10.0.2.9: icmp_seq=1 ttl=64 time=1.813 ms
64 bytes from 10.0.2.9: icmp_seq=2 ttl=64 time=1.290 ms
^C
--- 10.0.2.9 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.290/1.489/1.813/0.231 ms

```

```
user@R2> ping 10.0.2.10
```

```

PING 10.0.2.10 (10.0.2.10): 56 data bytes
64 bytes from 10.0.2.10: icmp_seq=0 ttl=63 time=1.318 ms
64 bytes from 10.0.2.10: icmp_seq=1 ttl=63 time=1.394 ms
64 bytes from 10.0.2.10: icmp_seq=2 ttl=63 time=1.366 ms
64 bytes from 10.0.2.10: icmp_seq=3 ttl=63 time=1.305 ms
^C
--- 10.0.2.10 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.305/1.346/1.394/0.036 ms

```

```
user@R3> ping 10.0.1.10
```

```

PING 10.0.1.10 (10.0.1.10): 56 data bytes
64 bytes from 10.0.1.10: icmp_seq=0 ttl=63 time=1.316 ms
64 bytes from 10.0.1.10: icmp_seq=1 ttl=63 time=1.418 ms
64 bytes from 10.0.1.10: icmp_seq=2 ttl=63 time=1.277 ms
^C
--- 10.0.1.10 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.277/1.337/1.418/0.059 ms

```

```
user@R3> ping 10.0.1.9
```

```

PING 10.0.1.9 (10.0.1.9): 56 data bytes
64 bytes from 10.0.1.9: icmp_seq=0 ttl=64 time=1.381 ms
64 bytes from 10.0.1.9: icmp_seq=1 ttl=64 time=1.499 ms
64 bytes from 10.0.1.9: icmp_seq=2 ttl=64 time=1.300 ms
64 bytes from 10.0.1.9: icmp_seq=3 ttl=64 time=1.397 ms
^C
--- 10.0.1.9 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.300/1.394/1.499/0.071 ms

```

**Meaning** Routers R1, R2, and R3 have a peer relationship with each other.

### *Verifying That IS-IS Is Configured*

**Purpose** Make sure that the IS-IS instance is running on Routers R1, R2, and R3, and that they are adjacent to each other.

**Action** Use the **show isis adjacency detail** command to check the adjacency between the routers.

#### **Router R1**

```
user@R1> show isis adjacency detail
```

R2

```
Interface: so-0/0/0, Level: 1, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:59 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10
```

R2

```
Interface: so-0/0/0, Level: 2, State: Up, Expires in 8 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:23:58 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.10
```

R3

```
Interface: so-1/0/0, Level: 1, State: Up, Expires in 7 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10
```

R3

```
Interface: so-1/0/0, Level: 2, State: Up, Expires in 6 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:24:20 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R3.02, IP addresses: 10.0.2.10
```

#### **Router R2**

```
user@R2> show isis adjacency detail
```

R1

```
Interface: so-0/0/0, Level: 1, State: Up, Expires in 20 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
Restart capable: Yes, Adjacency advertisement: Advertise
LAN id: R2.02, IP addresses: 10.0.1.9
```

R1

```
Interface: so-0/0/0, Level: 2, State: Up, Expires in 26 secs
Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:50 ago
Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc
Topologies: IPV4-Multicast
```

Restart capable: Yes, Adjacency advertisement: Advertise  
 LAN id: R2.02, IP addresses: 10.0.1.9

R3

Interface: so-1/0/0, Level: 1, State: Up, Expires in 8 secs  
 Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago  
 Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd  
 Topologies: IPV4-Multicast  
 Restart capable: Yes, Adjacency advertisement: Advertise  
 LAN id: R3.03, IP addresses: 10.0.3.10

R3

Interface: so-1/0/0, Level: 2, State: Up, Expires in 8 secs  
 Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:27:22 ago  
 Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bd  
 Topologies: IPV4-Multicast  
 Restart capable: Yes, Adjacency advertisement: Advertise  
 LAN id: R3.03, IP addresses: 10.0.3.10

### Router R3

user@R3> show isis adjacency detail

R2

Interface: so-0/0/0, Level: 1, State: Up, Expires in 18 secs  
 Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago  
 Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
 Topologies: IPV4-Multicast  
 Restart capable: Yes, Adjacency advertisement: Advertise  
 LAN id: R3.03, IP addresses: 10.0.3.9

R2

Interface: so-0/0/0, Level: 2, State: Up, Expires in 22 secs  
 Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:09 ago  
 Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
 Topologies: IPV4-Multicast  
 Restart capable: Yes, Adjacency advertisement: Advertise  
 LAN id: R3.03, IP addresses: 10.0.3.9

R1

Interface: so-1/0/0, Level: 1, State: Up, Expires in 21 secs  
 Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago  
 Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
 Topologies: IPV4-Multicast  
 Restart capable: Yes, Adjacency advertisement: Advertise  
 LAN id: R3.02, IP addresses: 10.0.2.9

R1

Interface: so-1/0/0, Level: 2, State: Up, Expires in 19 secs  
 Priority: 64, Up/Down transitions: 1, Last transition: 2d 19:33:59 ago  
 Circuit type: 3, Speaks: IP, MAC address: 0:1b:c0:86:54:bc  
 Topologies: IPV4-Multicast  
 Restart capable: Yes, Adjacency advertisement: Advertise  
 LAN id: R3.02, IP addresses: 10.0.2.9

**Meaning** IS-IS is configured on Routers R1, R2, and R3, and they are adjacent to each other.

**Verifying the Configured Multicast Metric Values**

**Purpose** Make sure that the SPF calculations are accurate as per the configured multicast metric values on Routers R1, R2, and R3.

**Action** Use the **show isis spf results** command to check the SPF calculations for the network.

**Router R1**

```
user@R1> show isis spf results
...
IPv4 Multicast IS-IS level 1 SPF results:
Node Metric Interface NH Via SNPA
R3.03 28 so-1/0/0 IPV4 R3 0:1b:c0:86:54:bd
R2.00 18 so-0/0/0 IPV4 R2 0:1b:c0:86:54:bd
R3.00 17 so-1/0/0 IPV4 R3 0:1b:c0:86:54:bd
R1.00 0
4 nodes

IPv4 Multicast IS-IS level 2 SPF results:
Node Metric Interface NH Via SNPA
R3.03 40 so-0/0/0 IPV4 R2 0:1b:c0:86:54:bd
R3.00 22 so-1/0/0 IPV4 R3 0:1b:c0:86:54:bd
R2.00 14 so-0/0/0 IPV4 R2 0:1b:c0:86:54:bd
R1.00 0
4 nodes
```

**Router R2**

```
user@R2> show isis spf results
...
IPv4 Multicast IS-IS level 1 SPF results:
Node Metric Interface NH Via SNPA
R3.02 29 so-0/0/0 IPV4 R1 0:1b:c0:86:54:bc
R3.00 18 so-1/0/0 IPV4 R3 0:1b:c0:86:54:bd
R1.00 12 so-0/0/0 IPV4 R1 0:1b:c0:86:54:bc
R2.02 12
R2.00 0
5 nodes

IPv4 Multicast IS-IS level 2 SPF results:
Node Metric Interface NH Via SNPA
R3.02 45 so-0/0/0 IPV4 R1 0:1b:c0:86:54:bc
R3.00 26 so-1/0/0 IPV4 R3 0:1b:c0:86:54:bd
R1.00 23 so-0/0/0 IPV4 R1 0:1b:c0:86:54:bc
R2.02 23
R2.00 0
5 nodes
```

**Router R3**

```
user@R3> show isis spf results
...
IPv4 Multicast IS-IS level 1 SPF results:
Node Metric Interface NH Via SNPA
R3.02 26
R1.00 23 so-0/0/0 IPV4 R2 0:1b:c0:86:54:bc
R2.02 23 so-0/0/0 IPV4 R2 0:1b:c0:86:54:bc
R2.00 11 so-0/0/0 IPV4 R2 0:1b:c0:86:54:bc
R3.03 11
```

```
R3.00 0
 6 nodes
```

IPv4 Multicast IS-IS level 2 SPF results:

| Node  | Metric | Interface | NH   | Via | SNPA             |
|-------|--------|-----------|------|-----|------------------|
| R2.02 | 34     | so-1/0/0  | IPv4 | R1  | 0:1b:c0:86:54:bc |
| R2.00 | 21     | so-0/0/0  | IPv4 | R2  | 0:1b:c0:86:54:bc |
| R3.03 | 21     |           |      |     |                  |
| R1.00 | 20     | so-1/0/0  | IPv4 | R1  | 0:1b:c0:86:54:bc |
| R3.02 | 20     |           |      |     |                  |
| R3.00 | 0      |           |      |     |                  |
|       |        |           |      |     | 6 nodes          |

**Meaning** The configured multicast metric values are used in SPF calculations for the IS-IS network.

### *Verifying the Configuration of the Multicast Topology*

**Purpose** Make sure that the multicast topology is configured on Routers R1, R2, and R3.

**Action** Use the **show isis database detail** command to verify the multicast topology configuration on the routers.

#### **Router R1**

```
user@R1> show isis database detail
```

IS-IS level 1 link-state database:

```
R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 663 secs
 IPv4 Unicast IS neighbor: R2.02 Metric: 15
 IPv4 Unicast IS neighbor: R3.02 Metric: 15
 IPv4 Multicast IS neighbor: R2.02 Metric: 18
 IPv4 Multicast IS neighbor: R3.02 Metric: 17
 IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 15 Internal Up
 IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 15 Internal Up
```

```
R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 883 secs
 IPv4 Unicast IS neighbor: R2.02 Metric: 13
 IPv4 Unicast IS neighbor: R3.03 Metric: 14
 IPv4 Multicast IS neighbor: R2.02 Metric: 12
 IPv4 Multicast IS neighbor: R3.03 Metric: 18
 IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 13 Internal Up
 IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 14 Internal Up
```

```
R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 913 secs
 IPv4 Unicast IS neighbor: R1.00 Metric: 0
 IPv4 Unicast IS neighbor: R2.00 Metric: 0
```

```
R3.00-00 Sequence: 0x13c, Checksum: 0xc8de, Lifetime: 488 secs
 IPv4 Unicast IS neighbor: R3.02 Metric: 16
 IPv4 Unicast IS neighbor: R3.03 Metric: 19
 IPv4 Multicast IS neighbor: R3.02 Metric: 26
 IPv4 Multicast IS neighbor: R3.03 Metric: 11
 IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 16 Internal Up
 IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 19 Internal Up
```

```
R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 625 secs
 IPv4 Unicast IS neighbor: R1.00 Metric: 0
 IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

```

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 714 secs
 IPv4 Unicast IS neighbor: R2.00 Metric: 0
 IPv4 Unicast IS neighbor: R3.00 Metric: 0

```

IS-IS level 2 link-state database:

```

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 816 secs
 IPv4 Unicast IS neighbor: R2.02 Metric: 20
 IPv4 Unicast IS neighbor: R3.02 Metric: 31
 IPv4 Multicast IS neighbor: R2.02 Metric: 14
 IPv4 Multicast IS neighbor: R3.02 Metric: 22
 IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 20 Internal Up
 IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 31 Internal Up
 IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 29 Internal Up

```

```

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 966 secs
 IPv4 Unicast IS neighbor: R2.02 Metric: 29
 IPv4 Unicast IS neighbor: R3.03 Metric: 32
 IPv4 Multicast IS neighbor: R2.02 Metric: 23
 IPv4 Multicast IS neighbor: R3.03 Metric: 26
 IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 29 Internal Up
 IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 28 Internal Up
 IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 32 Internal Up

```

```

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 966 secs
 IPv4 Unicast IS neighbor: R1.00 Metric: 0
 IPv4 Unicast IS neighbor: R2.00 Metric: 0

```

```

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 805 secs
 IPv4 Unicast IS neighbor: R3.02 Metric: 30
 IPv4 Unicast IS neighbor: R3.03 Metric: 27
 IPv4 Multicast IS neighbor: R3.02 Metric: 20
 IPv4 Multicast IS neighbor: R3.03 Metric: 21
 IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 31 Internal Up
 IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 30 Internal Up
 IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 27 Internal Up

```

```

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 844 secs
 IPv4 Unicast IS neighbor: R1.00 Metric: 0
 IPv4 Unicast IS neighbor: R3.00 Metric: 0

```

```

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 844 secs
 IPv4 Unicast IS neighbor: R2.00 Metric: 0
 IPv4 Unicast IS neighbor: R3.00 Metric: 0

```

## Router R2

```
user@R2> show isis database detail
```

IS-IS level 1 link-state database:

```

R1.00-00 Sequence: 0x142, Checksum: 0xd07, Lifetime: 524 secs
 IPv4 Unicast IS neighbor: R2.02 Metric: 15
 IPv4 Unicast IS neighbor: R3.02 Metric: 15
 IPv4 Multicast IS neighbor: R2.02 Metric: 18
 IPv4 Multicast IS neighbor: R3.02 Metric: 17
 IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 15 Internal Up
 IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 15 Internal Up

```

```

R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 748 secs
 IPv4 Unicast IS neighbor: R2.02 Metric: 13

```

```

IPV4 Unicast IS neighbor: R3.03 Metric: 14
IPV4 Multicast IS neighbor: R2.02 Metric: 12
IPV4 Multicast IS neighbor: R3.03 Metric: 18
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 13 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 14 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 777 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R2.00 Metric: 0

R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1102 secs
IPV4 Unicast IS neighbor: R3.02 Metric: 16
IPV4 Unicast IS neighbor: R3.03 Metric: 19
IPV4 Multicast IS neighbor: R3.02 Metric: 26
IPV4 Multicast IS neighbor: R3.03 Metric: 11
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 16 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 19 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 488 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0

R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 577 secs
IPV4 Unicast IS neighbor: R2.00 Metric: 0
IPV4 Unicast IS neighbor: R3.00 Metric: 0

IS-IS level 2 link-state database:

R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 676 secs
IPV4 Unicast IS neighbor: R2.02 Metric: 20
IPV4 Unicast IS neighbor: R3.02 Metric: 31
IPV4 Multicast IS neighbor: R2.02 Metric: 14
IPV4 Multicast IS neighbor: R3.02 Metric: 22
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 20 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 31 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 29 Internal Up

R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 831 secs
IPV4 Unicast IS neighbor: R2.02 Metric: 29
IPV4 Unicast IS neighbor: R3.03 Metric: 32
IPV4 Multicast IS neighbor: R2.02 Metric: 23
IPV4 Multicast IS neighbor: R3.03 Metric: 26
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 29 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 28 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 831 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0
IPV4 Unicast IS neighbor: R2.00 Metric: 0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 667 secs
IPV4 Unicast IS neighbor: R3.02 Metric: 30
IPV4 Unicast IS neighbor: R3.03 Metric: 27
IPV4 Multicast IS neighbor: R3.02 Metric: 20
IPV4 Multicast IS neighbor: R3.03 Metric: 21
IP IPV4 Unicast prefix: 10.0.1.8/30 Metric: 31 Internal Up
IP IPV4 Unicast prefix: 10.0.2.8/30 Metric: 30 Internal Up
IP IPV4 Unicast prefix: 10.0.3.8/30 Metric: 27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 707 secs
IPV4 Unicast IS neighbor: R1.00 Metric: 0

```

```
IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

```
R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 707 secs
```

```
IPv4 Unicast IS neighbor: R2.00 Metric: 0
```

```
IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

### Router R3

```
user@R3> show isis database detail
```

```
IS-IS level 1 link-state database:
```

```
R1.00-00 Sequence: 0x143, Checksum: 0xb08, Lifetime: 1155 secs
```

```
IPv4 Unicast IS neighbor: R2.02 Metric: 15
```

```
IPv4 Unicast IS neighbor: R3.02 Metric: 15
```

```
IPv4 Multicast IS neighbor: R2.02 Metric: 18
```

```
IPv4 Multicast IS neighbor: R3.02 Metric: 17
```

```
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 15 Internal Up
```

```
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 15 Internal Up
```

```
R2.00-00 Sequence: 0x13f, Checksum: 0xf02b, Lifetime: 687 secs
```

```
IPv4 Unicast IS neighbor: R2.02 Metric: 13
```

```
IPv4 Unicast IS neighbor: R3.03 Metric: 14
```

```
IPv4 Multicast IS neighbor: R2.02 Metric: 12
```

```
IPv4 Multicast IS neighbor: R3.03 Metric: 18
```

```
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 13 Internal Up
```

```
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 14 Internal Up
```

```
R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 716 secs
```

```
IPv4 Unicast IS neighbor: R1.00 Metric: 0
```

```
IPv4 Unicast IS neighbor: R2.00 Metric: 0
```

```
R3.00-00 Sequence: 0x13d, Checksum: 0xc6df, Lifetime: 1044 secs
```

```
IPv4 Unicast IS neighbor: R3.02 Metric: 16
```

```
IPv4 Unicast IS neighbor: R3.03 Metric: 19
```

```
IPv4 Multicast IS neighbor: R3.02 Metric: 26
```

```
IPv4 Multicast IS neighbor: R3.03 Metric: 11
```

```
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 16 Internal Up
```

```
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 19 Internal Up
```

```
R3.02-00 Sequence: 0x139, Checksum: 0xfb0e, Lifetime: 430 secs
```

```
IPv4 Unicast IS neighbor: R1.00 Metric: 0
```

```
IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

```
R3.03-00 Sequence: 0x138, Checksum: 0xad56, Lifetime: 519 secs
```

```
IPv4 Unicast IS neighbor: R2.00 Metric: 0
```

```
IPv4 Unicast IS neighbor: R3.00 Metric: 0
```

```
IS-IS level 2 link-state database:
```

```
R1.00-00 Sequence: 0x142, Checksum: 0x2c7c, Lifetime: 617 secs
```

```
IPv4 Unicast IS neighbor: R2.02 Metric: 20
```

```
IPv4 Unicast IS neighbor: R3.02 Metric: 31
```

```
IPv4 Multicast IS neighbor: R2.02 Metric: 14
```

```
IPv4 Multicast IS neighbor: R3.02 Metric: 22
```

```
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 20 Internal Up
```

```
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 31 Internal Up
```

```
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 29 Internal Up
```

```
R2.00-00 Sequence: 0x13f, Checksum: 0x4826, Lifetime: 769 secs
```

```
IPv4 Unicast IS neighbor: R2.02 Metric: 29
```

```
IPv4 Unicast IS neighbor: R3.03 Metric: 32
```



```

IPv4 Multicast IS neighbor: R2.02 Metric: 23
IPv4 Multicast IS neighbor: R3.03 Metric: 26
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 29 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 28 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 32 Internal Up

R2.02-00 Sequence: 0x13c, Checksum: 0x57e2, Lifetime: 769 secs
IPv4 Unicast IS neighbor: R1.00 Metric: 0
IPv4 Unicast IS neighbor: R2.00 Metric: 0

R3.00-00 Sequence: 0x13d, Checksum: 0x1b19, Lifetime: 610 secs
IPv4 Unicast IS neighbor: R3.02 Metric: 30
IPv4 Unicast IS neighbor: R3.03 Metric: 27
IPv4 Multicast IS neighbor: R3.02 Metric: 20
IPv4 Multicast IS neighbor: R3.03 Metric: 21
IP IPv4 Unicast prefix: 10.0.1.8/30 Metric: 31 Internal Up
IP IPv4 Unicast prefix: 10.0.2.8/30 Metric: 30 Internal Up
IP IPv4 Unicast prefix: 10.0.3.8/30 Metric: 27 Internal Up

R3.02-00 Sequence: 0x139, Checksum: 0xf0e, Lifetime: 649 secs
IPv4 Unicast IS neighbor: R1.00 Metric: 0
IPv4 Unicast IS neighbor: R3.00 Metric: 0

R3.03-00 Sequence: 0x139, Checksum: 0xab57, Lifetime: 649 secs
IPv4 Unicast IS neighbor: R2.00 Metric: 0
IPv4 Unicast IS neighbor: R3.00 Metric: 0

```

**Meaning** Multicast topology is configured on Routers R1, R2, and R3.

- Related Documentation**
- [Understanding Multitopology Routing in Conjunction with PIM](#)
  - [Example: Configuring Multitopology Routing to Provide Redundancy for Multicast Traffic over Separate Network Paths](#)
  - [Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33](#)

## Example: Configuring IS-IS for CLNS

- [Understanding IS-IS for CLNS on page 57](#)
- [Example: Configuring IS-IS for CLNS on page 58](#)

## Understanding IS-IS for CLNS

IS-IS extensions provide the basic interior gateway protocol (IGP) support for collecting intradomain routing information for Connectionless Network Service (CLNS) destinations within a CLNS network. Routers that learn host addresses through End System-to-Intermediate System (ES-IS) can advertise the addresses to other routers (intermediate systems) by using IS-IS.

For more information about IS-IS, see the ISO 10589 standard.

## Example: Configuring IS-IS for CLNS

This example shows how to create a routing instance and enable IS-IS protocol on all interfaces.

- [Requirements on page 58](#)
- [Overview on page 58](#)
- [Configuration on page 58](#)
- [Verification on page 59](#)

---

### Requirements

Before you begin, configure the network interfaces. See [Interfaces Feature Guide for Security Devices](#).

---

### Overview

The configuration instructions in this topic describe how to create a routing-instance called `aaaa`, enable IS-IS on all interfaces, and define BGP export policy name (`dist-bgp`), family (`ISO`), and protocol (`BP`), and apply the export policy to IS-IS.

---

### Configuration

#### CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

```
set routing-instances aaaa protocols isis clns-routing
set routing-instances aaaa protocols isis interface all
set routing-instances aaaa protocols isis no-ipv4-routing no-ipv6-routing
set policy-options policy-statement dist-bgp from family iso protocol bgp
set policy-options policy-statement dist-bgp then accept
set routing-instances aaaa protocols isis export dist-bgp
```

#### Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see *Using the CLI Editor in Configuration Mode*.

To configure IS-IS for CLNS:

1. Configure the routing instance.  

```
[edit]
user@host# edit routing-instances aaaa
```
2. Enable CLNS routing.  

```
[edit routing-instances aaaa]
user@host# set protocols isis clns-routing
```
3. Enable IS-IS on all interfaces.  

```
[edit routing-instances aaaa]
user@host# set protocols isis interface all
```

4. (Optional) Disable IPv4 and IPv6 routing to configure a pure CLNS network .

```
[edit routing-instances aaaa]
user@host# set protocols isis no-ipv4-routing no-ipv6-routing
```

5. Define the BGP export policy name, family, and protocol.

```
[edit policy-options]
user@host# set policy-statement dist-bgp from family iso protocol bgp
```

6. Define the action for the export policy.

```
[edit policy-options]
user@host# set policy-statement dist-bgp then accept
```

7. Apply the export policy to IS-IS.

```
[edit routing-instances aaaa]
user@host# set protocols isis export dist-bgp
```

**Results** From configuration mode, confirm your configuration by entering the **show routing-instances** command. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
[edit]
user@host# show routing-instances
aaaa {
 protocols {
 isis {
 export dist-bgp;
 no-ipv4-routing;
 no-ipv6-routing;
 clns-routing;
 interface all;
 }
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

### Verification

Confirm that the configuration is working properly.

- [Verifying Routing-Instance for CLNS on page 59](#)
- [Verifying IS-IS for CLNS on page 59](#)

#### *Verifying Routing-Instance for CLNS*

**Purpose** Verify that the policy options are enabled for the routing instance.

**Action** From operational mode, enter the **show routing-instances** command.

#### *Verifying IS-IS for CLNS*

**Purpose** Verify that IS-IS is enabled.

**Action** From operational mode, enter the **show protocols** command.

## Example: Configuring IS-IS Designated Routers

---

- [Understanding IS-IS Designated Routers on page 60](#)
- [Configuring Designated Router Election Priority for IS-IS on page 60](#)

### Understanding IS-IS Designated Routers

A router advertises its priority to become a designated router in its hello packets. On all multiaccess networks (physical networks that support the attachment of more than two routers, such as Ethernet networks), IS-IS uses the advertised priorities to elect a designated router for the network. This router is responsible for sending network link-state advertisements, which describe all the routers attached to the network. These advertisements are flooded throughout a single area. The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.

A router's priority for becoming the designated router is indicated by an arbitrary number from 0 through 127, which you configure on the IS-IS interface. The router with the highest priority becomes the designated router for the area (Level 1, Level 2, or both), also configured on the IS-IS interface. If routers in the network have the same priority, then the router with the highest MAC address is elected as the designated router. By default, routers have a priority value of 64.

### Configuring Designated Router Election Priority for IS-IS

This example shows how to configure the designated router election priority for IS-IS.

Before you begin:

- Configure network interfaces. See the *Junos OS Interfaces Configuration Guide for Security Devices*.
- Enable IS-IS on the interfaces. See [“Example: Configuring IS-IS” on page 11](#).

In this example, you configure the priority for logical interface ge-0/0/1.0 to be 100 and the level number to be 1. If this interface has the highest priority value, the router becomes the designated router for the Level 1 area.

To configure a designated router election priority for IS-IS:

```
[edit]
user@host# set protocols isis interface ge-0/0/1.0 level 1 priority 100
```

#### Related Documentation

- [Example: Configuring IS-IS](#)

## Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking

---

This example shows how to enable packet checksums for IS-IS interfaces.

- [Requirements on page 61](#)
- [Overview on page 61](#)

- [Configuration on page 61](#)
- [Verification on page 62](#)

## Requirements

Before you begin, configure IS-IS on both routers. See “[Example: Configuring IS-IS](#)” on [page 11](#) for information about the sample IS-IS configuration.

## Overview


Junos OS supports IS-IS checksums as documented in RFC 3358, *Optional Checksums in Intermediate System to Intermediate System (ISIS)*.

IS-IS protocol data units (PDUs) include link-state PDUs, complete sequence number PDUs (CSNPs), partial sequence number PDUs (PSNPs), and IS-IS hello (IIH) packets. These PDUs can be corrupt due to faulty implementations of Layer 2 hardware or lack of checksums on a specific network technology. Corruption of length or type, length, and value (TLV) fields can lead to the generation of extensive numbers of empty link-state PDUs in the receiving node. Because authentication is not a replacement for a checksum mechanism, you might want to enable the optional checksum TLV on your IS-IS interfaces.

The checksum cannot be enabled with MD5 hello authentication on the same interface.

[Figure 7 on page 61](#) shows the topology used in this example.

**Figure 7: IS-IS Checksum Topology**

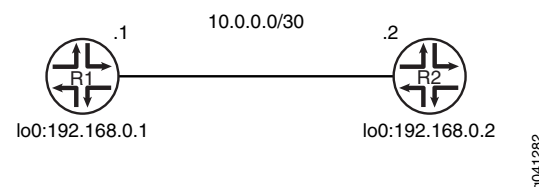

This example describes the steps on Device R1.

## Configuration

**CLI Quick Configuration** To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Device R1**

```
set protocols isis traceoptions file isis
set protocols isis traceoptions flag all
set protocols isis interface fe-1/2/0.1 checksum
```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS checksums:

1. Enable checksums.

```
[edit protocols isis interface fe-1/2/0.1]
user@R1# set checksum
```

2. (Optional) Enable tracing for tracking checksum operations.

```
[edit protocols isis traceoptions]
user@R1# set file isis
user@R1# set flag all
```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols
isis {
 traceoptions {
 file isis;
 flag all;
 }
 interface fe-1/2/0.1 {
 checksum;
 }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

### Verifying Checksums

**Purpose** Verify that checksums are performed.

**Action** From operational mode, enter the **show log isis | match checksum** command.

```
user@R1> show log isis | match checksum
```

```
May 31 16:47:39.513267 sequence 0x49 checksum 0x8e64
May 31 16:47:39.513394 sequence 0x4e checksum 0x34b3
May 31 16:47:39.513517 sequence 0x50 checksum 0x9dcb
May 31 16:47:46.563781 sequence 0x45 checksum 0x7e1a
May 31 16:47:46.563970 sequence 0x46 checksum 0x226d
May 31 16:47:46.564104 sequence 0x52 checksum 0x99cd
May 31 16:47:46.581087 sequence 0x49 checksum 0x8e64
May 31 16:47:46.581222 sequence 0x4e checksum 0x34b3
May 31 16:47:46.581353 sequence 0x50 checksum 0x9dcb
May 31 16:47:55.799090 sequence 0x45 checksum 0x7e1a
May 31 16:47:55.799223 sequence 0x46 checksum 0x226d
May 31 16:47:55.799347 sequence 0x52 checksum 0x99cd
May 31 16:47:55.818255 sequence 0x49 checksum 0x8e64
May 31 16:47:55.818473 sequence 0x4e checksum 0x34b3
May 31 16:47:55.818606 sequence 0x50 checksum 0x9dcb
May 31 16:48:03.455816 sequence 0x49 checksum 0x8e64
May 31 16:48:03.455973 sequence 0x4e checksum 0x34b3
```

**Meaning** The output shows that checksum information is captured in the IS-IS trace log file.

- Related Documentation**
- *Understanding Checksums on IS-IS Interfaces for Error Checking*

## Configuring IS-IS Authentication

All IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in the autonomous system (AS) routing. By default, IS-IS authentication is disabled on the routing device.

To configure IS-IS authentication, you must define an authentication password and specify the authentication type.

You can configure one of the following authentication methods:

- **Simple authentication**—Uses a text password that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet. Simple authentication is included for compatibility with existing IS-IS implementations. However, we recommend that you do *not* use this authentication method because it is insecure (the text can be “sniffed”).



**CAUTION:** A simple password that exceeds 254 characters is truncated.

- **HMAC-MD5 authentication**—Uses an iterated cryptographic hash function. The receiving routing device uses an authentication key (password) to verify the packet.

You can also configure more fine-grained interface-level authentication for hello packets.

To enable authentication and specify an authentication method, include the **authentication-type** statement, specifying the **simple** or **md5** authentication type:

**authentication-type** *authentication*;

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure a password, include the **authentication-key** statement. The authentication password for all routing devices in a domain must be the same.

**authentication-key** *key*;

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

To configure hitless authentication key rollover, include the **authentication-key-chain (Protocols IS-IS)** statement.

The password can contain up to 255 characters. If you include spaces, enclose all characters in quotation marks (“ ”).

If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces that are shared with a Junos OS implementation.

Authentication of hello packets, partial sequence number PDU (PSNP), and complete sequence number PDU (CSNP) can be suppressed to enable interoperability with the routing software of different vendors. Different vendors handle authentication in various ways, and suppressing authentication for different PDU types might be the simplest way to allow compatibility within the same network.

To configure IS-IS to generate authenticated packets, but not to check the authentication on received packets, include the **no-authentication-check** statement:

```
no-authentication-check;
```

To suppress authentication of IS-IS hello packets, include the **no-hello-authentication** statement:

```
no-hello-authentication;
```

To suppress authentication of PSNPs, include the **no-psnp-authentication** statement:

```
no-psnp-authentication;
```

To suppress authentication of CSNPs, include the **no-csnp-authentication** statement:

```
no-csnp-authentication;
```

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.



**NOTE:** The authentication and the no-authentication statements must be configured at the same hierarchy level. Configuring authentication at the [edit protocols isis interface *interface-name*] hierarchy level and configuring no-authentication at the [edit protocols isis] hierarchy level has no effect.

---

**Related  
Documentation**

- [Configuring IS-IS Authentication Without Network-Wide Deployment on page 64](#)

---

## Configuring IS-IS Authentication Without Network-Wide Deployment

---

To allow the use of authentication without requiring network-wide deployment, include the **loose-authentication-check** statement:

```
loose-authentication-check;
```

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

**Related  
Documentation**

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 77](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78](#)



## CHAPTER 3

# Configuring BFD Authentication

- [Understanding BFD Authentication for IS-IS on page 65](#)
- [Example: Configuring BFD for IS-IS on page 67](#)
- [Example: Configuring BFD Authentication for IS-IS on page 72](#)

## Understanding BFD Authentication for IS-IS

---

Bidirectional Forwarding Detection (BFD) enables rapid detection of communication failures between adjacent systems. By default, authentication for BFD sessions is disabled. However, when running BFD over Network Layer protocols, the risk of service attacks can be significant. We strongly recommend using authentication if you are running BFD over multiple hops or through insecure tunnels. Beginning with Junos OS Release 9.6, Junos OS supports authentication for BFD sessions running over IS-IS. BFD authentication is only supported in the domestic image and is not available in the export image.

You authenticate BFD sessions by specifying an authentication algorithm and keychain, and then associating that configuration information with a security authentication keychain using the keychain name.

The following sections describe the supported authentication algorithms, security keychains, and level of authentication that can be configured:

- [BFD Authentication Algorithms on page 65](#)
- [Security Authentication Keychains on page 66](#)
- [Strict Versus Loose Authentication on page 66](#)

## BFD Authentication Algorithms

Junos OS supports the following algorithms for BFD authentication:

- **simple-password**—Plain-text password. One to 16 bytes of plain text are used to authenticate the BFD session. One or more passwords might be configured. This method is the least secure and should be used only when BFD sessions are not subject to packet interception.
- **keyed-md5**—Keyed Message Digest 5 hash algorithm for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed MD5 uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. With this method, packets are accepted at the receiving

end of the session if one of the keys matches and the sequence number is greater than or equal to the last sequence number received. Although more secure than a simple password, this method is vulnerable to replay attacks. Increasing the rate at which the sequence number is updated can reduce this risk.

- **meticulous-keyed-md5**—Meticulous keyed Message Digest 5 hash algorithm. This method works in the same manner as keyed MD5, but the sequence number is updated with every packet. Although more secure than keyed MD5 and simple passwords, this method might take additional time to authenticate the session.
- **keyed-sha-1**—Keyed Secure Hash Algorithm I for sessions with transmit and receive intervals greater than 100 ms. To authenticate the BFD session, keyed SHA uses one or more secret keys (generated by the algorithm) and a sequence number that is updated periodically. The key is not carried within the packets. With this method, packets are accepted at the receiving end of the session if one of the keys matches and the sequence number is greater than the last sequence number received.
- **meticulous-keyed-sha-1**—Meticulous keyed Secure Hash Algorithm I. This method works in the same manner as keyed SHA, but the sequence number is updated with every packet. Although more secure than keyed SHA and simple passwords, this method might take additional time to authenticate the session.



**NOTE:** Nonstop active routing (NSR) is not supported with meticulous-keyed-md5 and meticulous-keyed-sha-1 authentication algorithms. BFD sessions using these algorithms might go down after a switchover.

---

## Security Authentication Keychains

The security authentication keychain defines the authentication attributes used for authentication key updates. When the security authentication keychain is configured and associated with a protocol through the keychain name, authentication key updates can occur without interrupting routing and signaling protocols.

The authentication keychain contains one or more keychains. Each keychain contains one or more keys. Each key holds the secret data and the time at which the key becomes valid. The algorithm and keychain must be configured on both ends of the BFD session, and they must match. Any mismatch in configuration prevents the BFD session from being created.

BFD allows multiple clients per session, and each client can have its own keychain and algorithm defined. To avoid confusion, we recommend specifying only one security authentication keychain.

## Strict Versus Loose Authentication

By default, strict authentication is enabled and authentication is checked at both ends of each BFD session. Optionally, to smooth migration from nonauthenticated sessions to authenticated sessions, you can configure *loose checking*. When loose checking is

configured, packets are accepted without authentication being checked at each end of the session. This feature is intended for transitional periods only.

**Related Documentation**

- [Example: Configuring BFD Authentication for IS-IS on page 72](#)

## Example: Configuring BFD for IS-IS

This example describes how to configure the Bidirectional Forwarding Detection (BFD) protocol to detect failures in an IS-IS network.



**NOTE:** BFD is not supported with ISIS for IPV6 on QFX10000 series switches.

- [Requirements on page 67](#)
- [Overview on page 67](#)
- [Configuration on page 67](#)
- [Verification on page 70](#)

## Requirements

Before you begin, configure IS-IS on both routers. See “[Example: Configuring IS-IS](#)” on [page 11](#) for information about the required IS-IS configuration.

This example uses the following hardware and software components:


- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

## Overview

This example shows two routers connected to each other. A loopback interface is configured on each router. IS-IS and BFD protocols are configured on both routers.

[Figure 8 on page 67](#) shows the sample network.

**Figure 8: Configuring BFD for IS-IS**

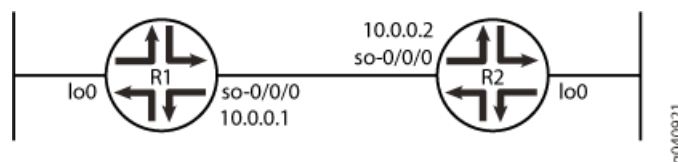

## Configuration

**CLI Quick Configuration**

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

**Router R1**

```

set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 5
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 2
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 3
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
 minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic

```

**Router R2**

```

set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 6
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 3
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 4
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval
 minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic

```

**Step-by-Step  
Procedure**

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.



**NOTE:** To simply configure BFD for IS-IS, only the `minimum-interval` statement is required. The BFD protocol selects default parameters for all the other configuration statements when you use the `bfd-liveness-detection` statement without specifying any parameters.



**NOTE:** You can change parameters at any time without stopping or restarting the existing session. BFD automatically adjusts to the new parameter value. However, no changes to BFD parameters take place until the values resynchronize with each BFD peer.

To configure BFD for IS-IS on Routers R1 and R2:

1. Enable BFD failure detection for IS-IS.
 

```

[edit protocols isis]
user@R1# set interface so-0/0/0 bfd-liveness-detection

[edit protocols isis]
user@R2# set interface so-0/0/0 bfd-liveness-detection

```
2. Configure the threshold for the adaptation of the detection time, which must be greater than the multiplier number multiplied by the minimum interval.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set detection-time threshold 5
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set detection-time threshold 6
```

3. Configure the minimum transmit and receive intervals for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-interval 2
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-interval 3
```

4. Configure only the minimum receive interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-receive-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-receive-interval 1
```

5. Disable BFD adaptation.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set no-adaptation
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set no-adaptation
```

6. Configure the threshold for the transmit interval, which must be greater than the minimum transmit interval.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval threshold 3
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval threshold 4
```

7. Configure the minimum transmit interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval minimum-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval minimum-interval 1
```

8. Configure the multiplier number, which is the number of hello packets not received by the neighbor that causes the originating interface to be declared down.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set multiplier 2
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set multiplier 2
```

9. Configure the BFD version used for detection.

The default is to have the version detected automatically.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set version automatic
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set version automatic
```

## Results

---

From configuration mode, confirm your configuration by issuing the **show protocols isis interface** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

user@R1# **show protocols isis interface so-0/0/0**

```
 bfd-liveness-detection {
 version automatic;
 minimum-interval 2;
 minimum-receive-interval 1;
 multiplier 2;
 no-adaptation;
 transmit-interval {
 minimum-interval 1;
 threshold 3;
 }
 detection-time {
 threshold 5;
 }
 }
 ...
```

user@R2# **show protocols isis interface so-0/0/0**

```
 bfd-liveness-detection {
 version automatic;
 minimum-interval 3;
 minimum-receive-interval 1;
 multiplier 2;
 no-adaptation;
 transmit-interval {
 minimum-interval 1;
 threshold 4;
 }
 detection-time {
 threshold 6;
 }
 }
 ...
```

## Verification

Confirm that the configuration is working properly.

- [Verifying the Connection Between Routers R1 and R2 on page 70](#)
- [Verifying That IS-IS Is Configured on page 71](#)
- [Verifying That BFD Is configured on page 72](#)

### Verifying the Connection Between Routers R1 and R2

---

**Purpose** Make sure that Routers R1 and R2 are connected to each other.

**Action** Ping the other router to check the connectivity between the two routers as per the network topology.

```
user@R1> ping 10.0.0.2
```

```
PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: icmp_seq=0 ttl=64 time=1.367 ms
64 bytes from 10.0.0.2: icmp_seq=1 ttl=64 time=1.662 ms
64 bytes from 10.0.0.2: icmp_seq=2 ttl=64 time=1.291 ms
^C
--- 10.0.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.291/1.440/1.662/0.160 ms
```

```
user@R2> ping 10.0.0.1
```

```
PING 10.0.0.1 (10.0.0.1): 56 data bytes
64 bytes from 10.0.0.1: icmp_seq=0 ttl=64 time=1.287 ms
64 bytes from 10.0.0.1: icmp_seq=1 ttl=64 time=1.310 ms
64 bytes from 10.0.0.1: icmp_seq=2 ttl=64 time=1.289 ms
^C
--- 10.0.0.1 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.287/1.295/1.310/0.010 ms
```

**Meaning** Routers R1 and R2 are connected to each other.

### Verifying That IS-IS Is Configured

**Purpose** Make sure that the IS-IS instance is running on both routers.

**Action** Use the **show isis database** statement to check if the IS-IS instance is running on both routers, R1 and R2.

```
user@R1> show isis database
```

```
IS-IS level 1 link-state database:
LSP ID Sequence Checksum Lifetime Attributes
R1.00-00 0x4a571 0x30c5 1195 L1 L2
R2.00-00 0x4a586 0x4b7e 1195 L1 L2
R2.02-00 0x330ca1 0x3492 1196 L1 L2
 3 LSPs
```

```
IS-IS level 2 link-state database:
LSP ID Sequence Checksum Lifetime Attributes
R1.00-00 0x4a856 0x5db0 1194 L1 L2
R2.00-00 0x4a89d 0x149b 1194 L1 L2
R2.02-00 0x1fb2ff 0xd302 1194 L1 L2
 3 LSPs
```

```
user@R2> show isis database
```

```
IS-IS level 1 link-state database:
LSP ID Sequence Checksum Lifetime Attributes
R1.00-00 0x4b707 0xcc80 1195 L1 L2
R2.00-00 0x4b71b 0xeb37 1198 L1 L2
R2.02-00 0x33c2ce 0xb52d 1198 L1 L2
 3 LSPs
```

IS-IS level 2 link-state database:

| LSP ID   | Sequence | Checksum | Lifetime | Attributes |
|----------|----------|----------|----------|------------|
| R1.00-00 | 0x4b9f2  | 0xee70   | 1192     | L1 L2      |
| R2.00-00 | 0x4ba41  | 0x9862   | 1197     | L1 L2      |
| R2.02-00 | 0x3      | 0x6242   | 1198     | L1 L2      |

3 LSPs

**Meaning** IS-IS is configured on both routers, R1 and R2.

### Verifying That BFD Is configured

**Purpose** Make sure that the BFD instance is running on both routers, R1 and R2.

**Action** Use the **show bfd session detail** statement to check if BFD instance is running on the routers.

user@R1> show bfd session detail

| Address  | State | Interface | Detect Time | Transmit Interval | Multiplier |
|----------|-------|-----------|-------------|-------------------|------------|
| 10.0.0.2 | Up    | so-0/0/0  | 2.000       | 1.000             | 2          |

Client ISIS R2, TX interval 0.001, RX interval 0.001  
 Client ISIS R1, TX interval 0.001, RX interval 0.001  
 Session down time 00:00:00, previous up time 00:00:15  
 Local diagnostic NbrSignal, remote diagnostic NbrSignal  
 Remote state AdminDown, version 1  
 Router 3, routing table index 17

1 sessions, 2 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

user@R2> show bfd session detail

| Address  | State | Interface | Detect Time | Transmit Interval | Multiplier |
|----------|-------|-----------|-------------|-------------------|------------|
| 10.0.0.1 | Up    | so-0/0/0  | 2.000       | 1.000             | 2          |

Client ISIS R2, TX interval 0.001, RX interval 0.001  
 Session down time 00:00:00, previous up time 00:00:05  
 Local diagnostic NbrSignal, remote diagnostic NbrSignal  
 Remote state AdminDown, version 1  
 Router 2, routing table index 15

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

**Meaning** BFD is configured on Routers R1 and R2 for detecting failures in the IS-IS network.

**Related Documentation**

- [Understanding BFD for IS-IS](#)

### Example: Configuring BFD Authentication for IS-IS

This example shows how to configure BFD authentication for IS-IS.

- [Requirements on page 73](#)
- [Overview on page 73](#)



- [Configuration on page 73](#)
- [Verification on page 75](#)

## Requirements


Before you begin, configure IS-IS on both routers. See [“Example: Configuring IS-IS” on page 11](#) for information about the required IS-IS configuration.

## Overview

In this example, a BFD authentication keychain is configured with meticulous keyed MD5 authentication.

[Figure 9 on page 73](#) shows the topology used in this example.

**Figure 9: IS-IS BFD Authentication Topology**

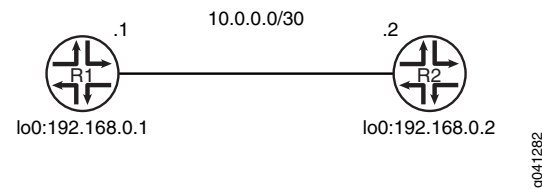

[“CLI Quick Configuration” on page 73](#) shows the configuration for both of the devices in [Figure 9 on page 73](#). The section [“Step-by-Step Procedure” on page 74](#) describes the steps on Device R1.

## Configuration

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CLI Quick Configuration</b> | To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the <b>[edit]</b> hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Device R1</b>               | <pre> set security authentication-key-chains key-chain secret123 description for-isis-bfd set security authentication-key-chains key-chain secret123 key 1 secret \$ABC123 set security authentication-key-chains key-chain secret123 key 1 start-time   "2012-5-31.13:00:00 -0700" set security authentication-key-chains key-chain secret123 key 2 secret \$ABC123 set security authentication-key-chains key-chain secret123 key 2 start-time   "2013-5-31.13:00:00 -0700" set security authentication-key-chains key-chain secret123 key 3 secret \$ABC123 set security authentication-key-chains key-chain secret123 key 3 start-time   "2014-5-31.13:00:00 -0700" set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100 set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain   secret123 set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm   meticulous-keyed-md5 </pre> |
| <b>Device R2</b>               | <pre> set security authentication-key-chains key-chain secret123 description for-isis-bfd set security authentication-key-chains key-chain secret123 key 1 secret \$ABC123 set security authentication-key-chains key-chain secret123 key 1 start-time   "2012-5-31.13:00:00 -0700" </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

```

set security authentication-key-chains key-chain secret123 key 2 secret $ABC123
set security authentication-key-chains key-chain secret123 key 2 start-time
 "2013-5-31.13:00:00 -0700"
set security authentication-key-chains key-chain secret123 key 3 secret $ABC123
set security authentication-key-chains key-chain secret123 key 3 start-time
 "2014-5-31.13:00:00 -0700"
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection minimum-interval 100
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication key-chain
 secret123
set protocols isis interface ge-1/2/0.0 bfd-liveness-detection authentication algorithm
 meticulous-keyed-md5

```

**Step-by-Step Procedure** The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the *CLI User Guide*.

To configure IS-IS BFD authentication:

1. Configure the authentication keychain.
 

```

[edit security authentication-key-chains key-chain secret123]
user@R1# set description for-isis-bfd
user@R1# set key 1 secret "$ABC123"
user@R1# set key 1 start-time "2012-5-31.13:00:00 -0700"
user@R1# set key 2 secret "$ABC123"
user@R1# set key 2 start-time "2013-5-31.13:00:00 -0700"
user@R1# set key 3 secret "$ABC123"
user@R1# set key 3 start-time "2014-5-31.13:00:00 -0700"

```
2. Enable BFD.
 

```

[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set minimum-interval 100

```
3. Apply the authentication keychain.
 

```

[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication key-chain secret123

```
4. Set the authentication type.
 

```

[edit protocols isis interface ge-1/2/0.0 bfd-liveness-detection]
user@R1# set authentication algorithm meticulous-keyed-md5

```

**Results** From configuration mode, confirm your configuration by entering the **show protocols** and **show security** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```

user@R1# show protocols
isis {
 interface ge-1/2/0.0 {
 bfd-liveness-detection {
 minimum-interval 100;
 authentication {
 key-chain secret123;
 algorithm meticulous-keyed-md5;
 }
 }
 }
}

```

```

 }
 }
}

user@R1# show security
authentication-key-chains {
 key-chain secret123 {
 description for-isis-bfd;
 key 1 {
 secret "$ABC123";
 start-time "2012-5-31.13:00:00 -0700";
 }
 key 2 {
 secret "$ABC123";
 start-time "2013-5-31.13:00:00 -0700";
 }
 key 3 {
 secret "$ABC123";
 start-time "2014-5-31.13:00:00 -0700";
 }
 }
}

```

If you are done configuring the device, enter **commit** from configuration mode.

## Verification

Confirm that the configuration is working properly.

### Verifying IS-IS BFD Authentication

**Purpose** Verify the status of IS-IS BFD authentication.

**Action** From operational mode, enter the **show bfd session extensive** command.

```

user@R1> show bfd session extensive

```

| Address  | State | Interface  | Detect Time | Transmit Interval | Multiplier |
|----------|-------|------------|-------------|-------------------|------------|
| 10.0.0.2 | Down  | ge-1/2/0.0 | 0.300       | 1.000             | 3          |

```

Client ISIS L1, TX interval 0.100, RX interval 0.100, Authenticate
 keychain secret123, algo meticulous-keyed-md5, mode strict
Client ISIS L2, TX interval 0.100, RX interval 0.100, Authenticate
 keychain secret123, algo meticulous-keyed-md5, mode strict
Session down time 00:35:13, previous up time 00:12:17
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Logical system 2, routing table index 85
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
Local min TX interval 1.000, minimum RX interval 0.100, multiplier 3
Remote min TX interval 0.100, min RX interval 0.100, multiplier 3
Local discriminator 2, remote discriminator 1
Echo mode disabled/inactive, no-absorb, no-refresh
Authentication enabled/active, keychain secret123, algo meticulous-keyed-md5,
mode strict
Session ID: 0x100101

```

1 sessions, 2 clients  
Cumulative transmit rate 1.0 pps, cumulative receive rate 10.0 pps

**Meaning** The output shows that BFD authentication is enabled on IS-IS Level 1 and Level 2.

**Related Documentation**

- *Configuring BFD Authentication for IS-IS*
- [Example: Configuring BFD for IS-IS on page 67](#)
- *Understanding BFD for IS-IS*

## CHAPTER 4

# Configuring Hitless Authentication

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 77](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78](#)

## Understanding Hitless Authentication Key Rollover for IS-IS

---

IS-IS protocol exchanges can be authenticated to guarantee that only trusted routing devices participate in routing. By default, authentication is disabled. The authentication algorithm creates an encoded checksum that is included in the transmitted packet. The receiving routing device uses an authentication key (password) to verify the packet's checksum.

If you configure authentication for all peers, each peer in that group inherits the group's authentication.

You can update authentication keys without resetting any IS-IS neighbor sessions. This is referred to as *hitless authentication key rollover*.

Hitless authentication key rollover uses authentication keychains, which consist of the authentication keys that are being updated. The keychain includes multiple keys. Each key in the keychain has a unique start time. At the next key's start time, a rollover occurs from the current key to the next key, and the next key becomes the current key.

You can choose the algorithm through which authentication is established. You can configure MD5 or SHA-1 authentication. You associate a keychain and the authentication algorithm with an IS-IS neighboring session. Each key contains an identifier and a secret password.

The sending peer chooses the active key based on the system time and the start times of the keys in the keychain. The receiving peer determines the key with which it authenticates based on the incoming key identifier.

You can configure either RFC 5304-based encoding or RFC 5310-based encoding for the IS-IS protocol transmission encoding format.

### Related Documentation

- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78](#)

## Example: Configuring Hitless Authentication Key Rollover for IS-IS

---

This example shows how to configure hitless authentication key rollover for IS-IS.

- [Requirements on page 78](#)
- [Overview on page 78](#)
- [Configuration on page 79](#)
- [Verification on page 82](#)

### Requirements

No special configuration beyond device initialization is required before configuring hitless authentication key rollover for IS-IS.

### Overview

Authentication guarantees that only trusted routers participate in routing updates. This keychain authentication method is referred to as hitless because the keys roll over from one to the next without resetting any peering sessions or interrupting the routing protocol. Junos OS supports both RFC 5304, *IS-IS Cryptographic Authentication* and RFC 5310, *IS-IS Generic Cryptographic Authentication*.

This example includes the following statements for configuring the keychain:

- **algorithm**—For each key in the keychain, you can specify an encryption algorithm. The algorithm can be SHA-1 or MD-5.
- **key**—A keychain can have multiple keys. Each key within a keychain must be identified by a unique integer value. The range of valid identifier values is from 0 through 63.
- **key-chain**—For each keychain, you must specify a name. This example defines two keychains: **base-key-global** and **base-key-inter**.
- **options**—For each key in the keychain, you can specify the encoding for the message authentication code: **isis-enhanced** or **basic**. The basic (RFC 5304) operation is enabled by default.

When you configure the **isis-enhanced** option, Junos OS sends RFC 5310-encoded routing protocol packets and accepts both RFC 5304-encoded and RFC 5310-encoded routing protocol packets that are received from other devices.

When you configure **basic** (or do not include the **options** statement in the key configuration) Junos OS sends and receives RFC 5304-encoded routing protocols packets, and drops 5310-encoded routing protocol packets that are received from other devices.

Because this setting is for IS-IS only, the TCP and the BFD protocols ignore the encoding option configured in the key.

- **secret**—For each key in the keychain, you must set a secret password. This password can be entered in either encrypted or plain text format in the **secret** statement. It is always displayed in encrypted format.
- **start-time**—Each key must specify a start time in UTC format. Control gets passed from one key to the next. When a configured start time arrives (based on the routing device's clock), the key with that start time becomes active. Start times are specified in the local time zone for a routing device and must be unique within the key chain.


You can apply a keychain globally to all interfaces or more granularly to specific interfaces.

This example includes the following statements for applying the keychain to all interfaces or to particular interfaces:

- **authentication-key-chain**—Enables you to apply a keychain at the global IS-IS level for all Level 1 or all Level 2 interfaces.
- **hello-authentication-key-chain**—Enables you to apply a keychain at the individual IS-IS interface level. The interface configuration overrides the global configuration.

Figure 10 on page 79 shows the topology used in the example.

**Figure 10: Hitless Authentication Key Rollover for IS-IS**

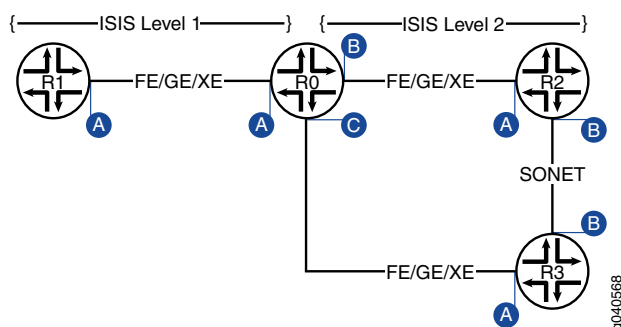

This example shows the configuration for Router R0.

## Configuration

### CLI Quick Configuration

To quickly configure the hitless authentication key rollover for IS-IS, copy the following commands and paste the commands into the CLI.

```
[edit]
set interfaces ge-0/0/0 unit 0 description "interface A"
set interfaces ge-0/0/0 unit 0 family inet address 10.0.0.1/30
set interfaces ge-0/0/0 unit 0 family iso
set interfaces ge-0/0/0 unit 0 family inet6 address fe80::200:f8ff:fe21:67cf/128
set interfaces ge-0/0/1 unit 0 description "interface B"
set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
set interfaces ge-0/0/1 unit 0 family iso
set interfaces ge-0/0/1 unit 0 family inet6 address 10FB::C:ABC:1F0C:44DA/128
set interfaces ge-0/0/2 unit 0 description "interface C"
set interfaces ge-0/0/2 unit 0 family inet address 10.0.0.9/30
set interfaces ge-0/0/2 unit 0 family iso
set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128
```

```

set security authentication-key-chains key-chain base-key-global key 63 secret "$ABC123"
set security authentication-key-chains key-chain base-key-global key 63 start-time
 "2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-global key 63 algorithm
 hmac-sha-1
set security authentication-key-chains key-chain base-key-global key 63 options
 isis-enhanced
set security authentication-key-chains key-chain base-key-inter key 0 secret "$ABC123"
set security authentication-key-chains key-chain base-key-inter key 0 start-time
 "2011-8-6.06:54:00-0700"
set security authentication-key-chains key-chain base-key-inter key 0 algorithm md5
set security authentication-key-chains key-chain base-key-inter key 0 options basic
set protocols isis level 1 authentication-key-chain base-key-global
set protocols isis interface ge-0/0/0.0 level 1 hello-authentication-key-chain
 base-key-inter

```

### Step-by-Step Procedure

To configure hitless authentication key rollover for IS-IS:

1. Configure the Router R0 interfaces.

```

[edit]
user@host# edit interfaces ge-0/0/0 unit 0
[edit interfaces ge-0/0/0 unit 0]
user@host# set description "interface A"
user@host# set family inet address 10.0.0.1/30
user@host# set family iso
user@host# set family inet6 address fe80::200:f8ff:fe21:67cf/128
user@host# exit
[edit]
user@host# edit interfaces ge-0/0/1 unit 0
[edit interfaces ge-0/0/1 unit 0]
user@host# set interfaces ge-0/0/1 unit 0 description "interface B"
user@host# set interfaces ge-0/0/1 unit 0 family inet address 10.0.0.5/30
user@host# set interfaces ge-0/0/1 unit 0 family iso
user@host# set interfaces ge-0/0/1 unit 0 family inet6 address
 10FB::C:ABC:1FOC:44DA/128
user@host# exit
[edit]
user@host# edit interfaces ge-0/0/2 unit 0
[edit interfaces ge-0/0/2 unit 0]
user@host# set description "interface C"
user@host# set family inet address 10.0.0.9/30
user@host# set interfaces ge-0/0/2 unit 0 family iso
user@host# set interfaces ge-0/0/2 unit 0 family inet6 address ff06::c3/128
user@host# exit

```

2. Configure one or more authentication keys.

```

[edit]
user@host# edit security authentication-key-chains key-chain base-key-global
[edit security authentication-key-chains key-chain base-key-global]
user@host# set key 63 secret "$ABC123"
user@host# set key 63 start-time "2011-8-6.06:54:00-0700"
user@host# set key 63 algorithm hmac-sha-1
user@host# set key 63 options isis-enhanced
user@host# exit

```



```
[edit]
user@host# edit security authentication-key-chains key-chain base-key-inter
[edit security authentication-key-chains key-chain base-key-inter]
user@host# set key 0 secret "$ABC123"
user@host# set key 0 start-time "2011-8-6.06:54:00-0700"
user@host# set key 0 algorithm md5
user@host# set key 0 options basic
user@host# exit
```

3. Apply the base-key-global keychain to all Level 1 IS-IS interfaces on Router R0.

```
[edit]
user@host# edit protocols isis level 1
[edit protocols isis level 1]
set authentication-key-chain base-key-global
user@host# exit
```

4. Apply the base-key-inter keychain to the **ge-0/0/0.0** interface on Router R0.

```
[edit]
user@host# edit protocols isis interface ge-0/0/0.0 level 1
[edit protocols isis interface ge-0/0/0.0 level 1]
set hello-authentication-key-chain base-key-inter
user@host# exit
```

5. If you are done configuring the device, commit the configuration.

```
[edit]
user@host# commit
```

## Results

Confirm your configuration by entering the **show interfaces**, **show protocols**, and **show security** commands.

```
user@host# show interfaces
ge-0/0/0 {
 unit 0 {
 description "interface A";
 family inet {
 address 10.0.0.1/30;
 }
 family iso;
 family inet6 {
 address fe80::200:f8ff:fe21:67cf/128;
 }
 }
}
ge-0/0/1 {
 unit 0 {
 description "interface B";
 family inet {
 address 10.0.0.5/30;
 }
 family iso;
 family inet6 {
 address 10FB::C:ABC:1F0C:44DA/128;
 }
 }
}
```

```
 }
 }
}
ge-0/0/2 {
 unit 0 {
 description "interface C";
 family inet {
 address 10.0.0.9/30;
 }
 family iso;
 family inet6 {
 address ff06::c3/128;
 }
 }
}

user@host# show protocols
isis {
 level 1 authentication-key-chain base-key-global;
 interface ge-0/0/0.0 {
 level 1 hello-authentication-key-chain base-key-inter;
 }
}

user@host# show security
authentication-key-chains {
 key-chain base-key-global {
 key 63 {
 secret "ABC123";
 start-time "2011-8-6.06:54:00-0700";
 algorithm hmac-sha-1;
 options isis-enhanced;
 }
 }
 key-chain base-key-inter {
 key 0 {
 secret "$ABC123";
 start-time "2011-8-6.06:54:00-0700";
 algorithm md5;
 options basic;
 }
 }
}
```

## Verification

To verify the configuration, run the following commands:

- show isis authentication
- show security keychain

### Related Documentation

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 77](#)

## PART 3

# Configuration Statements and Operational Commands

- Configuration Statements on page 85
- Operational Commands on page 151



## CHAPTER 5

# Configuration Statements

- [authentication-key \(Protocols IS-IS\) on page 87](#)
- [authentication-key-chain \(Protocols IS-IS\) on page 88](#)
- [authentication-type \(Protocols IS-IS\) on page 89](#)
- [bfd-liveness-detection \(Protocols IS-IS\) on page 90](#)
- [checksum \(Protocols IS-IS\) on page 92](#)
- [csnp-interval on page 93](#)
- [disable \(Protocols IS-IS\) on page 94](#)
- [export on page 95](#)
- [external-preference \(Protocols IS-IS\) on page 96](#)
- [family \(Protocols IS-IS\) on page 97](#)
- [hello-authentication-key on page 98](#)
- [hello-authentication-key-chain on page 99](#)
- [hello-authentication-type on page 100](#)
- [hello-interval \(Protocols IS-IS\) on page 101](#)
- [hello-padding on page 103](#)
- [hold-time \(Protocols IS-IS\) on page 105](#)
- [ignore-attached-bit on page 107](#)
- [interface \(Protocols IS-IS\) on page 108](#)
- [ipv4-multicast on page 110](#)
- [ipv4-multicast-metric on page 111](#)
- [ipv6-multicast on page 112](#)
- [ipv6-multicast-metric on page 112](#)
- [ipv6-unicast on page 113](#)
- [ipv6-unicast-metric on page 114](#)
- [isis on page 115](#)
- [level \(Global IS-IS\) on page 116](#)
- [loose-authentication-check on page 117](#)
- [lsp-interval on page 118](#)

- [lsp-lifetime](#) on page 119
- [max-areas](#) on page 120
- [mesh-group \(Protocols IS-IS\)](#) on page 121
- [metric \(Protocols IS-IS\)](#) on page 122
- [no-adjacency-holddown](#) on page 123
- [no-authentication-check](#) on page 124
- [no-csnp-authentication](#) on page 124
- [no-hello-authentication](#) on page 125
- [no-ipv4-multicast](#) on page 125
- [no-ipv4-routing](#) on page 126
- [no-ipv6-multicast](#) on page 127
- [no-ipv6-routing](#) on page 128
- [no-ipv6-unicast](#) on page 129
- [no-psnp-authentication](#) on page 129
- [no-unicast-topology](#) on page 130
- [overload \(Protocols IS-IS\)](#) on page 131
- [passive \(Protocols IS-IS\)](#) on page 134
- [point-to-point](#) on page 136
- [preference \(Protocols IS-IS\)](#) on page 137
- [prefix-export-limit \(Protocols IS-IS\)](#) on page 138
- [priority \(Protocols IS-IS\)](#) on page 139
- [reference-bandwidth \(Protocols IS-IS\)](#) on page 140
- [rib-group \(Protocols IS-IS\)](#) on page 141
- [topologies \(Protocols IS-IS\)](#) on page 142
- [traceoptions \(Protocols IS-IS\)](#) on page 143
- [traffic-engineering \(Protocols IS-IS\)](#) on page 146
- [wide-metrics-only](#) on page 149

## authentication-key (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>authentication-key key;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit protocols isis <b>level</b> <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i>]</p>                                                                                                       |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                        |
| <b>Description</b>         | <p>Authentication key (password). Neighboring routing devices use the password to verify the authenticity of packets sent from this interface. For the key to work, you also must include the <b>authentication-type</b> statement.</p> <p>All routing devices must use the same password. If you are using the Junos OS IS-IS software with another implementation of IS-IS, the other implementation must be configured to use the same password for the domain, the area, and all interfaces adjacent to the Juniper Networks routing device.</p> |
| <b>Default</b>             | If you do not include this statement and the <b>authentication-type</b> statement, IS-IS authentication is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>             | <p><b>key</b>—Authentication password. The password can be up to 1024 characters long. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").</p>                                                                                                                                                                                                                                                                                                                                         |



**CAUTION:** A simple password for authentication is truncated if it exceeds 254 characters.

|                                 |                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 77</a></li> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78</a></li> </ul> |

## authentication-key-chain (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-key-chain <i>key-chain-name</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>name</i> protocols isis level <i>level-number</i> ],<br>[edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis level <i>level-number</i> ],<br>[edit protocols isis level <i>level-number</i> ],<br>[edit routing-instances <i>instance-name</i> protocols isis level <i>level-number</i> ]                                                                                                                                                                                     |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Apply and enable an authentication keychain to the routing device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Options</b>                  | <b><i>key-chain</i></b> —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78</a></li><li>• <a href="#">Example: Configuring Route Authentication for BGP</a></li><li>• <a href="#">Example: Configuring BFD Authentication for Securing Static Routes</a></li><li>• <a href="#">Configuring the Authentication Key Update Mechanism for BGP and LDP Routing Protocols</a></li><li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 77</a></li></ul> |



## authentication-type (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>authentication-type <i>authentication</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p>                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                       |
| <b>Description</b>              | Enable authentication and specify the authentication scheme for IS-IS. If you enable authentication, you must specify a password by including the <b>authentication-key</b> statement.                                                                                                                                                                                                                                                                                                                                              |
| <b>Default</b>                  | If you do not include this statement and the <b>authentication-key</b> statement, IS-IS authentication is disabled.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                  | <p><b><i>authentication</i></b>—Authentication scheme:</p> <ul style="list-style-type: none"> <li>• <b>md5</b>—Use HMAC authentication in combination with MD5. HMAC-MD5 authentication is defined in RFC 2104, <i>HMAC: Keyed-Hashing for Message Authentication</i>.</li> <li>• <b>simple</b>—Use a simple password for authentication. The password is included in the transmitted packet, making this method of authentication relatively insecure. We recommend that you <i>not</i> use this authentication method.</li> </ul> |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">authentication-key on page 87</a></li> <li>• <a href="#">no-authentication-check on page 124</a></li> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 77</a></li> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78</a></li> </ul>                                                                                                                                                         |

## bfd-liveness-detection (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> bfd-liveness-detection {     authentication {         algorithm <i>algorithm-name</i>;         key-chain <i>key-chain-name</i>;         loose-check;     }     detection-time {         threshold <i>milliseconds</i>;     }     minimum-interval <i>milliseconds</i>;     minimum-receive-interval <i>milliseconds</i>;     multiplier <i>number</i>;     no-adaptation;     transmit-interval {         minimum-interval <i>milliseconds</i>;         threshold <i>milliseconds</i>;     }     version (1   automatic); } </pre>                                                                                                                                                                                       |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a> family inet inet6],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>                                                                                                                                                        |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p><b>detection-time threshold</b> and <b>transmit-interval threshold</b> options added in Junos OS Release 8.2.</p> <p>Support for logical systems introduced in Junos OS Release 8.3.</p> <p><b>no-adaptation</b> statement introduced in Junos OS Release 9.0.</p> <p><b>authentication algorithm</b>, <b>authentication key-chain</b>, and <b>authentication loose-check</b> options introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> |
| <b>Description</b>         | Configure bidirectional failure detection timers and authentication.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



**NOTE:** Starting with Junos OS Release 16.1, you can configure IS-IS BFD sessions for the IPv6 address family. Therefore, this configuration statement is also available under the [edit protocols isis [interface interface-name](#) family inet|inet6] hierarchy level.

**Options**    **authentication algorithm *algorithm-name***—Configure the algorithm used to authenticate the specified BFD session: **simple-password**, **keyed-md5**, **keyed-sha-1**, **meticulous-keyed-md5**, **meticulous-keyed-sha-1**.

**authentication key-chain *key-chain-name***—Associate a security key with the specified BFD session using the name of the security keychain. The name you specify must match one of the keychains configured in the **authentication-key-chains key-chain** statement at the **[edit security]** hierarchy level.

**authentication loose-check**—(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication might not be configured at both ends of the BFD session.

**detection-time threshold *milliseconds***—Configure a threshold for the adaptation of the BFD session detection time. When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

**minimum-interval *milliseconds***—Configure the minimum interval after which the local routing device transmits a hello packet and then expects to receive a reply from the neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can specify the minimum transmit and receive intervals separately using the **transmit-interval minimum-interval** and **minimum-receive-interval** statements.

**Range:** 1 through 255,000

**minimum-receive-interval *milliseconds***—Configure the minimum interval after which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**multiplier *number***—Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

**Range:** 1 through 255

**Default:** 3

**no-adaptation**—Specify that BFD sessions not adapt to changing network conditions. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

**transmit-interval threshold *milliseconds***—Configure the threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system message are sent. The interval threshold must be greater than the minimum transmit interval.

**Range:** 0 through 4,294,967,295 ( $2^{32} - 1$ )

**transmit-interval minimum-interval *milliseconds***—Configure a minimum interval after which the local routing device transmits hello packets to a neighbor. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement.

**Range:** 1 through 255,000

**version**—Configure the BFD version to detect: **1** (BFD version 1) or **automatic** (autodetect the BFD version)

**Default:** automatic

The remaining statements are explained separately. See [CLI Explorer](#).

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring BFD for IS-IS on page 67](#)
- [Understanding BFD Authentication for IS-IS on page 65](#)

---

## checksum (Protocols IS-IS)

---

**Syntax** checksum;

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols isis [interface interface-name](#)],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols isis [interface interface-name](#)],  
[edit protocols isis [interface interface-name](#)],  
[edit routing-instances *routing-instance-name* protocols isis [interface interface-name](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Enable checksums for packets on this interface.

Junos OS supports IS-IS checksums as documented in RFC 3358, *Optional Checksums in Intermediate System to Intermediate System (ISIS)*.

The checksum cannot be enabled with MD5 hello authentication on the same interface.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

## csnp-interval


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>csnp-interval (seconds   disable);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit protocols isis <a href="#">interface interface-name</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a>]</p>                     |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                      |
| <b>Description</b>              | <p>Configure the interval between complete sequence number PDUs (CSNPs) on a LAN interface.</p> <p>If the routing device is the designated router on a LAN, IS-IS sends CSN packets every 10 seconds. If the routing device is on a point-to-point interface, it sends CSN packets every 5 seconds multiplied by the number of IS-IS adjacencies over point-to-point links, which are in UP state.</p> <p>To configure the interface not to send any CSNPs, specify the <b>disable</b> option.</p> |
| <b>Default</b>                  | By default, IS-IS sends CSNPs periodically. If the routing device is the designated router on a LAN, IS-IS sends CSNPs every 10 seconds. If the routing device is on a point-to-point interface, it sends CSNPs every 5 seconds multiplied by the number of IS-IS adjacencies over point-to-point links, which are in UP state.                                                                                                                                                                    |
| <b>Options</b>                  | <p><b>disable</b>—Do not send CSNPs on this interface.</p> <p><b>seconds</b>—Number of seconds between the sending of CSNPs.</p> <p><b>Range:</b> 1 through 65,535 seconds</p> <p><b>Default:</b> 10 seconds on LAN broadcast links. 5 seconds on point-to-point links.</p>                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces</i></li> <li>• <i>Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces</i></li> </ul>                                                                                                                                                                                                                                                           |

## disable (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | disable;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <b>isis</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>traffic-engineering</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>isis</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>traffic-engineering</b>],</p> <p>[edit protocols <b>isis</b>],</p> <p>[edit protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis <b>traffic-engineering</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>isis</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>traffic-engineering</b>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Disable IS-IS on the routing device, on an interface, or on a level.</p> <p>At the <b>[edit protocols isis traffic-engineering]</b> hierarchy level, disable IS-IS support for traffic engineering.</p> <p>Enabling IS-IS on an interface (by including the <b>interface</b> statement at the <b>[edit protocols isis]</b> or the <b>[edit routing-instances routing-instance-name protocols isis]</b> hierarchy level), disabling it (by including the <b>disable</b> statement), and not actually having IS-IS run on an interface (by including the <b>passive</b> statement) are mutually exclusive states.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Default</b>                  | <p>IS-IS is enabled for Level 1 and Level 2 routers on all interfaces on which <b>family iso</b> is enabled.</p> <p>IS-IS support for traffic engineering is enabled.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 16</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

- [IS-IS Overview on page 3](#)

## export

|                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                           | <code>export [ <i>policy-names</i> ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                  | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],<br/>         [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],<br/>         [edit protocols <a href="#">isis</a>],<br/>         [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>                                                                                                                                                                                                                                                                                                                        |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                              | <p>Statement introduced before Junos OS Release 7.4.<br/>         Statement introduced in Junos OS Release 9.0 for EX Series switches.<br/>         Statement introduced in Junos OS Release 12.1 for the QFX Series.<br/>         Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>                                                                                                                                                                                                                                                                                                      | <p>Apply one or more policies to routes being exported from the routing table into IS-IS.</p> <p>All routing protocols store the routes that they learn in the routing table. The routing table uses this collected route information to determine the active routes to destinations. The routing table then installs the active routes into its forwarding table and exports them into the routing protocols. It is these exported routes that the protocols advertise.</p> <p>For each protocol, you control which routes the protocol stores in the routing table and which routes the routing table exports into the protocol from the routing table by defining a <i>routing policy</i> for that protocol.</p> |
| <div>  <p><b>NOTE:</b> For IS-IS, you cannot apply routing policies that affect how routes are imported into the routing table; doing so with a link-state protocol can easily lead to an inconsistent topology database.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                                                                                                                                                                                                                                                                                                          | <i>policy-names</i> —Name of one or more policies.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                         | <p>routing—To view this statement in the configuration.<br/>         routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## external-preference (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>external-preference <i>preference</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit protocols isis <a href="#">level level-number</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ]                                                                        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                     |
| <b>Description</b>              | Configure the preference of external routes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <b><i>preference</i></b> —Preference value.<br><b>Range:</b> 0 through 4,294,967,295 ( $2^{32} - 1$ )<br><b>Default:</b> 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Route Preferences Overview</i></li><li>• <a href="#">Example: Redistributing OSPF Routes into IS-IS on page 25</a></li><li>• <i>Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS</i></li><li>• <i>Understanding BGP Communities and Extended Communities as Routing Policy Match Conditions</i></li><li>• <i>Understanding Routing Policies</i></li><li>• <a href="#">preference on page 137</a></li></ul> |



## family (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>family inet {     shortcuts {         multicast-rpf-routes;     } } family inet6 {     shortcuts; }</pre>                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis traffic-engineering],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering],</p> <p>[edit protocols isis traffic-engineering],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis traffic-engineering]</p> |
| <b>Release Information</b>      | <p>Statement introduced in Junos OS Release 9.3.</p> <p>Support for IPv6 for IGP shortcuts introduced in Junos OS Release 9.3.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                |
| <b>Description</b>              | Configure the address family for traffic engineering IS-IS interior gateway protocol (IGP) shortcuts.                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                  | <p>inet—IPv4 address family</p> <p>inet6—IPv6 address family</p> <p>The remaining statements are explained separately.</p>                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                             |

## hello-authentication-key


---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>hello-authentication-key password;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>number</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i> ],<br>[edit protocols isis interface <i>interface-name</i> level <i>number</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                  |
| <b>Description</b>              | Configure an authentication key (password) for hello packets. Neighboring routing devices use the password to verify the authenticity of packets sent from an interface. For the key to work, you also must include the <b>hello-authentication-type</b> statement.                                                                                                                                                                                                                                         |
| <b>Default</b>                  | By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                  | <b>password</b> —Authentication password. The password can be up to 255 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">authentication-key on page 87</a></li><li>• <a href="#">authentication-type on page 89</a></li><li>• <a href="#">hello-authentication-type on page 100</a></li></ul>                                                                                                                                                                                                                                                                                    |

## hello-authentication-key-chain

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | hello-authentication-key-chain <i>key-chain-name</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit logical-systems <i>name</i> routing-instances <i>instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit routing-instances <i>instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ] |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 11.2.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | Apply an authentication keychain to the IS-IS interface.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Options</b>                  | <b><i>key-chain-name</i></b> —Authentication keychain name. It can be up to 126 characters. Characters can include any ASCII strings. If you include spaces, enclose all characters in quotation marks (" ").                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding Hitless Authentication Key Rollover for IS-IS on page 77</a></li> <li>• <a href="#">Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78</a></li> </ul>                                                                                                                                                                                                                                   |

## hello-authentication-type

|                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                           | hello-authentication-type (md5   simple);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                  | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>number</i>]</p> |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                              | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                              |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                      | <p>Enable authentication on an interface for hello packets. If you enable authentication on hello packets, you must specify a password by including the <b>hello-authentication-key</b> statement.</p> <p>You can configure authentication for a given IS-IS level on an interface. On a point-to-point link, if you enable hello authentication for both IS-IS levels, the password configured for Level 1 is used for both levels.</p>                                                                                   |
| <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;"> <p><b>CAUTION:</b> If no authentication is configured for Level 1 on a point-to-point link with both levels enabled, the hello packets are sent without any password, regardless of the Level 2 authentication configurations.</p> </div> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Default</b>                                                                                                                                                                                                                                                                                                                                                                                                          | By default, hello authentication is not configured on an interface. However, if IS-IS authentication is configured, the hello packets are authenticated using the IS-IS authentication type and password.                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                                                                                                                                                                                                                                                                                                                                                                                          | <p><b>md5</b>—Specifies Message Digest 5 as the packet verification type.</p> <p><b>simple</b>—Specifies simple authentication as the packet verification type.</p>                                                                                                                                                                                                                                                                                                                                                        |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                         | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• <a href="#">authentication-key on page 87</a></li> <li>• <a href="#">authentication-type on page 89</a></li> <li>• <a href="#">hello-authentication-key on page 98</a></li> </ul>                                                                                                                                                                                                                                                                                                 |

## hello-interval (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>hello-interval seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                      |
| <b>Description</b>         | <p>Modify the frequency with which the routing device sends hello packets out of an interface, in seconds.</p> <p>Routing devices send hello packets at a fixed interval on all interfaces to establish and maintain neighbor relationships. This interval is advertised in the hello interval field in the hello packet.</p> <p>You can send out hello packets in subsecond intervals. To send out hello packets every 333 milliseconds, set the <b>hold-time</b> value to 1.</p>                                                                 |
| <b>Options</b>             | <p><b>seconds</b>—Frequency of transmission for hello packets.</p> <p><b>Range:</b> 1 through 20,000 seconds</p> <p><b>Default:</b> 3 seconds (for designated intermediate system [DIS] routers), 9 seconds (for non-DIS routers)</p>                                                                                                                                                                                                                                                                                                              |



**NOTE:** When elected as a designated intermediate system [DIS] router on any LAN adjacency, the hello and hold-timer intervals are scaled down by a factor of 3. This means the default values of 9 and 27 seconds of ISIS hello and hold time intervals are scaled down to 3 and 9 seconds for LAN adjacencies. During switchovers, this hello interval is too short to form LAN adjacencies. Therefore, you can configure one of the following solutions:

- Set the hello and hold time interval for LAN adjacencies to 30 seconds and 90 seconds respectively on both the DIS and a neighboring router.
- Convert the LAN interfaces to point-to-point IS-IS interfaces.



**BEST PRACTICE:** On QFX10000 switches, we strongly recommend that you configure all IS-IS interfaces, including peer interfaces, as point-to-point interfaces. If you do not, you might experience session flaps, that is, IS-IS

sessions that go down and then come back up, when IS-IS is configured in virtual routing and forwarding (VRF) instances. When you scale IS-IS in any scenario, you might also experience scaling issues if you do not configure IS-IS interfaces as point-to-point interfaces.

---

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                    |
|------------------------------|--------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <i>hold-time</i></li></ul> |
|------------------------------|--------------------------------------------------------------------|

## hello-padding

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | hello-padding (adaptive   loose   strict);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <b>interface</b> <i>interface-name</i> ],<br>[edit protocols isis <b>interface</b> <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b> | Statement introduced in Junos OS Release 8.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>         | <p>Configure padding on hello packets to accommodate asymmetrical maximum transfer units (MTUs) from different hosts.</p> <p>This helps to prevent a premature adjacency Up state when one routing device's MTU does not meet the requirements to establish the adjacency.</p> <p>As an OSI Layer 2 protocol, IS-IS does not support data fragmentation. Therefore, maximum packet sizes must be established and supported between two routers. During adjacency establishment, the IS-IS protocol makes sure that the link supports a packet size of 1492 bytes by padding outgoing hello packets up to the maximum packet size of 1492 bytes.</p> <p>This is the default behavior of the Junos OS IS-IS implementation. However, Junos OS provides an option to disable hello padding that can override this behavior.</p> <p>There are four types of hello padding:</p> <ul style="list-style-type: none"> <li>Adaptive padding—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state type, length, and value (TLV) tuple. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface. Adaptive padding has more overhead than loose padding and is able to detect MTU asymmetry from one side of the connection. This one-sided detection can result in generation of extra link-state PDUs that are flooded throughout the network. Specify the <b>adaptive</b> option to configure enough padding to establish an adjacency to neighbors.</li> <li>Disabled padding—Padding is disabled on all types of interfaces for all adjacency states. Specify the <b>disable</b> option to accommodate interfaces that support less than the default packet size of 1492 bytes.</li> <li>Loose padding (the default)—The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state. Loose padding might not be able to detect certain situations such as asymmetrical MTUs between the routing devices. Specify the <b>loose</b> option to configure enough padding to initialize an adjacency to neighbors.</li> </ul> |

- **Strict padding**—Padding is done on all interface types and for all adjacency states, and is continuous. Strict padding has the most overhead. The advantage is that strict padding detects MTU issues on both sides of a link. Specify the **strict** option to configure padding to allow all adjacency states with neighbors.

**Options**    **adaptive**—Configure padding until the neighbor adjacency is established and active.

**disable**—Disable padding on all types of interfaces for all adjacency states.

**loose**—Configure padding until the state of the adjacency is initialized.

**strict**—Configure padding for all adjacency states.

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |



## hold-time (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>hold-time seconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>     | <code>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</code><br><code>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</code>                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>         | <p>Set the length of time a neighbor considers this router to be operative (up) after receiving a hello packet. If the neighbor does not receive another hello packet within the specified time, it marks this routing device as inoperative (down). The hold time itself is advertised in the hello packets.</p> <p>The hold time specifies how long a neighbor should consider this routing device to be operative without receiving another hello packet. If the neighbor does not receive a hello packet from this routing device within the hold time, it marks the routing device as being unavailable.</p> <p>For systems configured with graceful routing switchover (GRES) with Graceful Restart, the hold time for Master and Backup Routing Engines should be set to a value higher than 40 seconds. This ensures that adjacencies between the Routing Engine and the neighboring peer 'helper' routers do not time out, stopping graceful restart, and all traffic.</p> |
| <b>Options</b>             | <p><b>seconds</b>—Hold-time value, in seconds.</p> <p><b>Range:</b> 3 through 65,535 seconds, or 1 to send out hello packets every 333 milliseconds</p> <p><b>Default:</b> 9 seconds (for designated intermediate system [DIS] routers), 27 seconds (for non-DIS routers; three times the default hello interval)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



**NOTE:** When elected as a designated intermediate system [DIS] router on any LAN adjacency, the hello and hold-timer intervals are scaled down by a factor of 3. This means the default values of 9 and 27 seconds of ISIS hello and hold time intervals are scaled down to 3 and 9 seconds for LAN adjacencies. During switchovers, this hold time is too short to form LAN adjacencies. Therefore, you can configure one of the following solutions:

- Set the hello and hold time interval for LAN adjacencies to 30 seconds and 90 seconds respectively on both the DIS router and a neighboring router.
- Convert the LAN interfaces to point-to-point IS-IS interfaces.



**BEST PRACTICE:** On QFX10000 switches, we strongly recommend that you configure all IS-IS interfaces, including peer interfaces, as point-to-point interfaces. If you do not, you might experience session flaps, that is, IS-IS sessions that go down and then come back up, when IS-IS is configured in virtual routing and forwarding (VRF) instances. When you scale IS-IS in any scenario, you might also experience scaling issues if you do not configure IS-IS interfaces as point-to-point interfaces.

---

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Required Privilege</b> | routing—To view this statement in the configuration.        |
| <b>Level</b>              | routing-control—To add this statement to the configuration. |

|                              |                                                                                                                                                                                                                                                                                     |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Related Documentation</b> | <ul style="list-style-type: none"><li>• <i>Configuring Graceful Routing Engine Switchover</i></li><li>• <i>Example: Configuring IS-IS</i></li><li>• <i>Example: Configuring IS-IS for GRES with Graceful Restart</i></li><li>• <a href="#">hello-interval on page 101</a></li></ul> |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## ignore-attached-bit

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ignore-attached-bit;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</p> <p>[edit protocols <i>isis</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>              | <p>Ignore the attached bit on IS-IS Level 1 routers. Configuring this statement enables the routing device to ignore the attached bit on incoming Level 1 link-state PDUs. If the attached bit is ignored, no default route, which points to the routing device which has set the attached bit, is installed.</p> <p>There might be times, such as during a denial-of-service (DoS) attack, that you do not want a Level 1 router to be able to forward traffic based on a default route.</p> <p>To prevent a routing device from being able to reach interarea destinations, you can prevent the routing device from installing the default route without affecting the status of its IS-IS adjacencies. The <b>ignore-attached-bit</b> statement is used to tell the routing device to ignore the presence of the attached bit in Level 1 link-state PDUs, which blocks the installation of the IS-IS default route.</p> |
| <b>Default</b>                  | The <b>ignore-attached-bit</b> statement is disabled by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## interface (Protocols IS-IS)

```

Syntax interface (all | interface-name) {
 disable;
 bfd-liveness-detection {
 authentication {
 algorithm algorithm-name;
 key-chain key-chain-name;
 loose-check;
 }
 detection-time {
 threshold milliseconds;
 }
 minimum-interval milliseconds;
 minimum-receive-interval milliseconds;
 transmit-interval {
 threshold milliseconds;
 minimum-interval milliseconds;
 }
 multiplier number;
 }
 checksum;
 flood-group;
 csnp-interval (seconds | disable);
 hello-padding (adaptive | loose | strict);
 interface-group-holddown-delay
 ldp-synchronization {
 disable;
 hold-time seconds;
 }
 lsp-interval milliseconds;
 mesh-group (value | blocked);
 no-adjacency-holddown;
 no-eligible-remote-backup;
 no-ipv4-multicast;
 no-ipv6-multicast;
 no-ipv6-unicast;
 no-unicast-topology;
 passive;
 point-to-point;
 level level-number {
 disable;
 hello-authentication-key key;
 hello-authentication-key-chain key-chain-name;
 hello-authentication-type authentication;
 hello-interval seconds;
 hold-time seconds;
 ipv4-multicast-metric metric;
 ipv6-multicast-metric metric;
 ipv6-unicast-metric metric;
 metric metric;
 no-advertise-adjacency-segment;
 passive;
 priority number;
 }
}

```


```

 te-metric metric;
 }
}

```

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> <p><b>no-eligible-remote-backup</b> option introduced in Junos OS Release 14.2 for the MX Series.</p> <p><b>interface-group-holddown-delay</b> option introduced in Junos OS Release 15.2 for the MX Series.</p>                                                                          |
| <b>Description</b>              | <p>Configure interface-specific IS-IS properties. To configure more than one interface, include the <b>interface</b> statement multiple times.</p> <p>Enabling IS-IS on an interface (by including the <b>interface</b> statement at the [edit protocols <a href="#">isis</a>] or the [edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>] hierarchy level), disabling it (by including the <b>disable</b> statement), and not actually having IS-IS run on an interface (by including the <b>passive</b> statement) are mutually exclusive states.</p> |
| <b>Options</b>                  | <p><b>all</b>—Have Junos OS create IS-IS interfaces automatically. If you include this option, disable IS-IS on the management interface (fxp0).</p> <p><b>interface-name</b>—Name of an interface. Specify the full interface name, including the physical and logical address components.</p> <p>The remaining statements are explained separately. See <a href="#">CLI Explorer</a>.</p>                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Understanding IS-IS Configuration</a></li> <li>• <a href="#">Example: Configuring IS-IS on page 11</a></li> <li>• <a href="#">Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups</a></li> <li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 16</a></li> </ul>                                                                                                                                                                                    |

## ipv4-multicast

|                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                | ipv4-multicast;                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit protocols isis <a href="#">topologies</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ] |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                   | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                              |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                           | Configure alternate IPv4 multicast topologies.                                                                                                                                                                                                                                                                                                                                                          |
| <div>  <p><b>NOTE:</b> The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This lets you exercise control over the paths that unicast data takes through a network.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Default</b>                                                                                                                                                                                                                                                                                                                                                                                                                                               | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                              | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li> </ul>                                                                                                                                                                                                  |

## ipv4-multicast-metric

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ipv4-multicast-metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                      |
| <b>Description</b>              | Specify the multicast topology metric value for the level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Options</b>                  | <p><i>metric</i>—Metric value.</p> <p><b>Range:</b> 0 through 16,777,215</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li> </ul>                                                                                                                                                                                                                                                                                                                                             |

## ipv6-multicast


|                                 |                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ipv6-multicast;                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit protocols isis <a href="#">topologies</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Configure alternate IPv6 multicast topologies.                                                                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>                  | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li> </ul>                                                                                                                                                                                                  |

## ipv6-multicast-metric

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | ipv6-multicast-metric <i>metric</i> ;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify the IPv6 alternate multicast topology metric value for the level.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>                  | <i>metric</i> —Metric value.<br><b>Range:</b> 0 through 16,777,215                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li> </ul>                                                                                                                                                                                                                                                                                                                              |



## ipv6-unicast

|                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                | ipv6-unicast;                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">topologies</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">topologies</a> ],<br>[edit protocols isis <a href="#">topologies</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">topologies</a> ] |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                   | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                           | Configure alternate IPv6 unicast topologies.<br><br>This statement causes IS-IS to calculate an alternate IPv6 unicast topology, in addition to the normal IPv4 unicast topology, and add the corresponding routes to inet6.0.                                                                                                                                                                             |
| <div>  <p><b>NOTE:</b> The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics. You can also selectively disable interfaces from participating in the IPv6 topology while continuing to participate in the IPv4 topology. This lets you exercise control over the paths that unicast data takes through a network.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Default</b>                                                                                                                                                                                                                                                                                                                                                                                                                                               | IPv6 unicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                              | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li> <li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li> </ul>                                                                                                                                                                      |

## ipv6-unicast-metric

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>ipv6-unicast-metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>              | Specify the IPv6 unicast topology metric value for the level. The IS-IS interface metrics for the IPv4 topology can be configured independently of the IPv6 metrics.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Options</b>                  | <i>metric</i> —Metric value.<br><b>Range:</b> 0 through 16,777,215                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li><li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li></ul>                                                                                                                                                                                                                                                                                                  |

## isis

|                                 |                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | isis { ... }                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols],<br>[edit protocols],<br>[edit routing-instances <i>routing-instance-name</i> protocols]        |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series. |
| <b>Description</b>              | Enable IS-IS routing on the routing device or for a routing instance.<br><br>The <b>isis</b> statement is the one statement you must include in the configuration to run IS-IS on the routing device or in a routing instance.                                             |
| <b>Default</b>                  | IS-IS is disabled on the routing device.                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS on page 11</a></li> <li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 16</a></li> </ul>                                            |

## level (Global IS-IS)

---

**Syntax**    `level level-number {  
          authentication-key key;  
          authentication-key-chain (Protocols IS-IS) key-chain-name;  
          authentication-type type;  
          disable;  
          external-preference preference;  
          no-csnp-authentication;  
          no-hello-authentication;  
          no-psnp-authentication;  
          preference preference;  
          purge-originator {  
              empty|self;  
          }  
          wide-metrics-only;  
          }`

**Hierarchy Level**    [edit logical-systems *logical-system-name* protocols *isis*],  
                          [edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols  
                          *isis*],  
                          [edit protocols *isis*],  
                          [edit routing-instances *routing-instance-name* protocols *isis*]

**Release Information**    Statement introduced before Junos OS Release 7.4.  
                              Statement introduced in Junos OS Release 9.0 for EX Series switches.  
                              Statement introduced in Junos OS Release 12.1 for the QFX Series.  
                              Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description**    Configure the global-level properties.

You can administratively divide a single AS into smaller groups called areas. You configure each routing device interface to be in an area. Any interface can be in any area. The area address applies to the entire routing device. You cannot specify one interface to be in one area and another interface in a different area. To route between areas, you must have two adjacent Level 2 routers that communicate with each other.

Level 1 routers can only route within their IS-IS area. To send traffic outside their area, Level 1 routers must send packets to the nearest intra-area Level 2 router. A routing device can be a Level 1 router, a Level 2 router, or both. You specify the router level on a per-interface basis, and a routing device becomes adjacent to other routing devices on the same level on that link only.

You can configure one Level 1 routing process and one Level 2 routing process on each interface, and you can configure the two levels differently.

**Options**    *level-number*—IS-IS level number.  
              **Values:** 1 or 2

The remaining statements are explained separately.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding IS-IS Configuration](#)
- [Example: Configuring IS-IS on page 11](#)
- [Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups](#)
- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 16](#)

## loose-authentication-check

**Syntax** loose-authentication-check;

**Hierarchy Level** [edit logical-systems *logical-system-name* protocols [isis](#)],  
[edit logical-systems *logical-system-name* routing-instances *routing-instance-name* protocols [isis](#)],  
[edit protocols [isis](#)],  
[edit routing-instances *routing-instance-name* protocols [isis](#)]

**Release Information** Statement introduced before Junos OS Release 7.4.  
Statement introduced in Junos OS Release 9.0 for EX Series switches.  
Statement introduced in Junos OS Release 12.1 for the QFX Series.  
Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.

**Description** Allow the use of MD5 authentication without requiring network-wide deployment.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Understanding Hitless Authentication Key Rollover for IS-IS on page 77](#)
- [Example: Configuring Hitless Authentication Key Rollover for IS-IS on page 78](#)

## lsp-interval

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>lsp-interval milliseconds;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],<br/>         [edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],<br/>         [edit protocols isis <b>interface</b> <i>interface-name</i>],<br/>         [edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | <p>Configure the link-state PDU interval time.</p> <p>By default, the routing device sends one link-state PDU packet out an interface every 100 milliseconds. To disable the transmission of all link-state PDUs, set the interval to 0.</p> <p>Link-state PDU throttling by use of the <b>lsp-interval</b> statement controls the flooding pace to neighboring routing devices in order to not overload them.</p> <p>Also, consider that control traffic (such as link-state PDUs and related packets) might delay user traffic (information packets) because control traffic always has precedence in terms of scheduling on the routing device interface cards. Unfortunately, the control traffic transmission rate is not decreased on low-bandwidth interfaces, such as DS-0 or fractional T1 and E1 interface. Line control traffic stays the same. On a low-bandwidth circuit that is transmitting 30 full-MTU-sized packets, there is not much bandwidth left over for other types of packets.</p> |
| <b>Default</b>                  | By default, the routing device sends one link-state PDU out an interface every 100 milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b>                  | <p><b>milliseconds</b>—Number of milliseconds between the sending of link-state PDUs. Specifying a value of 0 blocks all link-state PDU transmission.</p> <p><b>Range:</b> 0 through 1000 milliseconds</p> <p><b>Default:</b> 100 milliseconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</i></li> <li>• <i>Understanding Link-State PDU Throttling for IS-IS Interfaces</i></li> <li>• <i>Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces</i></li> <li>• <i>Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## **lsp-lifetime**

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>lsp-lifetime <i>seconds</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>              | <p>Specify how long a link-state PDU originating from the routing device should persist in the network. The routing device sends link-state PDUs often enough so that the link-state PDU lifetime never expires.</p> <p>Because link-state PDUs have a maximum lifetime, they need to be refreshed. Refreshing means that a routing device needs to re-originate its link-state PDUs periodically. The re-origination interval must be less than the link-state PDU's lifetime. For example, if the link-state PDU is valid for 1200 seconds, the routing device needs to refresh the link-state PDU in less than 1200 seconds to avoid removal of the link-state PDU from the link-state database by other routing devices. The recommended maximum link-state PDU origination interval is the lifetime minus 300 seconds. So, in a default environment this would be 900 seconds. In Junos OS, the refresh interval is derived from the lifetime and is equal to the lifetime minus 317 seconds. You can change the lifetime to a higher value to reduce the number of refreshes in the network. (You would rarely want to increase the number of refreshes.) Often these periodic link-state PDU refreshes are referred to as refresh noise, and network administrators want to reduce this noise as much as possible.</p> <p>The <a href="#">show isis overview</a> command displays the link-state PDU lifetime.</p> |
| <b>Default</b>                  | By default, link-state PDUs are maintained in network databases for 1200 seconds (20 minutes) before being considered invalid. This length of time, called the <i>LSP lifetime</i> , normally is sufficient to guarantee that link-state PDUs never expire.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                  | <p><b><i>seconds</i></b>—link-state PDU lifetime, in seconds.</p> <p><b>Range:</b> 350 through 65,535 seconds</p> <p><b>Default:</b> 1200 seconds</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces</i></li> <li>• <i>Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</i></li> <li>• <i>Understanding Link-State PDU Throttling for IS-IS Interfaces</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

- *Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces*
- [http://www.juniper.net/us/en/training/certification/JNCIP\\_studyguide.pdf](http://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf)

---

## max-areas

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>max-areas <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <code>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</code><br><code>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols</code><br><code><a href="#">isis</a>]</code><br><code>[edit protocols <a href="#">isis</a>],</code><br><code>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</code>                   |
| <b>Release Information</b>      | Statement introduced in Junos OS Release 8.1.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                       |
| <b>Description</b>              | <p>Modify the maximum number of IS-IS areas advertised.</p> <p>This value is included in the Maximum Address Area field of the IS-IS common PDU header included in all outgoing PDUs.</p> <p>The maximum number of areas you can advertise is restricted to 36 to ensure that the IIH PDUs have enough space to include other type, length, and value (TLV) fields, such as the Authentication and IPv4 and IPv6 Interface Address TLVs.</p> |
| <b>Options</b>                  | <b><i>number</i></b> —Maximum number of areas to include in the IS-IS hello (IIH) PDUs and link-state PDUs.<br><b>Range:</b> 3 through 36<br><b>Default:</b> 3                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <code>routing</code> —To view this statement in the configuration.<br><code>routing-control</code> —To add this statement to the configuration.                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Understanding IS-IS Areas to Divide an Autonomous System into Smaller Groups</i></li><li>• <a href="#">Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 16</a></li></ul>                                                                                                                                                                                   |



## mesh-group (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | mesh-group (blocked   <i>value</i> );                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <b>interface</b> <i>interface-name</i> ],<br>[edit protocols isis <b>interface</b> <i>interface-name</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i> ]                                                                                                                                                                                                                                                                                                                                  |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>              | <p>Configure an interface to be part of a mesh group, which is a set of fully connected nodes.</p> <p>A <i>mesh group</i> is a set of routing devices that are fully connected. That is, they have a fully meshed topology. When link-state PDUs are being flooded throughout an area, each router within a mesh group receives only a single copy of a link-state PDU instead of receiving one copy from each neighbor, thus minimizing the overhead associated with the flooding of link-state PDUs.</p> <p>To create a mesh group and designate that an interface be part of the group, assign a mesh-group number to all the routing device interfaces in the group. To prevent an interface in the mesh group from flooding link-state PDUs, configure blocking on that interface.</p> |
| <b>Options</b>                  | <p><b>blocked</b>—Configure the interface so that it does not flood link-state PDUs.</p> <p><b>value</b>—Number that identifies the mesh group.</p> <p><b>Range:</b> 1 through 4,294,967,295 (<math>2^{32} - 1</math>; 32 bits are allocated to identify a mesh group)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring Mesh Groups of IS-IS Interfaces</i></li> <li>• <i>Understanding IS-IS Mesh Groups</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## metric (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <code>metric <i>metric</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | [edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i> ]                                                                                                             |
| <b>Release Information</b> | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>         | Specify the metric value for the level.<br><br>All IS-IS routes have a cost, which is a routing metric that is used in the IS-IS link-state calculation. The cost is an arbitrary, dimensionless integer that can be from 1 through 63, or from 1 through 16,777,215 ( $2^{24} - 1$ ) if you are using wide metrics.<br><br>Similar to other routing protocols, IS-IS provides a way of exporting routes from the routing table into the IS-IS network. When a route is exported into the IS-IS network without a specified metric, IS-IS uses default metric values for the route, depending on the protocol that was used to learn the route. |

[Table 5 on page 122](#) depicts IS-IS route export metric default values.

**Table 5: Default Metric Values for Routes Exported into IS-IS**

| Protocol Used for Learning the Route | Default Metric Value                                          |
|--------------------------------------|---------------------------------------------------------------|
| Direct                               | 10                                                            |
| Static                               | Same as reported by the protocol used for exporting the route |
| Aggregate                            | 10                                                            |
| Generate                             | 10                                                            |
| RIP                                  | Same as reported by the protocol used for exporting the route |
| OSPF                                 | Same as reported by the protocol used for exporting the route |
| BGP                                  | 10                                                            |

The default metric values behavior can be customized by using routing policies.

**Options** `metric`—Metric value.

**Range:** 1 through 63, or 1 through 16,777,215 (if you have configured wide metrics)

**Default:** 10 (for all interfaces except lo0), 0 (for the lo0 interface)

|                              |                                                                                                                                                                                                                                                                                         |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege</b>    | routing—To view this statement in the configuration.                                                                                                                                                                                                                                    |
| <b>Level</b>                 | routing-control—To add this statement to the configuration.                                                                                                                                                                                                                             |
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <i>Example: Enabling Wide IS-IS Metrics for Traffic Engineering</i></li> <li>• <i>Understanding Wide IS-IS Metrics for Traffic Engineering</i></li> <li>• <i>te-metric</i></li> <li>• <a href="#">wide-metrics-only on page 149</a></li> </ul> |

## no-adjacency-holddown

|                              |                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                | no-adjacency-holddown;                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>       | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]                                         |
| <b>Release Information</b>   | Statement introduced in Junos OS Release 8.0.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                              |
| <b>Description</b>           | <p>Disable the hold-down timer for IS-IS adjacencies.</p> <p>A hold-down timer delays the advertising of adjacencies by waiting until a time period has elapsed before labeling adjacencies in the up state. You can disable this hold-down timer, which labels adjacencies up faster. However, disabling the hold-down timer creates more frequent link-state PDU updates and SPF computation.</p> |
| <b>Required Privilege</b>    | routing—To view this statement in the configuration.                                                                                                                                                                                                                                                                                                                                                |
| <b>Level</b>                 | routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                         |
| <b>Related Documentation</b> | <ul style="list-style-type: none"> <li>• <a href="#">hold-time on page 105</a></li> </ul>                                                                                                                                                                                                                                                                                                           |

## no-authentication-check

---

|                                 |                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-authentication-check;                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                  |
| <b>Description</b>              | Generate authenticated packets and check the authentication on received packets, but do not reject packets that cannot be authenticated.                                                                                                                                                                                                                    |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                         |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">csnp-interval on page 93</a></li><li>• <a href="#">hello-authentication-type on page 100</a></li></ul>                                                                                                                                                                                                  |

## no-csnp-authentication

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-csnp-authentication;                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit protocols isis <a href="#">level level-number</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                              |
| <b>Description</b>              | Suppress authentication check on complete sequence number PDU (CSNP) packets.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">csnp-interval on page 93</a></li></ul>                                                                                                                                                                                                                                                                                                                                              |


## no-hello-authentication

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-hello-authentication;                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">level level-number</a> ],<br>[edit protocols isis <a href="#">level level-number</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                 |
| <b>Description</b>              | Suppress authentication check on complete sequence number hello packets.                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">hello-authentication-type on page 100</a></li> </ul>                                                                                                                                                                                                                                                                                                                                  |

## no-ipv4-multicast

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv4-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                         |
| <b>Description</b>              | Exclude an interface from IPv4 multicast topologies.                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Default</b>                  | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li> </ul>                                                                                                                                                                                                                                                             |

## no-ipv4-routing

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv4-routing;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p>                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>              | <p>Disable IP version 4 (IPv4) routing.</p> <p>Disabling IPv4 routing has the following results:</p> <ul style="list-style-type: none"> <li>• The routing device does not advertise the network layer protocol identifier (NLPID) for IPv4 in the Junos OS link-state PDU fragment zero.</li> <li>• The routing device does not advertise any IPv4 prefixes in Junos OS link-state PDUs.</li> <li>• The routing device does not advertise the NLPID for IPv4 in Junos OS hello packets.</li> <li>• The routing device does not advertise any IPv4 addresses in Junos OS hello packets.</li> <li>• The routing device does not calculate any IPv4 routes.</li> </ul> |
|                                 | <p> <b>NOTE:</b> Note: Even when no-ipv4-routing is configured, an IS-IS traceoptions log can list rejected IPv4 addresses. When a configuration is committed, IS-IS schedules a scan of the routing table to determine whether any routes need to be exported into the IS-IS link state database. The implicit default export policy action is to reject everything. IPv4 addresses from the routing table are examined for export, rejected by the default policy, and the rejections are logged.</p>                                                                          |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li> <li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                               |

## no-ipv6-multicast

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv6-multicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Exclude an interface from the IPv6 multicast topologies.                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Default</b>                  | Multicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li> <li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li> </ul>                                                                                                                                                                                                                                                             |

## no-ipv6-routing

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv6-routing;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>              | <p>Disable IP version 6 (IPv6) routing.</p> <p>Disabling IPv6 routing has the following results:</p> <ul style="list-style-type: none"><li>• The routing device does not advertise the network layer protocol identifier (NLPID) for IPv6 in the Junos OS link-state PDU fragment zero.</li><li>• The routing device does not advertise any IPv6 prefixes in Junos OS link-state PDUs.</li><li>• The routing device does not advertise the NLPID for IPv6 in Junos OS hello packets.</li><li>• The routing device does not advertise any IPv6 addresses in Junos OS hello packets.</li><li>• The routing device does not calculate any IPv6 routes.</li></ul> |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li><li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                            |



## no-ipv6-unicast

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-ipv6-unicast;                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>              | Exclude an interface from the IPv6 unicast topologies. This enables you to exercise control over the paths that unicast data takes through a network.                                                                                                                                                                                                                                                                                                              |
| <b>Default</b>                  | IPv6 unicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li> <li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li> </ul>                                                                                                                                                                                                                              |

## no-psnp-authentication

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-psnp-authentication;                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">level level-number</a> ],<br>[edit protocols isis <a href="#">level level-number</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                 |
| <b>Description</b>              | Suppress authentication check on partial sequence number PDU (PSNP) packets.                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                        |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Configuring IS-IS Authentication on page 63</a></li> </ul>                                                                                                                                                                                                                                                                                                                            |

## no-unicast-topology

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | no-unicast-topology;                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">interface interface-name</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <a href="#">interface interface-name</a> ],<br>[edit protocols isis <a href="#">interface interface-name</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">interface interface-name</a> ] |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                         |
| <b>Description</b>              | Exclude an interface from the IPv4 unicast topologies.                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Default</b>                  | IPv4 unicast topologies are disabled.                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li></ul>                                                                                                                                                                                                                                                                |

## overload (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> overload {     advertise-high-metrics;     allow-route-leaking;     timeout <i>seconds</i>; } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <i>isis</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <i>isis</i>],</p> <p>[edit protocols <i>isis</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <i>isis</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>         | <p>Configure the local routing device so that it appears to be overloaded. This statement causes the routing device to continue participating in IS-IS routing, but prevents it from being used for transit traffic. Traffic destined to immediately attached subnets continues to transit the routing device.</p> <p>You can also advertise maximum link metrics in network layer reachability information (NLRI) instead of setting the overload bit.</p> <p>You configure or disable overload mode in IS-IS with or without a timeout. Without a timeout, overload mode is set until it is explicitly deleted from the configuration. With a timeout, overload mode is set if the time elapsed since the IS-IS instance started is less than the specified timeout.</p> <p>A timer is started for the difference between the timeout and the time elapsed since the instance started. If the time elapsed after the IS-IS instance is enabled is less than the specified timeout, overload mode is set. When the timer expires, overload mode is cleared. In overload mode, the routing device IS-IS advertisements are originated with the overload bit set. This causes the transit traffic to take paths around the routing device. However, the overloaded routing device's own links are still accessible.</p> <p>The value of the overload bit depends on these three scenarios:</p> <ol style="list-style-type: none"> <li>1. When the overload bit has already been set to a given value and the routing process is restarted: Link-state PDUs are regenerated with the overload bit cleared.</li> <li>2. When the overload bit is reset to a lesser value while the routing process is running: Link-state PDUs are regenerated with the overload bit cleared.</li> <li>3. When the overload bit is reset to a greater value while the routing process is running: Link-state PDUs are regenerated with the overload bit set to the difference between the old and new value.</li> </ol> |

In overload mode, the routing device advertisement is originated with all the transit routing device links (except stub) set to a metric of 0xFFFF. The stub routing device links are advertised with the actual cost of the interfaces corresponding to the stub. This causes the transit traffic to avoid the overloaded routing device and take paths around the routing device.

To understand the reason for setting the overload bit, consider that BGP converges slowly. It is not very good at detecting that a neighbor is down because it has slow-paced keepalive timers. Once the BGP neighbor is determined to be down, it can take up to 2 minutes for a BGP router to declare the neighbor down. IS-IS is much quicker. IS-IS only takes 10-30 seconds to detect absent peers. It is the slowness of BGP, more precisely the slowness of internal BGP (IBGP), that necessitates the use of the overload bit. IS-IS and BGP routing are mutually dependent on each other. If both do not converge at the same time, traffic is dropped without notification (black holed).

You might want to configure the routing device so that it appears to be overloaded when you are restarting routing on the device. Setting the overload bit for a fixed amount of time right after a restart of the routing protocol process (rpd) ensures that the router does not receive transit traffic while the routing protocols (especially IBGP) are still converging.

Setting the overload bit is useful when performing hardware or software maintenance work on a routing device. After the maintenance work, clear the overload bit to carry on forwarding transit traffic. Manual clearing of the overload bit is not always possible. What is needed is an automated way of clearing the overload bit after some amount of time. Most networks use a time value of 300 seconds. This 5-minute value provides a good balance, allowing time to bring up even large internal IBGP meshes, while still relatively quick.

Another appropriate application for setting for the overload bit is on dedicated devices such as BGP route reflectors, which are intentionally not meant to carry any transit traffic. In this case, you would not use the timer.

You can verify that the overload bit is set by running the **show isis database** command.

**Options** **advertise-high-metrics**—Advertise maximum link metrics in NLRI's instead of setting the overload bit.

The **advertise-high-metric** setting is only valid while the routing device is in overload mode. When **advertise-high-metric** is configured, IS-IS does not set the overload bit. Rather, it sets the metric to 63 or 16,777,214, depending whether wide metrics are enabled. This allows the overloaded routing device to be used for transit as a last resort.

An L1-L2 router in overload mode stops leaking route information between L1 and L2 levels and clears its attached bit. This is also true when **advertise-high-metrics** is configured.

**allow-route-leaking**—Enable leaking of route information into the network even if the overload bit is set.



**NOTE:** The **allow-route-leaking** option does not work if the routing device is in dynamic overload mode. Dynamic overload can occur if the device has exceeded its resource limits, such as the prefix limit.


**timeout seconds**—Number of seconds at which the overloading is reset.

**Range:** 60 through 1800 seconds

**Default:** 0 seconds

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

## passive (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>passive {     remote-node-id <i>address</i>;     remote-node-iso <i>iso-id</i>; }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p><b>remote-node-id</b> <i>address</i> option introduced in Junos OS Release 14.2.</p> <p><b>remote-node-iso</b> <i>iso-id</i> option introduced in Junos OS Release 14.2.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Description</b>         | <p>Advertise the direct interface addresses on an interface or into a level on the interface without actually running IS-IS on that interface or level.</p> <p>This statement effectively prevents IS-IS from running on the interface. To enable IS-IS on an interface, include the <b>interface</b> statement at the [edit protocols isis] or the [edit routing-instances <i>routing-instance-name</i> protocols isis] hierarchy level. To disable it, include the <b>disable</b> statement at those hierarchy levels. The three states—enabling, disabling, or not running IS-IS on an interface—are mutually exclusive.</p>                                                                                                                                                                                                                                                                                                                                                                                            |
|                            | <p> <b>NOTE:</b> Configuring IS-IS on a loopback interface automatically renders it as a passive interface, irrespective of whether the <b>passive</b> statement was used in the configuration of the interface.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                            | <p>If neither passive mode nor the <b>family iso</b> option is configured on the IS-IS interface, then the routing device treats the interface as not being operational, and no direct IPv4/IPv6 routes are exported into IS-IS. (You configure the <b>family iso</b> option at the [edit interfaces <i>interface-name</i> unit <i>logical-unit-number</i>] hierarchy level.)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Default</b>             | By default, IS-IS must be configured on an interface or a level for direct interface addresses to be advertised into that level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Options</b>             | <b>remote-node-id</b> <i>address</i> —IP address of the remote link.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**remote-node-iso iso-id**—ISO ID of the remote node.




**NOTE:** The options **remote-node-id address** and **remote-node-iso iso-id** do not apply under the [edit routing-instances *routing-instance-name* protocols isis] hierarchy level.

**Required Privilege Level** routing—To view this statement in the configuration.  
routing-control—To add this statement to the configuration.

**Related Documentation**

- [Example: Configuring a Multi-Level IS-IS Topology to Control Interarea Flooding on page 16](#)
- *disable*

## point-to-point

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | point-to-point;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Hierarchy Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit protocols isis <b>interface</b> <i>interface-name</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>interface</b> <i>interface-name</i>]</p>                                                                                                                                                                                  |
| <b>Release Information</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                           |
| <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <p>Configure an IS-IS interface to behave like a point-to-point connection.</p> <p>You can use the <b>point-to-point</b> statement to configure a LAN interface to act like a point-to-point interface for IS-IS. You do not need an unnumbered LAN interface, and it has no effect if configured on an interface that is already point-to-point.</p> <p>The <b>point-to-point</b> statement affects only IS-IS protocol procedures on that interface. All other protocols continue to treat the interface as a LAN interface. Only two IS-IS routing devices can be connected to the LAN interface, and both must be configured as point-to-point.</p> |
| <div>  <p><b>BEST PRACTICE:</b> On QFX10000 switches, we strongly recommend that you configure all IS-IS interfaces, including peer interfaces, as point-to-point interfaces. If you do not, you might experience session flaps, that is, IS-IS sessions that go down and then come back up, when IS-IS is configured in virtual routing and forwarding (VRF) instances. When you scale IS-IS in any scenario, you might also experience scaling issues if you do not configure IS-IS interfaces as point-to-point interfaces.</p> </div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>• <a href="#">IS-IS Overview on page 3</a></li> <li>• <a href="#">Example: Configuring Synchronization Between IS-IS and LDP</a></li> <li>• <a href="#">Understanding LDP-IGP Synchronization</a></li> <li>• <a href="#">Understanding IS-IS Designated Routers on page 60</a></li> </ul>                                                                                                                                                                                                                                                                                                                        |



## preference (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>preference <i>preference</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p>                                                                        |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                 |
| <b>Description</b>              | <p>Configure the preference of internal routes.</p> <p>Route preferences (also known as administrative distances) are used to select which route is installed in the forwarding table when several protocols calculate routes to the same destination. The route with the lowest preference value is selected.</p> <p>To change the preference values, include the <b>preference</b> statement (for internal routes) or the <b>external-preference</b> statement.</p>                                                         |
| <b>Options</b>                  | <p><b>preference</b>—Preference value.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> 15 (for Level 1 internal routes), 18 (for Level 2 internal routes), 160 (for Level 1 external routes), 165 (for Level 2 external routes)</p>                                                                                                                                                                                                                                             |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Route Preferences Overview</i></li> <li>• <i>Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS</i></li> <li>• <a href="#">Example: Redistributing OSPF Routes into IS-IS on page 25</a></li> <li>• <i>Understanding Routing Policies</i></li> <li>• <i>Understanding BGP Communities and Extended Communities as Routing Policy Match Conditions</i></li> <li>• <a href="#">external-preference on page 96</a></li> </ul> |

## prefix-export-limit (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>prefix-export-limit <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>],</p> <p>[edit protocols isis <a href="#">level level-number</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis <a href="#">level level-number</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>              | <p>Configure a limit to the number of prefixes exported into IS-IS.</p> <p>By default, there is no limit to the number of prefixes that can be exported into IS-IS. To configure a limit to the number of prefixes that can be exported into IS-IS, include the <b>prefix-export-limit</b> statement. The <b>prefix-export-limit</b> statement protects the rest of the network from a malicious policy by applying a threshold filter for exported routes.</p> <p>The number of prefixes depends on the size of your network. Good design advice is to set it to double the total number of IS-IS Level 1 and Level 2 routing devices in your network.</p> <p>If the number of prefixes exported into IS-IS exceeds the configured limit, the overload bit is set and the overload state is reached. When other routers detect that this bit is set, they do not use this routing device for transit traffic, but they do use it for packets destined to the overloaded routing device's directly connected networks and IP prefixes. The overload state can be cleared by using the <a href="#">clear isis overload</a> command.</p> <p>The <a href="#">show isis overview</a> command displays the prefix export limit when it is configured.</p> |
| <b>Options</b>                  | <p><b><i>number</i></b>—Prefix limit.</p> <p><b>Range:</b> 0 through 4,294,967,295 (<math>2^{32} - 1</math>)</p> <p><b>Default:</b> None</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Redistributing OSPF Routes into IS-IS on page 25</a></li> <li>• <a href="#">Example: Configuring a Routing Policy to Redistribute BGP Routes with a Specific Community Tag into IS-IS</a></li> <li>• <a href="#">Understanding BGP Communities and Extended Communities as Routing Policy Match Conditions</a></li> <li>• <a href="#">Understanding Routing Policies</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## priority (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>priority <i>number</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit protocols isis interface <i>interface-name</i> level <i>level-number</i>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols isis interface <i>interface-name</i> level <i>level-number</i>]</p>                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Description</b>              | <p>Configure the interface's priority for becoming the designated router. The interface with the highest priority value becomes that level's designated router.</p> <p>The priority value is meaningful only on a multiaccess network. It has no meaning on a point-to-point interface.</p> <p>A routing device advertises its priority to become a designated router in its hello packets. On all multiaccess networks, IS-IS uses the advertised priorities to elect a designated router for the network. This routing device is responsible for sending network link-state advertisements, which describe all the routing devices attached to the network. These advertisements are flooded throughout a single area.</p> <p>A routing device's priority for becoming the designated router is indicated by an arbitrary number from 0 through 127. Routing devices with a higher value are more likely to become the designated router.</p> |
| <b>Options</b>                  | <p><i>number</i>—Priority value.</p> <p><b>Range:</b> 0 through 127</p> <p><b>Default:</b> 64</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Required Privilege Level</b> | <p>routing—To view this statement in the configuration.</p> <p>routing-control—To add this statement to the configuration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <a href="#">Example: Configuring IS-IS Designated Routers on page 60</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## reference-bandwidth (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <code>reference-bandwidth <i>reference-bandwidth</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>              | <p>Optimize routing based on bandwidth by setting the reference bandwidth used in calculating the default interface cost.</p> <p>All IS-IS interfaces have a cost, which is a routing metric that is used in the IS-IS link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics. When there are several equal-cost routes to a destination, traffic is distributed equally among them.</p> <p>The cost of a route is described by a single dimensionless metric that is determined using the following formula:</p> $\text{cost} = \text{reference-bandwidth} / \text{bandwidth}$ <p>For example, if you set the reference bandwidth to 1 Gbps (that is, <i>reference-bandwidth</i> is set to 1,000,000,000), a 100-Mbps interface has a routing metric of 10.</p> <p>All IS-IS interfaces have a cost, which is a routing metric that is used in the IS-IS link-state calculation. Routes with lower total path metrics are preferred over those with higher path metrics.</p> |
| <b>Options</b>                  | <i>reference-bandwidth</i> —Reference bandwidth value in bits per second.<br><b>Range:</b> 9600 through 1,000,000,000,000 bps<br><b>Default:</b> None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <i>Understanding IS-IS Configuration</i></li><li>• <a href="#">Example: Configuring IS-IS on page 11</a></li><li>• <a href="http://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf">http://www.juniper.net/us/en/training/certification/JNCIP_studyguide.pdf</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## rib-group (Protocols IS-IS)

|                                 |                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre> rib-group {     inet <i>group-name</i>;     inet6 <i>group-name</i>; } </pre>                                                                                                                                                                                                                                                                                        |
| <b>Hierarchy Level</b>          | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a>]</p> |
| <b>Release Information</b>      | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                              |
| <b>Description</b>              | <p>Install routes learned from IS-IS routing instances into routing tables in the IS-IS routing table group. You can install IPv4 routes or IPv6 routes.</p> <p>Support for IPv6 routing table groups in IS-IS enables IPv6 routes that are learned from IS-IS routing instances to be installed into other routing tables defined in an IS-IS routing table group.</p>    |
| <b>Options</b>                  | <p><b><i>group-name</i></b>—Name of the routing table group.</p> <p><b>inet</b>—Install IPv4 IS-IS routes.</p> <p><b>inet6</b>—Install IPv6 IS-IS routes.</p>                                                                                                                                                                                                              |
| <b>Required Privilege Level</b> | <p><b>routing</b>—To view this statement in the configuration.</p> <p><b>routing-control</b>—To add this statement to the configuration.</p>                                                                                                                                                                                                                               |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Exporting Specific Routes from One Routing Table Into Another Routing Table</i></li> <li>• <i>Example: Importing Direct and Static Routes Into a Routing Instance</i></li> <li>• <i>Understanding Multiprotocol BGP</i></li> </ul>                                                                                    |

## topologies (Protocols IS-IS)

---

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | <pre>topologies {<br/>    ipv4-multicast;<br/>    ipv6-multicast;<br/>    ipv6-unicast;<br/>}</pre>                                                                                                                                                                                                                                                                                            |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ],<br>[edit protocols <a href="#">isis</a> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols <a href="#">isis</a> ]                                    |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                     |
| <b>Description</b>              | Configure alternate IS-IS topologies.<br><br>The remaining statements are explained separately.                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"><li>• <a href="#">Example: Configuring IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li><li>• <a href="#">Example: Configuring IS-IS Multicast Topology on page 43</a></li><li>• <a href="#">IS-IS Multicast Topologies Overview on page 42</a></li><li>• <a href="#">Understanding IS-IS IPv4 and IPv6 Unicast Topologies on page 33</a></li></ul> |

## traceoptions (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                        |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre>traceoptions {     file <i>name</i> &lt;size <i>size</i>&gt; &lt;files <i>number</i>&gt; &lt;world-readable   no-world-readable&gt;;     flag <i>flag</i> &lt;flag-modifier&gt; &lt;disable&gt;; }</pre>                                                                                                                          |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <b>isis</b>],</p> <p>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols <b>isis</b>],</p> <p>[edit protocols <b>isis</b>],</p> <p>[edit routing-instances <i>routing-instance-name</i> protocols <b>isis</b>]</p> |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Statement introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                          |
| <b>Description</b>         | Configure IS-IS protocol-level tracing options. To specify more than one tracing operation, include multiple <b>flag</b> statements.                                                                                                                                                                                                   |



**NOTE:** The **traceoptions** statement is not supported on QFabric systems.

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Default</b> | The default IS-IS protocol-level tracing options are those inherited from the routing protocols <b>traceoptions</b> statement included at the <b>[edit routing-options]</b> hierarchy level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Options</b> | <p><b>disable</b>—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as <b>all</b>.</p> <p><b>file <i>name</i></b>—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks (" "). All files are placed in the directory <b>/var/log</b>. We recommend that you place IS-IS tracing output in the file <b>isis-log</b>.</p> <p><b>files <i>number</i></b>—(Optional) Maximum number of trace files. When a trace file named <b>trace-file</b> reaches its maximum size, it is renamed <b>trace-file.0</b>, then <b>trace-file.1</b>, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten.</p> <p>If you specify a maximum number of files, you also must specify a maximum file size with the <b>size</b> option.</p> <p><b>Range:</b> 2 through 1000 files</p> <p><b>Default:</b> 10 files</p> <p><b>flag <i>flag</i></b>—Tracing operation to perform. To specify more than one flag, include multiple <b>flag</b> statements.</p> |

### IS-IS Protocol-Specific Tracing Flags

- **csn**—Complete sequence number PDU (CSNP) packets
- **error**—Errored IS-IS packets
- **graceful-restart**—Graceful restart operation
- **hello**—Hello packets
- **layer2-map**—Mapped ARP or neighbor discovery next hops in the kernel
- **ldp-synchronization**—Synchronization between IS-IS and LDP
- **lsp**—Link-state PDUs
- **lsp-generation**—Link-state PDU generation packets
- **packets**—All IS-IS protocol packets
- **psn**—Partial sequence number PDU (PSNP) packets
- **spf**—Shortest-path-first calculations

#### Global Tracing Flags

- **all**—All tracing operations
- **general**—A combination of the **normal** and **route** trace operations
- **normal**—All normal operations, including adjacency changes

**Default:** If you do not specify this option, only unusual or abnormal operations are traced.

- **policy**—Policy operations and actions
- **route**—Routing table changes
- **state**—State transitions
- **task**—Routing protocol task processing
- **timer**—Routing protocol timer processing

***flag-modifier***—(Optional) Modifier for the tracing flag. You can specify one or more of these modifiers:

- **detail**—Provide detailed trace information.
- **receive**—Trace the packets being received.
- **send**—Trace the packets being transmitted.

**no-world-readable**—(Optional) Prevent any user from reading the log file.



**size size**—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named **trace-file** reaches this size, it is renamed **trace-file.0**. When the **trace-file** again reaches its maximum size, **trace-file.0** is renamed **trace-file.1** and **trace-file** is renamed **trace-file.0**. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

**Syntax:** **xk** to specify KB, **xm** to specify MB, or **xg** to specify GB

**Range:** 10 KB through the maximum file size supported on your system

**Default:** 128 KB

**world-readable**—(Optional) Allow any user to read the log file.

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Required Privilege Level</b> | routing and trace—To view this statement in the configuration.<br>routing-control and trace-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li>• <i>Example: Configuring the Transmission Frequency for CSNP Packets on IS-IS Interfaces</i></li> <li>• <a href="#">Example: Enabling Packet Checksums on IS-IS Interfaces for Error Checking on page 60</a></li> <li>• <i>Example: Configuring the Transmission Frequency for Link-State PDUs on IS-IS Interfaces</i></li> <li>• <i>Understanding Link-State PDU Throttling for IS-IS Interfaces</i></li> <li>• <i>Understanding Checksums on IS-IS Interfaces for Error Checking</i></li> <li>• <i>Understanding the Transmission Frequency for CSNPs on IS-IS Interfaces</i></li> </ul> |

## traffic-engineering (Protocols IS-IS)

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>              | <pre> traffic-engineering {     disable;     credibility-protocol-preference;     family inet {         shortcuts {             multicast-rpf-routes;         }     }     family inet6 {         shortcuts;     }     multipath {         lsp-equal-cost;     } } </pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Hierarchy Level</b>     | <p>[edit logical-systems <i>logical-system-name</i> protocols <a href="#">isis</a>],</p> <p>[edit protocols <a href="#">isis</a>]</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b> | <p>Statement introduced before Junos OS Release 7.4.</p> <p>Support for the <b>family</b> statement introduced in Junos OS Release 9.3.</p> <p>Support for the <b>credibility-protocol-preference</b> statement introduced in Junos OS Release 9.4.</p> <p>Support for the <b>multipath</b> statement introduced in Junos OS Release 9.6.</p> <p>Support for the <b>lsp-equal-cost</b> statement introduced in Junos OS Release 9.6.</p> <p>Statement introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>         | <p>Configure traffic engineering properties for IS-IS.</p> <p>IS-IS always performs shortest-path-first (SPF) calculations to determine next hops. For prefixes reachable through a particular next hop, IS-IS places that next hop for that prefix in the inet.0 routing table. In addition, for routers running MPLS, IS-IS installs the prefix for IPv4 routes in the inet.3 routing table as well. The inet.3 table, which is present on the ingress router, contains the host address of each MPLS label-switched path (LSP) egress router. BGP uses this routing table to resolve next-hop addresses.</p> <p>If you enable IS-IS traffic engineering shortcuts and if there is a label-switched path to a point along the path to that prefix, IS-IS installs the prefix in the inet.3 routing table and uses the LSP as a next hop. The net result is that for BGP egress routers for which there is no LSP, BGP automatically uses an LSP along the path to reach the egress router.</p> <p>In Junos OS Release 9.3 and later, IS-IS traffic engineering shortcuts support IPv6 routes. LSPs to be used for shortcuts continue to be signaled using IPv4. However, by default, shortcut routes calculated through IPv6 routes are added to the inet6.3 routing table. The default behavior is for only BGP to use LSPs in its calculations. If you configure MPLS so that both BGP and interior gateway protocols use LSPs for forwarding traffic, shortcut routes calculated through IPv6 are added to the inet6.0 routing table. IS-IS ensures that the IPv6 routes running over the IPv4 MPLS LSP are correctly de-encapsulated at the</p> |

tunnel egress by pushing an extra IPv6 explicit null label between the IPv6 payload and the IPv4 transport label.

RSVP LSPs with a higher preference than IS-IS routes are not considered during the computation of traffic engineering shortcuts.

To configure IS-IS so that it uses LSPs as shortcuts when installing information in the inet.3 or inet6.3 routing table, include the following statements:

```
family inet {
 shortcuts {
 multicast-rpf-routes;
 }
}
family inet6 {
 shortcuts;
}
```

For IPv4 traffic, include the **inet** statement. For IPv6 traffic, include the **inet6** statement.

To configure load balancing across multiple LSPs, include the **multipath** statement.

When traffic engineering shortcuts are used, RSVP first looks at the **metric2** value, which is derived from the IGP cost. After this, RSVP considers the LSP metric value. So, if a certain path changes for an LSP and the cost changes, not all LSPs are used to load-balance the network.

When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default behavior for load balancing, include the **lsp-equal-cost** statement to retain the equal cost path information in the routing table.

```
multipath {
 lsp-equal-cost;
}
```

Because the inet.3 routing table is present only on ingress routers, you can configure LSP shortcuts only on these routers.

**Default** IS-IS traffic engineering support is enabled.

By default, IS-IS supports traffic engineering by exchanging basic information with the traffic engineering database. To disable this support, and to disable IS-IS shortcuts if they are configured, include the **disable** statement.

**Options**    **credibility-protocol-preference**—Specify that IS-IS should use the configured protocol preference for IGP routes to determine the traffic engineering database credibility value. By default, the traffic engineering database prefers IS-IS routes even when the routes of another IGP are configured with a lower, that is, more preferred value. Use this statement to override this default behavior.

The traffic engineering database assigns a credibility value to each IGP and prefers the routes of the IGP with the highest credibility value. In Junos OS Release 9.4 and later, you can configure IS-IS to take protocol preference into account to determine the traffic engineering database credibility value. When protocol preference is used to determine the credibility value, IS-IS routes are not automatically preferred by the traffic engineering database, depending on your configuration. For example, OSPF routes have a default preference value of 10, whereas IS-IS Level 1 routes have a default preference value of 15. When protocol preference is enabled, the credibility value is determined by deducting the protocol preference value from a base value of 512. Using default protocol preference values, OSPF has a credibility value of 502, whereas IS-IS has a credibility value of 497. Because the traffic engineering database prefers IGP routes with the highest credibility value, OSPF routes are now preferred.



**NOTE:** This feature is also supported for OSPFv2.

---

**lsp-equal-cost**—Configure LSPs to be retained as equal cost paths for load balancing when a better path metric is found during the IS-IS internal routing table calculation. When a route with an improved metric is added to the IS-IS internal routing table, IS-IS flushes all next-hop information (including LSP next-hop information) for a route. This is undesirable, because certain equal-cost multipath (ECMP) combinations can be lost during route calculation. To override this default IS-IS behavior, include the **lsp-equal-cost** statement for load balancing, so that the equal cost path information is retained in the routing table.

**multipath**—Enable load balancing for multiple LSPs.

The remaining statements are explained separately.

**Required Privilege Level**    routing—To view this statement in the configuration.  
                                         routing-control—To add this statement to the configuration.

**Related Documentation**

- *Example: Enabling OSPF Traffic Engineering Support*
- *Example: Enabling IS-IS Traffic Engineering Support*
- *traffic-engineering (OSPF)*
- *Using Labeled-Switched Paths to Augment SPF to Compute IGP Shortcuts*

## wide-metrics-only

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                   | wide-metrics-only;                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Hierarchy Level</b>          | [edit logical-systems <i>logical-system-name</i> protocols isis <b>level</b> <i>level-number</i> ],<br>[edit logical-systems <i>logical-system-name</i> routing-instances <i>routing-instance-name</i> protocols<br>isis <b>level</b> <i>level-number</i> ],<br>[edit protocols isis <b>level</b> <i>level-number</i> ],<br>[edit routing-instances <i>routing-instance-name</i> protocols isis <b>level</b> <i>level-number</i> ]                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>      | Statement introduced before Junos OS Release 7.4.<br>Statement introduced in Junos OS Release 9.0 for EX Series switches.<br>Statement introduced in Junos OS Release 12.1 for the QFX Series.<br>Statement introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Description</b>              | Configure IS-IS to generate metric values greater than 63 on a per IS-IS level basis.<br><br>Normally, IS-IS metrics can have values up to 63, and IS-IS generates two type, length, and value (TLV) tuples, one for an IS-IS adjacency and the second for an IP prefix. To allow IS-IS to support traffic engineering, a second pair of TLVs has been added to IS-IS, one for IP prefixes and the second for IS-IS adjacency and traffic engineering information. With these TLVs, IS-IS metrics can have values up to 16,777,215 ( $2^{24} - 1$ ).<br><br>To configure IS-IS to generate only the new pair of TLVs and thus to allow the wider range of metric values, include the <b>wide-metrics-only</b> statement. |
| <b>Default</b>                  | By default, Junos OS supports the sending and receiving of wide metrics. Junos OS allows a maximum metric value of 63 and generates both pairs of TLVs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Required Privilege Level</b> | routing—To view this statement in the configuration.<br>routing-control—To add this statement to the configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Related Documentation</b>    | <ul style="list-style-type: none"> <li><i>te-metric</i></li> <li><i>Example: Enabling Wide IS-IS Metrics for Traffic Engineering</i></li> <li><i>Understanding Wide IS-IS Metrics for Traffic Engineering</i></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



## CHAPTER 6

# Operational Commands

- clear isis adjacency
- clear isis database
- clear isis overload
- clear isis statistics
- show isis adjacency
- show isis authentication
- show isis database
- show isis hostname
- show isis interface
- show isis overview
- show isis route
- show isis statistics

## clear isis adjacency

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 152</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 152</a>                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Syntax</b>                                     | <pre>clear isis adjacency &lt;all&gt; &lt;instance <i>instance-name</i>&gt; &lt;interface <i>interface-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt; &lt;neighbor&gt;</pre>                                                                                                                                                                                                                                                                                                                   |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>clear isis adjacency &lt;all&gt; &lt;instance <i>instance-name</i>&gt; &lt;interface <i>interface-name</i>&gt; &lt;neighbor&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>all option introduced in Junos OS Release 14.2.                                                                                                                                                                                                                                                                            |
| <b>Description</b>                                | Remove entries from the IS-IS adjacency database.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Options</b>                                    | <p>all—Remove all entries from the adjacency database.</p> <p>instance <i>instance-name</i>—(Optional) Clear all adjacencies for the specified routing instance only.</p> <p>interface <i>interface-name</i>—(Optional) Clear all adjacencies for the specified interface only.</p> <p>logical-system (all   <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p>neighbor—(Optional) Clear adjacencies for the specified neighbor only.</p> |
| <b>Required Privilege Level</b>                   | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"><li>• <a href="#">show isis adjacency on page 160</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>                      | <a href="#">clear isis adjacency on page 153</a><br><a href="#">clear isis adjacency all on page 153</a>                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>                              | See <a href="#">show isis adjacency</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                                                                                                           |



## Sample Output

### clear isis adjacency

The following sample output displays IS-IS adjacency database information before and after the **clear isis adjacency** command is entered:

```
user@host> show isis adjacency
IS-IS adjacency database:
Interface System L State Hold (secs) SNPA
so-1/0/0.0 karaku1 3 Up 26
so-1/1/3.0 1921.6800.5080 3 Up 23
so-5/0/0.0 1921.6800.5080 3 Up 19

user@host> clear isis adjacency karaku1
```

```
user@host> show isis adjacency
IS-IS adjacency database:
Interface System L State Hold (secs) SNPA
so-1/0/0.0 karaku1 3 Initializing 26
so-1/1/3.0 1921.6800.5080 3 Up 24
so-5/0/0.0 1921.6800.5080 3 Up 21
```

### clear isis adjacency all

```
user@host> clear isis adjacency all
IS-IS adjacency database:
Interface System L State Hold (secs) SNPA
so-1/0/0.0 karaku1 3 Initializing 26
so-1/1/3.0 1921.6800.5080 3 Initializing 24
so-5/0/0.0 1921.6800.5080 3 Initializing 21
```

## clear isis database

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 154</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 154</a>                                                                                                                                                                                                                                                                                                                             |
| <b>Syntax</b>                                     | <pre>clear isis database &lt;all&gt; &lt;entries&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                               |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>clear isis database &lt;all&gt; &lt;entries&gt; &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.<br>Command introduced in 15.1X53-D30 for QFX10002 switch.                                                                                                             |
| <b>Description</b>                                | Remove the entries from the IS-IS link-state database, which contains prefixes and topology information.                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                    | <p><b>all</b>—Remove all entries from the IS-IS link-state database for all routing instances.</p> <p><b>entries</b>—(Optional) Name of the database entry.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Clear all entries for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | clear                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"><li>• <a href="#">show isis database on page 166</a></li></ul>                                                                                                                                                                                                                                                                                                                                         |
| <b>List of Sample Output</b>                      | <a href="#">clear isis database on page 154</a>                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Output Fields</b>                              | See <a href="#">show isis database</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                              |

## Sample Output

### clear isis database

The following sample output displays IS-IS link-state database information before and after the **clear isis database all** command is entered:

```
user@host> show isis database
```

```
IS-IS level 1 link-state database:
LSP ID Sequence Checksum Lifetime (secs)
crater.00-00 0x12 0x84dd 1139
 1 LSPs
IS-IS level 2 link-state database:
LSP ID Sequence Checksum Lifetime (secs)
crater.00-00 0x19 0xe92c 1134
badlands.00-00 0x16 0x1454 985
carlsbad.00-00 0x33 0x220b 1015
ranier.00-00 0x2e 0xfc31 1007
1921.6800.5066.00-00 0x11 0x7313 566
1921.6800.5067.00-00 0x14 0xd9d4 939
 6 LSPs
```

```
user@host> clear isis database all
```

```
user@host> show isis database
```

```
IS-IS level 1 link-state database:
LSP ID Sequence Checksum Lifetime (secs)

IS-IS level 2 link-state database:
LSP ID Sequence Checksum Lifetime (secs)
```

## clear isis overload

---

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| List of Syntax                             | <a href="#">Syntax on page 156</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 156</a>                                                                                                                                                                                                                                                                                                                                                                        |
| Syntax                                     | <code>clear isis overload</code><br><code>&lt;instance <i>instance-name</i>&gt;</code><br><code>&lt;logical-system (all   <i>logical-system-name</i>)&gt;</code>                                                                                                                                                                                                                                                                                                                    |
| Syntax (EX Series Switches and QFX Series) | <code>clear isis overload</code><br><code>&lt;instance <i>instance-name</i>&gt;</code>                                                                                                                                                                                                                                                                                                                                                                                              |
| Release Information                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                  |
| Description                                | <p>Reset the IS-IS dynamic overload bit. This command can appear to not work, continuing to display <b>overload</b> after execution. The bit is reset only if the root cause is corrected by configuration remotely or locally.</p> <p>When other routers detect that the overload bit is set, they do not use this routing device for transit traffic, but they do use it for packets destined to the overloaded routing device's directly connected networks and IP prefixes.</p> |
| Options                                    | <p><b>none</b>—Reset the IS-IS dynamic overload bit.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Reset the IS-IS dynamic overload bit for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                                                                                                                                |
| Required Privilege Level                   | clear                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Related Documentation                      | <ul style="list-style-type: none"><li>• <a href="#">show isis database on page 166</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                    |
| List of Sample Output                      | <a href="#">clear isis overload on page 156</a>                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Output Fields                              | See <a href="#">show isis database</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                                                                                                                         |

## Sample Output

### clear isis overload

The following sample output displays IS-IS database information before and after the **clear isis overload** command is entered:

```
user@host> show isis database
```

IS-IS level 1 link-state database:

| LSP ID       | Sequence | Checksum | Lifetime | Attributes            |
|--------------|----------|----------|----------|-----------------------|
| pro3-c.00-00 | 0x4      | 0x10db   | 1185     | L1 L2 <b>Overload</b> |

1 LSPs

IS-IS level 2 link-state database:

| LSP ID       | Sequence | Checksum | Lifetime | Attributes            |
|--------------|----------|----------|----------|-----------------------|
| pro3-c.00-00 | 0x5      | 0x429f   | 1185     | L1 L2 <b>Overload</b> |

|              |       |        |     |       |
|--------------|-------|--------|-----|-------|
| pro2-a.00-00 | 0x91e | 0x2589 | 874 | L1 L2 |
|--------------|-------|--------|-----|-------|

|              |     |       |     |       |
|--------------|-----|-------|-----|-------|
| pro2-a.02-00 | 0x1 | 0xcbc | 874 | L1 L2 |
|--------------|-----|-------|-----|-------|

3 LSPs

user@host> clear isis overload

user@host> show isis database

IS-IS level 1 link-state database:

| LSP ID       | Sequence | Checksum | Lifetime | Attributes |
|--------------|----------|----------|----------|------------|
| pro3-c.00-00 | 0xa      | 0x429e   | 1183     | L1 L2      |

1 LSPs

IS-IS level 2 link-state database:

| LSP ID       | Sequence | Checksum | Lifetime | Attributes |
|--------------|----------|----------|----------|------------|
| pro3-c.00-00 | 0xc      | 0x9c39   | 1183     | L1 L2      |

|              |       |        |     |       |
|--------------|-------|--------|-----|-------|
| pro2-a.00-00 | 0x91e | 0x2589 | 783 | L1 L2 |
|--------------|-------|--------|-----|-------|

|              |     |       |     |       |
|--------------|-----|-------|-----|-------|
| pro2-a.02-00 | 0x1 | 0xcbc | 783 | L1 L2 |
|--------------|-----|-------|-----|-------|

3 LSPs

## clear isis statistics

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 158</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 158</a>                                                                                                                                                                                                                                                                    |
| <b>Syntax</b>                                     | clear isis statistics<br><instance <i>instance-name</i> ><br><logical-system (all   <i>logical-system-name</i> )>                                                                                                                                                                                                                                                               |
| <b>Syntax (EX Series Switches and QFX Series)</b> | clear isis statistics<br><instance <i>instance-name</i> >                                                                                                                                                                                                                                                                                                                       |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                              |
| <b>Description</b>                                | Set statistics about IS-IS traffic to zero.                                                                                                                                                                                                                                                                                                                                     |
| <b>Options</b>                                    | <b>none</b> —Set IS-IS traffic statistics to zero for all routing instances.<br><br><b>instance <i>instance-name</i></b> —(Optional) Set IS-IS traffic statistics to zero for the specified routing instance only.<br><br><b>logical-system (all   <i>logical-system-name</i>)</b> —(Optional) Perform this operation on all logical systems or on a particular logical system. |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li>• <a href="#">show isis statistics on page 195</a></li> </ul>                                                                                                                                                                                                                                                                            |
| <b>List of Sample Output</b>                      | <a href="#">clear isis statistics on page 158</a>                                                                                                                                                                                                                                                                                                                               |
| <b>Output Fields</b>                              | See <a href="#">show isis statistics</a> for an explanation of output fields.                                                                                                                                                                                                                                                                                                   |

## Sample Output

### clear isis statistics

The following sample output displays IS-IS statistics before and after the **clear isis statistics** command is entered:

```
user@host> show isis statistics
IS-IS statistics for merino:
```

| PDU type | Received | Processed | Drops | Sent   | Rexmit |
|----------|----------|-----------|-------|--------|--------|
| LSP      | 12793    | 12793     | 0     | 8666   | 719    |
| IIH      | 116751   | 116751    | 0     | 118834 | 0      |
| CSNP     | 203956   | 203956    | 0     | 204080 | 0      |
| PSNP     | 7356     | 7350      | 6     | 8635   | 0      |
| Unknown  | 0        | 0         | 0     | 0      | 0      |

```
Totals 340856 340850 6 340215 719
```

```
Total packets received: 340856 Sent: 340934
```

```
SNP queue length: 0 Drops: 0
LSP queue length: 0 Drops: 0
```

```
SPF runs: 1064
Fragments rebuilt: 1087
LSP regenerations: 436
Purges initiated: 0
```

```
user@host> clear isis statistics
```

```
user@host> show isis statistics
IS-IS statistics for merino:
```

| PDU type | Received | Processed | Drops | Sent | Rexmit |
|----------|----------|-----------|-------|------|--------|
| LSP      | 0        | 0         | 0     | 0    | 0      |
| IIH      | 3        | 3         | 0     | 3    | 0      |
| CSNP     | 2        | 2         | 0     | 4    | 0      |
| PSNP     | 0        | 0         | 0     | 0    | 0      |
| Unknown  | 0        | 0         | 0     | 0    | 0      |
| Totals   | 5        | 5         | 0     | 7    | 0      |

```
Total packets received: 5 Sent: 7
```

```
SNP queue length: 0 Drops: 0
LSP queue length: 0 Drops: 0
```

```
SPF runs: 0
Fragments rebuilt: 0
LSP regenerations: 0
Purges initiated: 0
```

## show isis adjacency

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 160</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 160</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Syntax</b>                                     | <pre>show isis adjacency &lt;system-id&gt; &lt;brief   detail   extensive&gt; &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show isis adjacency &lt;system-id&gt; &lt;brief   detail   extensive&gt; &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Description</b>                                | Display information about IS-IS neighbors.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Options</b>                                    | <p><b>none</b>—Display standard information about IS-IS neighbors for all routing instances.</p> <p><b><i>system id</i></b>—(Optional) Display information about IS-IS neighbors for the specified intermediate system.</p> <p><b><i>brief   detail   extensive</i></b>—(Optional) Display standard information about IS-IS neighbors with the specified level of output.</p> <p><b><i>instance instance-name</i></b>—(Optional) Display information about IS-IS neighbors for the specified routing instance.</p> <p><b><i>logical-system (all   logical-system-name)</i></b>—(Optional) Display information about IS-IS neighbors for all logical systems or for a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"><li>• <a href="#">clear isis adjacency on page 152</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>List of Sample Output</b>                      | <a href="#">show isis adjacency on page 163</a><br><a href="#">show isis adjacency brief on page 163</a><br><a href="#">show isis adjacency detail on page 163</a><br><a href="#">show isis adjacency extensive on page 163</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Output Fields</b>                              | <a href="#">Table 6 on page 161</a> describes the output fields for the <b>show isis adjacency</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



Table 6: show isis adjacency Output Fields

| Field Name                                | Field Description                                                                                                                                                                                                                               | Level of Output         |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Interface</b>                          | Interface through which the neighbor is reachable.                                                                                                                                                                                              | All levels              |
| <b>System</b>                             | System identifier ( <b>sysid</b> ), displayed as a name, if possible.                                                                                                                                                                           | <b>brief</b>            |
| <b>L or Level</b>                         | Level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> An exclamation point (!) preceding the level number indicates that the adjacency is missing an IP address. | All levels              |
| <b>State</b>                              | State of the adjacency: <b>Up</b> , <b>Down</b> , <b>New</b> , <b>One-way</b> , <b>Initializing</b> , or <b>Rejected</b> .                                                                                                                      | All levels              |
| <b>Hold (secs)</b>                        | Remaining hold time of the adjacency.                                                                                                                                                                                                           | <b>brief</b>            |
| <b>SNPA</b>                               | Subnetwork point of attachment (MAC address of the next hop).                                                                                                                                                                                   | <b>brief</b>            |
| <b>Expires in</b>                         | How long until the adjacency expires, in seconds.                                                                                                                                                                                               | <b>detail</b>           |
| <b>Priority</b>                           | Priority to become the designated intermediate system.                                                                                                                                                                                          | <b>detail extensive</b> |
| <b>Up/Down transitions</b>                | Count of adjacency status changes from <b>Up</b> to <b>Down</b> or from <b>Down</b> to <b>Up</b> .                                                                                                                                              | <b>detail</b>           |
| <b>Last transition</b>                    | Time of the last <b>Up/Down</b> transition.                                                                                                                                                                                                     | <b>detail</b>           |
| <b>Circuit type</b>                       | Bit mask of levels on this interface: 1=Level 1 router; 2=Level 2 router; 3=both Level 1 and Level 2 router.                                                                                                                                    | <b>detail</b>           |
| <b>Speaks</b>                             | Protocols supported by this neighbor.                                                                                                                                                                                                           | <b>detail extensive</b> |
| <b>MAC address</b>                        | MAC address of the interface.                                                                                                                                                                                                                   | <b>detail extensive</b> |
| <b>Topologies</b>                         | Supported topologies.                                                                                                                                                                                                                           | <b>detail extensive</b> |
| <b>Restart capable</b>                    | Whether a neighbor is capable of graceful restart: <b>Yes</b> or <b>No</b> .                                                                                                                                                                    | <b>detail extensive</b> |
| <b>Adjacency advertisement: Advertise</b> | This routing device has signaled to advertise this interface to its neighbors in their link-state PDUs.                                                                                                                                         | <b>detail extensive</b> |
| <b>Adjacency advertisement: Suppress</b>  | This neighbor has signaled not to advertise the interface in the routing device's outbound link-state PDUs.                                                                                                                                     | <b>detail extensive</b> |
| <b>IP addresses</b>                       | IP address of this neighbor.                                                                                                                                                                                                                    | <b>detail extensive</b> |

Table 6: show isis adjacency Output Fields (*continued*)

| Field Name           | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Level of Output  |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| IPv6 Address         | IPv6 address of the neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | detail extensive |
| Level 1 IPv4 Adj-SID | Level 1 IPv4 node-SID of the adjacent neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | detail extensive |
| Level 1 IPv6 Adj-SID | Level 1 IPv6 node-SID of the adjacent neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                  |
| Level 2 IPv4 Adj-SID | Level 2 IPv4 node-SID of the adjacent neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | detail extensive |
| Level 2 IPv6 Adj-SID | Level 2 IPv6 node-SID of the adjacent neighbor.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | detail extensive |
| Transition log       | <p>List of recent transitions, including:</p> <ul style="list-style-type: none"> <li>• <b>When</b>—Time at which an IS-IS adjacency transition occurred.</li> <li>• <b>State</b>—Current state of the IS-IS adjacency (<b>up</b>, <b>down</b>, or <b>rejected</b>). <ul style="list-style-type: none"> <li>• <b>Up</b>—Adjacency is up and operational.</li> <li>• <b>Down</b>—Adjacency is down and not available.</li> <li>• <b>Rejected</b>—Adjacency has been rejected.</li> </ul> </li> <li>• <b>Event</b>—Type of transition that occurred. <ul style="list-style-type: none"> <li>• <b>Seenself</b>—Possible routing loop has been detected.</li> <li>• <b>Interface down</b>—IS-IS interface has gone down and is no longer available.</li> <li>• <b>Error</b>—Adjacency error.</li> </ul> </li> <li>• <b>Down reason</b>—Reason that an IS-IS adjacency is down: <ul style="list-style-type: none"> <li>• <b>3-Way Handshake Failed</b>—Connection establishment failed.</li> <li>• <b>Address Mismatch</b>—Address mismatch caused link failure.</li> <li>• <b>Aged Out</b>—Link expired.</li> <li>• <b>ISO Area Mismatch</b>—IS-IS area mismatch caused link failure.</li> <li>• <b>Bad Hello</b>—Unacceptable hello message caused link failure.</li> <li>• <b>BFD Session Down</b>—Bidirectional failure detection caused link failure.</li> <li>• <b>Interface Disabled</b>—IS-IS interface is disabled.</li> <li>• <b>Interface Down</b>—IS-IS interface is unavailable.</li> <li>• <b>Interface Level Disabled</b>—IS-IS level is disabled.</li> <li>• <b>Level Changed</b>—IS-IS level has changed on the adjacency.</li> <li>• <b>Level Mismatch</b>—Levels on adjacency are not compatible.</li> <li>• <b>MPLS LSP Down</b>—Label-switched path (LSP) is unavailable.</li> <li>• <b>MT Topology Changed</b>—IS-IS topology has changed.</li> <li>• <b>MT Topology Mismatch</b>—IS-IS topology is mismatched.</li> <li>• <b>Remote System ID Changed</b>—Adjacency peer system ID changed.</li> <li>• <b>Protocol Shutdown</b>—IS-IS protocol is disabled.</li> <li>• <b>CLI Command</b>—Adjacency brought down by user.</li> <li>• <b>Unknown</b>—Unknown.</li> </ul> </li> </ul> | extensive        |

## Sample Output

### show isis adjacency

```
user@host> show isis adjacency
Interface System L State Hold (secs) SNPA
at-2/3/0.0 ranier 3 Up 23
```

### show isis adjacency brief

The output for the **show isis adjacency brief** command is identical to that for the **show isis adjacency** command. For sample output, see [show isis adjacency on page 163](#).

### show isis adjacency detail

```
user@host> show isis adjacency detail
ranier
Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 21 secs
Priority: 0, Up/Down transitions: 1, Last transition: 00:01:09 ago
Circuit type: 3, Speaks: IP, IPv6
Topologies: Unicast, IPV6-Unicast Restart capable: Yes, Adjacency advertisement:
Advertise
LAN id: pro-bng3-c-F.02, IP addresses: 11.1.1.2
IPv6 addresses: fe80::2a0:a514:0:4745
Level 1 IPv4 Adj-SID: 299808, IPv6 Adj-SID: 299824
```

### show isis adjacency extensive

```
user@host> show isis adjacency extensive
ranier
Interface: at-2/3/0.0, Level: 3, State: Up, Expires in 22 secs
Priority: 0, Up/Down transitions: 1, Last transition: 00:01:16 ago
Circuit type: 3, Speaks: IP, IPv6

Topologies: Unicast, IPV6-Unicast
Restart capable: Yes, Adjacency advertisement: Advertise
IP addresses: 11.1.1.2
IPv6 addresses: fe80::2a0:a514:0:3e45
Level 1 IPv4 Adj-SID: 300112, IPv6 Adj-SID: 300304
Level 2 IPv4 Adj-SID: 300320, IPv6 Adj-SID: 300336
Transition log:
When State Event Down reason
Thu Mar 26 06:13:18 Up Seenself
```

## show isis authentication

|                                                   |                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 164</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 164</a>                                                                                                                                                                                                                                                                  |
| <b>Syntax</b>                                     | <pre>show isis authentication &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                           |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show isis authentication &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                     |
| <b>Release Information</b>                        | <p>Command introduced in Junos OS Release 7.5.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Support for hitless authentication key rollover introduced in Junos OS Release 11.2.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p> |
| <b>Description</b>                                | Display information about Intermediate System-to-Intermediate System (IS-IS) authentication.                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                    | <p><b>none</b>—Display information about IS-IS authentication.</p> <p><b>instance</b> <i>instance-name</i>—(Optional) Display IS-IS authentication for the specified routing instance.</p> <p><b>logical-system</b> (all   <i>logical-system-name</i>)—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                        |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li><a href="#">show security keychain</a></li> </ul>                                                                                                                                                                                                                                                                                      |
| <b>List of Sample Output</b>                      | <a href="#">show isis authentication on page 165</a><br><a href="#">show isis authentication (With Hitless Authentication Key Rollover Configured) on page 165</a>                                                                                                                                                                                                            |
| <b>Output Fields</b>                              | <p><a href="#">Table 7 on page 164</a> describes the output fields for the <b>show isis authentication</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                               |

**Table 7: show isis authentication Output Fields**

| Field Name       | Field Description |
|------------------|-------------------|
| <b>Interface</b> | Interface name.   |
| <b>Level</b>     | IS-IS level.      |

Table 7: show isis authentication Output Fields (*continued*)

| Field Name            | Field Description                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| IIH Auth              | IS-IS Hello (IIH) packet authentication type.<br><br>Displays the name of the active keychain if hitless authentication key rollover is configured. |
| CSN Auth              | Complete sequence number authentication type.                                                                                                       |
| PSN Auth              | Partial sequence number authentication type.                                                                                                        |
| L1 LSP Authentication | Layer 1 link-state PDU authentication type.                                                                                                         |
| L2 LSP Authentication | Layer 2 link-state PDU authentication type.                                                                                                         |

## Sample Output

### show isis authentication

```

user@host> show isis authentication
Interface Level IIH Auth CSN Auth PSN Auth
at-2/3/0.0 1 Simple Simple Simple
 2 MD5 MD5 MD5

L1 LSP Authentication: Simple
L2 LSP Authentication: MD5

```

### show isis authentication (With Hitless Authentication Key Rollover Configured)

```

user@host> show isis authentication
Interface Level IIH Auth CSN Auth PSN Auth
so-0/1/3.0 2 hakrhello MD5 MD5

L2 LSP Authentication: MD5

```

## show isis database

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 166</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 166</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Syntax</b>                                     | <pre>show isis database &lt;system-id&gt; &lt;brief   detail   extensive&gt; &lt;instance <i>instance-name</i>&gt; &lt;level (1   2)&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show isis database &lt;system-id&gt; &lt;brief   detail   extensive&gt; &lt;level (1   2)&gt; &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Release Information</b>                        | Command introduced before Junos OS Release 7.4.<br>Command introduced in Junos OS Release 9.0 for EX Series switches.<br>Command introduced in Junos OS Release 12.1 for the QFX Series.<br>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.<br>Command introduced in Junos OS Release 15.1X53-D30 for the QFX10002 switch.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Description</b>                                | Display the entries in the Intermediate System-to-Intermediate System (IS-IS) link-state database, which contains data about PDU packets.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Options</b>                                    | <p><b>none</b>—Display standard information about IS-IS link-state database entries for all routing instances.</p> <p><b><i>system id</i></b>—(Optional) Display IS-IS link-state database entries for the specified intermediate system.</p> <p><b><i>brief   detail   extensive</i></b>—(Optional) Display the specified level of output.</p> <p><b><i>instance instance-name</i></b>—(Optional) Display IS-IS link-state database entries for the specified routing instance.</p> <p><b><i>level (1   2)</i></b>—(Optional) Display IS-IS link-state database entries for the specified IS-IS level.</p> <p><b><i>logical-system (all   logical-system-name)</i></b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"><li>• <a href="#">clear isis database on page 154</a></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>                      | <a href="#">show isis database on page 168</a><br><a href="#">show isis database brief on page 169</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

[show isis database detail on page 169](#)

[show isis database extensive on page 169](#)

**Output Fields** [Table 8 on page 167](#) describes the output fields for the **show isis database** command. Output fields are listed in the approximate order in which they appear. Fields that contain internal IS-IS information useful only in troubleshooting obscure problems are not described in the table. For more details about these fields, contact your customer support representative.

**Table 8: show isis database Output Fields**

| Field Name            | Field Description                                                                                                                                                                                                                                                                                                                                                                            | Level of Output         |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Interface name</b> | Name of the interface on which the link-state PDU has been received; always <b>IS-IS</b> for this command.                                                                                                                                                                                                                                                                                   | All levels              |
| level                 | Level of intermediate system: <ul style="list-style-type: none"> <li>• <b>1</b>—Intermediate system routes within an area; when the destination is outside an area, it routes toward a Level 2 system.</li> <li>• <b>2</b>—Intermediate system routes between areas and toward other ASs.</li> </ul>                                                                                         | All levels              |
| LSP ID                | Link-state PDU identifier.                                                                                                                                                                                                                                                                                                                                                                   | All levels              |
| Sequence              | Sequence number of the link-state PDU.                                                                                                                                                                                                                                                                                                                                                       | All levels              |
| Checksum              | Checksum value of the link-state PDU.                                                                                                                                                                                                                                                                                                                                                        | All levels              |
| Lifetime (secs)       | Remaining lifetime of the link-state PDU, in seconds.                                                                                                                                                                                                                                                                                                                                        | All levels              |
| Attributes            | Attributes of the specified database: <b>L1</b> , <b>L2</b> , <b>Overload</b> , or <b>Attached</b> (L1 only).                                                                                                                                                                                                                                                                                | none <b>brief</b>       |
| # LSPs                | Total number of link-state PDUs in the specified link-state database.                                                                                                                                                                                                                                                                                                                        | none <b>brief</b>       |
| IP prefix             | Prefix advertised by this link-state PDU.                                                                                                                                                                                                                                                                                                                                                    | <b>detail extensive</b> |
| IS neighbor           | IS-IS neighbor of the advertising system.                                                                                                                                                                                                                                                                                                                                                    | <b>detail extensive</b> |
| IP prefix             | IPv4 prefix advertised by this link-state PDU.                                                                                                                                                                                                                                                                                                                                               | <b>detail extensive</b> |
| V6 prefix             | IPv6 prefix advertised by this link-state PDU.                                                                                                                                                                                                                                                                                                                                               | <b>detail extensive</b> |
| Metric                | Metric of the prefix or neighbor.                                                                                                                                                                                                                                                                                                                                                            | <b>detail extensive</b> |
| Header                | <ul style="list-style-type: none"> <li>• <b>LSP ID</b>—Link state PDU identifier of the header.</li> <li>• <b>Length</b>—Header length.</li> <li>• <b>Allocated Length</b>—Amount of length available for the header.</li> <li>• <b>Router ID</b>—Address of the local routing device.</li> <li>• <b>Remaining Lifetime</b>—Remaining lifetime of the link-state PDU, in seconds.</li> </ul> | <b>extensive</b>        |

Table 8: show isis database Output Fields (*continued*)

| Field Name | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Level of Output |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Packet     | <ul style="list-style-type: none"> <li>• <b>LSP ID</b>—The identifier for the link-state PDU.</li> <li>• <b>Length</b>—Packet length.</li> <li>• <b>Lifetime</b>—Remaining lifetime, in seconds.</li> <li>• <b>Checksum</b>—The checksum of the link-state PDU.</li> <li>• <b>Sequence</b>—The sequence number of the link-state PDU. Every time the link-state PDU is updated, this number increments.</li> <li>• <b>Attributes</b>—Packet attributes.</li> <li>• <b>NLPID</b>—Network layer protocol identifier.</li> <li>• <b>Fixed length</b>—Specifies the set length for the packet.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | extensive       |
| TLVs       | <ul style="list-style-type: none"> <li>• <b>Area Address</b>—Area addresses that the routing device can reach.</li> <li>• <b>Speaks</b>—Supported routing protocols.</li> <li>• <b>IP router id</b>—ID of the routing device (usually the IP address).</li> <li>• <b>IP address</b>—IPv4 address.</li> <li>• <b>Hostname</b>—Assigned name of the routing device.</li> <li>• <b>IP prefix</b>—IP prefix of the routing device.</li> <li>• <b>Metric</b>—IS-IS metric that measures the cost of the adjacency between the originating routing device and the advertised routing device.</li> <li>• <b>IP extended prefix</b>—Extended IP prefix of the routing device.</li> <li>• <b>IS neighbor</b>—Directly attached neighbor's name and metric.</li> <li>• <b>IS extended neighbor</b>—Directly attached neighbor's name, metric, IP address, local interface index, and remote interface index.<br/>The interface indexes enable Junos OS to support unnumbered extensions for IS-IS, as described in RFC 4205.</li> <li>• <b>Router Capability</b>—ID of the routing device and flag.</li> </ul> <p><b>NOTE:</b> Router capability specifies SPRING capability and SPRING algorithm when segment routing is enabled on the routing device.</p> | extensive       |

## Sample Output

### show isis database

```

user@host> show isis database
IS-IS level 1 link-state database:
LSP ID Sequence Checksum Lifetime Attributes
kobuk.00-00 0x3 0x3167 1057 L1 L2
camaro.00-00 0x5 0x770e 1091 L1 L2
ranier.00-00 0x4 0xaa95 1091 L1 L2
glacier.00-00 0x4 0x206f 1089 L1 L2
glacier.02-00 0x1 0xd141 1089 L1 L2
badlands.00-00 0x3 0x87a2 1093 L1 L2
 6 LSPs

IS-IS level 2 link-state database:
LSP ID Sequence Checksum Lifetime Attributes
kobuk.00-00 0x6 0x8d6b 1096 L1 L2
camaro.00-00 0x9 0x877b 1101 L1 L2
ranier.00-00 0x8 0x855d 1103 L1 L2
glacier.00-00 0x7 0xf892 1098 L1 L2

```



|                |     |        |            |
|----------------|-----|--------|------------|
| glacier.02-00  | 0x1 | 0xd141 | 1089 L1 L2 |
| badlands.00-00 | 0x6 | 0x562  | 1105 L1 L2 |
| 6 LSPs         |     |        |            |

### show isis database brief

The output for the **show isis database brief** command is identical to that for the **show isis database** command. For sample output, see [show isis database on page 168](#).

### show isis database detail

```
user@host> show isis database logical-system CE3 sisira.00-00 detail
```

IS-IS level 1 link-state database:

```
sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 975 secs
 IS neighbor: hemantha-CE3.02 Metric: 10
 ES neighbor: 0015.0015.0015 Metric: 10 Down
 ES neighbor: 0025.0025.0025 Metric: 10 Down
 ES neighbor: 0030.0030.0030 Metric: 10 Down
 ES neighbor: 0040.0040.0040 Metric: 10 Down
 ES neighbor: sisira Metric: 0
 IP prefix: 1.0.0.0/24 Metric: 10 External Down
 IP prefix: 3.0.0.0/24 Metric: 10 External Down
 IP prefix: 4.0.0.0/24 Metric: 10 External Down
 IP prefix: 5.0.0.0/24 Metric: 10 Internal Up
 IP prefix: 15.15.15.15/32 Metric: 10 External Down
 IP prefix: 25.25.25.25/32 Metric: 10 External Down
 IP prefix: 30.30.30.30/32 Metric: 10 External Down
 IP prefix: 40.40.40.40/32 Metric: 10 External Down
 IP prefix: 60.60.60.60/32 Metric: 0 Internal Up
```

IS-IS level 2 link-state database:

```
sisira.00-00 Sequence: 0x13, Checksum: 0x69ac, Lifetime: 993 secs
 IS neighbor: hemantha-CE3.02 Metric: 10
 IP prefix: 1.0.0.0/24 Metric: 10 External Down
 IP prefix: 3.0.0.0/24 Metric: 10 External Down
 IP prefix: 4.0.0.0/24 Metric: 10 External Down
 IP prefix: 5.0.0.0/24 Metric: 10 Internal Up
 IP prefix: 15.15.15.15/32 Metric: 10 External Down
 IP prefix: 25.25.25.25/32 Metric: 10 External Down
 IP prefix: 30.30.30.30/32 Metric: 10 External Down
 IP prefix: 40.40.40.40/32 Metric: 10 External Down
 IP prefix: 50.50.50.50/32 Metric: 10 Internal Up
 IP prefix: 60.60.60.60/32 Metric: 0 Internal Up
 ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0015.0015.0015/152
 Metric: 10 External Down
 ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0025.0025.0025/152
 Metric: 10 External Down
 ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0030.0030.0030/152
 Metric: 10 External Down
 ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0040.0040.0040/152
 Metric: 10 External Down
 ISO prefix: 60.0006.80ff.f800.0000.0108.0001.0060.0060.0060/152
 Metric: 0 Internal Up
```

### show isis database extensive

```
user@host> show isis database extensive
```

## IS-IS level 1 link-state database:

```

sisira.00-00 Sequence: 0x11, Checksum: 0x10fc, Lifetime: 970 secs
 IS neighbor: hemantha-CE3.02 Metric: 10
 Two-way fragment: hemantha-CE3.02-00, Two-way first fragment:
hemantha-CE3.02-00
 ES neighbor: 0015.0015.0015 Metric: 10 Down
 ES neighbor: 0025.0025.0025 Metric: 10 Down
 ES neighbor: 0030.0030.0030 Metric: 10 Down
 ES neighbor: 0040.0040.0040 Metric: 10 Down
 ES neighbor: sisira Metric: 0
 IP prefix: 1.0.0.0/24 Metric: 10 External Down
 IP prefix: 3.0.0.0/24 Metric: 10 External Down
 IP prefix: 4.0.0.0/24 Metric: 10 External Down
 IP prefix: 5.0.0.0/24 Metric: 10 Internal Up
 IP prefix: 15.15.15.15/32 Metric: 10 External Down
 IP prefix: 25.25.25.25/32 Metric: 10 External Down
 IP prefix: 30.30.30.30/32 Metric: 10 External Down
 IP prefix: 40.40.40.40/32 Metric: 10 External Down
 IP prefix: 60.60.60.60/32 Metric: 0 Internal Up

```

```

Header: LSP ID: sisira.00-00, Length: 336 bytes
 Allocated length: 336 bytes, Router ID: 0.0.0.0
 Remaining lifetime: 970 secs, Level: 1, Interface: 333
 Estimated free bytes: 144, Actual free bytes: 0
 Aging timer expires in: 970 secs
 Protocols: IP, IPv6, CLNS

```

```

Packet: LSP ID: sisira.00-00, Length: 336 bytes, Lifetime : 1198 secs
 Checksum: 0x10fc, Sequence: 0x11, Attributes: 0xb L1 L2 Attached
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
 Packet type: 18, Packet version: 1, Max area: 0

```

## TLVs:

```

Area address: 60.0006.80ff.f800.0000.0108.0001 (13)
Speaks: IP
Speaks: IPV6
Speaks: CLNP
Hostname: sisira
ES neighbor TLV: Internal, Metric: default 0, Up
 ES: sisira
IS neighbor: hemantha-CE3.02, Internal, Metric: default 10
IS extended neighbor: hemantha-CE3.02, Metric: default 10
ES neighbor TLV: External, Metric: default 10, Down
 ES: 0040.0040.0040
ES neighbor TLV: External, Metric: default 10, Down
 ES: 0025.0025.0025
ES neighbor TLV: External, Metric: default 10, Down
 ES: 0015.0015.0015
ES neighbor TLV: External, Metric: default 10, Down
 ES: 0030.0030.0030
IP external prefix: 3.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 40.40.40.40/32, Internal, Metric: default 10, Down
IP external prefix: 4.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 25.25.25.25/32, Internal, Metric: default 10, Down
IP external prefix: 15.15.15.15/32, Internal, Metric: default 10, Down
IP external prefix: 1.0.0.0/24, Internal, Metric: default 10, Down
IP external prefix: 30.30.30.30/32, Internal, Metric: default 10, Down
IP extended prefix: 3.0.0.0/24 metric 10 down
IP extended prefix: 40.40.40.40/32 metric 10 down

```

```

IP extended prefix: 4.0.0.0/24 metric 10 down
IP extended prefix: 25.25.25.25/32 metric 10 down
IP extended prefix: 15.15.15.15/32 metric 10 down
IP extended prefix: 1.0.0.0/24 metric 10 down
IP extended prefix: 30.30.30.30/32 metric 10 down
IP prefix: 60.60.60.60/32, Internal, Metric: default 0, Up
IP prefix: 5.0.0.0/24, Internal, Metric: default 10, Up
IP extended prefix: 60.60.60.60/32 metric 0 up
IP extended prefix: 5.0.0.0/24 metric 10 up
No queued transmissions

```

#### IS-IS level 2 link-state database:

```

Router-A.00-00 Sequence: 0x5, Checksum: 0x3196, Lifetime: 1158 secs
IS neighbor: Router-B.02 Metric: 10
Two-way fragment: Router-B.02-00, Two-way first fragment: Router-B.02-00
IS neighbor: Router-E.02 Metric: 10
Two-way fragment: Router-E.02-00, Two-way first fragment: Router-E.02-00
IP prefix: 10.0.0.0/30 Metric: 10 Internal Up
IP prefix: 10.0.0.4/30 Metric: 10 Internal Up
IP prefix: 192.168.0.1/32 Metric: 0 Internal Up

```

```

Header: LSP ID: Router-A.00-00, Length: 208 bytes
Allocated length: 1492 bytes, Router ID: 192.168.0.1
Remaining lifetime: 1158 secs, Level: 2, Interface: 0
Estimated free bytes: 1233, Actual free bytes: 1284
Aging timer expires in: 1158 secs
Protocols: IP, IPv6

```

```

Packet: LSP ID: Router-A.00-00, Length: 208 bytes, Lifetime : 1198 secs
Checksum: 0x3196, Sequence: 0x5, Attributes: 0x3 <L1 L2>
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
Packet type: 20, Packet version: 1, Max area: 0

```

#### TLVs:

```

Area address: 49.0002 (3)
LSP Buffer Size: 1492
Speaks: IP
Speaks: IPV6
IP router id: 192.168.0.1
IP address: 192.168.0.1
Hostname: Router-A
IP prefix: 192.168.0.1/32, Internal, Metric: default 0, Up
IP prefix: 10.0.0.4/30, Internal, Metric: default 10, Up
IP prefix: 10.0.0.0/30, Internal, Metric: default 10, Up
IP extended prefix: 192.168.0.1/32 metric 0 up
IP extended prefix: 10.0.0.4/30 metric 10 up
IP extended prefix: 10.0.0.0/30 metric 10 up
IS neighbor: Router-E.02, Internal, Metric: default 10
IS neighbor: Router-B.02, Internal, Metric: default 10
IS extended neighbor: Router-E.02, Metric: default 10
IP address: 10.0.0.1
Local interface index: 101, Remote interface index: 0
IS extended neighbor: Router-B.02, Metric: default 10
IP address: 10.0.0.5
Local interface index: 102, Remote interface index: 0
No queued transmissions

```

```

Router-B.00-00 Sequence: 0x5, Checksum: 0xf8f, Lifetime: 1183 secs
IS neighbor: Router-B.02 Metric: 10
Two-way fragment: Router-B.02-00, Two-way first fragment: Router-B.02-00

```

```

IS neighbor: Router-C.02 Metric: 10
 Two-way fragment: Router-C.02-00, Two-way first fragment: Router-C.02-00
IP prefix: 10.0.0.4/30 Metric: 10 Internal Up
IP prefix: 10.0.0.8/30 Metric: 10 Internal Up
IP prefix: 192.168.0.2/32 Metric: 0 Internal Up

```

```

Header: LSP ID: Router-B.00-00, Length: 208 bytes
 Allocated length: 284 bytes, Router ID: 192.168.0.2
 Remaining lifetime: 1183 secs, Level: 2, Interface: 102
 Estimated free bytes: 114, Actual free bytes: 76
 Aging timer expires in: 1183 secs
 Protocols: IP, IPv6

```

```

Packet: LSP ID: Router-B.00-00, Length: 208 bytes, Lifetime : 1196 secs
 Checksum: 0xf8f, Sequence: 0x5, Attributes: 0x3 <L1 L2>
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
 Packet type: 20, Packet version: 1, Max area: 0

```

#### TLVs:

```

Area address: 49.0002 (3)
LSP Buffer Size: 1492
Speaks: IP
Speaks: IPV6
IP router id: 192.168.0.2
IP address: 192.168.0.2
Hostname: Router-B
IP prefix: 192.168.0.2/32, Internal, Metric: default 0, Up
IP prefix: 10.0.0.4/30, Internal, Metric: default 10, Up
IP prefix: 10.0.0.8/30, Internal, Metric: default 10, Up
IP extended prefix: 192.168.0.2/32 metric 0 up
IP extended prefix: 10.0.0.4/30 metric 10 up
IP extended prefix: 10.0.0.8/30 metric 10 up
IS neighbor: Router-B.02, Internal, Metric: default 10
IS neighbor: Router-C.02, Internal, Metric: default 10
IS extended neighbor: Router-B.02, Metric: default 10
 IP address: 10.0.0.6
 Local interface index: 108, Remote interface index: 0
IS extended neighbor: Router-C.02, Metric: default 10
 IP address: 10.0.0.9
 Local interface index: 109, Remote interface index: 0
No queued transmissions

```

```

Router-B.02-00 Sequence: 0x1, Checksum: 0x3c7c, Lifetime: 1156 secs
IS neighbor: Router-A.00 Metric: 0
 Two-way fragment: Router-A.00-00, Two-way first fragment: Router-A.00-00
IS neighbor: Router-B.00 Metric: 0
 Two-way fragment: Router-B.00-00, Two-way first fragment: Router-B.00-00

```

```

Header: LSP ID: Router-B.02-00, Length: 76 bytes
 Allocated length: 284 bytes, Router ID: 0.0.0.0
 Remaining lifetime: 1156 secs, Level: 2, Interface: 102
 Estimated free bytes: 208, Actual free bytes: 208
 Aging timer expires in: 1156 secs

```

```

Packet: LSP ID: Router-B.02-00, Length: 76 bytes, Lifetime : 1196 secs
 Checksum: 0x3c7c, Sequence: 0x1, Attributes: 0x3 <L1 L2>
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
 Packet type: 20, Packet version: 1, Max area: 0

```

#### TLVs:

```

IS neighbor: Router-B.00, Internal, Metric: default 0

```

```

IS neighbor: Router-A.00, Internal, Metric: default 0
IS extended neighbor: Router-B.00, Metric: default 0
IS extended neighbor: Router-A.00, Metric: default 0
No queued transmissions

```

```

Router-C.00-00 Sequence: 0x5, Checksum: 0x255b, Lifetime: 1182 secs
IS neighbor: Router-C.02 Metric: 10
Two-way fragment: Router-C.02-00, Two-way first fragment: Router-C.02-00
IS neighbor: Router-D.03 Metric: 10
Two-way fragment: Router-D.03-00, Two-way first fragment: Router-D.03-00
IP prefix: 10.0.0.8/30 Metric: 10 Internal Up
IP prefix: 10.0.0.12/30 Metric: 10 Internal Up
IP prefix: 192.168.0.3/32 Metric: 0 Internal Up

```

```

Header: LSP ID: Router-C.00-00, Length: 208 bytes
Allocated length: 284 bytes, Router ID: 192.168.0.3
Remaining lifetime: 1182 secs, Level: 2, Interface: 102
Estimated free bytes: 114, Actual free bytes: 76
Aging timer expires in: 1182 secs
Protocols: IP, IPv6

```

```

Packet: LSP ID: Router-C.00-00, Length: 208 bytes, Lifetime : 1196 secs
Checksum: 0x255b, Sequence: 0x5, Attributes: 0x3 <L1 L2>
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
Packet type: 20, Packet version: 1, Max area: 0

```

#### TLVs:

```

Area address: 49.0002 (3)
LSP Buffer Size: 1492
Speaks: IP
Speaks: IPV6
IP router id: 192.168.0.3
IP address: 192.168.0.3
Hostname: Router-C
IP prefix: 192.168.0.3/32, Internal, Metric: default 0, Up
IP prefix: 10.0.0.8/30, Internal, Metric: default 10, Up
IP prefix: 10.0.0.12/30, Internal, Metric: default 10, Up
IP extended prefix: 192.168.0.3/32 metric 0 up
IP extended prefix: 10.0.0.8/30 metric 10 up
IP extended prefix: 10.0.0.12/30 metric 10 up
IS neighbor: Router-C.02, Internal, Metric: default 10
IS neighbor: Router-D.03, Internal, Metric: default 10
IS extended neighbor: Router-C.02, Metric: default 10
IP address: 10.0.0.10
Local interface index: 105, Remote interface index: 0
IS extended neighbor: Router-D.03, Metric: default 10
IP address: 10.0.0.13
Local interface index: 106, Remote interface index: 0
No queued transmissions

```

```

Router-C.02-00 Sequence: 0x1, Checksum: 0xaa09, Lifetime: 1181 secs
IS neighbor: Router-B.00 Metric: 0
Two-way fragment: Router-B.00-00, Two-way first fragment: Router-B.00-00
IS neighbor: Router-C.00 Metric: 0
Two-way fragment: Router-C.00-00, Two-way first fragment: Router-C.00-00

```

```

Header: LSP ID: Router-C.02-00, Length: 76 bytes
Allocated length: 284 bytes, Router ID: 0.0.0.0
Remaining lifetime: 1181 secs, Level: 2, Interface: 102
Estimated free bytes: 208, Actual free bytes: 208
Aging timer expires in: 1181 secs

```

Packet: LSP ID: Router-C.02-00, Length: 76 bytes, Lifetime : 1194 secs  
Checksum: 0xaa09, Sequence: 0x1, Attributes: 0x3 <L1 L2>  
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
Packet type: 20, Packet version: 1, Max area: 0

## TLVs:

IS neighbor: Router-C.00, Internal, Metric: default 0  
IS neighbor: Router-B.00, Internal, Metric: default 0  
IS extended neighbor: Router-C.00, Metric: default 0  
IS extended neighbor: Router-B.00, Metric: default 0

No queued transmissions

Router-D.00-00 Sequence: 0x4, Checksum: 0x8ab7, Lifetime: 1180 secs  
IS neighbor: Router-D.02 Metric: 10  
Two-way fragment: Router-D.02-00, Two-way first fragment: Router-D.02-00  
IS neighbor: Router-D.03 Metric: 10  
Two-way fragment: Router-D.03-00, Two-way first fragment: Router-D.03-00  
IP prefix: 10.0.0.12/30 Metric: 10 Internal Up  
IP prefix: 10.0.0.20/30 Metric: 10 Internal Up  
IP prefix: 192.168.0.4/32 Metric: 0 Internal Up

## Header: LSP ID: Router-D.00-00, Length: 208 bytes

Allocated length: 284 bytes, Router ID: 192.168.0.4  
Remaining lifetime: 1180 secs, Level: 2, Interface: 102  
Estimated free bytes: 114, Actual free bytes: 76  
Aging timer expires in: 1180 secs  
Protocols: IP, IPv6

Packet: LSP ID: Router-D.00-00, Length: 208 bytes, Lifetime : 1192 secs  
Checksum: 0x8ab7, Sequence: 0x4, Attributes: 0x3 <L1 L2>  
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
Packet type: 20, Packet version: 1, Max area: 0

## TLVs:

Area address: 49.0002 (3)  
LSP Buffer Size: 1492  
Speaks: IP  
Speaks: IPV6  
IP router id: 192.168.0.4  
IP address: 192.168.0.4  
Hostname: Router-D  
IP prefix: 192.168.0.4/32, Internal, Metric: default 0, Up  
IP prefix: 10.0.0.12/30, Internal, Metric: default 10, Up  
IP prefix: 10.0.0.20/30, Internal, Metric: default 10, Up  
IP extended prefix: 192.168.0.4/32 metric 0 up  
IP extended prefix: 10.0.0.12/30 metric 10 up  
IP extended prefix: 10.0.0.20/30 metric 10 up  
IS neighbor: Router-D.02, Internal, Metric: default 10  
IS neighbor: Router-D.03, Internal, Metric: default 10  
IS extended neighbor: Router-D.02, Metric: default 10  
IP address: 10.0.0.22  
Local interface index: 115, Remote interface index: 0  
IS extended neighbor: Router-D.03, Metric: default 10  
IP address: 10.0.0.14  
Local interface index: 114, Remote interface index: 0  
No queued transmissions

Router-D.02-00 Sequence: 0x1, Checksum: 0xebbc, Lifetime: 1128 secs  
IS neighbor: Router-D.00 Metric: 0  
Two-way fragment: Router-D.00-00, Two-way first fragment: Router-D.00-00

IS neighbor: Router-F.00 Metric: 0  
Two-way fragment: Router-F.00-00, Two-way first fragment: Router-F.00-00

Header: LSP ID: Router-D.02-00, Length: 76 bytes  
Allocated length: 284 bytes, Router ID: 0.0.0.0  
Remaining lifetime: 1128 secs, Level: 2, Interface: 101  
Estimated free bytes: 208, Actual free bytes: 208  
Aging timer expires in: 1128 secs

Packet: LSP ID: Router-D.02-00, Length: 76 bytes, Lifetime : 1160 secs  
Checksum: 0xebbc, Sequence: 0x1, Attributes: 0x3 <L1 L2>  
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
Packet type: 20, Packet version: 1, Max area: 0

TLVs:

IS neighbor: Router-D.00, Internal, Metric: default 0  
IS neighbor: Router-F.00, Internal, Metric: default 0  
IS extended neighbor: Router-D.00, Metric: default 0  
IS extended neighbor: Router-F.00, Metric: default 0

No queued transmissions

Router-D.03-00 Sequence: 0x1, Checksum: 0x129b, Lifetime: 1180 secs  
IS neighbor: Router-C.00 Metric: 0  
Two-way fragment: Router-C.00-00, Two-way first fragment: Router-C.00-00  
IS neighbor: Router-D.00 Metric: 0  
Two-way fragment: Router-D.00-00, Two-way first fragment: Router-D.00-00

Header: LSP ID: Router-D.03-00, Length: 76 bytes  
Allocated length: 284 bytes, Router ID: 0.0.0.0  
Remaining lifetime: 1180 secs, Level: 2, Interface: 101  
Estimated free bytes: 208, Actual free bytes: 208  
Aging timer expires in: 1180 secs

Packet: LSP ID: Router-D.03-00, Length: 76 bytes, Lifetime : 1192 secs  
Checksum: 0x129b, Sequence: 0x1, Attributes: 0x3 <L1 L2>  
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
Packet type: 20, Packet version: 1, Max area: 0

TLVs:

IS neighbor: Router-D.00, Internal, Metric: default 0  
IS neighbor: Router-C.00, Internal, Metric: default 0  
IS extended neighbor: Router-D.00, Metric: default 0  
IS extended neighbor: Router-C.00, Metric: default 0

No queued transmissions

Router-E.00-00 Sequence: 0x4, Checksum: 0x9da9, Lifetime: 1155 secs  
IS neighbor: Router-E.02 Metric: 10  
Two-way fragment: Router-E.02-00, Two-way first fragment: Router-E.02-00  
IS neighbor: Router-F.02 Metric: 20  
Two-way fragment: Router-F.02-00, Two-way first fragment: Router-F.02-00  
IP prefix: 10.0.0.0/30 Metric: 10 Internal Up  
IP prefix: 10.0.0.16/30 Metric: 20 Internal Up  
IP prefix: 192.168.0.5/32 Metric: 0 Internal Up

Header: LSP ID: Router-E.00-00, Length: 208 bytes  
Allocated length: 284 bytes, Router ID: 192.168.0.5  
Remaining lifetime: 1155 secs, Level: 2, Interface: 101  
Estimated free bytes: 114, Actual free bytes: 76  
Aging timer expires in: 1155 secs  
Protocols: IP, IPv6

Packet: LSP ID: Router-E.00-00, Length: 208 bytes, Lifetime : 1185 secs  
Checksum: 0x9da9, Sequence: 0x4, Attributes: 0x3 <L1 L2>  
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
Packet type: 20, Packet version: 1, Max area: 0

## TLVs:

Area address: 49.0002 (3)  
LSP Buffer Size: 1492  
Speaks: IP  
Speaks: IPV6  
IP router id: 192.168.0.5  
IP address: 192.168.0.5  
Hostname: Router-E  
IP prefix: 192.168.0.5/32, Internal, Metric: default 0, Up  
IP prefix: 10.0.0.16/30, Internal, Metric: default 20, Up  
IP prefix: 10.0.0.0/30, Internal, Metric: default 10, Up  
IP extended prefix: 192.168.0.5/32 metric 0 up  
IP extended prefix: 10.0.0.16/30 metric 20 up  
IP extended prefix: 10.0.0.0/30 metric 10 up  
IS neighbor: Router-E.02, Internal, Metric: default 10  
IS neighbor: Router-F.02, Internal, Metric: default 20  
IS extended neighbor: Router-E.02, Metric: default 10  
IP address: 10.0.0.2  
Local interface index: 112, Remote interface index: 0  
IS extended neighbor: Router-F.02, Metric: default 20  
IP address: 10.0.0.17  
Local interface index: 111, Remote interface index: 0  
No queued transmissions

Router-E.02-00 Sequence: 0x1, Checksum: 0xb4fa, Lifetime: 1130 secs  
IS neighbor: Router-A.00 Metric: 0  
Two-way fragment: Router-A.00-00, Two-way first fragment: Router-A.00-00  
IS neighbor: Router-E.00 Metric: 0  
Two-way fragment: Router-E.00-00, Two-way first fragment: Router-E.00-00

Header: LSP ID: Router-E.02-00, Length: 76 bytes  
Allocated length: 284 bytes, Router ID: 0.0.0.0  
Remaining lifetime: 1130 secs, Level: 2, Interface: 101  
Estimated free bytes: 208, Actual free bytes: 208  
Aging timer expires in: 1130 secs

Packet: LSP ID: Router-E.02-00, Length: 76 bytes, Lifetime : 1161 secs  
Checksum: 0xb4fa, Sequence: 0x1, Attributes: 0x3 <L1 L2>  
NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
Packet type: 20, Packet version: 1, Max area: 0

## TLVs:

IS neighbor: Router-E.00, Internal, Metric: default 0  
IS neighbor: Router-A.00, Internal, Metric: default 0  
IS extended neighbor: Router-E.00, Metric: default 0  
IS extended neighbor: Router-A.00, Metric: default 0  
No queued transmissions

Router-F.00-00 Sequence: 0x5, Checksum: 0x94bd, Lifetime: 1153 secs  
IS neighbor: Router-D.02 Metric: 10  
Two-way fragment: Router-D.02-00, Two-way first fragment: Router-D.02-00  
IS neighbor: Router-F.02 Metric: 10  
Two-way fragment: Router-F.02-00, Two-way first fragment: Router-F.02-00  
IP prefix: 10.0.0.16/30 Metric: 10 Internal Up  
IP prefix: 10.0.0.20/30 Metric: 10 Internal Up  
IP prefix: 192.168.0.6/32 Metric: 0 Internal Up



Header: LSP ID: Router-F.00-00, Length: 208 bytes  
 Allocated length: 284 bytes, Router ID: 192.168.0.6  
 Remaining lifetime: 1153 secs, Level: 2, Interface: 101  
 Estimated free bytes: 76, Actual free bytes: 76  
 Aging timer expires in: 1153 secs  
 Protocols: IP, IPv6

Packet: LSP ID: Router-F.00-00, Length: 208 bytes, Lifetime : 1183 secs  
 Checksum: 0x94bd, Sequence: 0x5, Attributes: 0x3 <L1 L2>  
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
 Packet type: 20, Packet version: 1, Max area: 0

#### TLVs:

Area address: 49.0002 (3)  
 LSP Buffer Size: 1492  
 Speaks: IP  
 Speaks: IPV6  
 IP router id: 192.168.0.6  
 IP address: 192.168.0.6  
 Hostname: Router-F  
 IP prefix: 192.168.0.6/32, Internal, Metric: default 0, Up  
 IP prefix: 10.0.0.16/30, Internal, Metric: default 10, Up  
 IP prefix: 10.0.0.20/30, Internal, Metric: default 10, Up  
 IP extended prefix: 192.168.0.6/32 metric 0 up  
 IP extended prefix: 10.0.0.16/30 metric 10 up  
 IP extended prefix: 10.0.0.20/30 metric 10 up  
 IS neighbor: Router-D.02, Internal, Metric: default 10  
 IS neighbor: Router-F.02, Internal, Metric: default 10  
 IS extended neighbor: Router-D.02, Metric: default 10  
 IP address: 10.0.0.21  
 Local interface index: 94, Remote interface index: 0  
 IS extended neighbor: Router-F.02, Metric: default 10  
 IP address: 10.0.0.18  
 Local interface index: 93, Remote interface index: 0  
 No queued transmissions

Router-E.02-00 Sequence: 0x1, Checksum: 0xb4fa, Lifetime: 1130 secs  
 IS neighbor: Router-A.00 Metric: 0  
 Two-way fragment: Router-A.00-00, Two-way first fragment: Router-A.00-00  
 IS neighbor: Router-E.00 Metric: 0  
 Two-way fragment: Router-E.00-00, Two-way first fragment: Router-E.00-00

Header: LSP ID: Router-E.02-00, Length: 76 bytes  
 Allocated length: 284 bytes, Router ID: 0.0.0.0  
 Remaining lifetime: 1130 secs, Level: 2, Interface: 101  
 Estimated free bytes: 208, Actual free bytes: 208  
 Aging timer expires in: 1130 secs

Packet: LSP ID: Router-E.02-00, Length: 76 bytes, Lifetime : 1161 secs  
 Checksum: 0xb4fa, Sequence: 0x1, Attributes: 0x3 <L1 L2>  
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes  
 Packet type: 20, Packet version: 1, Max area: 0

#### TLVs:

IS neighbor: Router-E.00, Internal, Metric: default 0  
 IS neighbor: Router-A.00, Internal, Metric: default 0  
 IS extended neighbor: Router-E.00, Metric: default 0  
 IS extended neighbor: Router-A.00, Metric: default 0  
 No queued transmissions

```

Router-F.00-00 Sequence: 0x5, Checksum: 0x94bd, Lifetime: 1153 secs
 IS neighbor: Router-D.02 Metric: 10
 Two-way fragment: Router-D.02-00, Two-way first fragment: Router-D.02-00
 IS neighbor: Router-F.02 Metric: 10
 Two-way fragment: Router-F.02-00, Two-way first fragment: Router-F.02-00
 IP prefix: 10.0.0.16/30 Metric: 10 Internal Up
 IP prefix: 10.0.0.20/30 Metric: 10 Internal Up
 IP prefix: 192.168.0.6/32 Metric: 0 Internal Up

```

```

Header: LSP ID: Router-F.00-00, Length: 208 bytes
 Allocated length: 284 bytes, Router ID: 192.168.0.6
 Remaining lifetime: 1153 secs, Level: 2, Interface: 101
 Estimated free bytes: 76, Actual free bytes: 76
 Aging timer expires in: 1153 secs
 Protocols: IP, IPv6

```

```

Packet: LSP ID: Router-F.00-00, Length: 208 bytes, Lifetime : 1183 secs
 Checksum: 0x94bd, Sequence: 0x5, Attributes: 0x3 <L1 L2>
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
 Packet type: 20, Packet version: 1, Max area: 0

```

#### TLVs:

```

 Area address: 49.0002 (3)
 LSP Buffer Size: 1492
 Speaks: IP
 Speaks: IPV6
 IP router id: 192.168.0.6
 IP address: 192.168.0.6
 Hostname: Router-F
 IP prefix: 192.168.0.6/32, Internal, Metric: default 0, Up
 IP prefix: 10.0.0.16/30, Internal, Metric: default 10, Up
 IP prefix: 10.0.0.20/30, Internal, Metric: default 10, Up
 IP extended prefix: 192.168.0.6/32 metric 0 up
 IP extended prefix: 10.0.0.16/30 metric 10 up
 IP extended prefix: 10.0.0.20/30 metric 10 up
 IS neighbor: Router-D.02, Internal, Metric: default 10
 IS neighbor: Router-F.02, Internal, Metric: default 10
 IS extended neighbor: Router-D.02, Metric: default 10
 IP address: 10.0.0.21
 Local interface index: 94, Remote interface index: 0
 IS extended neighbor: Router-F.02, Metric: default 10
 IP address: 10.0.0.18
 Local interface index: 93, Remote interface index: 0
 No queued transmissions

```

```

Router-F.02-00 Sequence: 0x1, Checksum: 0xf5ae, Lifetime: 1153 secs
 IS neighbor: Router-E.00 Metric: 0
 Two-way fragment: Router-E.00-00, Two-way first fragment: Router-E.00-00
 IS neighbor: Router-F.00 Metric: 0
 Two-way fragment: Router-F.00-00, Two-way first fragment: Router-F.00-00

```

```

Header: LSP ID: Router-F.02-00, Length: 76 bytes
 Allocated length: 284 bytes, Router ID: 0.0.0.0
 Remaining lifetime: 1153 secs, Level: 2, Interface: 101
 Estimated free bytes: 208, Actual free bytes: 208
 Aging timer expires in: 1153 secs

```

```

Packet: LSP ID: Router-F.02-00, Length: 76 bytes, Lifetime : 1183 secs
 Checksum: 0xf5ae, Sequence: 0x1, Attributes: 0x3 <L1 L2>
 NLPID: 0x83, Fixed length: 27 bytes, Version: 1, Sysid length: 0 bytes
 Packet type: 20, Packet version: 1, Max area: 0

```

## TLVs:

IS neighbor: Router-F.00, Internal, Metric: default 0

IS neighbor: Router-E.00, Internal, Metric: default 0

IS extended neighbor: Router-F.00, Metric: default 0

IS extended neighbor: Router-E.00, Metric: default 0

No queued transmissions

## show isis hostname

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 180</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 180</a>                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Syntax</b>                                     | <pre>show isis hostname &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Syntax (EX Series Switches and QFX Series)</b> | show isis hostname                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Release Information</b>                        | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                      |
| <b>Description</b>                                | <p>Display IS-IS hostname database information.</p> <p>This command displays the system ID-to-name cache. The output shows if the mapping has been learned by receipt of a Hostname TLV #137 (type dynamic) configured in Junos OS with the <b>set system host-name</b> command, or a static mapping defined in Junos OS with the <b>set system static-host-mapping hostname sysid</b> command (type static). The local router always has its type set to static even if <b>static-host-mapping</b> is not configured.</p> |
| <b>Options</b>                                    | <p><b>none</b>—Display IS-IS hostname database information.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p>                                                                                                                                                                                                                                                                                                |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>List of Sample Output</b>                      | <a href="#">show isis hostname on page 181</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Output Fields</b>                              | <p><a href="#">Table 9 on page 180</a> describes the output fields for the <b>show isis hostname</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                  |

**Table 9: show isis hostname Output Fields**

| Field Name       | Field Description                                                                                                                                                                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>System Id</b> | System identifier mapped to the hostname.                                                                                                                                                                                                                                                               |
| <b>Hostname</b>  | Hostname mapped to the system identifier.                                                                                                                                                                                                                                                               |
| <b>Type</b>      | <p>Type of mapping between system identifier and hostname.</p> <ul style="list-style-type: none"> <li><b>Dynamic</b>—Hostname mapping determined as described in RFC 2763, <i>Dynamic Hostname Exchange Mechanism for IS-IS</i>.</li> <li><b>Static</b>—Hostname mapping configured by user.</li> </ul> |

## Sample Output

show isis hostname

```
user@host> show isis hostname
IS-IS hostname database:
System Id Hostname
1921.6800.4201 isis1
1921.6800.4202 isis2
1921.6800.4203 isis3
```

|                      | Type    |
|----------------------|---------|
| 1921.6800.4201 isis1 | Dynamic |
| 1921.6800.4202 isis2 | Static  |
| 1921.6800.4203 isis3 | Dynamic |

## show isis interface

**List of Syntax** [Syntax on page 182](#)  
[Syntax \(EX Series Switches and QFX Series\) on page 182](#)

**Syntax** show isis interface  
 <brief | detail | extensive>  
 <interface-name>  
 <logical-system (all | *logical-system-name*)>

**Syntax (EX Series Switches and QFX Series)** show isis interface  
 <brief | detail | extensive>  
 <interface-name>

**Release Information** Command introduced before Junos OS Release 7.4.  
 Command introduced in Junos OS Release 9.0 for EX Series switches.  
 Command introduced in Junos OS Release 12.1 for the QFX Series.

**Description** Display status information about Intermediate System-to-Intermediate System (IS-IS)-enabled interfaces.



**NOTE:** If the configured metric for an IS-IS level is above 63, and the **wide-metrics-only** statement is not configured, the **show isis interface detail** command and the **show isis interface extensive** command display 63 as the metric value for that level. Configure the **wide-metrics-only** statement to generate metric values greater than 63 on a per IS-IS level basis.

The **show isis interface** command displays the configured metric value for an IS-IS level irrespective of whether is configured or not.

**Options** **none**—Display standard information about all IS-IS-enabled interfaces.

**brief | detail | extensive**—(Optional) Display the specified level of output.

**interface-name**—(Optional) Display information about the specified interface only.

**logical-system (all | *logical-system-name*)**—(Optional) Perform this operation on all logical systems or on a particular logical system.

**Required Privilege Level** view

**Related Documentation**

- [Understanding Wide IS-IS Metrics for Traffic Engineering](#)
- [Example: Enabling Wide IS-IS Metrics for Traffic Engineering](#)

**List of Sample Output** [show isis interface on page 185](#)  
[show isis interface brief on page 185](#)

[show isis interface detail on page 185](#)

[show isis interface extensive on page 185](#)

**Output Fields** [Table 10 on page 183](#) describes the output fields for the **show isis interface** command. Output fields are listed in the approximate order in which they appear.

**Table 10: show isis interface Output Fields**

| Field Name               | Field Description                                                                                                                                                                                                                                                                                                                                                        | Level of Output         |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <i>interface-name</i>    | Name of the interface.                                                                                                                                                                                                                                                                                                                                                   | <b>detail</b>           |
| <b>Designated router</b> | Routing device selected by other routers that is responsible for sending link-state advertisements that describe the network. Used only on broadcast networks.                                                                                                                                                                                                           | <b>detail</b>           |
| <b>Index</b>             | Interface index assigned by the Junos OS kernel.                                                                                                                                                                                                                                                                                                                         | <b>detail</b>           |
| <b>State</b>             | Internal implementation information.                                                                                                                                                                                                                                                                                                                                     | <b>detail</b>           |
| <b>Circuit id</b>        | Circuit identifier.<br><br><b>NOTE:</b> Each IS-IS interface is assigned a circuit ID value to identify the interface within the linkstate database. All interfaces (loopback, broadcast, and so on) and all point-to-point links share the locally significant value of 0x01, and this value is not incremented.                                                        | <b>detail</b>           |
| <b>Circuit type</b>      | Circuit type: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul>                                                                                                                                                                                                                              | <b>detail</b>           |
| <b>LSP interval</b>      | Interval between link-state PDUs sent from the interface.                                                                                                                                                                                                                                                                                                                | <b>detail</b>           |
| <b>CSNP interval</b>     | Interval between complete sequence number PDUs sent from the interface.                                                                                                                                                                                                                                                                                                  | <b>detail extensive</b> |
| <b>Sysid</b>             | System identifier.                                                                                                                                                                                                                                                                                                                                                       | <b>detail</b>           |
| <b>Interface</b>         | Interface through which the adjacency is made.                                                                                                                                                                                                                                                                                                                           | <b>none brief</b>       |
| <b>L or Level</b>        | Level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul><br><b>NOTE:</b> The default IS-IS level on loopback interfaces are always same as the IS-IS level configured on other IS-IS interfaces in a router. You can also configure IS-IS level on loopback interfaces per your requirement. | All levels              |
| <b>CirID</b>             | Circuit identifier.                                                                                                                                                                                                                                                                                                                                                      | <b>none brief</b>       |
| <b>Level 1 DR</b>        | Level 1 designated intermediate system.                                                                                                                                                                                                                                                                                                                                  | <b>none brief</b>       |

Table 10: show isis interface Output Fields (*continued*)

| Field Name                                | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Level of Output         |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| <b>Level 2 DR</b>                         | Level 2 designated intermediate system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | none <b>brief</b>       |
| <b>L1/L2 Metric</b>                       | Interface's metric for Level 1 and Level 2. If there is no information, the metric is 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | none <b>brief</b>       |
| <b>Flood-group Area-ID</b>                | Flood-group is configured on a specific IS-IS interface<br><br><b>NOTE:</b> Seen only when Flood-group is configured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>detail extensive</b> |
| <b>Adjacency advertisement: Advertise</b> | This routing device has signaled to advertise this interface to its neighbors in their label-switched paths (LSPs).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>detail extensive</b> |
| <b>Adjacency advertisement: Suppress</b>  | This neighbor has signaled not to advertise this interface in the routing device's outbound LSPs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>detail extensive</b> |
| <b>Adjacencies</b>                        | Number of adjacencies established on this interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>detail</b>           |
| <b>Priority</b>                           | Priority value for this interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>detail</b>           |
| <b>Metric</b>                             | Metric value for this interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>detail</b>           |
| <b>Hello(s) / Hello Interval</b>          | Interface's hello interval.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>detail extensive</b> |
| <b>Hold(s) / Hold Time</b>                | Interface's hold time.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>detail extensive</b> |
| <b>Designated Router</b>                  | Router responsible for sending network link-state advertisements, which describe all the routing devices attached to the network.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>detail</b>           |
| <b>Hello padding</b>                      | Type of hello padding: <ul style="list-style-type: none"> <li>• <b>Adaptive</b>—On point-to-point connections, the hello packets are padded from the initial detection of a new neighbor until the neighbor verifies the adjacency as Up in the adjacency state TLV. If the neighbor does not support the adjacency state TLV, then padding continues. On LAN connections, padding starts from the initial detection of a new neighbor until there is at least one active adjacency on the interface.</li> <li>• <b>Loose</b>—(Default) The hello packet is padded from the initial detection of a new neighbor until the adjacency transitions to the Up state.</li> <li>• <b>Strict</b>—Padding is performed on all interface types and for all adjacency states, and is continuous.</li> </ul> | <b>extensive</b>        |
| <b>LDP sync state</b>                     | Current LDP synchronization state: <b>in sync</b> , <b>in holddown</b> , or <b>not supported</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>extensive</b>        |
| <b>reason</b>                             | Reason for being in the LDP sync state.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>extensive</b>        |
| <b>config holdtime</b>                    | Configured value of the hold timer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>extensive</b>        |



Table 10: show isis interface Output Fields (*continued*)

| Field Name       | Field Description                                                                                                           | Level of Output  |
|------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>remaining</b> | If the state is not in sync and the hold time is not infinity, then this field displays the remaining hold time in seconds. | <b>extensive</b> |

## Sample Output

### show isis interface

```
user@host> show isis interface
IS-IS interface database:
Interface L CirID Level 1 DR Level 2 DR L1/L2 Metric
at-2/3/0.0 3 0x1 Point to Point Point to Point 10/10
lo0.0 3 0x1 Passive Passive 0/0
```

### show isis interface brief

The output for the **show isis interface brief** command is identical to that for the **show isis interface** command. For sample output, see [show isis interface on page 185](#).

### show isis interface detail

```
user@host> show isis interface detail
IS-IS interface database:
at-2/3/0.0
 Index: 66, State: 0x6, Circuit id: 0x1, Circuit type: 3
 LSP interval: 100 ms, CSNP interval: 5 s
 Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
 1 1 64 10 9.000 27
 2 1 64 10 9.000 27
lo0.0
 Index: 64, State: 0x6, Circuit id: 0x1, Circuit type: 0
 LSP interval: 100 ms, CSNP interval: disabled
 Adjacency advertisement: Advertise
 Protection Type: Node Link, No eligible Backup
 Level Adjacencies Priority Metric Hello (s) Hold (s) Designated Router
 1 0 64 0 Passive
 2 0 64 0 Passive
```

### show isis interface extensive

```
user@host> show isis interface extensive
IS-IS interface database:
xe-6/1/0.0
 Index: 75, State: 0x6, Circuit id: 0x1, Circuit type: 2
 LSP interval: 100 ms, CSNP interval: 10 s, Loose Hello padding
 Adjacency advertisement: Advertise

 Flood-group Area-ID: 49.0001
 Level 1
 Adjacencies: 0, Priority: 64, Metric: 10
 Disabled
 Level 2
 Adjacencies: 1, Priority: 64, Metric: 10
 Hello Interval: 20.000 s, Hold Time: 60 s
 Designated Router: nemean.03
```



## show isis overview

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Syntax</b>                                     | <pre>show isis overview &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                                                       |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show isis overview &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                                                 |
| <b>Release Information</b>                        | <p>Command introduced in Junos OS Release 8.5.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                   |
| <b>Description</b>                                | Display IS-IS overview information.                                                                                                                                                                                                                                                                                                                                                 |
| <b>Options</b>                                    | <p><b>none</b>—Display standard overview information about IS-IS for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display overview information for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                |
| <b>List of Sample Output</b>                      | <a href="#">show isis overview on page 189</a>                                                                                                                                                                                                                                                                                                                                      |
| <b>Output Fields</b>                              | <a href="#">Table 11 on page 187</a> lists the output fields for the <b>show isis overview</b> command. Output fields are listed in the approximate order in which they appear.                                                                                                                                                                                                     |

Table 11: show isis overview Output Fields

| Field Name         | Field Description                                                  |
|--------------------|--------------------------------------------------------------------|
| Hostname           | Name of the router.                                                |
| Sysid              | Part of the ISO address of the routing device.                     |
| Areaid             | The area number of the routing device.                             |
| Instance           | IS-IS routing instance.                                            |
| Router ID          | Router ID of the routing device.                                   |
| Adjacency holddown | Adjacency holddown capability: <b>enabled</b> or <b>disabled</b> . |
| Maximum Areas      | Maximum number of IS-IS areas advertised by the routing device.    |
| LSP life time      | Lifetime of the link-state PDU, in seconds.                        |

Table 11: show isis overview Output Fields (*continued*)

| Field Name                             | Field Description                                                                                                                                                                            |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Filter low life time LSPs up to</b> | LSPs with a lifetime lower than this value are filtered out.                                                                                                                                 |
| <b>Attached bit evaluation</b>         | Attached bit capability: <b>enabled</b> or <b>disabled</b> .                                                                                                                                 |
| <b>SPF delay</b>                       | Delay before performing consecutive shortest-path-first (SPF) calculations.                                                                                                                  |
| <b>SPF holddown</b>                    | Delay before performing additional SPF calculations after the maximum number of consecutive SPF calculations is reached.                                                                     |
| <b>SPF rapid runs</b>                  | Maximum number of SPF calculations that can be performed in succession before the holddown timer begins.                                                                                     |
| <b>Overload bit at startup is set</b>  | Overload bit capability is enabled.                                                                                                                                                          |
| <b>Overload high metrics</b>           | Overload high metrics capability: <b>enabled</b> or <b>disabled</b> .                                                                                                                        |
| <b>Overload timeout</b>                | Time period after which overload is reset and the time that remains before the timer is set to expire.                                                                                       |
| <b>Traffic engineering</b>             | Traffic engineering capability: <b>enabled</b> or <b>disabled</b> .                                                                                                                          |
| <b>Restart</b>                         | Graceful restart capability: <b>enabled</b> or <b>disabled</b> .                                                                                                                             |
| <b>Restart duration</b>                | Time period for complete reacquisition of IS-IS neighbors.                                                                                                                                   |
| <b>Helper mode</b>                     | Graceful restart helper capability: <b>enabled</b> or <b>disabled</b> .                                                                                                                      |
| <b>Level</b>                           | IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 information</li> <li>• 2—Level 2 information</li> </ul>                                                                      |
| <b>IPv4 is enabled</b>                 | IP Protocol version 4 capability is enabled.                                                                                                                                                 |
| <b>IPv6 is enabled</b>                 | IP Protocol version 6 capability is enabled.                                                                                                                                                 |
| <b>Micro-loop avoidance</b>            | Micro-loop avoidance is enabled. Generally adjacent nodes converge faster than neighboring nodes causing traffic to loop. A route convergence delay is configured to avoid such micro loops. |
| <b>Internal route preference</b>       | Preference value of internal routes.                                                                                                                                                         |
| <b>External route preference</b>       | Preference value of external routes.                                                                                                                                                         |
| <b>Prefix export limit</b>             | Number of prefixes allowed to be exported, as configured by the <a href="#">prefix-export-limit</a> statement.                                                                               |

Table 11: show isis overview Output Fields (*continued*)

| Field Name                    | Field Description                                                               |
|-------------------------------|---------------------------------------------------------------------------------|
| Prefix export count           | Number of prefixes exported.                                                    |
| Wide area metrics are enabled | Wide area metrics capability is enabled.                                        |
| Narrow metrics are enabled    | Narrow metrics capability is enabled.                                           |
| Adjacency holddown is active  | IS-IS adjacencies come up one after another when adjacency holddown is enabled. |

## Sample Output

### show isis overview

```

user@host> show isis overview
Instance: master
Router ID: 10.255.107.183
Hostname: pro-bng3-a
Sysid: 0192.0168.0001
Areaid: 49.0002
Adjacency holddown: enabled
Maximum Areas: 3
LSP life time: 1200
Filter low life time LSPs up to: 300
Attached bit evaluation: enabled
SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
IPv4 is enabled, IPv6 is enabled
Micro-loop avoidance: Enabled
 Method: Route Convergence Delay, Route convergence delay: 5000 msec
Traffic engineering: enabled
Restart: Disabled
 Helper mode: Enabled
Level 1
 Internal route preference: 15
 External route preference: 160
 Wide metrics are enabled, Narrow metrics are enabled
 Adjacency holddown is active
Level 2
 Internal route preference: 18
 External route preference: 165
 Prefix export limit: 5, Prefix export count: 5
 Wide metrics are enabled
 Adjacency holddown is active

```

```

user@host> show isis overview logical-system R2
Instance: master
Router ID: 192.168.0.2
Hostname: pro-bng3-a-R2
Sysid: 0192.0168.0002
Areaid: 49.0002
Adjacency holddown: enabled
Maximum Areas: 3
LSP life time: 1200

```

```
Attached bit evaluation: enabled
SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
IPv4 is enabled, IPv6 is enabled
Traffic engineering: enabled
Restart: Disabled
 Helper mode: Enabled
Level 1
 Internal route preference: 15
 External route preference: 160
 Prefix export count: 0
 Wide metrics are enabled, Narrow metrics are enabled
Level 2
 Internal route preference: 18
 External route preference: 165
 Prefix export count: 0
 Wide metrics are enabled, Narrow metrics are enabled

user@host> show isis overview logical-system R3
Instance: master
 Router ID: 192.168.0.3
 Hostname: pro-bng3-a-R3
 Sysid: 0192.0168.0003
 Areaid: 49.0002
 Adjacency holddown: enabled
 Maximum Areas: 3
 LSP life time: 1200
 Attached bit evaluation: enabled
 SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
 IPv4 is enabled, IPv6 is enabled
 Traffic engineering: enabled
 Restart: Disabled
 Helper mode: Enabled
 Level 1
 Internal route preference: 15
 External route preference: 160
 Prefix export count: 0
 Wide metrics are enabled, Narrow metrics are enabled
 Level 2
 Internal route preference: 18
 External route preference: 165
 Prefix export count: 0
 Wide metrics are enabled, Narrow metrics are enabled
```

## show isis route

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 191</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 191</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Syntax</b>                                     | <pre>show isis route &lt;destination&gt; &lt;inet   inet6&gt; &lt;instance instance-name&gt; &lt;logical-system (all   logical-system-name)&gt; &lt;topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show isis route &lt;destination&gt; &lt;inet   inet6&gt; &lt;instance instance-name&gt; &lt;topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)&gt;</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Release Information</b>                        | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>                                | Display the routes in the IS-IS routing table.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Options</b>                                    | <p><b>none</b>—Display all routes in the IS-IS routing table for all supported address families for all routing instances.</p> <p><b>destination</b>—(Optional) Destination address for the route.</p> <p><b>inet   inet6</b>—(Optional) Display inet (IPv4) or inet6 (IPv6) routes, respectively.</p> <p><b>instance instance-name</b>—(Optional) Display routes for the specified routing instance only.</p> <p><b>logical-system (all   logical-system-name)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> <p><b>topology (ipv4-multicast   ipv6-multicast   ipv6-unicast   unicast)</b>—(Optional) Display routes for the specified topology only, or use unicast to display information, if available, for both IPv4 and IPv6 unicast topologies.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>List of Sample Output</b>                      | <a href="#">show isis route logical-system on page 192</a><br><a href="#">show isis route floodgroup on page 192</a><br><a href="#">show isis route (CLNS) on page 193</a><br><a href="#">show isis route on page 193</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Output Fields</b>                              | <p><a href="#">Table 12 on page 192</a> describes the output fields for the <b>show isis route</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 12: show isis route Output Fields

| Field Name             | Field Description                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current version</b> | Number of the current version of the IS-IS routing table.                                                                                  |
| <b>L1</b>              | Version of Level 1 SPF that was run.                                                                                                       |
| <b>L2</b>              | Version of Level 2 SPF that was run.                                                                                                       |
| <b>Prefix or Label</b> | Destination of the route.                                                                                                                  |
| <b>L</b>               | IS-IS level: <ul style="list-style-type: none"> <li>• 1—Level 1 only</li> <li>• 2—Level 2 only</li> <li>• 3—Level 1 and Level 2</li> </ul> |
| <b>Version</b>         | Version of SPF that generated the route.                                                                                                   |
| <b>Metric</b>          | Metric value associated with the route.                                                                                                    |
| <b>Type</b>            | Metric type: <b>int</b> (internal) or <b>ext</b> (external).                                                                               |
| <b>Interface</b>       | Interface to the next hop.                                                                                                                 |
| <b>Via</b>             | System identifier of the next hop, displayed as a name if possible.                                                                        |
| <b>ISO Routes</b>      | ISO routing table entries.                                                                                                                 |
| <b>snpa</b>            | MAC address.                                                                                                                               |

## Sample Output

### show isis route logical-system

```

user@host> show isis route logical-system ls1
IS-IS routing table Current version: L1: 8 L2: 11
Prefix L Version Metric Type Interface Via
10.9.7.0/30 2 11 20 int gr-0/2/0.0 h
10.9.201.1/32 2 11 60 int gr-0/2/0.0 h
IPv6 Unicast IS-IS routing table Current version: L1: 9 L2: 11
Prefix L Version Metric Type Interface Via
8009:3::a09:3200/126 2 11 20 int gr-0/2/0.0 h

```

### show isis route floodgroup

```

user@R2> show isis route floodgroup 49.0001
IS-IS routing table Current version: L1: 14 L2: 27
IPv4/IPv6 Routes

Prefix Backup Score L Version Metric Type Interface NH Via
0.0.0.0/0 1 14 10 int ge-0/0/8.0 IPv4 R1

```



```

81.3.3.3/32 1 14 10 int ge-0/0/8.0 IPV4 R1
128.220.17.202/32 1 14 10 int ge-0/0/8.0 IPV4 R1

```

### show isis route (CLNS)

```

user@host> show isis route
IS-IS routing table Current version: L1: 10 L2: 8
IPv4/IPv6 Routes
Prefix L Version Metric Type Interface Via
0.0.0.0/0 1 10 10 int fe-0/0/1.0 ISIS.0
ISO Routes
Prefix L Version Metric Type Interface Via snpa
0/0
 1 10 10 int fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001/104
 1 10 0 int
47.0005.80ff.f800.0000.0108.0001.1921.6800.4001/152
 1 10 10 int fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0001.1921.6800.4002/152
 1 10 20 int fe-0/0/1.0 isis.0 0:12:0:34:0:56
47.0005.80ff.f800.0000.0108.0002/104
 1 10 0 int
47.0005.80ff.f800.0000.0108.0002.1921.6800.4001/152
 1 10 10 int fe-0/0/1.0 isis.0 0:12:0:34:0:56

```

### show isis route

```

user@host> show isis route

IS-IS routing table Current version: L1: 4 L2: 13
IPv4/IPv6 Routes

Prefix L Version Metric Type Interface NH Via
10.255.71.52/32 2 13 10 int ae0.0 IPV4 camaro

10.255.71.238/32 2 13 20 int so-6/0/0.0 IPV4 olympic
 as0.0 IPV4 glacier

10.255.71.239/32 2 13 20 int so-6/0/0.0 IPV4 olympic
 ae0.0 IPV4 camaro

10.255.71.242/32 2 13 10 int as0.0 IPV4 glacier

10.255.71.243/32 2 13 10 int so-6/0/0.0 IPV4 olympic

12.13.0.0/30 2 13 20 int so-6/0/0.0 IPV4 olympic

12.15.0.0/30 2 13 20 int so-6/0/0.0 IPV4 olympic

13.15.0.0/30 2 13 30 int ae0.0 IPV4 camaro
 so-6/0/0.0 IPV4 olympic
 as0.0 IPV4 glacier

13.16.0.0/30 2 13 25 int as0.0 IPV4 glacier

14.15.0.0/30 2 13 20 int ae0.0 IPV4 camaro

```

|                         |   |    |    |     |            |              |
|-------------------------|---|----|----|-----|------------|--------------|
| 192.2.1.0/30            | 2 | 13 | 30 | int | so-6/0/0.0 | IPV4 olympic |
|                         |   |    |    |     | as0.0      | IPV4 glacier |
| 1eee::/64               | 2 | 13 | 30 | int | so-6/0/0.0 | IPV6 olympic |
|                         |   |    |    |     | as0.0      | IPV6 glacier |
| abcd::10:255:71:52/128  | 2 | 13 | 10 | int | ae0.0      | IPV6 camaro  |
| abcd::10:255:71:238/128 | 2 | 13 | 20 | int | so-6/0/0.0 | IPV6 olympic |
|                         |   |    |    |     | as0.0      | IPV6 glacier |
| abcd::10:255:71:239/128 | 2 | 13 | 20 | int | so-6/0/0.0 | IPV6 olympic |
|                         |   |    |    |     | ae0.0      | IPV6 camaro  |
| abcd::10:255:71:242/128 | 2 | 13 | 10 | int | as0.0      | IPV6 glacier |
| abcd::10:255:71:243/128 | 2 | 13 | 10 | int | so-6/0/0.0 | IPV6 olympic |

## MPLS Routes

| Label                       | L | Version | Metric | Type | Interface   | NH   | Via            |
|-----------------------------|---|---------|--------|------|-------------|------|----------------|
| 300032 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300048 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300064 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300080 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300096 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.12 | MPLS | Direct forward |
| to 10.0.6.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 299920 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299936 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299952 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299968 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.14 | MPLS | Direct forward |
| to 10.0.10.70(pro-bng3-c-F) |   |         |        |      |             |      |                |
| 299984 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300000 /52                  | 1 | 27      | 0      | int  | lt-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |
| 300016 /52                  | 2 | 38      | 0      | int  | lt-1/2/0.13 | MPLS | Direct forward |
| to 10.0.7.60(pro-bng3-c-E)  |   |         |        |      |             |      |                |

## show isis statistics

---

|                                                   |                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>List of Syntax</b>                             | <a href="#">Syntax on page 195</a><br><a href="#">Syntax (EX Series Switches and QFX Series) on page 195</a>                                                                                                                                                                                                                                             |
| <b>Syntax</b>                                     | <pre>show isis statistics &lt;instance <i>instance-name</i>&gt; &lt;logical-system (all   <i>logical-system-name</i>)&gt;</pre>                                                                                                                                                                                                                          |
| <b>Syntax (EX Series Switches and QFX Series)</b> | <pre>show isis statistics &lt;instance <i>instance-name</i>&gt;</pre>                                                                                                                                                                                                                                                                                    |
| <b>Release Information</b>                        | <p>Command introduced before Junos OS Release 7.4.</p> <p>Command introduced in Junos OS Release 9.0 for EX Series switches.</p> <p>Command introduced in Junos OS Release 12.1 for the QFX Series.</p> <p>Command introduced in Junos OS Release 14.1X53-D20 for the OCX Series.</p>                                                                    |
| <b>Description</b>                                | Display statistics about IS-IS traffic.                                                                                                                                                                                                                                                                                                                  |
| <b>Options</b>                                    | <p><b>none</b>—Display IS-IS traffic statistics for all routing instances.</p> <p><b>instance <i>instance-name</i></b>—(Optional) Display statistics for the specified routing instance.</p> <p><b>logical-system (all   <i>logical-system-name</i>)</b>—(Optional) Perform this operation on all logical systems or on a particular logical system.</p> |
| <b>Required Privilege Level</b>                   | view                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Documentation</b>                      | <ul style="list-style-type: none"> <li>• <a href="#">clear isis statistics on page 158</a></li> </ul>                                                                                                                                                                                                                                                    |
| <b>List of Sample Output</b>                      | <a href="#">show isis statistics on page 197</a>                                                                                                                                                                                                                                                                                                         |
| <b>Output Fields</b>                              | <p><a href="#">Table 13 on page 196</a> describes the output fields for the <b>show isis statistics</b> command. Output fields are listed in the approximate order in which they appear.</p>                                                                                                                                                             |

Table 13: show isis statistics Output Fields

| Field Name                  | Field Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PDU type                    | <p>PDU type:</p> <ul style="list-style-type: none"> <li>• <b>CSNP</b>—Complete sequence number PDUs contain a complete list of all link-state PDUs in the IS-IS database. CSNPs are sent periodically on all links, and the receiving systems use the information in the CSNP to update and synchronize their link-state PDU databases. The designated router multicasts CSNPs on broadcast links in place of sending explicit acknowledgments for each link-state PDU.</li> <li>• <b>IIH</b>—IS-IS hello packets are broadcast to discover the identity of neighboring IS-IS systems and to determine whether the neighbors are Level 1 or Level 2 intermediate systems.</li> <li>• <b>LSP</b>—Link-state PDUs contain information about the state of adjacencies to neighboring IS-IS systems. Link-state PDUs are flooded periodically throughout an area.</li> <li>• <b>PSNP</b>—Partial sequence number PDUs are sent multicast by a receiver when it detects that it is missing a link-state PDU (when its link-state PDU database is out of date). The receiver sends a PSNP to the system that transmitted the CSNP, effectively requesting that the missing link-state PDU be transmitted. That routing device, in turn, forwards the missing link-state PDU to the requesting routing device.</li> <li>• <b>Unknown</b>—The PDU type is unknown.</li> </ul> |
| Received                    | Number of PDUs received since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Processed                   | Number of PDUs received less the number dropped.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Drops                       | Number of PDUs dropped.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Sent                        | Number of PDUs transmitted since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Rexmit                      | Number of PDUs retransmitted since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Total packets received/sent | Total number of PDUs received and transmitted since IS-IS started or since the statistics were set to zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SNP queue length            | Number of CSPN and PSNP packets currently waiting in the queue for processing. This value is almost always 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| LSP queue length            | Number of link-state PDUs waiting in the queue for processing. This value is almost always 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SPF runs                    | Number of shortest-path-first (SPF) calculations that have been performed. If this number is incrementing rapidly, it indicates that the network is unstable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Fragments rebuilt           | Number of link-state PDU fragments that the local system has computed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| LSP regenerations           | Number of link-state PDUs that have been regenerated. A link-state PDU is regenerated when it is nearing the end of its lifetime and it has not changed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Purges initiated            | Number of purges that the system initiated. A purge is initiated if the software decides that a link-state PDU must be removed from the network.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## Sample Output

### show isis statistics

```
user@host> show isis statistics
```

```
IS-IS statistics for merino:
```

| PDU type | Received | Processed | Drops | Sent   | Rexmit |
|----------|----------|-----------|-------|--------|--------|
| LSP      | 12227    | 12227     | 0     | 8184   | 683    |
| IIH      | 113808   | 113808    | 0     | 115817 | 0      |
| CSNP     | 198868   | 198868    | 0     | 198934 | 0      |
| PSNP     | 6985     | 6979      | 6     | 8274   | 0      |
| Unknown  | 0        | 0         | 0     | 0      | 0      |
| Totals   | 331888   | 331882    | 6     | 331209 | 683    |

```
Total packets received: 331888 Sent: 331892
```

```
SNP queue length: 0 Drops: 0
LSP queue length: 0 Drops: 0
```

```
SPF runs: 1014
Fragments rebuilt: 1038
LSP regenerations: 425
Purges initiated: 0
```

